



Date: Oct 9 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 870 MHz
 Modulation: FM modulation with an external 9600 b/s (random data source).
99 % OBW

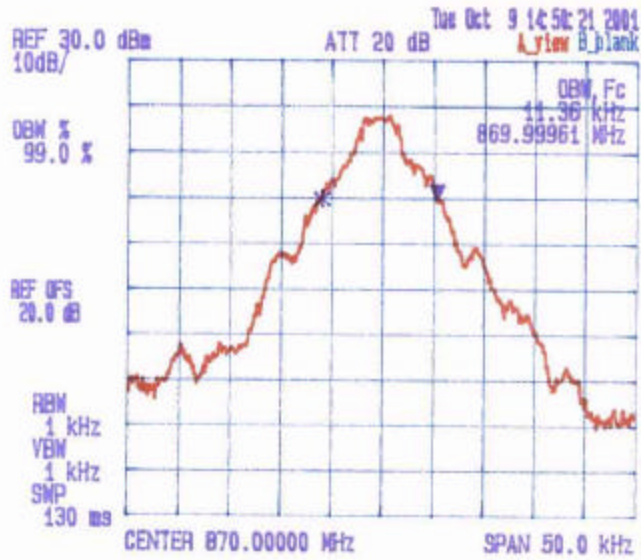



RF OUTPUT

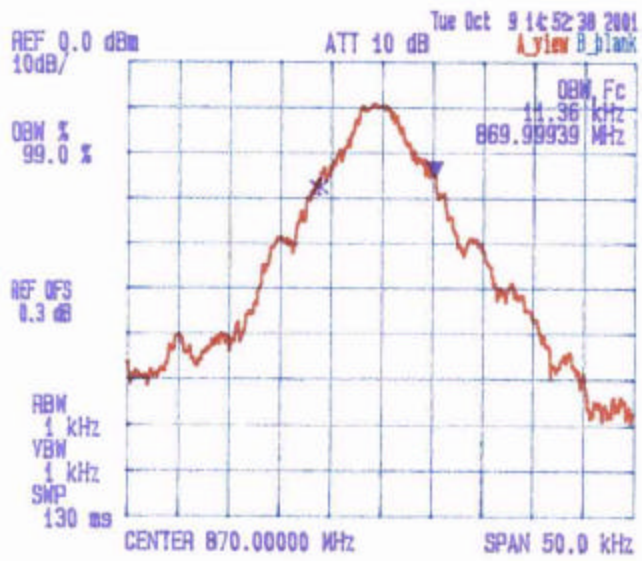

RF INPUT



Date: Oct 9 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFBIR01
 Frequency : 857.35 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

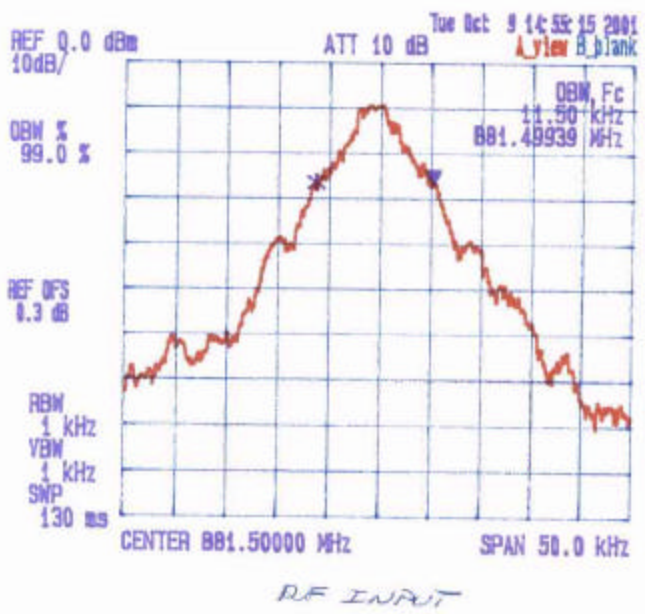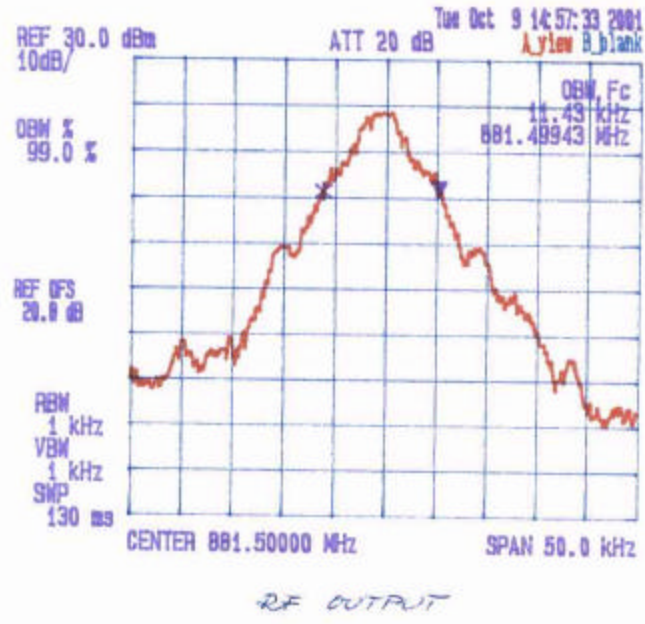

Date: Oct. 2001
 Tested by: Hung Trinh



KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency : 892.3 MHz
 Modulation: FM modulation with an external 9600 b/s random data source.
 99 % OBW

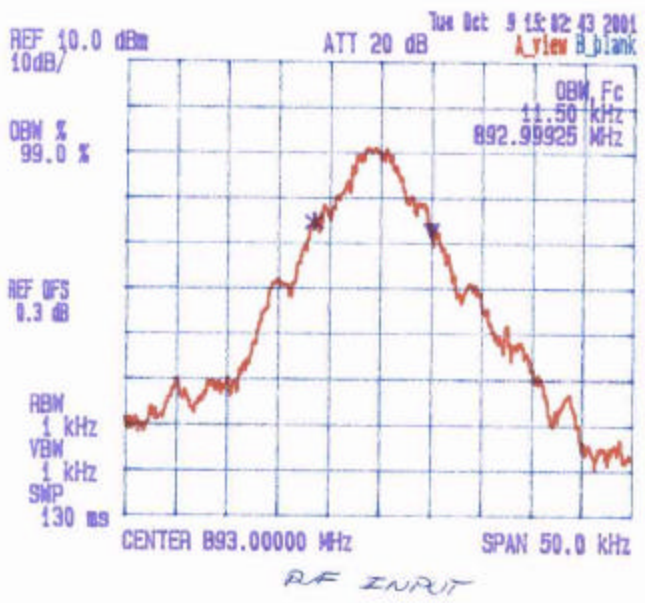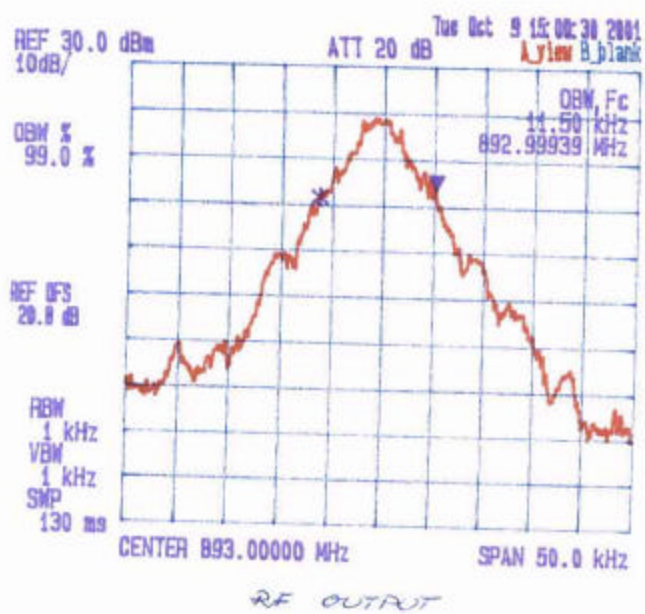

Date: Oct 9 2001
Tested by: Hung Trinh



KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01

Frequency: 881.5 MHz
Modulation: FM modulation with 2.5kHz sine wave signal
99% OBW

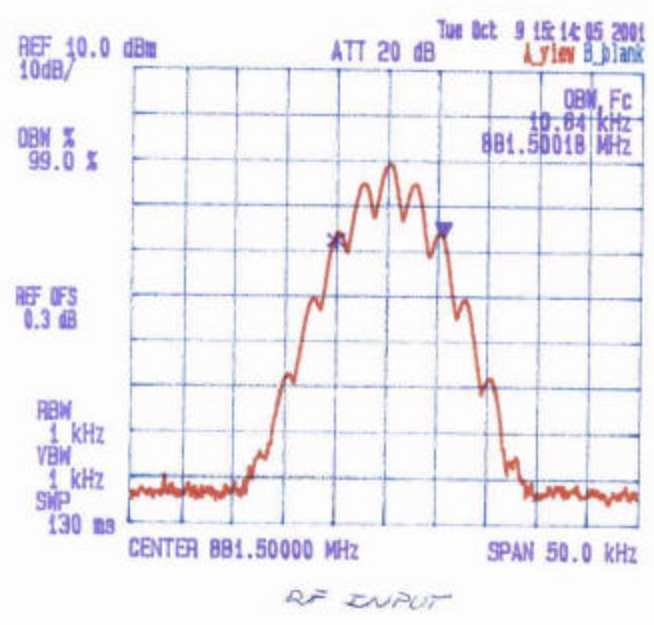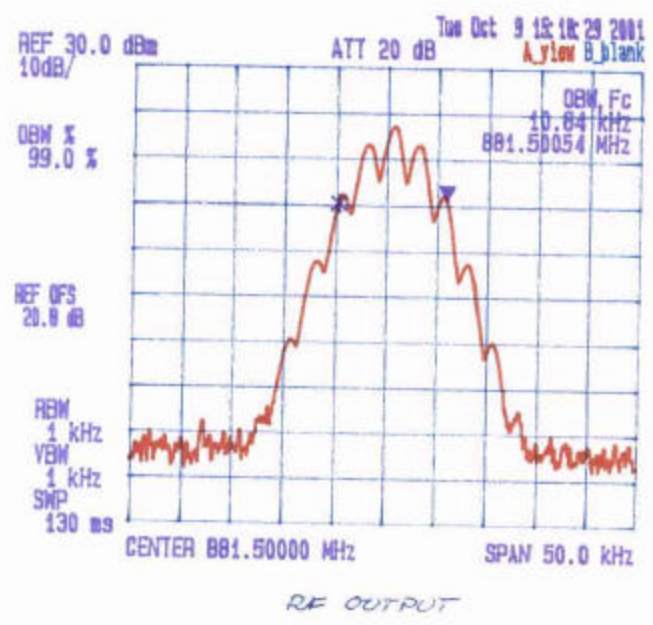

Date: Oct. 9, 2001
 Tested by: Hung Trinh

KAVAL TELECOM INC.
 SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
 Frequency: 892.3 MHz
 Modulation: FM modulation with 2.5kHz Sine wave signal
 99 % OBW

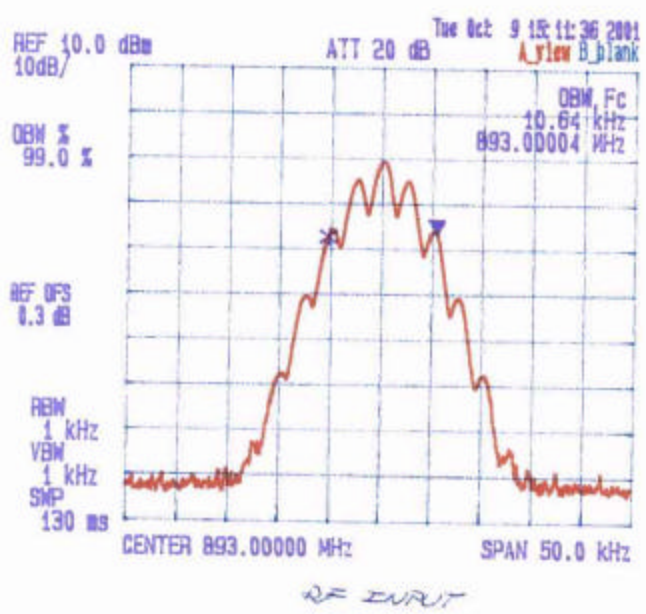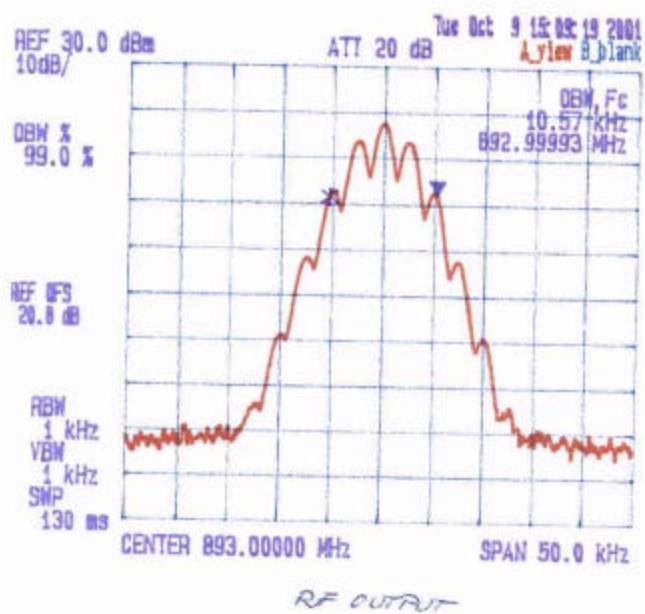

Date: Oct. 9, 2001
Tested by: Hung Trinh

KAVAL TELECOM INC.
SATELLINK RF-FIBER INTERFACE MODULES, MODEL LNKFIB-R01
Frequency: 870 MHz
Modulation: FM modulation with 2.5kHz Sine wave signal
99 % OBW

