



31040/SIT



C-1376



46390-2049



200093-0



00-034



SL2-IN-E-1119R



entela

3000 Bristol Circle,  
Oakville, Ontario,  
Canada L6H 6G4

Tel.: (905) 829-1570  
Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com)

June 17, 2003

**FEDERAL COMMUNICATIONS COMMISSION**

7435 Oakland Mills Road  
Columbia, MD 21046  
USA

**Subject:** Type Acceptance Application under FCC CFR 47, Parts 2, 22, 24 and 90 - Non-Broadcast Bi-directional Radio Amplifiers Operating in the frequency bands 1930-1990 MHz (PCS), 869-894 MHz (Base Cellular), 928-941 MHz (Paging) and 851-869 MHz (Trunking).

**Applicant:** KAVAL WIRELESS TECHNOLOGIES INC.  
**Product:** SATELINK RF - FIBER INTERFACE MODULE  
**Model:** LNKFIB-R  
**FCC ID:** H6M-LNKFIB-RA

Dear Sir/Madam,

As appointed agent for **KAVAL WIRELESS TECHNOLOGIES INC.**, we would like to submit the application to the Federal Communications Commission for certification of the above product. Please review all necessary files uploaded to FCC OET site for detailed information.

Note:

This application for the extension of the frequency band from 851-869 MHz to 851-869 MHz of the FCC Grant FCC ID: H6M-LNKFIB-R certified by FCC on Oct. 23, 2003. There is no mechanical/electrical design change for this product.

Since there is no mechanical/electrical change applied to this device for extension of operating band from 851-869 MHz to 851-869 MHz. The test plan was discussed with Mr. Mr. Steven Dayhoff at FCC and agreed to perform the following tests at 869 MHz:

- (1) RF Output Power
- (2) 99% Occupied BW
- (3) Emission Mask
- (4) Transmitter Spurious Conducted Emissions
- (5) Transmitter Spurious Radiated Emissions

Other tests are referred to the original test reports that are re-submitted to FCC for review.

If you have any queries, please do not hesitate to contact us by our TOLL FREE numbers:

OUR TELEPHONE NO.: 1-877-765-4173

Yours truly,

Tri Minh Luu, P. Eng.,  
V.P., Engineering



June 17, 2003

**KAVAL WIRELESS TECHNOLOGIES INC.**

60 Gough Road  
Markham, Ontario  
Canada, L3R 8X7

**Attn.: Mr. Alan Aslett**

**Subject: Certification Testing in accordance with FCC CFR 47, Parts 2 and 90 - Non-Broadcast Bi-directional Radio Amplifiers Operating in the frequency bands 851-869 MHz (Trunking).**

**Product: SATELINK RF - FIBER INTERFACE MODULE**  
**Model: LNKFIB-R**  
**FCC ID: H6M-LNKFIB-RA**



31040/SIT



C-1376



46390-2049



200093-0



00-034



SL2-IN-E-1119R



3000 Bristol Circle,  
Oakville, Ontario,  
Canada L6H 6G4

Tel.: (905) 829-1570  
Fax.: (905) 829-8050


Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com)

Dear Mr. Aslett,

The product sample has been tested in accordance with **FCC CFR 47, Part 90 - Non-Broadcast Bi-directional Radio Amplifiers Operating in the frequency bands 851-869 MHz (Trunking)**, and the results and observation were recorded in the engineering report, Our File No.: KTI-028FCC

Enclosed you will find copy of the engineering report. If you have any queries, please do not hesitate to contact us.


Yours truly,



Tri Minh Luu, P.Eng  
Vice President - Engineering

Encl.

# ENGINEERING TEST REPORT



## SATELINK RF - FIBER INTERFACE MODULE

Model No.: LNKFIB-R

FCC ID: H6M-LNKFIB-RA

*Applicant:* **KAVAL WIRELESS TECHNOLOGIES INC.**  
60 Gough Road  
Markham, Ontario  
Canada, L3R 8X7

*Tested in Accordance With*

**Federal Communications Commission (FCC)**  
**CFR 47, Parts 2, 22, 24 & 90**

**UltraTech's File No.: KTI-028FCC**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: June 17, 2003



Report Prepared by: Tri M. Luu

Tested by: Mr. Hung Trinh, EMI/RFI Technician

Issued Date: June 17, 2003

Test Dates: June 10 -11, 2003

*The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R



00-034



## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>EXHIBIT 1. SUBMITTAL CHECK LIST.....</b>   | <b>1</b>  |
| <b>EXHIBIT 2. INTRODUCTION .....</b>  | <b>2</b>  |
| 2.1. SCOPE.....   | 2         |
| 2.2. RELATED SUBMITAL(S)/GRANT(S).....  | 2         |
| 2.3. NORMATIVE REFERENCES .....   | 2         |
| <b>EXHIBIT 3. PERFORMANCE ASSESSMENT .....</b>                                      | <b>3</b>  |
| 3.1. CLIENT INFORMATION .....   | 3         |
| 3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....                                    | 3         |
| 3.3. EUT'S TECHNICAL SPECIFICATIONS.....  | 4         |
| 3.4. LIST OF EUT'S PORTS .....  | 5         |
| 3.5. ANCILLARY EQUIPMENT .....  | 5         |
| 3.6. TEST SETUP .....   | 6         |
| <b>EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>     | <b>7</b>  |
| 4.1. CLIMATE TEST CONDITIONS .....  | 7         |
| 4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS .....               | 7         |
| <b>EXHIBIT 5. SUMMARY OF TEST RESULTS .....</b>                                     | <b>8</b>  |
| 5.1. LOCATION OF TESTS .....  | 8         |
| 5.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....                     | 8         |
| 5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....            | 9         |
| 5.4. DEVIATION OF STANDARD TEST PROCEDURES .....                                    | 9         |
| <b>EXHIBIT 6. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b> | <b>10</b> |
| 6.1. TEST PROCEDURES .....  | 10        |
| 6.2. MEASUREMENT UNCERTAINTIES .....  | 10        |
| 6.3. MEASUREMENT EQUIPMENT USED:.....   | 10        |
| 6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:.....              | 10        |
| 6.5. RF OUTPUT PORT SUBJECT TO TESTS.....   | 11        |
| 6.5.1. <i>Test Equipment List</i> .....   | 11        |
| 6.5.2. <i>Test Arrangement</i> .....  | 11        |
| 6.5.3. <i>Test Data</i> .....   | 12        |
| 6.5.4. <i>RF Output port Port used for Worst Case Test</i> .....                    | 12        |
| 6.6. RF POWER OUTPUTS & INTERMODULATION @ FCC 2.1046, 22.913, 24.232 & 90.205.....  | 13        |
| 6.6.1. <i>Limits</i> .....  | 13        |
| 6.6.2. <i>Limits @ FCC 24.232</i> .....   | 13        |
| 6.6.3. <i>Limits @ FCC 90.205</i> .....   | 13        |
| 6.6.4. <i>Method of Measurements</i> .....  | 13        |
| 6.6.5. <i>Test Equipment List</i> .....   | 14        |
| 6.6.6. <i>Test Arrangement</i> .....  | 14        |
| 6.6.7. <i>Test Data</i> .....   | 15        |
| 6.7. EMISSION MASK @ FCC 2.1049, 22.217, 24.238 & 90.210 .....                      | 16        |
| 6.7.1. <i>Limits</i> .....  | 16        |

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

|                   |  |           |
|-------------------|--|-----------|
| 6.7.2.            | Method of Measurements.....  | 16        |
| 6.7.3.            | Test Equipment List.....   | 16        |
| 6.7.4.            | Test Arrangement.....  | 17        |
| 6.7.5.            | Test Data.....   | 17        |
| 6.8.              | TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 2.1049, 22.217, 24.238 & 90.210 22 |           |
| 6.8.1.            | Limits.....  | 22        |
| 6.8.2.            | Method of Measurements.....  | 22        |
| 6.8.3.            | Test Equipment List.....   | 22        |
| 6.8.4.            | Test Arrangement.....  | 23        |
| 6.8.5.            | Test Data.....   | 24        |
| 6.9.              | TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 2.1049, 22.217, 24.238 & 90.210.....              | 28        |
| 6.9.1.            | Limits.....  | 28        |
| 6.9.2.            | Method of Measurements.....  | 28        |
| 6.9.3.            | Test Equipment List.....   | 28        |
| 6.9.4.            | Test Arrangement.....  | 29        |
| 6.10.             | FREQUENCY STABILITY @ FCC §2.1055 & §90.213.....   | 31        |
| 6.10.1.           | Limits.....  | 31        |
| 6.10.2.           | Method of Measurements.....  | 31        |
| 6.10.3.           | Test Equipment List.....   | 31        |
| 6.10.4.           | Test Arrangement.....  | 31        |
| 6.10.5.           | Test Data.....   | 32        |
| <b>EXHIBIT 7.</b> | <b>MEASUREMENT UNCERTAINTY.....</b>  | <b>33</b> |
| 7.1.              | RADIATED EMISSION MEASUREMENT UNCERTAINTY.....   | 33        |
| <b>EXHIBIT 8.</b> | <b>GENERAL MEASUREMENT METHODS.....</b>  | <b>34</b> |
| 8.1.              | SPURIOUS EMISSIONS (CONDUCTED).....  | 34        |
| 8.2.              | SPURIOUS EMISSIONS (RADIATED).....   | 34        |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 1. SUBMITTAL CHECK LIST

| Annex No. | Exhibit Type  | Description of Contents  | Quality Check (OK) |
|-----------|---|--|--------------------|
| --        | FCC Original Test Report, File # KTI-015FCC<br><br>And<br><br>Additional test Report KTI-028FCC | <ul style="list-style-type: none"> <li>Exhibit 1: Submittal check lists</li> <li>Exhibit 2: Introduction</li> <li>Exhibit 3: Performance Assessment</li> <li>Exhibit 4: EUT Operation and Configuration during Tests</li> <li>Exhibit 5: Summary of test Results</li> <li>Exhibit 6: Measurement Data</li> <li>Exhibit 7: Measurement Uncertainty</li> <li>Exhibit 8: Measurement Methods</li> </ul> | OK                 |
| 1         | Test Report - Plots of Measurement Data   | Annex 1A - I.M., 20dB BW of the Amplifier & Spurious Emissions: Plots # 1 to 126<br>Annex 1B – Emission Mask Plots # 1 to 30   | OK<br>OK           |
| 2         | Test Setup Photos   | Photos # 1 to 2  | OK                 |
| 3         | External Photos of EUT  | Photos # 1 to 5  | OK                 |
| 4         | Internal Photos of EUT  | Photos of 1 to 19  | OK                 |
| 5         | Cover Letters   | <ul style="list-style-type: none"> <li>Letter from Ultratech for Certification Request</li> <li>Letter from the Applicant to appoint Ultratech to act as an agent</li> <li>Letter from the Applicant to request for Confidentiality Filing</li> </ul>  | OK<br>OK<br>OK     |
| 6         | ID Label/Location Info  | ID Label<br>Location of ID Label   | OK<br>OK           |
| 7         | Block Diagrams  | Refer to Users Manual , Annex 11   | OK                 |
| 8         | Schematic Diagrams  | Schematic diagrams # 1 to 4 (SCH000000039, SCH000000046, SCH000000047 & SCH000000048)  | OK                 |
| 9         | Parts List/Tune Up Info   |  | None               |
| 10        | Operational Description   | Refer to Users Manual, Annex 11  | OK                 |
| 11        | Users Manual  |  | OK                 |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 2. INTRODUCTION

### 2.1. SCOPE

|                         |  |
|-------------------------|--|
| <b>Reference:</b>       | FCC Parts 2, 22, 24 and 90   |
| <b>Title:</b>           | Telecommunication - Code of Federal Regulations, CFR 47, Parts 2, 22, 24 & 90  |
| <b>Purpose of Test:</b> | To obtain FCC Authorization for extending the existing FCC operating frequency band from 851-869 MHz to 851-869 MHz.   |
| <b>Test Procedures:</b> | Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

### 2.2. RELATED SUBMITAL(S)/GRANT(S)

None

### 2.3. NORMATIVE REFERENCES

| Publication                 | Year         | Title   |
|-----------------------------|--------------|---|
| FCC CFR Parts 2, 22, 24, 90 | 2002         | Code of Federal Regulations – Telecommunication   |
| ANSI C63.4                  | 1992         | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| CISPR 22 & EN 55022         | 1997<br>1998 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment   |
| CISPR 16-1                  |              | Specification for Radio Disturbance and Immunity measuring apparatus and methods  |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 3. PERFORMANCE ASSESSMENT

### 3.1. CLIENT INFORMATION

| APPLICANT              |  |
|------------------------|--|
| <b>Name:</b>           | KAVAL WIRELESS TECHNOLOGIES INC.   |
| <b>Address:</b>        | 60 Gough Road<br>Markham, Ontario<br>Canada, L3R 8X7   |
| <b>Contact Person:</b> | Mr. Alan Aslett<br>Phone #: 905-946-3397<br>Fax #: 905-946-3392<br>Email Address: <a href="mailto:asslet@kaval.com">asslet@kaval.com</a> |

| MANUFACTURER           |  |
|------------------------|--|
| <b>Name:</b>           | KAVAL WIRELESS TECHNOLOGIES INC.   |
| <b>Address:</b>        | 60 Gough Road<br>Markham, Ontario<br>Canada, L3R 8X7   |
| <b>Contact Person:</b> | Mr. Alan Aslett<br>Phone #: 905-946-3397<br>Fax #: 905-946-3392<br>Email Address: <a href="mailto:asslet@kaval.com">asslet@kaval.com</a> |

### 3.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

|   |   |
|---|---|
| <b>Brand Name:</b>                          | KAVAL WIRELESS TECHNOLOGIES INC.  |
| <b>Product Name:</b>                        | SATELINK RF - FIBER INTERFACE MODULE  |
| <b>Model Name or Number:</b>                | LNKFIB-R  |
| <b>Serial Number:</b>                       | Pre-production  |
| <b>Type of Equipment:</b>                   | Non-broadcast Bi-directional Amplifier  |
| <b>External Power Supply:</b>               | None  |
| <b>Transmitting/Receiving Antenna Type:</b> | Maximum 8 non-integral antennas can be used with the SatelLink LNKFIB-R bi-directional amplifier. |
| <b>Primary User Functions of EUT:</b>       | Bi-directional amplifier for use with CDMA,GSM and TDMA radio signals.                            |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 3.3. EUT'S TECHNICAL SPECIFICATIONS

| <b>TRANSMITTER</b>  |   |
|---|---|
| <b>Equipment Type:</b>  | Base station (fixed use)  |
| <b>Intended Operating Environment:</b>                          | [x ] Commercial<br>[ x] Light Industry & Heavy Industry   |
| <b>Power Supply Requirement:</b>                                | 120V 60Hz   |
| <b>Operating Frequency Range &amp; RF Nominal Output Power:</b> | <ul style="list-style-type: none"> <li>▪ <b>1930 – 1990 MHz (PCS) WITH 15 MHz SWITCHING BAND</b></li> <li>* 1 input/output signal: 0.112 Watts</li> <li>* 2 input/output signals: 0.098 Watts</li> <li>* 3 input/output signals: 0.051 Watts</li> <li>▪ <b>869 – 894 MHz (Base Cellular)</b></li> <li>* 1 input/output signal: 0.302 Watts</li> <li>* 2 input/output signals: 0.234 Watts</li> <li>* 3 input/output signals: 0.120 Watts</li> <li>* 4 input/output signals: 0.107 Watts</li> <li>▪ <b>928 – 941 MHz (Paging)</b></li> <li>* 1 input/output signal: 0.245 Watts</li> <li>* 2 input/output signals: 0.186 Watts</li> <li>* 3 input/output signals: 0.098 Watts</li> <li>* 4 input/output signals: 0.0.81 Watts</li> <li>▪ <b>851 – 869 MHz (Trunking)</b></li> <li>* 1 input/output signal: 0.347 Watts</li> <li>* 2 input/output signals: 0.251 Watts</li> <li>* 3 input/output signals: 0.161 Watts</li> <li>* 4 input/output signals: 0.123 Watts</li> </ul> <p>Please Page 12 of Users Manual for Power Ratings for 1 to 30 signal inputs/outputs</p> |
| <b>Gain</b>   | +28 dB nominal  |
| <b>RF Output Impedance:</b>                                     | 50 Ohms   |
| <b>Channel Spacing:</b>   | N/A   |
| <b>Occupied Bandwidth (99%):</b>                                | N/A   |
| <b>Emission Designation*:</b>                                   | EXTENDER  |
| <b>Antenna Connector Type:</b>                                  | SMA   |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.4. LIST OF EUT'S PORTS

| Port Number | EUT's Port Description                            | Number of Identical Ports | Connector Type | Cable Type (Shielded/Non-shielded) |
|-------------|---|---------------------------|----------------|------------------------------------|
| 1           | 1 RF Input Port (PCS, Cellular & Paging/Trunking) | 1                         | SMA            | Shielded                           |
| 2           | 6 RF Output Ports                                 | 1                         | SMA            | Shielded                           |
| 3           | RS-232 (Note 2)                                   | 1                         | DB             | Shielded                           |

**NOTES:**

- (1) *Ports of the EUT which in normal operation were connected to ancillary equipment through interconnecting cables via a representative interconnecting cable to simulate the input/output characteristics. RF input/output was correctly terminated to the 50 Ohm RF Load.*
- (2) *Ports, which are for factory/technical services uses only*

### 3.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

| Ancillary Equipment # 1  |   |
|--------------------------|---|
| Description:             | ThinkPad Laptop   |
| Brand name:              | IBM   |
| Model Name or Number:    | 2625  |
| FCC ID:                  | ANOKAJIPENCP  |
| Serial Number:           | 78-WWM4A  |
| Connected to EUT's Port: | RS-232  |
| Notes:                   | This laptop computer is used for technical services only; therefore, and it is used for control purpose only but not for testing. |


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 3.6. TEST SETUP

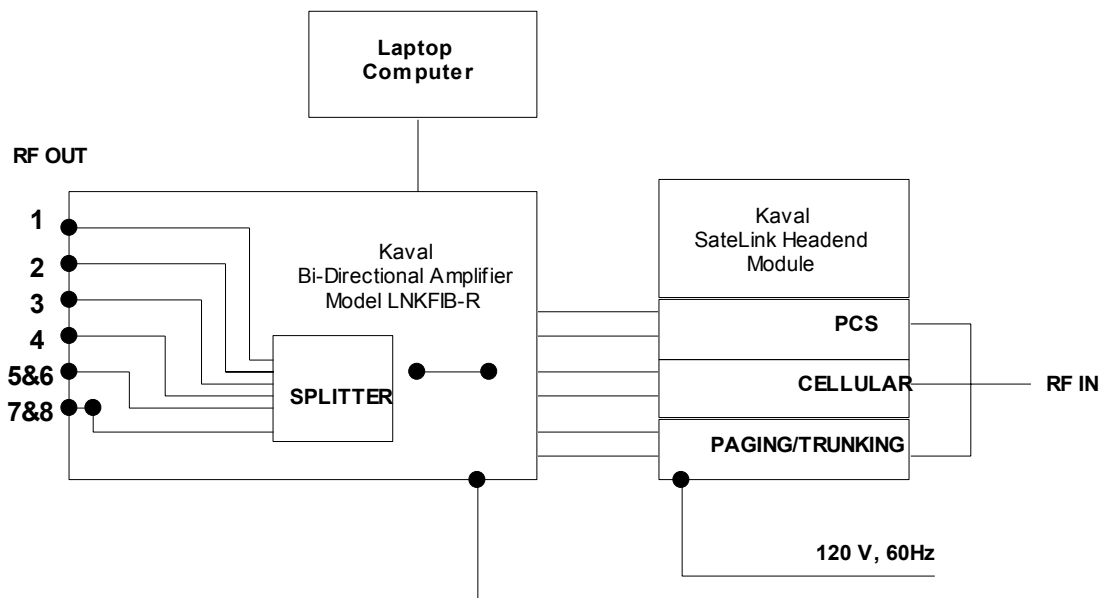

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 4. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 4.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

|                     |           |
|---------------------|-----------|
| Temperature:        | 21°C      |
| Humidity:           | 51%       |
| Pressure:           | 102 kPa   |
| Power input source: | 120V 60Hz |

### 4.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

|                                  |  |
|----------------------------------|--|
| <b>Operating Modes:</b>          | The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data. |
| <b>Special Test Software:</b>    | Utility software provided by Kaval was used for selecting frequency bands of the amplifier.                              |
| <b>Special Hardware Used:</b>    | None   |
| <b>Transmitter Test Antenna:</b> | The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.                                     |

| Transmitter Test Signals   |  |
|--|--|
| <b>Frequency Band(s):</b>  | Near lowest, near middle & near highest frequencies in each frequency bands that the transmitter covers:   |
| <ul style="list-style-type: none"> <li>▪ 1930 – 1990 MHz (PCS)</li> <li>▪ 869 – 894 MHz (Base Cellular)</li> <li>▪ 928 – 941 MHz (Paging)</li> <li>▪ 851 – 869 MHz (Trunking)</li> </ul> | <ul style="list-style-type: none"> <li>▪ 1930, 1960 and 1990 MHz</li> <li>▪ 869, 881.5 and 894 MHz</li> <li>▪ 928, 934.5 and 941 MHz</li> <li>▪ 851, 858.475, 869 MHz</li> </ul>   |
| <b>Transmitter Wanted Output Test Signals:</b>   |  |
| <ul style="list-style-type: none"> <li>▪ RF Power Output (measured maximum output power):</li> <li>▪ Normal Test Modulation</li> <li>▪ Modulating signal source:</li> </ul>              | <ul style="list-style-type: none"> <li>▪ The EUT was adjusted for maximum gain output by the manufacturer.</li> <li>▪ intended for use with RF input signal sources with CDMA, GSM and TDMA modulation</li> <li>▪ Internal/external</li> </ul> |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 5. SUMMARY OF TEST RESULTS

### 5.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Sep. 20, 1999.

### 5.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

| FCC PARAGRAPH.   | TEST REQUIREMENTS  | APPLICABILITY (YES/NO)  |
|--|--|---|
| 90.205 & 2.1046  | RF Power Output  | Yes   |
| 1.1307, 1.1310, 2.1091 & 2.1093  | RF Exposure Limit  | N/A for base station  |
| 90.213 & 2.1055  | Frequency Stability                                      | Yes   |
| 90.242(b)(8) & 2.1047(a)   | Audio Frequency Response                                 | Not applicable for Amplifier since the output signal tracks input signal exactly.                         |
| 90.210 & 2.1047(b)   | Modulation Limiting                                      | Not applicable for Amplifier since the output signal tracks input signal exactly.                         |
| 90.209 90.210 & 2.1049   | Emission Limitation & Emission Mask                      | The output signal tracks input signal exactly. Therefore, only comparison tests were conducted for proof. |
| 90.210, 2.1057 & 2.1051  | Emission Limits - Spurious Emissions at Antenna Terminal | Yes   |
| 90.210, 2.1057 & 2.1053  | Emission Limits - Field Strength of Spurious Emissions   | Yes   |
| <p><b>SATELINK RF - FIBER INTERFACE MODULE, Model No.: LNKFIB-R, by KAVAL WIRELESS TECHNOLOGIES INC.</b> has also been tested and found to comply with <b>FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices</b>. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.</p> |  |   |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Note:

Note:

This application for the extension of the frequency band from 851-869 MHz to 851-869 MHz of the FCC Grant FCC ID: H6M-LNKFIB-R certified by FCC on Oct. 23, 2003. There is no mechanical/electrical design change for this product.

Since there is no mechanical/electrical change applied to this device for extension of operating band from 851-869 MHz to 851-869 MHz. The test plan was discussed with Mr. Mr. Steven Dayhoff at FCC and agreed to perform the following tests at 869 MHz:

- (1) RF Output Power
- (2) 99% Occupied BW
- (3) Emission Mask
- (4) Transmitter Spurious Conducted Emissions
- (5) Transmitter Spurious Radiated Emissions

### 5.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

### 5.4. DEVIATION OF STANDARD TEST PROCEDURES

None

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 6. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

### 6.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

### 6.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### 6.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:1992 and CISPR 16-1.

### 6.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## 6.5. RF OUTPUT PORT SUBJECT TO TESTS

### 6.5.1. Test Equipment List

| Test Instruments                | Manufacturer    | Model No. | Serial No. | Frequency Range                   |
|---------------------------------|-----------------|-----------|------------|-----------------------------------|
| Power Meter                     | Hewlett Packard | 436A      | 1725A02249 | 10 kHz – 50 GHz, sensor dependent |
| Power Sensor                    | Hewlett Packard | 8481A     | 2702A68983 | 10 MHz – 18 GHz                   |
| Attenuator(s)                   | Bird            | ...       | ...        | DC – 22 GHz                       |
| Synthesized RF Signal Generator | Gigatronic      | 6061A     | 5130408    | 10kHz – 1050 MHz                  |

### 6.5.2. Test Arrangement

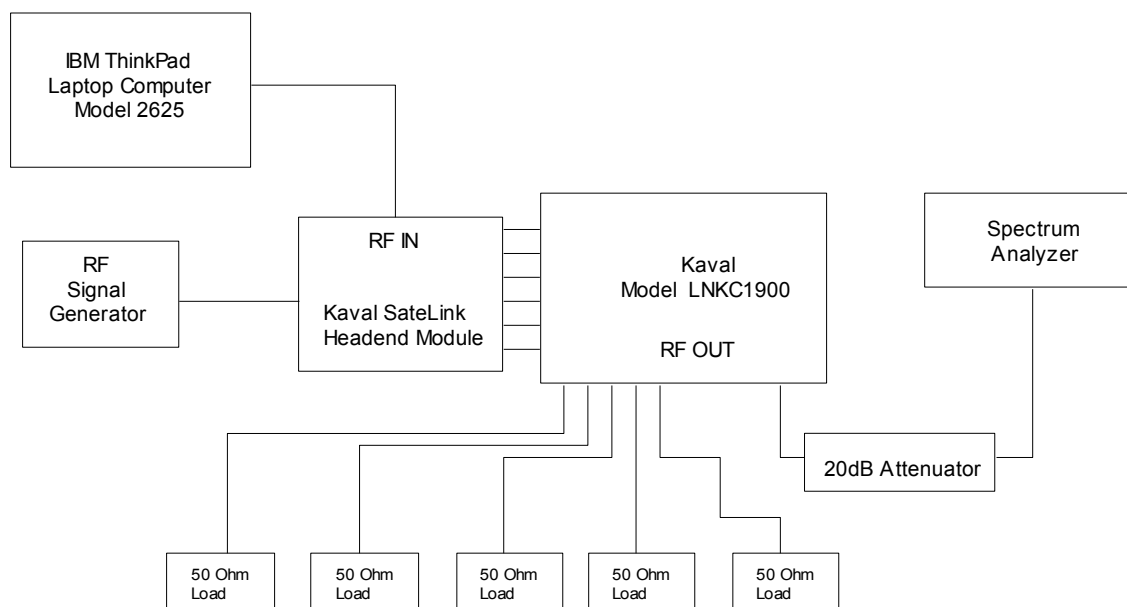

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 6.5.3. Test Data

#### 6.5.3.1. 1930 – 1990 MHz (PCS)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.5.3.2. 869 – 894 (Base Cellular)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.5.3.3. 928 – 941 MHz (Paging)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.5.3.4. 851 – 869 MHz (Trunking)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

Additional test at 869 MHz

| Frequency (MHz)  | RF Output Port Label # | Un-modulated Input Signal (dBm) | Un-modulated Output Signal (dBm) | Gain (dB) |
|--|------------------------|---------------------------------|----------------------------------|-----------|
| 869  | 1                      | -5.0                            | 18.0                             | 23.0      |
|  | 2                      | -5.0                            | 17.0                             | 22.0      |
|  | 3                      | -5.0                            | 17.9                             | 22.9      |
|  | 4                      | -5.0                            | 19.5                             | 24.5      |
|  | 5 + 6                  | -5.0                            | 21.0                             | 26.0      |
|  | 7 + 8                  | -5.0                            | 22.0                             | 27.0      |
| <b>PORT # 7+8 WOULD BE USED THROUGH OUT THE REMAINING TESTS FOR THE WORST CASE</b> |                        |                                 |                                  |           |

### 6.5.4. RF Output port Port used for Worst Case Test

According to the above tests, RF Output Port labeled 7+8 will be used for the rest of rest of the remaining tests in this test report. Other ports from 1 through 5+6 are terminated by 50-ohm RF loads.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.6. RF POWER OUTPUTS & INTERMODULATION @ FCC 2.1046, 22.913, 24.232 & 90.205

### 6.6.1. Limits

Please refer to FCC CFR 47, Paragraphs 22.913, 24.232 and 90.205 for power limits in different frequency bands:

| EUT's Operating Frequency Band (MHz) | FCC Allowable Frequency band (MHz) | FCC Rules | FCC Maximum Power Limits (Watts) |
|--------------------------------------|------------------------------------|-----------|----------------------------------|
| 1930-1990 MHz (PCS Base)             | 1930-1990                          | 24.232    | 1640 Watts peak EIRP             |
| 869-894 MHz (Cellular Base)          | 869-894                            | 22.913    | 500 Watts ERP                    |
| 928-941 MHz (Paging Base)            | 929-930 & 935-940                  | 90.494    | 1 kilo-Watts ERP                 |
| 851-869 MHz (Trunking)               | 851 – 869 MHz                      | 90.635    | 1 kilo-Watts ERP                 |

### 6.6.2. Limits @ FCC 24.232

The effective radiated power (EIRP) of transmitters in the Personal Communications Services must not exceed the limits in this section:

|                                   | Maximum Average ERP (Watts)  | Antenna Height   |
|-----------------------------------|--|--|
| Base Transmitters (1930-1975 MHz) | <ul style="list-style-type: none"> <li>• 1640 Watts</li> <li>• ....</li> </ul> | <ul style="list-style-type: none"> <li>• 300 meters</li> <li>• ....</li> </ul> |

### 6.6.3. Limits @ FCC 90.205

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.205 for specification details.

### 6.6.4. Method of Measurements

Refer to Exhibit 8, § 8.1 of this report for measurement details

- *The transmitter terminal was coupled to the power meter through a 20 dB attenuator*
- *Power of the transmitter channel near the lowest, middle and highest of each frequency block/band were measured using the power meter, and the reading was corrected by added the calibrated attenuator's attenuation value and cable loss.*
- *The RF Output was turned on with standard modulation applied.*

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>


File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

### 6.6.5. Test Equipment List

| Test Instruments                | Manufacturer    | Model No. | Serial No. | Frequency Range                   |
|---------------------------------|-----------------|-----------|------------|-----------------------------------|
| Power Meter                     | Hewlett Packard | 436A      | 1725A02249 | 10 kHz – 50 GHz, sensor dependent |
| Power Sensor                    | Hewlett Packard | 8481A     | 2702A68983 | 10 MHz – 18 GHz                   |
| Attenuator(s)                   | Bird            | ...       | ...        | DC – 22 GHz                       |
| Synthesized RF Signal Generator | Gigatronc       | 6061A     | 5130408    | 10kHz – 1050 MHz                  |

### 6.6.6. Test Arrangement

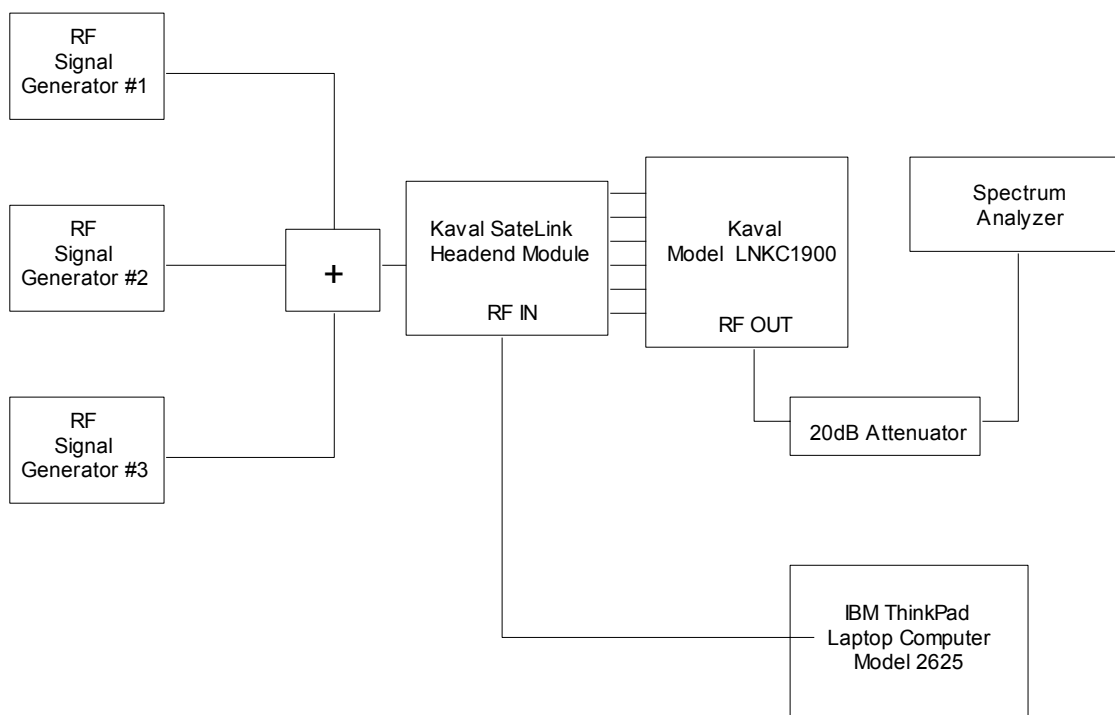

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.6.7. Test Data

### 6.6.7.1. 1930 – 1990 MHz (PCS)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

### 6.6.7.2. 869 – 894 (Base Cellular)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

### 6.6.7.3. 928 – 941 MHz (Paging)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

### 6.6.7.4. 851 – 869 MHz (Trunking)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

---

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.7. EMISSION MASK @ FCC 2.1049, 22.217, 24.238 & 90.210

### 6.7.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| Frequency Range (MHz)                           | FCC Rules | FCC Applicable Mask  |
|---|-----------|--|
| 1930-1990 MHz (PCS)                             | Part 24   | 24.238 <ul style="list-style-type: none"> <li>• Block A (1930-1945 MHz)</li> <li>• Block (1945-1950 MHz)</li> <li>• Block B (1950-1965 MHz)</li> <li>• Block E (1965-1970 MHz)</li> <li>• Block C (1975-1990)</li> </ul> |
| 869-894 MHz (Base Cellular)                     | Part 22   | <ul style="list-style-type: none"> <li>• 22.217(b) for Analog Voice</li> <li>• 22.217(d) for Digital</li> </ul>  |
| 929-930 MHz<br>935-940 MHz (Paging-928-941 MHz) | Part 90   | <ul style="list-style-type: none"> <li>• 90.210(b)&amp;(g) - Mask B for Voice &amp; G for Data</li> <li>• 90.210(i)&amp;(j) – Mask I for Voice and J for Data</li> </ul>   |
| 851-869 MHz (Trunking)                          | Part 90   | <ul style="list-style-type: none"> <li>• 90.210(b) – Mask B for Voice</li> <li>• 90.210(g) – Mask G for Data</li> </ul>  |

### 6.7.2. Method of Measurements

Refer to FCC Rules 2.1049, 24.238, 22.217 and 90.210

### 6.7.3. Test Equipment List

| Test Instruments               | Manufacturer    | Model No. | Serial No. | Frequency Range  |
|--------------------------------|-----------------|-----------|------------|------------------|
| Spectrum Analyzer/EMI Receiver | Hewlett Packard | HP 8593EM | 3412A00103 | 9 kHz – 26.5 GHz |
| Attenuator(s)                  | Bird            | ..        | ...        | DC – 22 GHz      |
| Audio Oscillator               | Hewlett Packard | HP 204C   | 0989A08798 | DC to 1.2 MHz    |


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 6.7.4. Test Arrangement



#### 6.7.5. Test Data

**Note:** Since the output signal tracks input signal exactly, only comparison tests were conducted for proof

##### 6.7.5.1. 1930 – 1990 MHz (PCS)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

##### 6.7.5.2. 869 – 894 (Base Cellular)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

##### 6.7.5.3. 928 – 941 MHz (Paging)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

##### 6.7.5.4. 851 – 869 MHz (Trunking)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

Please refer to Plot A-1 to A-4 For Emissions Masks of RF Input and Output Signals at 869 MHz.

---


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot A-1: Emission Mask B, RF Input**  
**Frequency: 869 MHz (866 - 869 MHz)**  
**Modulation: FM modulation with 2.5 kHz Sine Wave signal, 2.5 kHz deviation**

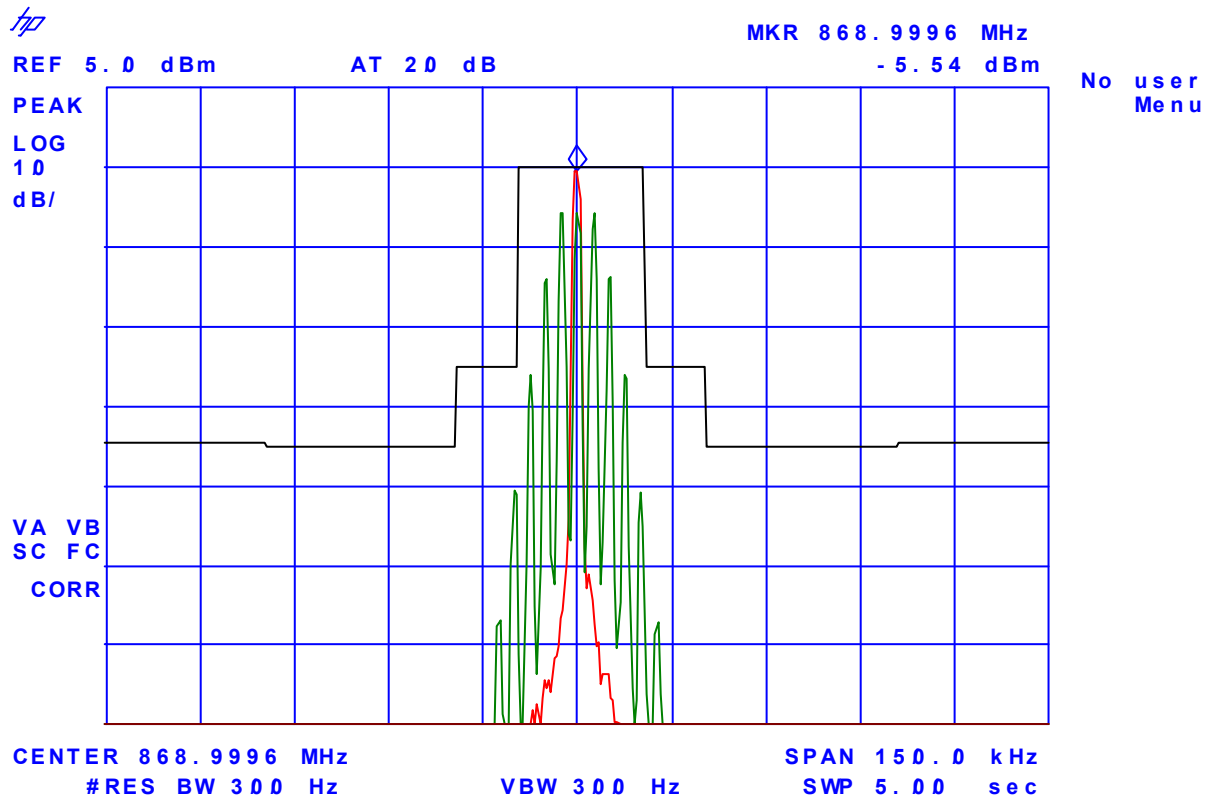


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # A-2: Emission Mask B, RF Output  
Frequency: 869 MHz (866 - 869 MHz)  
Modulation: FM modulation with 2.5 kHz Sine Wave signal, 2.5 kHz deviation

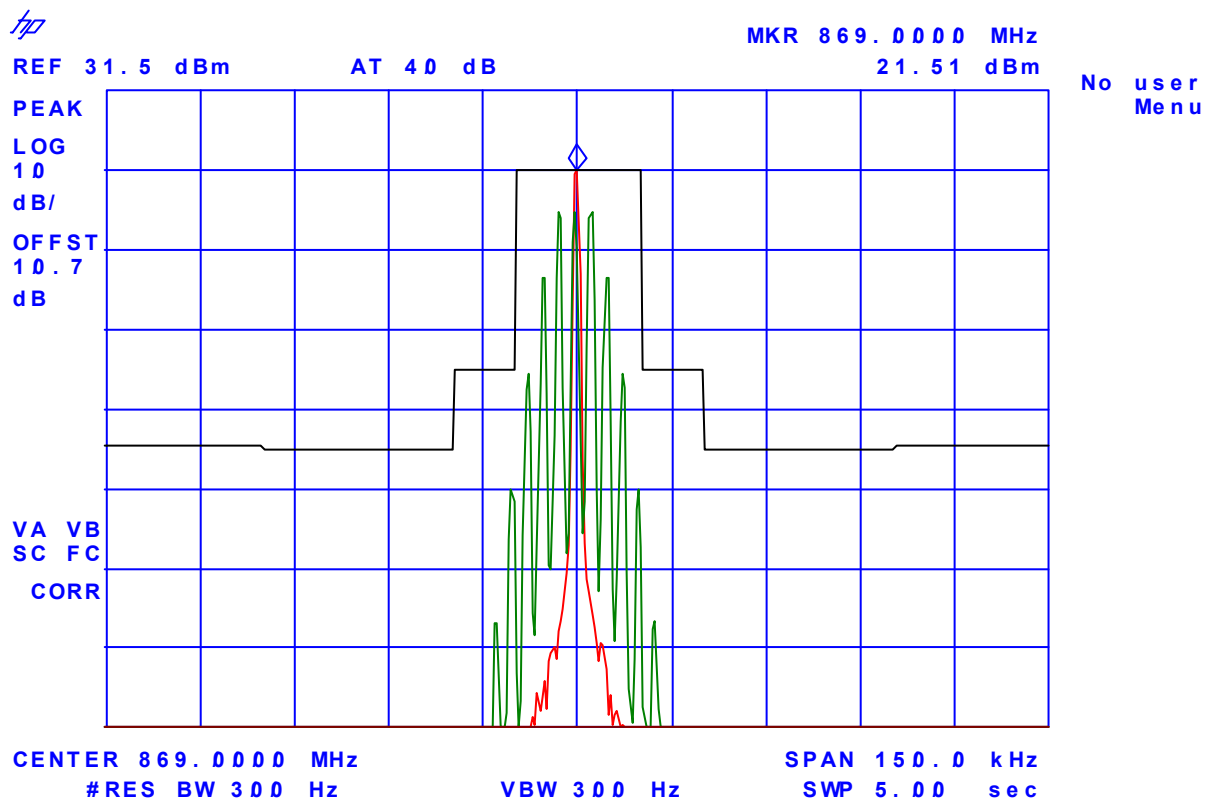

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



Plot A-3: Emission Mask H, RF Input  
Frequency: 869 MHz (866 - 869 MHz)  
Modulation: FM modulation with an external 9600 b/s random data source, 2.5 kHz deviation

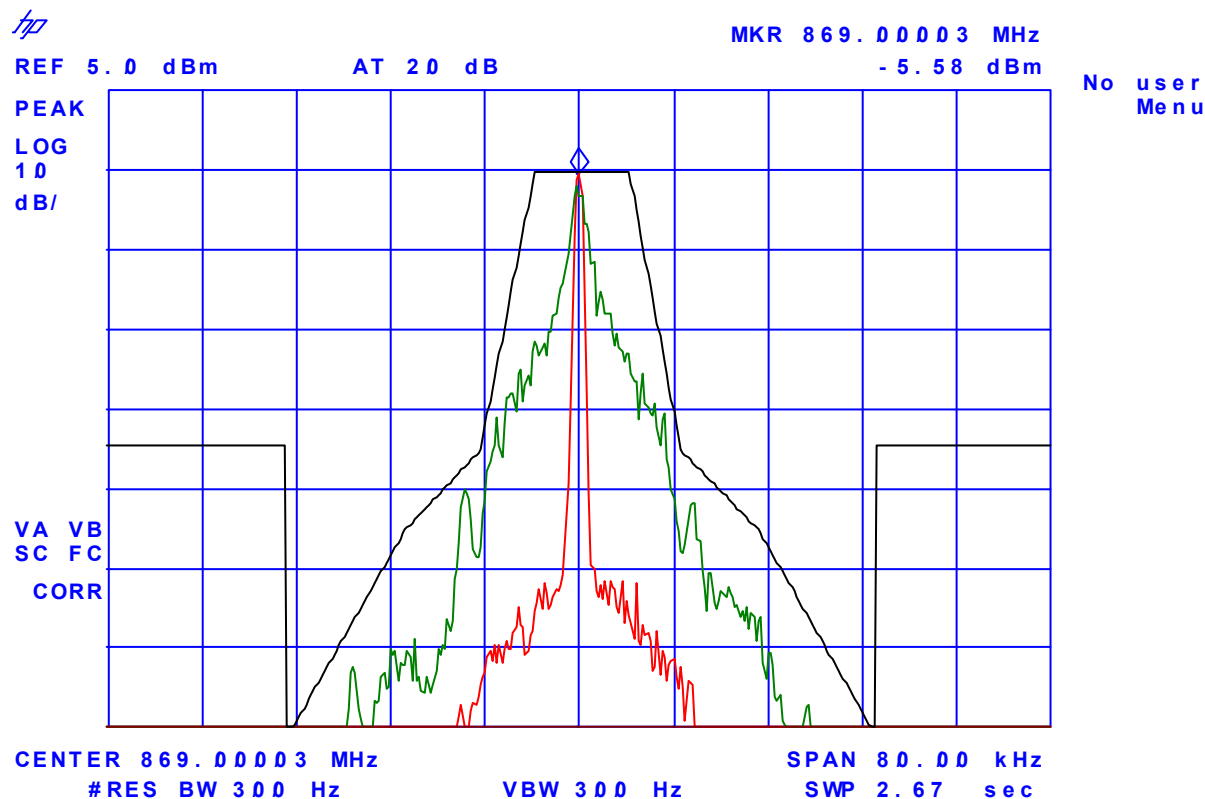


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot #A-4: Emission Mask H, RF Output**  
**Frequency: 869 MHz (866 - 869 MHz)**  
**Modulation: FM modulation with an external 9600 b/s random data source, 2.5 kHz deviation**

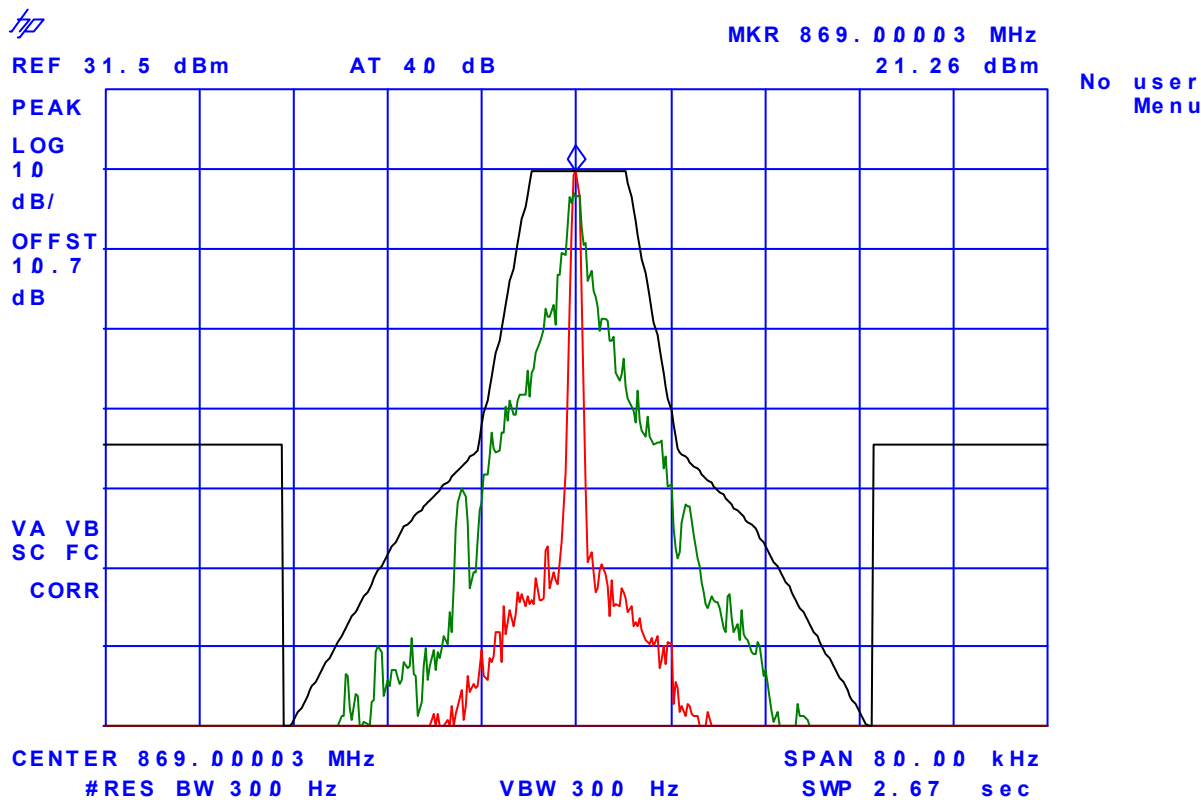

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.8. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 2.1049, 22.217, 24.238 & 90.210

### 6.8.1. Limits

Emissions outside the permitted band shall be attenuated below the mean output power of the transmitter as follows:

| Frequency Range (MHz)                           | FCC Rules                      | FCC Applicable Mask  |
|---|--------------------------------|--|
| 1930-1990 MHz (PCS)                             | 24.238 (a)                     | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm,</li> </ul>  |
| 869-894 MHz (Base Cellular)                     | 22.217(e)                      | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> </ul>   |
| 929-930 MHz<br>935-940 MHz (Paging-928-941 MHz) | 90.210(b),(g),(I)<br>90.210(j) | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> <li>50+10*log(P) dBc, P is power in watts or -20 dBm</li> </ul> |
| 851-869 MHz (Trunking)                          | 90.210(g) &(g)                 | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> </ul>   |

### 6.8.2. Method of Measurements

Refer to Exhibit 8 § 8.1 of this report for measurement details

### 6.8.3. Test Equipment List

| Test Instruments                   | Manufacturer    | Model No. | Serial No. | Frequency Range                                   |
|------------------------------------|-----------------|-----------|------------|---|
| Spectrum Analyzer/<br>EMI Receiver | Hewlett Packard | HP 8593EM | 3412A00103 | 9 kHz – 26.5 GHz                                  |
| Attenuator(s)                      | Bird            | ..        | ...        | DC – 22 GHz                                       |
| Audio Oscillator                   | Hewlett Packard | HP 204C   | 0989A08798 | DC to 1.2 MHz                                     |
| Highpass Filter,<br>Microphase     | Microphase      | CR220HID  | IIT11000AC | Cut-off Frequency at 600 MHz,<br>1.3 GHz or 4 GHz |


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 6.8.4. Test Arrangement

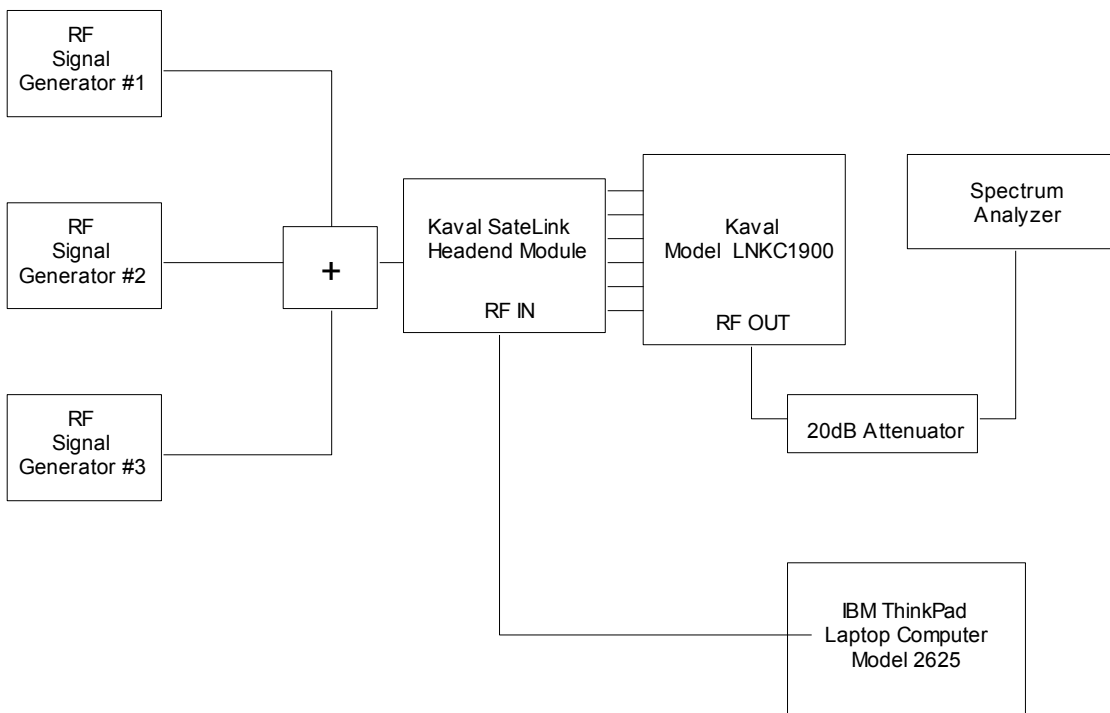

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 6.8.5. Test Data

#### 6.8.5.1. 1930 – 1990 MHz (PCS)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.8.5.2. 869 – 894 (Base Cellular)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.8.5.3. 928 – 941 MHz (Paging)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

#### 6.8.5.4. 851 – 869 MHz (Trunking)

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

Please refer to Plot A-5 to A-7 for Transmitter Conducted Emissions Masks of RF Output Port at 896 MHz.

| Fundamental Frequency: 869 MHz  |  |       |                |                |               |
|---|--|-------|----------------|----------------|---------------|
| RF Output Power: +22 dBm  |  |       |                |                |               |
| Modulation: FM with 2.5 kHz sine wave signal  |  |       |                |                |               |
| FREQUENCY<br>(MHz)  | TRANSMITTER CONDUCTED<br>ANTENNA EMISSIONS |       | LIMIT<br>(dBc) | MARGIN<br>(dB) | PASS/<br>FAIL |
|   | (dBm)                                      | (dBc) |                |                |               |
| 1964  | -42.7                                      | -64.7 | -35.0          | -29.7          | PASS          |
| 4622  | -49.5                                      | -71.5 | -35.0          | -36.5          | PASS          |
| 4965  | -49.7                                      | -71.7 | -35.0          | -36.7          | PASS          |
| 4592  | -50.2                                      | -72.2 | -35.0          | -37.2          | PASS          |
| The emissions were scanned from 10 MHz to 10 GHz and all emissions within 40 dB below the limits were recorded. |  |       |                |                |               |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>


File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot #A5: Transmitter Antenna Power Conducted Emissions**  
**Frequency: 869 MHz (866 - 869 MHz)**  
**Modulation: FM modulation with 2.5 kHz Sine Wave signal, 2.5 kHz deviation**

*hp*

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 866.4 MHz  
21.26 dBm  
No user  
Menu

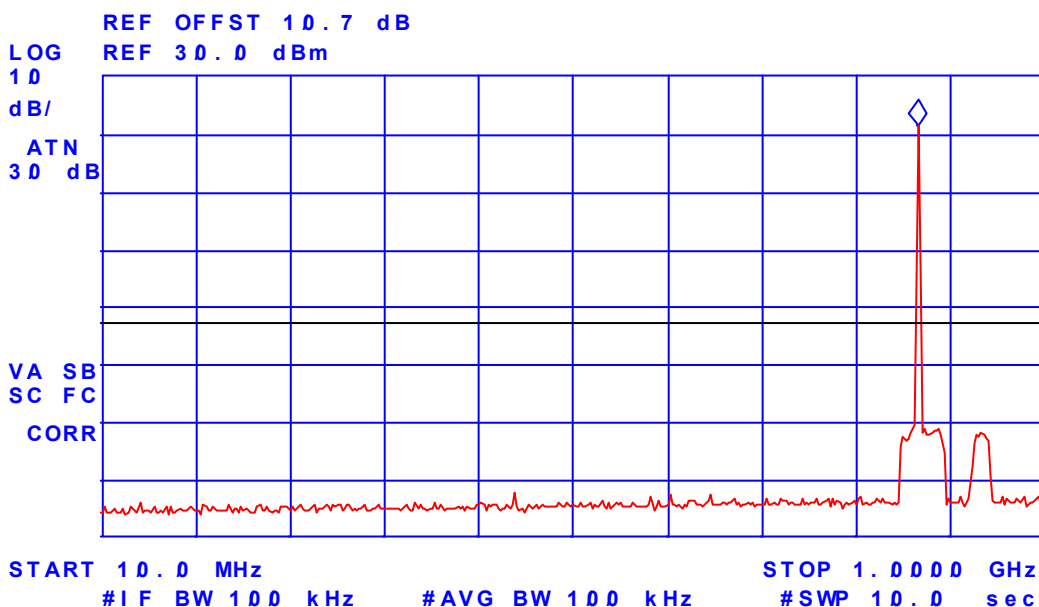

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot #6: Transmitter Antenna Power Conducted Emissions**  
**Frequency: 869 MHz (866 - 869 MHz)**  
**Modulation: FM modulation with 2.5 kHz Sine Wave signal, 2.5 kHz deviation**

hp

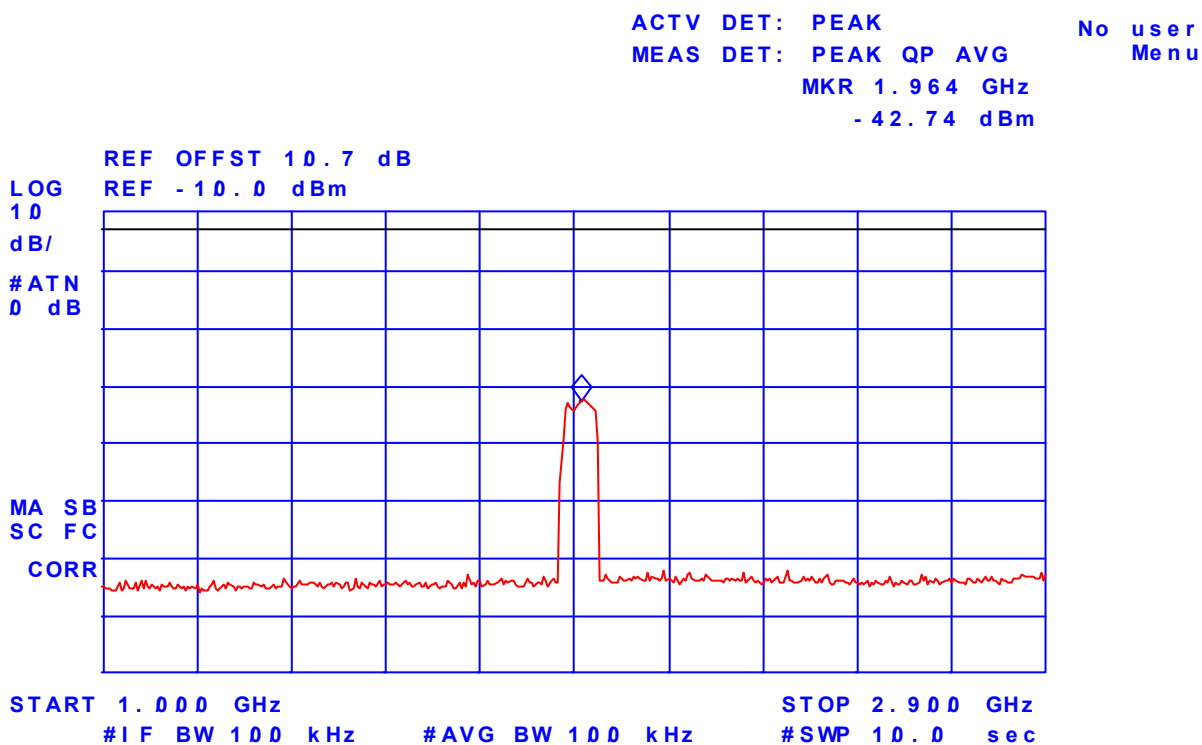

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot #7: **FM modulation with 2.5 kHz Sine Wave signal, 2.5 kHz deviation**  
 4.622 GHz, -49.51 dBm  
 4.941 GHz, -49.65 dBm  
 5.492 GHz, -50.24 dBm

*hp*

MARKER  
 4.622 GHz  
 -49.42 dBm


ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 4.622 GHz  
 -49.42 dBm

No user  
 Menu

REF OFFST 10.7 dB  
 REF -10.0 dBm

LOG 10  
 dB/  
 #ATN 0 dB

WA SB  
 SC FC  
 CORR

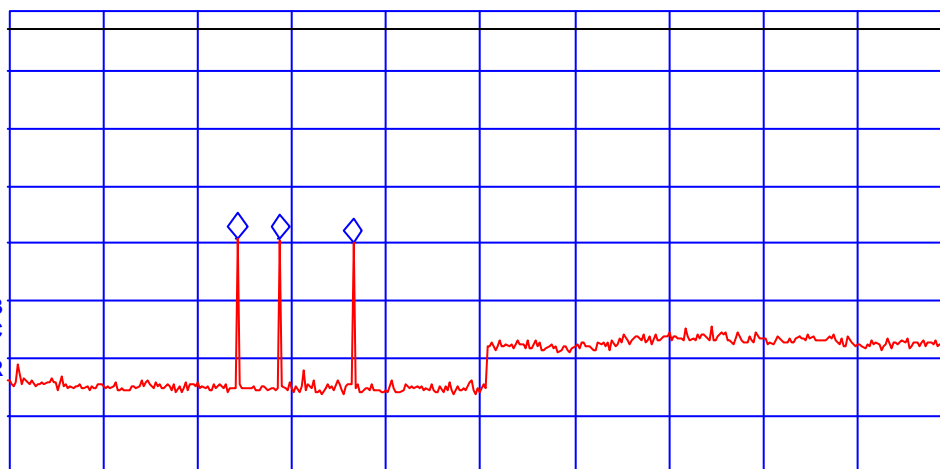

START 2.900 GHz STOP 10.000 GHz  
 #IF BW 100 kHz #AVG BW 100 kHz #SWP 10.0 sec

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 6.9. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 2.1049, 22.217, 24.238 & 90.210

### 6.9.1. Limits

Emissions outside the permitted band shall be attenuated below the mean output power of the transmitter as follows:

| Frequency Range (MHz)                           | FCC Rules                      | FCC Applicable Mask  |
|---|--------------------------------|--|
| 1930-1990 MHz (PCS)                             | 24.238 (a)                     | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm,</li> </ul>  |
| 869-894 MHz (Base Cellular)                     | 22.217(e)                      | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> </ul>   |
| 929-930 MHz<br>935-940 MHz (Paging-928-941 MHz) | 90.210(b),(g),(I)<br>90.210(j) | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> <li>50+10*log(P) dBc, P is power in watts or -20 dBm</li> </ul> |
| 851-869 MHz (Trunking)                          | 90.210(g) &(g)                 | <ul style="list-style-type: none"> <li>43+10*log(P) dBc, P is power in watts or -13 dBm</li> </ul>   |

### 6.9.2. Method of Measurements

Refer to Exhibit 8, § 8.2 of this report for measurement details

### 6.9.3. Test Equipment List

| Test Instruments                   | Manufacturer    | Model No. | Serial No. | Frequency Range   |
|------------------------------------|-----------------|-----------|------------|---|
| Spectrum Analyzer/<br>EMI Receiver | Advantest       | R3271     | 15050203   | 100 Hz to 32 GHz with external mixer for frequency above 32 GHz |
| Microwave Amplifier                | Hewlett Packard | HP 83017A | 3116A00661 | 1 GHz to 26.5 GHz   |
| Active Loop Antenna                | EMCO            | 6507      | 8906-1167  | 1 kHz – 30 MHz  |
| Biconilog Antenna                  | EMCO            | 3143      | 1029       | 20 MHz to 2 GHz   |
| Horn Antenna                       | EMCO            | 3155      | 9701-5061  | 1 GHz – 18 GHz  |
| Horn Antenna with Mixer            | EMCO            | 3160-09   | 1007       | 18 GHz – 26.5 GHz   |
| Horn Antenna with Mixer            | EMCO            | 3160-10   | 1001       | 26.5 GHz – 40 GHz   |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### **6.9.4. Test Arrangement**

Refer to Photograph # 1 and 2 in Annex 2 for detailed test setup.

##### **6.9.4.1. 1930 – 1990 MHz (PCS)**

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

##### **6.9.4.2. 869 – 894 (Base Cellular)**

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

##### **6.9.4.3. 928 – 941 MHz (Paging)**

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

---

#### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**6.9.4.4. 851 – 869 MHz (Trunking)**

\*\*\* No change. Please refer to the attached original FCC Test report, File # KTI-015FCC, FCC ID: H6M-LNKFIB-R.

Additional tests at 869 MHz were performed and the results were found below:

**6.9.4.4.1. Highest Frequency (889 MHz)**

| Fundamental Frequency: 869 MHz<br>RF Output Power: +22 dBm<br>Modulation: unmodulated,                       |                                   |                            |                               |                |                |                |               |
|--|-----------------------------------|----------------------------|-------------------------------|----------------|----------------|----------------|---------------|
| FREQUENCY<br>(MHz)   | RF Field<br>Level @3m<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA        |                | MARGIN<br>(dB) | PASS/<br>FAIL |
|  |                                   |                            |                               | PLANE<br>(H/V) | LIMIT<br>(dBc) |                |               |
| 10 – 10,000  | **                                | **                         | PEAK                          | V              | -42.0          | **             | PASS          |
| ** The emissions were scanned from 10 MHz to 10 GHz and no significant radiated emissions within were found. |                                   |                            |                               |                |                |                |               |

| Fundamental Frequency: 869 MHz<br>RF Output Power: +22 dBm<br>Modulation: FM Voice                           |                                   |                            |                               |                |                |                |               |
|--|-----------------------------------|----------------------------|-------------------------------|----------------|----------------|----------------|---------------|
| FREQUENCY<br>(MHz)   | RF Field<br>Level @3m<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA        |                | MARGIN<br>(dB) | PASS/<br>FAIL |
|  |                                   |                            |                               | PLANE<br>(H/V) | LIMIT<br>(dBc) |                |               |
| 10 – 10,000  | **                                | **                         | PEAK                          | V              | -42.0          | **             | PASS          |
| ** The emissions were scanned from 10 MHz to 10 GHz and no significant radiated emissions within were found. |                                   |                            |                               |                |                |                |               |

| Fundamental Frequency: 869 MHz<br>RF Output Power: +22 dBm<br>Modulation: FM Data                            |                                   |                            |                               |                |                |                |               |
|--|-----------------------------------|----------------------------|-------------------------------|----------------|----------------|----------------|---------------|
| FREQUENCY<br>(MHz)   | RF Field<br>Level @3m<br>(dBuV/m) | RF Power<br>Level<br>(dBm) | DETECTOR<br>USED<br>(PEAK/QP) | ANTENNA        |                | MARGIN<br>(dB) | PASS/<br>FAIL |
|  |                                   |                            |                               | PLANE<br>(H/V) | LIMIT<br>(dBc) |                |               |
| 10 – 10,000  | **                                | **                         | PEAK                          | V              | -42.0          | **             | PASS          |
| ** The emissions were scanned from 10 MHz to 10 GHz and no significant radiated emissions within were found. |                                   |                            |                               |                |                |                |               |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.10. Frequency Stability @ FCC §2.1055 & §90.213

### 6.10.1. Limits

Please refer to FCC CFR 47, Part 90, Subpart I, Para. 90.213 for specification details.

| FREQUENCY RANGE (MHz) | FIXED & BASE STATIONS (ppm) |
|-----------------------|-----------------------------|
| 866-869               | 1.0                         |


### 6.10.2. Method of Measurements

Refer to FCC § 2.1055 and Exhibit 8, Section 8.3 of this report for detailed test procedures.

### 6.10.3. Test Equipment List

| Test Instruments               | Manufacturer    | Model No. | Serial No. | Frequency Range      |
|--------------------------------|-----------------|-----------|------------|----------------------|
| Spectrum Analyzer/EMI Receiver | Hewlett Packard | HP 8593EM | 3412A00103 | 9 kHz – 26.5 GHz     |
| Attenuator(s)                  | Bird            | ..        | ...        | DC – 22 GHz          |
| Temperature & Humidity Chamber | Tenney          | T5        | 9723B      | -40° to +60° C range |

### 6.10.4. Test Arrangement

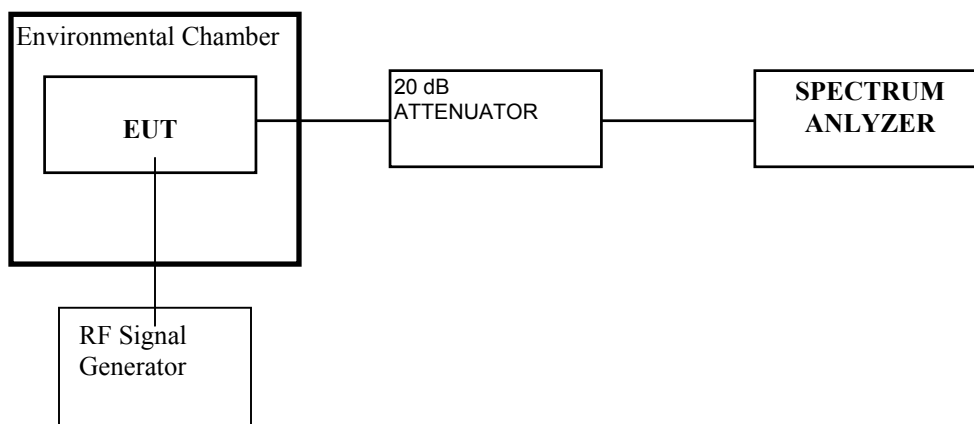

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 6.10.5. Test Data

|   |                            |
|---|----------------------------|
| <b>Frequency Band:</b>                    | 851 – 869 MHz              |
| <b>Center Frequency:</b>                  | 851 MHz for worst case     |
| <b>Full Power Level:</b>                  | 18 dBm                     |
| <b>Frequency Tolerance Limit:</b>         | $\pm 1.0$ ppm (Worst case) |
| <b>Max. Frequency Tolerance Measured:</b> | -15 Hz or -0.02 ppm        |
| <b>Input Voltage Rating:</b>              | 120 Vac 60 Hz              |

| Ambient Temperature (°C) | Center Frequency & RF Power Output Variation |   |   |
|--------------------------|--|---|---|
|                          | Supply Voltage (Nominal)<br>120 Volts        | Supply Voltage (85 % of Nominal)<br>102 Volts | Supply Voltage (115% of Nominal)<br>138 Volts |
|                          | Hz   | Hz  | Hz  |
| -30                      | -5   | -5  | 0   |
| +20                      | 0  | +5  | 0   |
| +50                      | -15  | -8  | +5  |

**Remark:** There is no frequency drift was observed with respect to input voltage and environmental temperature variation, the above measurements only show the stability of the frequency counter or RF input signal.

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

### 7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

| CONTRIBUTION<br>(Radiated Emissions)   | PROBABILITY<br>DISTRIBUTION | UNCERTAINTY (+ dB) |               |
|--|-----------------------------|--------------------|---------------|
|  |                             | 3 m                | 10 m          |
| Antenna Factor Calibration   | Normal (k=2)                | $\pm 1.0$          | $\pm 1.0$     |
| Cable Loss Calibration   | Normal (k=2)                | $\pm 0.3$          | $\pm 0.5$     |
| EMI Receiver specification   | Rectangular                 | $\pm 1.5$          | $\pm 1.5$     |
| Antenna Directivity  | Rectangular                 | +0.5               | +0.5          |
| Antenna factor variation with height   | Rectangular                 | $\pm 2.0$          | $\pm 0.5$     |
| Antenna phase center variation   | Rectangular                 | 0.0                | $\pm 0.2$     |
| Antenna factor frequency interpolation   | Rectangular                 | $\pm 0.25$         | $\pm 0.25$    |
| Measurement distance variation   | Rectangular                 | $\pm 0.6$          | $\pm 0.4$     |
| Site imperfections   | Rectangular                 | $\pm 2.0$          | $\pm 2.0$     |
| Mismatch: Receiver VRC $\Gamma_1 = 0.2$<br>Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$<br>Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$ | U-Shaped                    | +1.1<br>-1.25      | $\pm 0.5$     |
| System repeatability   | Std. Deviation              | $\pm 0.5$          | $\pm 0.5$     |
| Repeatability of EUT   |                             | -                  | -             |
| Combined standard uncertainty  | Normal                      | +2.19 / -2.21      | +1.74 / -1.72 |
| Expanded uncertainty U   | Normal (k=2)                | +4.38 / -4.42      | +3.48 / -3.44 |

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
 June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 8. GENERAL MEASUREMENT METHODS

### 8.1. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 30 kHz minimum, VBW  $\geq$  RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC CFR 47, Para. 2.1057 - Frequency spectrum to be investigated:-** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC CFR 47, Para. 2.1051 - Spurious Emissions at Antenna Terminal:-** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

### 8.2. SPURIOUS EMISSIONS (RADIATED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz minimum, VBW  $\geq$  RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC CFR 47, Para. 2.1057 - Frequency spectrum to be investigated:-** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

#### FCC CFR 47, Para. 2.1053 - Field Strength Spurious Emissions

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.1049(c) as appropriate. For equipment operating on frequencies below 1 GHz, an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
  - (2) All equipment operating on frequencies higher than 25 MHz
  - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
  - (4) Other types of equipment as required, when deemed necessary by the Commission.

**Maximizing RF Emission Level:**

- (a) The measurements was performed with standard modulation
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The biconilog Antenna (20 MHz to 1 GHz) or Horn Antenna (1 GHz to 18 GHz) was used for measuring.
- (e) The spectrum analyzer was tuned to transmitter carrier frequency. The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (f) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (g) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
  
- (h) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (i) The field strength level measured at 3m is converted to the power in dBm by subtracting a constant factor of 97.5 dB

**METHOD OF CALCULATION FOR TRANSMITTED POWER (P) FROM THE MEASURED FIELD STRENGTH LEVEL (E):**

According to IEC 801-3, the power density can be calculated as follows:

$$S = P / (4 \times \text{PI} \times D^2)$$

Where: S: Power density in watts per square feet  
P: Transmitted power in watts  
PI: 3.1416  
D: Distance in meters

The power density S (W/m<sup>2</sup>) and electric field E (V/m) is related by:

$$S = E^2 / (120 \times \text{PI})$$

Accordingly, the field intensity of isotropic radiator in free space can be expressed as follows:

$$E = (30 \times P)^{1/2} / D = 5.5 \times (P)^{1/2} / D$$

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



For Halfwave dipole antenna or other antennas correlated to dipole in direction of maximum radiation:

$$S = (1.64 \times P) / (4 \times \pi \times D^2)$$
$$E = (49.2 \times P)^{1/2} \times D = 7.01 \times (P)^{1/2} / D$$

$$P = (E \times D / 7.01)^2$$

Calculation of transmitted power P (dBm) given a measured field intensity E (dBuV/m):

$$P(W) = [E(V/m) \times D / 7.01]^2$$
$$P(mW) = P(W) \times 1000$$
$$\Rightarrow P(dBm) = 10 \log P(mW)$$
$$= 20 \log E(V/m) + 20 \log(D) - 20 \log(7.01) + 10 \log 1000$$
$$= E(dBV/m) + 20 \log D + 13$$
$$= E(dBuV/m) - 120 + 20 \log(D) + 13$$
$$= E(dBuV/m) + 20 \log(D) - 107$$

The Transmitted Power @ D = 3 Meters

$$P(dBm) = E(dBuV/m) - 97.5$$

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: KTI-028FCC  
June 17, 2003

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)