




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
RF In. at level of -30 dBm @ 406.12437 MHz, 12.5 kHz Channel Spacing
Mod. FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev. 2 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 1

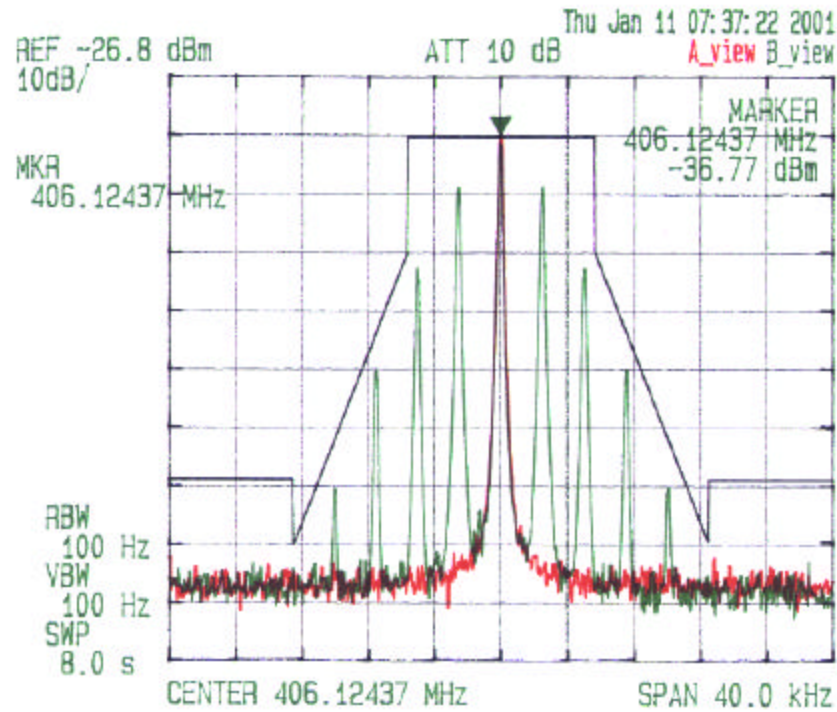





KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 406.1241 MHz, RF Output 38.4 dBm, 12.5 kHz Channel Spacing
RF In at level of -50 dBm @ 406.1241 MHz
Mod.: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev.: 2 kHz
Emission Mask D

Date: Jan // 2001
Tested by: Hung Trinh

PLOT # 2

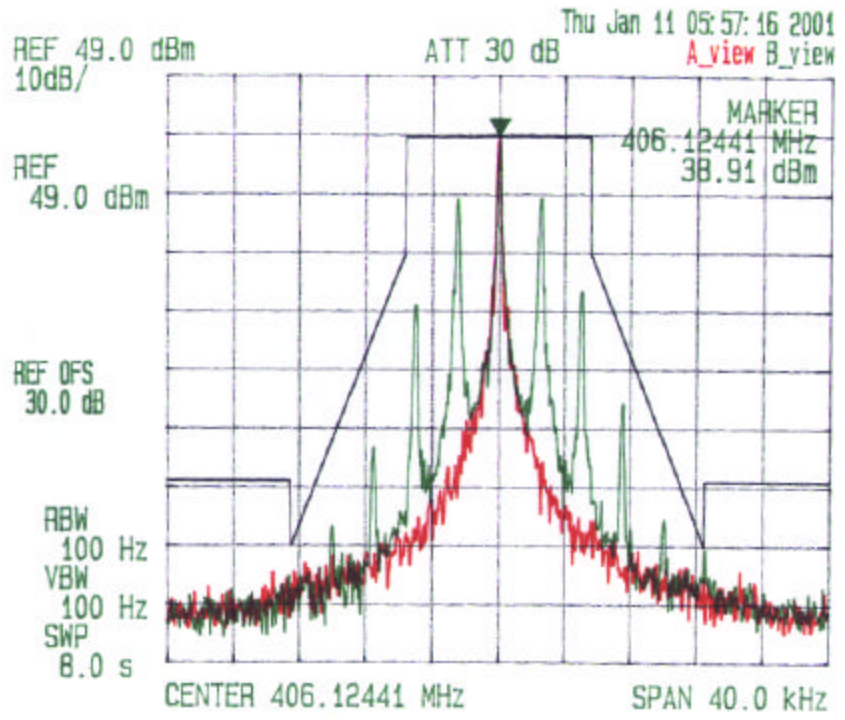

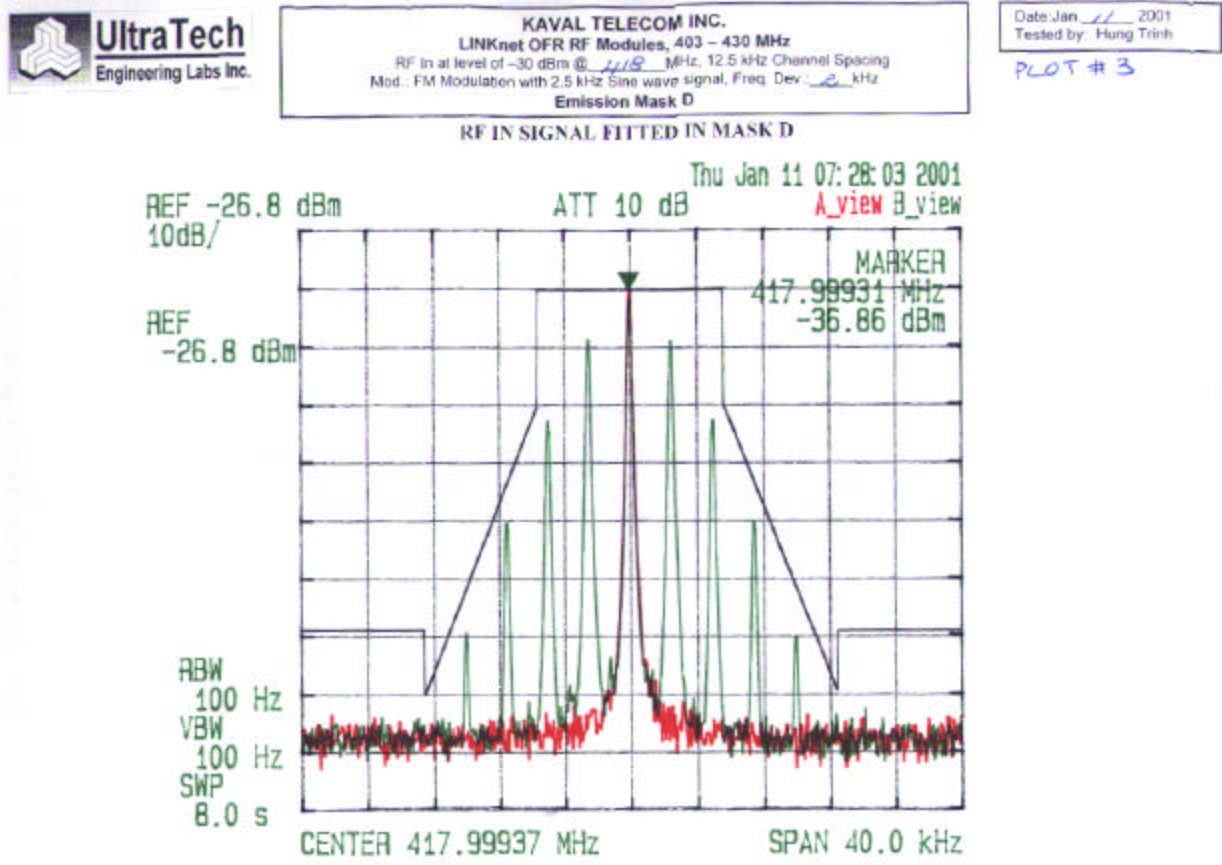




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 417.99937 MHz, RF Output: 38.4 dBm, 12.5 kHz Channel Spacing
RF In at level of -30 dBm @ 417.99937 MHz
Mod.: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev.: 2.5 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 4

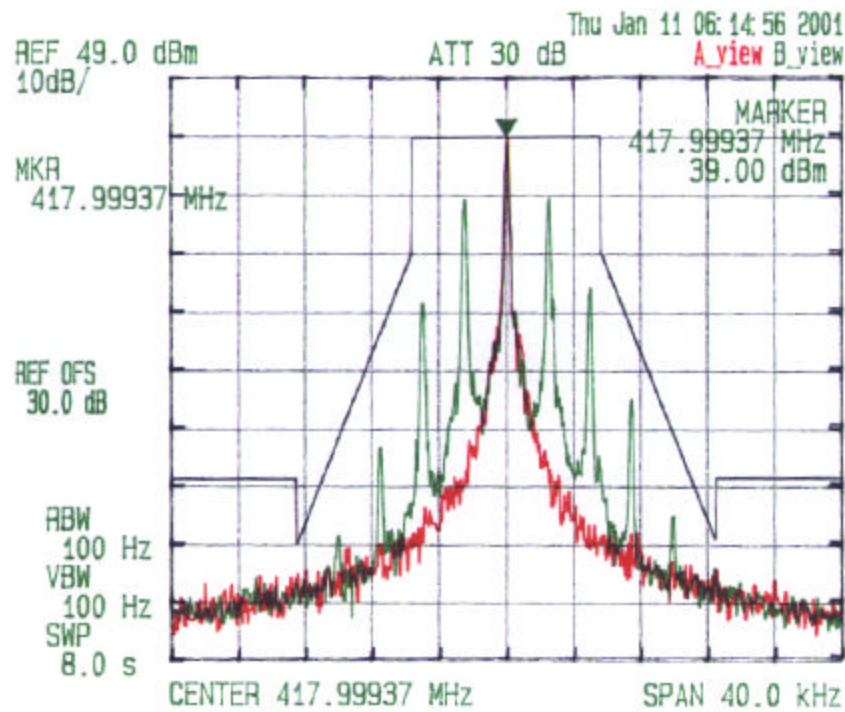




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
RF in at level of -30 dBm @ 428.999 MHz, 12.5 kHz Channel Spacing
Mod.: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev.: 2.5 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 5

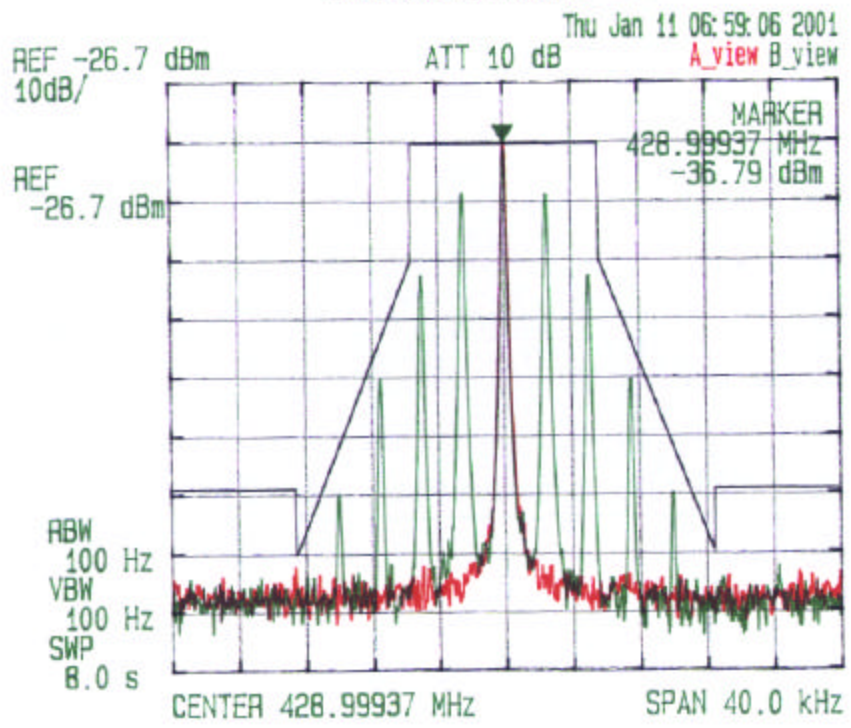




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 428.7 MHz, RF Output: 38.4 dBm, 12.5 kHz Channel Spacing
RF In at level of -30 dBm @ 428.7 MHz
Mod: FM Modulation with 2.5 kHz Sine wave signal, Freq. Dev: 2 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 6

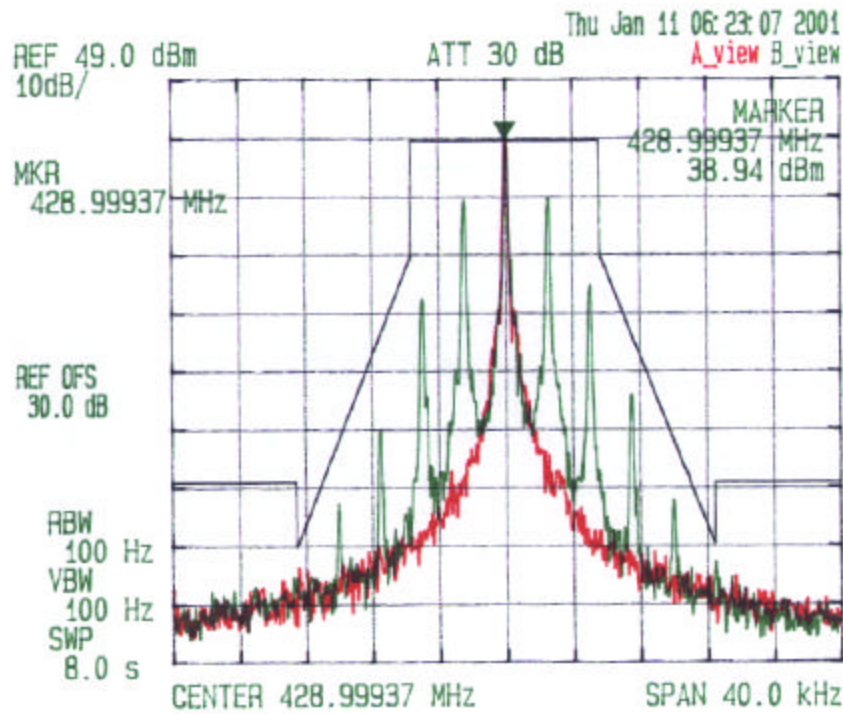




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
RF In at level of -30 dBm @ 406.125 MHz, 12.5 kHz Channel Spacing
Mod.: FM Modulation with an external 9600 b/s random data, Freq. Dev.: 5 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 7

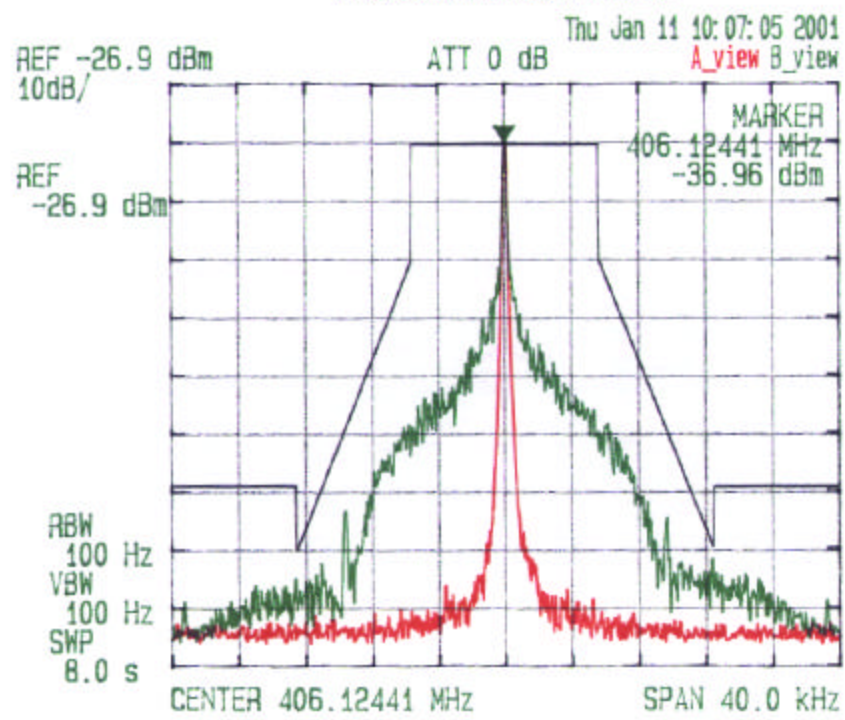




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 406.85 MHz, RF Output: 38.4 dBm, 12.5 kHz Channel Spacing
RF In at level of -30 dBm @ 406.85 MHz
Mod: FM Modulation with an external 9600 b/s random data, Freq. Dev.: 2 kHz
Emission Mask D

Date: Jan 11, 2001
Tested by: Hung Trinh

Plot # 8

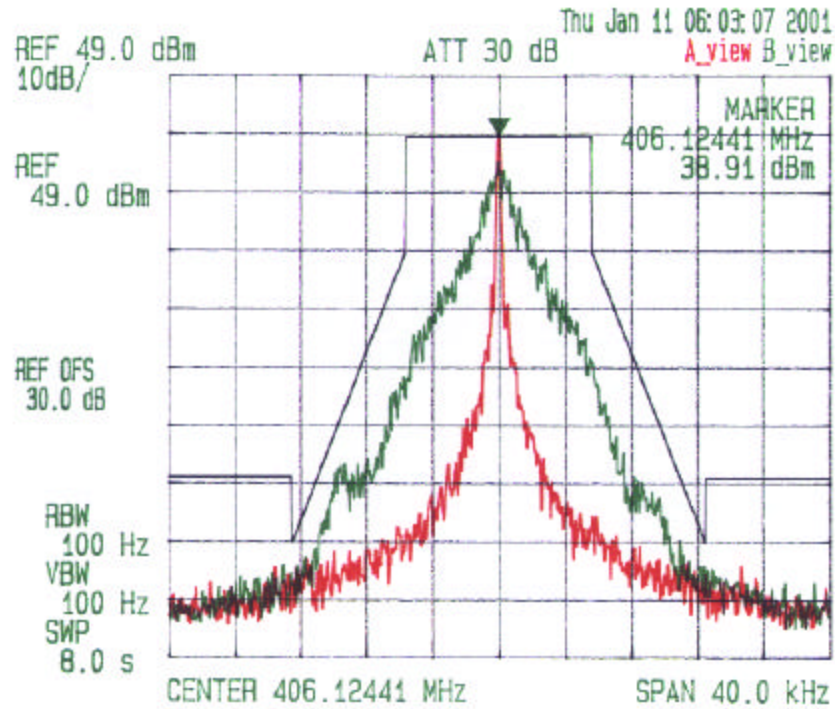




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
RF In at level of -30 dBm @ 417.99943 MHz, 12.5 kHz Channel Spacing
Mod.: FM Modulation with an external 9600 b/s random data, Freq. Dev.: 2 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

Plot # 9

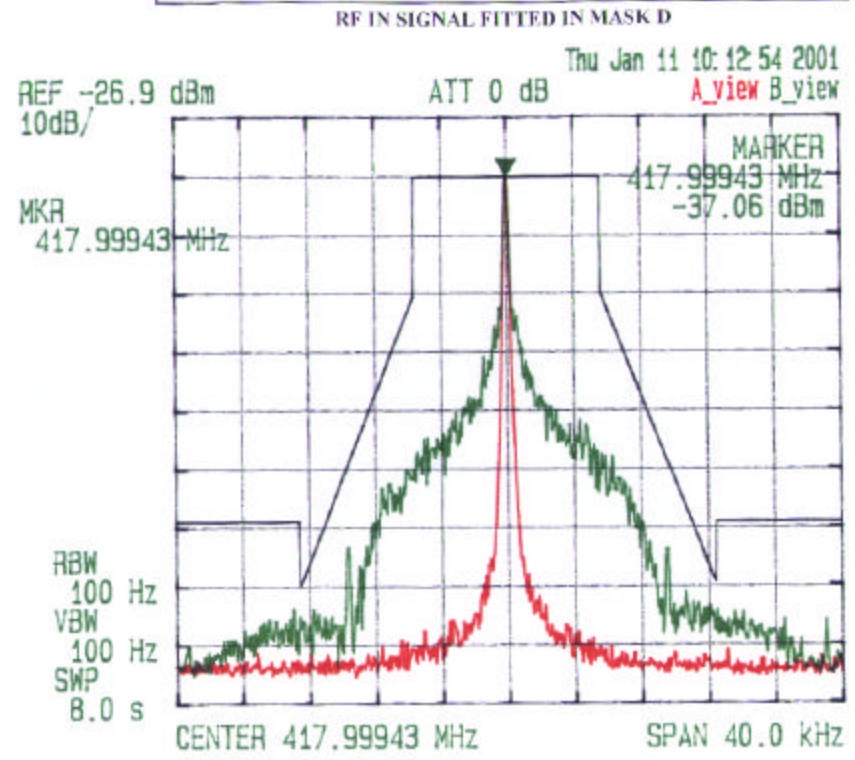




KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 417.99937 MHz, RF Output: 38.4 dBm, 12.5 kHz Channel Spacing
RF In. at level of -30 dBm @ 417.99937 MHz
Mod.: FM Modulation with an external 9600 b/s random data, Freq. Dev. 8 kHz
Emission Mask D

Date Jan 11 2001
Tested by: Hung Trinh

PLOT #10

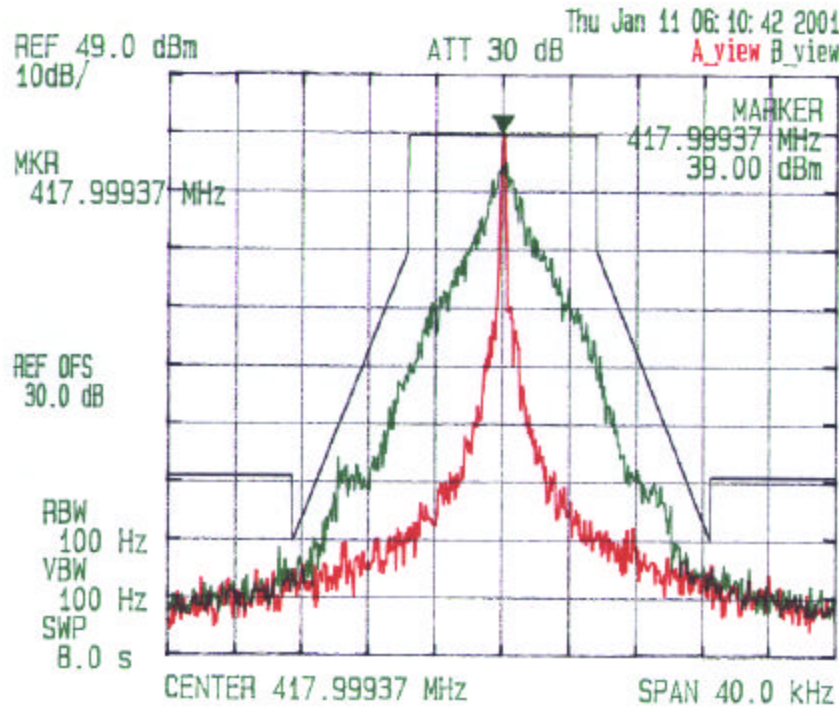


UltraTech
Engineering Labs Inc.

KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
RF In at level of -30 dBm @ 428.99937 MHz, 12.5 kHz Channel Spacing
Mod.: FM Modulation with an external 9600 b/s random data, Freq. Dev.: 20 kHz
Emission Mask D

Date Jan 11 2001
Tested by: Hung Trinh

PLOT # 11

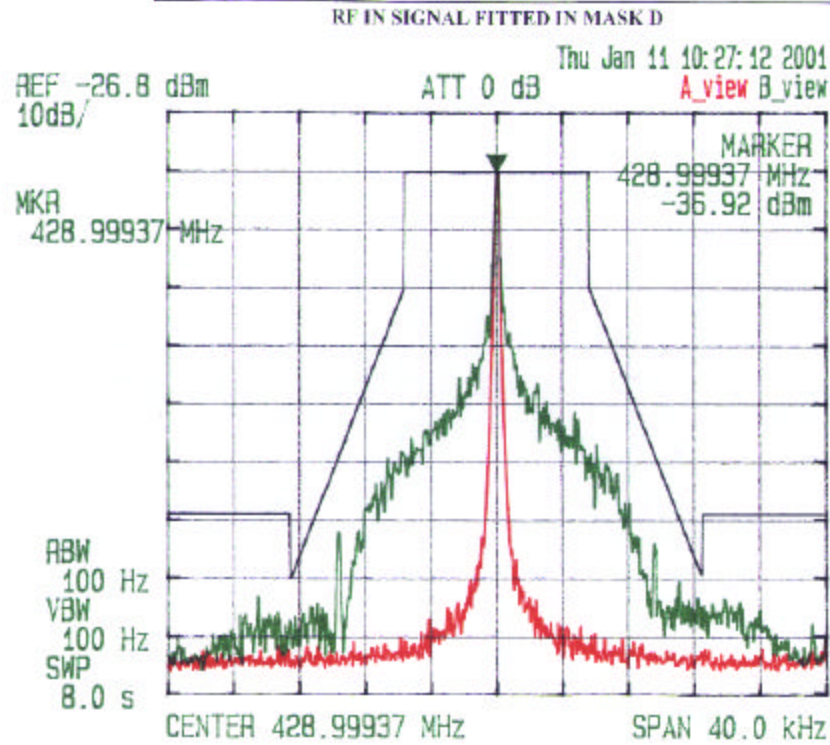



KAVAL TELECOM INC.
LINKnet OFR RF Modules, 403 - 430 MHz
Tx Freq: 428.9 MHz, RF Output: 38.4 dBm, 12.5 kHz Channel Spacing
RF In at level of -30 dBm @ 428.9 MHz
Mod: FM Modulation with an external 9600 b/s random data, Freq. Dev: 2 kHz
Emission Mask D

Date: Jan 11 2001
Tested by: Hung Trinh

PLOT # 12

