

Exhibit 9 - Plot # 1

Date: May 13 2000
Tested by: Hung Triah
PLOT #1

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
RF In at level of -30 dBm @ 452 MHz
Mod: FM Modulated with 2.5 kHz Sine Wave signal. Freq: 3 kHz
Emission Mask B, Channel spacing 25 kHz

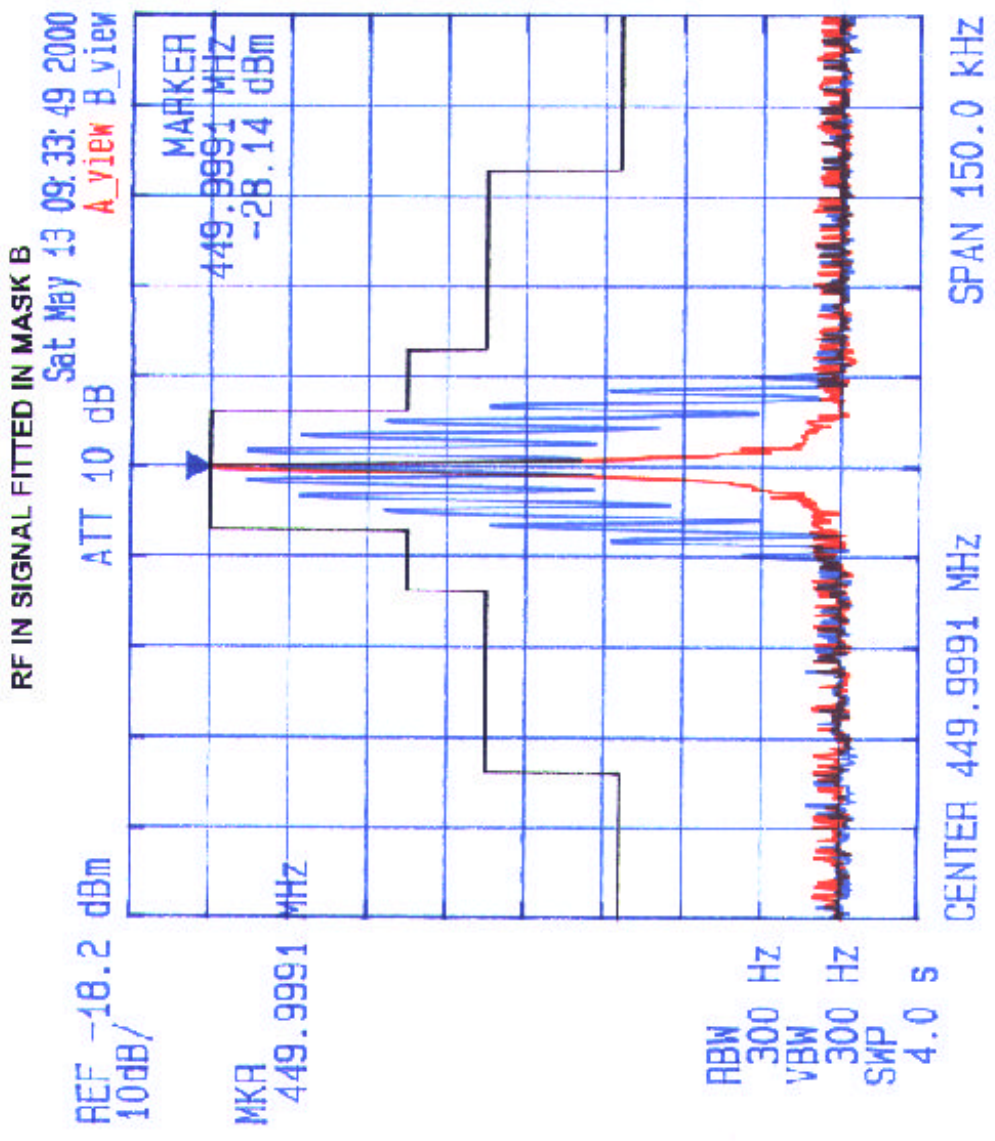


Exhibit 9 - Plot # 2



KAVAL TELECOM INC.

LINKnet OFR 400 RF Modules, 450 - 512 MHz

Tx Freq.: 450 MHz, RF Output: 9 Watts

RF In at level of -30 dBm @ 450 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz

Emission Mask B, Channel spacing 25 kHz

Date: May 13, 2000
Tested by: Hong, Triah

PLOT # 2

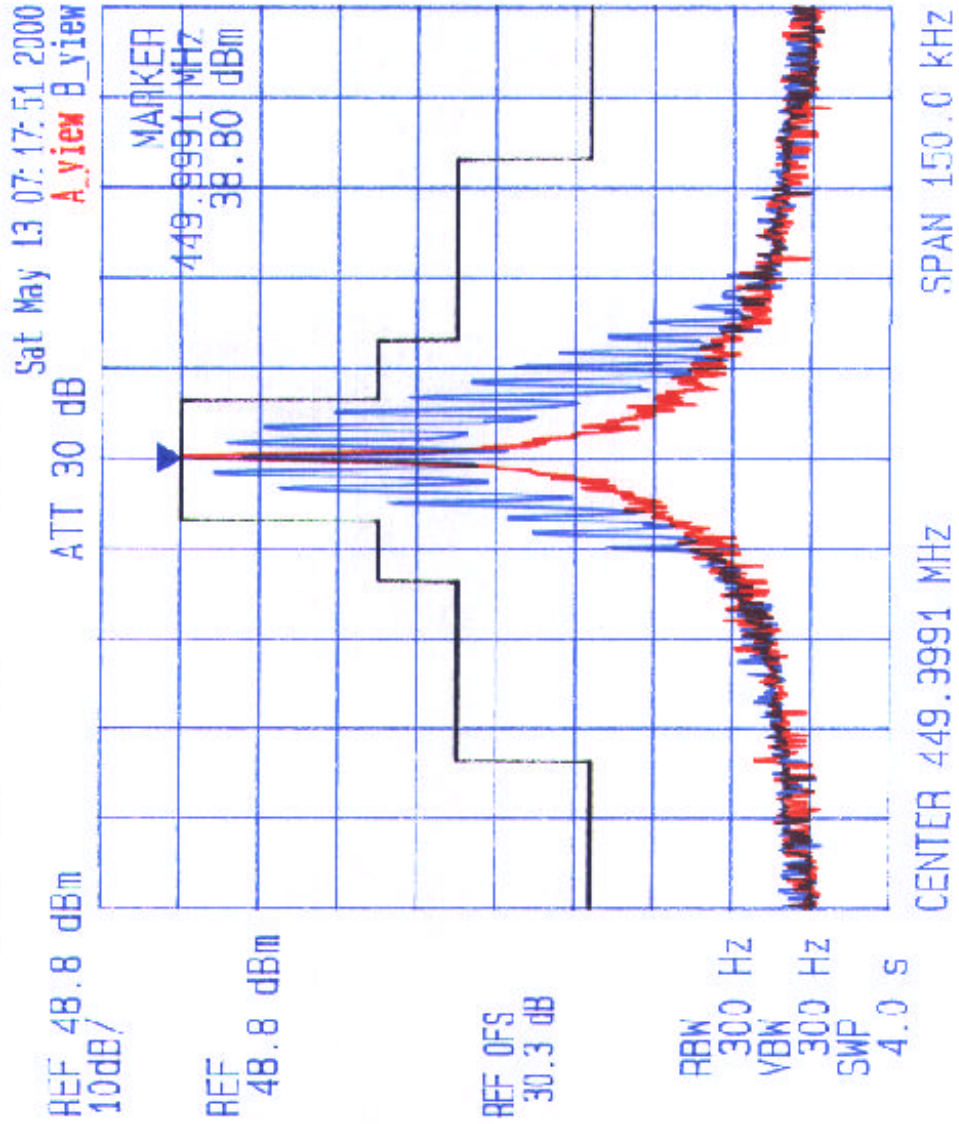


Exhibit 9 - Plot # 3



KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
RF In at level of -30 dBm @ 460 MHz
Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz
Emission Mask B, Channel spacing 25 kHz

Date: May 13 2000
Tested by: Hung Trinh

PLOT #3

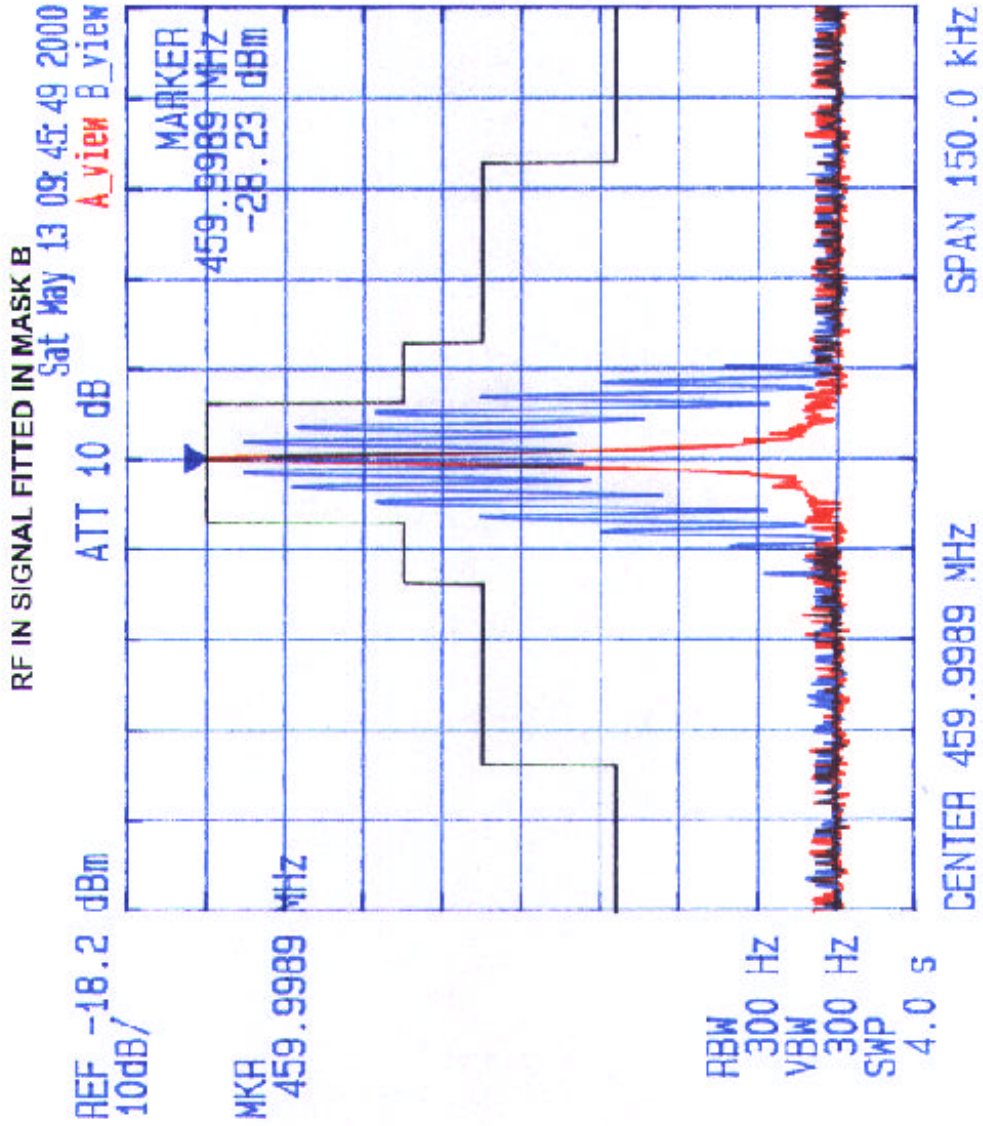


Exhibit 9 - Plot # 4

Date: May 13, 2000
Tested by: Hung Trinh

PLOT #4

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
Tx Freq: 460 MHz, RF Output: 8.5 Watts
RF In at level of -30 dBm @ 460 MHz
Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 0 kHz
Emission Mask B, Channel spacing 25 kHz

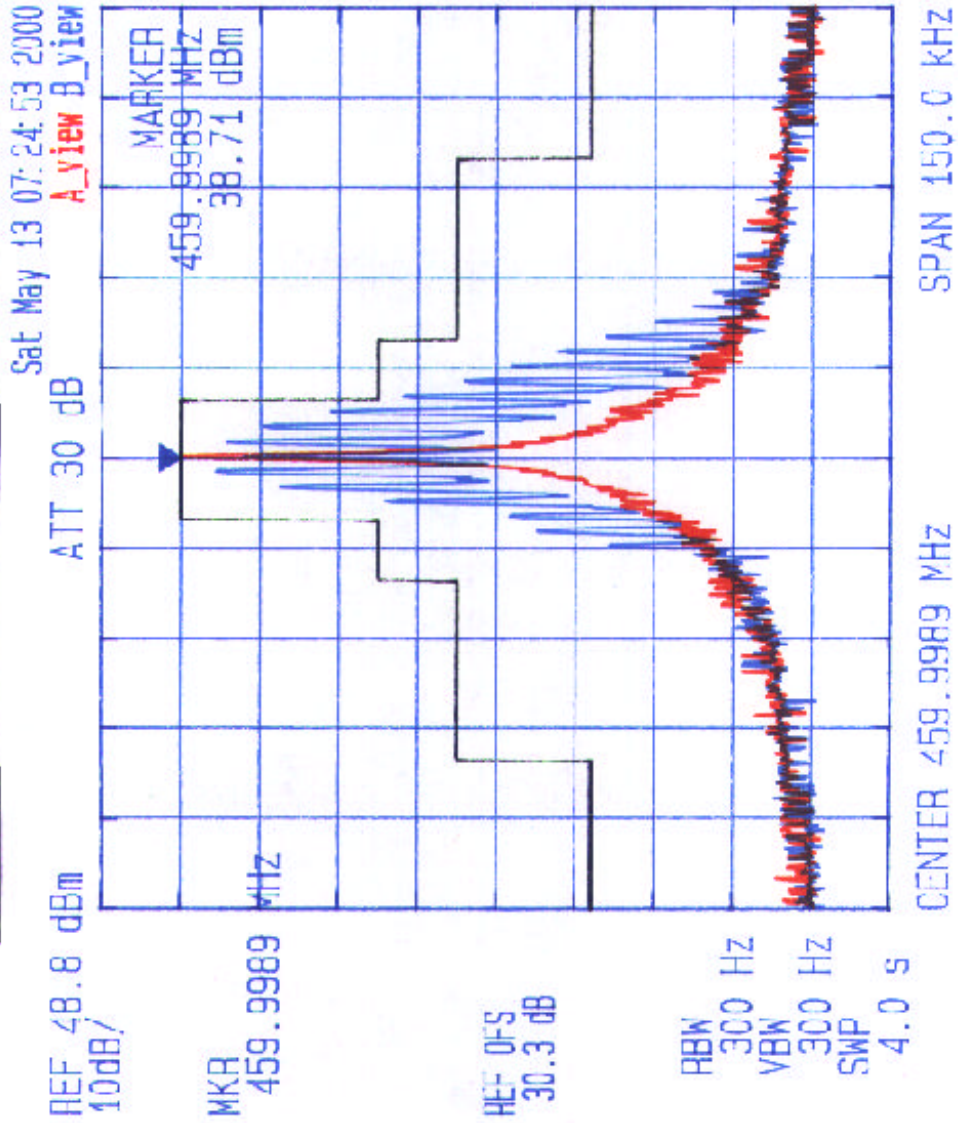


Exhibit 9 - Plot # 5



KAVAL TELECOM INC.

LINKnet OFR 400 RF Modules, 450 - 512 MHz

RF In at level of -30 dBm @ 470 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz

Emission Mask B, Channel spacing 25 kHz

Date: May 13 2000
Tested by: Hung Trinh

PLOT # 5


RF IN SIGNAL FITTED IN MASK B

Sat May 13 09:53:17 2000

REF -18.2 dBm
10dB/

ATT 10 dB

A_view B_view

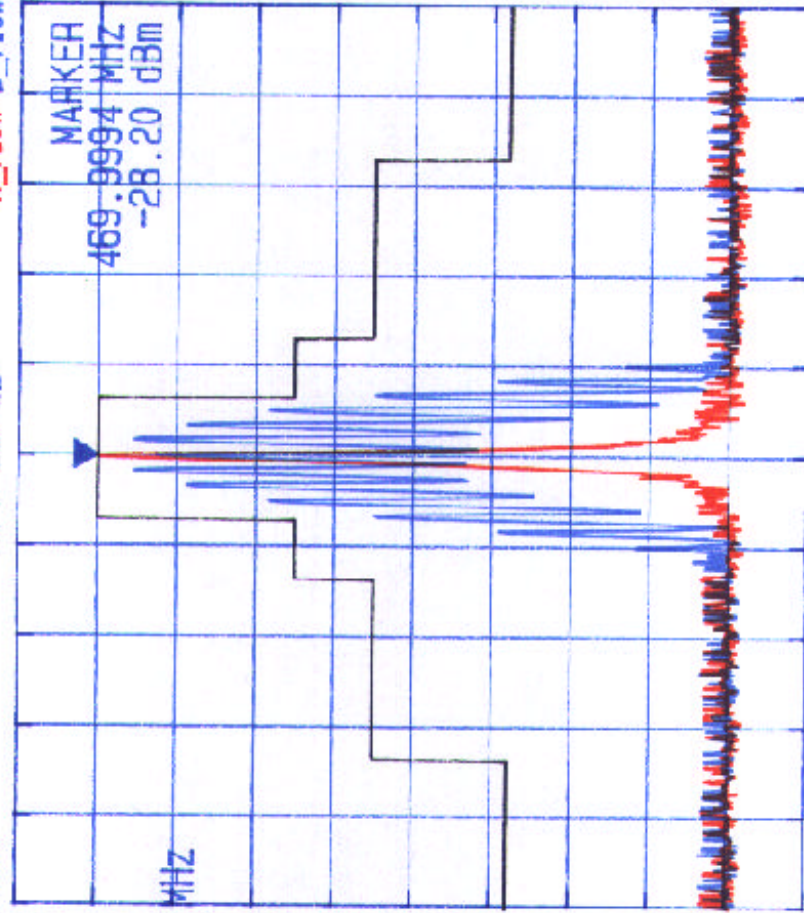

CENTER 469.9994 MHz
SPAN 150.0 KHZ

Exhibit 9 - Plot # 6



KAVAL TELECOM INC.

LINKnet OFR 400 RF Modules, 450 - 512 MHz
Tx Freq.: 470 MHz, RF Output: 8.3 Watts
RF In at level of -30 dBm @ 470 MHz
Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz
Emission Mask B, Channel spacing 25 kHz

Date: May 13, 2000
Tested by: Hung Trinh

PLOT #6


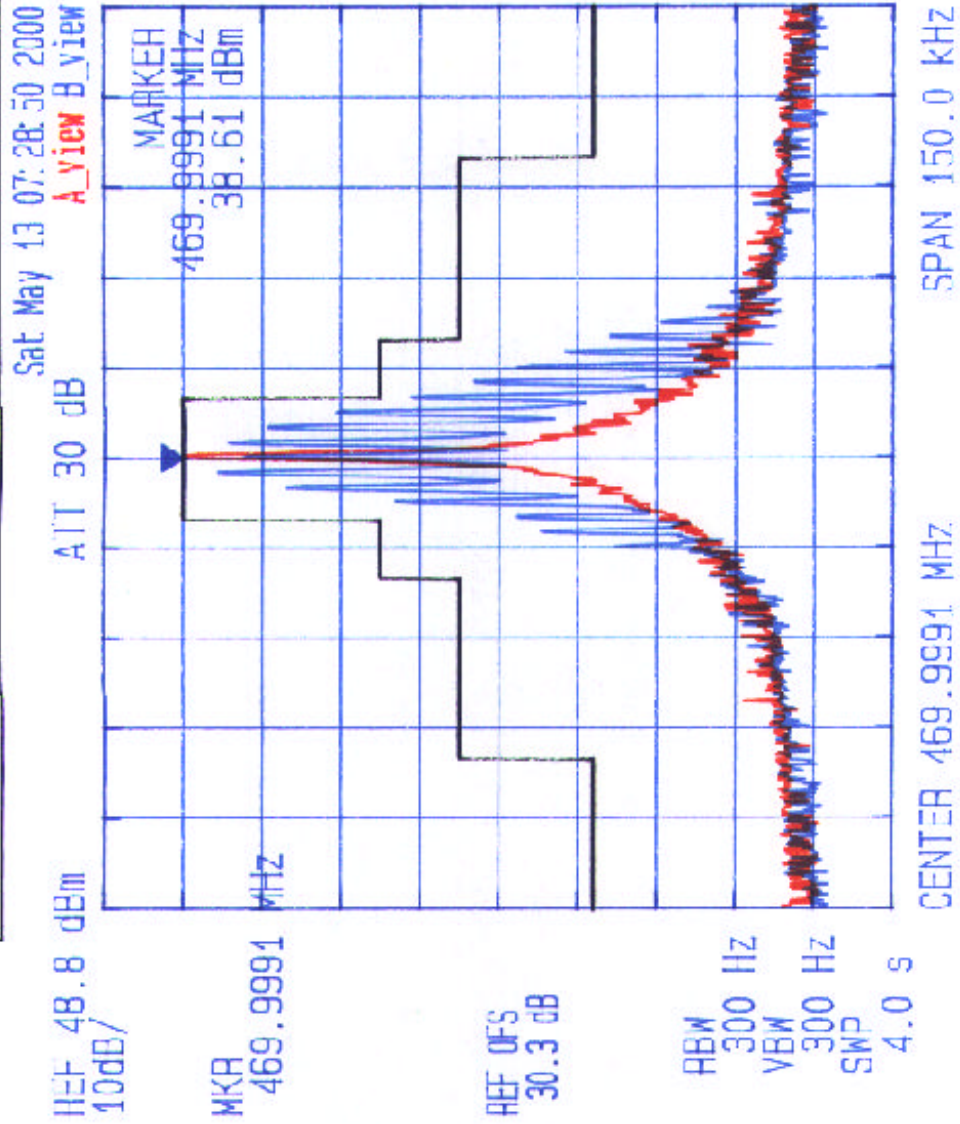


Exhibit 9 - Plot # 7

Date: May 13, 2000
Tested by: Hung Trinh
PLOT # 7

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
RF In at level of -30 dBm @ 450 MHz
Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 3 kHz
Emission Mask C, Channel spacing 25 kHz



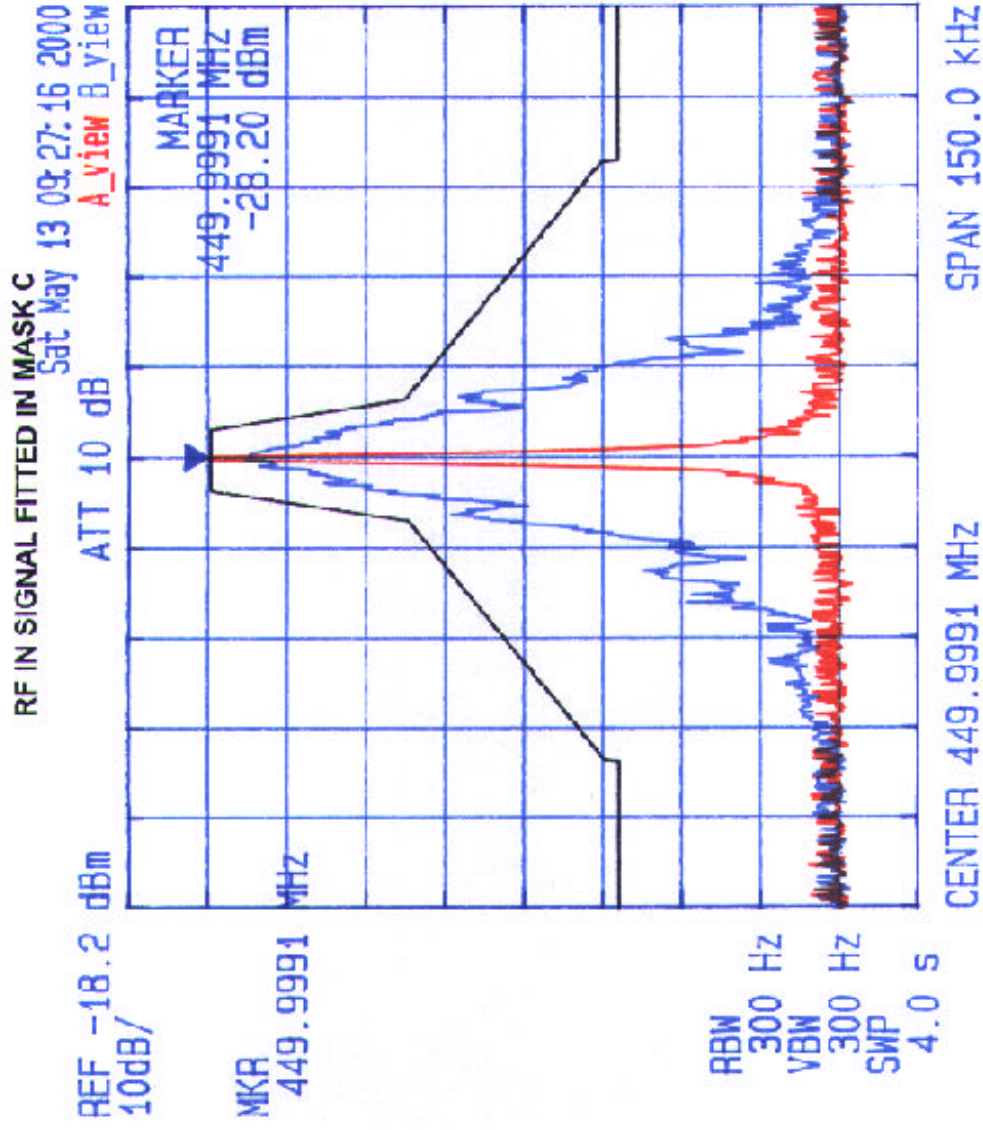

KAVAL TELECOM INC.

LINKnet OFR 400 RF Modules, 450 - 512 MHz

Tx Freq.: 445.0 MHz, RF Output: 9 Watts

RF In at level of -30 dBm @ 445.0 MHz

Mod: FM Modulated with an external 8600 h/s random data, Freq. Dev.: 3 kHz

Emission Mask C, Channel spacing 25 kHz

Date: May 13 2000
Tested by: Hung Trinh

PLOT # 8

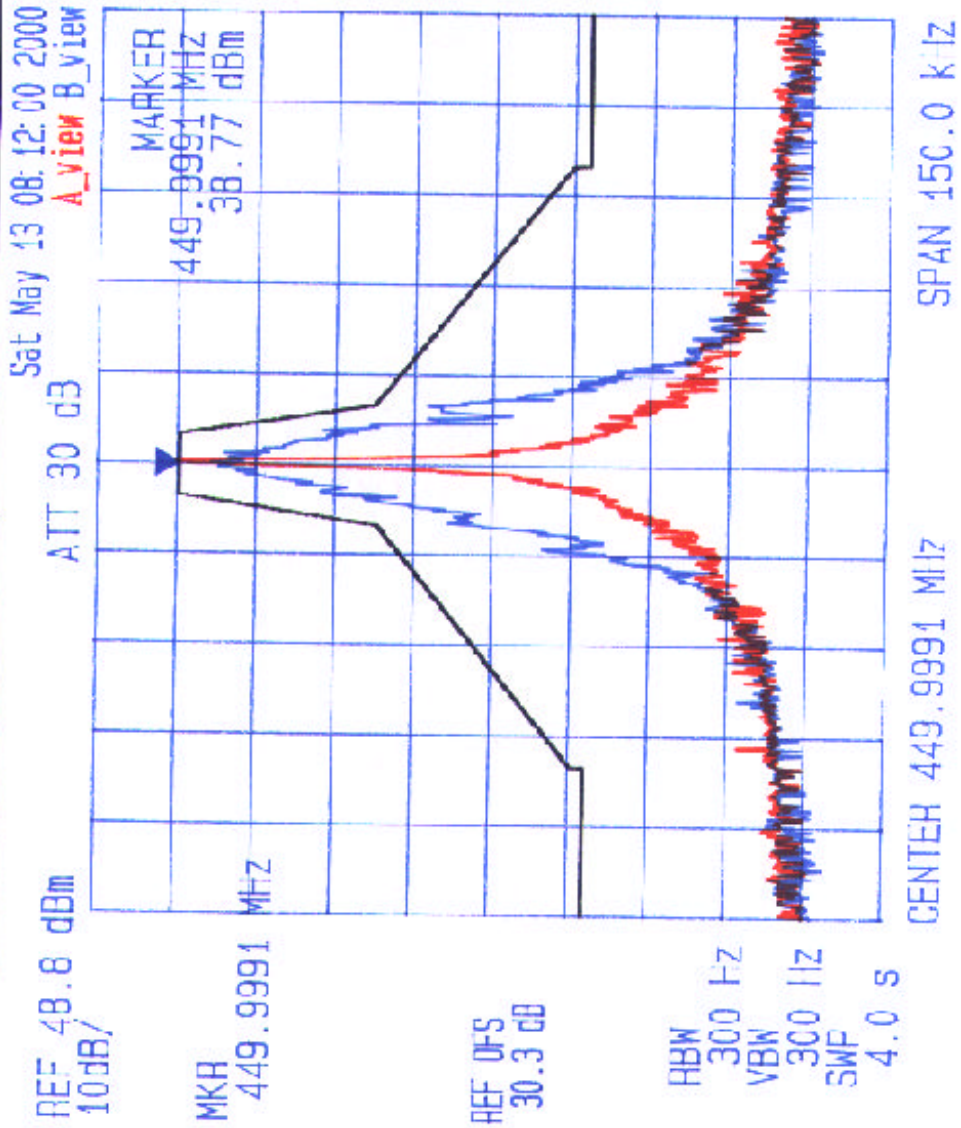


Exhibit 9 - Plot # 9

Date: May 13, 2000
Tested by: Hung Trinh
PLOT # 9

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
RF In at level of -30 dBm @ 460 MHz
Mod: FM Modulated with an external 9600 bps random data. Freq. Dev: 3 kHz
Emission Mask C, Channel spacing 25 kHz

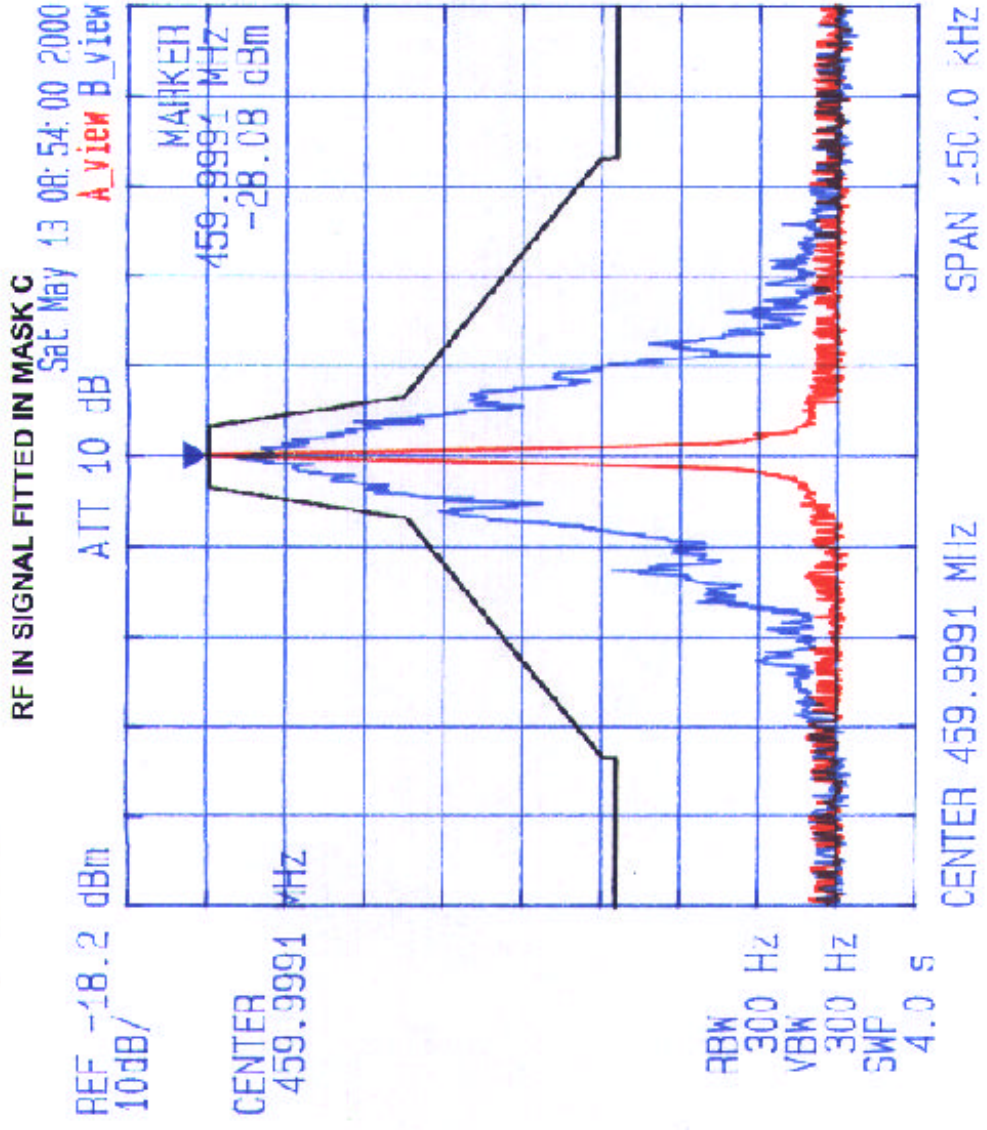


Exhibit 9 - Plot # 10



KAVAL TELECOM INC.

LINKnet OFR 400 RF Modules, 450 - 512 MHz

Tx Freq: 480 MHz, RF Output: 8.5 Watts

RF In at level of -30 dBm @ 480 MHz

Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 3 kHz

Emission Mask C, Channel spacing 25 kHz

Date: May 13, 2000
Tested by: Hung Trinh

PLOT # 10

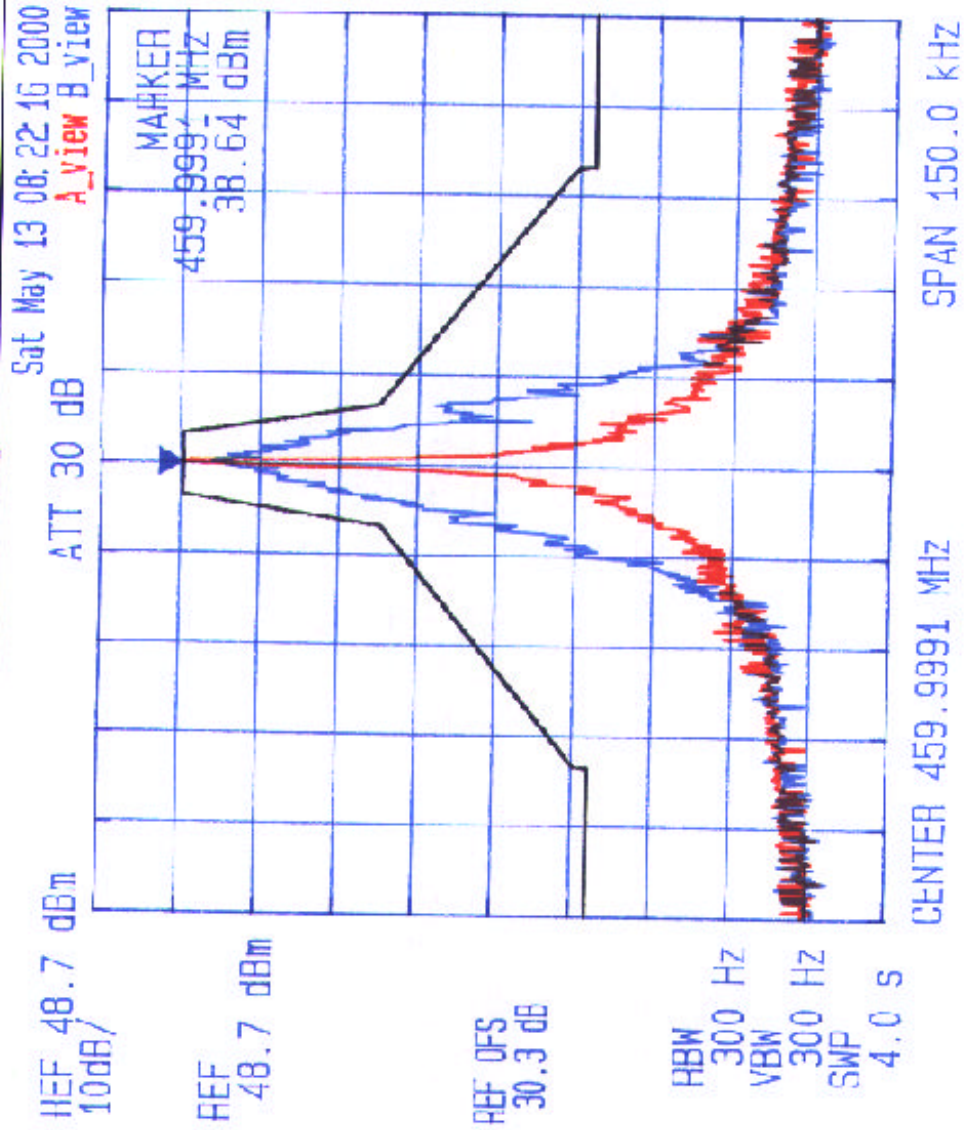


Exhibit 9 - Plot # 11

Date: May 13, 2000
Tested by: Hung Trinh
PLOT # 11

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
RF In at level of -20 dBm @ 470 MHz
Mod: FM Modulated with an external 8600 b/s random data, Freq. Dev.: 3 kHz
Emission Mask C, Channel spacing 25 kHz

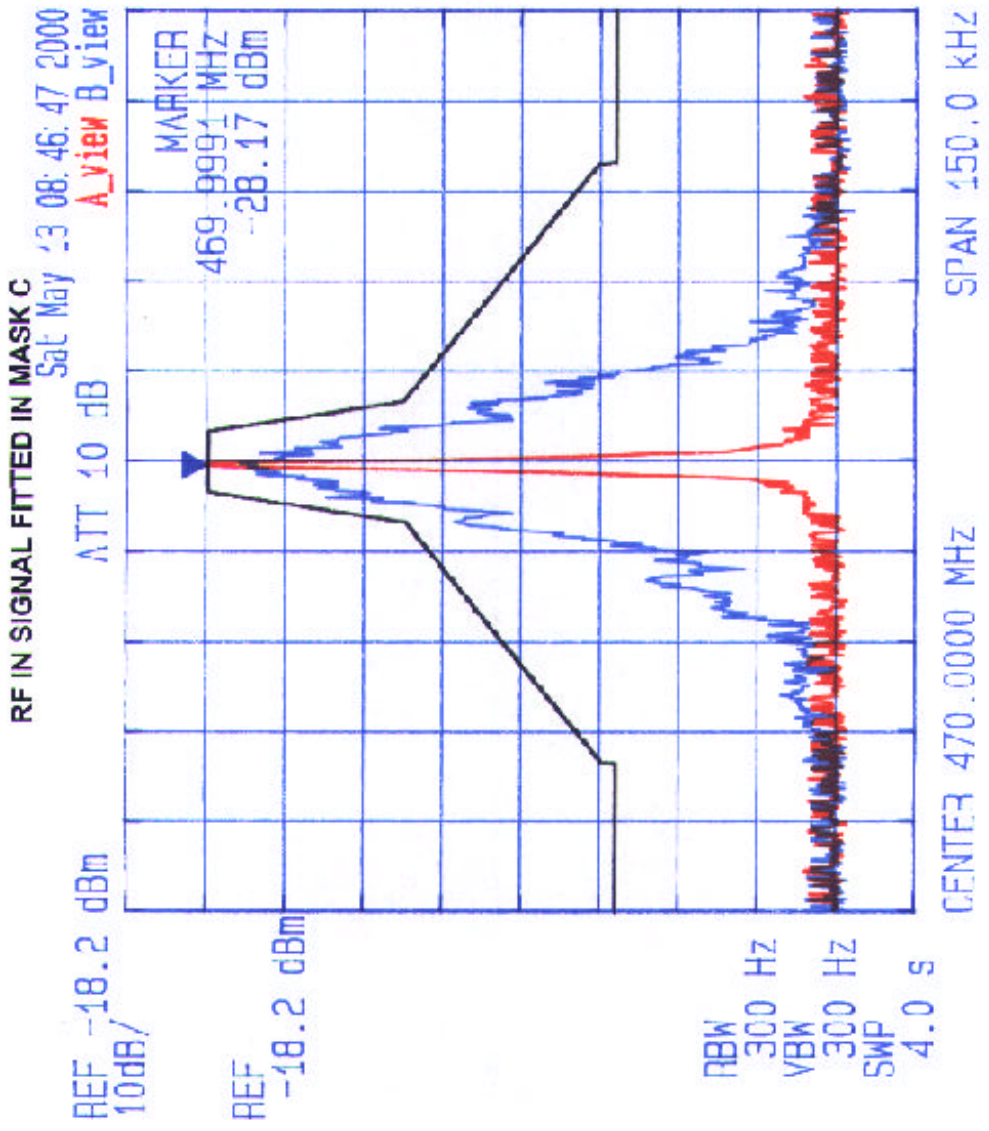


Exhibit 9 - Plot # 12

Date: May 13, 2000
Tested by: Hung Trinh

PLOT #12

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
Tx Freq.: 470 MHz, RF Output: 8.3 Watts
RF In at level of -30 dBm @ 470 MHz
Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 5 kHz
Emission Mask C, Channel spacing 25 kHz

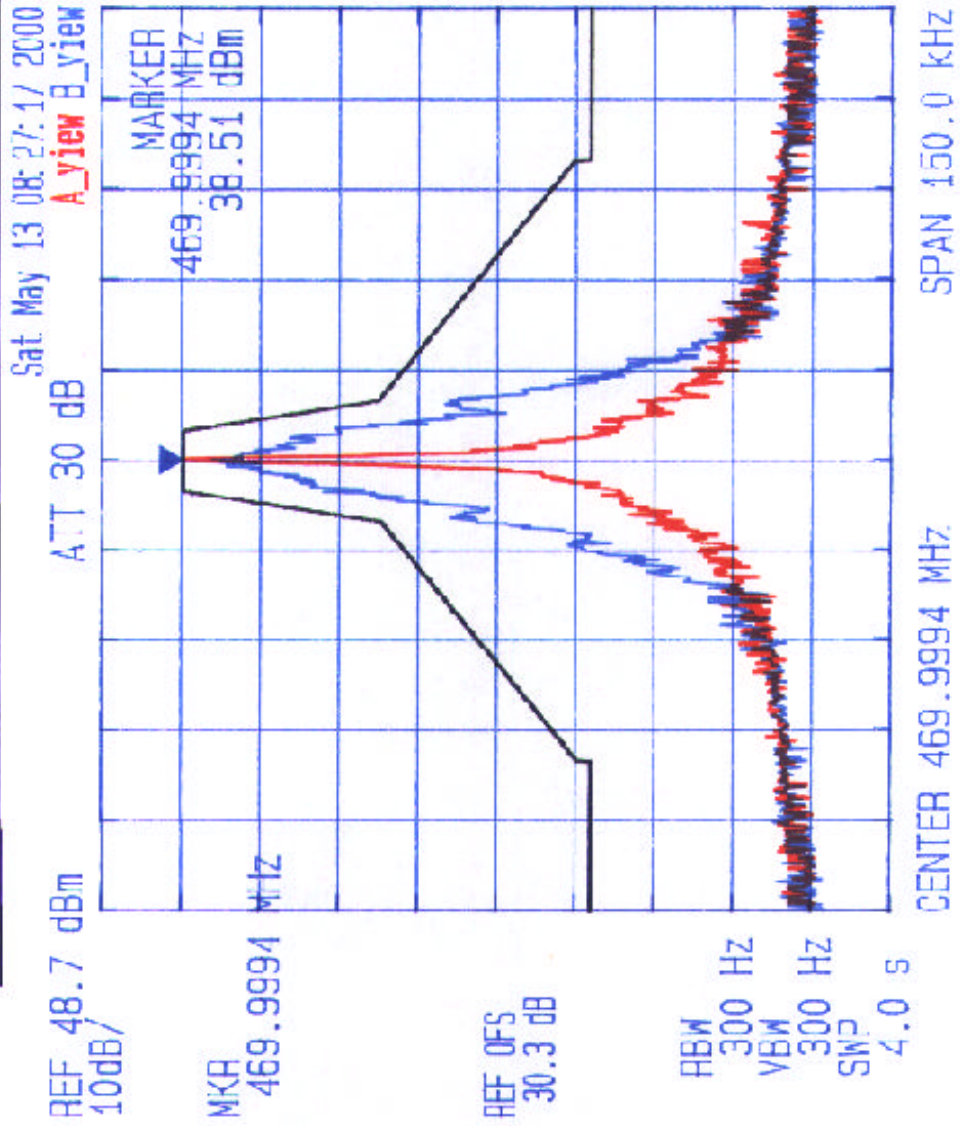


Exhibit 9 - Plot # 13

Date: May 13, 2000
 Tested by: Hung Trinh

PLOT #13

KAVAL TELECOM INC.


LINKnet OFR 400 RF Modules, 450 - 512 MHz

Tx Freq.: 450 MHz, RF Output: 9 Watts

RF In at level of -30 dBm @ 450 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz

Transmitter Antenna Power Conducted Emissions

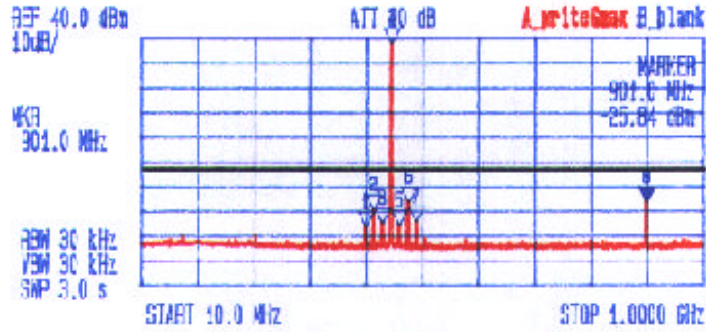

*** Multi Marker List ***

No.	Freq	Level	Label
1	404.6 MHz	-35.63 dBm	A
2	418.7 MHz	-28.56 dBm	A
3	434.3 MHz	-34.47 dBm	A
4	448.8 MHz	38.50 dBm	A
5	464.0 MHz	-35.28 dBm	A
6	481.0 MHz	-25.72 dBm	A
7	493.7 MHz	-33.66 dBm	A
8	901.0 MHz	-25.84 dBm	A


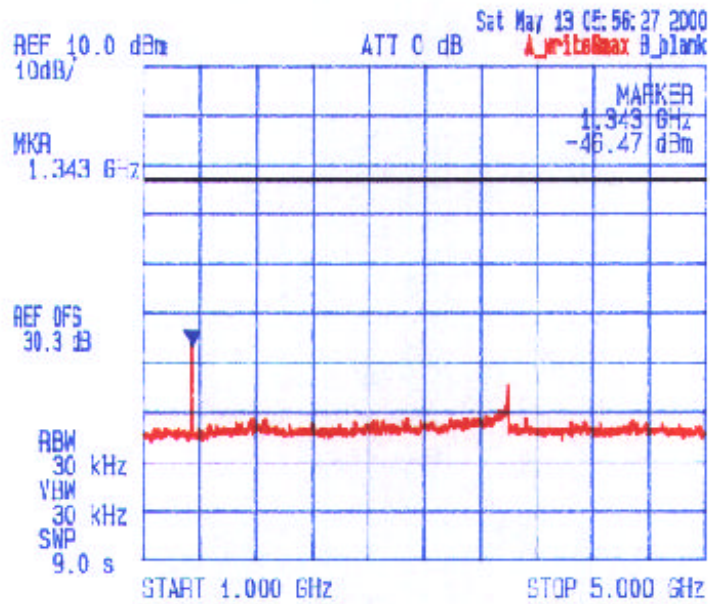


Exhibit 9 - Plot # 14

Date: May 13, 2000
 Tested by: Hung Trinh

PLOT # 14

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
 Tx Freq.: 450 MHz, RF Output: 9 Watts
 RF In at level of -30 dBm @ 450 MHz
 Mod: FM Modulated with an external 3600 b/s rancom data, Freq. Dev.: 3 kHz
Transmitter Antenna Power Conducted Emissions

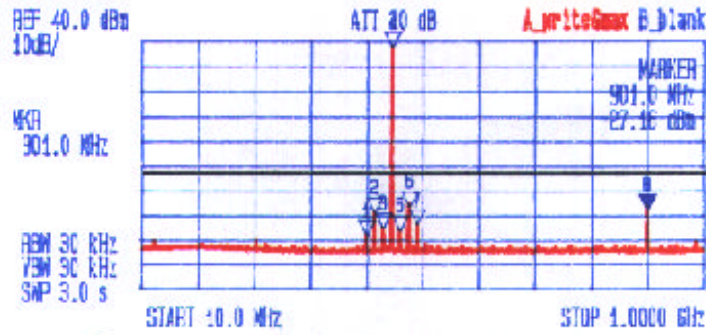

*** Multi Marker List ***

No.	Freq (MHz)	Power (dBm)	Label
1	404.6	-37.78	A
2	418.7	-28.44	A
3	434.3	-34.53	A
4	449.8	-38.16	A
5	464.0	-35.53	A
6	481.0	-25.72	A
7	493.7	-33.44	A
8	501.0	-27.16	A

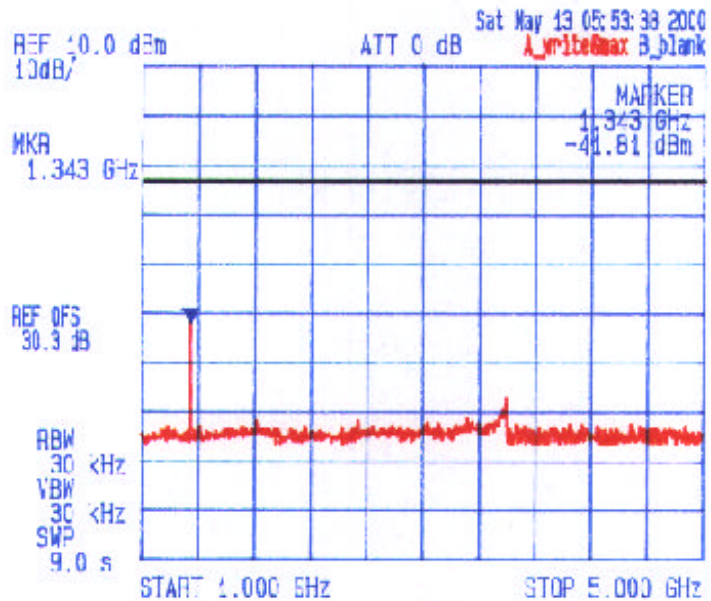


Exhibit 9 - Plot # 15

Date: May 25, 2000
 Tested by: Hung Trinh

PLOT #15

KAVAL TELECOM INC.


LINKnet OFR 400 RF Modules, 450 - 512 MHz

Tx Freq.: 450 MHz, RF Output: 5 Watts

RF In at level of -30 dBm @ 450 MHz


Mod: FM Modulated with 2.5 kHz Sinc Wave signal, Freq. Dev.: 3 kHz

Transmitter Antenna Power Conducted Emissions

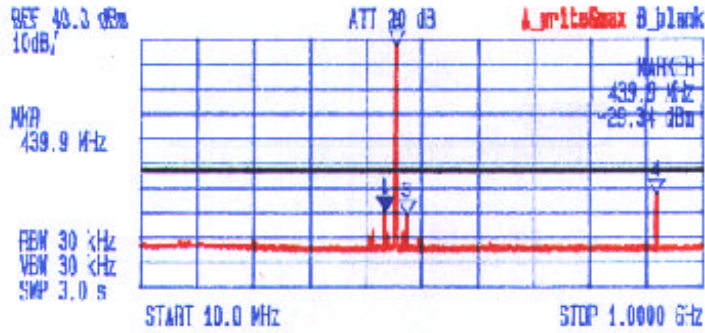

*** Multi Marker List ***

No.	Freq	Level	Unit
No. 1:	439.9 MHz	-29.34	dBm
No. 2:	459.7 MHz	-38.34	dBm
No. 3:	479.5 MHz	-30.91	dBm
No. 4:	919.4 MHz	-22.31	dBm

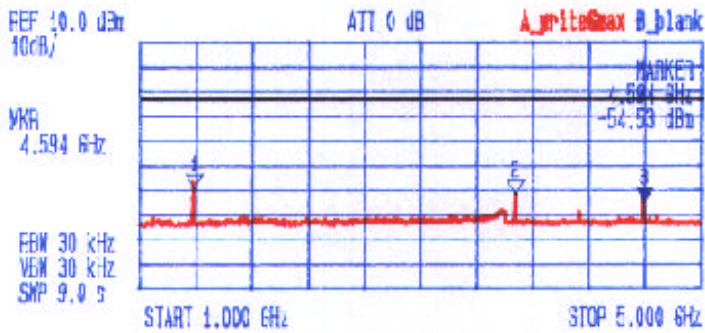

*** Multi Marker List ***


No.	Freq	Level	Unit
No. 1:	1.383 GHz	-49.31	dBm
No. 2:	3.674 GHz	-51.69	dBm
No. 3:	4.594 GHz	-54.53	dBm

Exhibit 9 - Plot # 16

Date: May 13 2000
 Tested by: Hung Trinh


Plot # 16

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
 Tx Freq.: 450 MHz, RF Output: 8.5 Watts
 RF In at level of -30 dBm @ 450 MHz
 Mod: FM Modulated with an external 600 bis random data, Freq. Dev.: 3 kHz
Transmitter Antenna Power Conducted Emissions

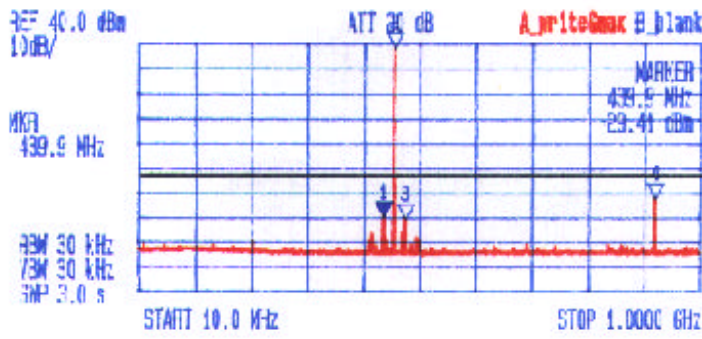

*** Multi Marker List ***

No.	Freq	Power	Unit
No. 1:	439.9 MHz	-29.41 dBm	A
No. 2:	459.7 MHz	38.53 dBm	A
No. 3:	479.5 MHz	-30.34 dBm	A
No. 4:	919.4 MHz	-21.59 dBm	A

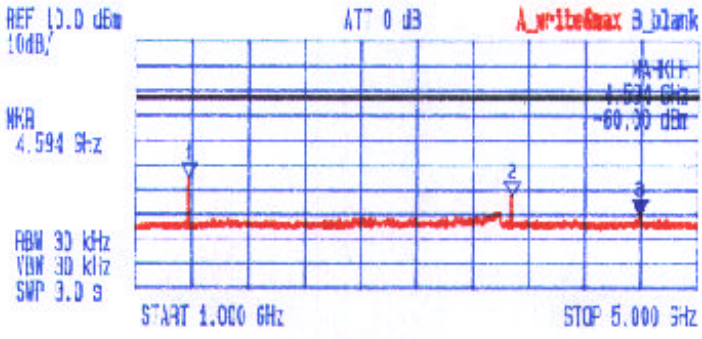

*** Multi Marker List ***


No.	Freq	Power	Unit
No. 1:	1.377 GHz	-44.59 dBm	A
No. 2:	3.650 GHz	-52.25 dBm	A
No. 3:	4.594 GHz	-60.00 dBm	A

Exhibit 9 - Plot # 17

Date: May 13, 2000
 Tested by: Hung Trinh


PLOT #17

KAVAL TELECOM INC.
 LINKnet OFR 400 RF Modules, 450 - 512 MHz
 Tx Freq.: 470 MHz, RF Output 8.3 Watts
 RF In at level of -30 dBm @ 470 MHz
 Mod.: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 3 kHz
Transmitter Antenna Power Conducted Emissions

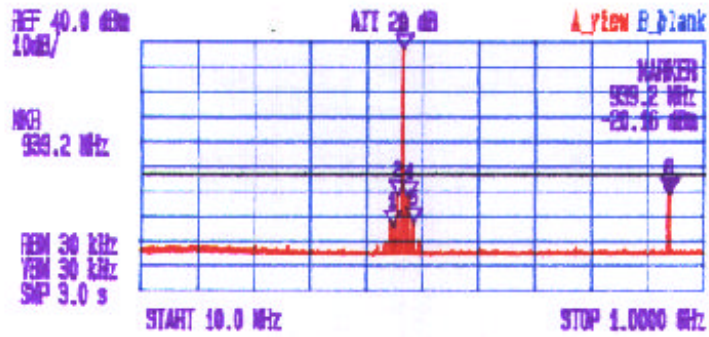

*** Multi Marker List ***

No.	Freq.	Level	Unit
No. 1:	451.3 MHz	-33.25	dBm
No. 2:	459.7 MHz	-20.91	dBm
No. 3:	469.6 MHz	37.72	dBm
No. 4:	479.5 MHz	-24.94	dBm
No. 5:	488.0 MHz	-32.25	dBm
No. 6:	939.2 MHz	-20.16	dBm
No. 7:			
No. 8:			
Δ:			

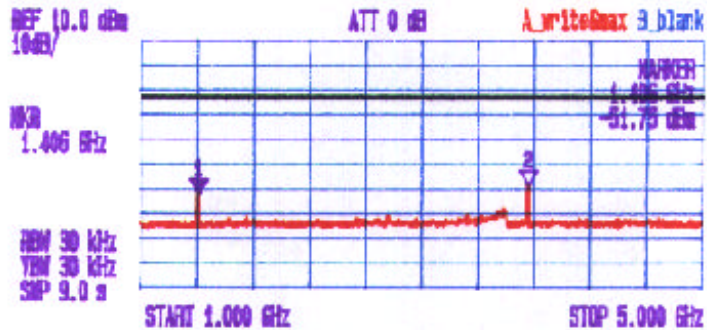

*** Multi Marker List ***

No.	Freq.	Level	Unit
No. 1:	1.406 GHz	-51.75	dBm
No. 2:	3.754 GHz	-48.25	dBm
No. 3:			
No. 4:			
No. 5:			
No. 6:			
No. 7:			
No. 8:			
Δ:			

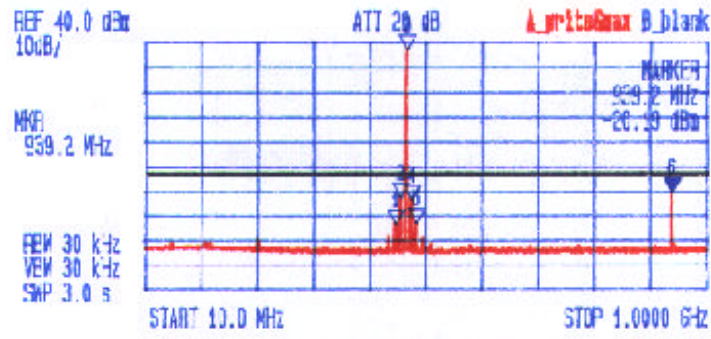


Exhibit 9 - Plot # 18

Date: May 13, 2000
 Tested by: Hung Triah


PLOT # 18

KAVAL TELECOM INC.
LINKnet OFR 400 RF Modules, 450 - 512 MHz
 Tx Freq.: 470 MHz, RF Output: 0.3 Watts
 RF In at level of -30 dBm @ 470 MHz
 Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 3 kHz
Transmitter Antenna Power Conducted Emissions



*** Multi Marker List ***

No.	Freq.	Level	Unit
No. 1:	451.3 MHz	-33.13 dBm	A
No. 2:	459.7 MHz	-22.31 dBm	A
No. 3:	471.1 MHz	37.41 dBm	A
No. 4:	479.5 MHz	-23.34 dBm	A
No. 5:	488.0 MHz	-33.00 dBm	A
No. 6:	939.2 MHz	-20.19 dBm	A

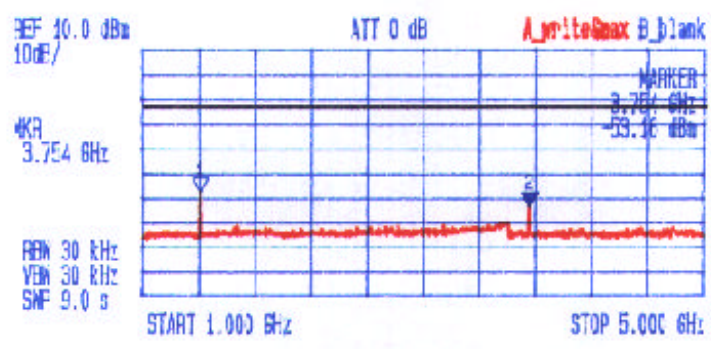

*** Multi Marker List ***

No.	Freq.	Level	Unit
No. 1:	1.406 GHz	-47.44 dBm	A
No. 2:	3.754 GHz	-53.16 dBm	A