

Exhibit 9 - Plot # 1



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 800-821 MHz

RF In at level of -30 dBm @ 806.5112 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: kHz

Emission Mask B

Date: May 12, 2000  
Tested by: Hung Trinh

PLOT #1

RF IN SIGNAL FITTED IN MASK B

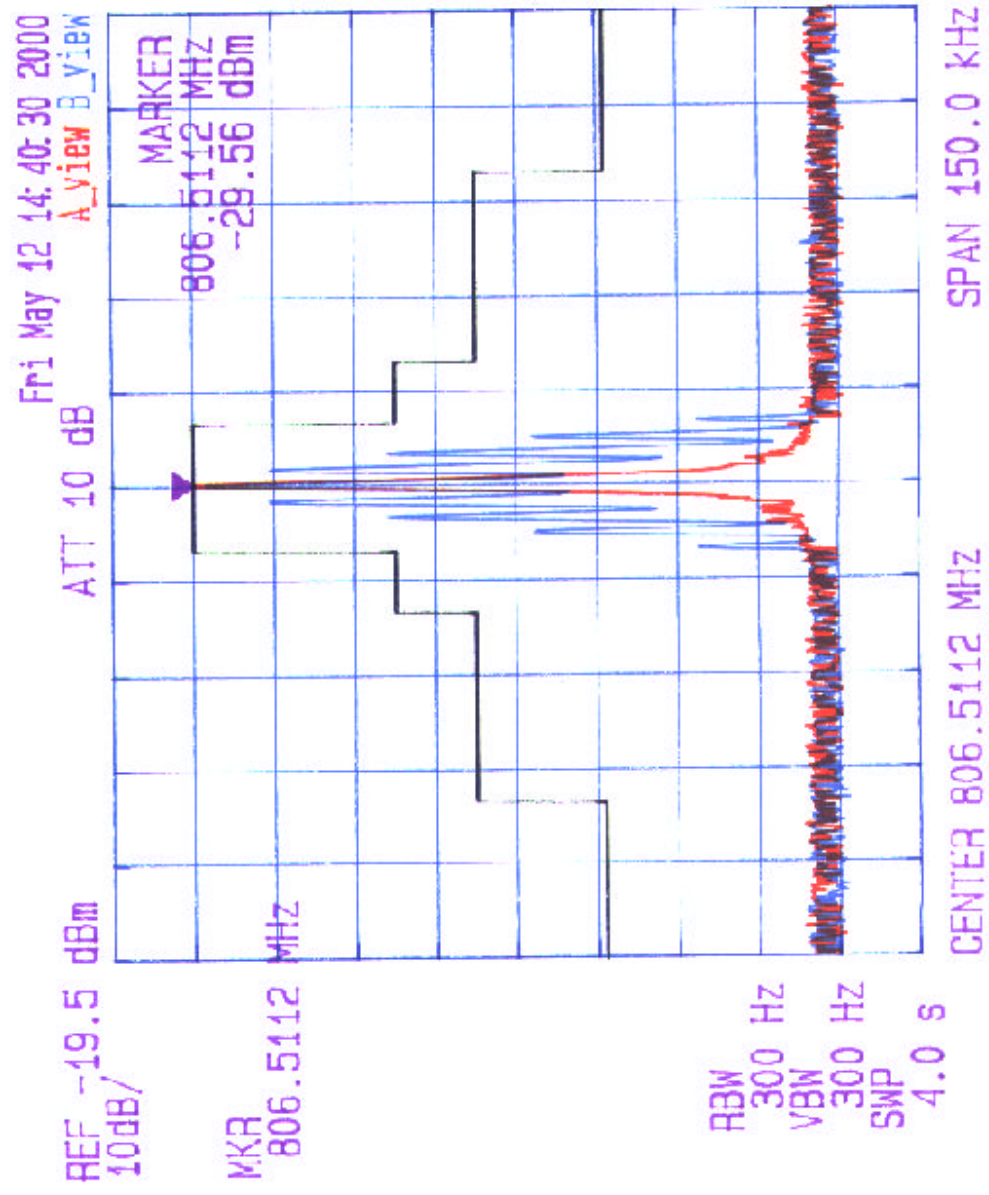


Exhibit 9 - Plot # 2



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 806 - 821 MHz

Tx Freq: 806.51857 MHz, RF Output: 2.4 Watts

RF In at level of -30 dBm @ 806.51857 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev: 2 kHz

Emission Mask B, Channel spacing 25 kHz

Date: May 12 2000  
Tested by: Hung Trinh

PLOT # 2

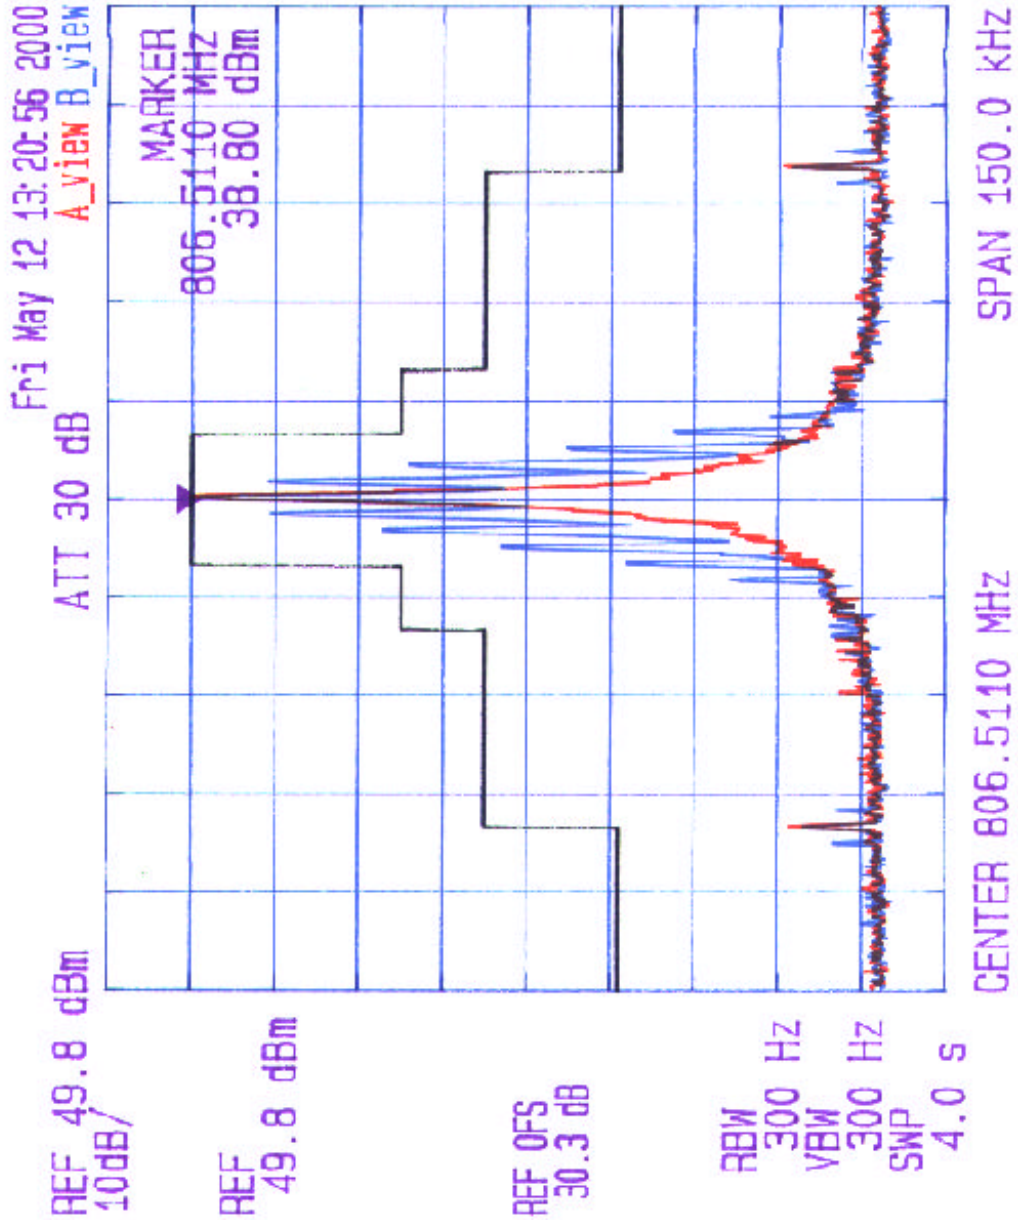


Exhibit 9 - Plot # 3



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 806- 831 MHz

RF In at level of -30 dBm @ 813.0110 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: kHz

Emission Mask B

Date: May 12 2000  
Tested by: Hung Trinh

PLOT # 3


RF IN SIGNAL FITTED IN MASK B

Fpi May 12 14: 36: 23 2000

REF -19.5 dBm  
10dB/

ATT 10 dB

A\_VIEW B\_VIEW

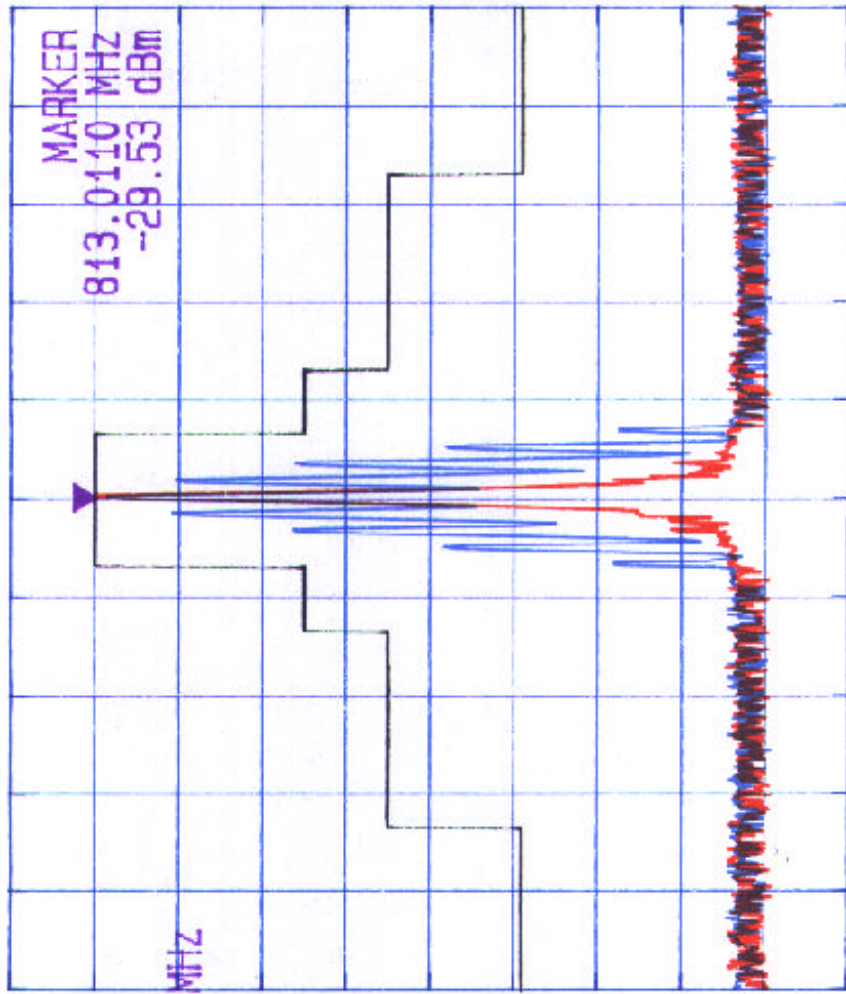

MARKER  
813.0110 MHz  
-29.53 dBm

MKR  
813.0110 MHz

RBW 300 Hz  
VBW 300 Hz  
SNP 4.0 s

CENTER 813.0110 MHz

SPAN 150.0 KHZ



Exhibit 9 - Plot # 4

Date: May 12 2000  
Tested by: Hung Trinh

PLOT # 4

KAVAL TELECOM INC.  
LINKnet OFR800 RF Modules, 806 - 821 MHz  
Tx Freq: 806.0125 MHz, RF Output: 2.4 Watts  
RF In at level of -30 dBm @ 513.0135 MHz  
Mod: FM Modulated with 2.5 kHz Sinc Wave signal, Freq. Dev.: 2 kHz  
Emission Mask B, Channel spacing 25 kHz

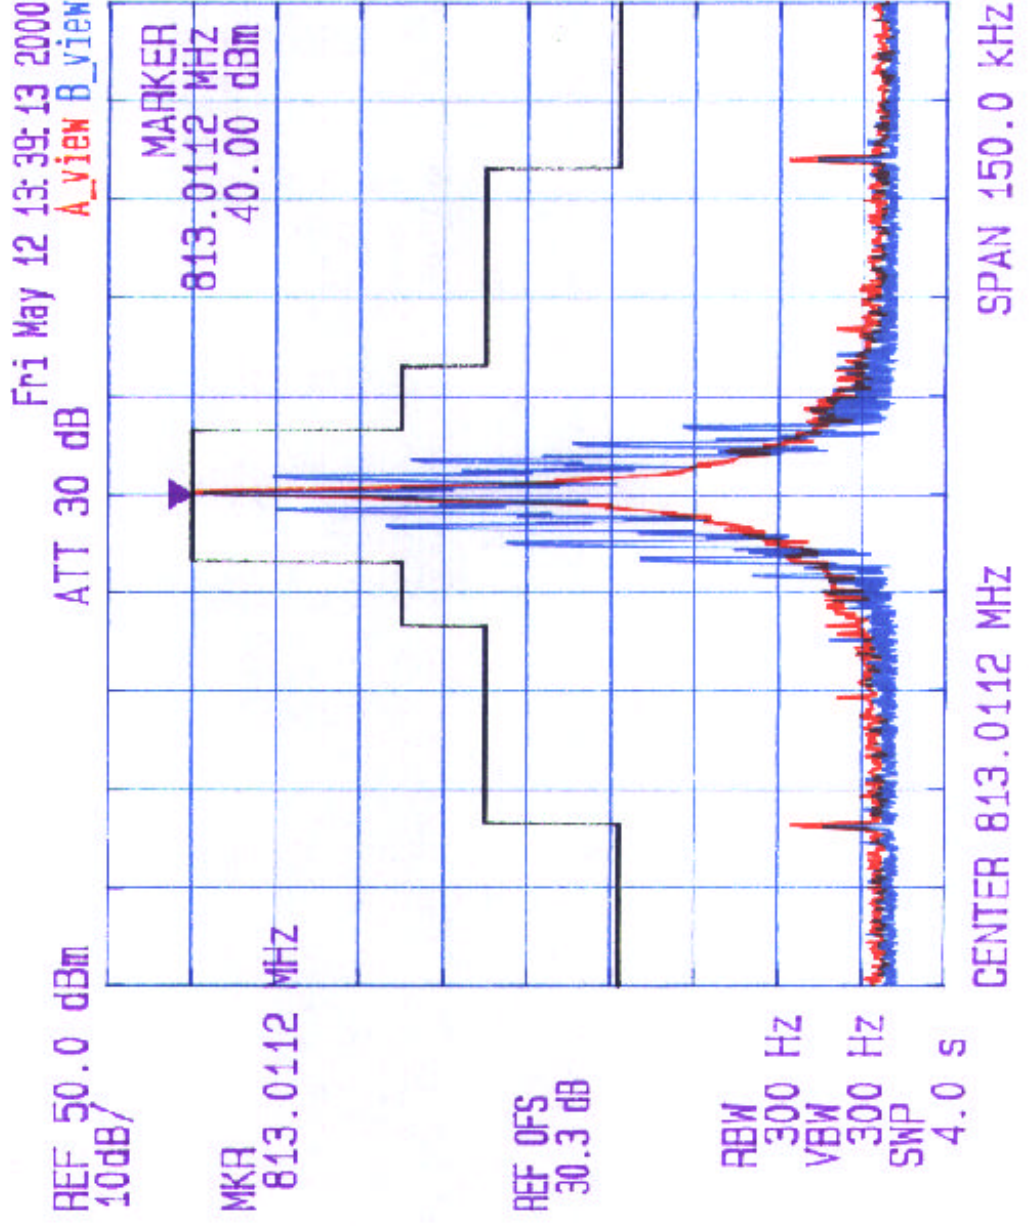


Exhibit 9 - Plot # 5



KAVAL TELECOM INC.

LINKnet CFR800 RF Modules, 200-88-1 MHz

RF In at level of -30 dBm @ 820.5112 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 2 kHz

Emission Mask B

Date: May 12, 2000  
Tested by: Hung Trinh

PLOT # 5

RF IN SIGNAL FITTED IN MASK B

Fri May 12 14:29:37 2000

A view B view


REF -19.5 dBm  
10dB/

ATT 10 dB

MKR  
820.5112 MHz

MARKER  
820.5112 MHz  
-29.44 dBm

RBW 300 Hz  
VBW 300 Hz  
SWP 4.0 s

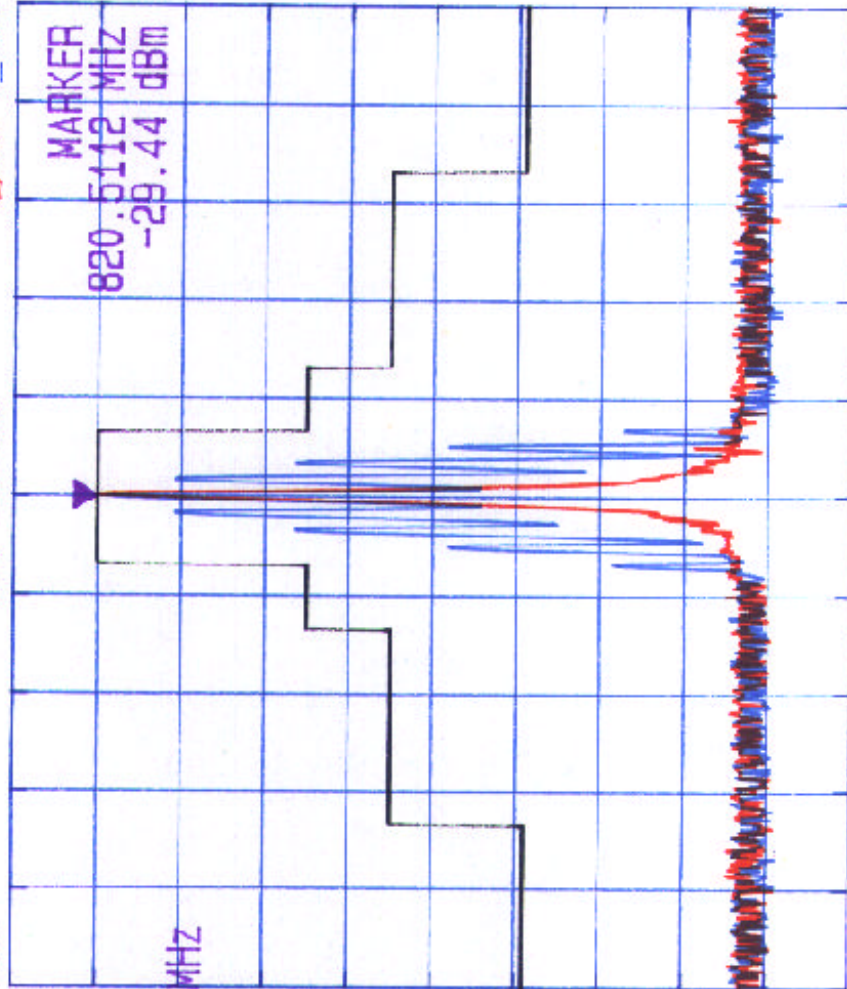

CENTER 820.5112 MHz  
SPAN 150.0 kHz

Exhibit 9 - Plot # 6



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 500 - 821 MHz

RF in at level of -30 dBm @ 820.5125 MHz  
Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 2 kHz

Emission Mask B

Date: May 12, 2000

Tested by: Hung Trinh

PLOT # 6

RF IN SIGNAL FITTED IN MASK B


Fri May 12 15:06:20 2000  
A\_view B\_view

REF 49.8 dBm  
10dB/

REF 49.8 dBm

REF OFS  
30.3 dB

RBW 300 Hz  
VBW 300 Hz  
SWP 4.0 s

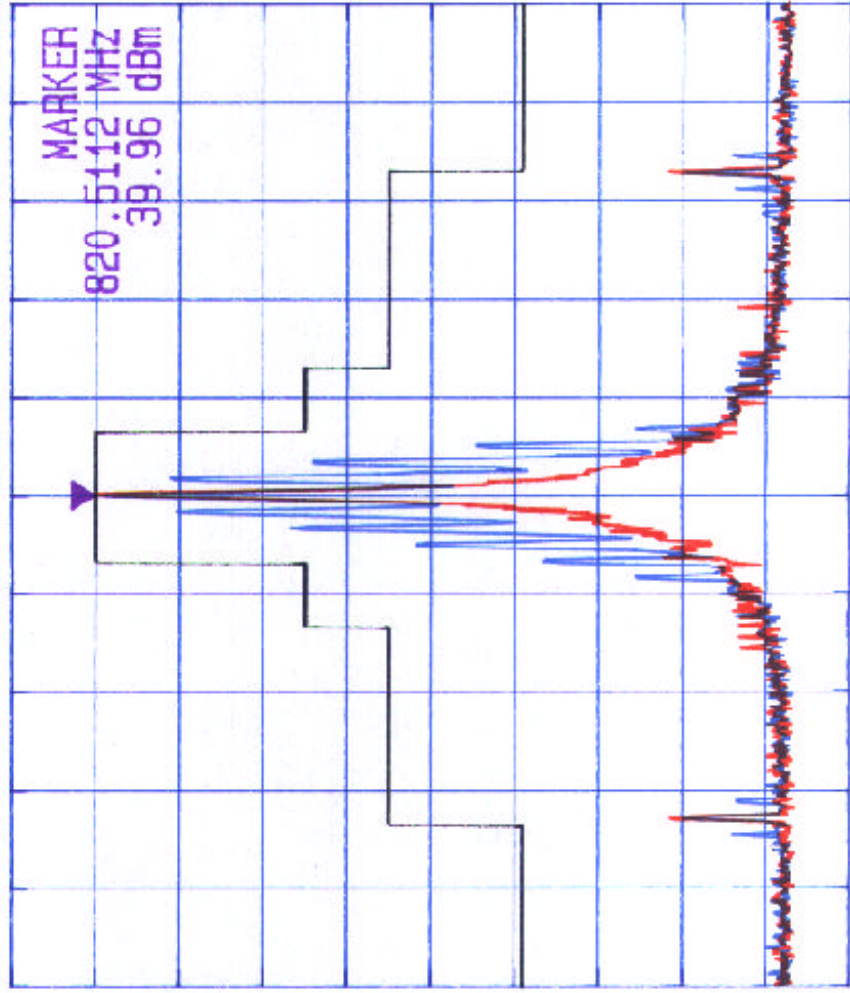

CENTER 820.5112 MHz

SPAN 150.0 kHz



Exhibit 9 - Plot # 7



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 806-321 MHz

RF In at level of -30 dBm @ 806.012 MHz

Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev. 2 kHz  
Emission Mask G

Date: May 12, 2000  
Tested by: Hung Trinh

Plot # 7

RF IN SIGNAL FITTED IN MASK G

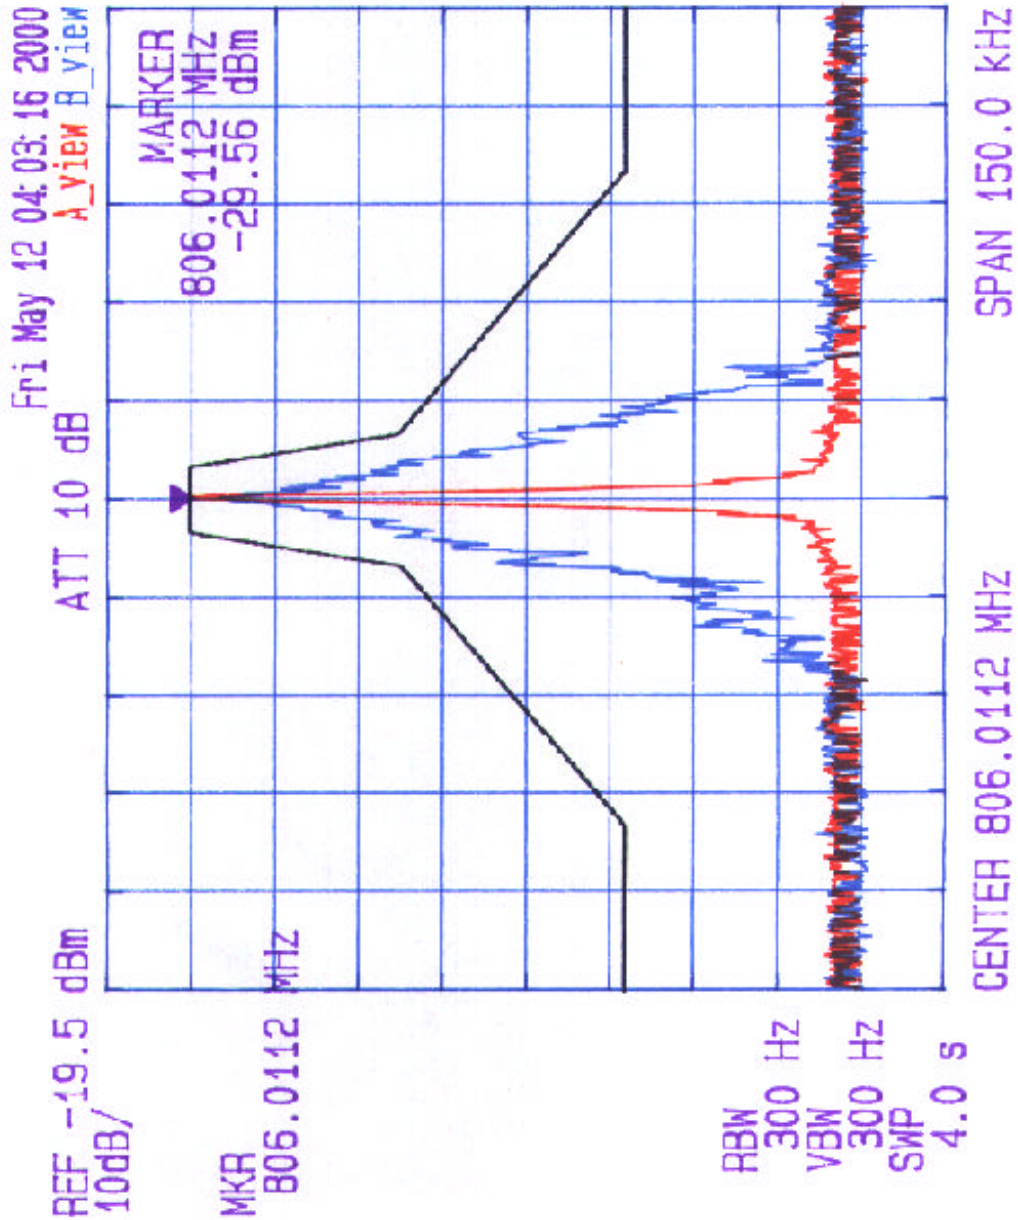


Exhibit 9 - Plot # 8

Date: April 07 2000  
 Tested by: Hung Trinh

Plot #8

KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 806.0187 MHz

Tx Freq: 806.0187 MHz, RF Output: 3.9 Watts

RF In at level of 30 dBm @ 806.0187 MHz

Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev: 44 kHz

Emission Mask G, Channel spacing 25 kHz

**UltraTech**  
 Engineering Labs Inc.

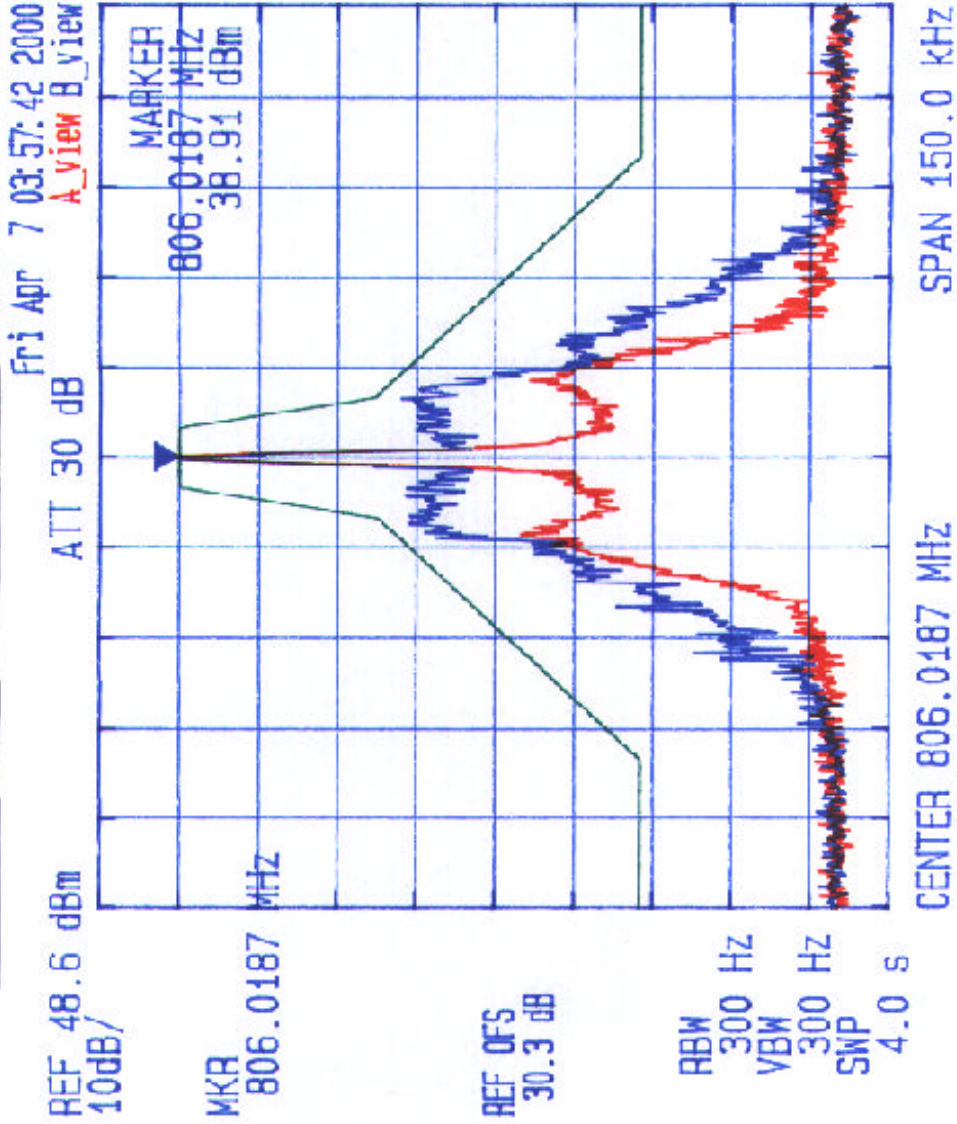




Exhibit 9 - Plot # 9



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 808-821 MHz

RF in at level of -30 dBm @ 813.0110 MHz

Mod: FM Modulated with an external 9500 b/s random data, Freq. Dev. 2 kHz

Emission Mask G

Date: May 12 2000  
Tested by: Hung Trinh

Plot #9

RF IN SIGNAL FITTED IN MASK G

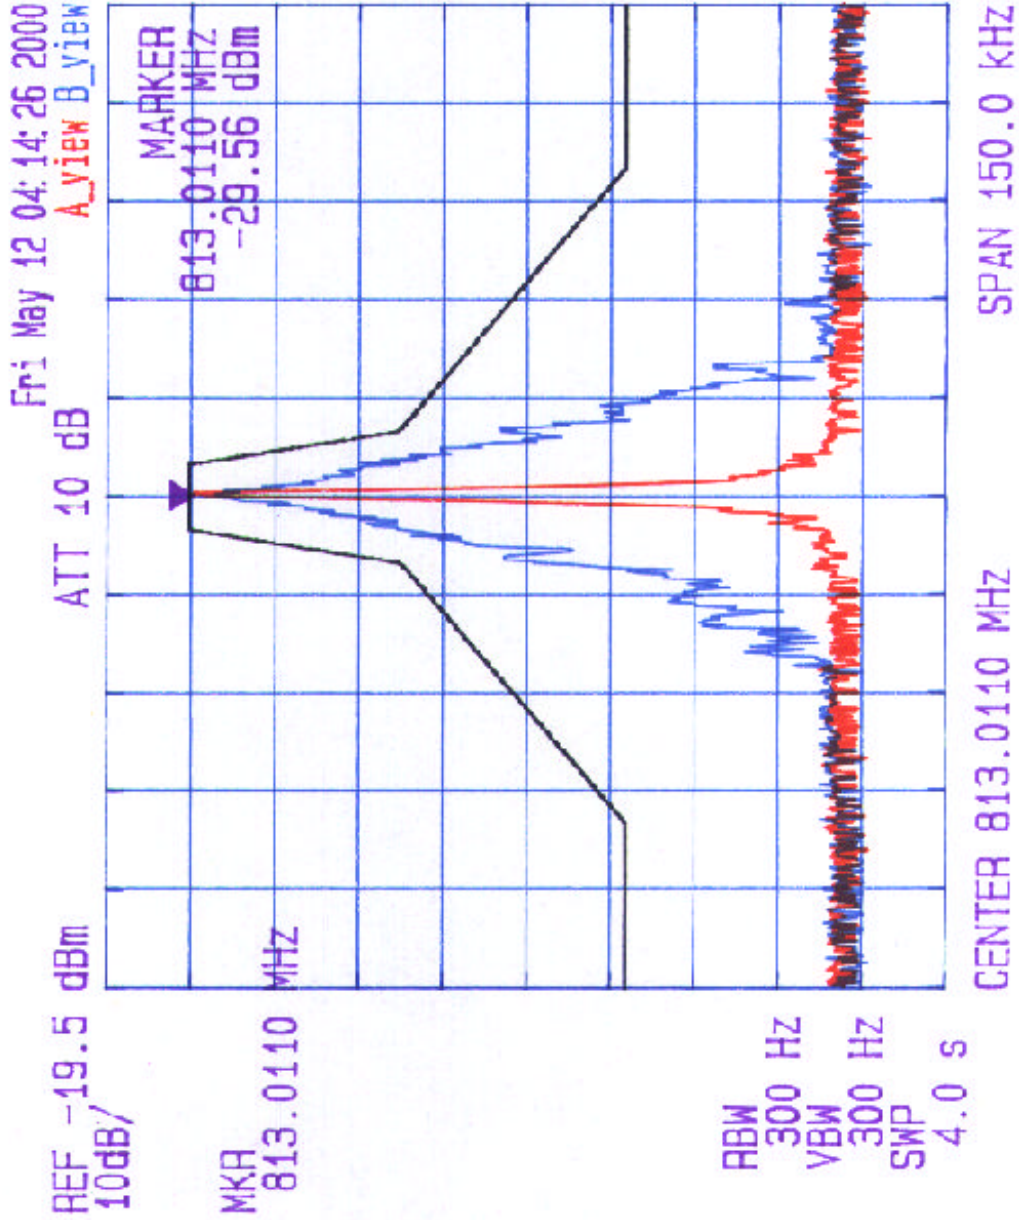


Exhibit 9 - Plot # 10

Date: April 07 2000  
 Tested by: Hung Trinh

PLOT # 10

**KAVAL TELECOM INC.**  
**LINKnet OFR800 RF Modules, 806 - 827 MHz**  
 Tx Freq: 813.0125 MHz, RF Output: 5.4 Watts  
 RF In at level of -30 dBm @ 813.0125 MHz  
 Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev: \_\_\_\_\_ kHz  
**Emission Mask G, Channel spacing 25 kHz**

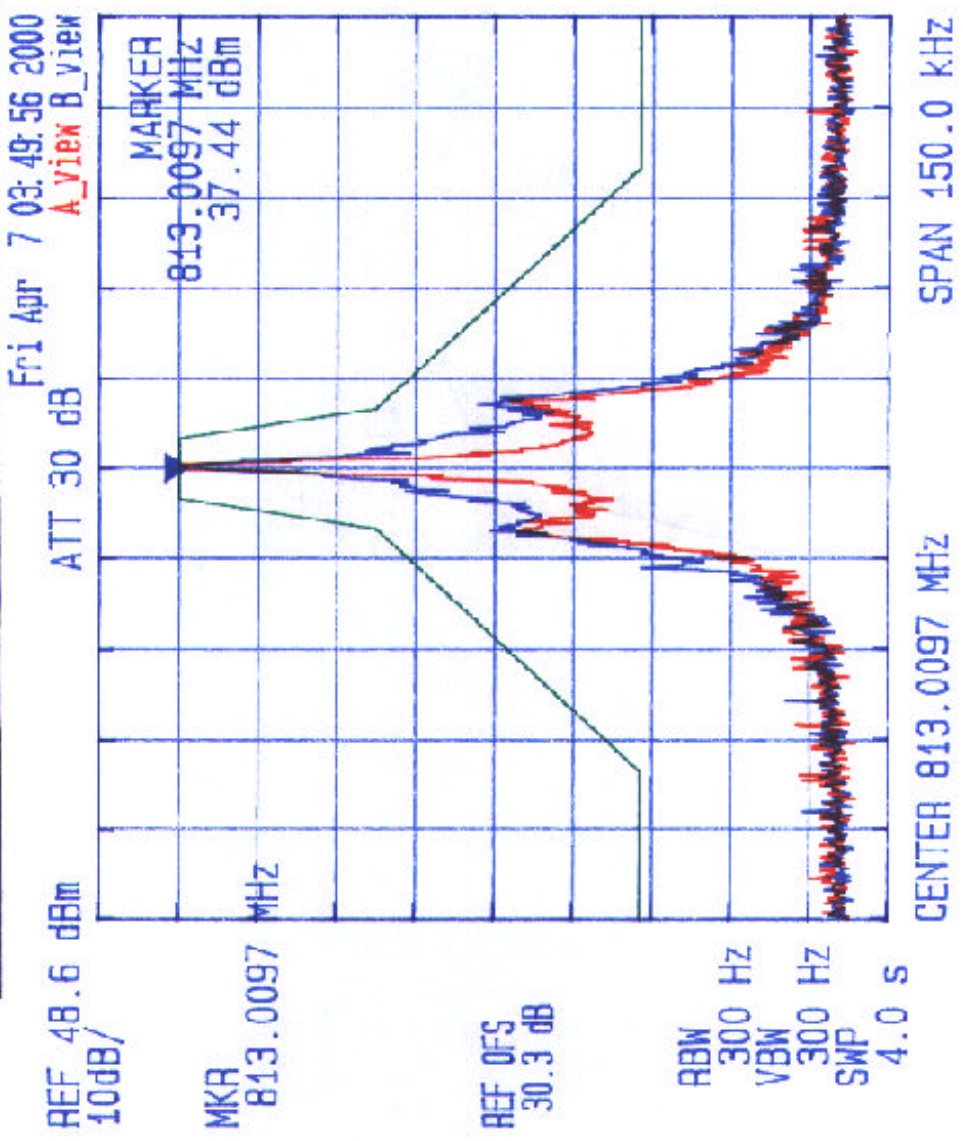


Exhibit 9 - Plot # 11



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 8206-881 MHz

RF In at level of -30 dBm @ 820.9862 MHz


Mod: FM Modulated with an external 9500 b/s random data, Freq. Dev.: 2 kHz

Emission Mask G

Date: May 12 2000  
Tested by: Hung Trinh

Plot # 11

RF IN SIGNAL FITTED IN MASK G

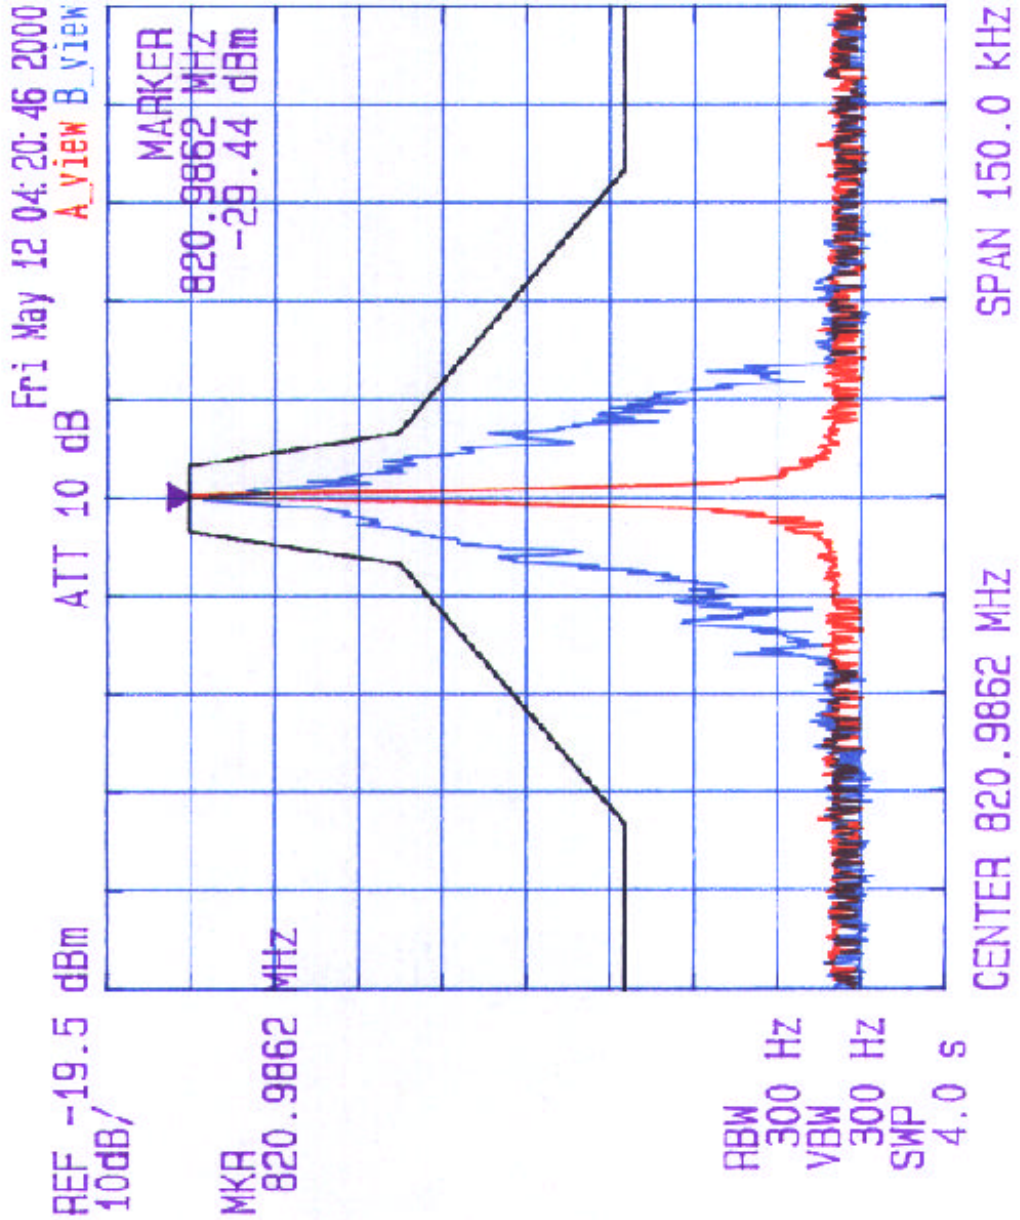



# Exhibit 9 - Plot # 12



**KAVAL TELECOM INC.**

**LINKnet OFR800 RF Moduics, 806.827 MHz**

Tx Freq: 820.9825 MHz, RF Output: 8.3 Watts

RF In at level of -30 dBm @ 820.9825 MHz

Mod: FM Modulated with an external 9600 bps random data, Freq. Dev.: 4 kHz

**Emission Mask G, Channel spacing 25 kHz**

Date: April 22 2000  
Tested by: Hung Trinh

Plot #12

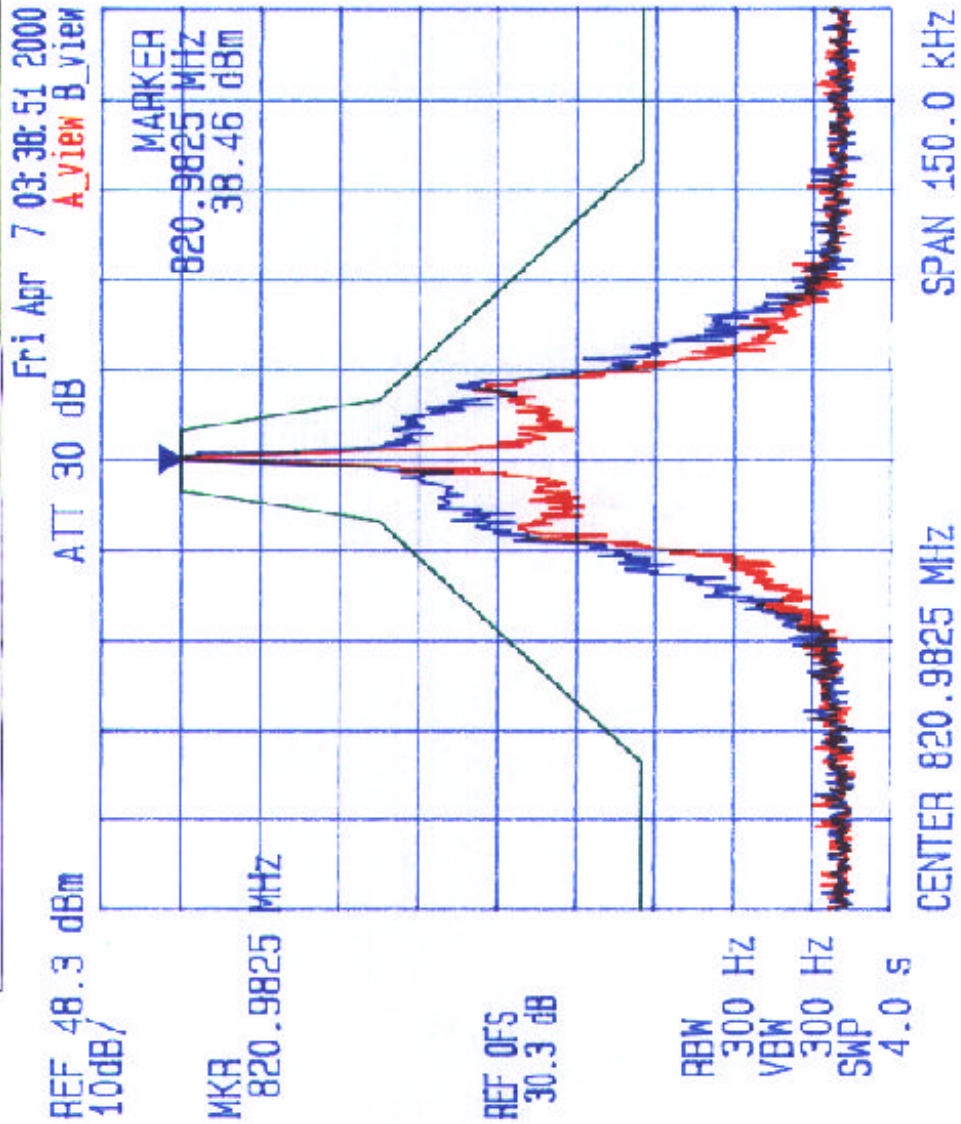


Exhibit 9 - Plot # 13



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851.0112 MHz

RF In at level of -30 dBm @ 851.0112 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev: 2 kHz


Emission Mask B

Date: May 11 2000  
Tested by: Hung Trinh

PLOT # 13

RF IN SIGNAL FITTED IN MASK B

REF -19.5 dBm  
10dB/  
ATT 10 dB  
Thu May 11 04:57:12 2000  
A\_view B\_view

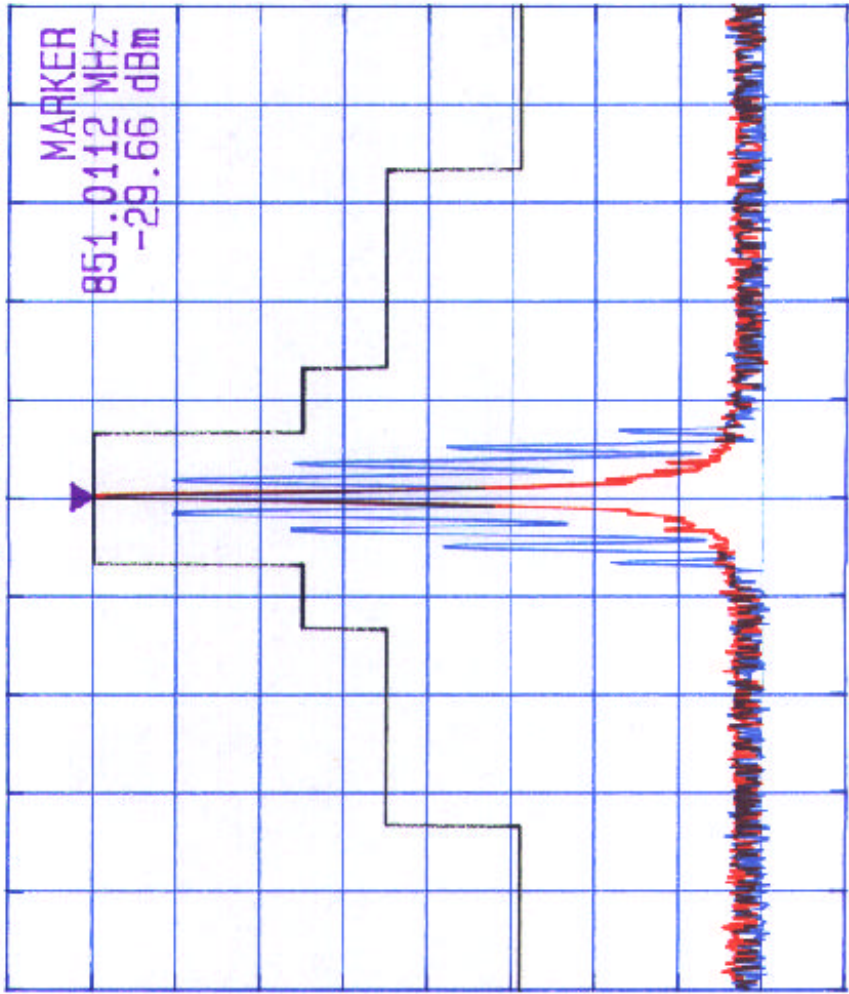

RBW 300 Hz  
VBW 300 Hz  
SWP 4.0 s

CENTER 851.0112 MHz  
SPAN 150.0 KHZ

Exhibit 9 - Plot # 14



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851-800 MHz

Tx Freq: 851.0185 MHz, RF Output: 7.3 Watts

RF In at level of -30 dBm @ 851.0185 MHz

Mod: FM Modulated with 2.5 KHz Sine Wave signal, F req: 2 kHz

Emission Mask B, Channel spacing 25 kHz

ACTV DET: PEAK

Date: April 02 2000  
Tested by: Hung Trinh


Plot # 14

REF LEVEL  
46.2 dBm

MEAS DET: PEAK QP AVG  
MKR 851.0114 MHz  
36.21 dBm

REF OFFST 30.3 dB  
REF 46.2 dBm

LOG 10  
dB/  
ATN  
30 dB

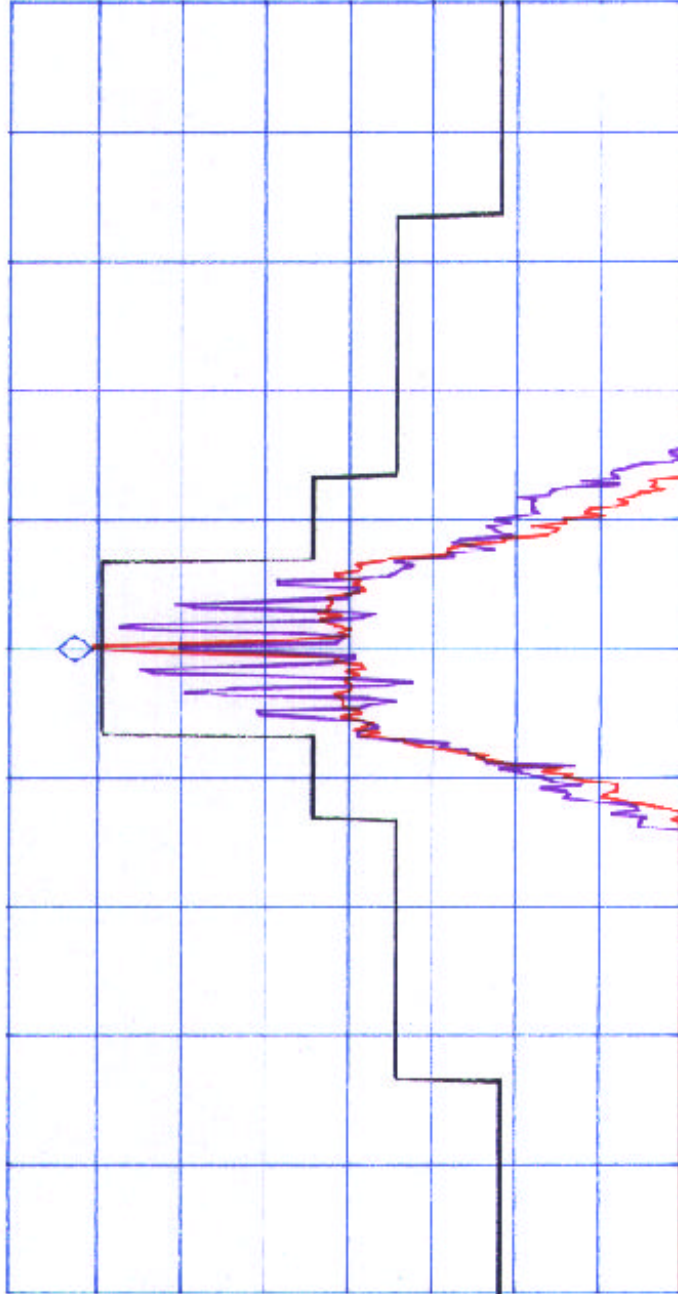

VA VB  
SC FC  
CORR

CENTER 851.0114 MHz  
#IF BW 300 Hz  
AVG BW 300 Hz  
SPAN 150.0 kHz  
SWP 5.00 sec



Exhibit 9 - Plot # 15



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851 - 860 MHz

RF In at level of -30 dBm @ 858.0110 MHz  
Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev: 2 kHz

Emission Mask B

Date: May 11, 2000  
Tested by: Hung Trish


PLOT #15

RF IN SIGNAL FITTED IN MASK B

Thu May 11 05:03:09 2000  
A\_view B\_view

REF -19.7 dBm  
10dB/

REF -19.7 dBm

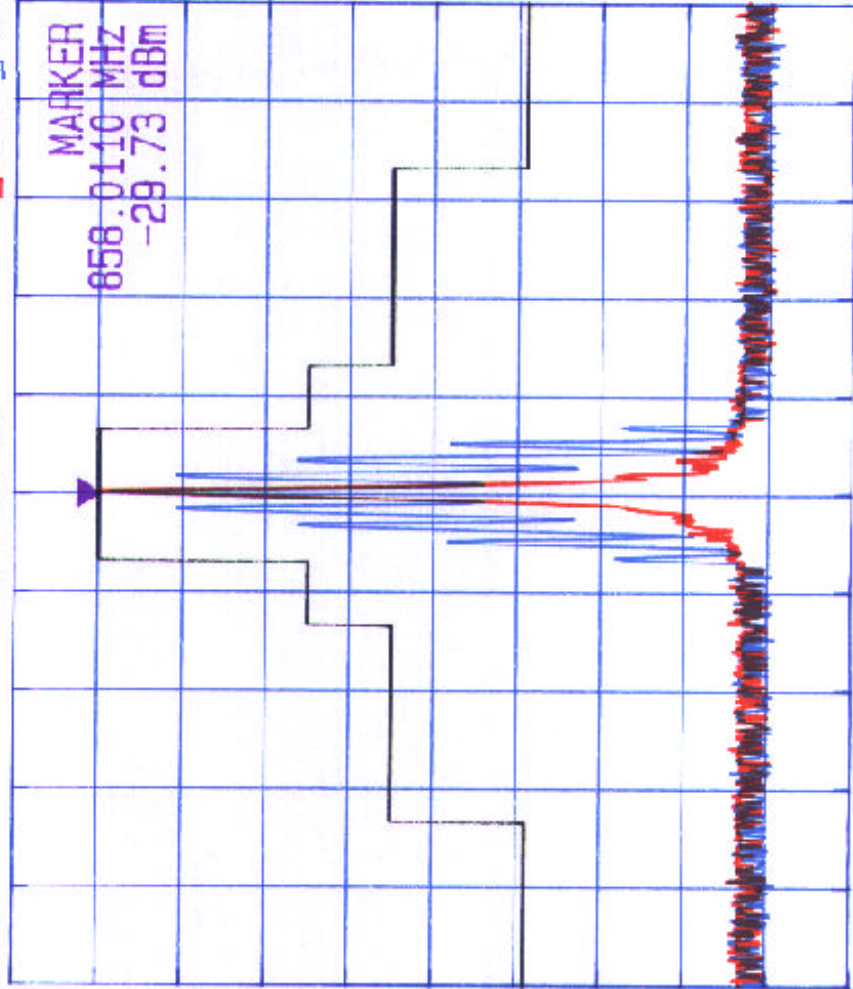

RBW 300 Hz  
VBW 300 Hz  
SWP 4.0 s

CENTER 858.0110 MHz

SPAN 150.0 kHz

Exhibit 9 - Plot # 16



UltraTech  
Engineering Labs Inc

KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851-866 MHz

Tx Freq: 858.0114 MHz, RF Output: 2.0 Watts

RF In at level of 30 dBm @ 858.0114 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq: Dev: 2 kHz

Emission Mask B, Channel spacing 25 kHz

Date: April 01, 2000  
Tested by: Hung Trinh


PLOT #16

REF LEVEL  
46.2 dBm

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 858.0114 MHz  
36.22 dBm

REF OFFST 30.3 dB  
REF 46.2 dBm

LOG 10  
dB/  
ATN  
30 dB

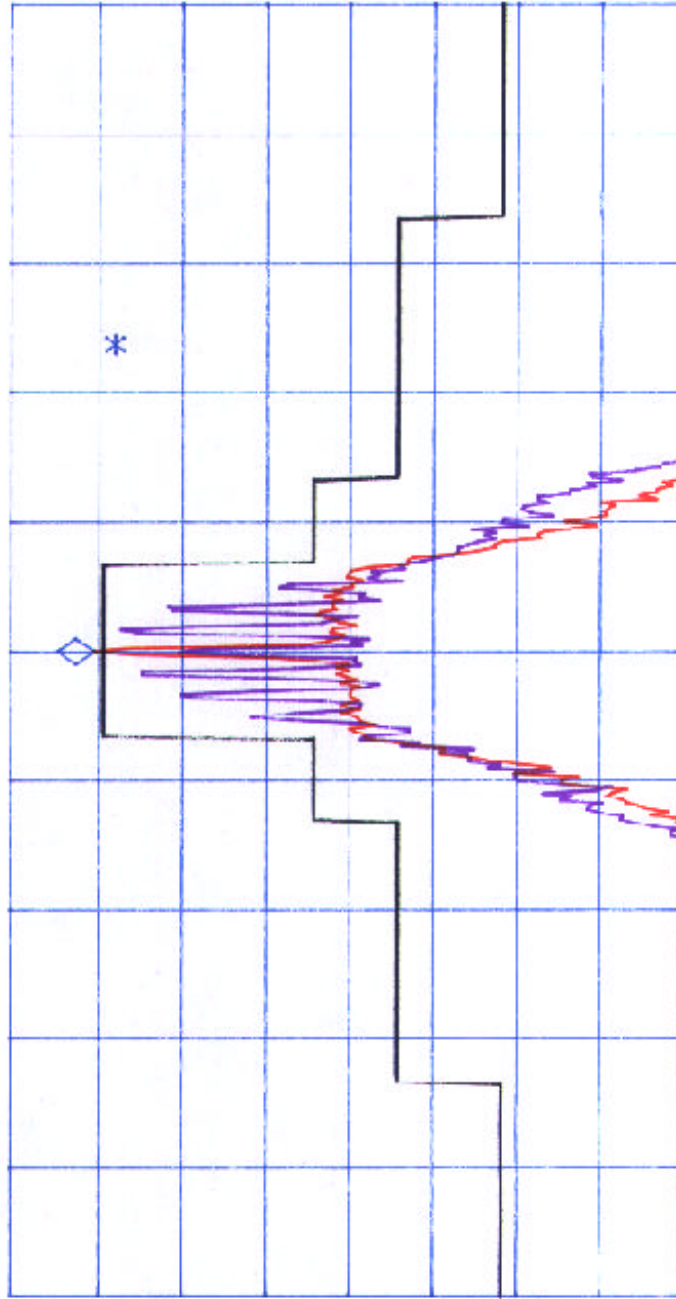

VA VB  
SC FC  
CORR

CENTER 858.0114 MHz  
#ZF BW 3000 Hz

AVG BW 3000 Hz  
SPAN 150.0 KHz  
SWP 5.00 sec

Exhibit 9 - Plot # 17



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851-866 MHz

Tx Freq: 858.0114 MHz, RF Output: 2.0 Watts

RF In at level of 30 dBm @ 858.0114 MHz

Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq: Dev: 2 kHz

Emission Mask B, Channel spacing 25 kHz

Date: April 02, 2000  
Tested by: Hung Trinh


PLOT #16

REF LEVEL  
46.2 dBm

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 858.0114 MHz  
36.22 dBm

REF OFFST 30.3 dB  
REF 46.2 dBm

LOG 10  
dB/  
ATN 30 dB  
VA VB  
SC FC  
CORR

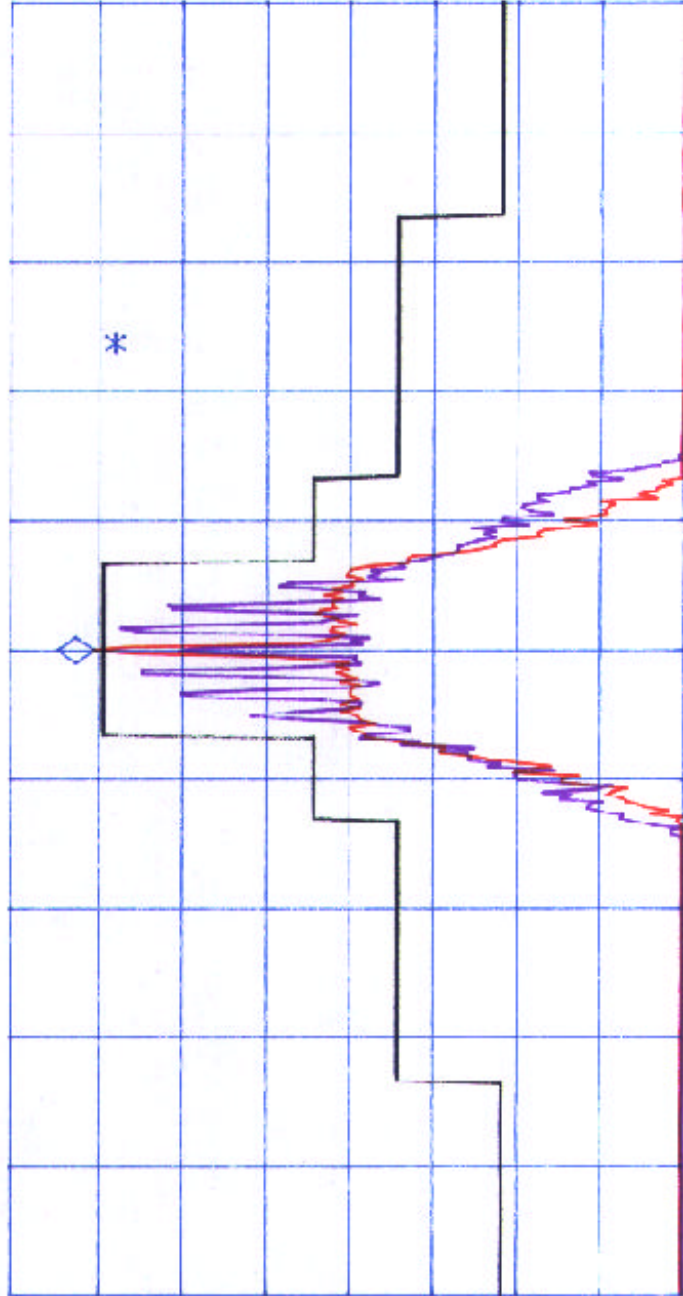

CENTER 858.0114 MHz  
#ZF BW 300 Hz

SPAN 150.0 kHz  
SWP 5.00 sec

AVG BW 300 Hz



Exhibit 9 - Plot # 18

Date: May 11, 2000  
Tested by: Hung Trinh

Plot #17

**KAVAL TELECOM INC.**  
**LINKnet CFR800 RF Modules, 851 - 866 MHz**  
RF in at level of -30 dBm @ 865.9864 MHz  
Mod. FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 2 kHz  
**Emission Mask B**



RF IN SIGNAL FITTED IN MASK B

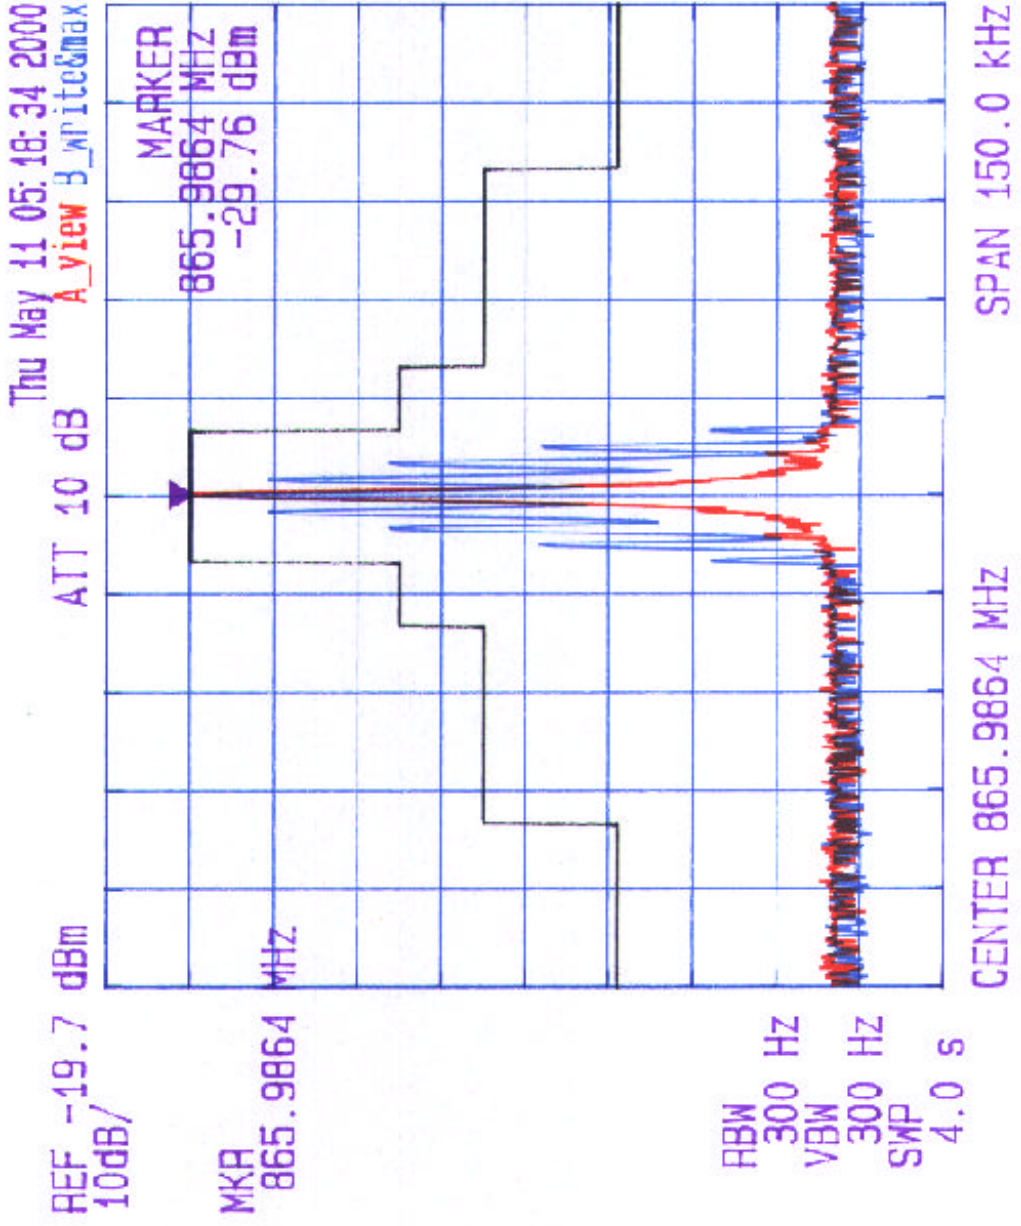


Exhibit 9 - Plot # 19

Date: April 27, 2000  
 Tested by: Hung Trinh

Plot #18


**KAVAL TELECOM INC.**  
**LINKnet OFR800 RF Modules, 857-866 MHz**  
 Tx Freq.: 865.9864 MHz, RF Output: 7.2 Watts  
 RF In at level of -30 dBm @ 865.9864 MHz  
 Mod: FM Modulated with 2.5 kHz Sine Wave signal, Freq. Dev.: 2 kHz  
**Emission Mask B, Channel spacing 25 kHz**



REF LEVEL  
 45.6 dBm

ACTV DET: PEAK  
 MEAS DET: PEAK GP AVG  
 MKR 865.9864 MHz  
 35.63 dBm

REF OFFST 30.3 dB  
 REF 45.6 dBm

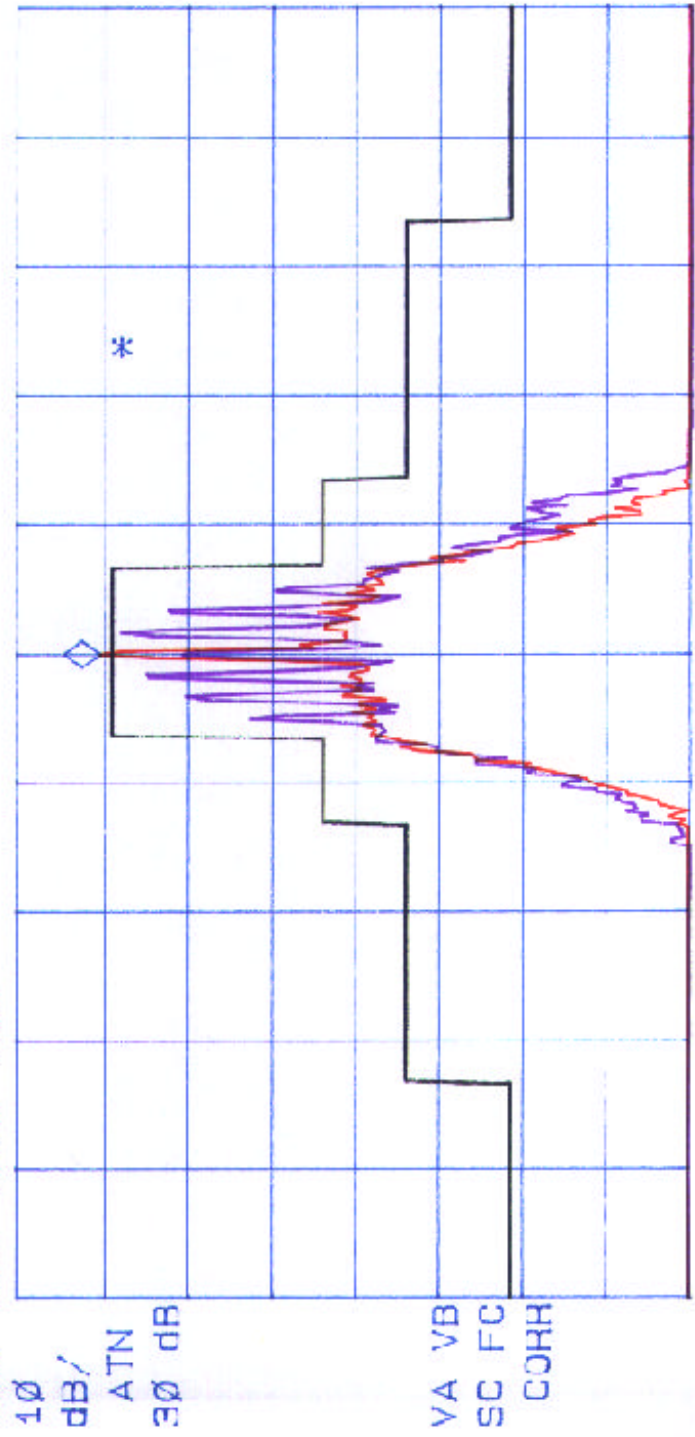

CENTER 865.9864 MHz  
 #IF BW 300 Hz  
 AVG BW 300 Hz  
 SPAN 150.0 kHz  
 SWP 5.00 sec

Exhibit 9 - Plot # 20

Date: May 12, 2000  
Tested by: Hung Trinh

PLOT #19

**KAVAL TELECOM INC.**  
LINKnet OFR800 RF Modules, 851-866 MHz  
RF In at level of -30 dBm @ 851.0110 MHz  
Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 0 kHz  
Emission Mask G



RF IN SIGNAL FITTED IN MASK G

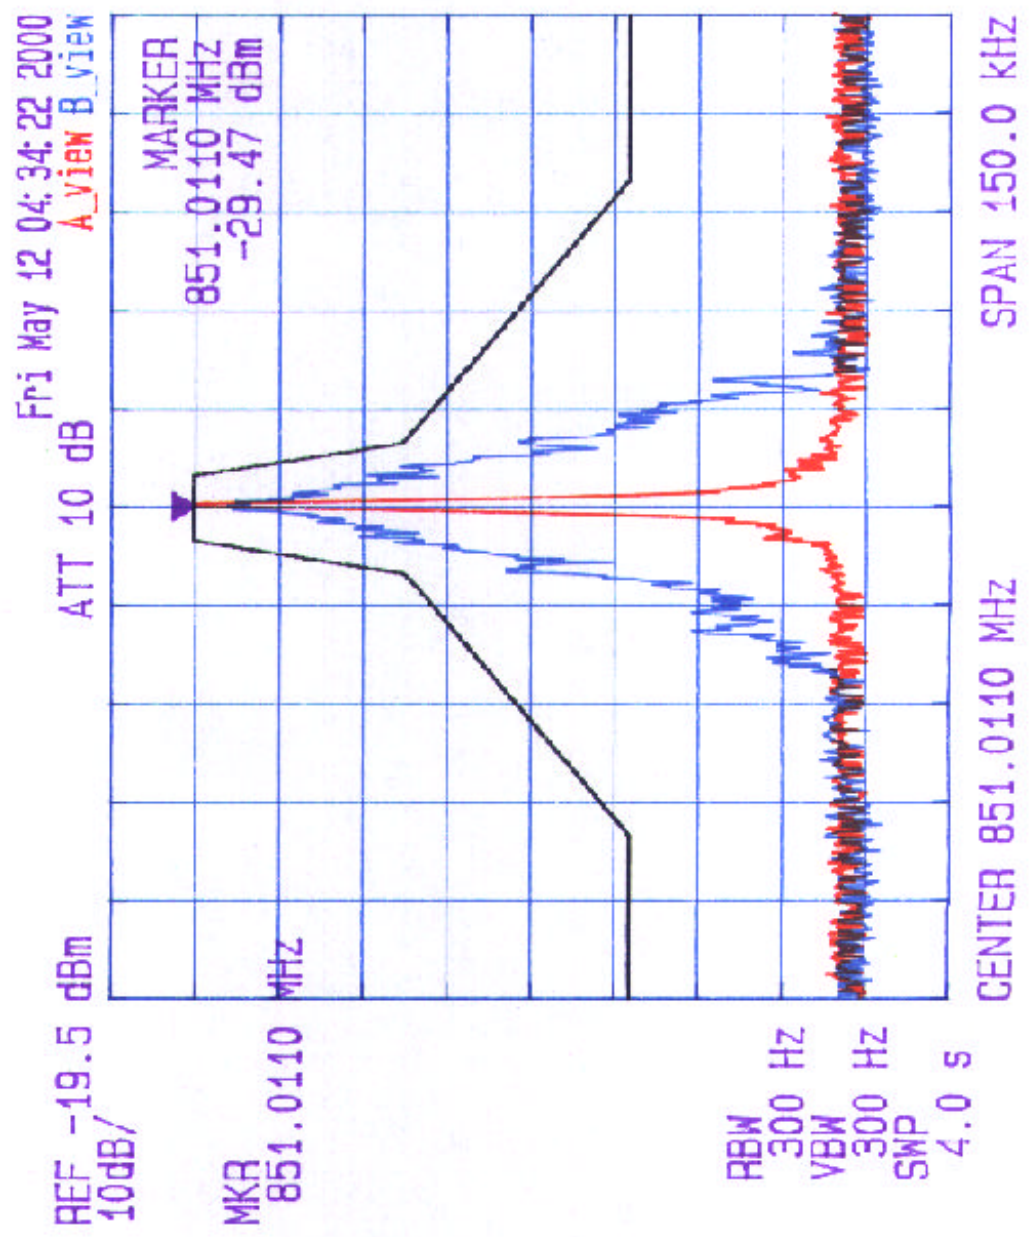




Exhibit 9 - Plot # 21



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 851-860 MHz

Tx Freq: 851.0114 MHz, RF Output: 7.5 Watts

RF In at level of -30 dBm @ 851.0114 MHz

Mod: FM Modulated with an external 9600 b/s random data Freq Dev: 2 kHz

Emissions Mask G, Channel spacing 25 kHz

Date: April 01 2000  
Tested by: Hung Trinh

Plot # 20

CENTER

851.0114 MHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 851.0114 MHz

36.07 dBm

REF OFFST 30.3 dB

REF 46.1 dBm

LOG

10

dB/


ATN

30 dB

VA VB

SC FC

CORR

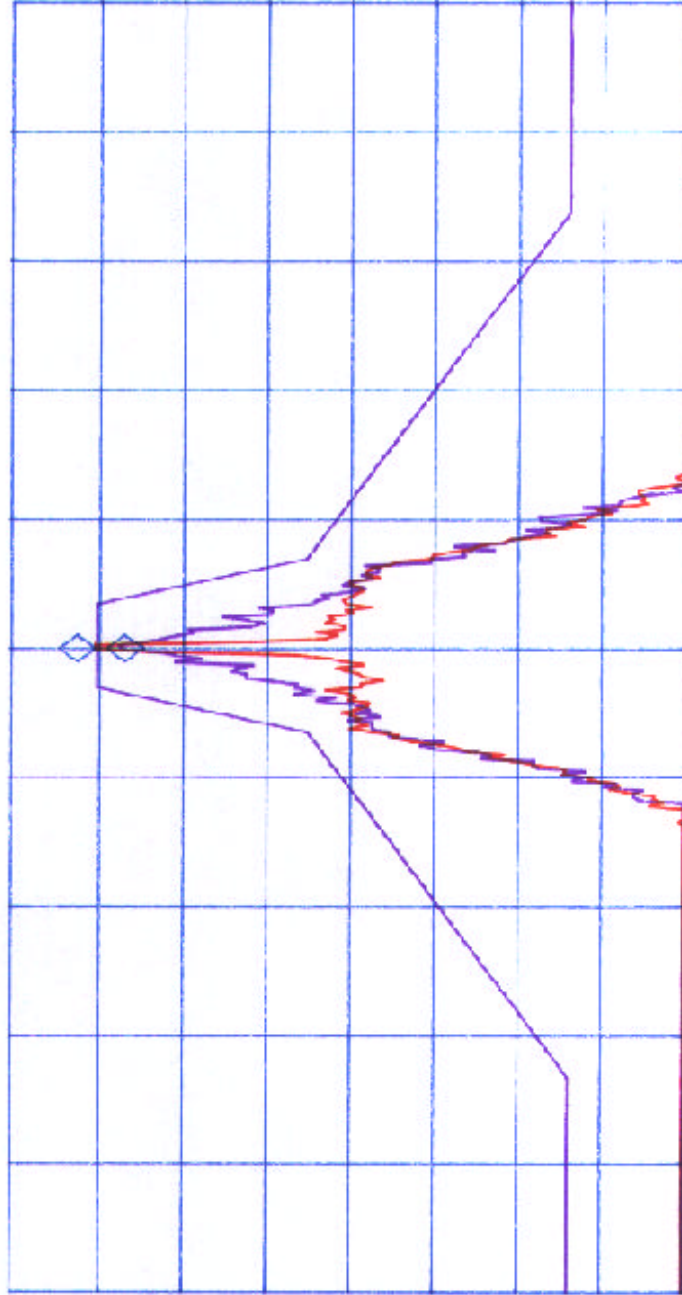

CENTER 851.0114 MHz

#IF BW 300 Hz

AVG BW 300 Hz

SPAN 150.0 kHz

SWP 5.00 sec

Exhibit 9 - Plot # 22



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 867-566 MHz

RF In at level of -30 dBm @ 865.9875 MHz

Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev.: 2 kHz

Emission Mask G

Date: May 12, 2000  
Tested by: Hang Trinh

PLOT # 21

RF IN SIGNAL FITTED IN MASK G

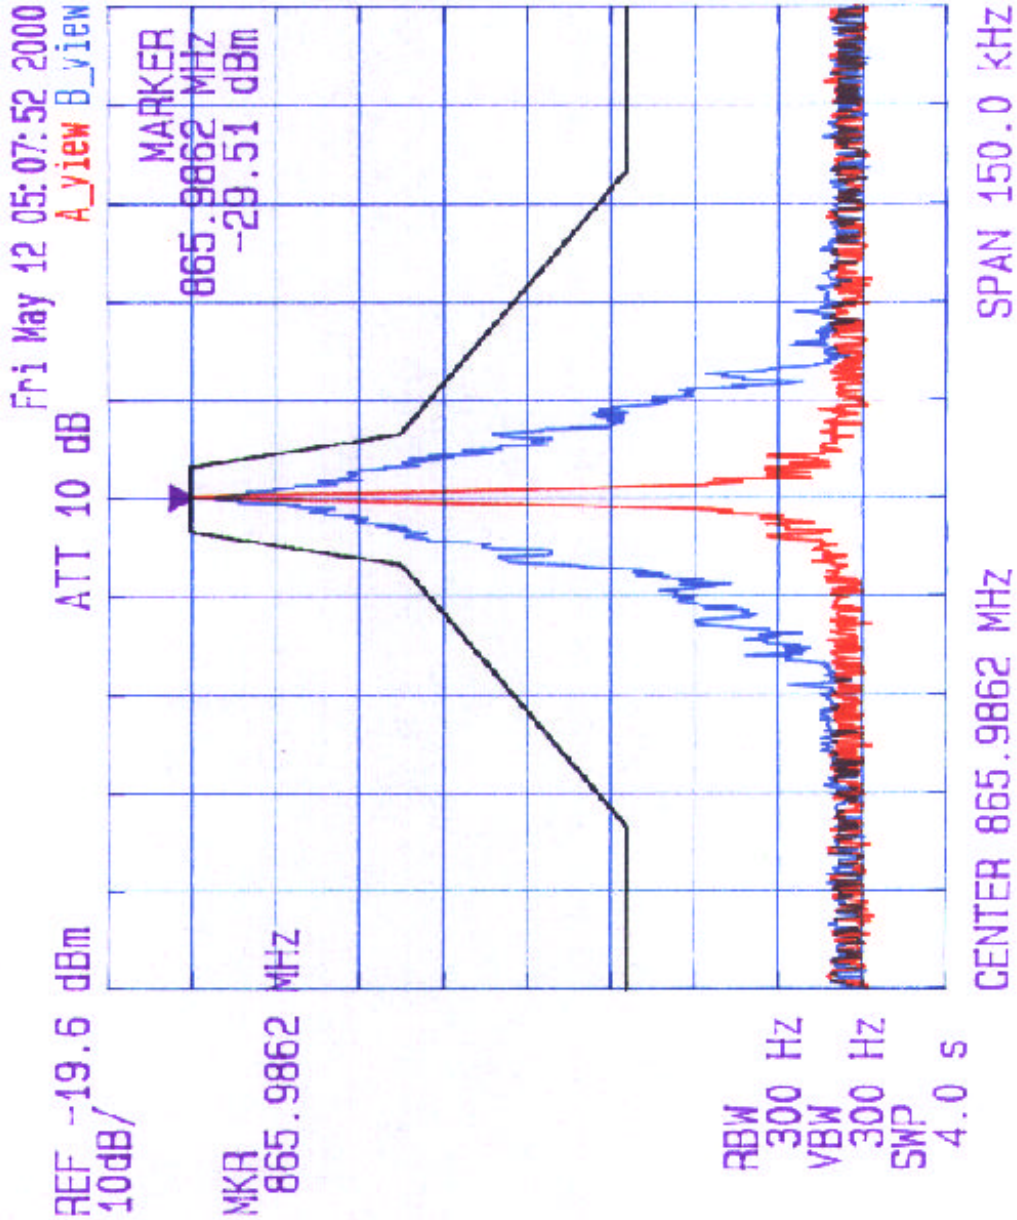


Exhibit 9 - Plot # 23



Date: April 21 2000  
Tested by: Hung Trinh

PLOT # 22


KAVAL TELECOM INC.  
LINKnet OFR800 RF Modules, 251-8660 MHz  
Tx Freq: 855.9864 MHz, RF Output 2.2 Watts  
RF In at level of -42 dBm @ 855.9864 MHz  
Mod: FM Modulated with an external 9600 b/s random data, Freq. Dev: \_\_\_ kHz  
Emissions Mask G, Channel spacing 25 kHz

REF LEVEL  
45.5 dBm

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 855.9864 MHz  
35.51 dBm

REF OFFST 30.3 dB  
REF 45.5 dBm

LOG 10  
dB/  
ATN  
30 dB

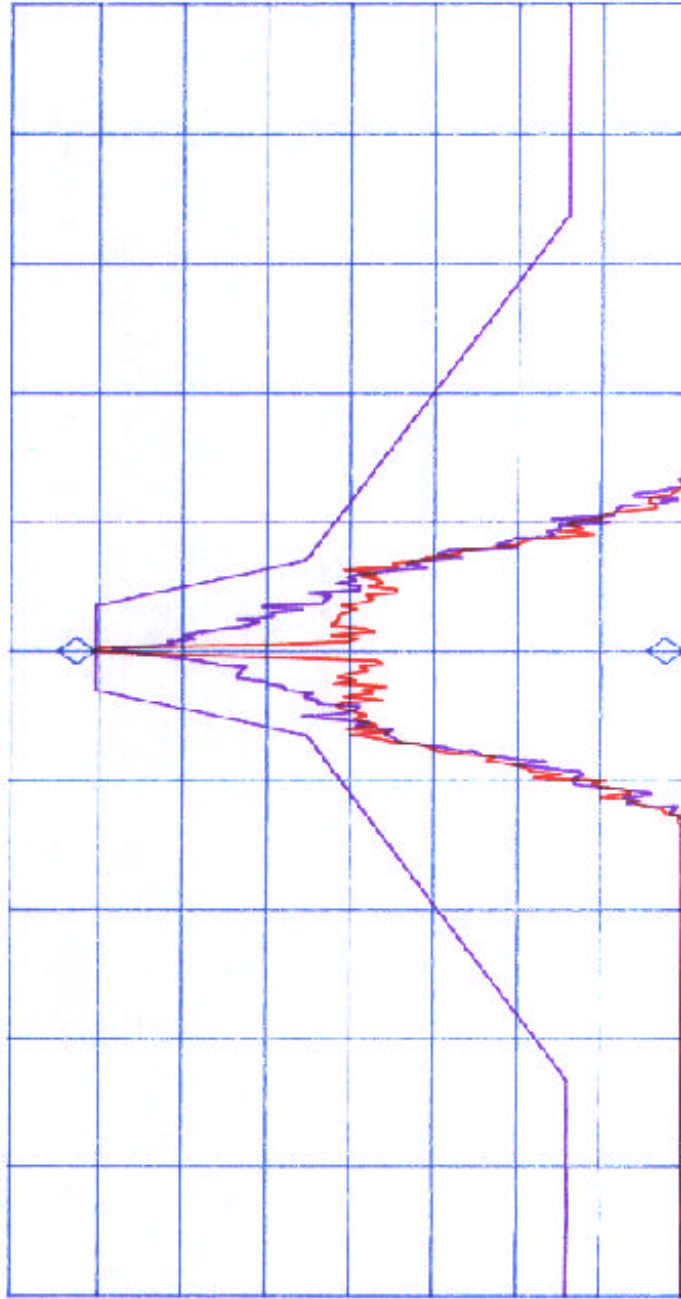

VA VB  
SC FC  
CORR

CENTER 855.9864 MHz  
#IF BW 3000 Hz  
AVG BW 3000 Hz  
SPAN 150.0 kHz  
SWP 5.00 sec



Exhibit 9 - Plot # 24

Date: May 12, 2000  
Tested by: Hung Trinh

PLOT # 23

**KAVAL TELECOM INC.**  
LINKnet OFR800 RF Modules, 857-800 MHz  
RF in at level of -30 dBm @ 858.0110 MHz  
Mod. FM Modulated with an external 9500 b/s random data, Freq. Dev.: 2 kHz  
Emission Mask G




RF IN SIGNAL FITTED IN MASK G

REF -19.5 dBm  
10dB/

MKR 858.0110 MHz

Fri May 12 04:41:44 2000  
ATT 10 dB  
A\_VIEW B\_VIEW

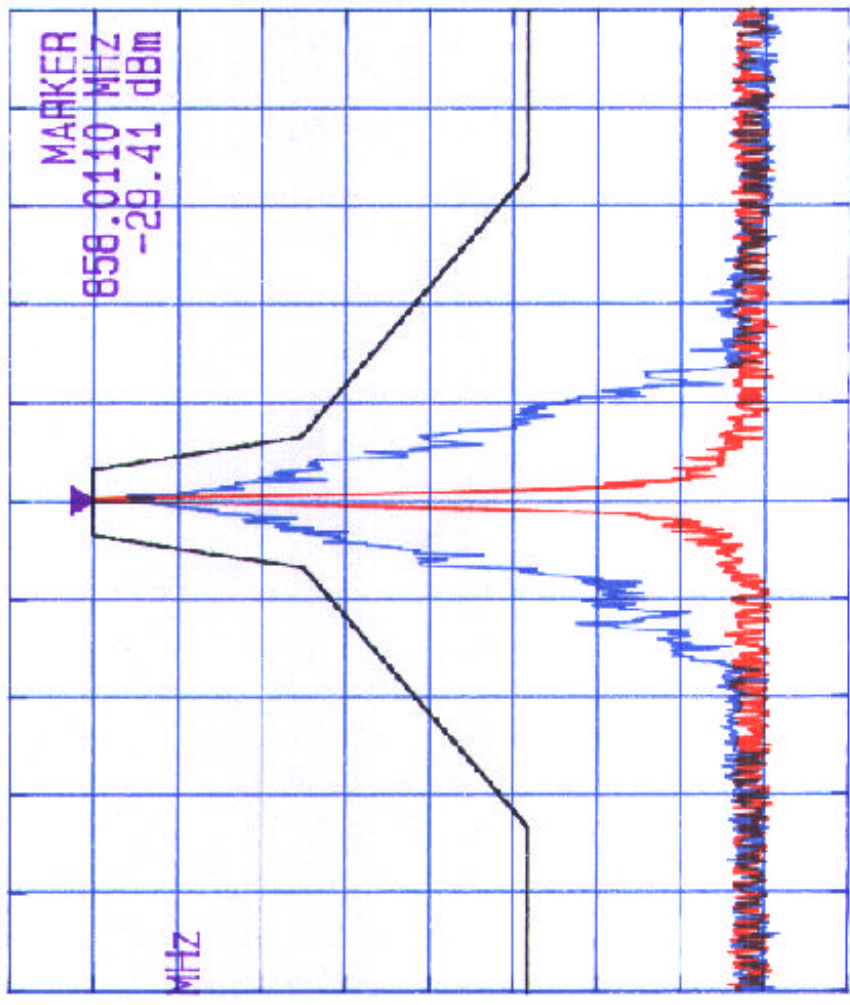

CENTER 858.0110 MHz  
SPAN 150.0 kHz

Exhibit 9 - Plot # 25



KAVAL TELECOM INC.

LINKnet OFR800 RF Modules, 857-866 MHz

Tx Freq: 857.0 MHz, RF Output: 2.6 Watts  
 RF In at level of: -30 dBm @ 857.0 MHz

Mod: FM Modulated with an external 9600 bps random data, Freq. Dev.: 2 kHz

Emissions Mask G, Channel spacing 25 kHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG


MKR 858.0114 MHz

36.08 dBm

Date: April 01/2000  
 Tested by: Hung Tranh

Plot # 24

LOG 10 dB/ ATN 30 dB  
 REF OFFST 30.3 dB  
 REF 46.1 dBm

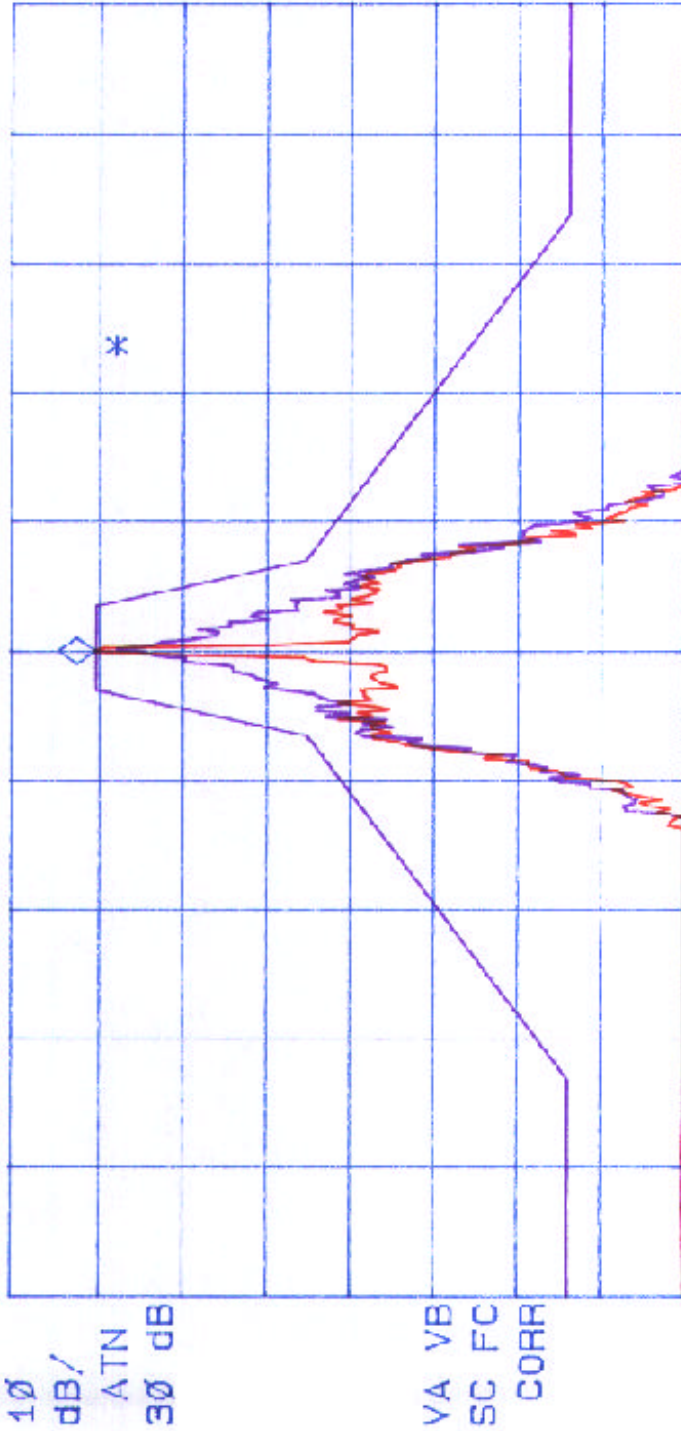

CENTER 858.0114 MHz  
 #IF BW 300 Hz  
 AVG BW 300 Hz  
 SPAN 150.0 kHz  
 SWP 5.00 sec