

Annex 1 - 20 dB Bandwidth of the Amplifier Bandpass

Kaval RF Fiber Interface Module, Model US1900P

Operating Band: 1930 - 1990 MHz band pass gain

RF Input: -7.09 dBm (1931 MHz Setting) from 1900 - 2100 MHz

(1) Low: 1920.6 MHz High: 2000.9 MHz

MAX. GAIN: 26 DB

Photo # 10

FCC ID: H6M-US1900P

hp

MARKER
1.9611 GHz
18.89 dBm


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 1.9611 GHz
18.89 dBm

No user
Menu

REF OFFST 11.3 dB
REF 25.0 dBm

LOG 1 0
dB/
ATN 3 0 dB

VA SB
SC FC
CORR

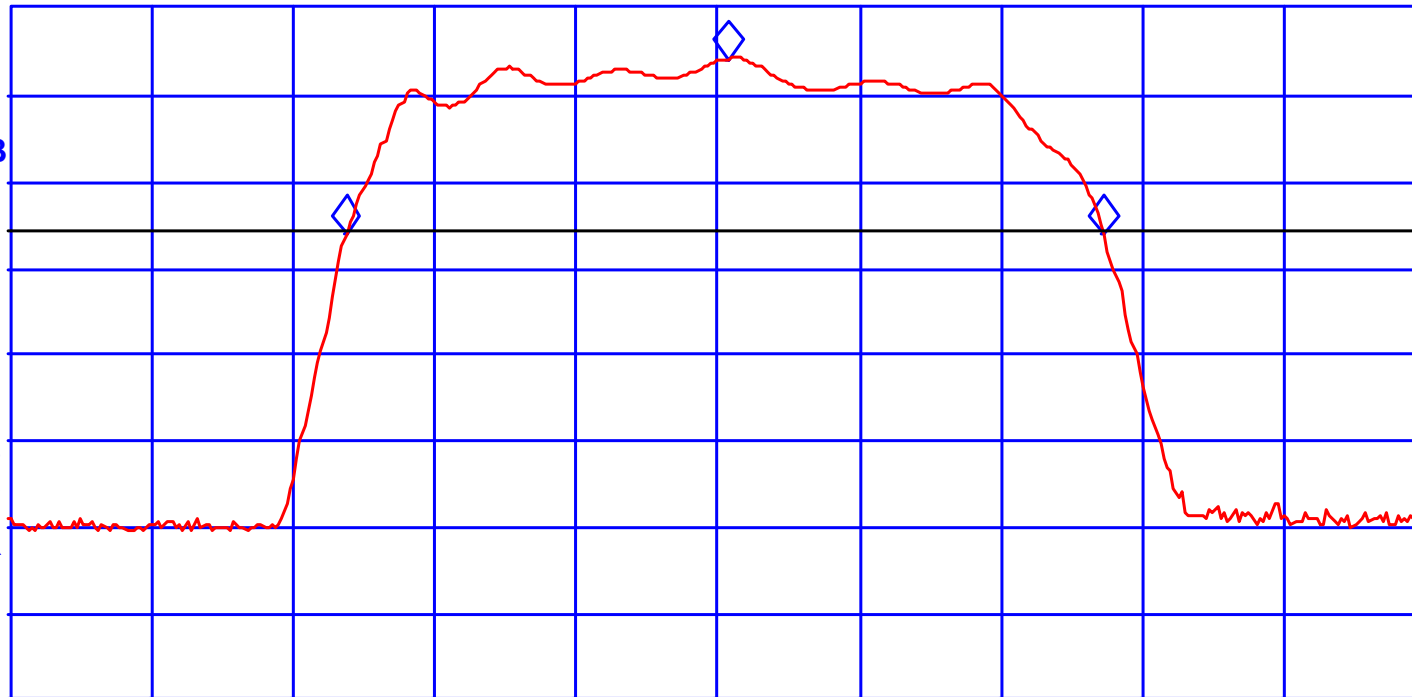

CENTER 1.9600 GHz
#IF BW 1.0 MHz

#AVG BW 3 MHz

SPAN 150.0 MHz
SWP 20.0 msec