



Sep. 15, 2003

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
USA



31040/SIT



C-1376



46390-2049



200093-0



00-034



Subject: Type Acceptance Application under FCC CFR 47, Parts 2 and 24 (Subpart E) - Personal Communications Services in the Frequency Band 1850 - 1910 MHz (Broadband PCS).

**Applicant: KAVAL WIRELESS TECHNOLOGIES INC.
Product: RF Fiber Interface Module
Model: US1900P
FCC ID: H6M-US1900P**


Dear Sir/Madam,

As appointed agent for **KAVAL WIRELESS TECHNOLOGIES INC.**, we would like to submit the application to the Federal Communications Commission for certification of the above product. Please review all necessary files uploaded to FCC OET site for detailed information.

If you have any queries, please do not hesitate to contact us by our TOLL FREE numbers:

OUR TELEPHONE NO.: 1-877-747-6381

Yours truly,



Tri Minh Luu, P. Eng.,
V.P., Engineering

TML/DH

Encl.

3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com



31040/SIT



C-1376



46390-2049



200093-0



00-034



entela

Sep. 15, 2003

KAVAL WIRELESS TECHNOLOGIES INC.

60 Gough Road
Markham, Ontario
Canada, L3R 8X7

Attn.: Mr. Alan Aslett

Subject: Type Acceptance Application under FCC CFR 47, Parts 2 and 24 (Subpart E) - Personal Communications Services in the Frequency Band 1850 - 1910 MHz (Broadband PCS).

Product: RF Fiber Interface Module

Model: US1900P

FCC ID: H6M-US1900P

Dear Mr. Aslett,

The product sample has been tested in accordance with **FCC CFR 47, Parts 2 and 24 (Subpart E) - Personal Communications Services in the Frequency Band 1850 - 1910 MHz (Broadband PCS)**, and the results and observation were recorded in the engineering report, Our File No.: **KTI-027FCC24**

Enclosed you will find copy of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,

Tri Minh Luu, P.Eng
Vice President - Engineering


Encl.

3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

ENGINEERING TEST REPORT



RF Fiber Interface Module Model No.: US1900P FCC ID: H6M-US1900P

Applicant: KAVAL WIRELESS TECHNOLOGIES INC.
60 Gough Road
Markham, Ontario
Canada, L3R 8X7

Tested in Accordance With

**Federal Communications Commission (FCC)
PERSONAL COMMUNICATIONS SERVICES
CFR 47, PARTS 2 and 24 (Subpart E)
1850 - 1910 MHz Band**

UltraTech's File No.: KTI-027FCC24

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: Sep. 15, 2003



Report Prepared by: Tri M. Luu

Tested by: Mr. Hung Trinh, EMI/RFI Technician

Issued Date: Sep. 15, 2003

Test Dates: Sep. 05-07, 2003

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



31040/SIT



C-1376



46390-2049



200093-0



00-034



TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. NORMATIVE REFERENCES	1
EXHIBIT 2. PERFORMANCE ASSESSMENT.....	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	3
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	4
2.4. LIST OF EUT'S PORTS	5
2.4.1. <i>US1900P Remote RF Module</i>	5
2.5. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	5
2.6. ANCILLARY EQUIPMENT	5
2.7. DRAWING OF TEST SETUP	6
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	7
3.1. CLIMATE TEST CONDITIONS	7
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	7
EXHIBIT 4. SUMMARY OF TEST RESULTS	8
4.1. LOCATION OF TESTS	8
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	8
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	9
5.1. TEST PROCEDURES	9
5.2. MEASUREMENT UNCERTAINTIES	9
5.3. MEASUREMENT EQUIPMENT USED:.....	9
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:	9
5.5. FREQUENCIES @ FCC 24.229	10
5.5.1. <i>Limits</i>	10
5.5.2. <i>Analysis</i>	10
5.6. RF POWER OUTPUT & INTERMODULATION @ FCC §2.1046 & §24.232.....	11
5.6.1. <i>Limits</i>	11
5.6.2. <i>Method of Measurements</i>	11
5.6.3. <i>Test Equipment List</i>	11
5.6.4. <i>Test Arrangement</i>	11
5.6.5. <i>Test Data</i>	12
5.7. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1091	23
5.7.1. <i>Limits</i>	23
5.7.2. <i>Method of Measurements</i>	23
5.7.3. <i>Test Data</i>	25
5.7.4. <i>Limits</i>	26
5.7.5. <i>Method of Measurements</i>	26
5.7.6. <i>Test Equipment List</i>	26
5.7.7. <i>Test Arrangement</i>	26
5.7.8. <i>Test Data</i>	27
5.8. OCCUPIED BANDWIDTH & EMISSION LIMITS (CONDUCTED) @ FCC §24.238 & §2.1049.....	28

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.1.	<i>Limits</i>	28
5.8.2.	<i>Method of Measurements</i>	28
5.8.3.	<i>Test Arrangement</i>	28
5.8.4.	<i>Test Equipment List</i>	29
5.8.5.	<i>Test Data</i>	29
5.9.	EMISSION LIMITS (RADIATED) @ FCC 2.1049, 24.236 & 24.238	97
5.9.1.	<i>Limits</i>	97
5.9.2.	<i>Method of Measurements</i>	97
5.9.3.	<i>Test Equipment List</i>	97
5.9.4.	<i>Photographs of Test Setup</i>	98
5.9.5.	<i>Test Data</i>	98
EXHIBIT 6.	MEASUREMENT UNCERTAINTY	103
6.1.	RADIATED EMISSION MEASUREMENT UNCERTAINTY	103
EXHIBIT 7.	MEASUREMENT METHODS	104
7.1.	CONDUCTED POWER MEASUREMENTS	104
7.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	105
7.2.1.	<i>Maximizing RF Emission Level (E-Field)</i>	105
7.2.2.	<i>Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method</i>	106
7.3.	FREQUENCY STABILITY	108
7.4.	SPURIOUS EMISSIONS & OCCUPIED BANDWIDTH (CONDUCTED)	109

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2 and 24 (Subpart E): 2002
Title	Telecommunication - Code of Federal Regulations, CFR 47, Parts 2 & 24
Purpose of Test:	To gain FCC Certification Authorization for Radio operating in the frequency band 1850 - 1910 MHz (Broadband PCS).
Test Procedures	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

1.2. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 2 and 24	2002	Code of Federal Regulations – Telecommunication
ANSI C63.4	1992	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 & EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1		Specification for Radio Disturbance and Immunity measuring apparatus and methods

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	KAVAL WIRELESS TECHNOLOGIES INC.
Address:	60 Gough Road Markham, Ontario Canada, L3R 8X7
Contact Person:	Mr. Alan Aslett Phone #: 905-946-3397 Fax #: 905-946-3392 Email Address: asslet@kaval.com

MANUFACTURER	
Name:	KAVAL WIRELESS TECHNOLOGIES INC.
Address:	60 Gough Road Markham, Ontario Canada, L3R 8X7
Contact Person:	Mr. Alan Aslett Phone #: 905-946-3397 Fax #: 905-946-3392 Email Address: asslet@kaval.com

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	KAVAL WIRELESS TECHNOLOGIES INC.
Product Name:	RF Fiber Interface Module
Model Name or Number:	US1900P
Trade Name	LinkNet UniServ Unit (USU)
Serial Number:	Pre-production
Type of Equipment:	Personal Communications Services
External Power Supply:	Kaval Model UDS-PS01 External AC./DC power supply
Transmitting/Receiving Antenna Type:	Non-integral
Equipment Type:	Base station (fixed use)
Intended Operating Environment:	Commercial, light industry & heavy industry

Description of EUT and Theory of Operation:

The LinkNet UniServ Unit (USU) System is a USU RF to Fiber Modules Which provides a single-band link from a Head-End Distribution center to multiple local antennae. RF Signals are distributed over a pair of Single-Mode Fiber-Optic Distribution Lines. The Remote Module Fiber Optic I/O's are band specific, but the Head-End Fiber-Optic I/O's are not. The Head-End I/O's may be used for any band

The LinkNet UniServ Unit (USU) System consists of the following:

- (1) Kaval Remote RF Module, Model US1900P, 1.9 GHz PCS Services (1850-1910 MHz and 1930-1990 MHz)
- (2) Kaval Power Supply, Model US-PS01, AC IN: 120V 60Hz , DC Out: 28 V
- (3) Kaval Head End RF Module, Model LNKFIB-03 or LNKFIB-H04

Model LNKFIB-03: This is a 1U high, 19" Rack-mount providing low signal level Interface between Head-End RF Modules and 8 Paris of Single-Mode Fiber-Optic Distribution Lines. The 8 Fiber-Optic Pairs are in 2 groups of four, with the RF connections combined inside the Module in those groupings.

Model LNKFIB-04: This is a 1U high, 19" Rack-mount providing low signal level Interface between Head-End RF Modules and 8 Paris of Single-Mode Fiber-Optic Distribution Lines. The 4 Fiber-Optic Pairs are combined inside the Module.

**** Note: Since Model LNKFIB-03 and LNKFIB-04 are family units, the Model LNKFIB-03 is used for testing for worst case.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

UPLINK BAND (1850-1910 MHz)	
Operating Frequency Range:	1851 – 1909 MHz
RF Input/Output Impedance:	50 Ohms
RF Input Power Rating:	-40 dBm maximum for single and multiple channels
RF Output Power Rating:	<ul style="list-style-type: none"> • 1 Channel output: -10.4 dBm maximum • 2 Channel outputs: -15.5 dBm maximum • 3 Channel outputs: -19.2 dBm maximum <p>See Users Manual for more power ratings of multiple channel input/output</p>
Duty Cycle:	100%
Occupied Bandwidth (26 dB):	1.46 MHz (CDMA) 33 kHz (TDMA) 320 MHz (GSM)
Emission Designation*:	1M46F9W (CDMA) 33K0DXW (TDMA) 330KGXW (GSM)
Antenna Connector Type:	N/A. Not intended for connection to the transmit/receive antenna. The uplink RF output will be connected to the head-end device.
Antenna Description:	N/A. Not intended for connection to the transmit/receive antenna. The uplink RF output will be connected to the head-end device.

2.4. LIST OF EUT'S PORTS

2.4.1. US1900P Remote RF Module

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	28 Vdc Ports	2	2C -Terminal	Shielded
2	RF Input/Output Port	1	SMA	Shielded
3	RSS-232 # 1 Port	1	DB9	Shielded
4	RSS-232 # 2 Port	1	DB9	Shielded
5	User I/O Port	1	DB15	Shielded
6	Photodiode & Laser	1	2C - Terminal	Shielded

2.5. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

2.6. ANCILLARY EQUIPMENT

None

2.7. DRAWING OF TEST SETUP

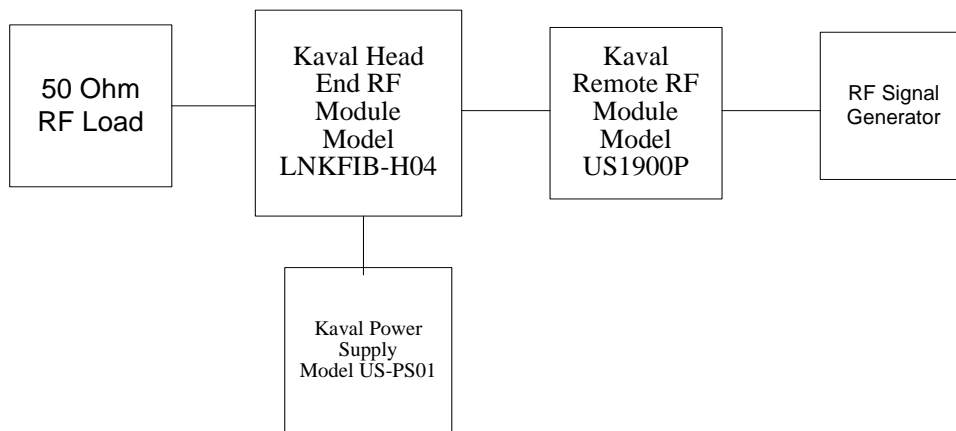


EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	28 Vdc

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The RF signal was applied to the RX input port at its maximum rated value, the RF output was then measured and compared with RF input signal for compliance purpose.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.

Transmitter Test Signals	
Frequency Band(s):	Near lowest, near middle & near highest frequencies each frequency bands that the transmitter covers:
<ul style="list-style-type: none"> • 1850 – 1910 MHz 	<ul style="list-style-type: none"> • 1851, 1880, 1909 MHz
Transmitter Wanted Output Test Signals:	
<ul style="list-style-type: none"> ▪ RF Power Output (measured maximum output power): ▪ Normal Test Modulation ▪ Modulating signal source: 	<ul style="list-style-type: none"> ▪ Maximum as rated by manufacturer ▪ All available modulations ▪ External source

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- AC Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.
- The above sites have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Aug. 10, 2002.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	APPLICABILITY (YES/NO)
24.229	Frequencies	Yes
24.232 & 2.1046	Effective Radiated Power (ERP) Limits	Yes
1.1310 & 2.1091	RF Exposure Requirements	Yes
24.235 & 2.1055	Frequency Stability	Yes
24.238 & 2.1051	26 dB Bandwidth, Band-edge and Spurious Emission Limits (Conducted)	Yes
24.236 & 24.238, 2.1057 & 2.1053	Emission Limits (Radiated)	Yes

RF Fiber Interface Module, Model No.: US1900P, by **KAVAL WIRELESS TECHNOLOGIES INC.** has also been tested and found to comply with **FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices**. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED:

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4:1992 and CISPR 16-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

5.5. FREQUENCIES @ FCC 24.229

5.5.1. Limits

The frequencies available in the Broadband PCS Service are listed as follows:

(a) The following frequency blocks are available for assignment on an MTA (Major Trading Areas) basis

- Block A: 1850-1865 MHz (Mobile) paired with 1930-1945 MHz (Base)
- Block B: 1870-1885 MHz (Mobile) paired with 1950-1965 MHz (Base)

(b) The following frequency blocks are available for assignment on an BTA (Basic Trading Areas) basis

- Block C: 1895-1910 MHz (Mobile) paired with 1975-1990 MHz (Base)
- Block D: 1865-1870 MHz (Mobile) paired with 1945-1950 MHz (Base)
- Block E: 1885-1890 MHz (Mobile) paired with 1965-1970 MHz (Base)
- Block F: 1890-1895 MHz (Mobile) paired with 1970-1975 MHz (Base)

5.5.2. Analysis

The EUT conforms with all frequency Blocks A, B, C, D, E and F for Base uses

5.6. RF POWER OUTPUT & INTERMODULATION @ FCC §2.1046 & §24.232

5.6.1. Limits

The equivalent isotropic radiated power (EIRP) of transmitters in the Personal Communications Services must not exceed the limits in this section:

	Maximum Peak ERP (Watts)	Antenna Height
Portable & Mobile Transmitters & Auxiliary Test Transmitters (1850-1910 MHz)	2 Watts or 33 dBm	N/A


5.6.2. Method of Measurements

Please refer to Exhibit 8, § 8.1 (Conducted) and § 8.2 (Radiated) for test procedures and test setup.

5.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Power Divider	Weinschel	1515	LW400	DC – 18 GHz
3 x RF Signal Generators	Fluke	6061A	...	10 kHz – 1050 MHz

5.6.4. Test Arrangement

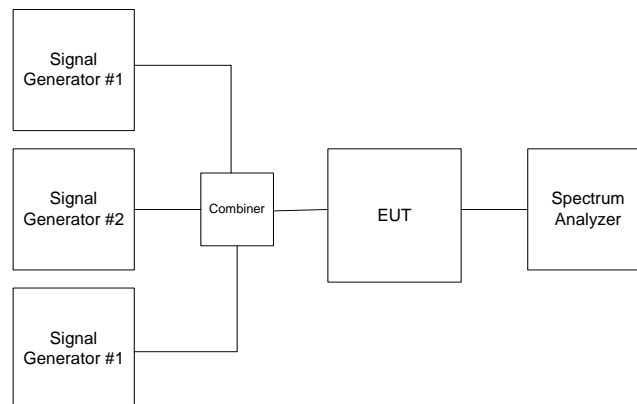

5.6.5. Test Data

5.6.5.1. PEAK RF INPUT & OUTPUT POWERS IN 1850 - 1910 MHz Band (Uplink)

Frequency (MHz)	Number of In/Out Channels	Modulation	Manufacturer's Maximum RF Input (conducted) (dBm)	Maximum RF Output (conducted) (dBm)	Maximum Antenna Gain allowed (dBi)	Maximum ERP Measured (dBm)
1851	1	CDMA	-40.0	-13.6	0	-15.8
1880	1	CDMA	-40.0	-9.0	0	-11.2
1909	1	CDMA	-40.0	-13.1	0	-15.3
1851	1	TDMA	-40.0	-13.6	0	-15.8
1880	1	TDMA	-40.0	-9.0	0	-11.2
1909	1	TDMA	-40.0	-13.1	0	-15.3
1851	1	GSM	-40.0	-13.6	0	-15.8
1880	1	GSM	-40.0	-9.0	0	-11.2
1909	1	GSM	-40.0	-13.1	0	-15.3


5.6.5.2. INTERMODULATION IN & PEAK ERP POWERS IN 1850 - 1910 MHz Band (Uplink)

Frequency (MHz)	Number of In/Out Channels	Modulation	Manufacturer's Maximum RF Input Power per Channel (conducted) (dBm)	Maximum RF Output Power per Channel (conducted) (dBm)	Maximum Antenna Gain allowed (dBi)	Maximum ERP Measured (dBm)
1851	1	No modulation	-40.0	-14.8	0	-17.0
1851 & 1851.2	2	No modulation	-46.3	-20.0	0	-22.2
1851, 1851.2 1851.4	3	No modulation	-49.4	-23.1	0	-25.3
1880	1	No modulation	-40.0	-10.4	0	-12.6
1880 & 1880.2	2	No modulation	-46.3	-15.5	0	-17.7
1879.8, 1880 & 1880.2	3	No modulation	-49.4	-19.2	0	-21.4
1909	1	No modulation	-40.0	-14.1	0	-16.3
1908.8 & 1909	2	No modulation	-46.3	-19.1	0	-21.3
1908.6, 1908.8 & 1909	3	No modulation	-49.4	-22.5	0	-24.7

Note:

- (1) The combined RF input power is -40 dBm maximum as rated by the manufacturer.
- (2) Refer to Plots # 1 to 9 for detailed measurements of I.M.

Plot # 1: RF Output Power with 1 RF signal input/output in 1850 – 1910 MHz
Fc: 1851 MHz, RF Input: -40 dBm

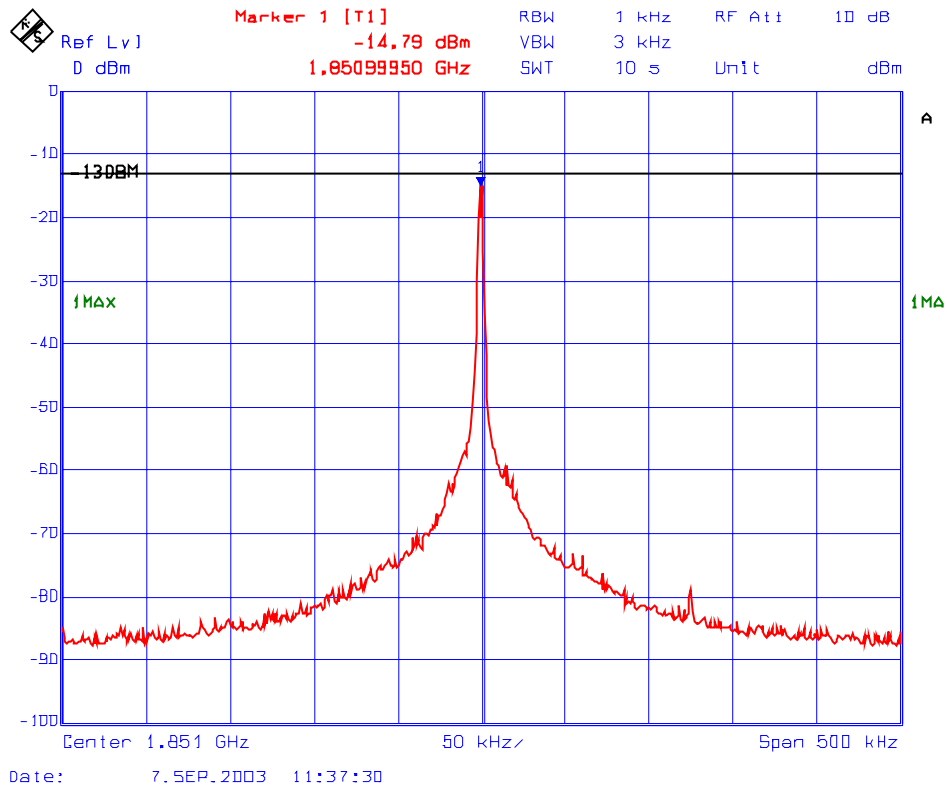


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 2: RF Output Power with 2 RF signal input/output in 1850 – 1910 MHz
 Fc : 1851 MHz, Fc + 200 KHz
 RF Input 1: -46.25 dBm, RF Input 2: -46.25 dBm

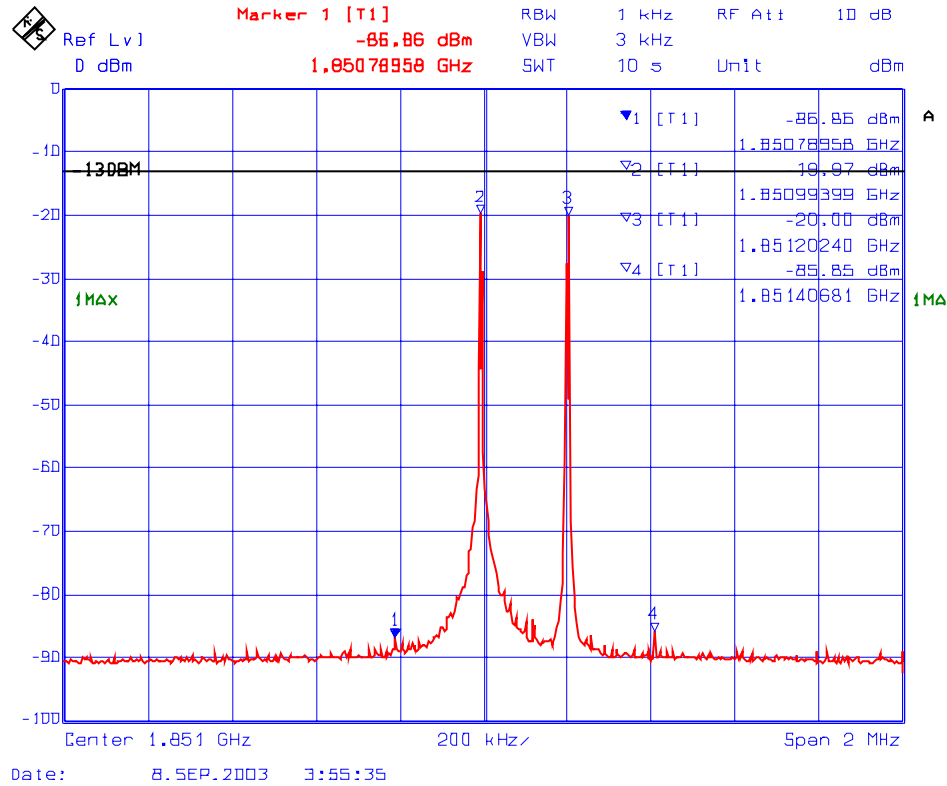


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 3: RF Output Power with 3 RF signal input/output in 1850 – 1910 MHz
Fc: 1851 MHz, Fc + 200 kHz, Fc + 400 kHz
RF Input 1: -49.35 dBm, RF Input 2: -49.35 dBm, RF Input 3: -49.35 dBm

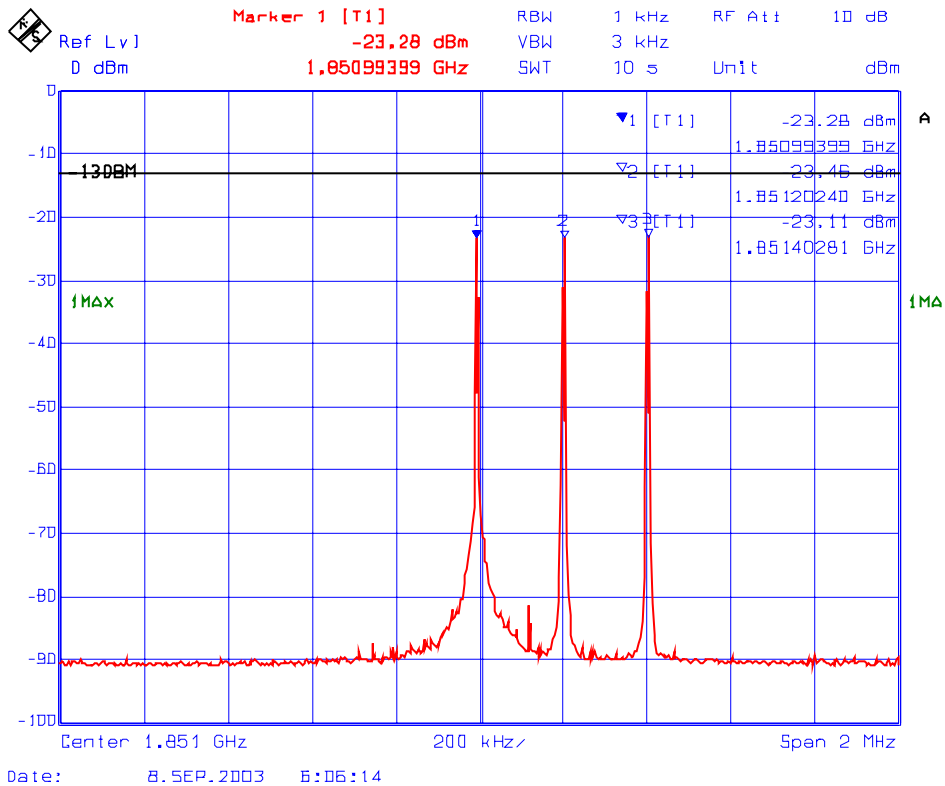


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 4: RF Output Power with 1 RF signal input/output in 1850 – 1910 MHz
Fc: 1880 MHz, RF Input: -40 dBm

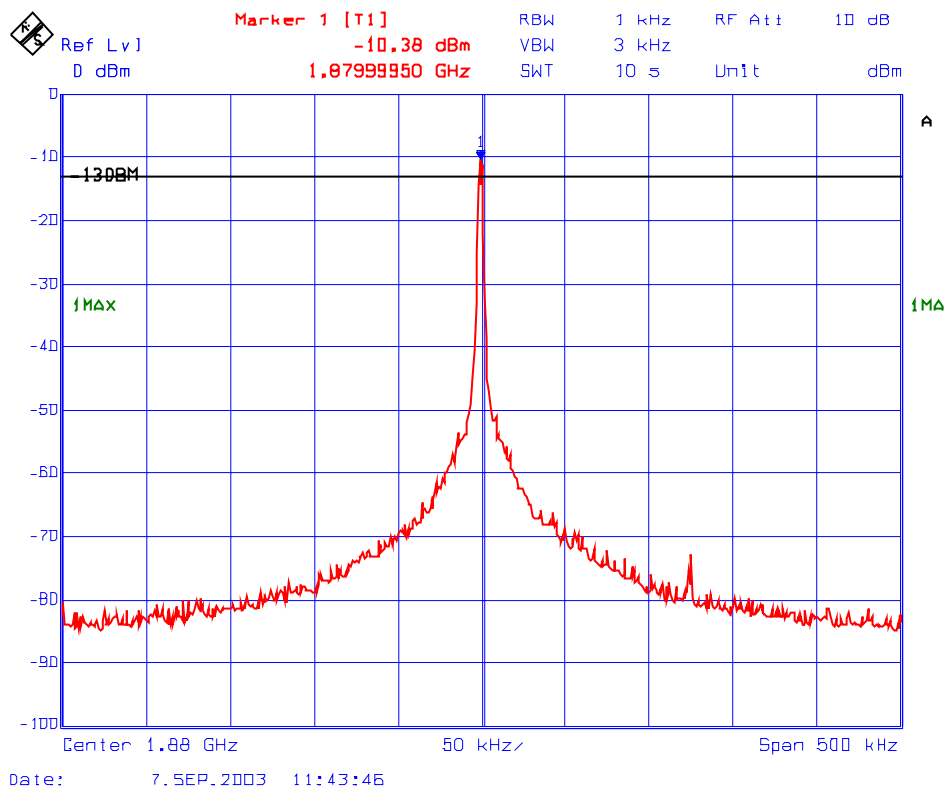


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 5: RF Output Power with 2 RF signal input/output in 1850 – 1910 MHz
Fc : 1880 MHz, Fc + 200 KHz
RF Input 1: -46.25 dBm, RF Input 2: -46.25 dBm

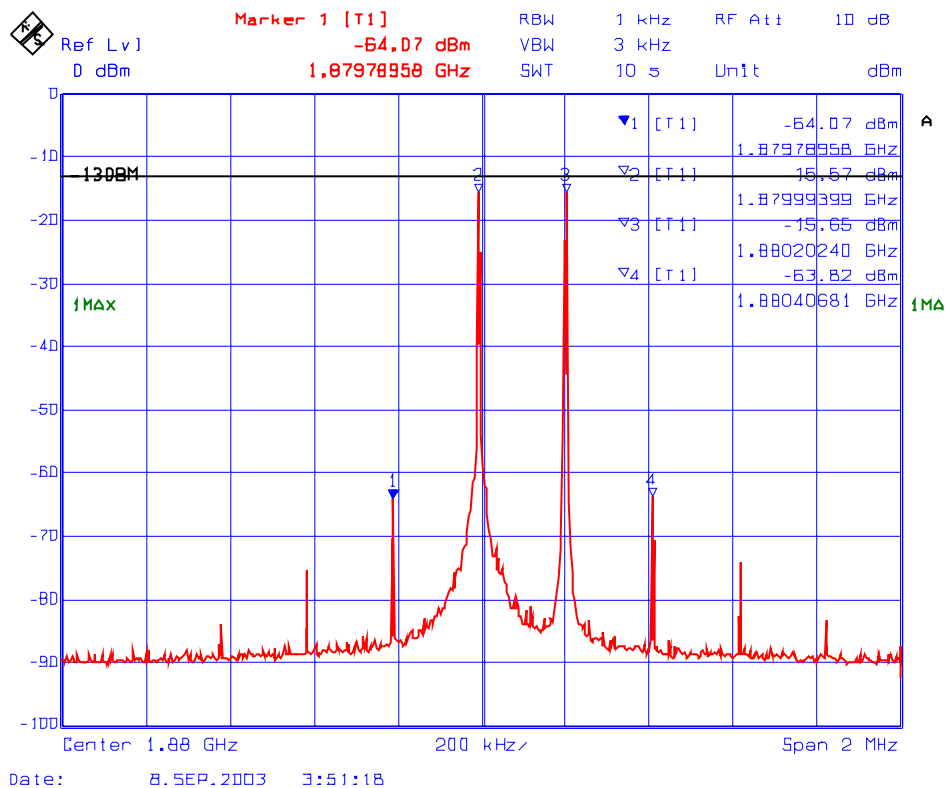


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 6: RF Output Power with 3 RF signal input/output in 1850 – 1910 MHz
Fc: 1880 MHz, Fc + 200 kHz, Fc - 200 kHz
RF Input 1: -49.35 dBm, RF Input 2: -49.35 dBm, RF Input 3: -49.35 dBm

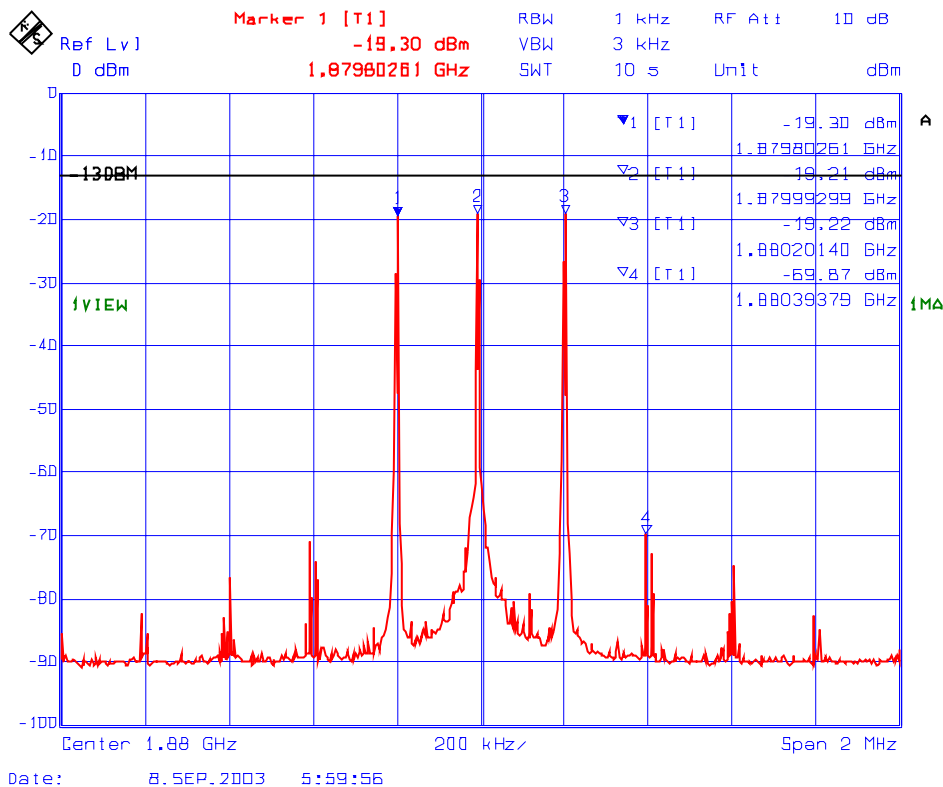


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 7: RF Output Power with 1 RF signal input/output in 1850 – 1910 MHz
Fc: 1909 MHz, RF Input: -40 dBm

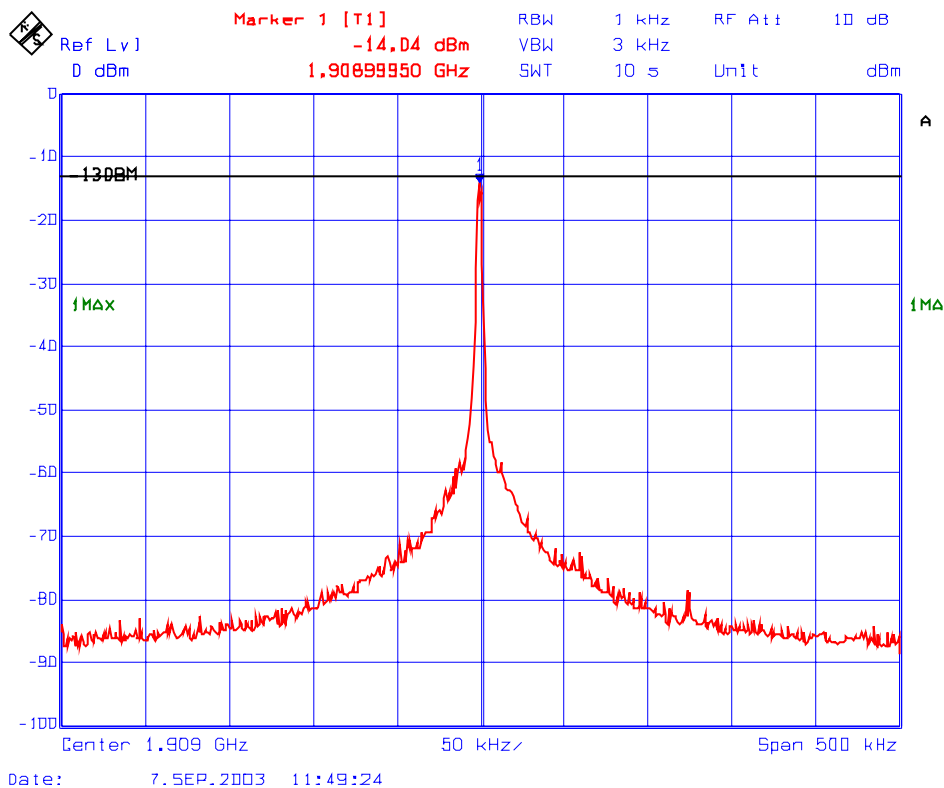


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 8: RF Output Power with 2 RF signal input/output in 1850 – 1910 MHz
 Fc : 1909 MHz, Fc - 200 KHz
 RF Input 1: -46.25 dBm, RF Input 2: -46.25 dBm

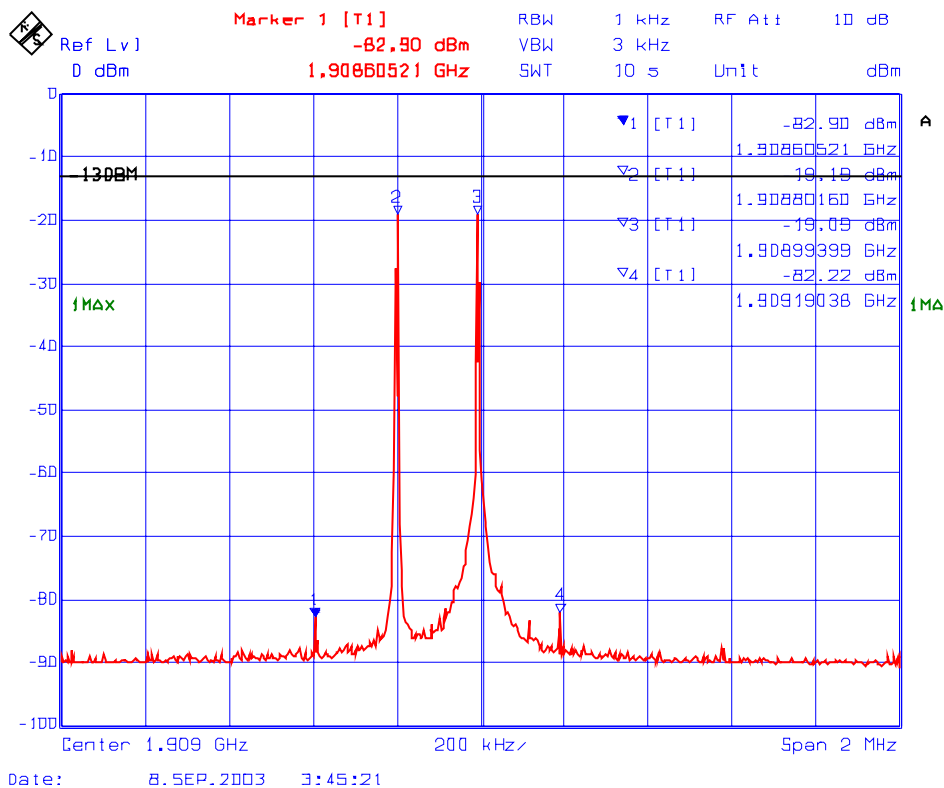


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 9: RF Output Power with 3 RF signal input/output in 1850 – 1910 MHz
Fc: 1909 MHz, Fc - 200 kHz, Fc - 400 kHz
RF Input 1: -49.35 dBm, RF Input 2: -49.35 dBm, RF Input 3: -49.35 dBm

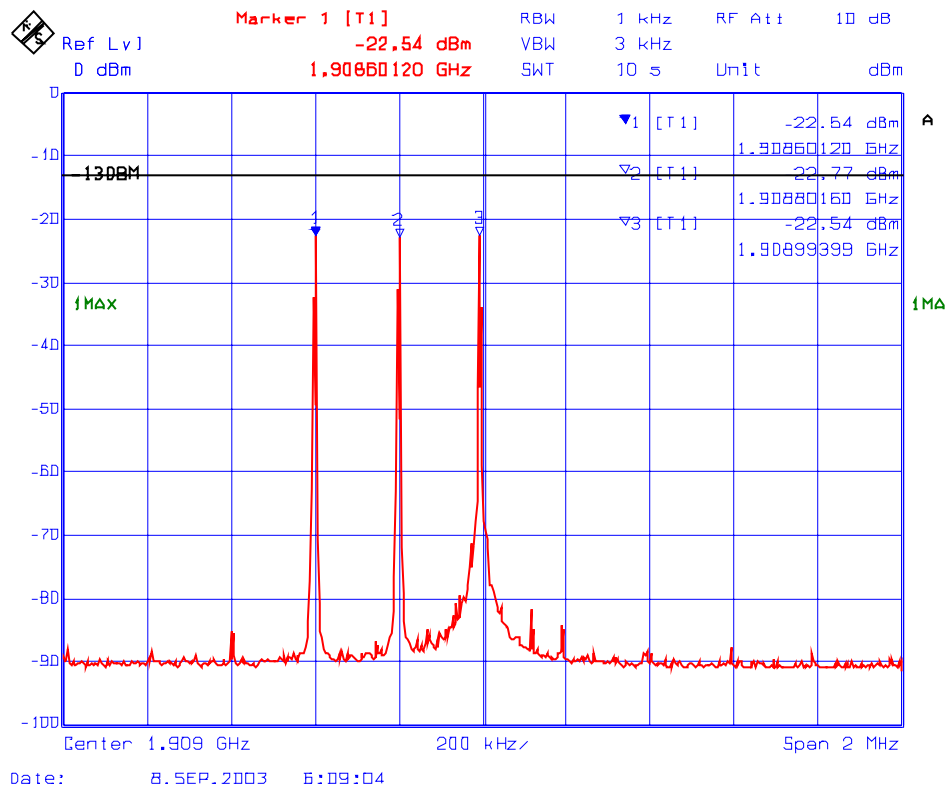

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. RF EXPOSURE REQUIRMENTS @ 1.1310 & 2.1091

5.7.1. Limits

- **FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(B) Limits for General Population/Uncontrolled Exposure				
1500-100,000	1.0	30

F = Frequency in MHz

5.7.2. Method of Measurements

Refer to FCC @ 1.1310, 2.1091 and Public Notice DA 00-705 (March 30, 2000)

- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
 - (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
 - (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
 - (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
 - (4) Any other RF exposure related issues that may affect MPE compliance

Calculation Method of RF Safety Distance:

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{PG/4\pi S}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

- For portable transmitters (see Section 2.1093), or devices designed to operate next to a person's body, compliance is determined with respect to the SAR limit (define in the body tissues) for near-field exposure conditions. If the maximum average output power, operating condition configurations and exposure conditions are comparable to those of existing cellular and PCS phones., an SAR evaluation may be required in order to determine if such a device complies with SAR limit. When SAR evaluation data is not available, and the additional supporting information cannot assure compliance, the Commission may request that an SAR evaluation be performed, as provided for in Section 1.1307(d)

5.7.3. Test Data

Antenna Gain Limit specified by Manufacturer: 0 dBi

As per Manufacturer's rating the RF output of Model US1900P combined with any Head-End Device shall be less 4 dBm. Therefore, the Separation distance will be 0.45 cm.

Note 1: RF EXPOSURE DISTANCE LIMITS: $r = (PG/4\pi IS)^{1/2} = (EIRP/4\pi IS)^{1/2}$
 $S = 1 \text{ mW/cm}^2$

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: 0.45 cm	Manufacturer' instruction for separation distance between antenna and persons required: 20 cm. Please refer to page # 19 of the Users/ Manual and FCC RF Exposure folder

FREQUENCY STABILITY @ FCC §2.1055 & §24.235

5.7.4. Limits

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


5.7.5. Method of Measurements

Refer to FCC § 2.1055 and Exhibit 8, Section 8.3 of this report for detailed test procedures.

5.7.6. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8593EM	3412A00103	9 kHz – 26.5 GHz
Attenuator(s)	Bird	8306-200-B	...	DC – 22 GHz
Temperature & Humidity Chamber	Tenney	T5	9723B	-40° to +60° C range

5.7.7. Test Arrangement

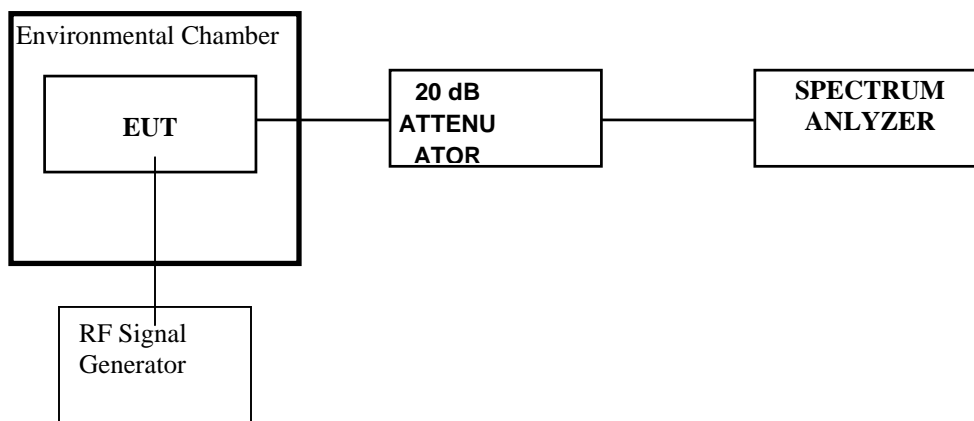

5.7.8. Test Data

Frequency Band:	1850 – 1910 MHz
Center Frequency:	1850 MHz
Full Power Level:	-9.0 dBm
Frequency Tolerance Limit:	Stay within the permitted bands
Max. Frequency Tolerance Measured:	0 Hz or 0 ppm
Input Voltage Rating:	28 Vdc

Ambient Temperature (°C)	Center Frequency & RF Power Output Variation		
	Supply Voltage (Nominal) 28 Volts	Supply Voltage (85 % of Nominal) 23.8 Volts	Supply Voltage (115% of Nominal) 32.2 Volts
	Hz	Hz	Hz
-30	0	N/A	N/A
-20	0	N/A	N/A
-10	0	N/A	N/A
0	0	N/A	N/A
+10	0	N/A	N/A
+20	0	0	0
+30	0	N/A	N/A
+40	0	N/A	N/A
+50	0	N/A	N/A

5.8. OCCUPIED BANDWIDTH & EMISSION LIMITS (CONDUCTED) @ FCC §24.238 & §2.1049

5.8.1. Limits

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43+10\log(P)$ dB.


5.8.2. Method of Measurements

Please refer to FCC 24.238(b) - (d) and Exhibit 8, Section 8.4 for detailed test procedures.

Measuring Bandwidths:

- Outside the permitted band block: RBW = 1 MHz, VBW \geq RBW
- Inside or on the permitted band block: RBW = 1% of -26dBc Bandwidth, VBW \geq RBW

5.8.3. Test Arrangement

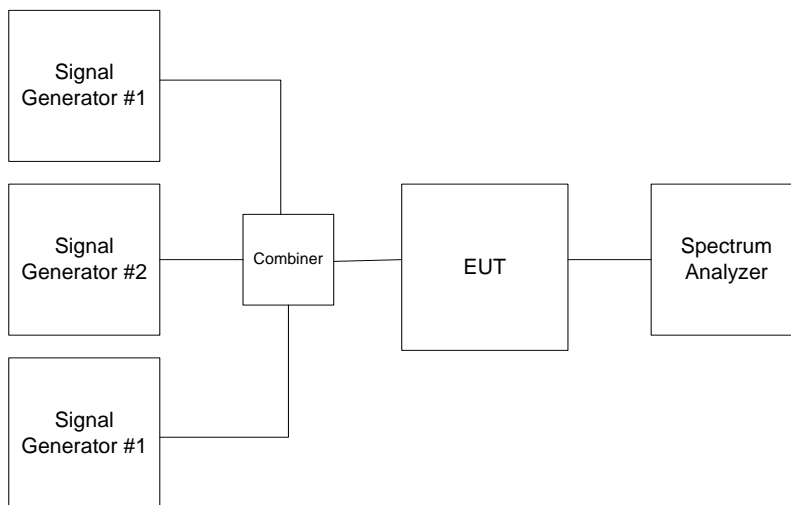

5.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Advantest	R3271	15050203	100 Hz – 26.5 GHz
Attenuator(s)	Bird	DC – 22 GHz
Hihpass Filter, Microphase	Microphase	CR220HID	IIT111000AC	Cut-off Frequency at 2.5 GHz

5.8.5. Test Data

Remark: Since the device under test is an amplifier, the comparison test of RF input and output signals are conducted for compliance with FCC Rules.


5.8.5.1. 20 dB Bandwidth and Gain of the Amplifier

Refer to Plot # 10 for detailed measurements of 20 dB and maximum gain of the Amplifier

5.8.5.2. 26dB Bandwidth - RF Output versus RF Input in 1850-1910 MHz Band

Frequency (MHz)	Modulation	26 dB Bandwidth of RF Input Signal (MHz)	26 dB Bandwidth of RF Output Signal (MHz)	Measurement Plot Number
1851	CDMA	1.44	1.45	11, 12
1880	CDMA	1.44	1.52	13
1909	CDMA	1.44	1.43	14
1851	TDMA	0.033	0.033	15, 16
1880	TDMA	0.033	0.034	17
1909	TDMA	0.033	0.033	18
1851	GSM	0.32	0.32	19, 20
1880	GSM	0.32	0.32	21
1909	GSM	0.32	0.32	22

Plot # 10 : 20 dB BW of the 1850 - 1910 MHz band pass gain
 RF Input: -40 dBm from 1800 -1960 MHz, Max. Gain: 30.44 dB

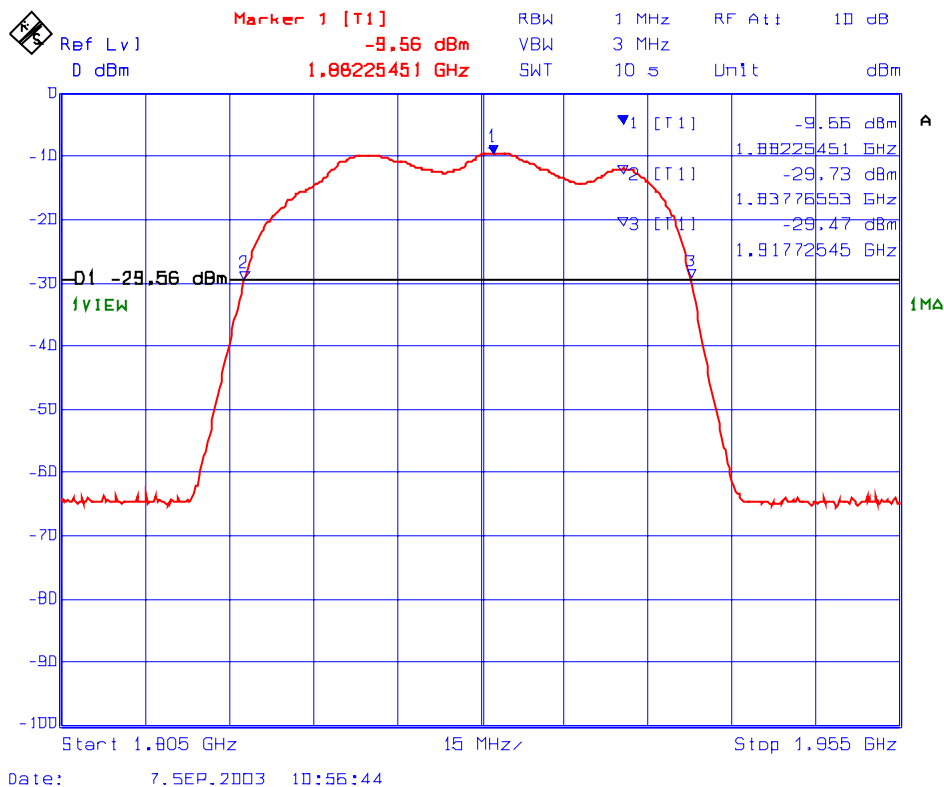


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 11 : 26 dB BW of the 1850 – 1910 MHz, RF Input
 Frequency: 1880 MHz, Modulation: CDMA

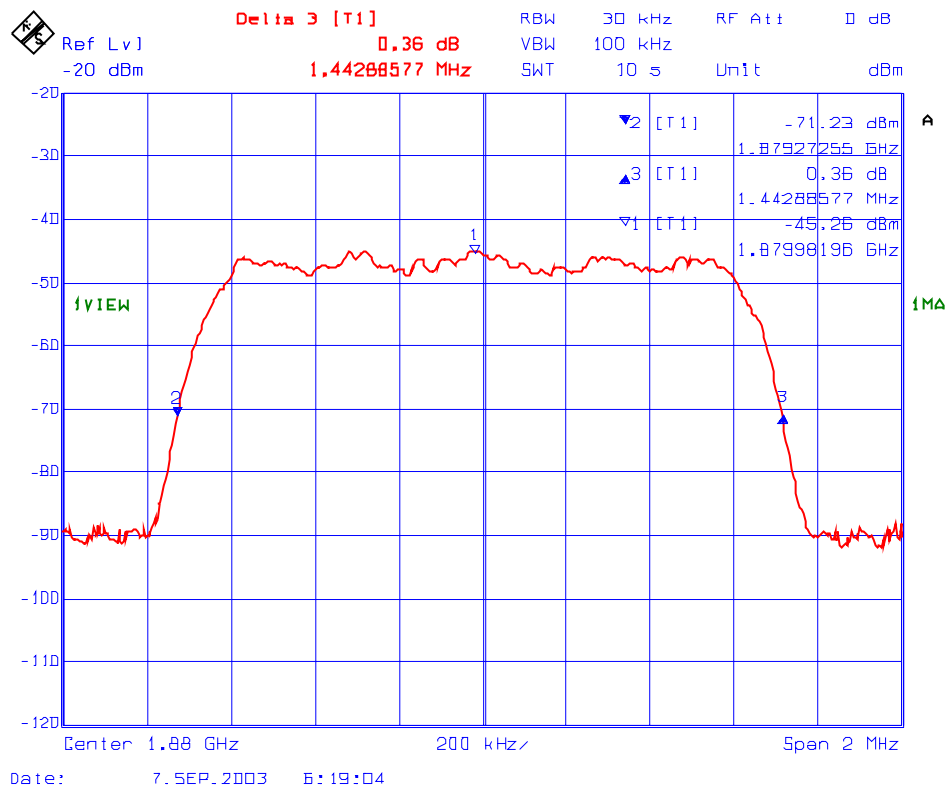


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 12 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1851 MHz, Modulation: CDMA

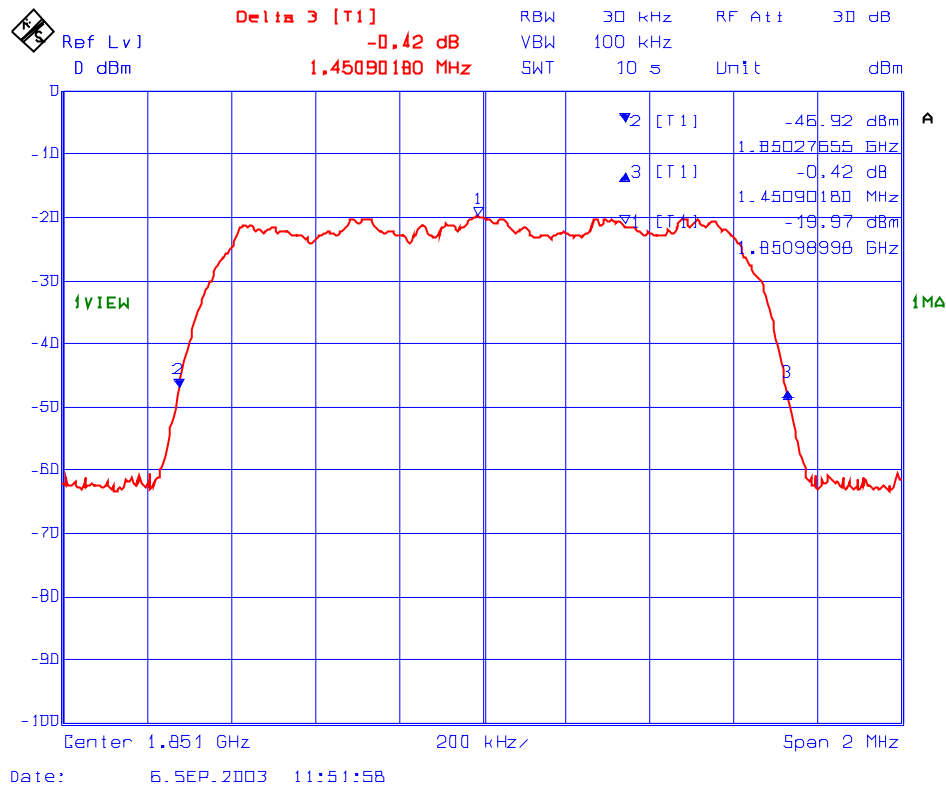


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 13 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1880 MHz, Modulation: CDMA

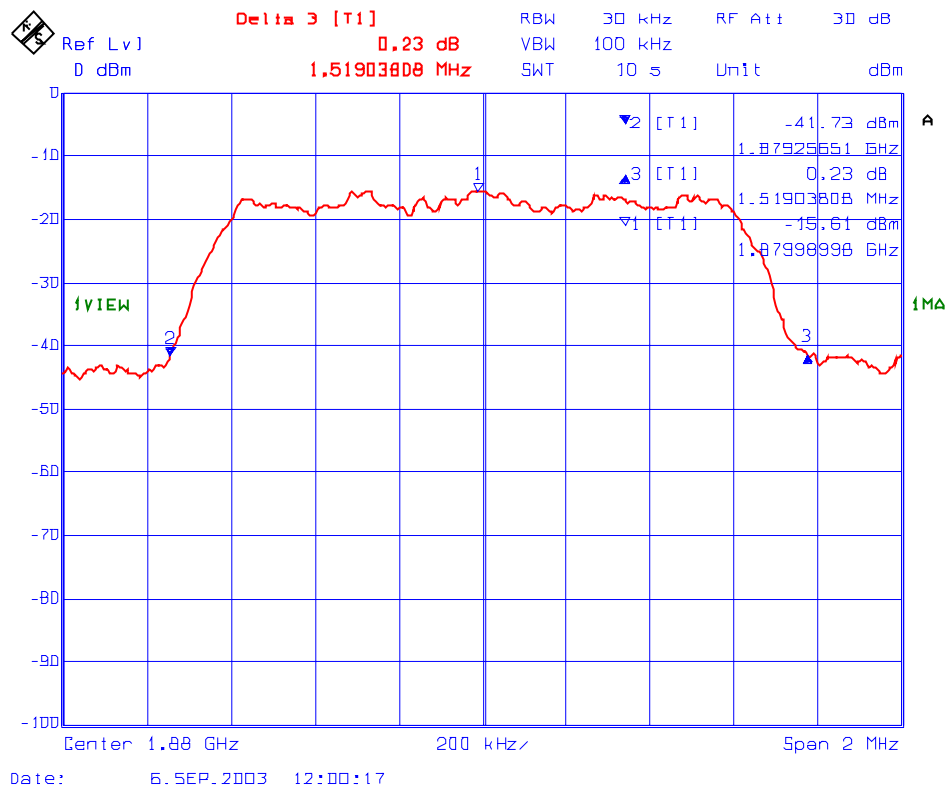


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 14 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1909 MHz, Modulation: CDMA

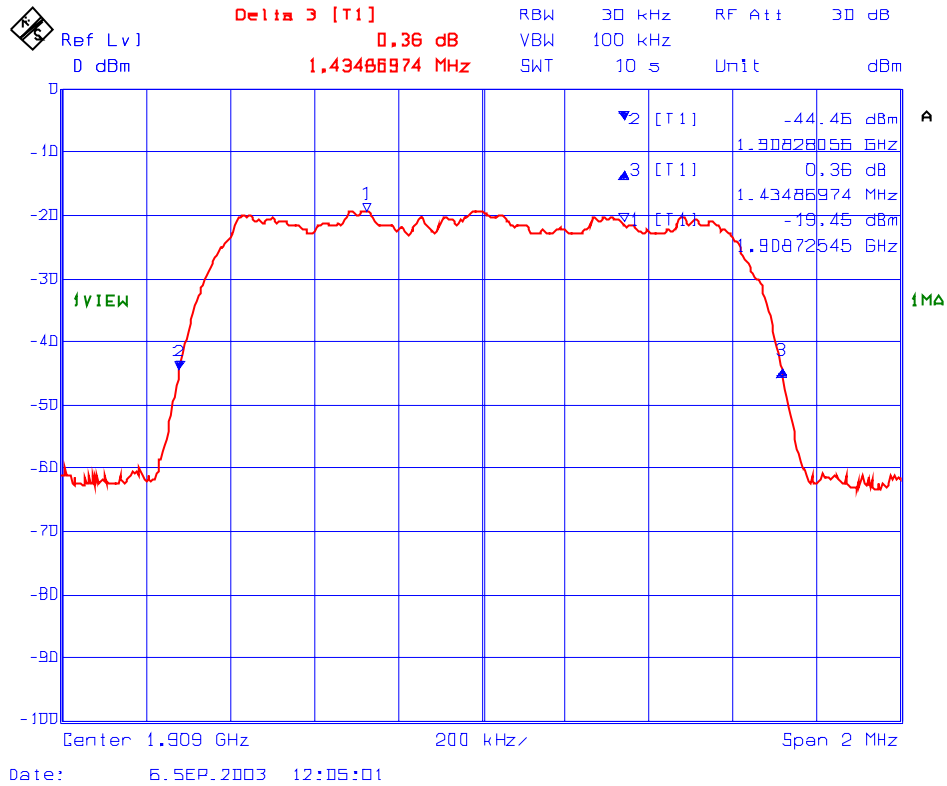


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 15 : 26 dB BW of the 1850 – 1910 MHz, RF Input
 Frequency: 1880 MHz, Modulation: TDMA

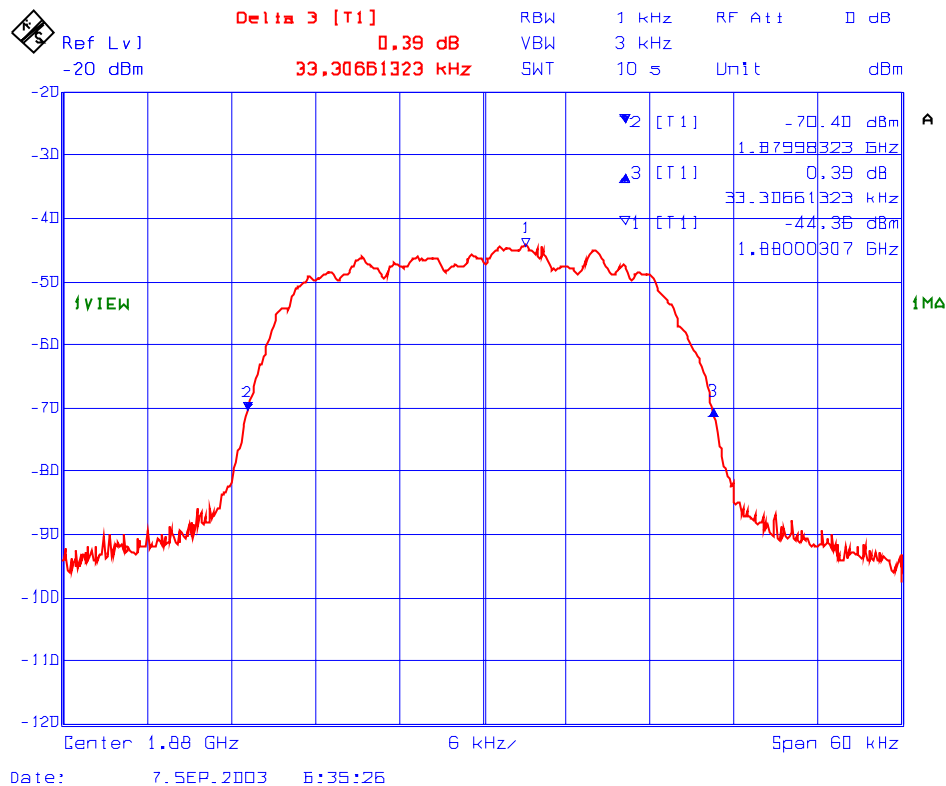


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 16 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1851 MHz, Modulation: TDMA

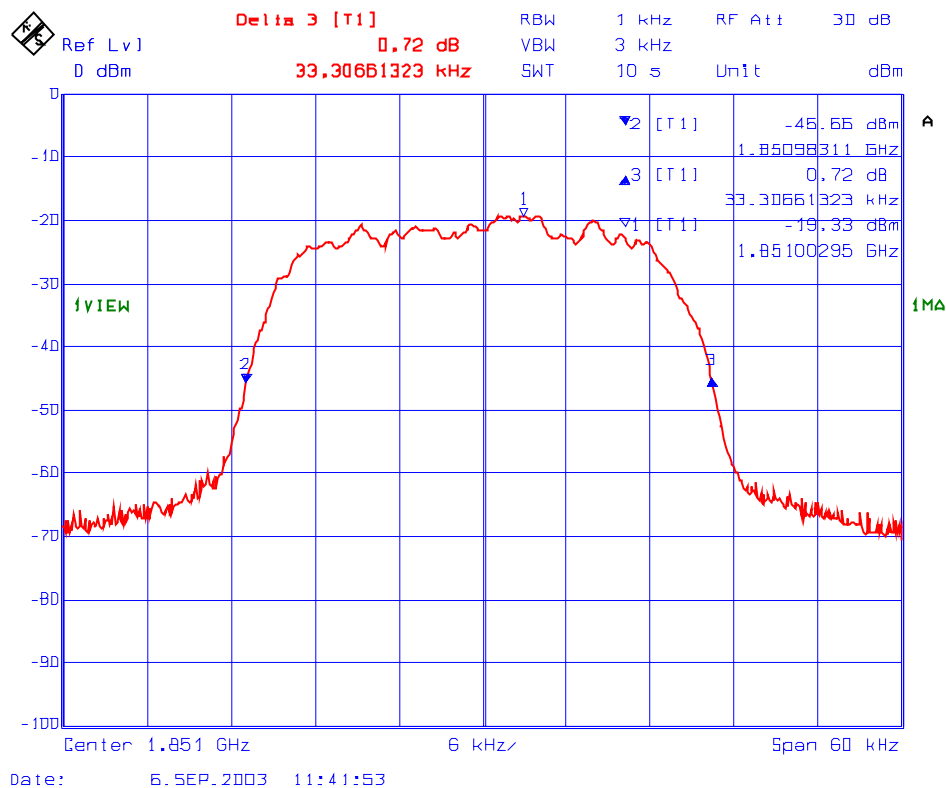


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 17 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1880 MHz, Modulation: TDMA

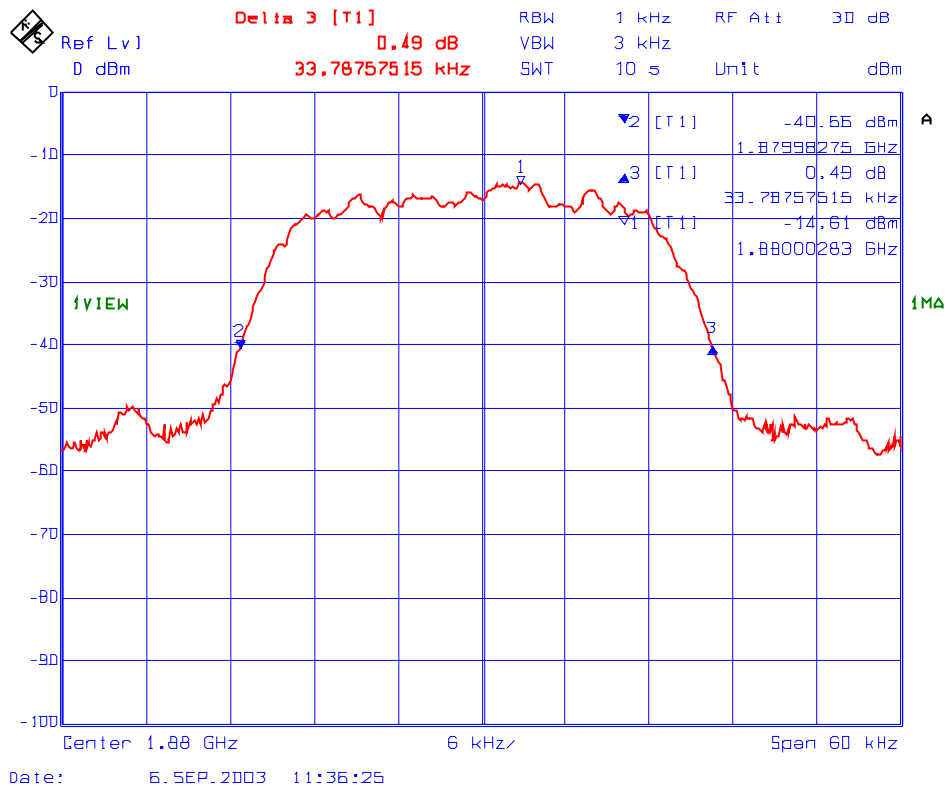


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 18 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1909 MHz, Modulation: TDMA

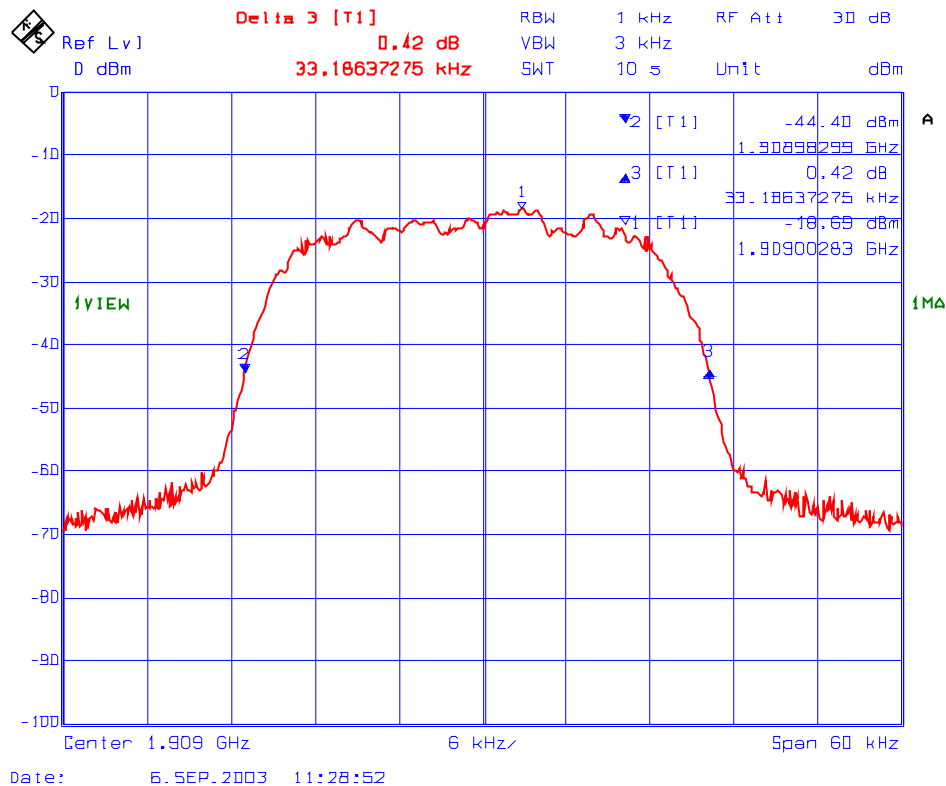


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 19 : 26 dB BW of the 1850 – 1910 MHz, RF Input
 Frequency: 1880 MHz, Modulation: GSM

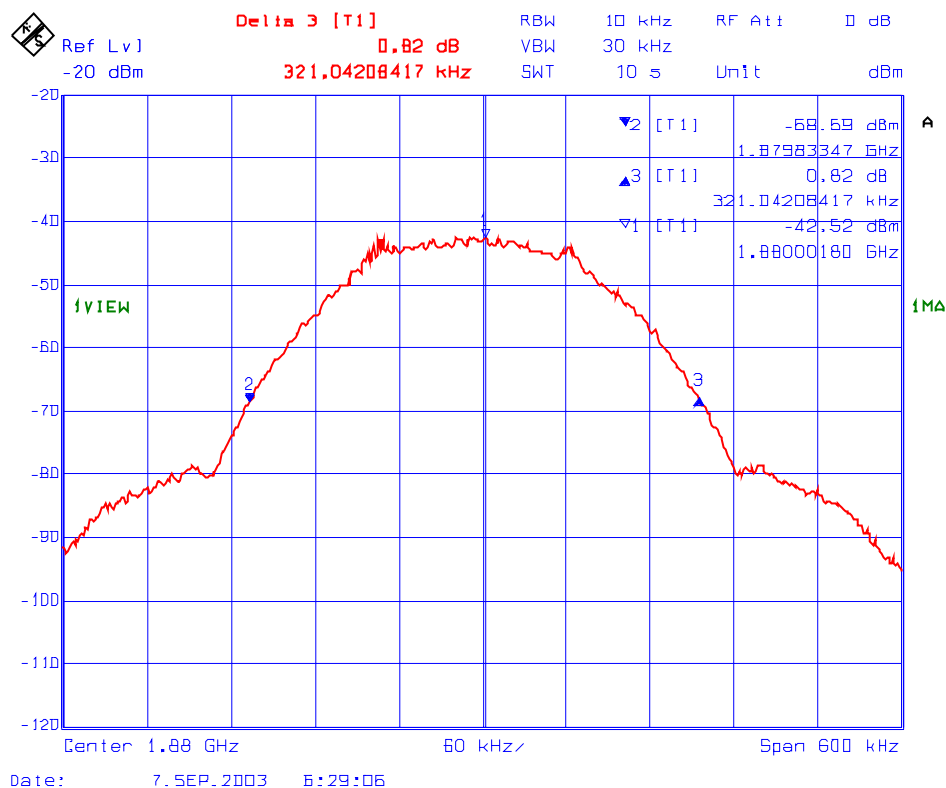


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 20 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1851 MHz, Modulation: GSM

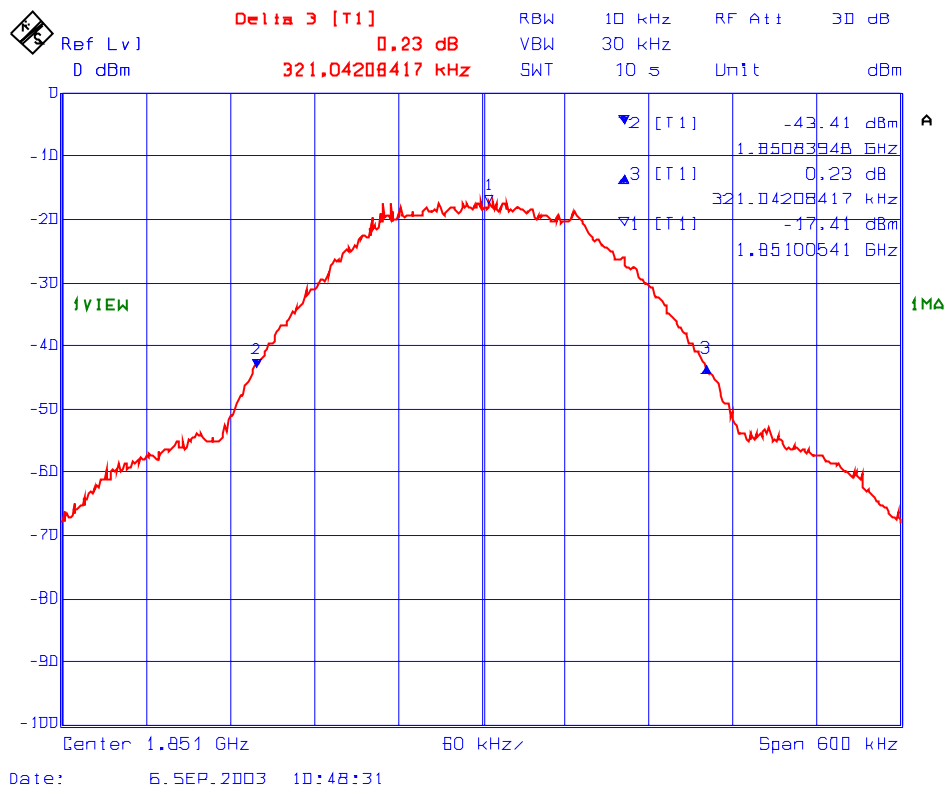


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 21 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1880 MHz, Modulation: GSM

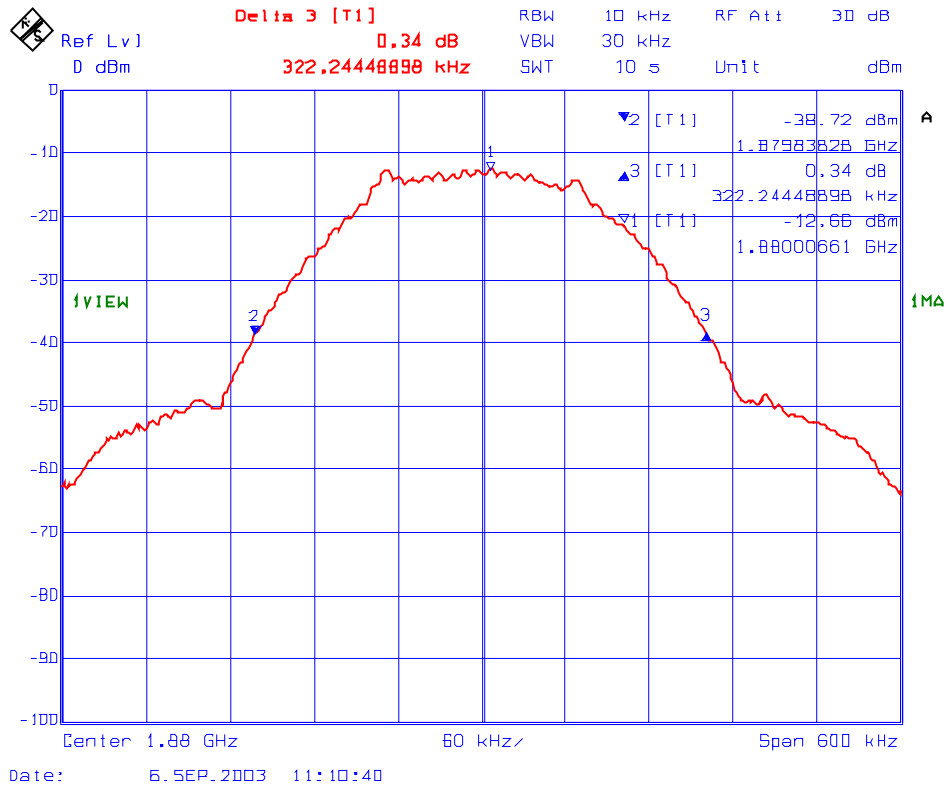


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 22 : 26 dB BW of the 1850 – 1910 MHz, RF Output
 Frequency: 1909 MHz, Modulation: GSM

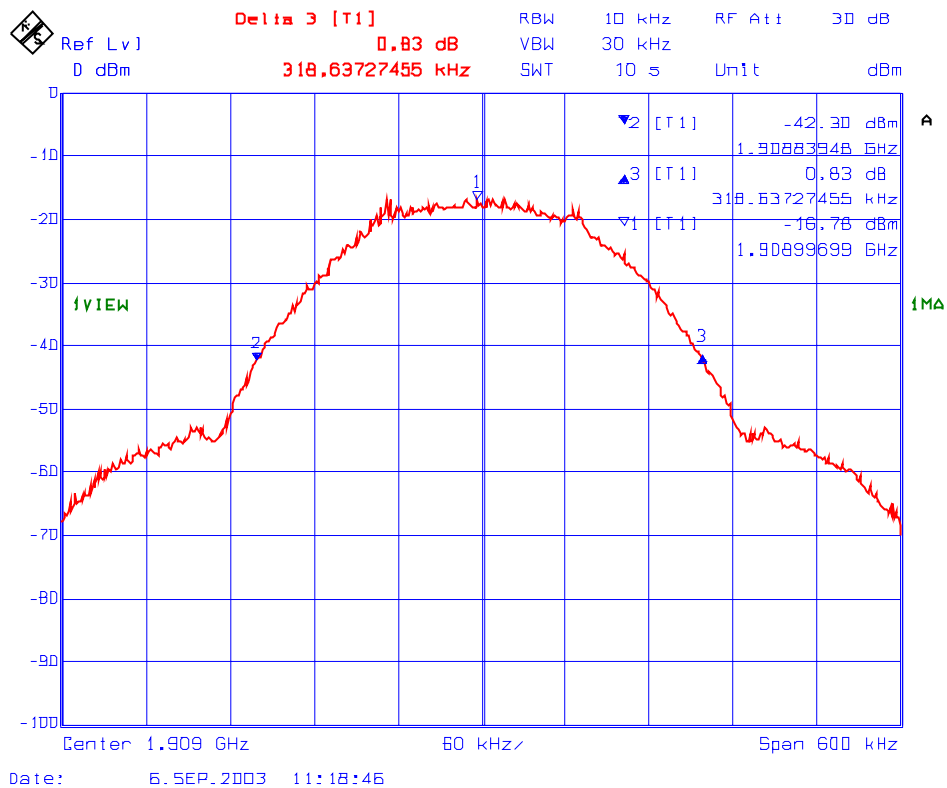

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.5.3. Band-edge Emissions

Conforms. Refer to Plots 23 to 28 for detailed of measurements.

Plot # 23: Band-Edge Conducted Emissions
Frequency: 1851 MHz, Modulation: CDMA
Trace 1; Unmodulated RF Output, Trace 2: CDMA RF Output

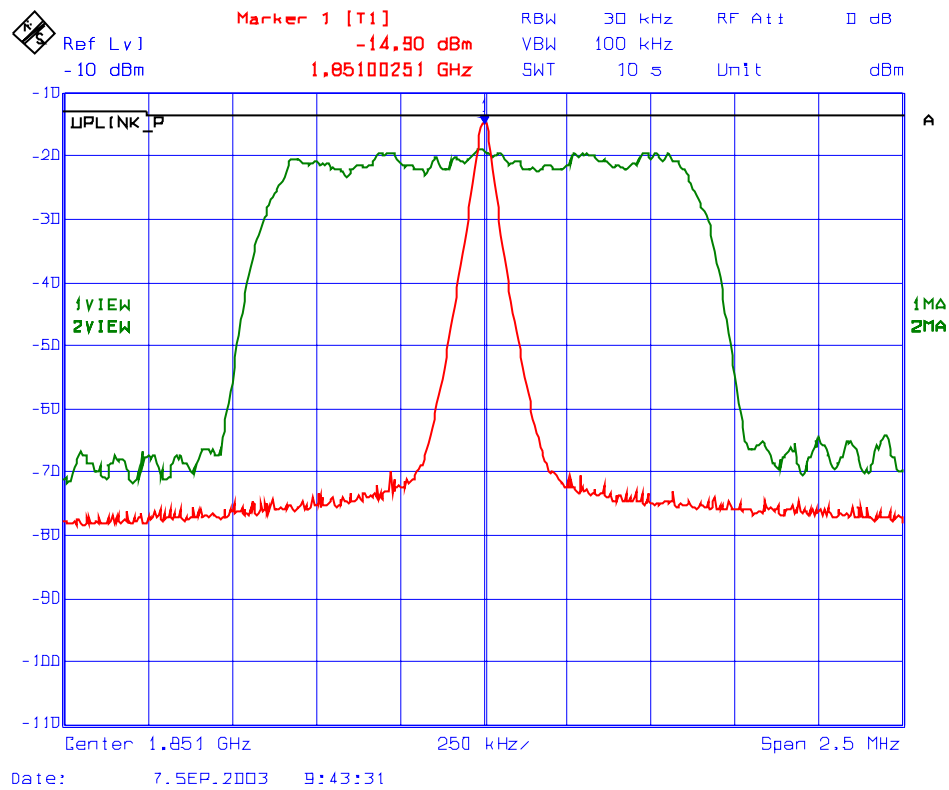


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 24: Band-Edge Conducted Emissions
Frequency: 1909 MHz, Modulation: CDMA
Trace 1; Unmodulated RF Output, Trace 2: CDMA RF Output

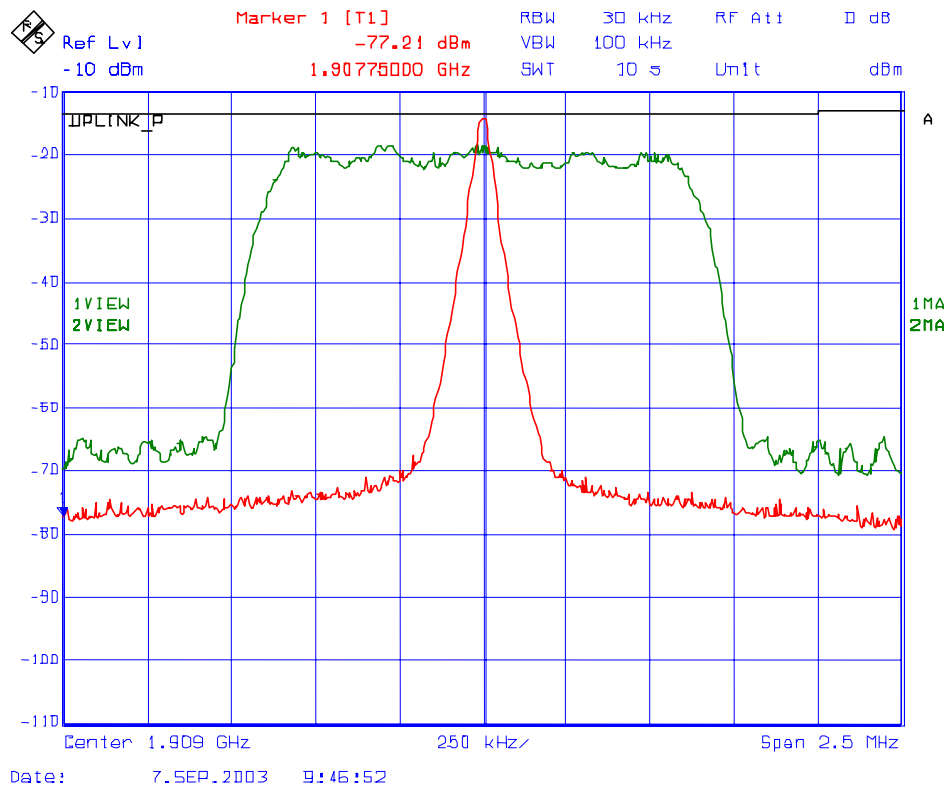


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 25: Band-Edge Conducted Emissions
Frequency: 1851 MHz, Modulation: TDMA
Trace 1; Unmodulated RF Output, Trace 2: TDMA RF Output

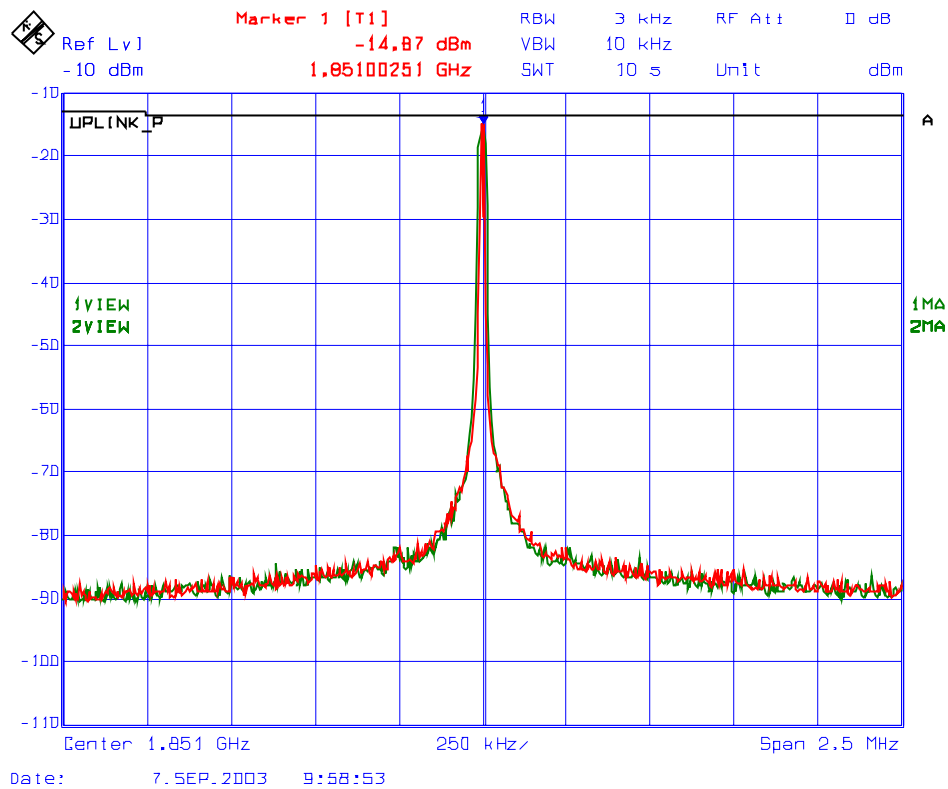


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 26: Band-Edge Conducted Emissions
Frequency: 1909 MHz, Modulation: TDMA
Trace 1; Unmodulated RF Output, Trace 2: TDMA RF Output

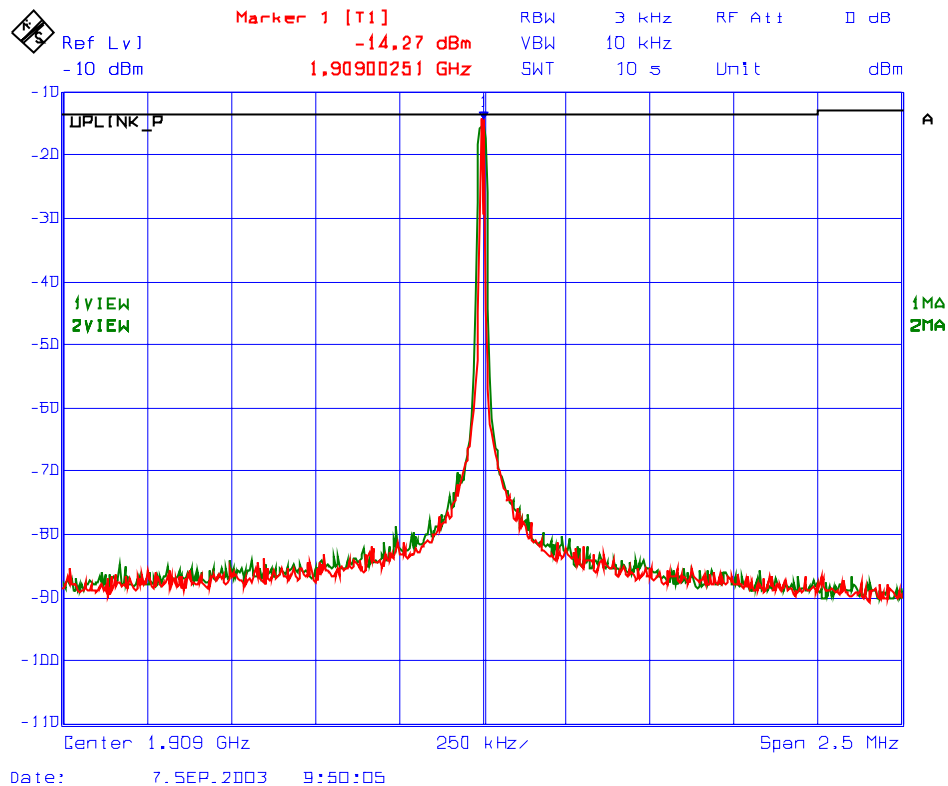


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 27: Band-Edge Conducted Emissions
Frequency: 1851 MHz, Modulation: GSM
Trace 1; Unmodulated RF Output, Trace 2: GSM RF Output

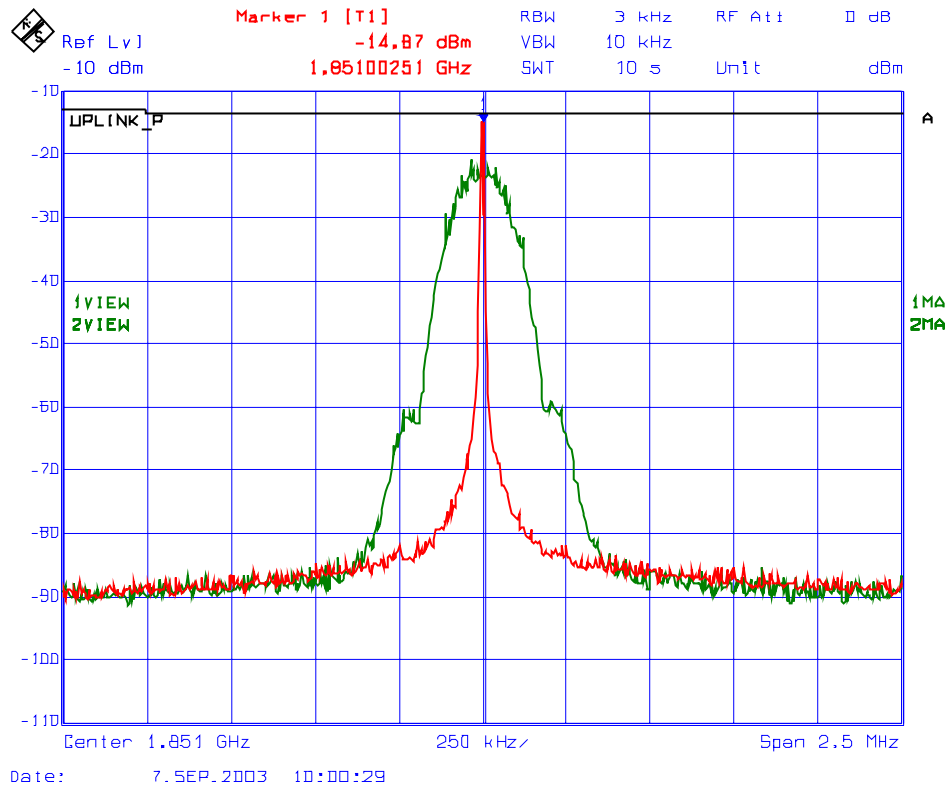


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 28: Band-Edge Conducted Emissions
Frequency: 1909 MHz, Modulation: GSM
Trace 1; Unmodulated RF Output, Trace 2: GSM RF Output

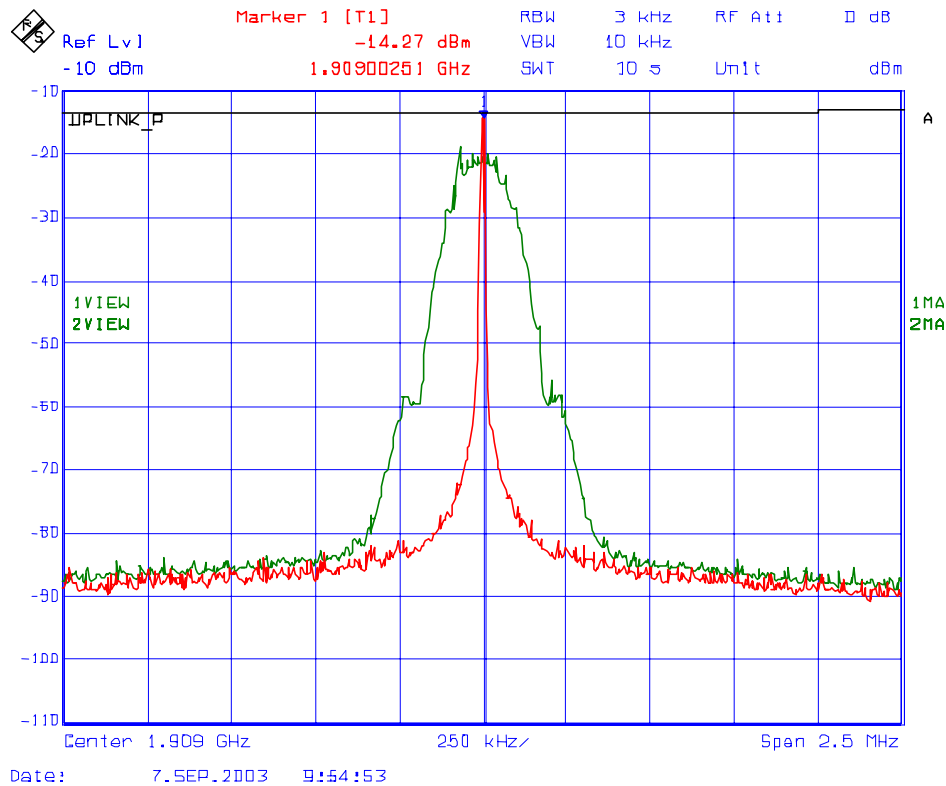

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.5.4. Transmitter RF Conducted Spurious Emissions at the Antenna Port

5.8.5.4.1. Uplink Band 1850 - 1910 MHz: Test Frequency: 1851 MHz, Modulation: CDMA

Fundamental Frequency: 1851 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	-53.3	-39.7	-0.6	-39.1	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 29-30 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					


5.8.5.4.2. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: CDMA

Fundamental Frequency: 1880 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -9.0 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-47.5	-38.5	4.0	-42.5	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 31-32 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.3. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: CDMA

Fundamental Frequency: 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.1 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	- 55.1	-42.0	-0.1	-41.9	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 33-34 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 29 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1851 MHz, Modulation: CDMA

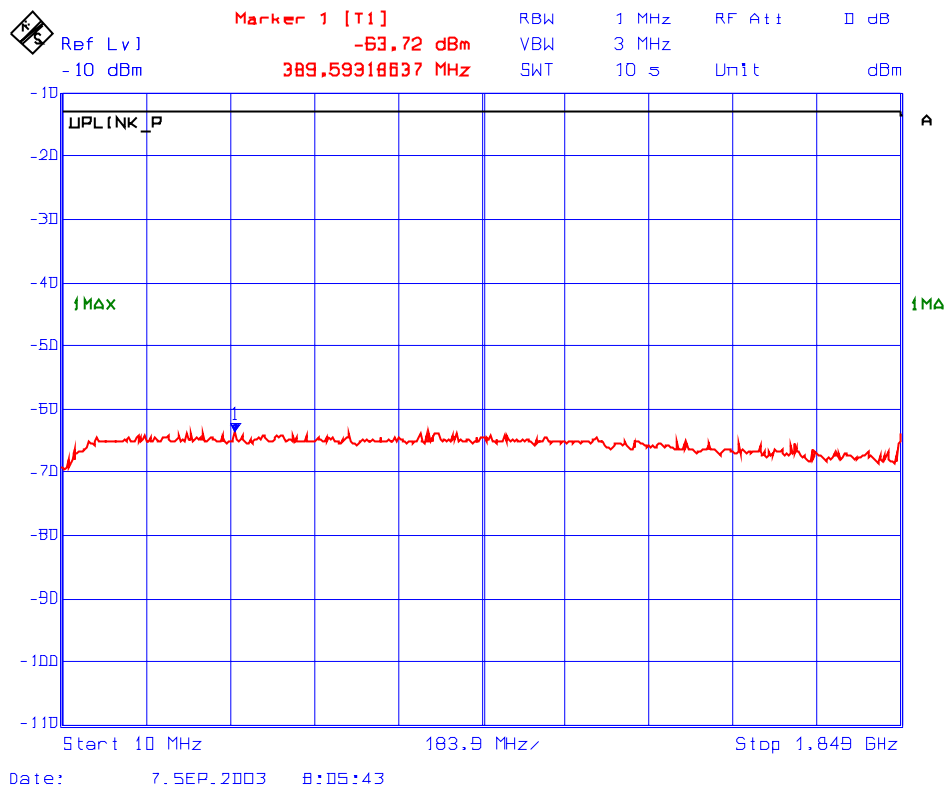


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 30 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1851 MHz, Modulation: CDMA

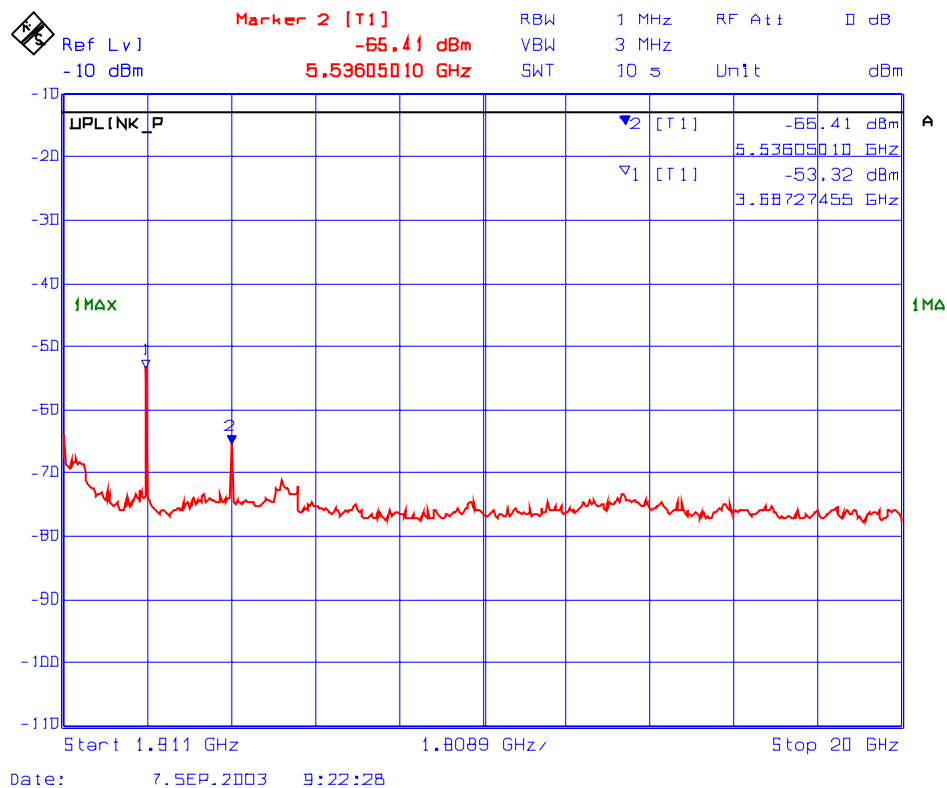


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 31 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1880 MHz, Modulation: CDMA

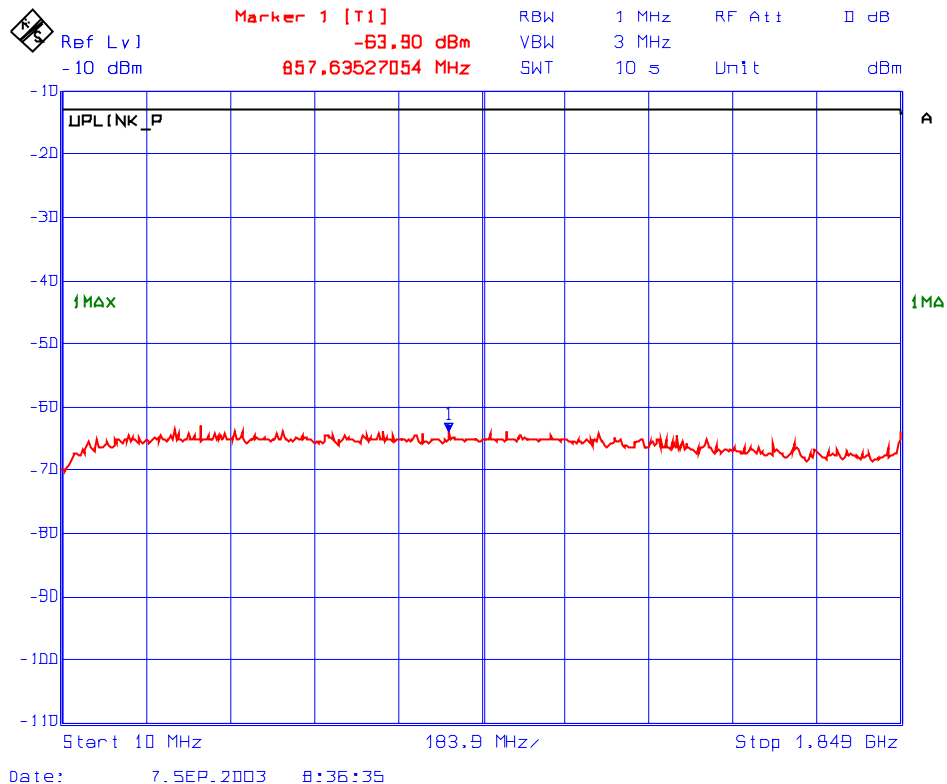


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 32 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1880 MHz, Modulation: CDMA

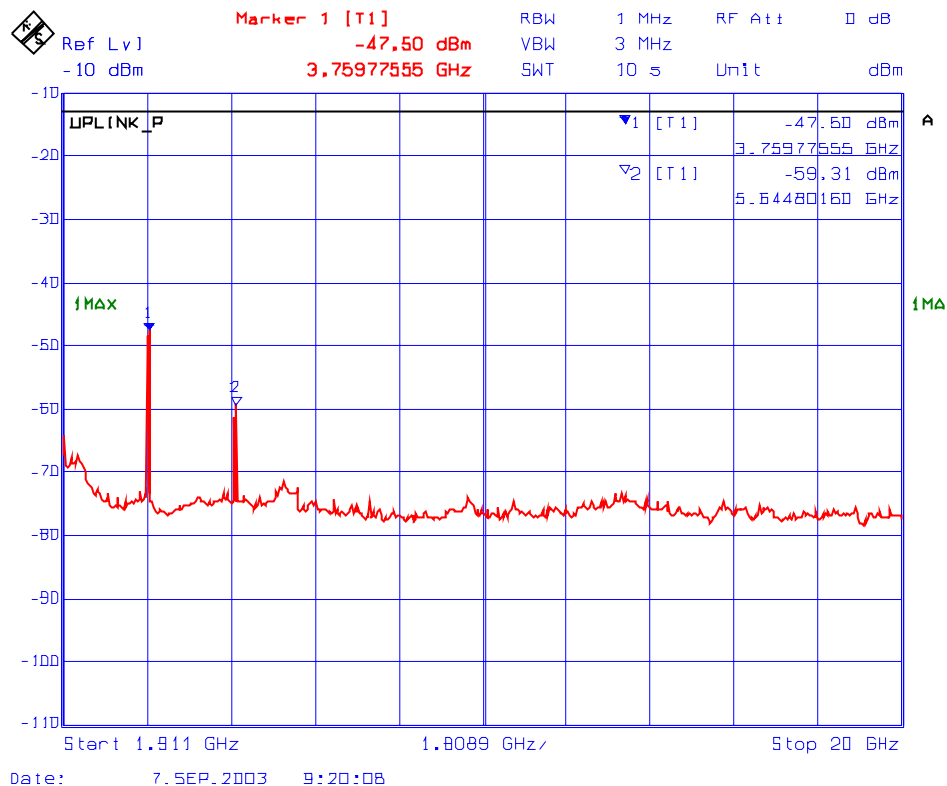


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 33 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1909 MHz, Modulation: CDMA

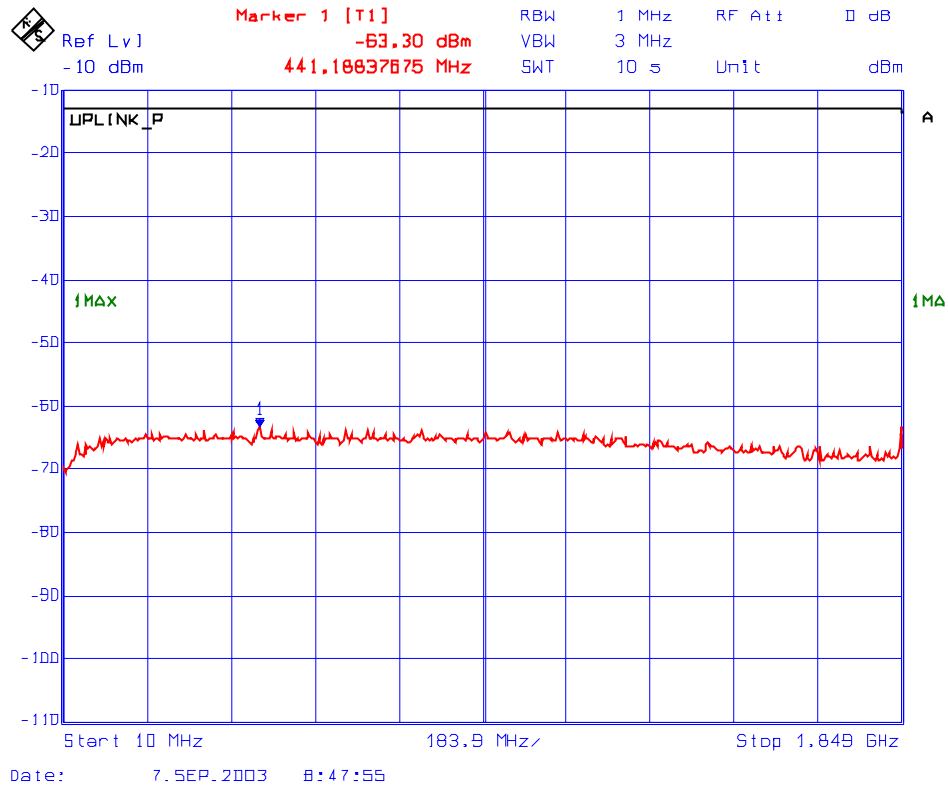


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 34 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1909 MHz, Modulation: CDMA

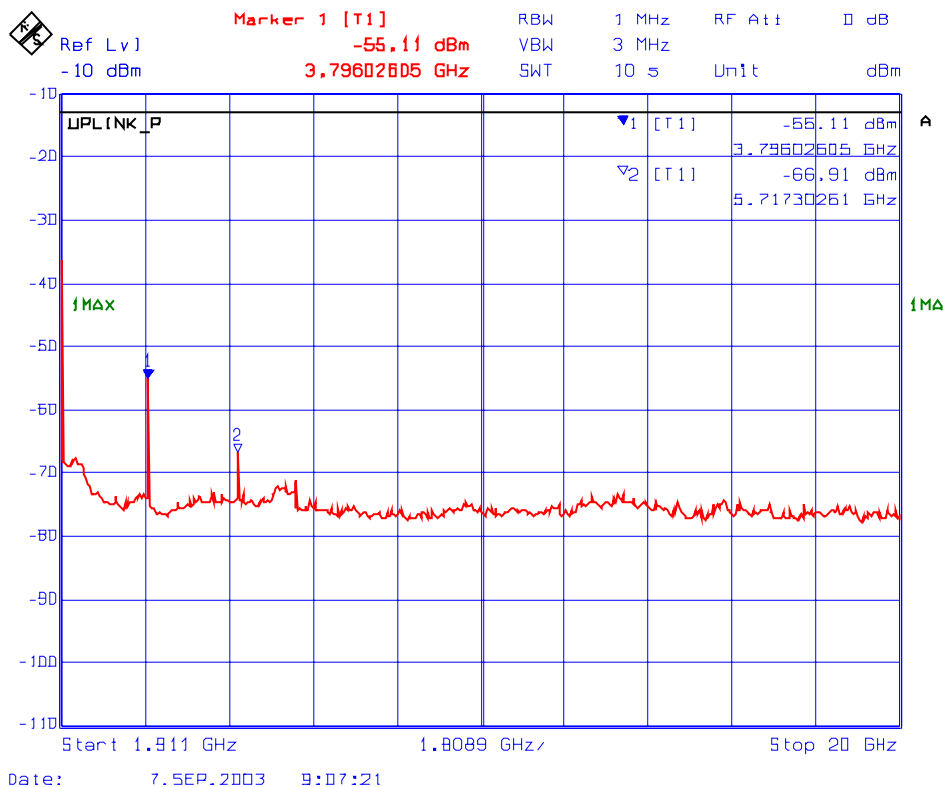

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.5.4.4. Uplink Band 1850 - 1910 MHz: Test Frequency: 1851 MHz, Modulation: TDMA

Fundamental Frequency: 1851 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	-56.1	-42.5	-0.6	-41.9	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 35-36 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					


5.8.5.4.5. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: TDMA

Fundamental Frequency: 1880 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: - 9.0 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-46.3	-37.3	4.0	-41.3	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 37-38 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.6. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: TDMA

Fundamental Frequency: 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.1 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-53.1	-40.0	-0.1	-39.1	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 39-40 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 35 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1851 MHz, Modulation: TDMA

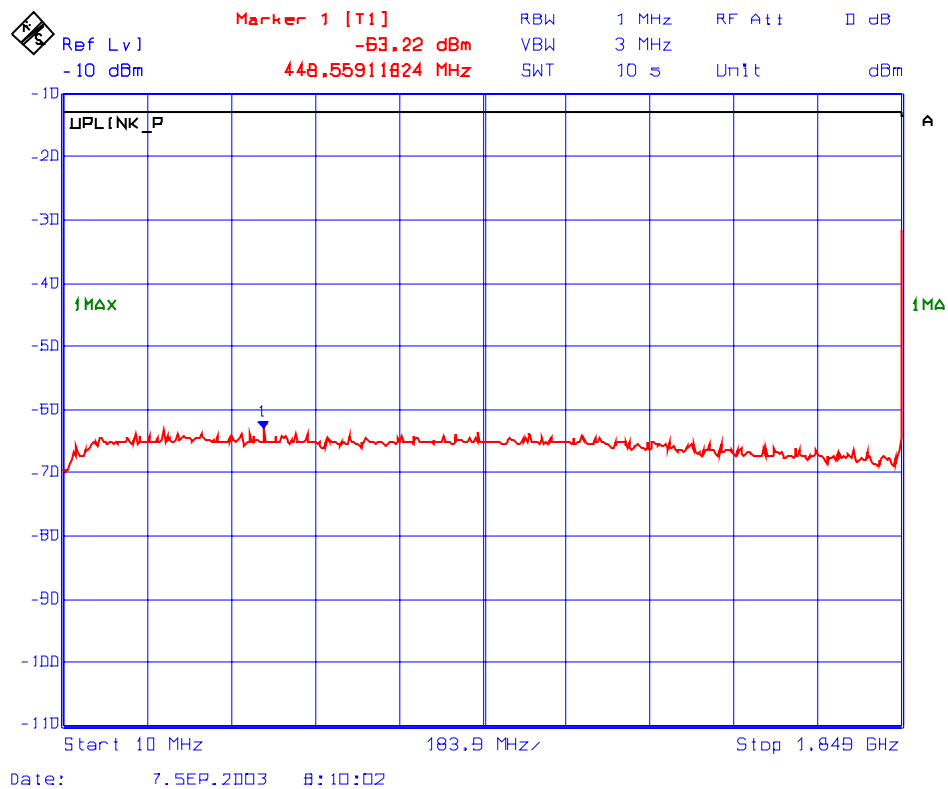


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 36 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1851 MHz, Modulation: TDMA

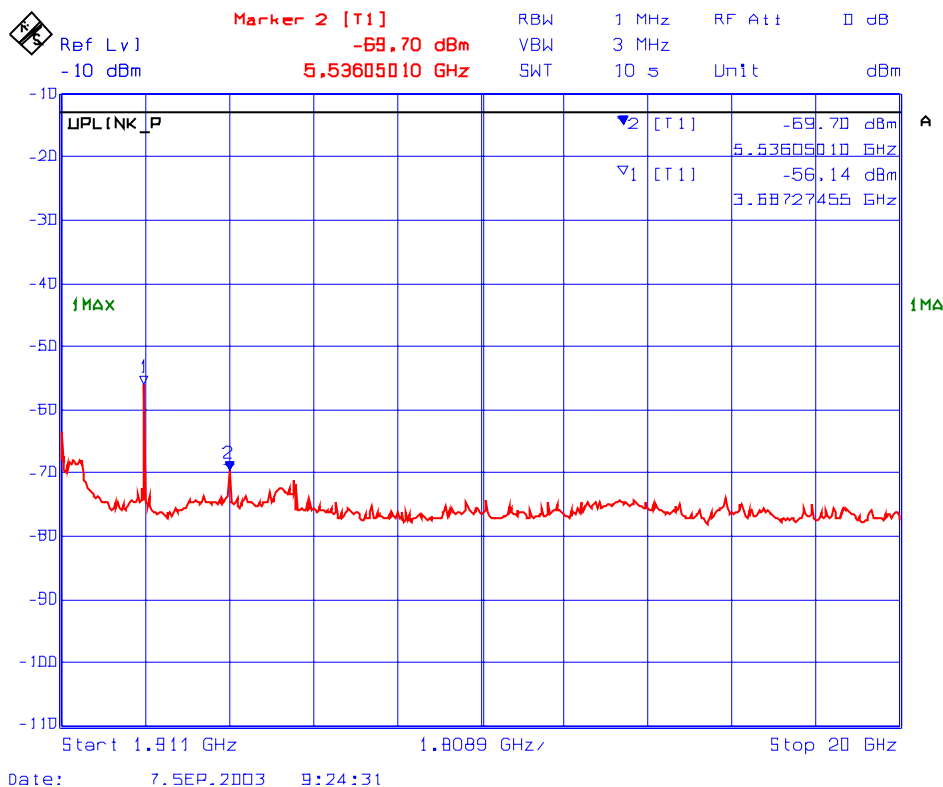


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 37 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1880 MHz, Modulation: TDMA

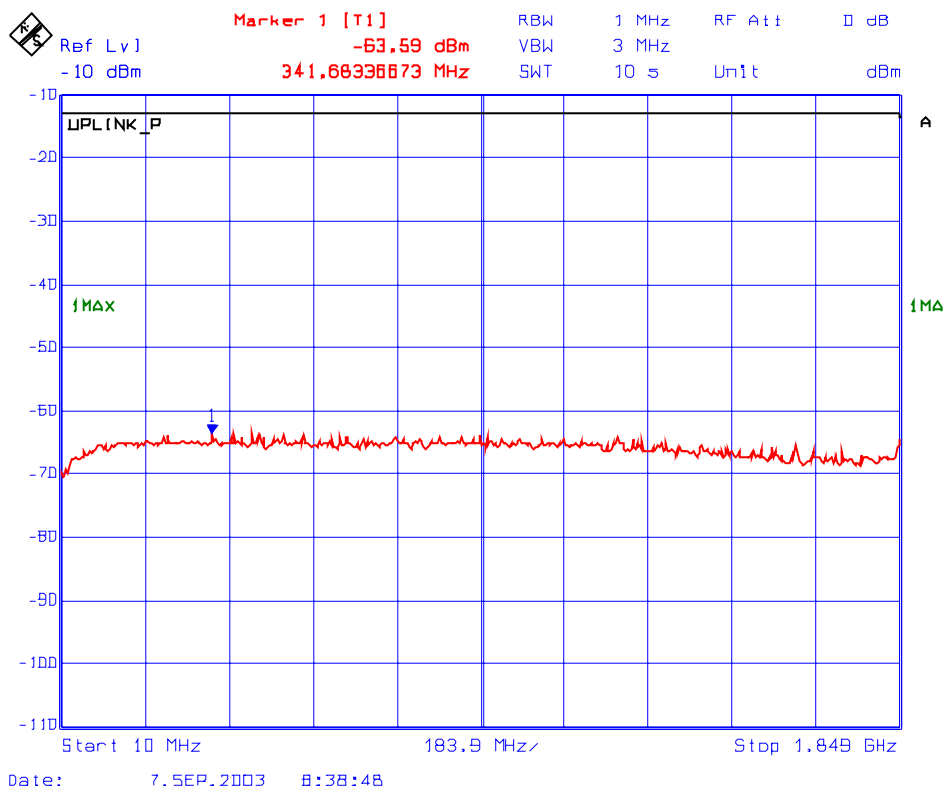


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 38 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1880 MHz, Modulation: TDMA

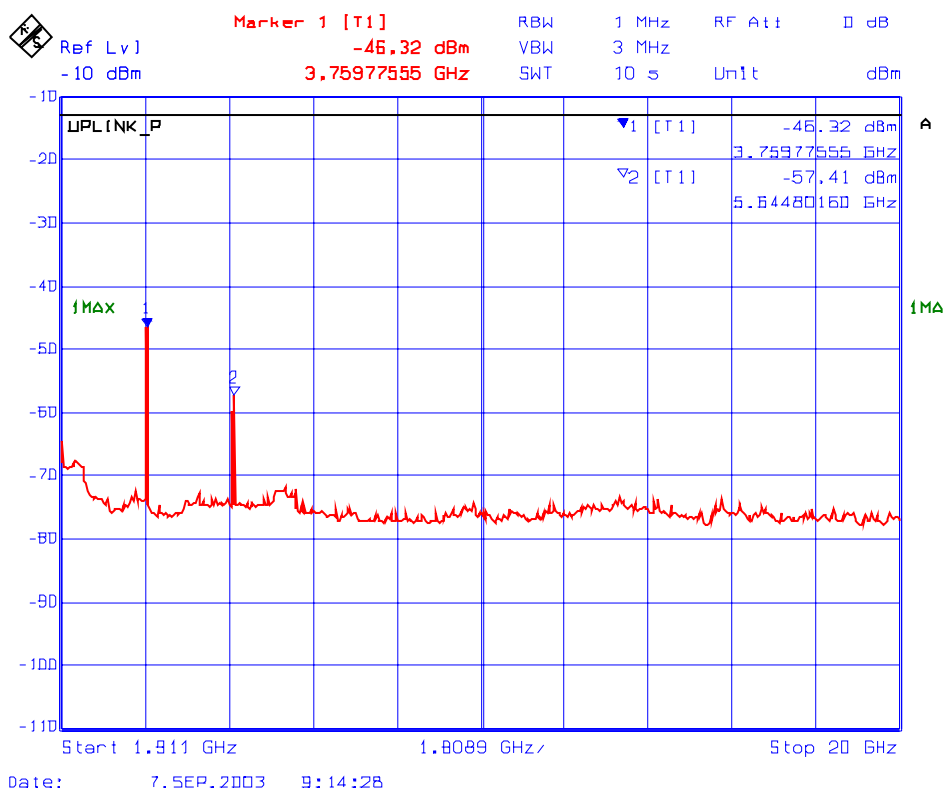


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 39 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1909 MHz, Modulation: TDMA

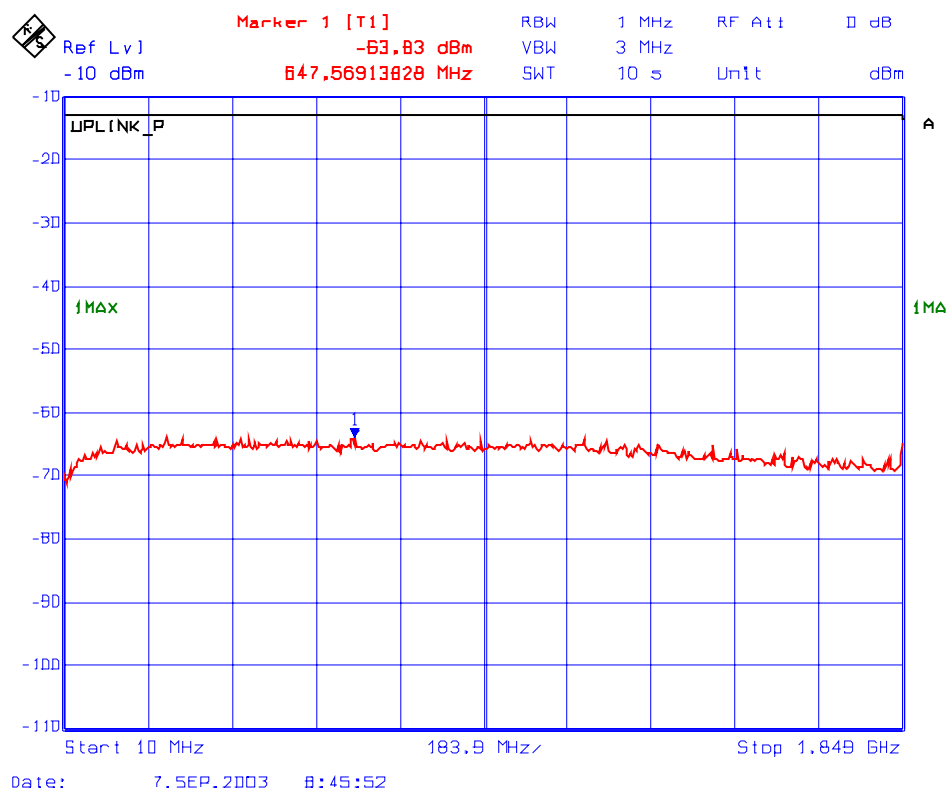


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 40 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1909 MHz, Modulation: TDMA

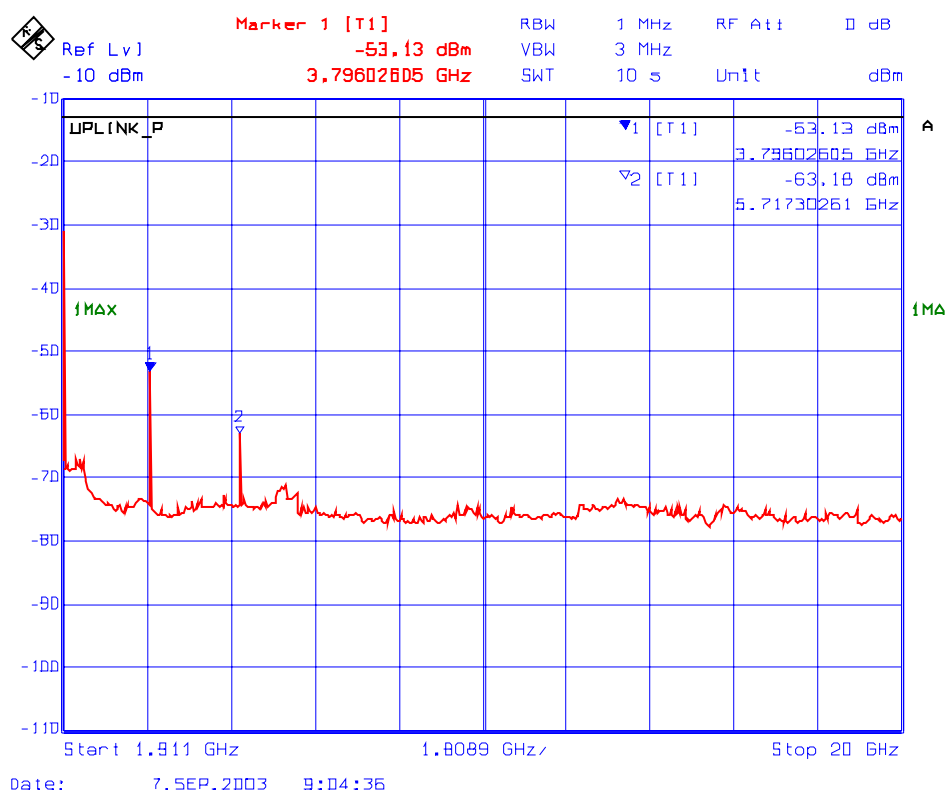

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.5.4.7. Uplink Band 1850 - 1910 MHz: Test Frequency: 1851 MHz, Modulation: GSM

Fundamental Frequency: 1851 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm as maximum rated by the manufacturer					
Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-60.6	-47.0	-0.6	-46.4	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 41-42 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					


5.8.5.4.8. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: GSM

Fundamental Frequency: 1880 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -9.0 dBm as maximum rated by the manufacturer					
Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-51.1	-42.1	4.0	-46.1	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 43-44 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.9. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: GSM

Fundamental Frequency: 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.1 dBm as maximum rated by the manufacturer					
Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 - 20000	-60.2	-47.1	-0.1	-47.0	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and no RF spurious emissions less than 40 dB below the limits were found. Refer to Plots # 45-46 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 41 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1851 MHz, Modulation: GSM

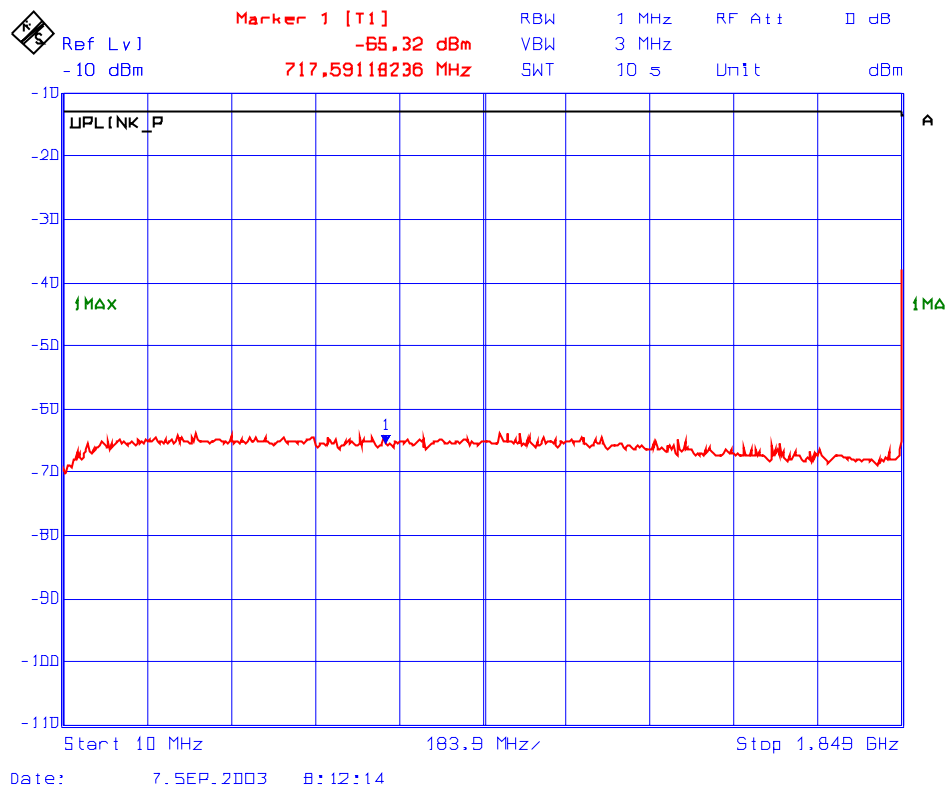


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 42 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1851 MHz, Modulation: GSM

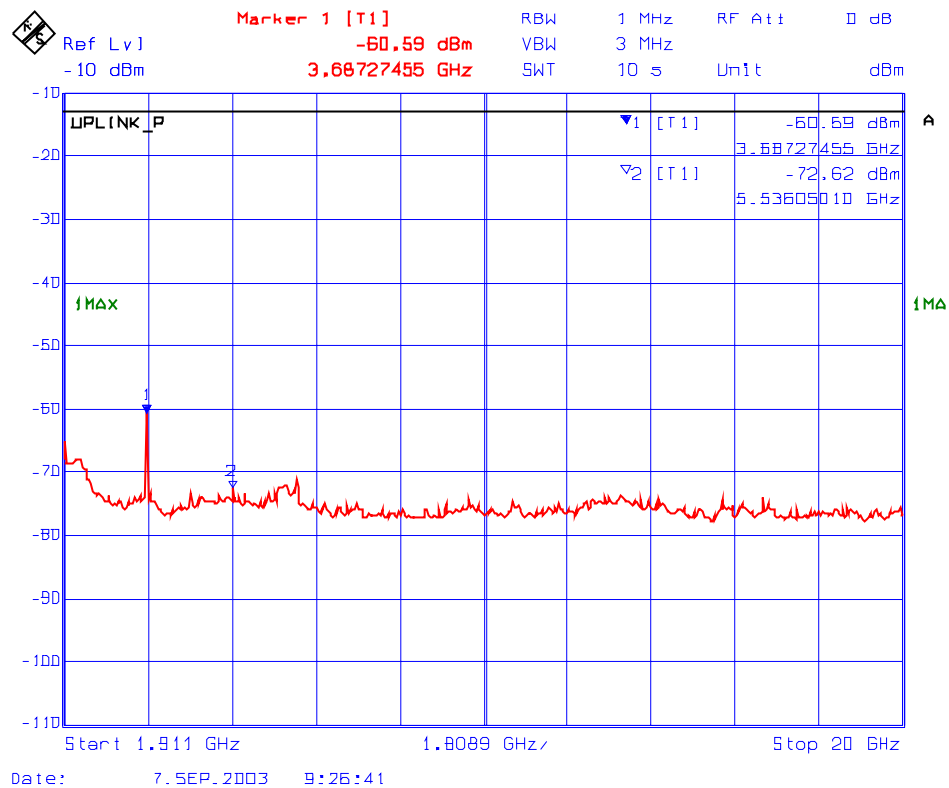


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 43 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1880 MHz, Modulation: GSM

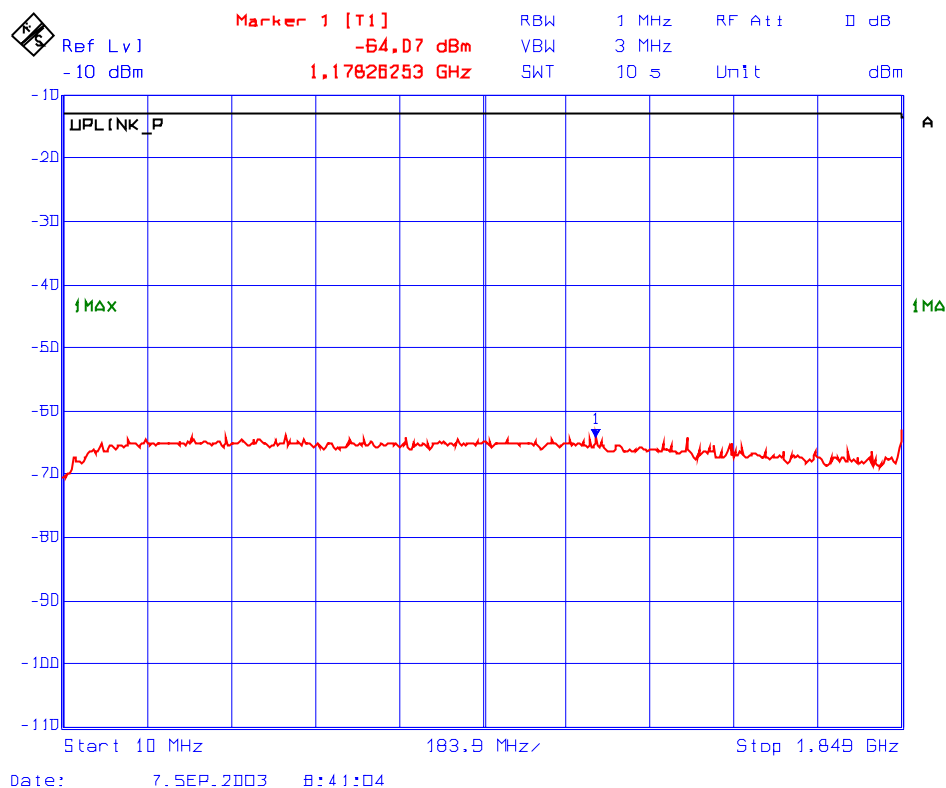


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 44 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1880 MHz, Modulation: GSM

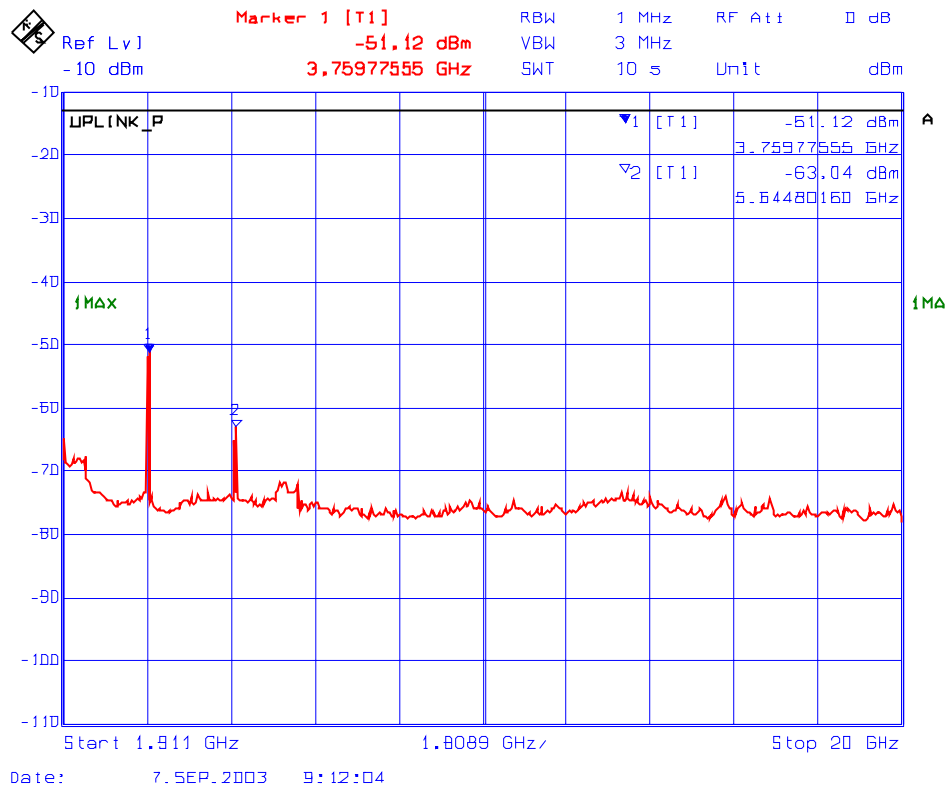


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 45 : Transmitter Conducted Emissions Outside the Permitted Band
Frequency: 1909 MHz, Modulation: GSM

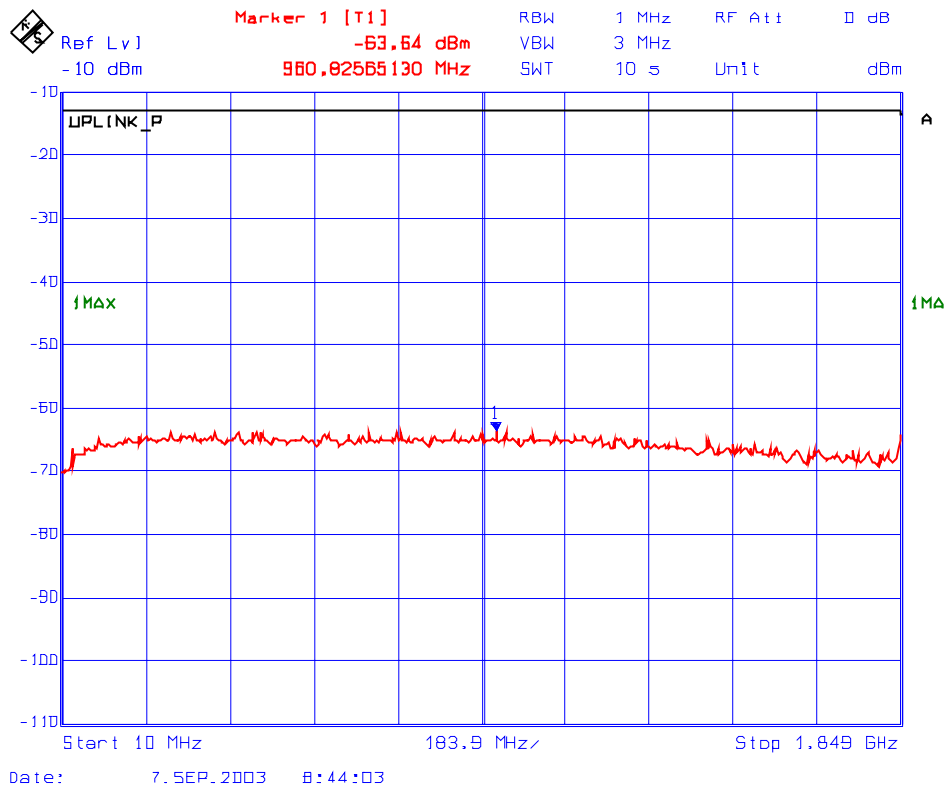


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 46 : Transmitter Conducted Emissions Outside the Permitted Band
 Frequency: 1909 MHz, Modulation: GSM

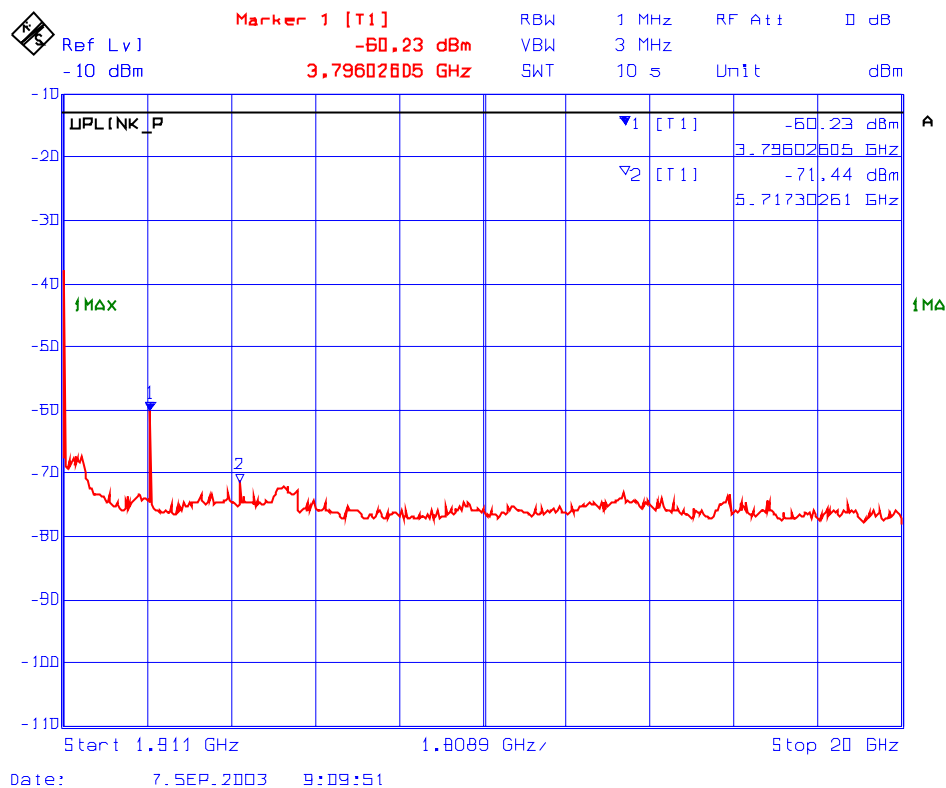

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.5.4.10. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1851 & 1851.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1851 & 1851.2 MHz					
RF Input Power: -40.0 dBm as maximum rated total power by the manufacturer					
RF Output Power: -18.8 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1851 & 1851.2	-18.8	--	--	--	--
3695.39	-65.6	-46.8	-5.8	-41.0	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 47 – 48 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.11. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1851, 1851.2 & 1851.4 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1851, 1851.2 & 1851.4 MHz					
RF Input Power: -40.0 dBm as maximum rated total power by the manufacturer					
RF Output Power: -18.2 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1851, 1851.2 & 1851.4	-18.2	--	--	--	--
3695.39	-68.2	-50.0	-5.2	-44.8	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 49 – 50 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 47 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1851 MHz, Fc + 200 kHz, Unmodulated

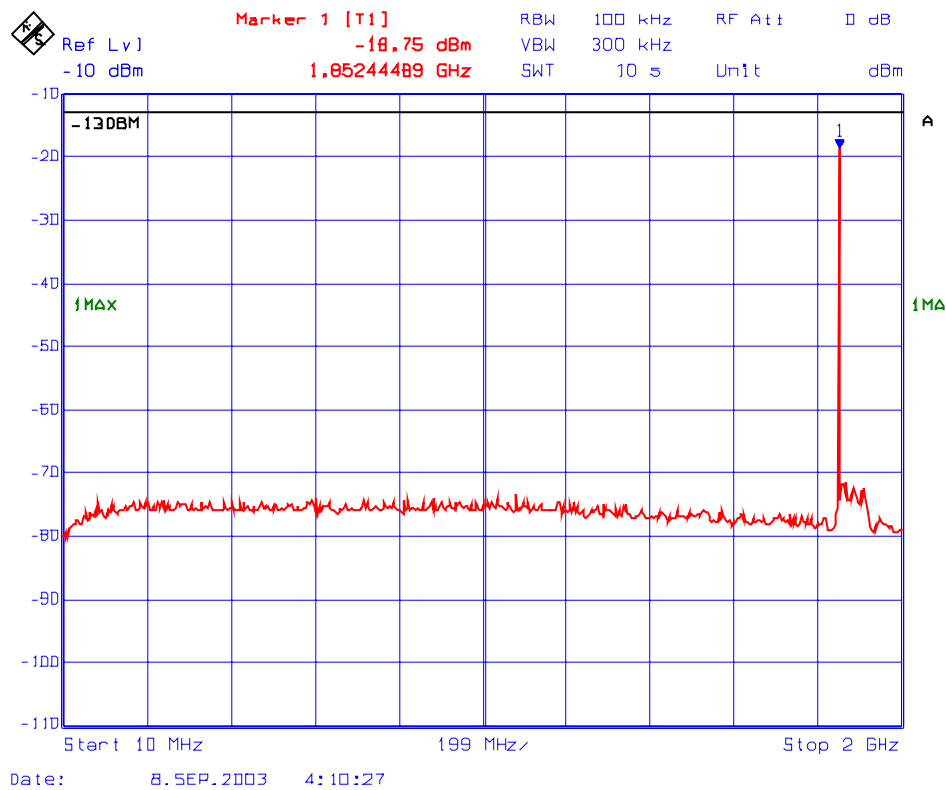


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 48 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1851 MHz, Fc + 200 kHz, Unmodulated

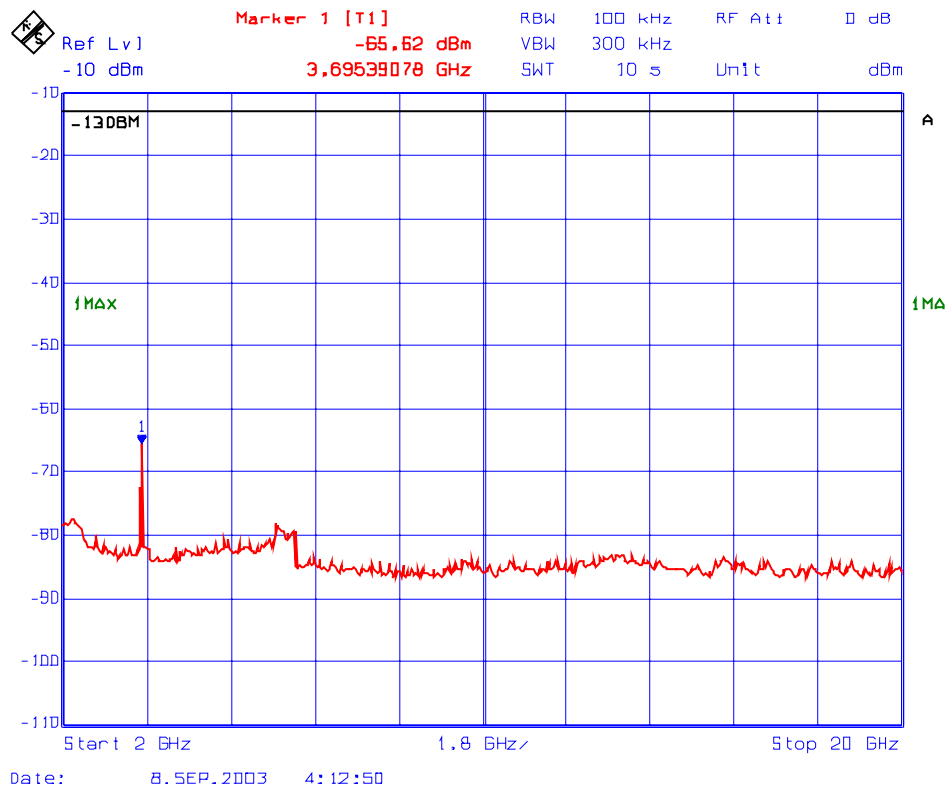


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 49 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1851 MHz, Fc + 200 kHz, Fc + 400kHz, Unmodulated

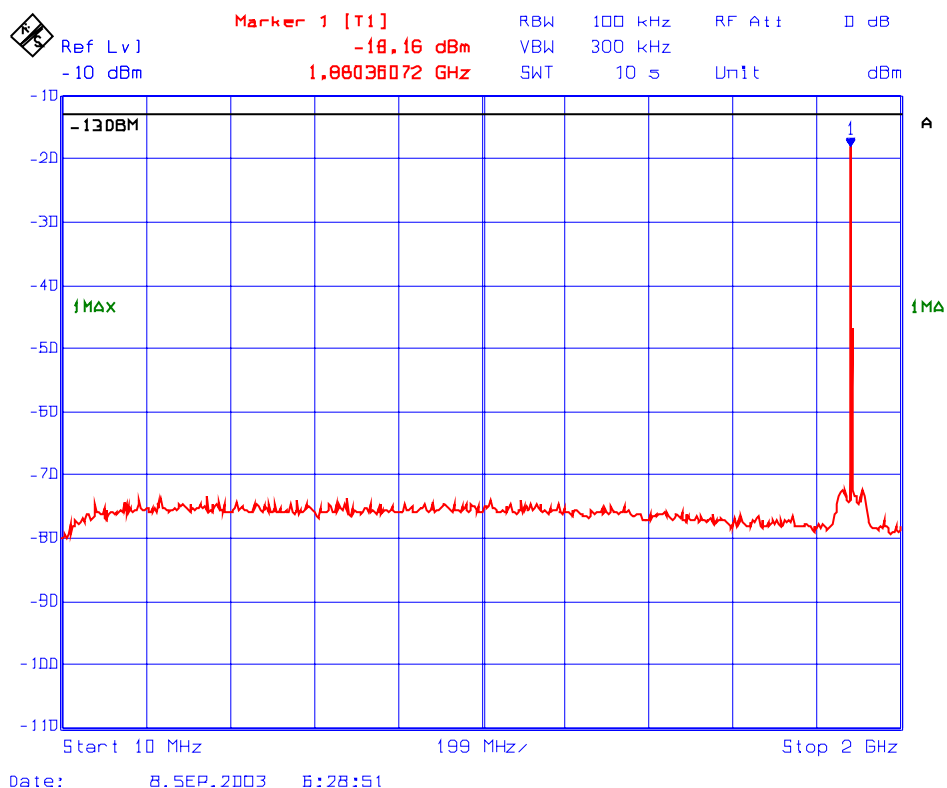


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 50 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1851 MHz, Fc + 200 kHz, Fc + 400kHz, Unmodulated

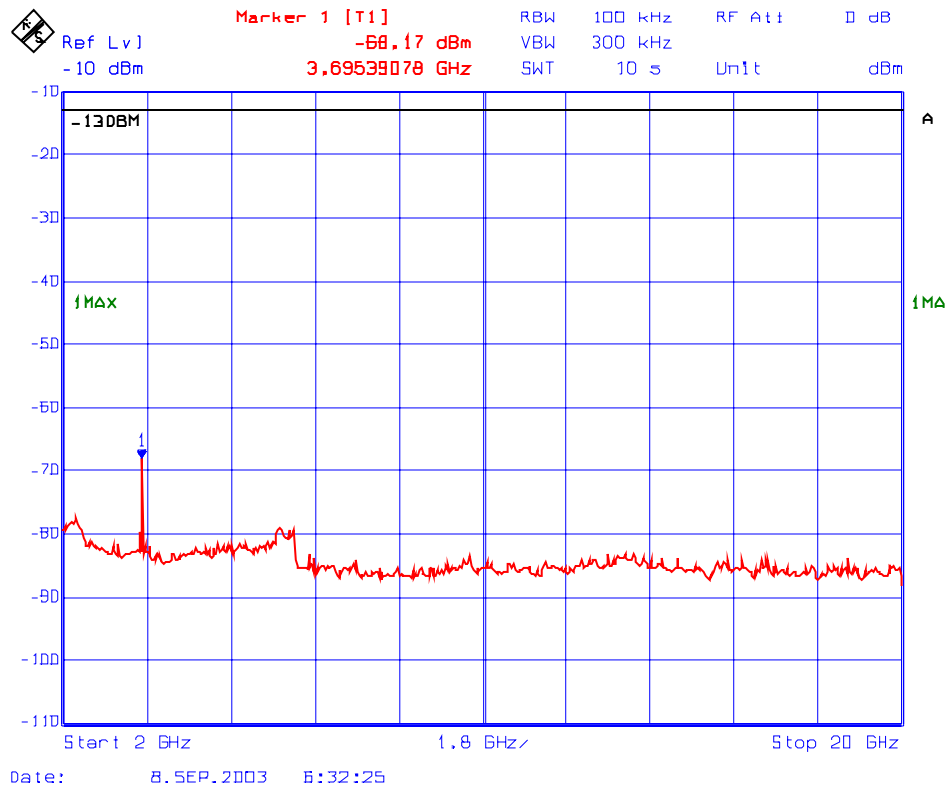

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.5.4.12. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1880 & 1880.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1880 & 1880.2 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -15.3 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1880 & 1880.2	-15.3	--	--	--	--
3732.00	-55.9	-40.6	-2.3	-38.3	PASS
5643.00	-70.5	-55.2	-2.3	-52.9	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 51 – 52 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.13. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1879.8, 1880 & 1880.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1879.8, 1880 & 1880.2 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -18.2 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1879.8, 1880 & 1880.2	-18.2	--	--	--	--
3732.00	-58.9	-40.7	-5.2	-35.5	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 53-54 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 51 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1880 MHz, Fc + 200 kHz, Unmodulated

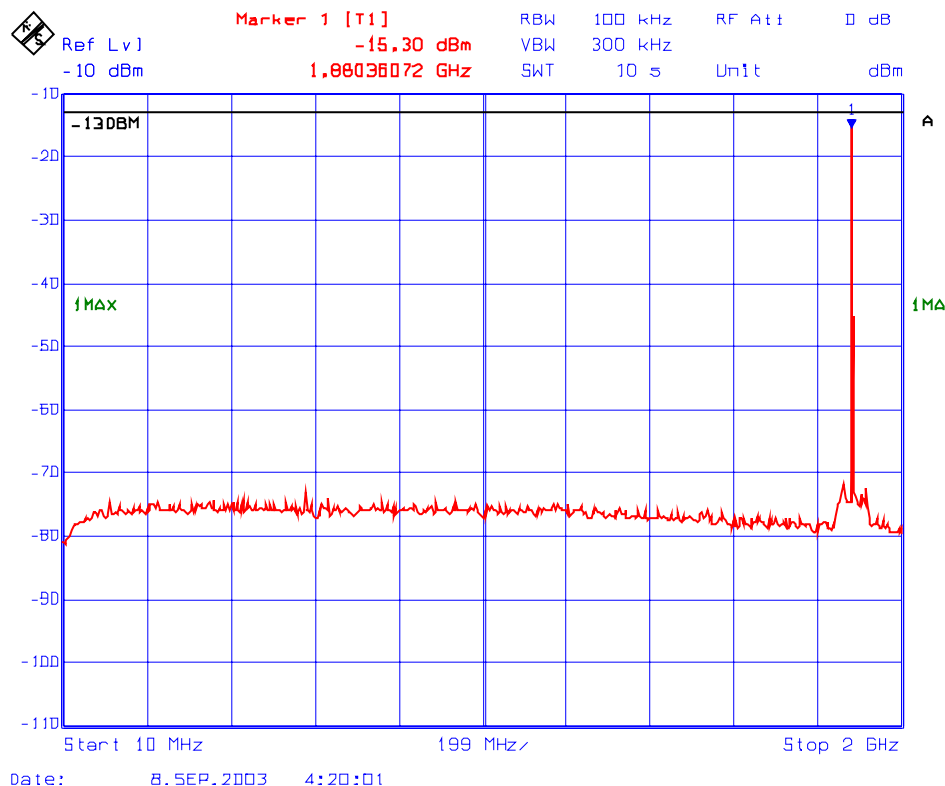


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 52 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
 In 1850 – 1910 MHz Band
 Fc: 1880 MHz, Fc + 200 kHz, Unmodulated

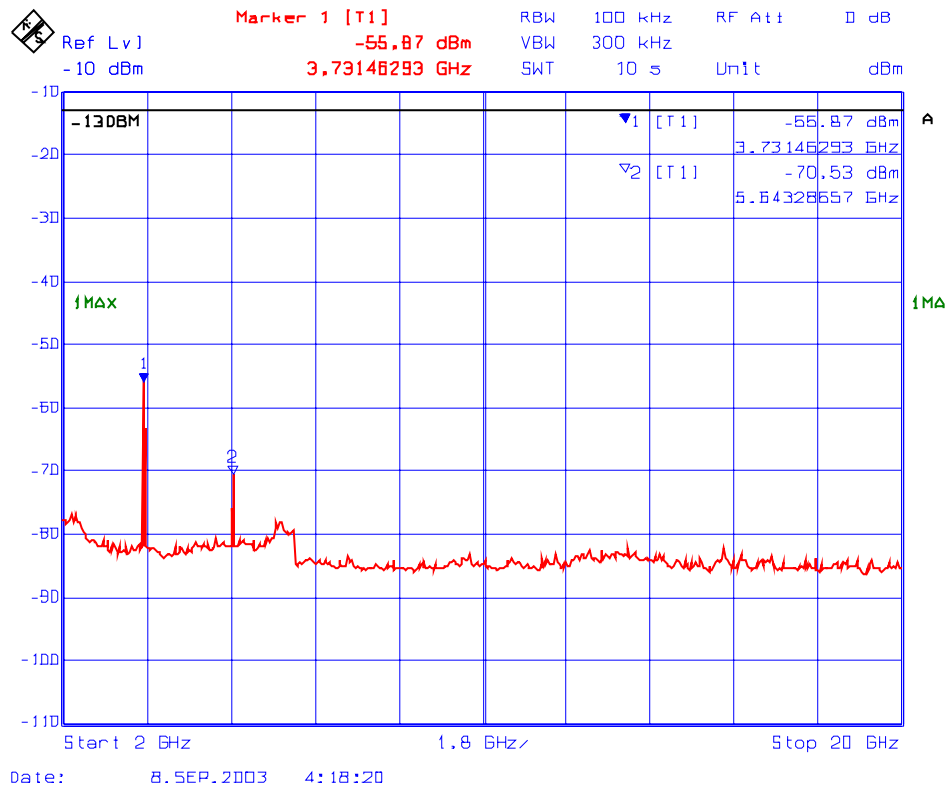


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 53 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1880 MHz, Fc - 200 kHz, Fc + 200kHz, Unmodulated

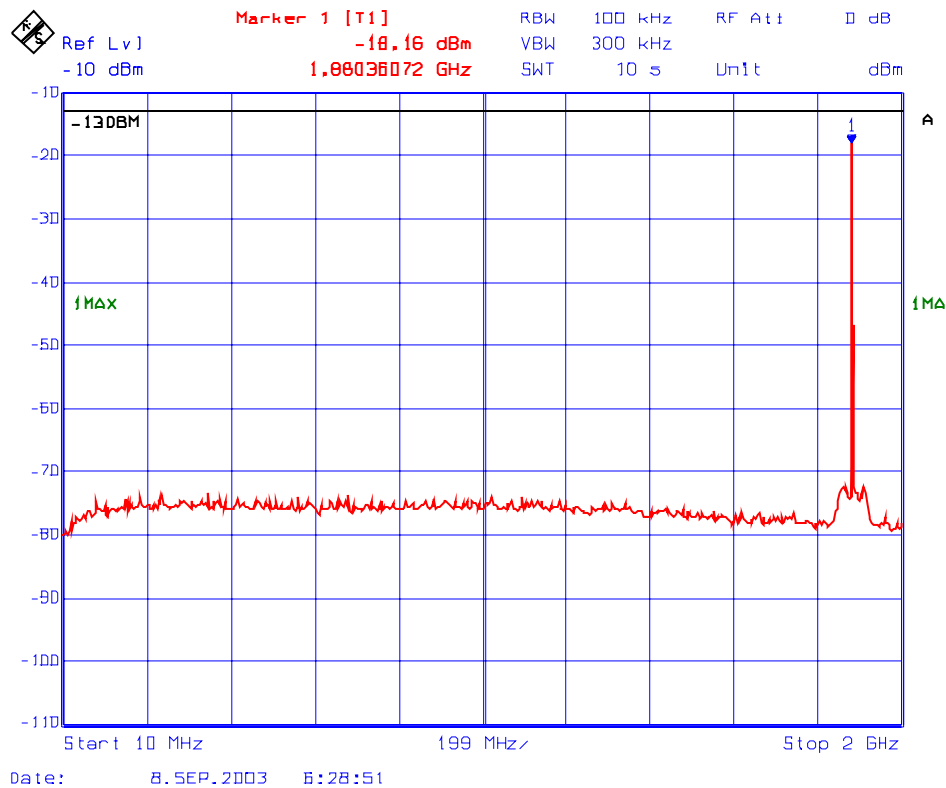


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 54 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1880 MHz, Fc - 200 kHz, Fc + 200kHz, Unmodulated

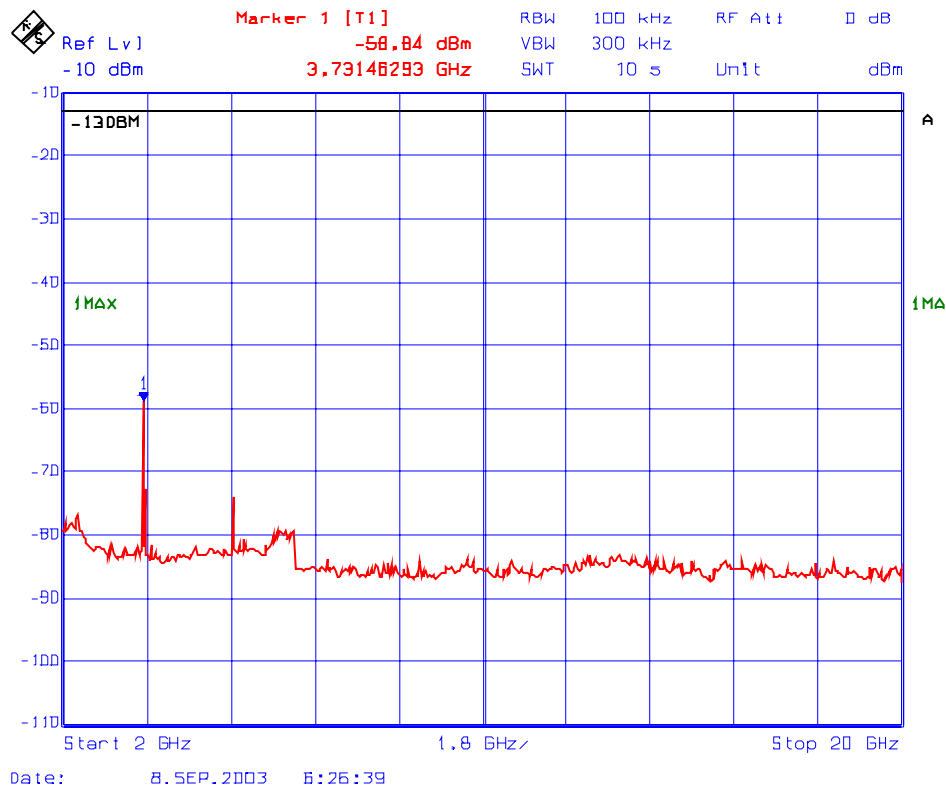

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.5.4.14. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1908.8 & 1909 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1908.8 & 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -18.2 dBm as maximum rated by the manufacturer					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1908.8 & 1909	-18.2	--	--	--	--
3804.00	-66.8	-48.6	-5.2	-43.5	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 55 – 56 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

5.8.5.4.15. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1908.6, 1908.8 & 1909.0 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1908.6, 1908.8 & 1909.0 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -21.0 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER CONDUCTED ANTENNA EMISSIONS		LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
1908.6, 1908.8 & 1909.0	-21.0	--	--	--	--
3804.00	-67.5	-46.5	-8.0	-38.5	PASS
<ul style="list-style-type: none"> The emissions were scanned from 10 MHz to 20 GHz and all RF spurious emissions less than 50 dB below the limits were recorded. Refer to Plots # 57 – 58 for Spurious emissions outside the Permitted Band 1850-1910 MHz. 					

Plot # 55 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1909 MHz, Fc - 200 kHz, Unmodulated

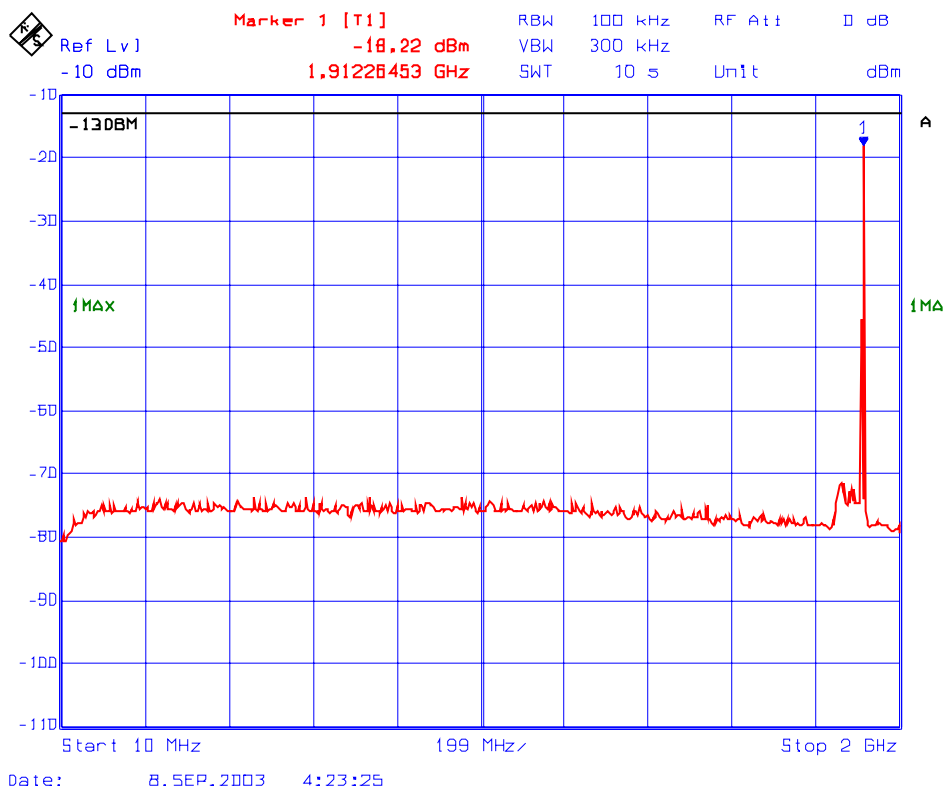


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 56 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1909 MHz, Fc - 200 kHz, Unmodulated

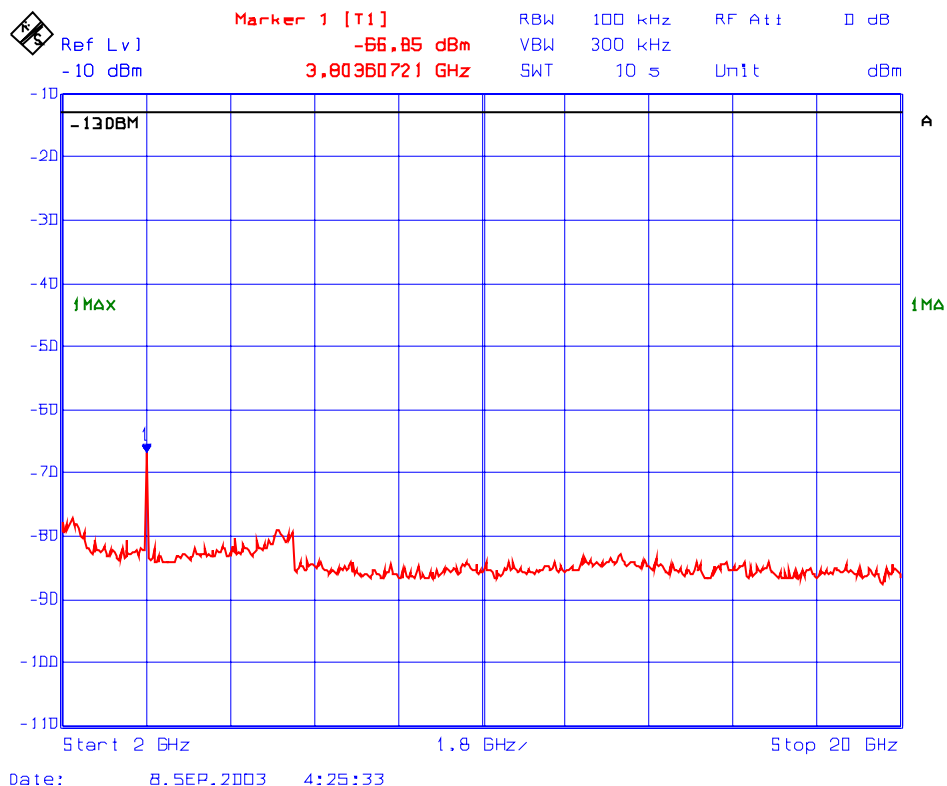


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 57 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1909 MHz, Fc - 200 kHz, Fc - 400kHz, Unmodulated

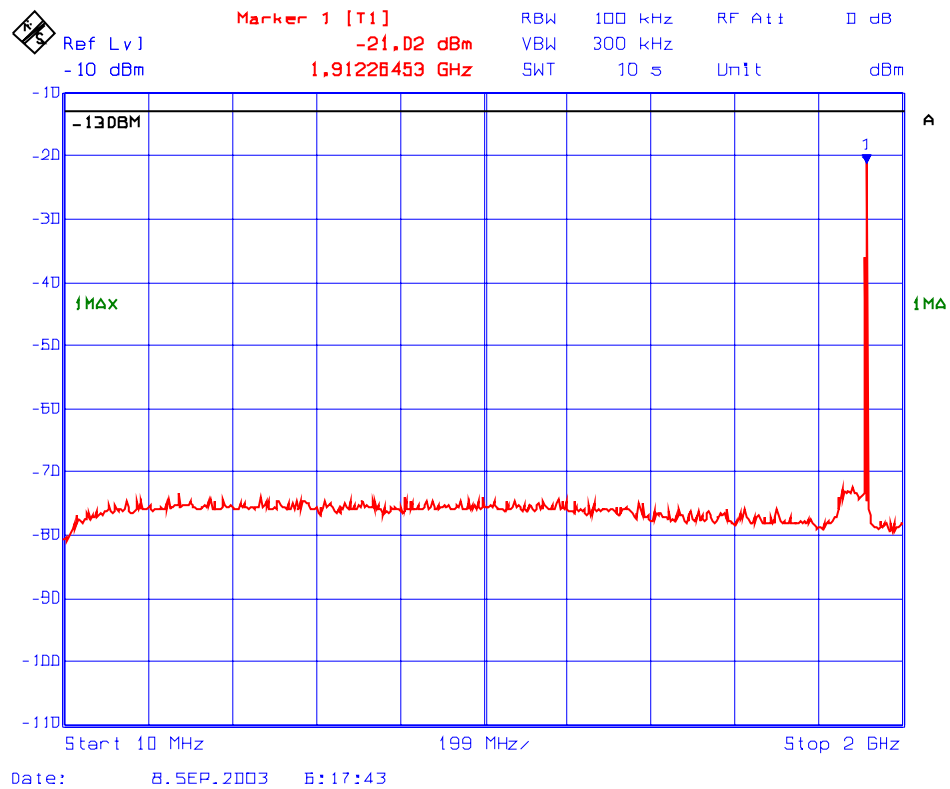


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 58 : Transmitter Conducted Emissions (Multiple Channel Inputs/Outputs)
In 1850 – 1910 MHz Band
Fc: 1909 MHz, Fc - 200 kHz, Fc - 400kHz, Unmodulated

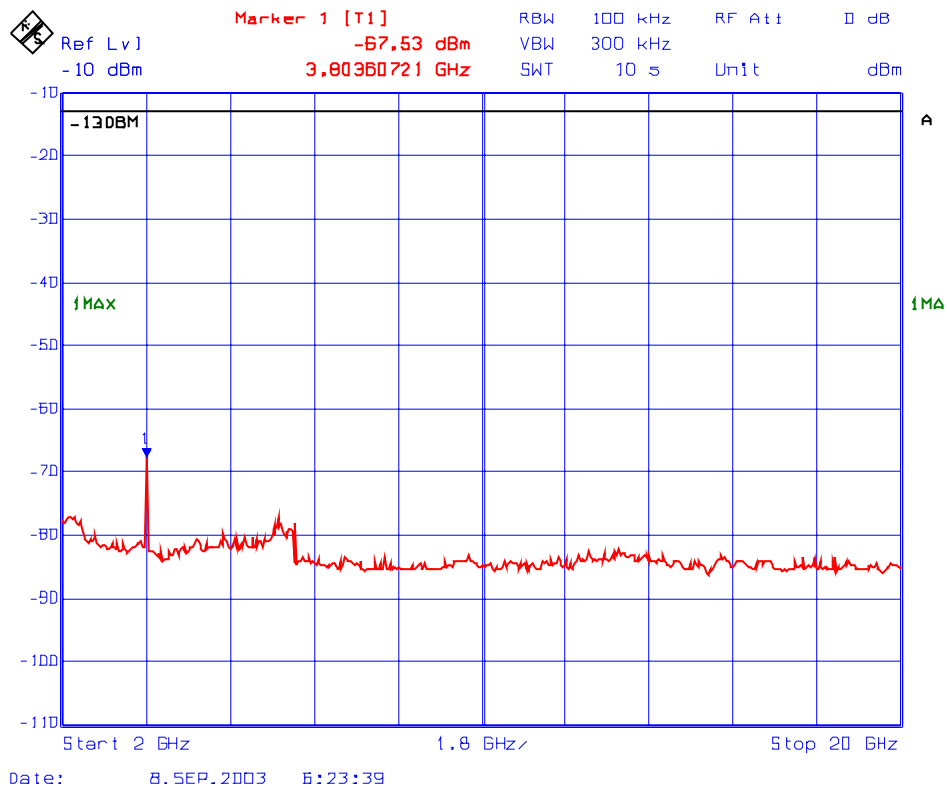


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 1, Lower Band-Edge Conducted Emissions
Frequency: 1851 MHz, Modulation: CDMA

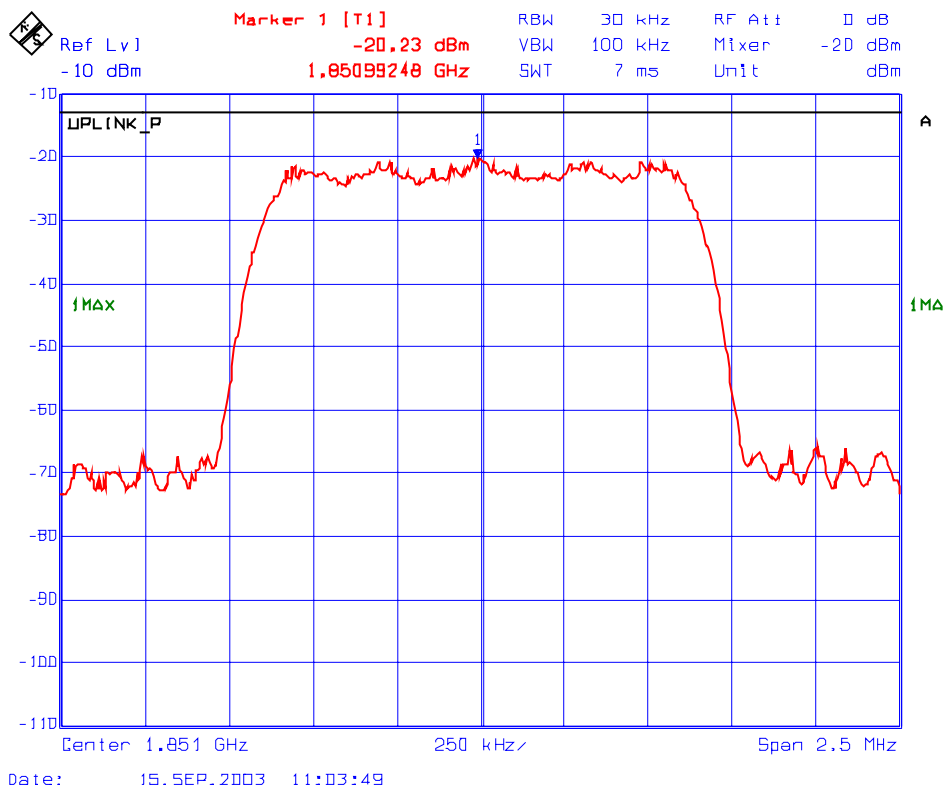


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 1, Upper Band-Edge Conducted Emissions
Frequency: 1865 MHz, Modulation: CDMA

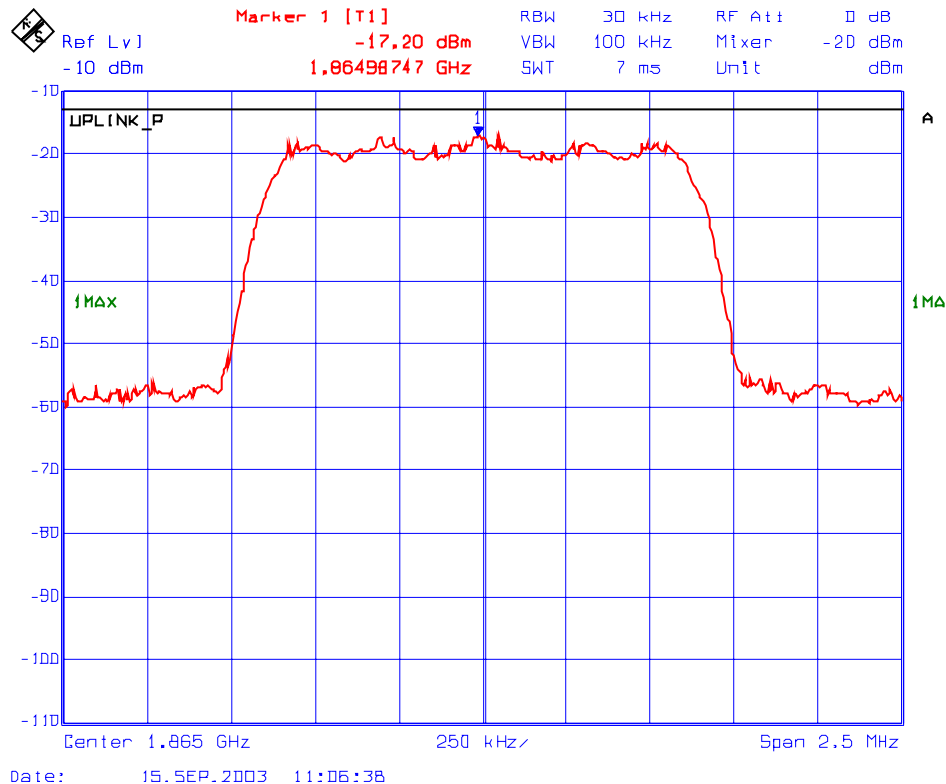


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 2, Lower Band-Edge Conducted Emissions
Frequency: 1865 MHz, Modulation: CDMA

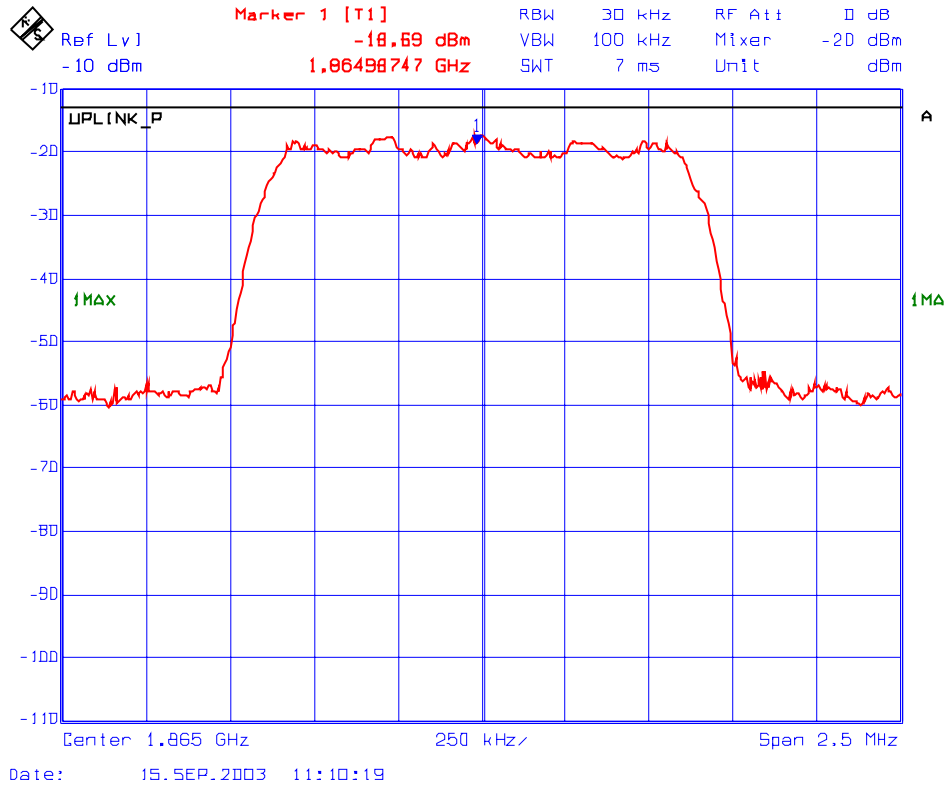


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 2, Upper Band-Edge Conducted Emissions
Frequency: 1870 MHz, Modulation: CDMA

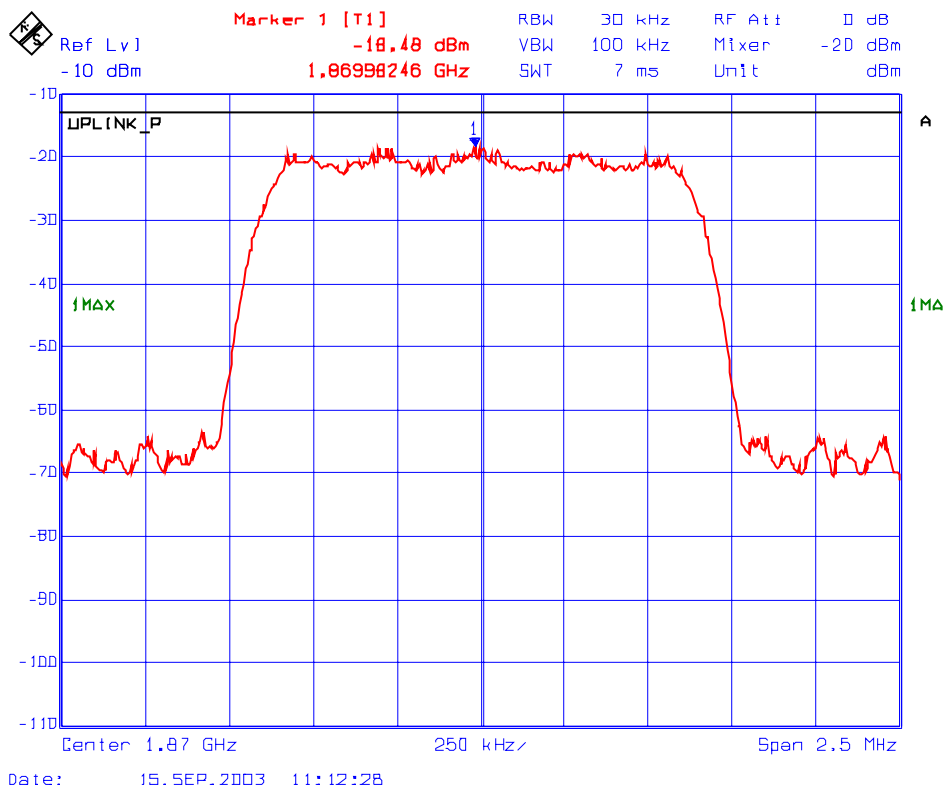


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 3, Lower Band-Edge Conducted Emissions
Frequency: 1870 MHz, Modulation: CDMA

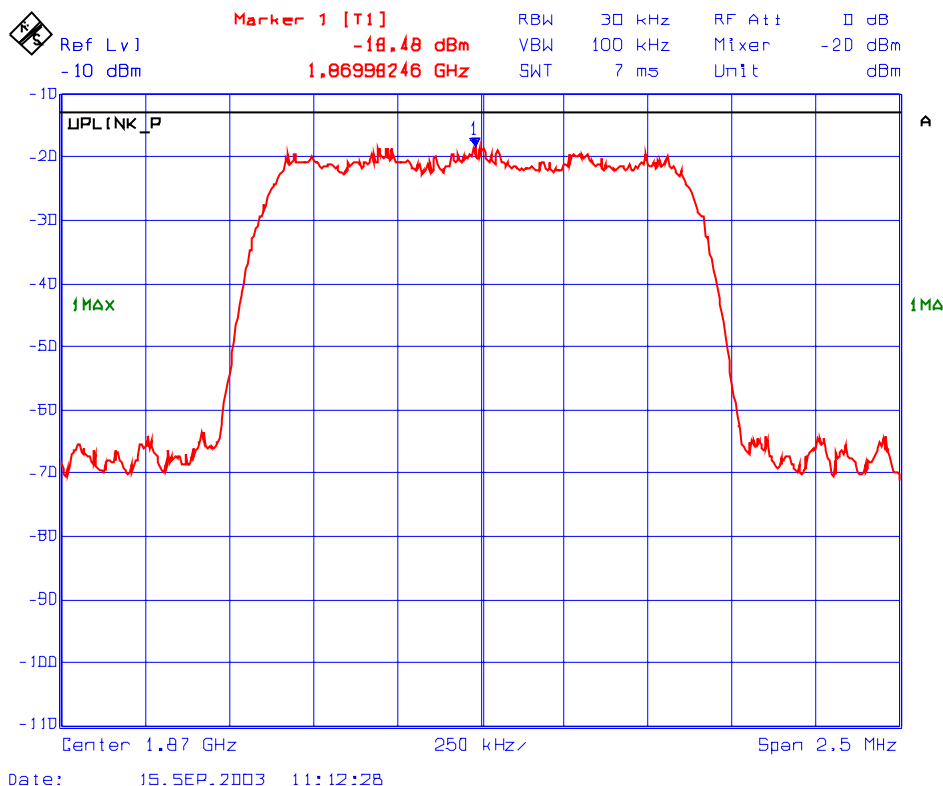


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 3, Upper Band-Edge Conducted Emissions
Frequency: 1885 MHz, Modulation: CDMA

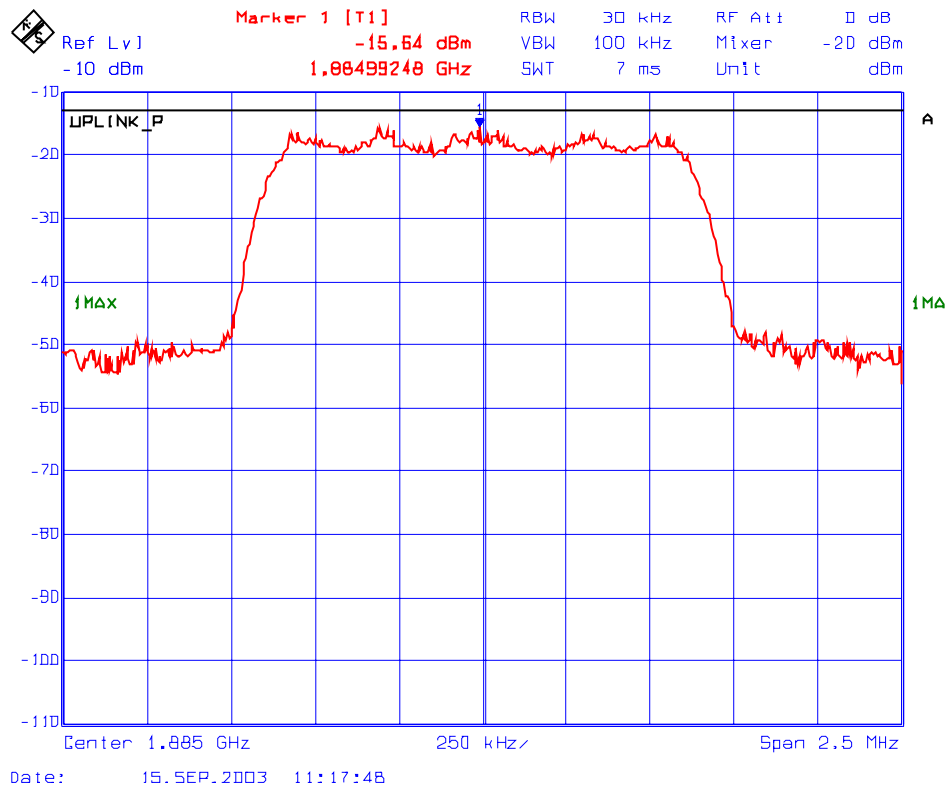


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 4, Lower Band-Edge Conducted Emissions
Frequency: 1885 MHz, Modulation: CDMA

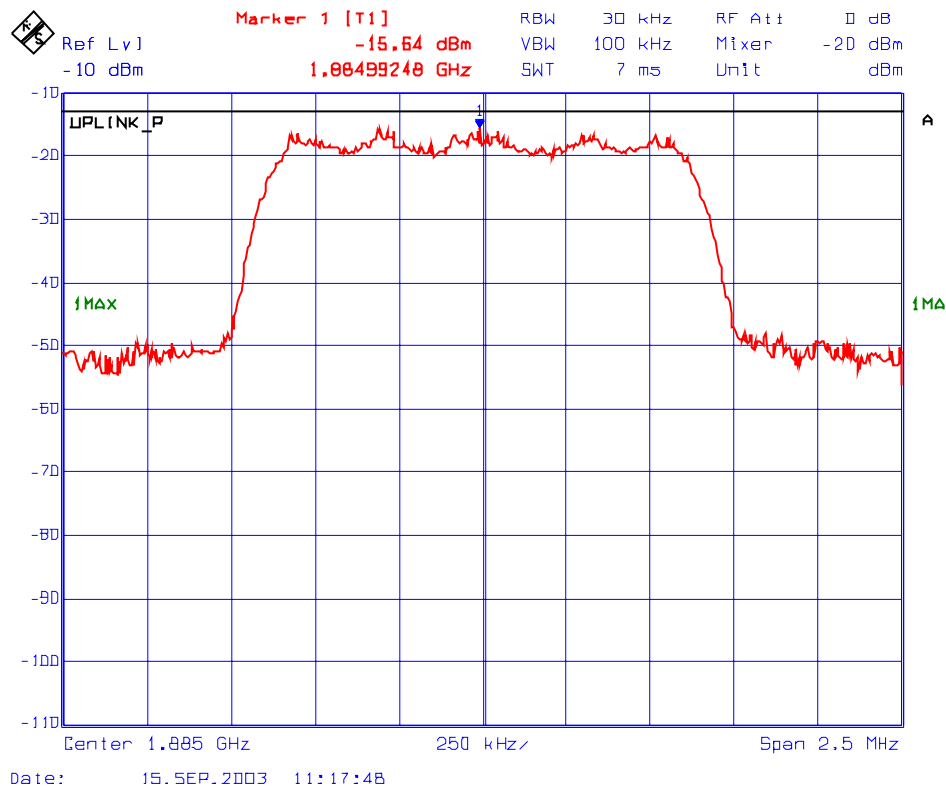


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 4, Upper Band-Edge Conducted Emissions
Frequency: 1890 MHz, Modulation: CDMA

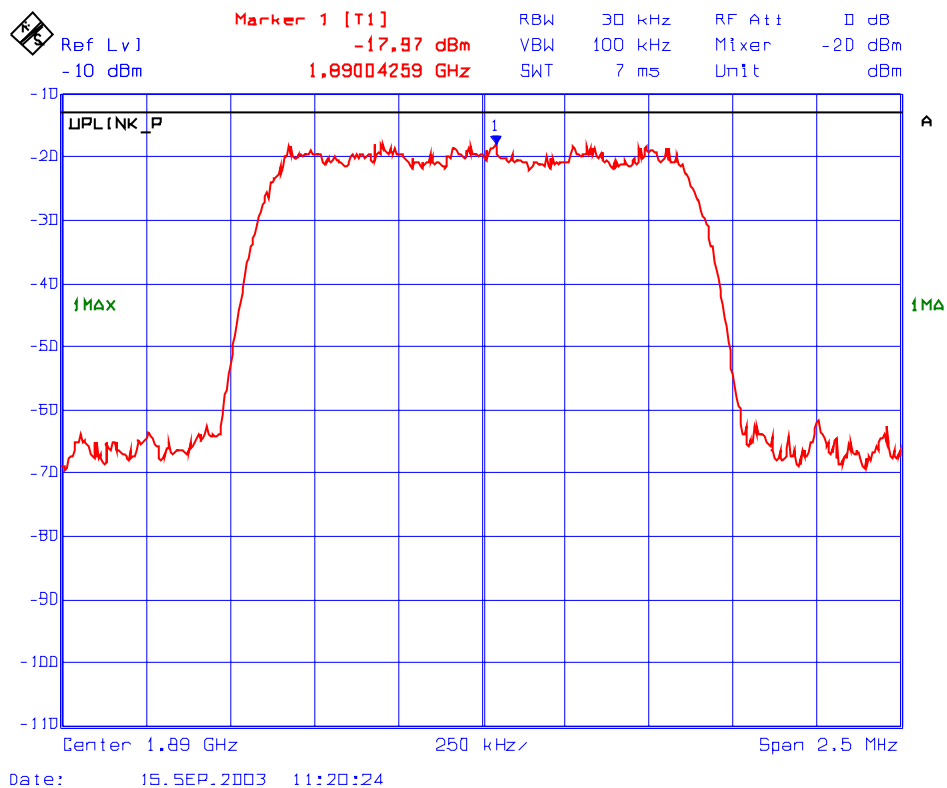


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 5, Lower Band-Edge Conducted Emissions
Frequency: 1890 MHz, Modulation: CDMA

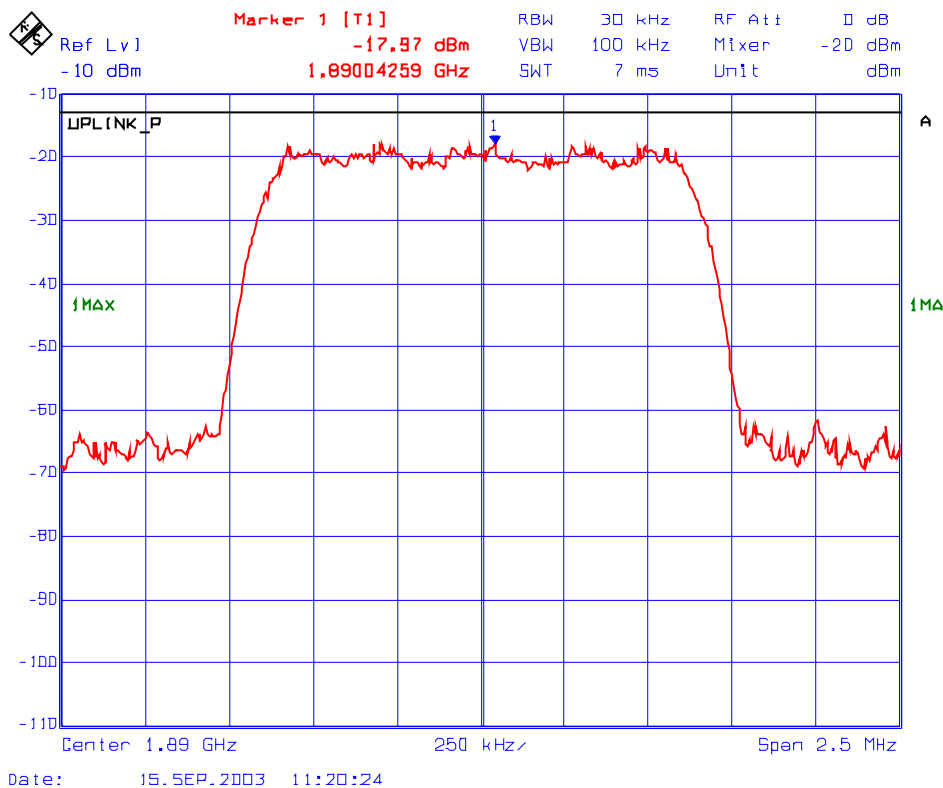


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 5, Upper Band-Edge Conducted Emissions
Frequency: 1895 MHz, Modulation: CDMA

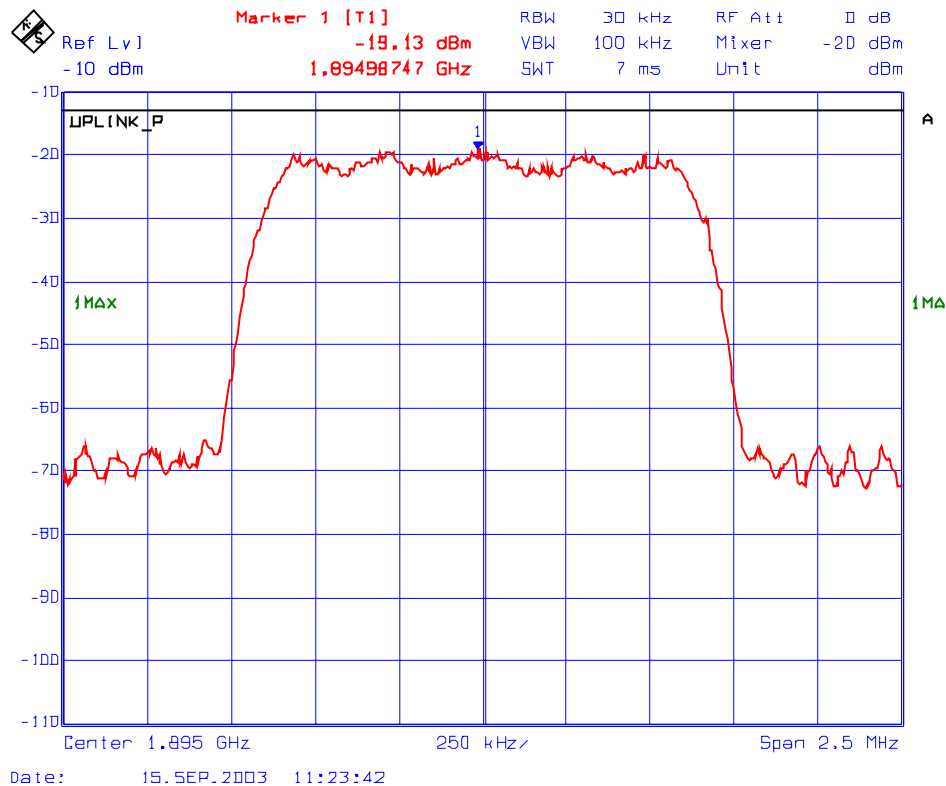


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 6, Lower Band-Edge Conducted Emissions
Frequency: 1895 MHz, Modulation: CDMA

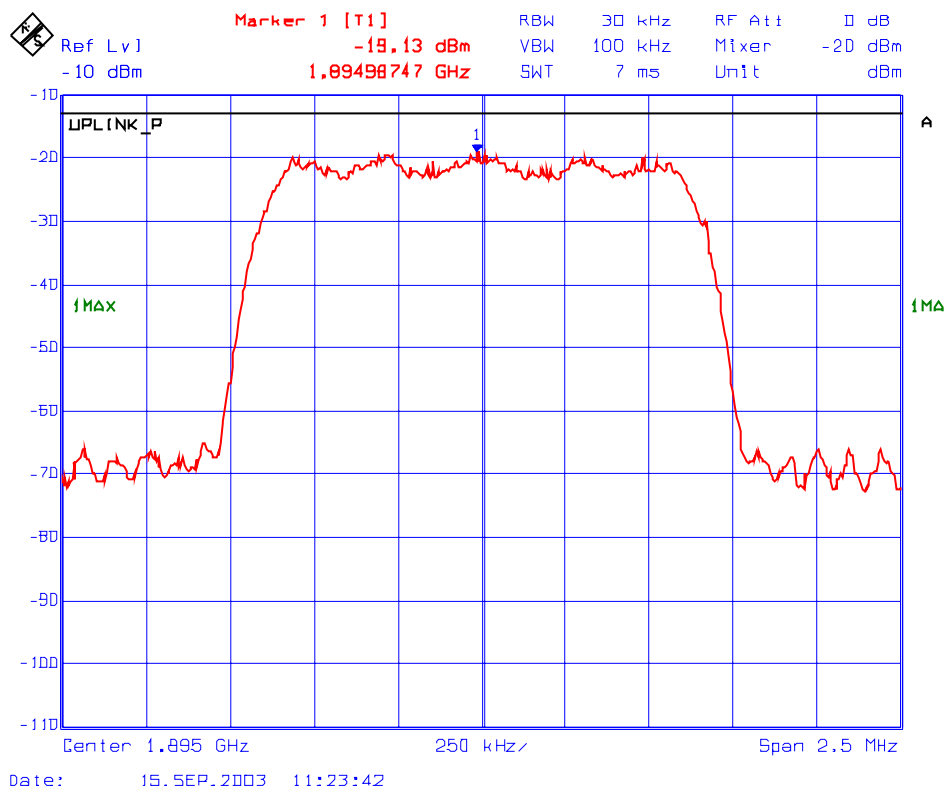


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Block 6, Upper Band-Edge Conducted Emissions
Frequency: 1910 MHz, Modulation: CDMA

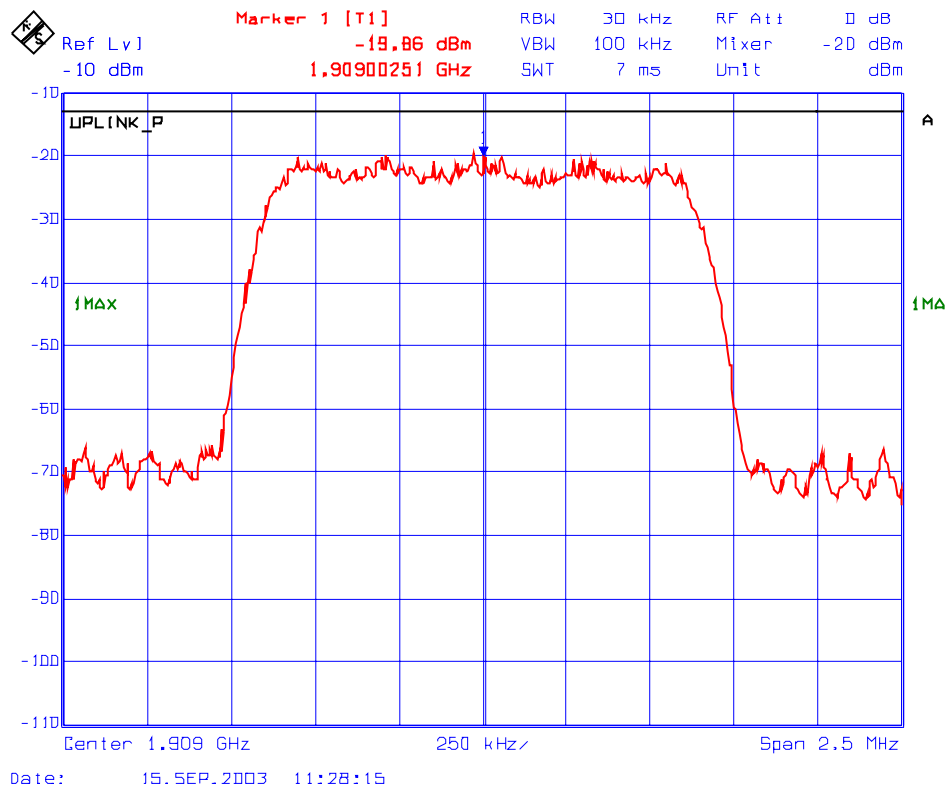

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KTI-027FCC24
Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9. EMISSION LIMITS (RADIATED) @ FCC 2.1049, 24.236 & 24.238

5.9.1. Limits

- The predicted or measured field strength at any location on the border of the PCS Service area shall not exceed 47 dBμV/m unless the parties agree to a higher field strength.
- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43+10log(P) dB.

5.9.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, § 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
 Lowest ERP of the carrier = EIRP – 2.15 dB = Pc + G - 2.15 dB = xxx dBm (conducted) + 0 dBi – 2.15 dB
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

$$\text{ERP of spurious/harmonic (dBc)} = \text{ERP of carrier (dBm)} - \text{ERP of spurious/harmonic emission (dBm)}$$

Measuring Bandwidths:

- Outside the permitted band block: RBW = 1 MHz, VBW ≥ RBW
- Inside or on the permitted band block: RBW = 1% of -26dBc Bandwidth, VBW ≥ RBW

5.9.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Hewlett Packard	HP 8546A	...	9 kHz to 5.6 GHz with built-in 30 dB Gain Pre-selector, QP, Average & Peak Detectors.
RF Amplifier	Com-Power	PA-102		1 MHz to 1 GHz, 30 dB gain nominal
Microwave Amplifier	Hewlett Packard	HP 83017A		1 GHz to 26.5 GHz, 30 dB nominal
Biconilog Antenna	EMCO	3142	10005	30 MHz to 2 GHz
Dipole Antenna	EMCO	3121C	8907-434	30 GHz – 1 GHz
Dipole Antenna	EMCO	3121C	8907-440	30 GHz – 1 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3155	9911-5955	1 GHz – 18 GHz
RF Signal Generator	Hewlett Packard	HP 83752B	3610A00457	0.01 – 20 GHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: KT1-027FCC24
 Sep. 08, 2003

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.4. Photographs of Test Setup

Please refer to Photos # 1 and 2 for detailed information of the test setup

5.9.5. Test Data

5.9.5.1.1. Uplink Band 1850 - 1910 MHz: Test Frequency: 1851 MHz, Modulation: CDMA

Fundamental Frequency: 1851 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.6	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.2. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: CDMA

Fundamental Frequency: 1880 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -9.0 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	4.0	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.3. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: CDMA

Fundamental Frequency: 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.1 dBm as maximum rated by the manufacturer					
Modulation: CDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.1	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.4. Uplink Band 1850 - 1910 MHz: Test Frequency: 1851 MHz, Modulation: TDMA

Fundamental Frequency: 1851 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.6	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.5. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: TDMA

Fundamental Frequency: 1880 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -9.0 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	4.0	***	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.6. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: TDMA

Fundamental Frequency: 1909 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.1 dBm as maximum rated by the manufacturer					
Modulation: TDMA					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.1	***	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.7. Uplink Band 1850 - 1910 MHz: 1851 MHz, Modulation: GSM

Fundamental Frequency: 1851 MHz RF Input Power: -40.0 dBm as maximum rated by the manufacturer RF Output Power: -13.6 dBm as maximum rated by the manufacturer Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.6	***	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.8. Uplink Band 1850 - 1910 MHz: Test Frequency: 1880 MHz, Modulation: GSM

Fundamental Frequency: 1880 MHz RF Input Power: -40.0 dBm as maximum rated by the manufacturer RF Output Power: -9.0 dBm as maximum rated by the manufacturer Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	4.0	***	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.9. Uplink Band 1850 - 1910 MHz: Test Frequency: 1909 MHz, Modulation: GSM

Fundamental Frequency: 1909 MHz RF Input Power: -40.0 dBm as maximum rated by the manufacturer RF Output Power: -13.1 dBm as maximum rated by the manufacturer Modulation: GSM					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-0.1	***	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.10. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1851 & 1851.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1851 & 1851.2 MHz					
RF Input Power: -40.0 dBm as maximum rated by the manufacturer					
RF Output Power: -13.6 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-30.0	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.11. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1851 & 1851.2, 1851.4 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1851 & 1851.2, 1851.4 MHz					
RF Input Power: -8.1 dBm as maximum rated by the manufacturer					
RF Output Power: 16.0 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-29.0	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.12. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1880 & 1880.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1880 & 1880.2 MHz					
RF Input Power: -12.2 dBm as maximum rated by the manufacturer					
RF Output Power: 17.0 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-30.0	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.13. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1959.8, 1880 & 1880 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1959.8, 1880 & 1880.2 MHz					
RF Input Power: -16.1 dBm as maximum rated by the manufacturer					
RF Output Power: -16.7 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-29.7	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.14. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1909 & 1909.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1909 & 1909.2 MHz					
RF Input Power: -9.0 dBm as maximum rated by the manufacturer					
RF Output Power: 17 dBm as maximum rated by the manufacturer					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-30.0	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

5.9.5.1.15. Uplink Band 1850 - 1910 MHz: Test Frequencies: 1988.8, 1909 & 1909.2 MHz, Modulation: unmodulated (for worst case)

Fundamental Frequencies: 1988.8, 1909 & 1909.2 MHz					
RF Input Power: -10.7 dBm as maximum rated by the manufacturer					
RF Output Power: 17.4 dBm					
Modulation: unmodulated					
FREQUENCY (MHz)	TRANSMITTER RADIATED EMISSIONS (ERP)		ERP LIMIT (dBc)	MARGIN (dB)	PASS/ FAIL
	(dBm)	(dBc)			
10 – 20000	**	**	-30.4	**	PASS
<ul style="list-style-type: none"> ** The emissions were scanned from 10 MHz to 20 GHz and no emissions less than 40 dB below the limits were found. 					

EXHIBIT 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY (\pm dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	± 1.0	± 1.0
Cable Loss Calibration	Normal (k=2)	± 0.3	± 0.5
EMI Receiver specification	Rectangular	± 1.5	± 1.5
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	± 2.0	± 0.5
Antenna phase center variation	Rectangular	0.0	± 0.2
Antenna factor frequency interpolation	Rectangular	± 0.25	± 0.25
Measurement distance variation	Rectangular	± 0.6	± 0.4
Site imperfections	Rectangular	± 2.0	± 2.0
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi) 0.3 (Lp)$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	± 0.5
System repeatability	Std. Deviation	± 0.5	± 0.5
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

EXHIBIT 7. MEASUREMENT METHODS

7.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

$$\{ X = 1 \text{ for continuous transmission } \Rightarrow 10\log(1/x) = 0 \text{ dB} \}$$

Figure 1.

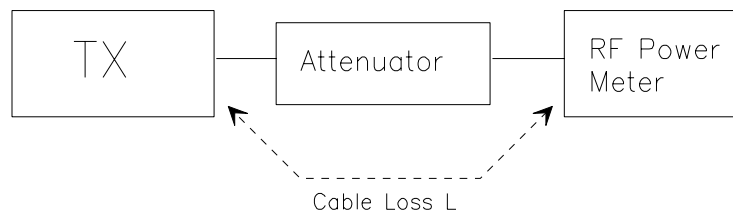

7.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

7.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full RF output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (f) Set the EMI Receiver #1 and #2 as follows:

Center Frequency:	test frequency
Resolution BW:	100 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

7.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 10 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.:

Figure 2


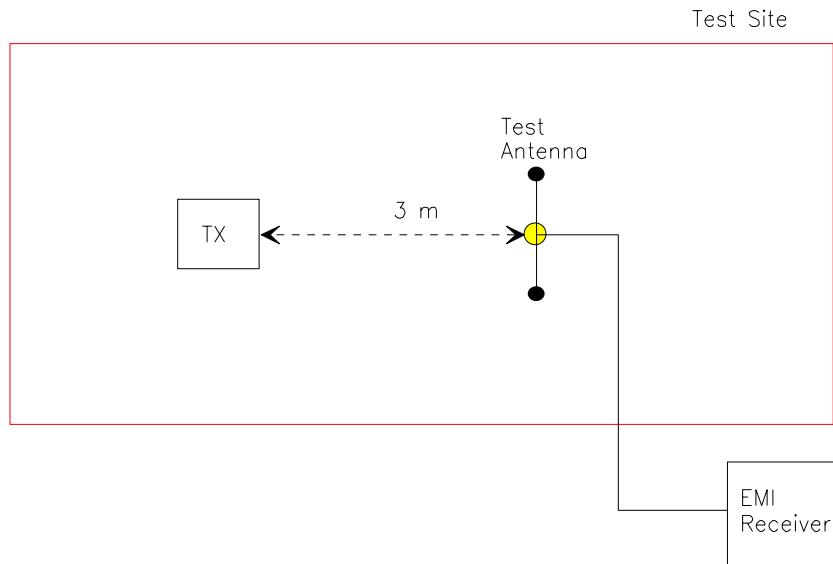


Figure 3

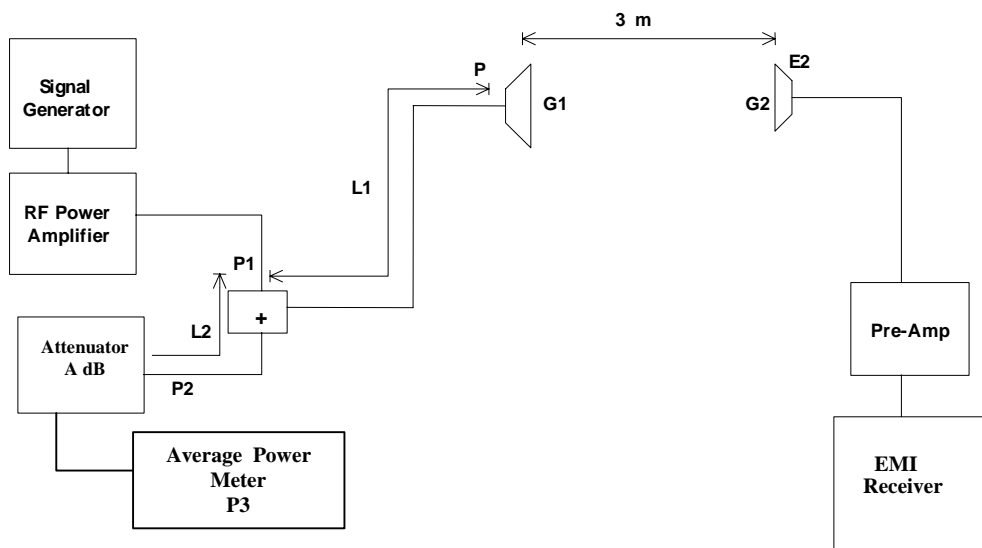

7.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

7.4. SPURIOUS EMISSIONS & OCCUPIED BANDWIDTH (CONDUCTED)

The transmitter's output was connected to the EMI receiver's input through an attenuator. The spurious and harmonic emissions were measured with the EMI Receiver controls set as follows:

- Outside the permitted band block: $RBW = 1 \text{ MHz}$, $VBW \geq RBW$
- Inside or on the permitted band block: $RBW = 1\% \text{ of } -26\text{dBc Bandwidth}$, $VBW \geq RBW$

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.