

**Annex 1 - 20 dB Bandwidth of the Amplifier Bandpass**  
Kaval RF Fiber Interface Module, Model US800C

**Photo # 10**  
FCC ID: H6M-US800C

20 dB BW of the 869 – 894 MHz band pass gain  
RF Input: -11.64 dBm @ 881.5 MHz setting  
Tracking from 831 – 931 MHz  
(1) Low: 861 MHz, High: 902 MHz

**MAX. GAIN: 27.67 DB**  
*HP*

MARKER  
902.0 MHz  
-5.65 dBm


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 902.0 MHz  
-5.65 dBm

No user  
Menu

REF OFFST 10.6 dB  
LOG REF 25.0 dBm

10  
dB/  
ATN  
30 dB

VA SB  
SC FC  
CORR

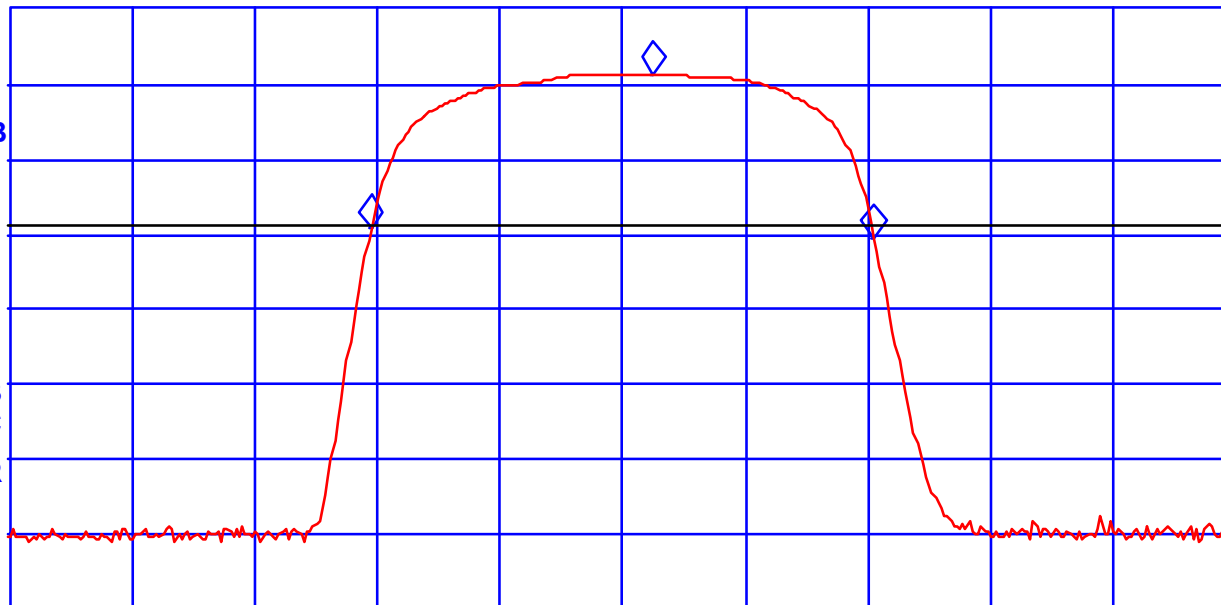

START 831.5 MHz

#IF BW 100 kHz

#AVG BW 300 kHz

STOP 931.5 MHz

SWP 30.0 msec