

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com



Test Report

Product Name: 2 WATT VHF AUTOMATIC METER READER

FCC ID: H78KPMT150W

Applicant:

**KP ELECTRONIC SYSTEMS LTD.
P.O. BOX 42
TEFEN INDUSTRIAL PARK
TEFEN, 24959
ISRAEL**

Date Receipt: SEPTEMBER 29, 2004

Date Tested: OCTOBER 12, 2004

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

COVER PAGE

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

APPLICANT: KP ELECTRONIC SYSTEMS LTD.

FCC ID: H78KPMT150W

TABLE OF CONTENTS LIST

TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED
	RF POWER OUTPUT
	AUDIO FREQUENCY RESPONSE
	AUDIO LOW PASS FILTER
PAGE 3-5.....	OCCUPIED BANDWIDTH
PAGE 6.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
	METHOD OF MEASURING SPURIOUS EMISSIONS AT
	ANTENNA TERMINALS
PAGE 7.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 8.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 9.....	FREQUENCY STABILITY
PAGE 10-12.....	TRANSIENT FREQUENCY STABILITY
PAGE 13.....	EQUIPMENT LIST

EXHIBITS CONTAINING:

CONFIDENTIALITY LETTER
BLOCK DIAGRAM
SCHEMATIC
PARTS LIST
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
TUNING PROCEDURE
OPERATIONAL DESCRIPTION
TEST SET UP PHOTOGRAPH

APPLICANT: KP ELECTRONICS SYSTEMS LTD.

FCC ID: H78KPMT150W

REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

GENERAL INFORMATION REQUIRED FOR CERTIFICATION OF A LICENSED TRANSMITTER

2.1033(c)(1)(2) KP ELECTRONIC SYSTEMS LTD. will manufacture the FCCID: H78KPMT150W VHF TRANSCEIVER in quantity, for use under FCC RULES PART 90.

KP ELECTRONIC SYSTEMS LTD.
P.O. BOX 42
TEFEN INDUSTRIAL PARK
TEFEN, 24959 ISRAEL

2.1033(c) **TECHNICAL DESCRIPTION**

2.1033(c)(3) Instruction book. A draft copy of the instruction manual is included.

2.1033(c)(4) Type of Emission: 6K0F1D
90.209
90.207
Bn = 2M + 2DK
M = 4800
D = 600
Bn = 2(4800/2)+2(600) = 6.0k

2.1033(c)(5) Frequency Range: 173 - 174 MHz
90.209 (b)(5)

2.1033(c)(6)(7) Power Output shall not exceed 59 Watts into a 50 ohm resistive load. There are no user power controls.
90.205

2.1033(c)(8) DC Voltages and Current into Final Amplifier:
POWER INPUT:

FINAL AMPLIFIER ONLY

INPUT POWER: (12.5V)(0.58A) = 7.25 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included. The block diagram is included.

2.1033(c)(11) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description.

2.1033(c)(12) A photograph or drawing of the equipment identification label is included.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.

FCC ID: H78KPMT150W

REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

- 2.1033(c)(13) Photographs of the equipment of sufficient clarity to reveal equipment construction and layout and label location are included.
- 2.1033(c)(14) For equipment employing digital modulation, a detailed description of the modulation technique. This UUT uses FSK to modulate the transmitter.
- 2.1033(c)(15) The data required for 2.1046 through 2.1057 is submitted below.
- 2.1046(a) **RF POWER OUTPUT**

RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: 2 Watts

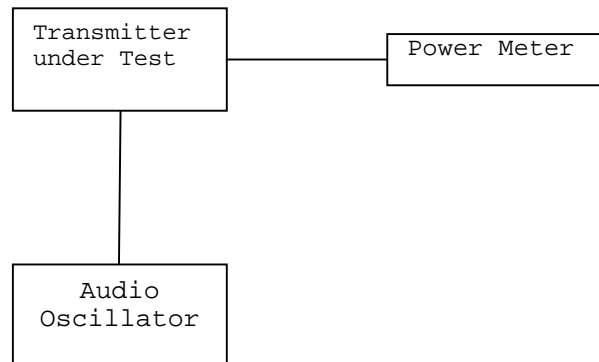

- 2.1047(a) **Voice modulation characteristics:**
This UUT does not have an audio frequency responses plot.
- 2.1049 **Audio Low Pass Filter**
This UUT does not have a low pass filter.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

- 2.1049 **Occupied bandwidth:**
2.1049(c) **EMISSION BANDWIDTH:**
- 90.210 (b) **25kHz Channel Spacing:**
Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + 10\log(P)$ dB.
- 90.210 (c) **12.5kHz Channel Spacing Not Equipped with a Low Pass Filter:**
For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(f_d/5)$ dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(f_d^2/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10 \log(P_o)$ dB.
- 90.210 (d) **Emission Mask D - 12.5 kHz channel BW equipment:**
For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
(1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
(2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com


- 90.210 (e) **Emission Mask E - 6.25 kHz channel BW equipment:**
For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
 - (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3.0 \text{ kHz})$ or $55 + 10 \text{ Log}(P)$ or 65, whichever is the lesser attenuation.
 - (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least $55 + 10\text{log}(P)$ dB or 65 dB, whichever is the lesser attenuation.

Test procedure: TIA/EIA-603 para 2.2.11.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

Occupied BW Test Equipment Setup

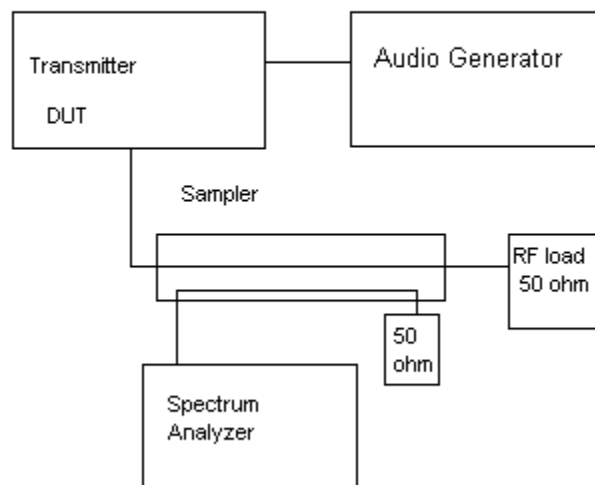

TIMCO ENGINEERING INC.


849 NW State Road 45
 Newberry, Florida 32669
 http://www.timcoengr.com
 888.472.2424 F 352.472.2030 email: tei@timcoengr.com

OCCUPIED BANDWIDTH PLOT

NOTES:

KP ELECTRONIC SYSTEMS LTD. - FCC ID: H78MT150WP
 OCCUPIED BANDWIDTH PLOT-4800 BAUD

FCC 90.210 Mask E

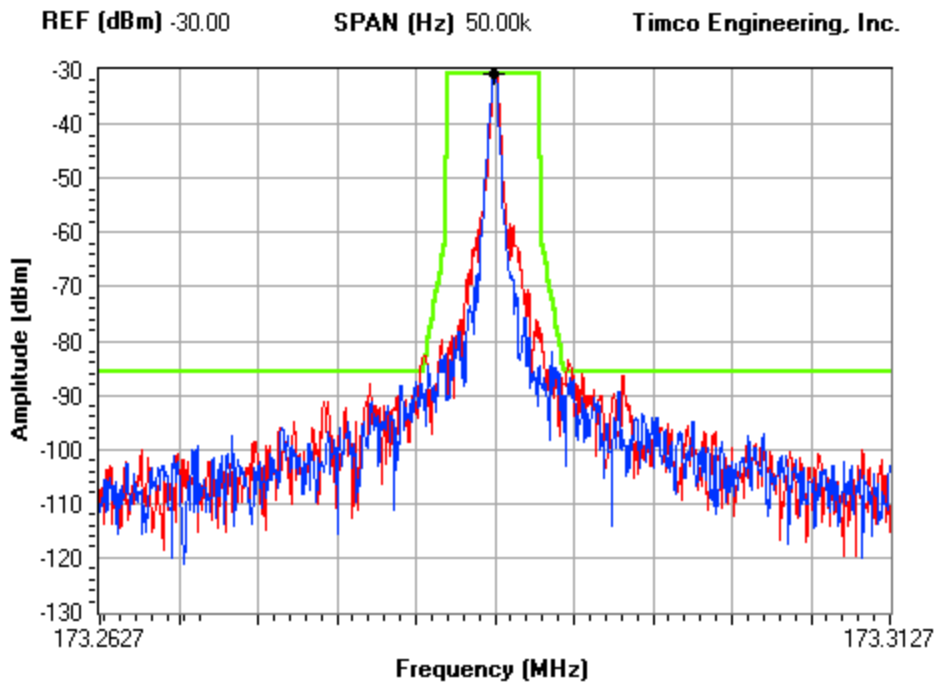

RBW 300 Hz **VBW** 300 Hz **ST (sec)** 1

Center Frequency (Hz) 173.288M

Marker Delta (Hz) 0.00

Peak	173.288	-30.70	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
MKR2	173.288	-85.20	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MKR3	173.268	-103.00	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hw/MK	23.076	6.27	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

APPLICANT: KP ELECTRONICS SYSTEMS LTD.

FCC ID: H78KPMT150W

REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1051(a) Spurious emissions at antenna terminals (conducted):

Data below shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.


FCC Limit for:

6.25 kHz Spacing = 58dB

TEST DATA:

TF HIGH POWER	EF	dB below carrier
173.28	173.28	0.0
	346.56	71.0
	519.84	76.3
	693.12	94.2
	866.40	84.9
	1039.68	80.6
	1212.96	72.8
	1386.24	80.6
	1559.52	79.8
	1732.80	81.2

Method of Measuring Conducted Spurious Emissions

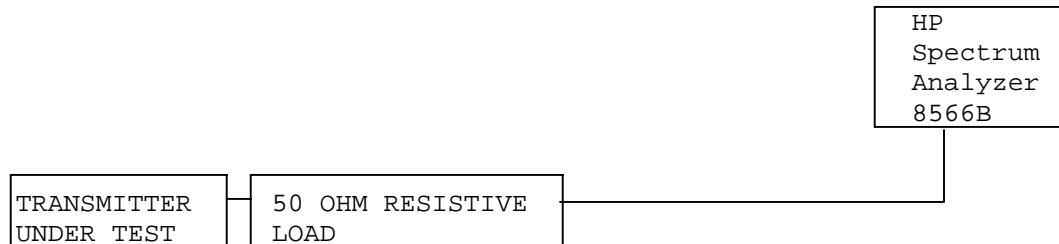

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.

FCC ID: H78KPMT150W

REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1053 **Field strength of spurious emissions:**

NAME OF TEST: **RADIATED SPURIOUS EMISSIONS**

REQUIREMENTS: The FCC Limits for radiated emissions are the same as previously stated for the conducted emissions.

TEST DATA:


Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
173.28	0	32.55	0	0	0
346.56	H	-48.60	0	-1.15	82.303
519.84	H	-33.30	0	-0.56	66.413
693.12	H	-35.40	0	0.13	67.823
866.40	V	-44.80	0	-0.79	78.143
1039.68	H	-39.40	1.01	3.13	69.833
1212.96	V	-36.40	1.04	3.82	66.173
1386.24	H	-37.30	1.08	4.52	66.413
1559.52	H	-45.20	1.11	4.99	73.873
1732.80	H	-48.80	1.15	5.09	77.413

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

Method of Measuring Radiated Spurious Emissions

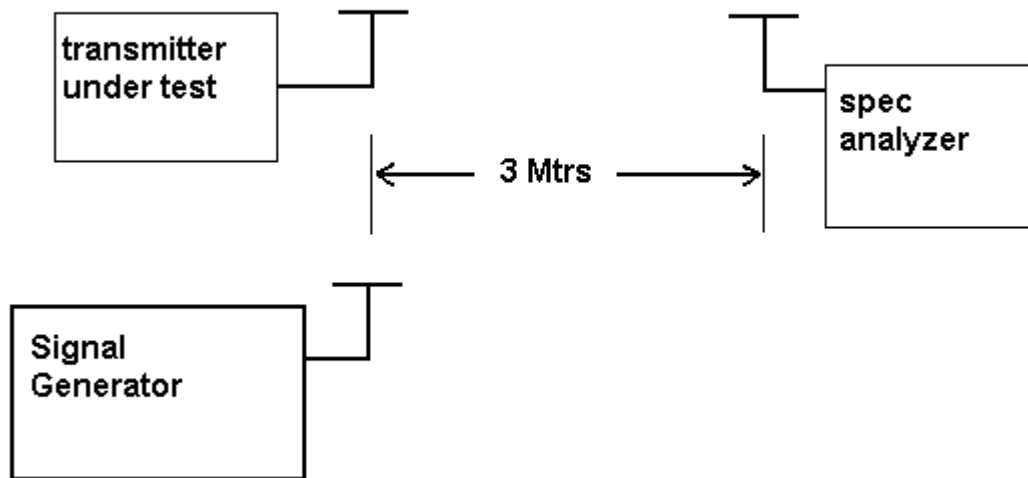

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1055 Frequency stability:
90.213(a)(1)
90.266(b)(3)

Frequency Stability Requirement:

Temperature range requirements: -30 to +50° C.

Voltage Variation - 15%.

Measurement procedure per TIA/EIA 603.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 173.287 533 MHz

<u>TEMPERATURE °C</u>	<u>FREQUENCY MHz</u>	<u>PPM</u>
REFERENCE	173.287 533	00.0
-30	173.287 617	+ 0.48
-20	173.287 624	+ 0.53
-10	173.287 644	+ 0.64
0	173.287 669	+ 0.78
+10	173.287 647	+ 0.66
+20	173.287 533	0.00
+30	173.287 472	- 0.35
+40	173.287 406	- 0.73
+50	173.287 362	- 0.99
<u>%BATT.</u>	<u>DATA</u>	<u>PPM</u>
-15%	173.287 506	- 0.16

RESULTS OF MEASUREMENTS: The test results indicates that the EUT meets the requirements.

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: tei@timcoengr.com

2.1055(a)(1) Frequency stability:

90.214 Transient Frequency Behavior

REQUIREMENTS: Transmitters designed to operate in the 150 - 174 MHz and 421 - 512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

t_1^4	±25.0 kHz	5.0 mS	10.0 mS
t_2	±12.5 kHz	20.0 mS	25.0 mS
t_3^4	±25.0 kHz	5.0 mS	10.0 mS

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

t_1^4	±12.5 kHz	5.0 mS	10.0 mS
t_2	±6.25 kHz	20.0 mS	25.0 mS
t_3^4	±12.5 kHz	5.0 mS	10.0 mS

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels


t_1^4	±6.25 kHz	5.0 mS	10.0 mS
t_2	±3.125 kHz	20.0 mS	25.0 mS
t_3^4	±6.25 kHz	5.0 mS	10.0 mS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.


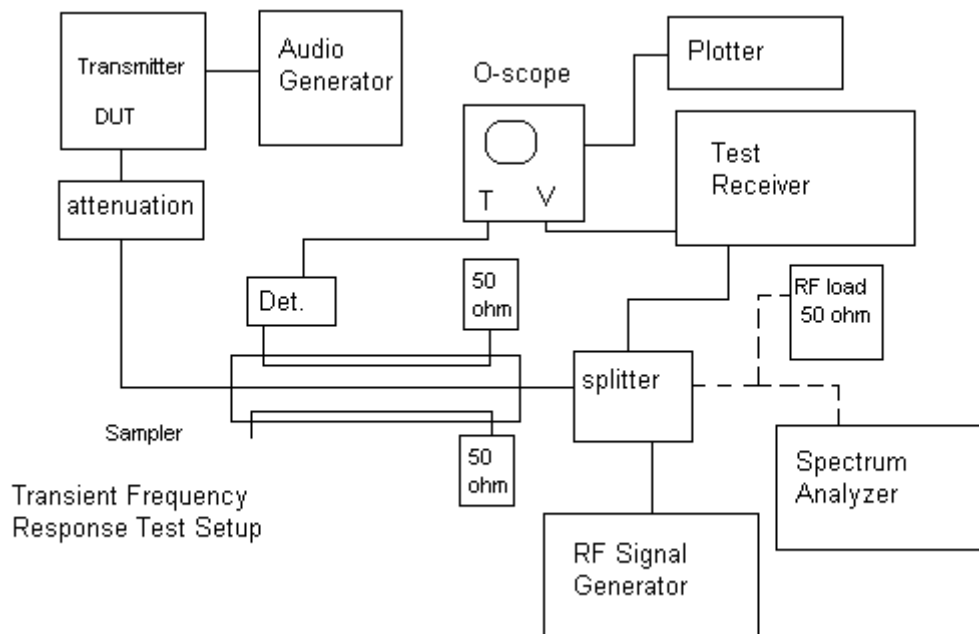


APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: tei@timcoengr.com

TRANSIENT FREQUENCY RESPONSE 6.25 kHz

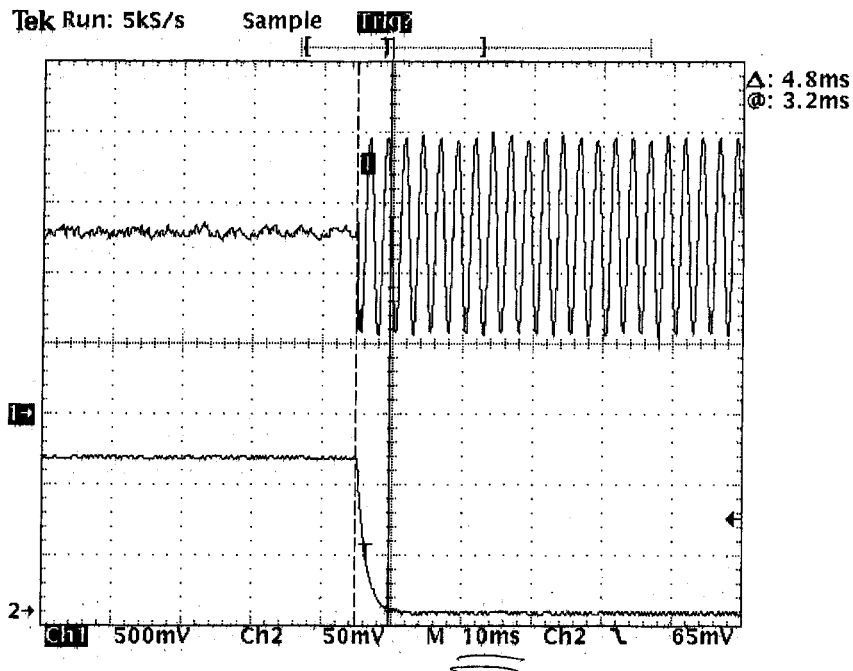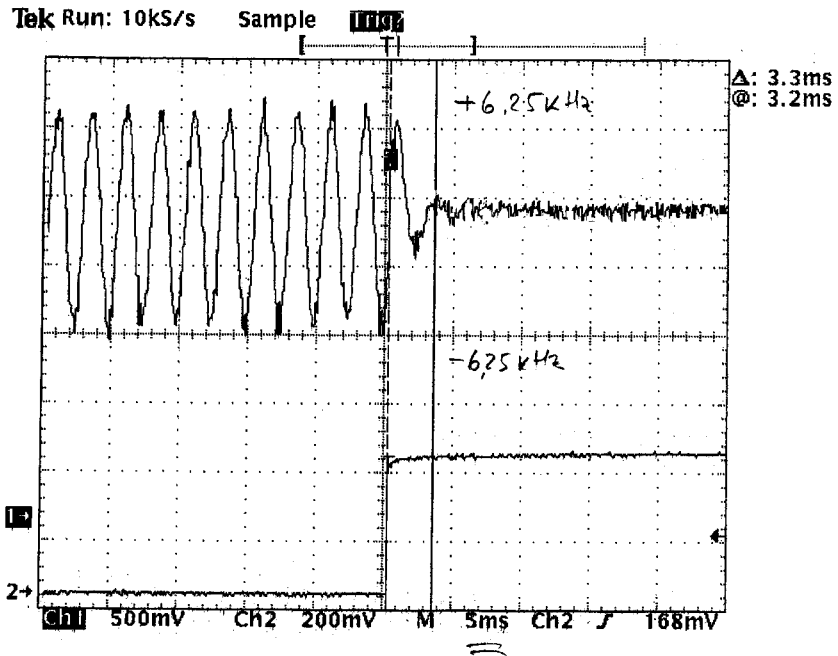

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
FCC ID: H78KPMT150W
REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: tei@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 9/23/03	9/23/05
Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 9/23/03	9/23/05
Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 9/23/03	9/23/05
Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 9/23/03	9/23/05
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 8/26/04	8/26/06
Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 2/17/03	2/17/05
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 7/16/04	7/16/06
Oscilloscope	Tektronix	2230	300572	CAL 7/3/03	7/3/05
System One	Audio Precision	System One	SYS1-45868	CHAR 4/25/02	4/25/04
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
Digital Multimeter	Fluke	77	35053830	CHAR 1/8/02	1/8/04
Peak Power Meter	HP	8900C	2131A00545	CAL 7/2/03	7/2/05
Power Sensor	Agilent Technologies	84811A	2551A02705	CAL 7/2/03	7/2/05
Power Meter	HP	432A	1141A07655	CAL 4/15/03	4/15/05
Digital Thermometer	Fluke	2166A	42032	CAL 7/19/04	7/19/06
Frequency Counter	HP	5352B	2632A00165	CAL 8/3/04	8/3/06
Service Monitor	IFR	FM/AM 500A	5182	CAL 11/22/00	Out of Service
Signal Generator	HP	8640B	2308A21464	CAL 8/26/04	8/26/06
Modulation Analyzer	HP	8901A	3435A06868	CAL 9/5/01	9/5/03
Egg Timer	Unk			CHAR 2/1/02	2/1/04
Measuring Tape-20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04

APPLICANT: KP ELECTRONICS SYSTEMS LTD.
 FCC ID: H78KPMT150W
 REPORT #: K\KP\1598YAT4\1598YAT4TestReport.doc