

Applicant: Delta Electronics Incorporated

Product: NovoDS Digital Signage Solution

Model No.: DS310

Trademark: Vivitek

FCC ID: H79-023DS3

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test Result: It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C, Paragraph 15.247 for the evaluation of electromagnetic

compatibility

Approved By

Terry long

Terry Tang

Manager

Dated: June 05, 2023

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2305193-04E Page 2 of 94

Date: 2023-06-05



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Page 3 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



# **Test Report Conclusion**

## Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	6
1.5	Test Duration.	6
1.6	Test Uncertainty.	6
1.7	Test By	6
2.0	List of Measurement Equipment	7
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Undesirable Emission and Restrict band	13
7.0	Bandwidth Measurement	33
8.0	Peak Transmit Power Measurement	62
9.0	Peak Power Spectral Density Measurement	65
10.0	Frequency Stability	84
11.0	Antenna Requirement	87
12.0	FCC ID Label	88
13.0	Photo of Test Setup and EUT View.	89

Date: 2023-06-05



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

### 1.2 Applicant Details

Applicant: Delta Electronics Incorporated

Address: 3 Tungyung rd., Chungli Industrial Zone, Taoyuan County 32063 Taiwan

Telephone: -Fax: --

### 1.3 Description of EUT

Product: NovoDS Digital Signage Solution
Manufacturer: Delta Electronics Incorporated

Address: 3 Tungyung rd., Chungli Industrial Zone, Taoyuan County 32063 Taiwan

Trademark: Vivitek
Additional Trademark: N/A
Model Number: DS310
Additional Model Number: N/A

Hardware Version: RKS220915

Software Version: build number: 5.0.0.10

Serial No.: N/A

Type of Modulation IEEE 802.11a/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK);

IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Frequency Band 1: 5180MHz-5240MHz; Band 4: 5745MHz-5825MHz

Air Data Rate IEEE 802.11a: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0-mcs15 IEEE 802.11n/HT40: mcs0-mcs15 IEEE 802.11ac: NSS1 mcs0-mcs9

Antenna: Two Dipole antenna used with reverse polarity antenna connectors. The gain of

each antenna is 4.24dBi for 5G Band 1 and 2.25 for 5G Band 4 (Get from the

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-06-05



antenna specification)

Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the

worst case for 802.11a mode; mcs0 air data rate was the worst case for 802.11n

mode;

Frequency Selection By software

Rating: Input: DC5V, 3.0A

Power Supply: Model: CNXZX3015-050030SA

Input: AC100-240V~, 50/60Hz, 0.4A; Output: DC5V, 3A, 15W

### **Each Channel Operation Frequency**

Each Chaimer Operation Prequency						
	Band 1					
802.11a / 11n HT2	20 / 802.11ac VHT20	802.11n HT4	40 / 802.11acVHT40	802.11a	ac VHT80	
Channel	Frequency	Channel	Frequency	Channel	Frequency	
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
44	5220 MHz					
48	5240 MHz					
	Band 4					
802.11a / 11n HT2	20 / 802.11ac VHT20	802.11n HT4	802.11n HT40 / 802.11acVHT40 802.11ac VF		ac VHT80	
Channel	Frequency	Channel	Frequency	Channel	Frequency	
149	5745 MHz	151	5755 MHz	155	5775 MHz	
153	5765 MHz	159	5795 MHz			
157	5785 MHz					
165	5825 MHz					

### The selected test channels as follows:

Band 1					
802.11a /	11n HT20	802.11:	n HT40	802.11ac VHT80	
Channel Frequency		Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190 MHz	42	5210 MHz
40	5200 MHz	46	5230 MHz		
48	5240 MHz				

	Band 4					
802.11a /	11n HT20	802.11	n HT40	802.11ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
149	5745 MHz	151	5755 MHz	155	5775 MHz	
157	5785 MHz	159	5795 MHz			
165	5825 MHz					

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 6 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



Note: 802.11ac VHT20/VHT40 is similar with 802.11n HT20/HT40.

Submitted Sample: 2 Samples 1.4

1.5 Test Duration 2023-05-15 to 2023-06-05

Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Date: 2023-06-05



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17
LISN	R&S	EZH3-Z5	100253	2022-07-18	2023-07-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2022-07-18	2023-07-17
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2022-07-15	2023-07-14
Spectrum	Keysight	N9020A	MY53300466	2023-03-05	2024-03-04
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2022-07-18	2023-07-17
Power sensor	Anritsu	MA2491A	32263	2022-07-18	2023-07-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2022-07-15	2023-07-14
EMI Test Receiver	RS	ESCS 30	834115/006	2022-07-15	2023-07-14
Spectrum	HP/Agilent	E4407B	MY50441392	2022-07-15	2023-07-14
Spectrum	RS	FSP	1164.4391.38	2022-07-15	2023-07-14
RF Cable	7h an adi	ZT26-NJ-NJ-8		2022-07-15	2023-07-14
Kr Cable	Zhengdi	M/FA		2022-07-13	2023-07-14
RF Cable	Zhengdi	7m		2022-07-15	2023-07-14
Pre-Amplifier	Schwarebeck	BBV9743	#218	2022-07-15	2023-07-14
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2022-07-15	2023-07-14
LISN	SCHAFFNER	NNB42	00012	2022-08-18	2023-07-17
ESPI Test Receiver	R&S	ESPI 3	100379	2022-07-15	2023-07-14
LISN	R&S	EZH3-Z5	100294	2022-07-18	2023-07-17

## 2.2 Automation Test Software

## For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

### For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2023-06-05



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15, Paragraph 15.107 & 15.407	<b>Conducted Emission Test</b>	Pass	Complies	
FCC Part 15 Subpart E Paragraph 15.407 (b1/4), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a1/3)	Peak Transmit Power	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a)(1)	Peak Power Excursion	Pass	Complies	
FCC Part 15, Paragraph 15.407 (a/1/3)	Peak Power Spectral Density	Pass	Complies	
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	Pass	Complies	

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2013, ANSI C63.4:2014 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 9 of 94


Report No.: TW2305193-04E

Date: 2023-06-05



### 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test

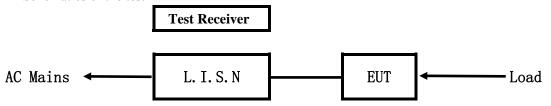


**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

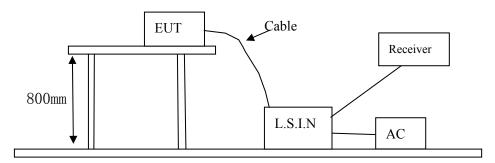

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

### A. EUT

Device	Manufacturer	Model	FCC ID
NovoDS Digital	Delta Electronics Incorporated	DS310	H79-023DS3
Signage Solution	Delta Electronics incorporated	D3310	11/9-023D33

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2305193-04E Page 10 of 94

Date: 2023-06-05



### B. Internal Device

Device	Manufacturer	Model	Rating
Adapter	Utech	CNXZX3015-0500305A	DOC

# C. Peripherals

Device	Manufacturer	Model	Rating
LED Display	DELL	U2720QM	

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

## 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2023-06-05



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)


## **EUT Operating Environment**

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** Test Power: AC120V/60Hz

Please refer to following diagram for individual

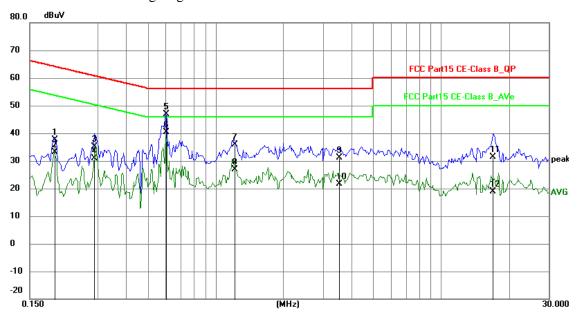

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1929	27.78	9.75	37.53	63.91	-26.38	QP	Р
2	0.1929	23.46	9.75	33.21	53.91	-20.70	AVG	Р
3	0.2904	25.28	9.76	35.04	60.51	-25.47	QP	Р
4	0.2904	21.24	9.76	31.00	50.51	-19.51	AVG	Р
5	0.6023	37.15	9.78	46.93	56.00	-9.07	QP	Р
6	0.6023	30.48	9.78	40.26	46.00	-5.74	AVG	Р
7	1.2108	25.98	9.79	35.77	56.00	-20.23	QP	Р
8	1.2108	17.16	9.79	26.95	46.00	-19.05	AVG	Р
9	3.5343	21.29	9.87	31.16	56.00	-24.84	QP	Р
10	3.5343	11.75	9.87	21.62	46.00	-24.38	AVG	Р
11	17.0127	20.84	10.50	31.34	60.00	-28.66	QP	Р
12	17.0127	8.34	10.50	18.84	50.00	-31.16	AVG	Р

Date: 2023-06-05



### B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


# **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keeping WIFI Transmitting** 

Results: Pass Test Power:AC120V/60Hz

Please refer to following diagram for individual

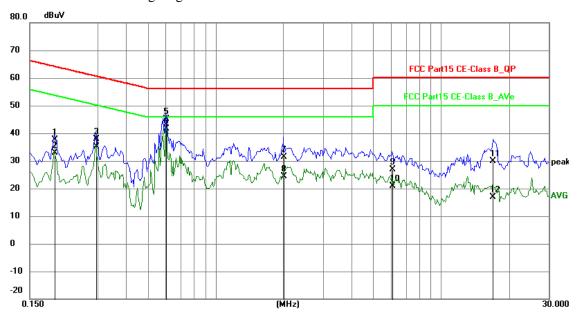

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1929	27.82	9.75	37.57	63.91	-26.34	QP	Р
2	0.1929	23.21	9.75	32.96	53.91	-20.95	AVG	Р
3	0.2943	28.07	9.76	37.83	60.40	-22.57	QP	Р
4	0.2943	25.25	9.76	35.01	50.40	-15.39	AVG	Р
5	0.6023	35.43	9.78	45.21	56.00	-10.79	QP	Р
6	0.6023	31.95	9.78	41.73	46.00	-4.27	AVG	Р
7	2.0102	21.51	9.80	31.31	56.00	-24.69	QP	Р
8	2.0102	14.48	9.80	24.28	46.00	-21.72	AVG	Р
9	6.0653	16.94	9.97	26.91	60.00	-33.09	QP	Р
10	6.0653	10.92	9.97	20.89	50.00	-29.11	AVG	Р
11	17.0166	19.38	10.50	29.88	60.00	-30.12	QP	Р
12	17.0166	6.42	10.50	16.92	50.00	-33.08	AVG	Р

Note: Both 240V and 120V voltages are tested, the data of the worst-case is shown in the report.

Date: 2023-06-05



### 6 Undesirable Emission and Restrict band


- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum is set as follows:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
Above Toriz	Peak	1MHz	10Hz	Average

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

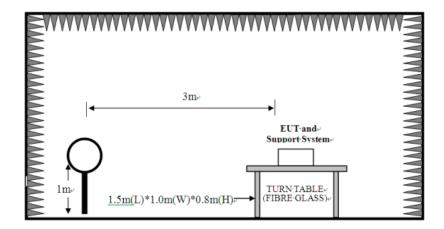


Page 14 of 94

Report No.: TW2305193-04E


Date: 2023-06-05



For radiated emissions from 30MHz to1GHz

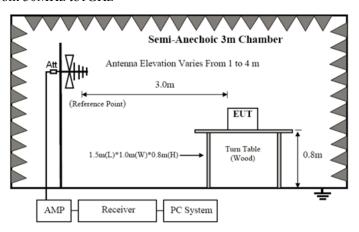

For radiated emissions above 1GHz

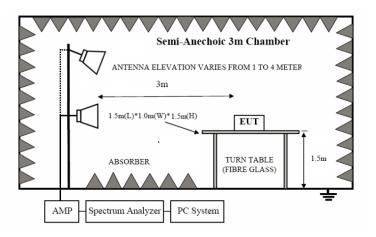

- 6.2 Configuration of the EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 15 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



### Frequencies in restricted band are complied to limit on Paragraph 15.209

	1	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No.: TW2305193-04E Page 16 of 94

Date: 2023-06-05



## Test result

## General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (9kHz----30MHz)

**EUT** set Condition: **Keep Transmitting** 

Results: Pass

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				Р
	-			Р

### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =20 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

Date: 2023-06-05



## Test result


## General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 

### Test Figure

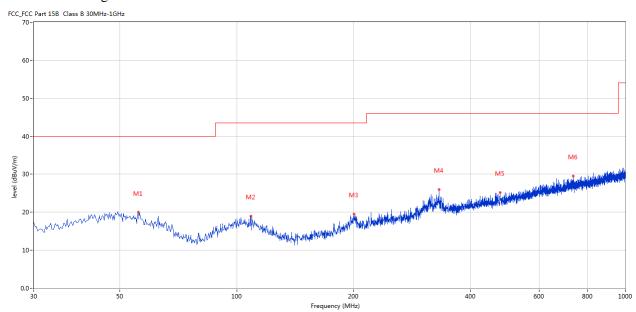

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	55.699	19.98	-11.94	40.0	-20.02	Peak	203.00	100	Horizontal	Pass
2	108.793	18.95	-13.50	43.5	-24.55	Peak	121.00	100	Horizontal	Pass
3	200.192	19.49	-13.44	43.5	-24.01	Peak	258.00	100	Horizontal	Pass
4	331.595	25.96	-10.13	46.0	-20.04	Peak	53.00	100	Horizontal	Pass
5	475.846	25.19	-7.47	46.0	-20.81	Peak	236.00	100	Horizontal	Pass
6	735.014	29.55	-3.69	46.0	-16.45	Peak	171.00	100	Horizontal	Pass


Page 18 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



# Test Figure

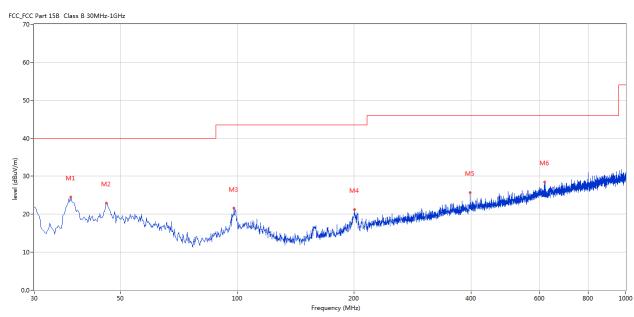

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	37.273	24.55	-13.06	40.0	-15.45	Peak	6.00	100	Vertical	Pass
2	46.001	22.99	-11.40	40.0	-17.01	Peak	199.00	100	Vertical	Pass
3	98.125	21.56	-13.73	43.5	-21.94	Peak	274.00	100	Vertical	Pass
4	200.192	21.20	-13.44	43.5	-22.30	Peak	271.00	100	Vertical	Pass
5	397.781	25.70	-8.69	46.0	-20.30	Peak	128.00	100	Vertical	Pass
6	617.673	28.48	-4.99	46.0	-17.52	Peak	213.00	100	Vertical	Pass

Page 19 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



# Operation Mode: Keeping Transmitting under CH36 for 11a at 6Mbps-ANT1

	1 0		1
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5180.00	102.35 (PK)	V	Even do montal Engavenov
5180.00	93.57 (PK)	Н	Fundamental Frequency
10360		V	74(Peak)/ 54(AV)
10360		Н	74(Peak)/ 54(AV)
15540		H/V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74(Peak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Pre-amplifier

2. Remark "---" means that the emissions level is too low to be measured

### Operation Mode: Keeping Transmitting under CH40 for 11a at 6Mbps - ANT1

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5200.00	101.83 (PK)	V	Eun damental Eraguenay
5200.00	93.41 (PK)	Н	Fundamental Frequency
10400		V	74(Peak)/ 54(AV)
10400		Н	74(Peak)/ 54(AV)
15600		V	74(Peak)/ 54(AV)
20800		H/V	74(Peak)/ 54(AV)
26000		H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Pre-amplifier

Report No.: TW2305193-04E Page 20 of 94

Date: 2023-06-05



# Operation Mode: Keeping Transmitting under CH48 for 11a at 6Mbps - ANT1

	1 0		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5240.00	102.19 (PK)	V	Even do montal Engavon av
5240.00	92.88 (PK)	Н	Fundamental Frequency
10480		V	74(Peak)/ 54(AV)
10480		Н	74(Peak)/ 54(AV)
15720		H/V	74(Peak)/ 54(AV)
20960		H/V	74(Peak)/ 54(AV)
26200		H/V	74(Peak)/ 54(AV
31440		H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable – Pre-amplifier

2. Remark "---" means that the emissions level is too low to be measured

### Operation Mode: Keeping Transmitting under CH36 for 11n20 at MCS0-MIMO

1	1 0		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5180.00	100.63 (PK)	V	Even dominantal Engavianos
5180.00	92.52 (PK)	Н	Fundamental Frequency
10360	44.22 (PK)	V	74(Peak)/ 54(AV)
10360	42.63 (PK)	Н	74(Peak)/ 54(AV)
15540		H/V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74(Peak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

Date: 2023-06-05



## Operation Mode: Keeping Transmitting under CH40 for 11n20 at MCS0-MIMO

	1 0		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5200.00	100.51 (PK)	V	Eundomontal Eroguanov
5200.00	91.43 (PK)	Н	Fundamental Frequency
10400	45.57 (PK)	V	74(Peak)/ 54(AV)
10400	43.63 (PK)	Н	74(Peak)/ 54(AV)
15600		H/V	74(Peak)/ 54(AV)
20800		H/V	74(Peak)/ 54(AV)
26000		H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

### Operation Mode: Keeping Transmitting under CH48 for 11n20 at MCS0-MIMO

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
5240.00	100.38 (PK)	V	Eundomontal Eroguanay
5240.00	92.04 (PK)	Н	Fundamental Frequency
10480	45.35 (PK)	V	74(Peak)/ 54(AV)
10480	42.16 (PK)	Н	74(Peak)/ 54(AV)
15720	1	H/V	74(Peak)/ 54(AV)
20960	-	H/V	74(Peak)/ 54(AV)
26200	1	H/V	74(Peak)/ 54(AV)
31440	-	H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

Page 22 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



## Operation Mode: Keeping Transmitting under CH149 for 11a at 6Mbps-ANT1

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5745.00	102.10 (PK)	V	Even do montal Engavenov
5745.00	92.13 (PK)	Н	Fundamental Frequency
11490	46.59 (PK)	V	74(Peak)/ 54(AV)
11490	43.94 (PK)	Н	74(Peak)/ 54(AV)
17235		H/V	74(Peak)/ 54(AV)
22980		H/V	74(Peak)/ 54(AV)
28725		H/V	74(Peak)/ 54(AV)
34470		H/V	74(Peak)/ 54(AV)
40215		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

## Operation Mode: Keeping Transmitting under CH157 for 11a at 6Mbps-ANT1

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5785.00	101.02 (PK)	V	Eun damental Eraguenay
5785.00	92.09 PK)	Н	Fundamental Frequency
11570	46.08 (PK)	V	74(Peak)/ 54(AV)
11570	45.31 (PK)	Н	74(Peak)/ 54(AV)
17355	1	H/V	74(Peak)/ 54(AV)
23140	ı	H/V	74(Peak)/ 54(AV)
28925	1	H/V	74(Peak)/ 54(AV)
34710	-	H/V	74(Peak)/ 54(AV)
40495		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

Date: 2023-06-05



## Operation Mode: Keeping Transmitting under CH165 for 11a at 6Mbps-ANT1

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5825.00	100.35 (PK)	V	Even do montal Engavon av
5825.00	91.00 (PK)	Н	Fundamental Frequency
11650	46.93 (PK)	V	74(Peak)/ 54(AV)
11650	44.22 (PK)	Н	74(Peak)/ 54(AV)
17475		H/V	74(Peak)/ 54(AV)
23300		H/V	74(Peak)/ 54(AV)
29125		H/V	74(Peak)/ 54(AV)
34950		H/V	74(Peak)/ 54(AV)
40775		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

## Operation Mode: Keeping Transmitting under CH149 for 11n20 at MCS0-MIMO

operation in the property of t				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)	
5745.00	101.02 (PK)	V	Eundomontal Eroquanay	
5745.00	93.03 (PK)	Н	Fundamental Frequency	
11490	47.84 (PK)	V	74(Peak)/ 54(AV)	
11490	43.92 (PK)	Н	74(Peak)/ 54(AV)	
17235		H/V	74(Peak)/ 54(AV)	
22980		H/V	74(Peak)/ 54(AV)	
28725		H/V	74(Peak)/ 54(AV)	
34470		H/V	74(Peak)/ 54(AV)	
40215		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

Date: 2023-06-05



# Operation Mode: Keeping Transmitting under CH157 for 11n20 at MCS0-MIMO

operation in the ping it mismitting under crite, for time and it mismitted				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)	
5785.00	100.02 (PK)	V	Even do magnetal. Engage and aver	
5785.00	90.23 (PK)	Н	Fundamental Frequency	
11570	47.38 (PK)	V	74(Peak)/ 54(AV)	
11570	45.20 (PK)	Н	74(Peak)/ 54(AV)	
17355		H/V	74(Peak)/ 54(AV)	
23140		H/V	74(Peak)/ 54(AV)	
28925		H/V	74(Peak)/ 54(AV)	
34710		H/V	74(Peak)/ 54(AV)	
40495		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

## Operation Mode: Keeping Transmitting under CH165 for 11n20 at MCS0-MIMO

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
5825.00	101.03 (PK)	V	Eundamental Eraguenay
5825.00	92.04 (PK)	Н	Fundamental Frequency
11650	47.42 (PK)	V	74(Peak)/ 54(AV)
11650	44.83 (PK)	Н	74(Peak)/ 54(AV)
17475	-	H/V	74(Peak)/ 54(AV)
23300	1	H/V	74(Peak)/ 54(AV)
29125	1	H/V	74(Peak)/ 54(AV)
34950		H/V	74(Peak)/ 54(AV)
40775		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 36 (5180MHz)-11a	
Mode	Keeping	Keeping Transmitting		120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass		PK	
5150	PK (dBµV/m)	50.0	T in it	27 10 - /4/11	
	EIRP (dBm)	-45.2	Limit	-27dBm/MHz	
Polarity	Vertical			-	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 50.0 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50-95.2=-45.2dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 36 (5180MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5150	PK (dBµV/m)	41.5 (PK)	T ::4	27.ID/MII_	
	EIRP (dBm)	-53.7	Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 41.5 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=41.5-95.2=-53.7dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 48 (5240MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5250	PK (dBµV/m)	48.8 (PK)	T :	27 ID /A III	
	EIRP (dBm)	-46.4	Limit	-27dBm/MHz	
Polarity	V	Vertical			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.8dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=48.8-95.2=-46.4dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 48 (5240MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5250	PK (dBµV/m)	41.9 (PK)	T in it	27 ID/MII	
	EIRP (dBm)	-53.3	Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 41.9dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=41.9-95.2=-53.3dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 149 (5745MHz)-11a	
Mode	Keeping	Keeping Transmitting		120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5725	PK (dBµV/m)	55.1 (PK)	T :	17 ID /A (II	
	EIRP (dBm)	-40.1	Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 55.1 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=55.1-95.2=-40.1dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 149 (5745MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBμV/m) 48.5(PK)		T * */	1515 451	
	EIRP (dBm) -46.7		Limit	-17dBm/MHz	
Polarity	Horizontal			-	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.5 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.5 - 95.2 = -46.7 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 161 (5825MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	53.1(PK)	T ::4	17.ID/MII_	
	EIRP (dBm) -42.1		Limit	-17dBm/MHz	
Polarity	7	Vertical			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 53.1dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=53.1-95.2=-42.1dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digit	tal Signage Solution	Test Mode:	Channel 161 (5825MHz)-11a	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBμV/m)	PK (dBμV/m) 53.6 (PK)		1515 241	
	EIRP (dBm) -41.6		Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 53.6 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 53.6 - 95.2 = -41.6 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBμV/m) 48.3(PK)		T 114	27 10/MII	
	EIRP (dBm) -46.9		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.3 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=48.3-95.2=-46.9dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	42.4 (PK)	T in it	27 10/MII	
	EIRP (dBm) -52.8		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 42.4dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 42.4 - 95.2 = -52.8 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	46.9(PK)	T in it	27 10/4/11	
	EIRP (dBm) -47.3		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.9dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.9-95.2=-48.3dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBμV/m) 42.5(PK)		T in it	27 10/MII	
	EIRP (dBm) -52.7		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 42.5dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=42.5-95.2=-52.7dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 149 (5745MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	51.1 (PK)	T in it	17 ID /MII	
	EIRP (dBm) -44.1		Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 51.1dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=51.1-95.2=-44.1dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 149 (5745MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5725	PK (dBµV/m)	45.8(PK)	T in it	17.10/МП	
	EIRP (dBm) -49.4		Limit	-17dBm/MHz	
Polarity	Horizontal			1	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.8dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.8-95.2=-49.4dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 161 (5825MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	51.3 (PK)	T in it	17.10/МП	
	EIRP (dBm) -43.9		Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 51.3dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=51.3-95.2=-43.9dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 161 (5825MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5850	PK (dBµV/m)	46.3 (PK)	T in it	17.10/МП	
	EIRP (dBm) -48.9		Limit	-17dBm/MHz	
Polarity	Horizontal			1	

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.3dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.3 - 95.2 = -48.9 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digi	tal Signage Solution	Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBμV/m) 49.2(PK)		T 1 14	27 10/MII	
	EIRP (dBm) -46.0		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 49.2dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=49.2-95.2=-46.0dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5150	PK (dBµV/m)	46.1(PK)	T : '/	27.10 / 10.11	
	EIRP (dBm)	-49.1	Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.1dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 46.1 - 95.2 = -49.1 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5250	PK (dBµV/m)	51.6(PK)	T in it	27 10/MII	
	EIRP (dBm)	-43.6	Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 51.6dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=51.6-95.2=-43.6dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5250	PK (dBµV/m)	48.2(PK)	T in it	27 10/MII	
	EIRP (dBm)	-46.0	Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.2dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.2 - 95.2 = -47.0 dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 151 (5755MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5725	PK (dBµV/m)	52.6(PK)	T in it	17.10/МП	
	EIRP (dBm)	-42.6	Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 52.6 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=52.6 - 95.2 = -42.6dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 151 (5755MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5725	PK (dBµV/m)	47.2(PK)	T in it	17.10/МП	
	EIRP (dBm)	-48.0	Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 47.2dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=47.2-95.2=-48.0dBm$ 

Date: 2023-06-05



Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 159 (5795MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5850	PK (dBµV/m)	53.5 (PK)	T : '/	1710 AUI	
	EIRP (dBm)	-41.7	Limit	-17dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 53.5dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=53.5-95.2=-41.7dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	NovoDS Digital Signage Solution		Test Mode:	Channel 159 (5795MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
5850	PK (dBµV/m)	49.5(PK)	T in it	1710 - A411	
	EIRP (dBm)	-45.7	Limit	-17dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 49.5 dB\mu V/m$ ,


 $EIRP[dBm] = E[dB\mu V/m] - 95.2=49.5-95.2=-45.7dBm$ 

Date: 2023-06-05



#### 7.0 Emission Bandwidth

# 7.1 Test Setup



# 7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3 Detector = Peak
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

## 7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set  $VBW \ge 3 \times RBW$ .
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

# 7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set  $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2023-06-05



## 7.6 Test Result

Test Channel	Frequen	6dB Bandwidth (MHz) Antenna 1	6dB Bandwidth (MHz) Antenna 2	99 % Emission Bandwidth (MHz) ANT 1	99 % Emission Bandwidth (MHz) ANT 2	6dB Bandwidth Limit (kHz)	Result			
	802.11a									
CH 149	5745	15.73	15.50	16.355	16.335	≥500	Pass			
CH 157	5785	16.09	15.78	16.357	16.351	≥500	Pass			
CH 165	5825	15.71	15.41	16.377	16.363	≥500	Pass			
			802	.11n(20M)						
CH 149	5745	16.25	16.12	17.551	17.524	≥500	Pass			
CH 157	5785	16.81	16.57	17.529	17.512	≥500	Pass			
CH 165	5825	16.81	16.68	17.535	17.527	≥500	Pass			
			802.	11ac(20M)						
CH 149	5745	17.57	17.46	17.534	17.523	≥500	Pass			
CH 157	5785	17.68	17.65	17.540	17.535	≥500	Pass			
CH 165	5825	16.93	16.79	17.542	17.533	≥500	Pass			
			802.	.11n(40M)						
CH 151	5755	35.19	35.14	36.026	36.014	≥500	Pass			
CH 159	5795	35.29	35.22	36.003	36.003	≥500	Pass			
	802.11ac(40M)									
CH 151	5755	35.94	35.67	35.999	35.858	≥500	Pass			
CH 159	5795	35.45	35.42	35.980	35.894	≥500	Pass			
			802.	11ac(80M)						
CH 155	5775	75.42	75.35	75.291	75.223	≥500	Pass			

Note: ANT 1(2) Represent the value of antenna 1 and 2, The worst data is Antenna 1, only shown Antenna 1 Plot.

Page 39 of 94


Report No.: TW2305193-04E


Date: 2023-06-05



# 6dB bandwidth-802.11a

#### TX CH 149

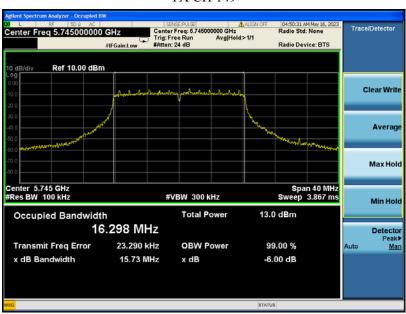


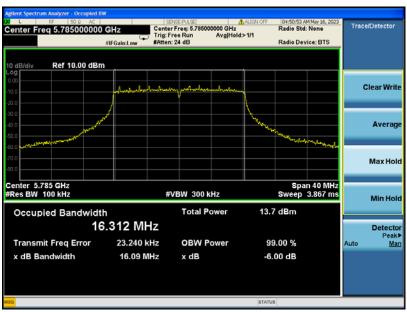

Page 40 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



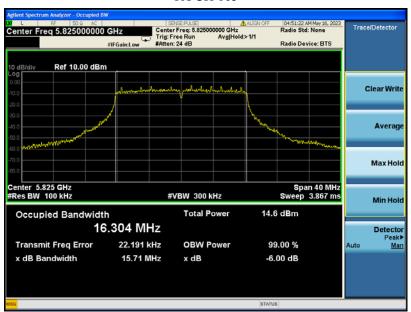

Page 41 of 94


Report No.: TW2305193-04E


Date: 2023-06-05



## 6dB bandwidth-802.11n20

#### TX CH 149

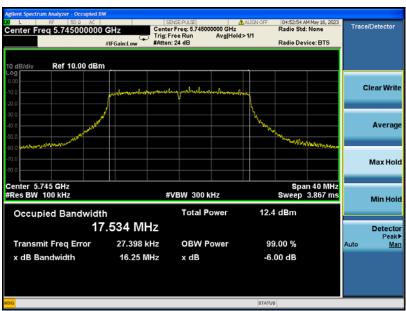

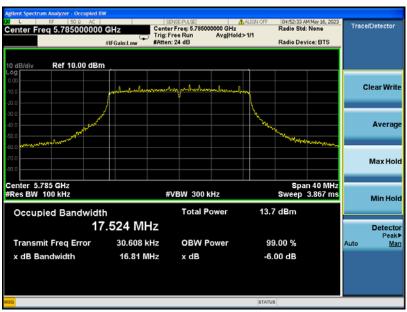

Report No.: TW2305193-04E Page 42 of 94

Date: 2023-06-05





Date: 2023-06-05




# 6dB bandwidth-802.11ac20

#### TX CH 149



# TX CH 157

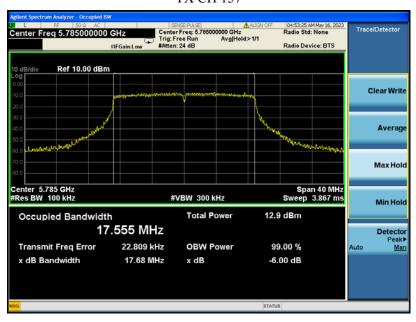

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 44 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



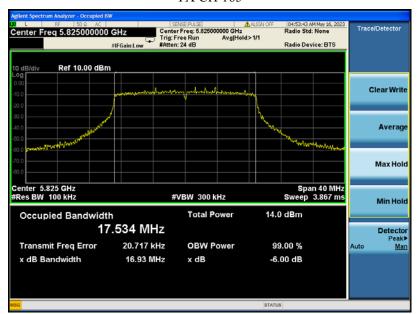

Page 45 of 94


Report No.: TW2305193-04E


Date: 2023-06-05



## 6dB bandwidth-802.11n40

#### TX CH 151

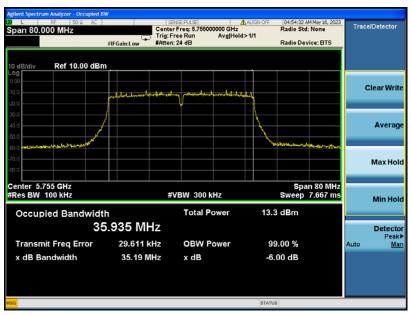

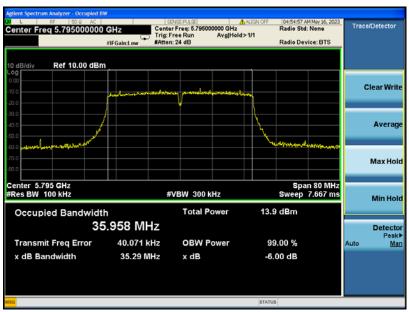

Page 46 of 94

Report No.: TW2305193-04E


Date: 2023-06-05



## 6dB bandwidth-802.11ac40

#### TX CH 151



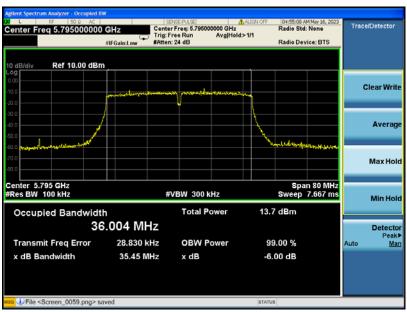


Page 47 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



# 6dB bandwidth-802.11ac80

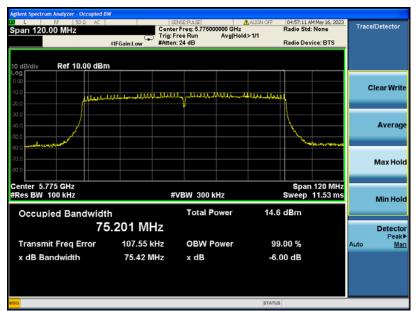

Page 48 of 94


Report No.: TW2305193-04E

Date: 2023-06-05



# 99% bandwidth-802.11a

#### TX CH 149

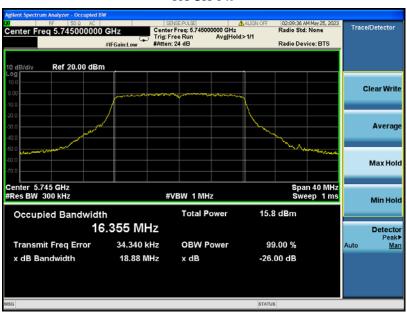



Page 49 of 94 Report No.: TW2305193-04E

Date: 2023-06-05





Page 50 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



# 99% bandwidth-802.11n20

#### TX CH 149






Page 51 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



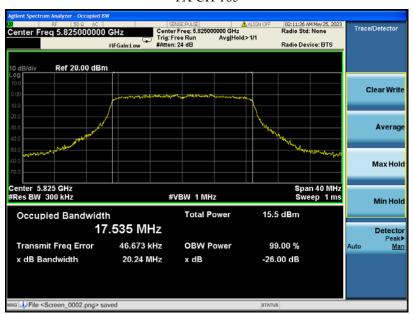


Report No.: TW2305193-04E Page 52 of 94

Date: 2023-06-05



99% bandwidth-802.11ac20

#### TX CH 149

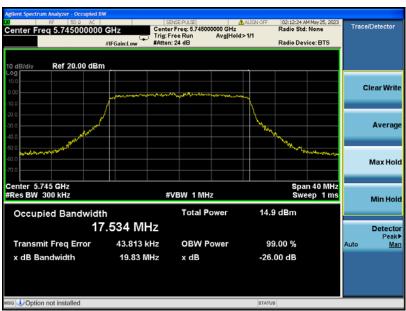




Page 53 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



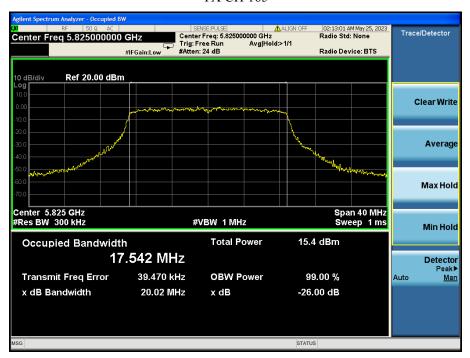


Report No.: TW2305193-04E Page 54 of 94


Date: 2023-06-05



# 99% bandwidth-802.11n40

#### TX CH 151

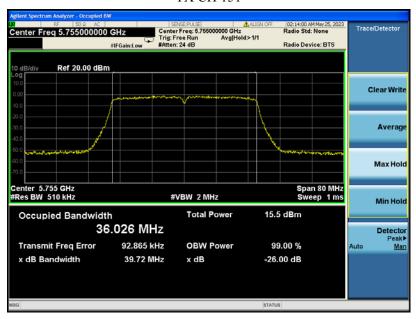

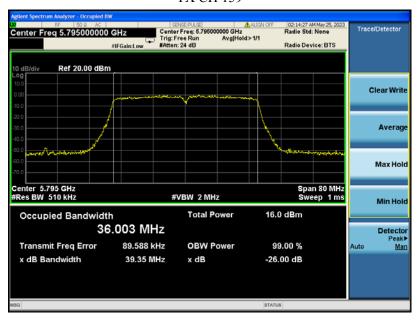

Report No.: TW2305193-04E Page 55 of 94


Date: 2023-06-05



# 99% bandwidth-802.11ac40

#### TX CH 151



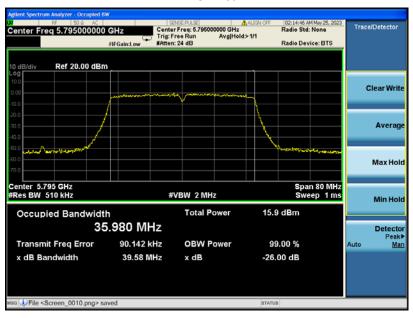


Page 56 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



# 99% bandwidth-802.11ac80

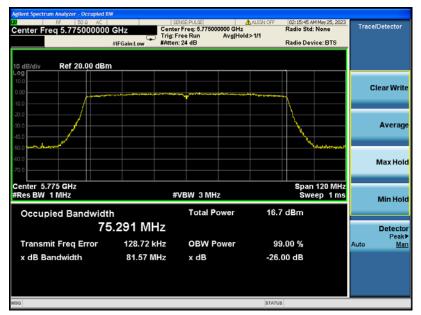

Report No.: TW2305193-04E Page 57 of 94

Date: 2023-06-05




Test Mode Test CH		Frequency (MHz)	26 dB Bandwidth (MHz)ANT 1	26 dB Bandwidth (MHz)ANT 2	99 % Emission Bandwidth (MHz) ANT 1	99 % Emission Bandwidth (MHz) ANT 2
	СН36	5180	18.80	18.76	16.364	16.344
802.11a	CH40	5200	18.79	18.56	16.357	16.334
	CH48	5240	18.62	18.45	16.346	16.326
	СН36	5180	20.01	19.87	17.531	17.530
802.11n(20M)	CH40	5200	19.84	19.56	17.522	17.525
	CH48	5240	19.94	19.66	17.541	17.553
	СН36	5180	19.70	19.56	17.525	17.521
802.11ac(20M)	CH40	5200	19.95	19.74	17.537	17.543
	CH48	5240	20.02	19.87	17.552	17.538
802.11n(40M)	CH38	5190	39.39	39.35	36.017	36.014
	CH46	5230	39.54	39.45	35.940	35.934
802.11ac(40M)	CH38	5190	39.022	39.015	36.022	36.042
	CH46	5230	39.52	39.45	35.973	35.957
802.11ac(80M)	CH42	5210	81.47	81.36	75.349	75.343

Note: ANT 1(2) Represent the value of antenna 1 and 2, The worst data is Antenna 1, only shown Antenna 1 Plot.


Date: 2023-06-05



# 802.11a (5.15GHz-5.25GHz) The Low Channel 36: 5180MHz

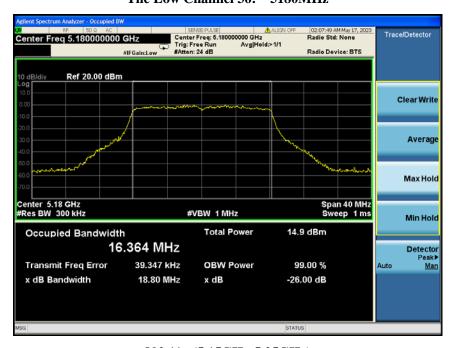


802.11a (5.15GHz-5.25GHz)
The Middle Channel 40: 5200MHz

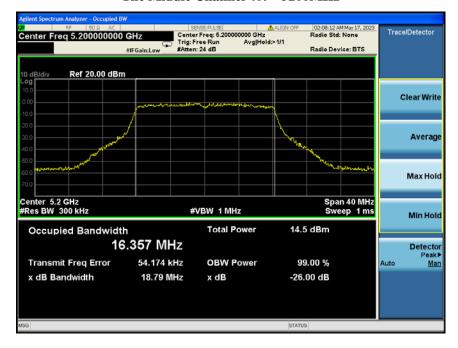


Date: 2023-06-05



# 802.11a (5.15GHz-5.25GHz) The High Channel 48: 5240MHz

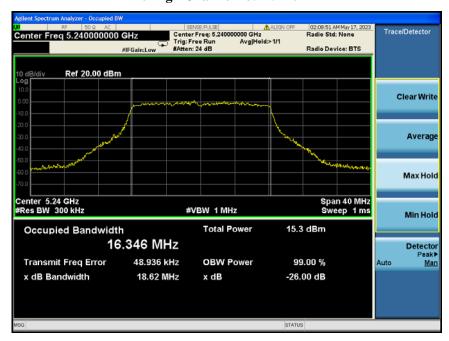


802.11n(20M) (5.15GHz-5.25GHz) The Lowest Channel 36: 5180MHz

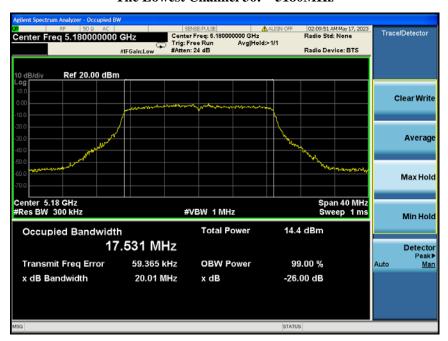


Date: 2023-06-05



# 802.11n(20M) (5.15GHz-5.25GHz) The Middle Channel 40: 5200MHz

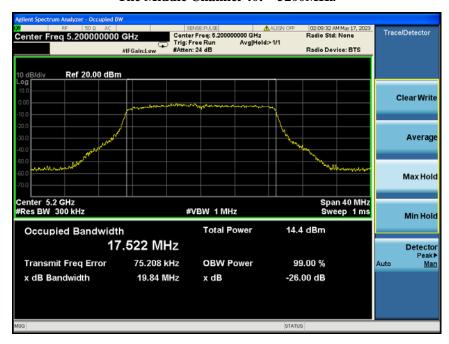


802.11n(20M) (5.15GHz-5.25GHz) The High Channel 48: 5240MHz

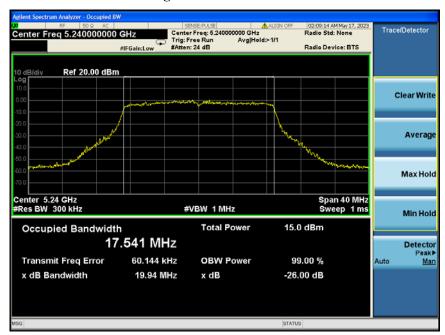


Date: 2023-06-05



# 802.11ac(20M) (5.15GHz-5.25GHz) The Middle Channel 36: 5180MHz

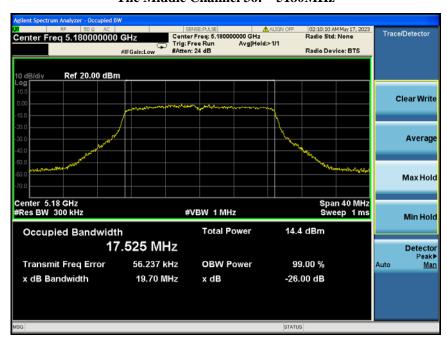

802.11n(20M) (5.15GHz-5.25GHz) The High Channel 40: 5200MHz

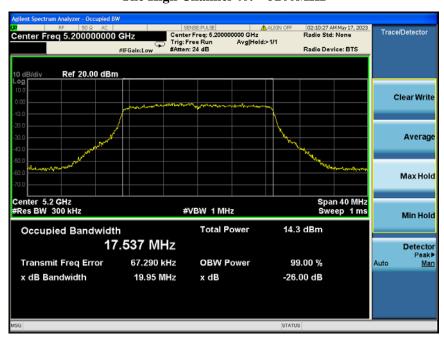


Page 62 of 94 Report No.: TW2305193-04E

Date: 2023-06-05




# 802.11ac(20M) (5.15GHz-5.25GHz) The Middle Channel 48: 5240MHz

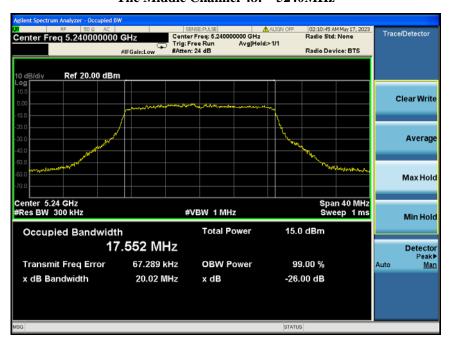


Date: 2023-06-05



# 802.11n(40M) (5.15GHz-5.25GHz) The Lowest Channel 38: 5190MHz

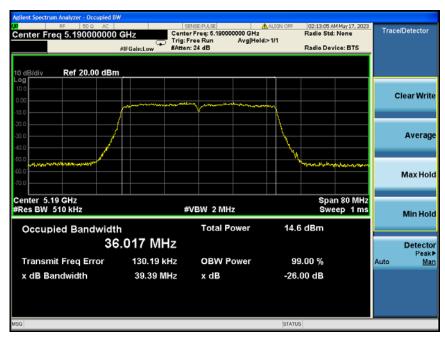


802.11n(40M) (5.15GHz-5.25GHz) The High Channel 46: 5230MHz

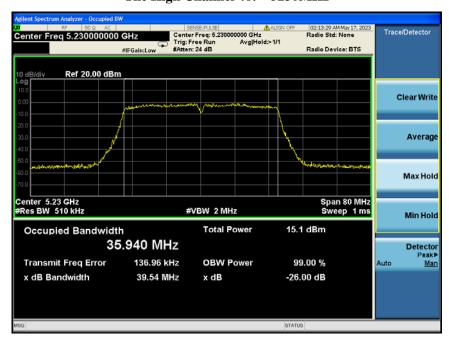


Date: 2023-06-05



# 802.11ac(40M) (5.15GHz-5.25GHz) The Lowest Channel 38: 5190MHz

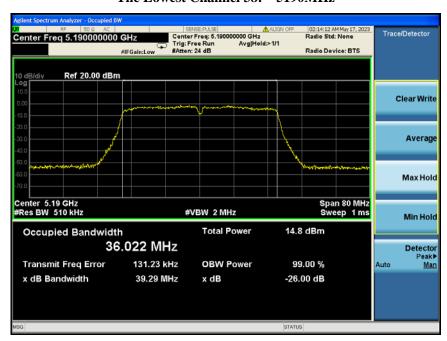

# 802.11ac(40M) (5.15GHz-5.25GHz) The High Channel 46: 5230MHz

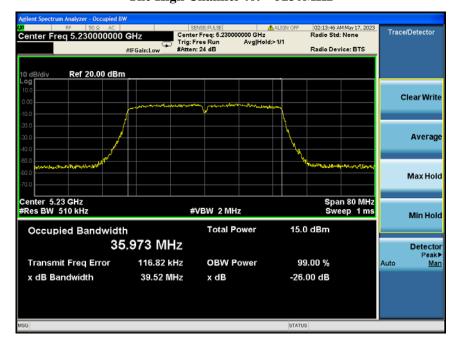


Page 65 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



# 802.11ac(80M) (5.15GHz-5.25GHz) The Lowest Channel 42: 5210MHz

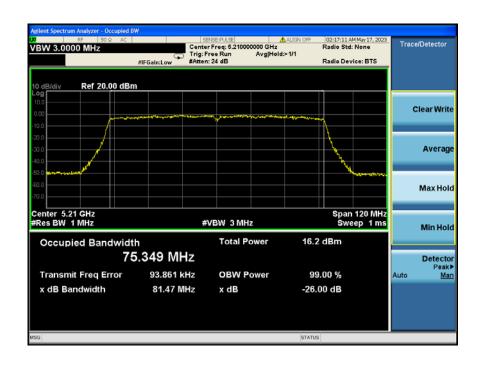


Date: 2023-06-05



#### 8.0 Peak Transmit Power Measurement

# 8.1 Test Setup



# 8.2 Limits of Peak Transmit Power Measurement

Operation Band		EUT Category	Limit		
		Outdoor Access Point	1 Watt (30 dBm) ≤ (Max. e.i.r.p 125mW		
			(21 dBm) at any elevation angle above 30		
			degrees as measured from the horizon)		
U-NII-1		Fixed point-to-point Access Point	1 Watt (30 dBm)		
		Indoor Access Point	1 Watt (30 dBm)		
	√	Client device	250mW (24 dBm)		
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*		
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*		
U-NII-3			1 Watt (30 dBm)		

Note: Where B is the 26dB emission bandwidth in MHz.

## **8.3 Test Procedure**

The average power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Page 67 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



## **8.4Test Results**

CH N	Frequency	Conducted Aver	rage Power(dBm)	total power	Limit	Result			
CH. No.		ANT 1	ANT 2	(dBm)	(dBm/MHz)				
CH36	5180	18.65	18.55		22.75	Pass			
CH40	5200	19.14	18.57		22.75	Pass			
CH48	5240	19.23	18.42		22.75	Pass			
CH 149	5745	20.46	18.53		30	Pass			
CH 157	5785	19.47	18.46		30	Pass			
CH 165	5825	20.31	19.25		30	Pass			
			TX 802.11n20 Mode	;					
CH36	5180	16.57	16.20	19.40	22.75	Pass			
CH40	5200	17.24	16.27	19.79	22.75	Pass			
CH48	5240	17.52	15.90	19.80	22.75	Pass			
CH 149	5745	17.98	17.74	20.87	30	Pass			
CH 157	5785	18.31	17.70	21.03	30	Pass			
CH 165	5825	18.46	17.79	21.15	30	Pass			
	TX 802.11n40 Mode								
CH38	5190	16.17	15.83	19.01	22.75	Pass			
CH46	5230	15.79	15.35	18.59	22.75	Pass			
CH151	5755	17.73	17.69	20.72	30	Pass			
CH159	5795	17.05	16.31	19.71	30	Pass			

Report No.: TW2305193-04E Page 68 of 94

Date: 2023-06-05



CH. No.	Eraguana	Conducted Ave	erage Power(dBm)	total power	Limit	Dagult		
	Frequency	ANT 1	ANT 2	(dBm)	(dBm)	Result		
	TX 802.11 ac (VHT20) Mode							
CH 36	5180	17.75	16.05	19.99	22.75	Pass		
CH 40	5200	16.78	15.60	19.24	22.75	Pass		
CH 48	5240	17.69	15.38	19.70	22.75	Pass		
CH 149	5745	17.67	16.97	20.34	30	Pass		
CH 157	5785	18.17	17.87	21.03	30	Pass		
CH 165	5825	17.66	17.11	20.40	30	Pass		
TX 802.11 ac (VHT40) Mode								
CH38	5190	14.90	14.68	17.80	22.75	Pass		
CH46	5230	15.69	15.33	18.52	22.75	Pass		
CH 151	5755	15.48	14.98	18.25	30	Pass		
CH 159	5795	16.47	15.44	19.00	30	Pass		
	TX 802.11 ac (VHT80) Mode							
CH42	5210	14.65	13.74	17.23	22.75	Pass		
CH155	5775	14.41	13.83	17.14	30	Pass		

Note: For MIMO mode:

5.2Gwifi: Directional gain =GANT +10log(N)dBi =7.25dBi, Limit =24-7.25+6=22.75 dBm.

5.8Gwifi: Directional gain =GANT +10log(N)dBi =4.91dBi.

Page 69 of 94


Report No.: TW2305193-04E

Date: 2023-06-05



# 9. Power Spectral Density Measurement

## 9.1 Test Setup



# 9.2 Limits of Power Spectral Density Measurement

Operation Band		EUT Category	Limit		
	Outdoor Access Point  Fixed point-to-point Access Point				
			17dBm/MHz		
U-NII-1		Indoor Access Point			
	✓ Client device		11dBm/MHz		
U-NII-2A	U-NII-2A		11dBm/MHz		
U-NII-2C			11dBm/MHz		
U-NII-3			30dBm/500kHz		

#### 9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz or 510kHz
- 3. Set the VBW =3MHz or 2MHz
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = Peak/rms
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 70 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



## 9.4Test Result


Test Mode	Test Channel	Frequency	Power Density (dBm/500kH z) ANT 1	Power Density (dBm/500kH z) ANT 2	Total Power Density (dBm/500 kHz)	Limit (dBm/500 kHz)	Result
802.11a	CH 149	5745	-0.206	-0.256	/	30	Pass
(5.725GHz-5.85GHz)	CH 157	5785	1.314	1.295	/	30	Pass
Data rate 6Mbps	CH 165	5825	1.311	1.267	/	30	Pass
802.11n(20M)	CH 149	5745	-0.252	-0.376	2.70	30	Pass
(5.725GHz-5.85GHz)	CH 157	5785	0.872	0.835	3.86	30	Pass
Data rate 13Mbps	CH 165	5825	1.320	1.146	4.24	30	Pass
802.11ac(20M)	CH 149	5745	-0.342	-0.462	2.61	30	Pass
(5.725GHz-5.85GHz)	CH 157	5785	0.969	0.835	3.91	30	Pass
Data rate 13Mbps	CH 165	5825	-1.534	-1.625	1.43	30	Pass
802.11n(40M)	CH 151	5755	-3.386	-3.625	-0.49	30	Pass
(5.725GHz-5.85GHz) Data rate 27Mbps	CH 159	5795	-1.980	-2.534	0.76	30	Pass
802.11ac(40M)	CH 151	5755	-2.761	-2.945	0.16	30	Pass
(5.725GHz-5.85GHz) Data rate 27Mbps	CH 159	5795	-1.550	-1.753	1.36	30	Pass
802.11ac(80M) (5.725GHz-5.85GHz) Data rate 58.6Mbps	CH 155	5775	-4.904	-4.973	-1.93	30	Pass

Date: 2023-06-05



# 802.11a (5.725GHz-5.85GHz) TX CH149



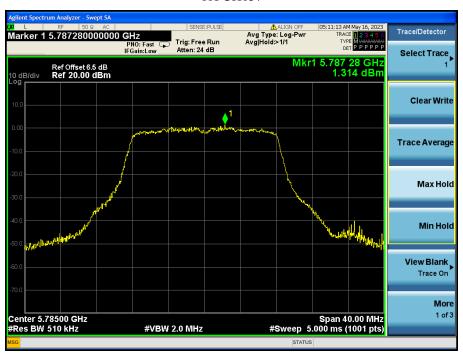

Report No.: TW2305193-04E Page 72 of 94

Date: 2023-06-05





Date: 2023-06-05



## 802.11n(20M) (5.725GHz-5.85GHz) **TX CH149**





Page 74 of 94 Report No.: TW2305193-04E

Date: 2023-06-05





Date: 2023-06-05



## 802.11ac(20M) (5.725GHz-5.85GHz) **TX CH149**



## **TX CH157**



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 76 of 94 Report No.: TW2305193-04E

Date: 2023-06-05






Date: 2023-06-05



## 802.11n(40M) (5.725GHz-5.85GHz) TX CH151



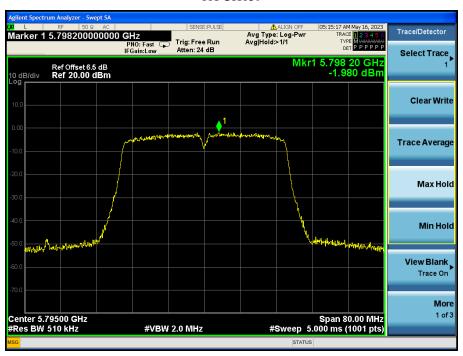

Date: 2023-06-05



## 802.11ac(40M) (5.725GHz-5.85GHz) TX CH151





Page 79 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



## 802.11ac(80M) (5.725GHz-5.85GHz) TX CH155



Page 80 of 94 Report No.: TW2305193-04E

Date: 2023-06-05



Test Mode	Channel	Channel Frequency (MHz)	Power Density (dBm/MH) ANT 1	Power Density (dBm/MHz) ANT 2	Total Power Density (dBm/M Hz)	Limit (dBm/M Hz)	Result
802.11a	Low	5180	2.547	2.021		11	Pass
	Middle	5200	2.454	2.874		11	Pass
	Highest	5240	3.196	3.113		11	Pass
802.11n(20M)	Low	5180	0.285	0.574	3.44	9.75	Pass
	Middle	5200	0.318	0.789	3.57	9.75	Pass
	Highest	5240	1.458	1.557	4.52	9.75	Pass
	Low	5180	1.039	1.574	4.33	9.75	Pass
802.11ac(20M)	Middle	5200	0.360	0.663	3.52	9.75	Pass
	Highest	5240	1.332	1.741	4.55	9.75	Pass
802.11n(40M)	Low	5190	-2.119	-2.358	0.77	9.75	Pass
	Highest	5230	-1.888	-2.126	1.00	9.75	Pass
802.11ac(40M)	Low	5190	-2.799	-2.903	0.16	9.75	Pass
	Highest	5230	-1.634	-1.717	1.33	9.75	Pass
802.11ac(80M)		5210	-5.183	-5.328	-2.24	9.75	Pass

Note: For MIMO mode: Directional gain=GANT +10log(N)dBi =7.25dBi Limit =11-7.25+6=9.75 dBm.

Date: 2023-06-05



## 802.11a (5.15GHz-5.25GHz) The Lowest Channel 36: 5180MHz



802.11a (5.15GHz-5.25GHz) The Middle Channel 40: 5200MHz



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2023-06-05



## 802.11a (5.15GHz-5.25GHz) The Highest Channel 48: 5240MHz




802.11n(20M) (5.15GHz-5.25GHz) The Lowest Channel 36: 5180MHz

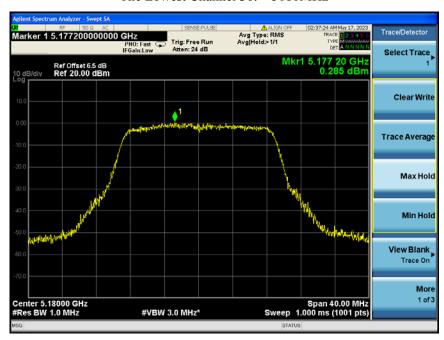

Date: 2023-06-05



## 802.11n(20M) (5.15GHz-5.25GHz) The Middle Channel 40: 5200MHz

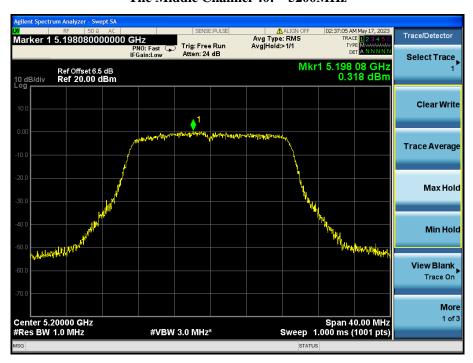

802.11n(20M) (5.15GHz-5.25GHz) The Highest Channel 48: 5240MHz



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2023-06-05



## 802.11ac (5.15GHz-5.25GHz) The Lowest Channel 36: 5180MHz

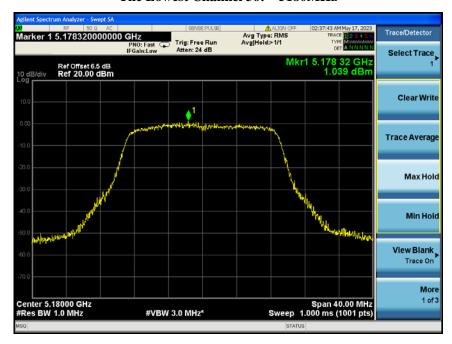

802.11ac (5.15GHz-5.25GHz) The Middle Channel 40: 5200MHz

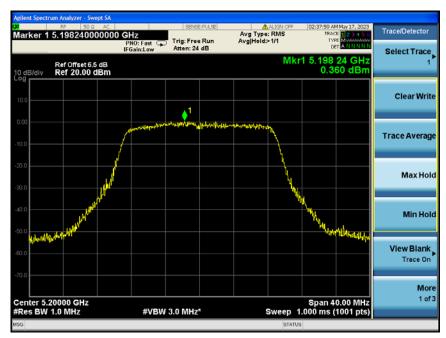


Date: 2023-06-05



## 802.11ac (5.15GHz-5.25GHz) The Highest Channel 48: 5240MHz




802.11n(40M) (5.15GHz-5.25GHz) The Lowest Channel 38: 5190MHz

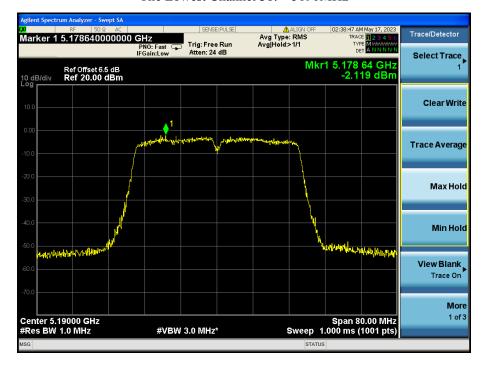


Date: 2023-06-05



# 802.11n(40M) (5.15GHz-5.25GHz) The Highest Channel 46: 5230MHz

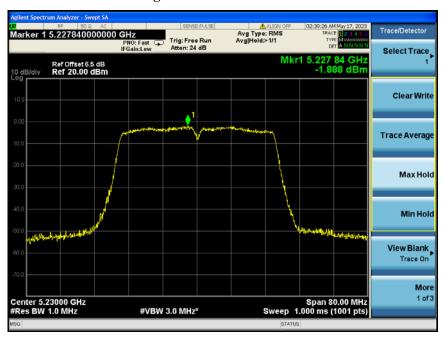


802.11ac(40M) (5.15GHz-5.25GHz) The Lowest Channel 38: 5190MHz

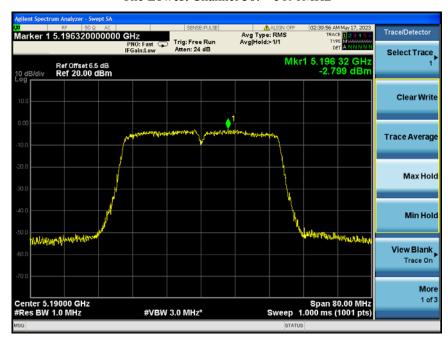

Date: 2023-06-05



## 802.11ac(40M) (5.15GHz-5.25GHz) The Highest Channel 46: 5230MHz

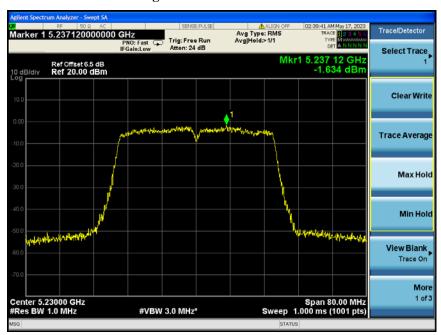

802.11ac(80M) (5.15GHz-5.25GHz) The Lowest Channel 42: 5210MHz



Date: 2023-06-05



Page 88 of 94

## 10.0 Frequency Stability

#### 10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

#### 10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Page 89 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



#### 10.3 Test Result

## **Channel 36 (5180MHz)**

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
120V~	5180.0457
108V~	5180.0428
132V~	5180.0430
Max. Deviation (MHz)	0.0457
Max. Deviation (ppm)	8.82

Rated working voltage: 120V~

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5180.0436
-20	5180.0446
-10	5180.0429
0	5180.0436
10	5180.0441
20	5180.0428
30	5180.0430
40	5180.0445
50	5180.0450
Max. Deviation (MHz)	0.0450
Max. Deviation (ppm)	8.69

Page 90 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



## **Channel 149 (5745MHz)**

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
120V~	5745.0527
108V~	5745.0534
132V~	5745.0519
Max. Deviation (MHz)	0.0534
Max. Deviation (ppm)	9.29

Rated working voltage: 120V~

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5745.0533
-20	5745.0520
-10	5745.0528
0	5745.0534
10	5745.0521
20	5745.0532
30	5745.0524
40	5745.0520
50	5745.0527
Max. Deviation (MHz)	0.0533
Max. Deviation (ppm)	9.28

Date: 2023-06-05



Page 91 of 94

## 11.0 Antenna Requirement

## 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

## 11.2 Antenna Connected construction

Two Dipole antenna used with reverse polarity antenna connectors. The gain of each antenna is 4.24dBi for 5G Band 1 and 2.25dBi for 5G Band 4 (Get from the antenna specification)

Report No.: TW2305193-04E Page 92 of 94

Date: 2023-06-05




#### 12.0 FCC Label

## FCC ID: H79-023DS3

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

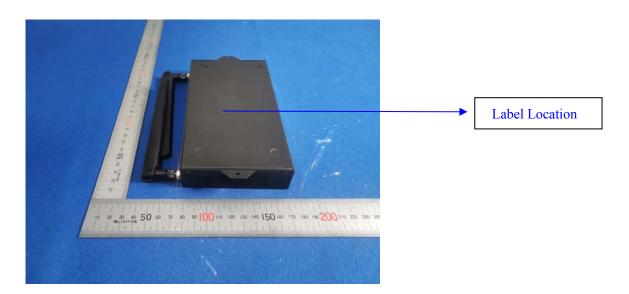

Page 93 of 94

Report No.: TW2305193-04E

Date: 2023-06-05



#### 13.0 Photo of testing


Conducted Emission Test Setup:



Date: 2023-06-05



Radiated Emission Test Setup:

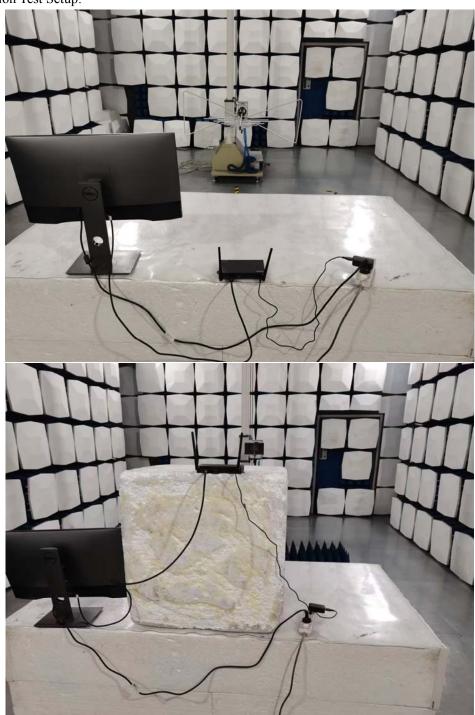

## **Photos of EUT**

Please see test report TW2305193-01E

## -- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.