



FCC 47 CFR PART 15 SUBPART C

for

NovoCast

Model: NC1000, WCS-1000, WCS-1100, WCS-1200

Brand: DELTA, VIVITEK

Test Report Number:

C180413Z01-RP1-3

Issued Date: May 21, 2018

Issued for

Delta Electronic Incorporated

3 Tungyung rd., Chungli Industrial Zone, Taoyuan County 32063 Taiwan

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd.,

Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com



中国认可
国际互认
检测
TESTING
CNAS L4818



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 21, 2018	Initial Issue	ALL	Amzula Chen



TABLE OF CONTENTS

1 TEST CERTIFICATION 4

2 TEST RESULT SUMMARY 5

3 EUT DESCRIPTION..... 6

4 TEST METHODOLOGY..... 7

 4.1. DESCRIPTION OF TEST MODES7

5 SETUP OF EQUIPMENT UNDER TEST 8

 5.1. DESCRIPTION OF SUPPORT UNITS8

 5.2. CONFIGURATION OF SYSTEM UNDER TEST8

6 FACILITIES AND ACCREDITATIONS 9

 6.1. FACILITIES.....9

 6.2. ACCREDITATIONS.....9

 6.3. MEASUREMENT UNCERTAINTY9

7 FCC PART 15.247 REQUIREMENTS 10

 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT10

 7.2. SPURIOUS EMISSIONS MEASUREMENT17

 7.3. 6dB BANDWIDTH MEASUREMENT53

 7.4. ANTENNA GAIN61

 7.5. PEAK OUTPUT POWER.....62

 7.6. BAND EDGES MEASUREMENT64

 7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT82



1 TEST CERTIFICATION

Product	NovoCast
Model	NC1000, WCS-1000, WCS-1100, WCS-1200
Brand	DELTA, VIVITEK
Tested	April 13~May 21, 2018
Applicant	Delta Electronic Incorporated 3 Tungyung rd., Chungli Industrial Zone, Taoyuan County 32063 Taiwan
Manufacturer	Delta Electronic Incorporated 3 Tungyung rd., Chungli Industrial Zone, Taoyuan County 32063 Taiwan

APPLICABLE STANDARDS			
Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Eve Wang
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Nancy Fu
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	<ul style="list-style-type: none">● Spurious Emissions● Conducted Measurement● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	NovoCast
Model Number	NC1000, WCS-1000, WCS-1100, WCS-1200
Brand	DELTA, VIVITEK
Model Discrepancy	All models are identical to each other except their model name.
Identify Number	C180413Z01-RP1-3
Received Date	April 13, 2018
Power Supply	DC5.35V supplied by the Adapter
Adapter Specification	DELTA ELECTRONICS, INC. MODEL: ADP-10HW A INPUT: 100-240Vac 0.4A 50/60Hz OUTPUT: 5.35Vdc 2A
USB Cable	Unshielded, 1.00m
Transmit Power	IEEE 802.11b mode: 17.11dBm IEEE 802.11g mode: 23.94dBm IEEE 802.11n HT20 MHz mode: 23.90Bm IEEE 802.11n HT40 MHz mode: 18.61Bm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	IEEE 802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps IEEE 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/9 /6Mbps IEEE 802.11n HT20: 65Mbps with fall back rates of 65/58.5/52/ 39/26/19.5/13/6.5Mbps IEEE 802.11n HT40: 135Mbps with fall back rates of 135/121.5/108/ 81/54/40.5/27/13.5Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Dipole Antenna with 3.02dBi gain (Max)
Channels Spacing	IEEE 802.11b/g ,802.11n HT20/HT40 : 5MHz
Temperature Range	0°C ~ +45°C
Hardware Version	V1.4
Software Version	V1.X

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: H79-18D7EA3 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Used the “EngineerMode” software to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Full system (AC120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 2: Full system (AC240V/50Hz)	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: Continuously Transmitting	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode.

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Earphone	G-3	N/A	DoC	GSG	Shielded 1.20m	N/A
2	Mouse	KB212-B	N/A	DoC	DELL	Unshielded 1.45m	N/A
3	Monitor	U3014t	N/A	DoC	DELL	Unshielded 1.50m	Unshielded 1.50m
4	Note book	Thinkpad X270	N/A	DoC	LENOVO	Shielded 3.00m	Unshielded 1.00m (AC cable) Shielded 1.80m (DC cable)

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI (C-4815,R-4320,T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	01/27/2018	01/26/2019
LISN	EMCO	3825/2	8901-1459	01/27/2018	01/26/2019
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

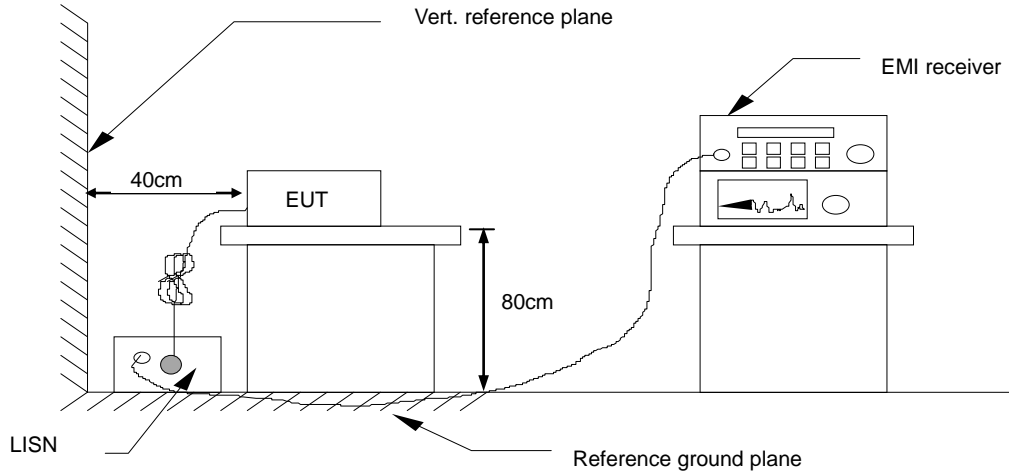

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.5. DATA SAMPLE


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Model No.	NC1000	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Sam Zeng	Line	L1
Test Date	April 3, 2018	Test Voltage	AC 120V/60Hz

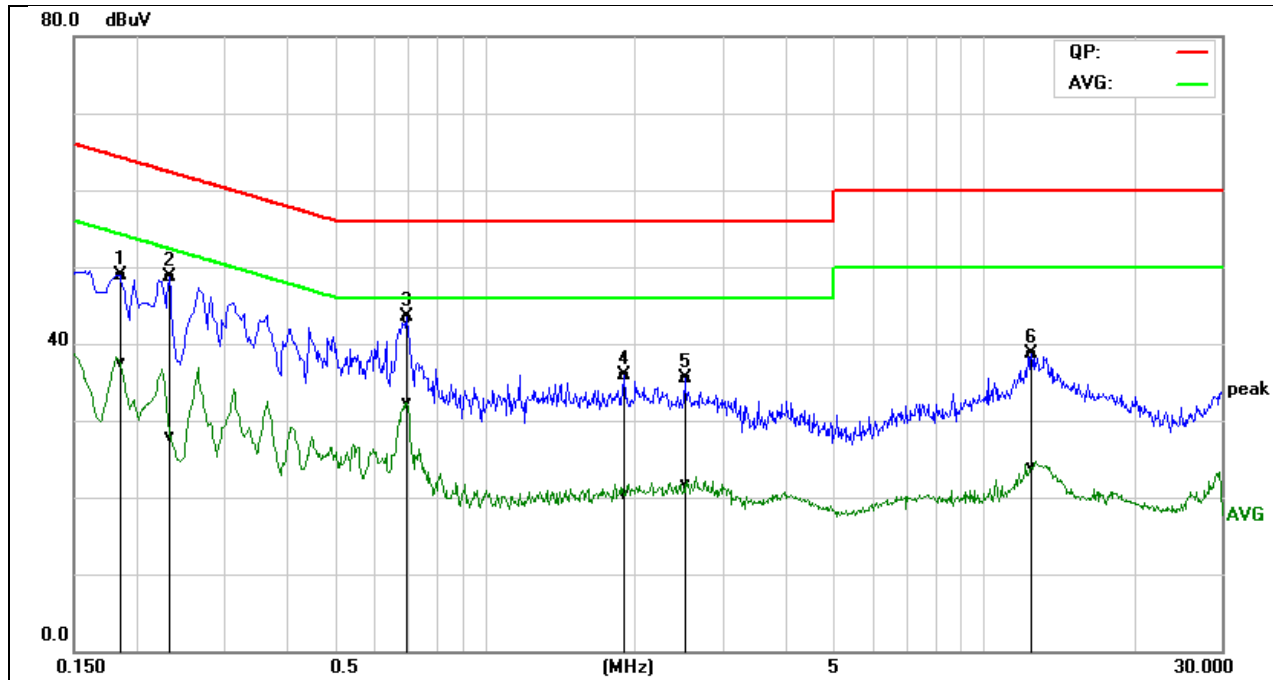


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1860	29.21	17.88	19.63	48.84	37.51	64.21	54.21	-15.37	-16.70	Pass
0.2340	29.09	8.28	19.63	48.72	27.91	62.30	52.31	-13.58	-24.40	Pass
0.6980	23.79	12.76	19.61	43.40	32.37	56.00	46.00	-12.60	-13.63	Pass
1.9060	16.23	0.51	19.70	35.93	20.21	56.00	46.00	-20.07	-25.79	Pass
2.5180	15.75	1.99	19.72	35.47	21.71	56.00	46.00	-20.53	-24.29	Pass
12.4860	18.58	3.81	20.08	38.66	23.89	60.00	50.00	-21.34	-26.11	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	NC1000	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Sam Zeng	Line	L2
Test Date	April 3, 2018	Test Voltage	AC 120V/60Hz

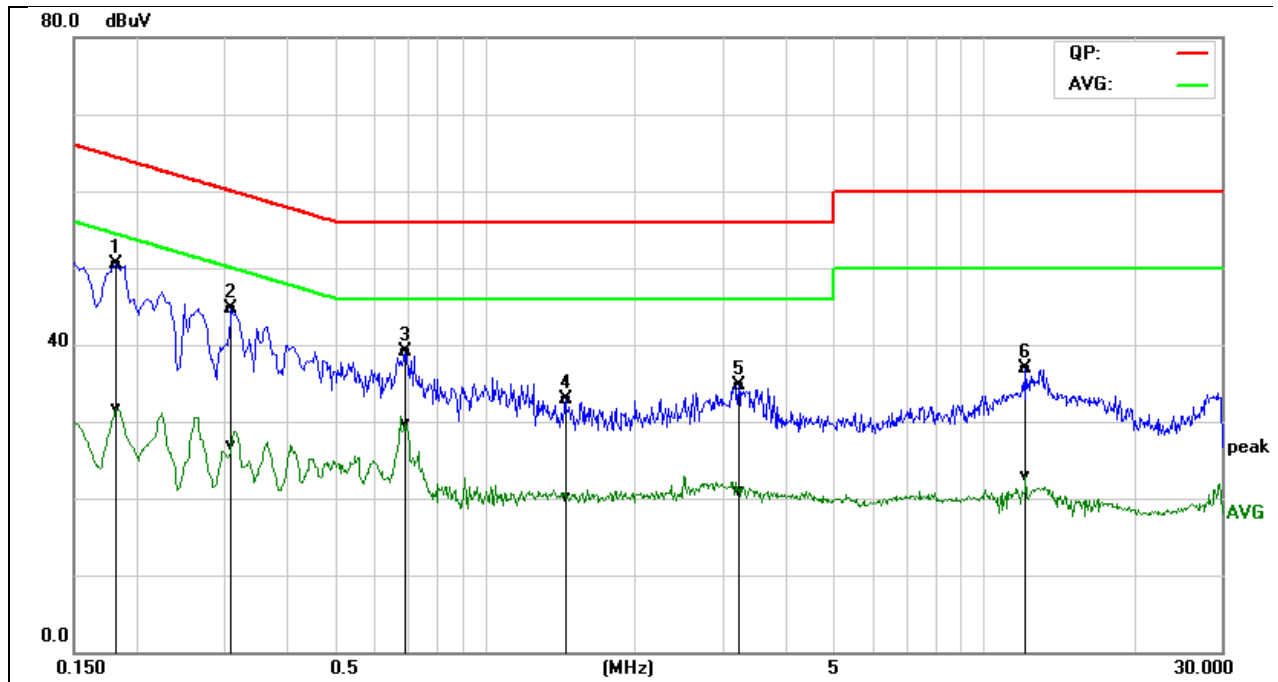


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1819	30.92	12.17	19.53	50.45	31.70	64.39	54.40	-13.94	-22.70	Pass
0.3100	25.09	7.33	19.54	44.63	26.87	59.97	49.97	-15.34	-23.10	Pass
0.6900	19.50	10.03	19.61	39.11	29.64	56.00	46.00	-16.89	-16.36	Pass
1.4540	13.19	0.42	19.63	32.82	20.05	56.00	46.00	-23.18	-25.95	Pass
3.2260	15.04	1.12	19.76	34.80	20.88	56.00	46.00	-21.20	-25.12	Pass
12.1780	16.81	2.72	20.09	36.90	22.81	60.00	50.00	-23.10	-27.19	Pass

REMARKS: L2 = Line Two (Neutral Line)



Model No.	NC1000	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Sam Zeng	Line	L1
Test Date	April 3, 2018	Test Voltage	AC 240V/50Hz

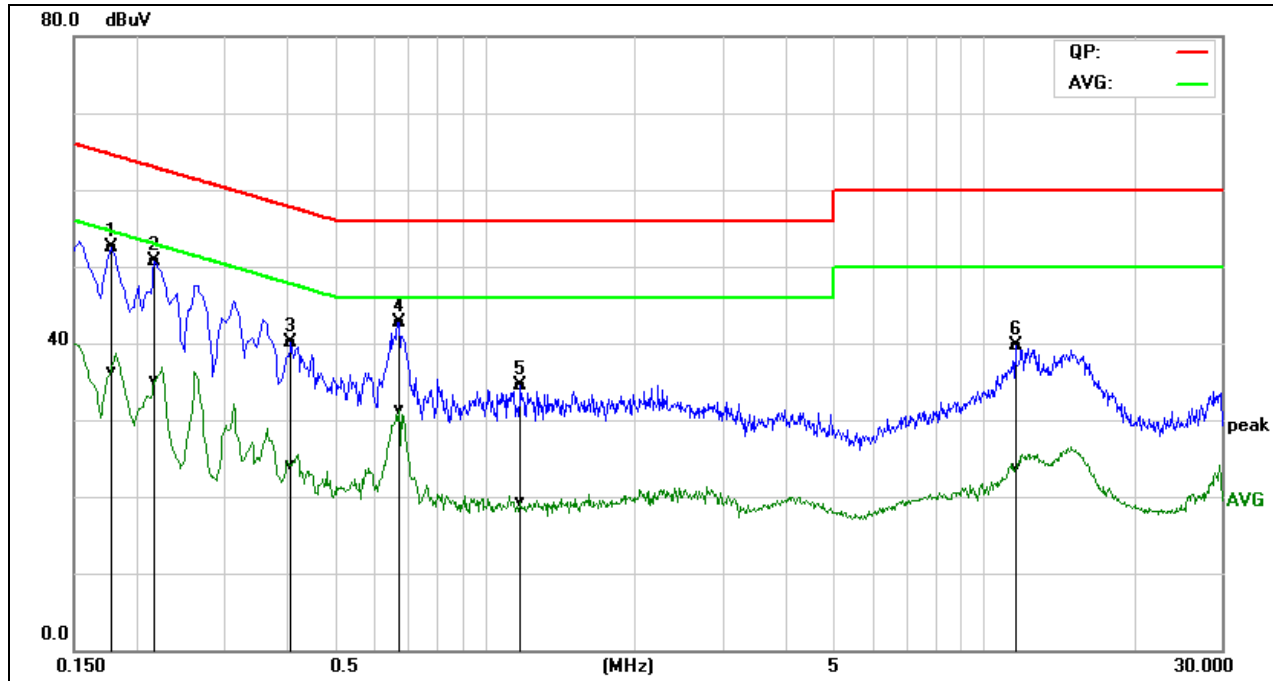


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1780	32.96	16.75	19.63	52.59	36.38	64.57	54.58	-11.98	-18.20	Pass
0.2180	31.01	15.47	19.63	50.64	35.10	62.89	52.89	-12.25	-17.79	Pass
0.4100	20.64	4.48	19.56	40.20	24.04	57.65	47.65	-17.45	-23.61	Pass
0.6740	23.12	11.76	19.60	42.72	31.36	56.00	46.00	-13.28	-14.64	Pass
1.1820	14.89	-0.37	19.58	34.47	19.21	56.00	46.00	-21.53	-26.79	Pass
11.6059	19.63	3.67	20.10	39.73	23.77	60.00	50.00	-20.27	-26.23	Pass

REMARKS: L1 = Line One (Live Line)



Model No.	NC1000	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Sam Zeng	Line	L2
Test Date	April 3, 2018	Test Voltage	AC 240V/50Hz

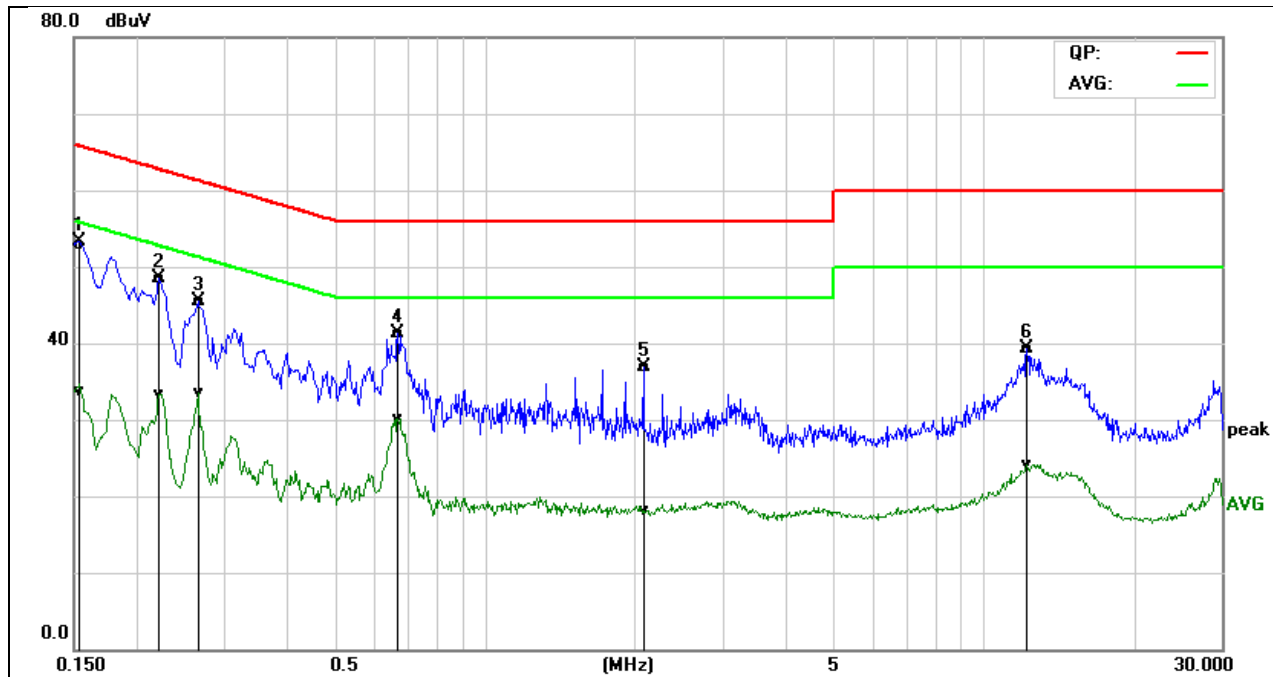

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1556	33.48	14.22	19.52	53.00	33.74	65.69	55.70	-12.69	-21.96	Pass
0.2220	28.89	13.84	19.54	48.43	33.38	62.74	52.74	-14.31	-19.36	Pass
0.2660	26.00	13.94	19.54	45.54	33.48	61.24	51.24	-15.70	-17.76	Pass
0.6700	21.77	10.48	19.60	41.37	30.08	56.00	46.00	-14.63	-15.92	Pass
2.0820	17.18	-1.54	19.72	36.90	18.18	56.00	46.00	-19.10	-27.82	Pass
12.2340	19.14	4.08	20.08	39.22	24.16	60.00	50.00	-20.78	-25.84	Pass

REMARKS: L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. CONDUCTED EMISSIONS MEASUREMENT

7.2.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b) (3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.1.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY55370330	01/27/2018	01/26/2019

7.2.1.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz · it is only recorded 10MHz to 26GHz.





7.2.1.4. TEST RESULTS

Test Plot
IEEE 802.11b mode

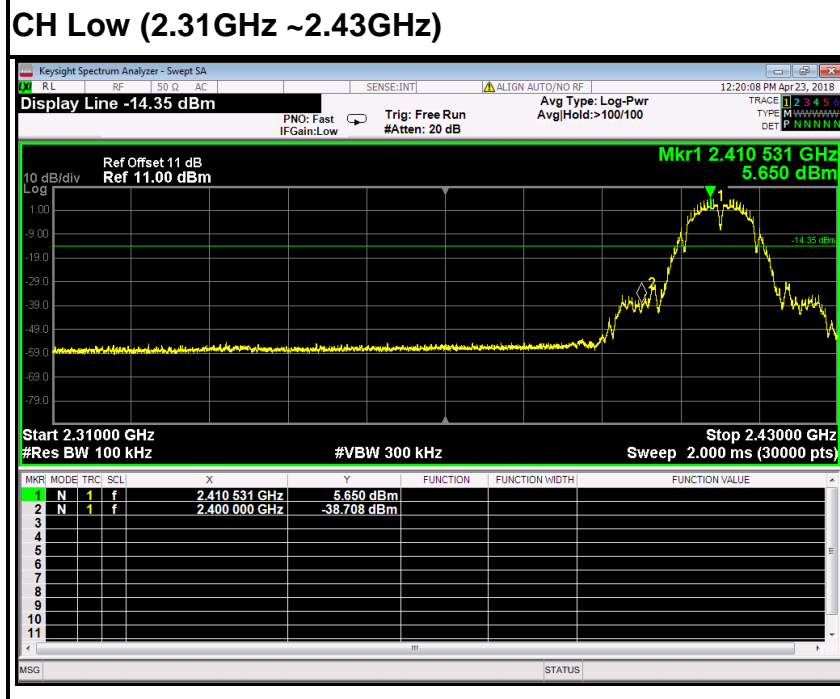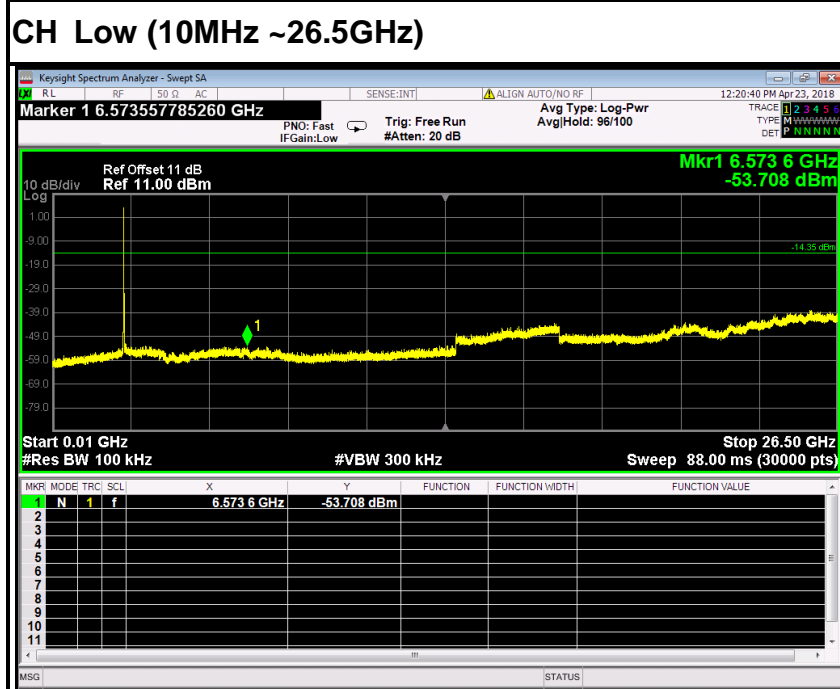

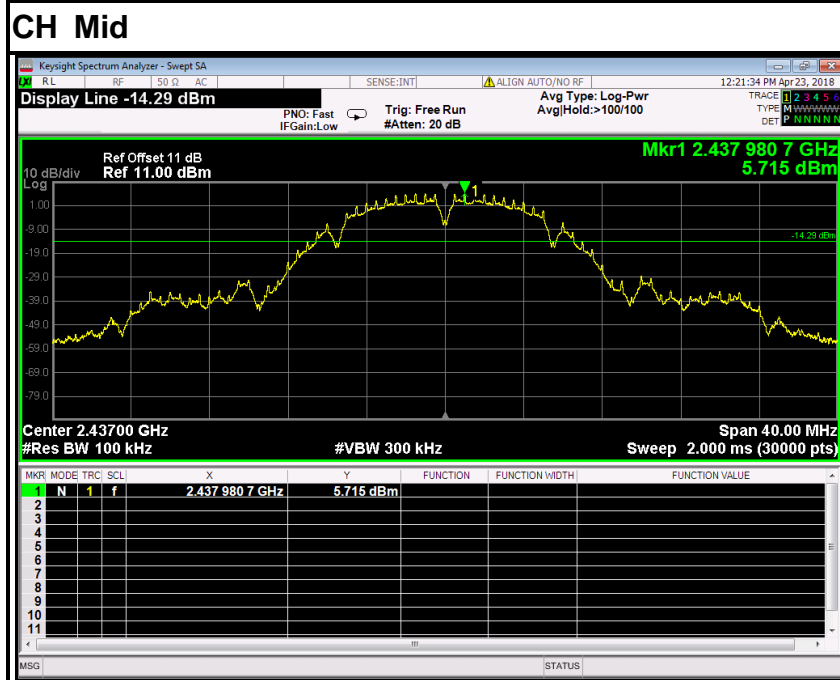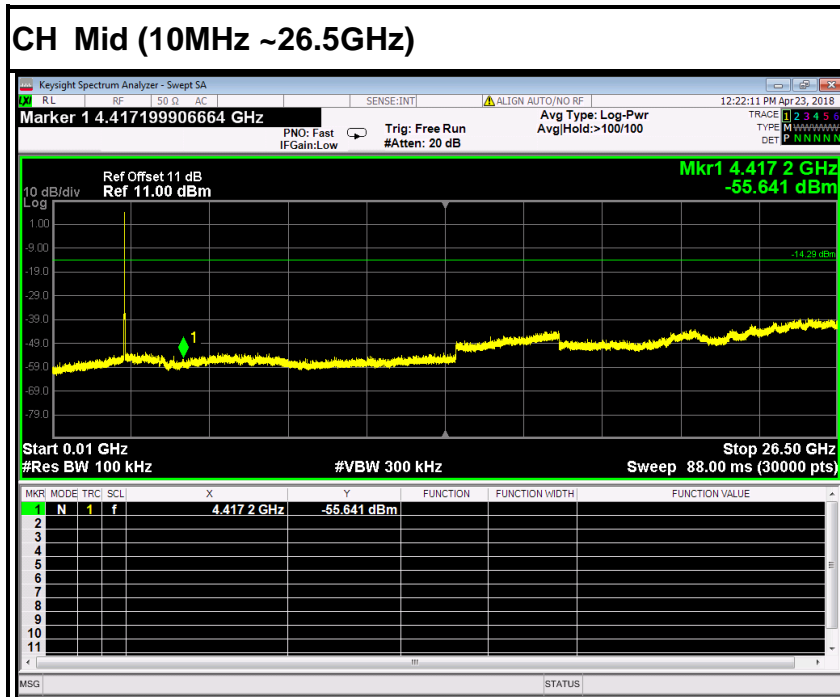


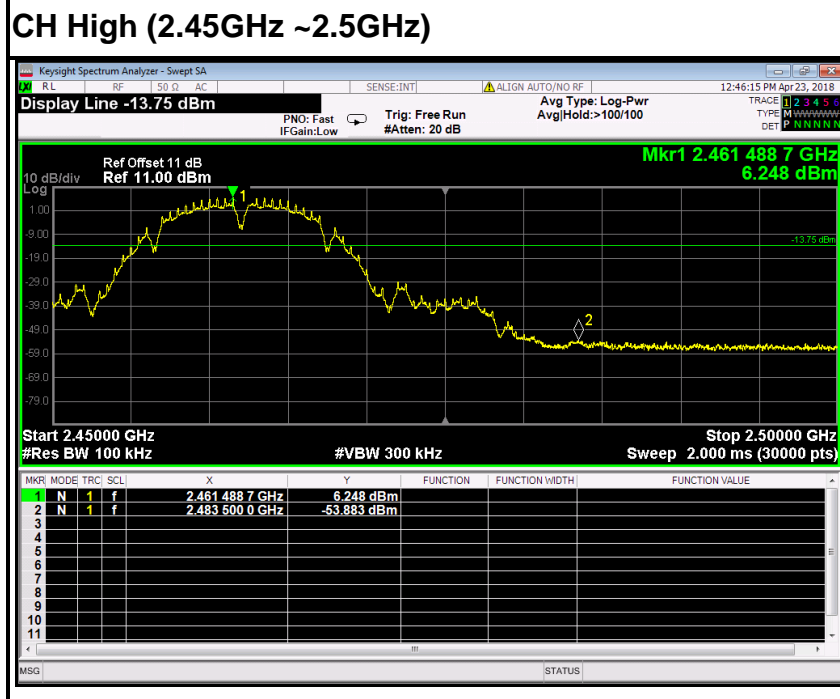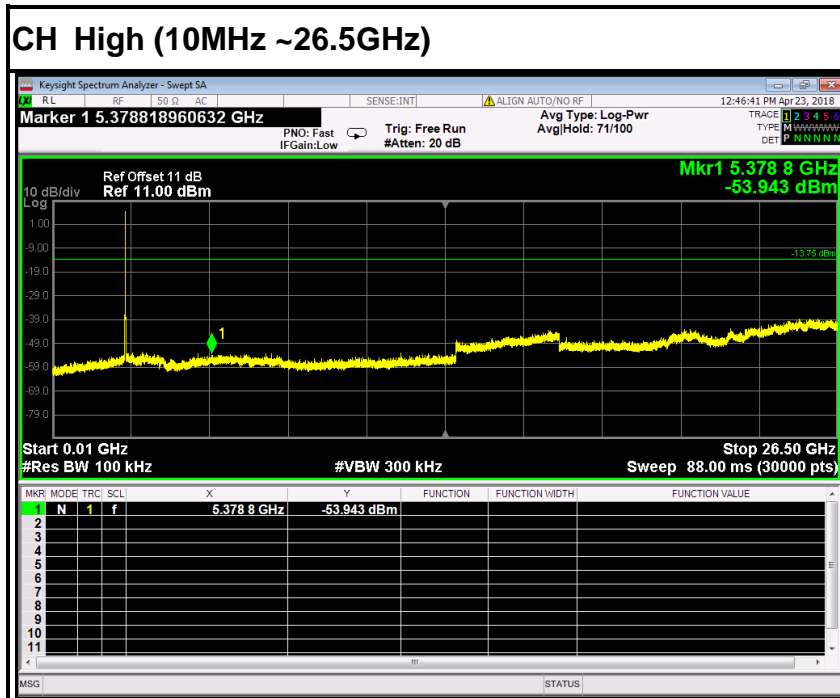






IEEE 802.11g mode



CH Low (10MHz ~26.5GHz)

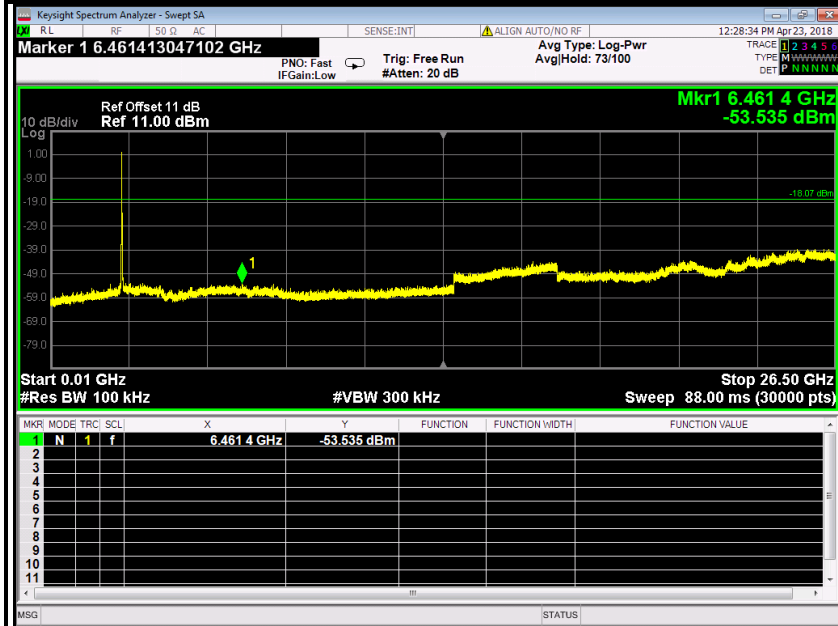

CH Low (2.31GHz ~2.43GHz)

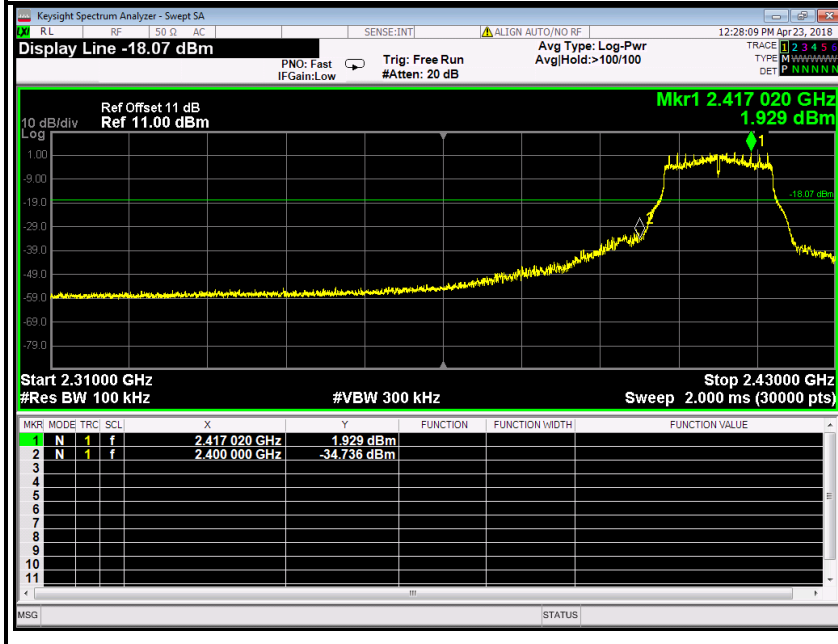

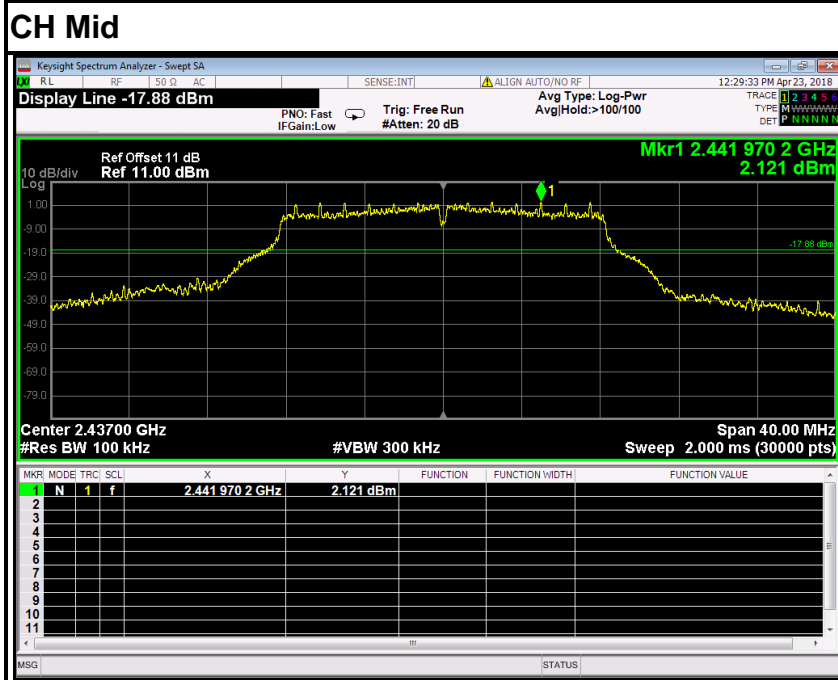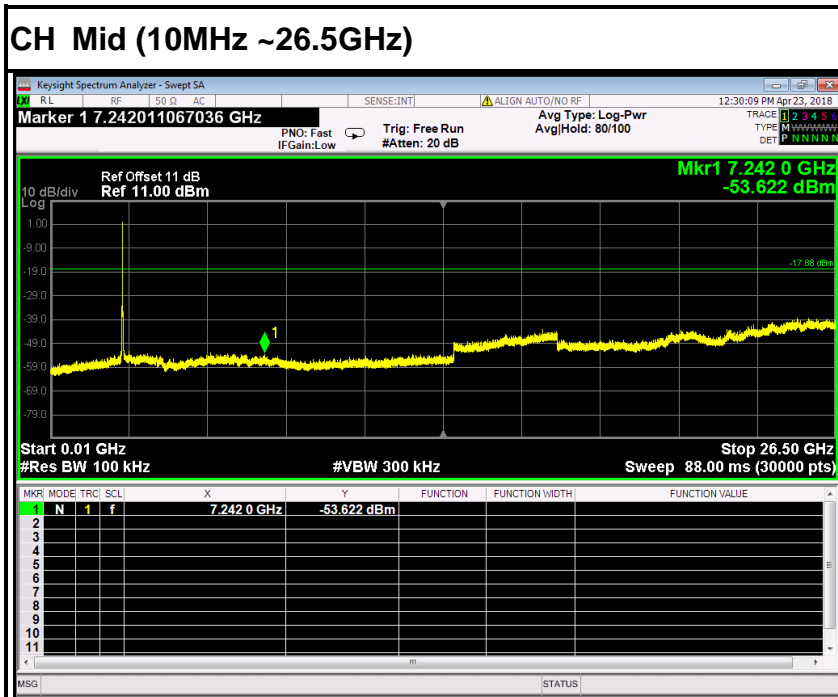


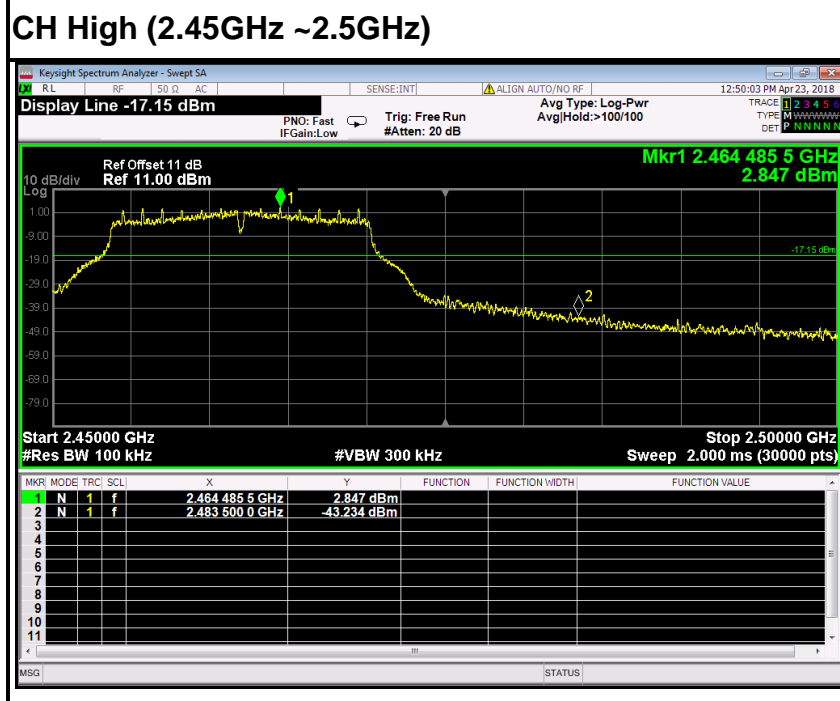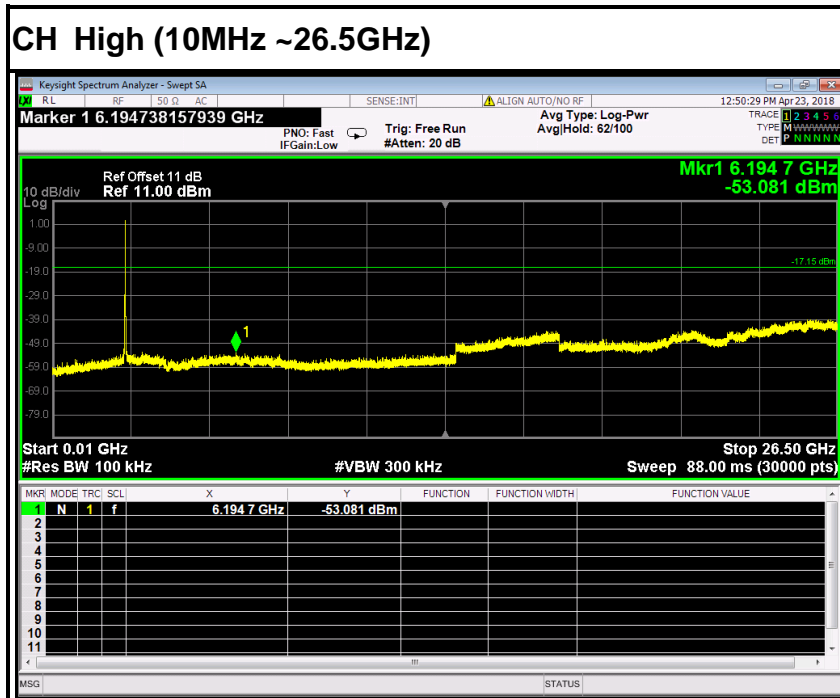






IEEE 802.11n HT20 MHz mode



CH Low (10MHz ~26.5GHz)

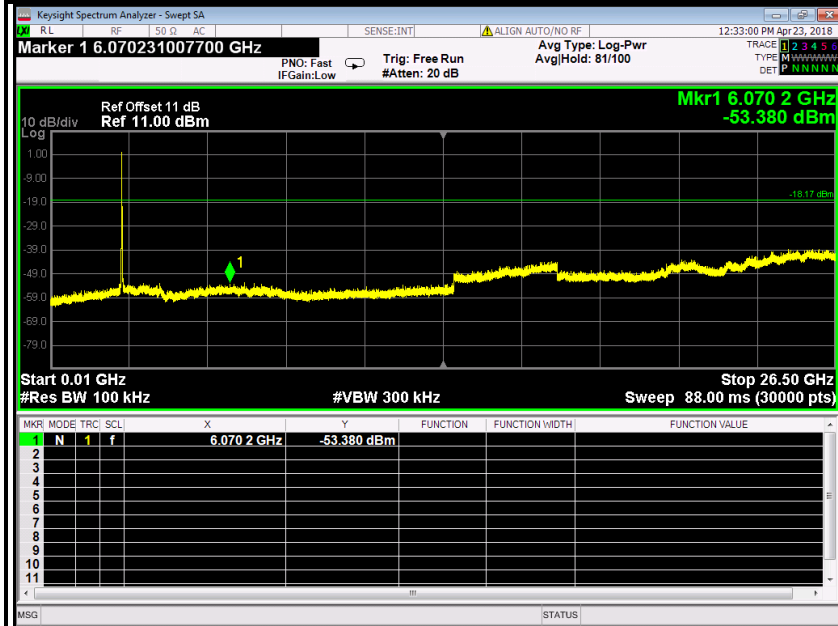

CH Low (2.31GHz ~2.43GHz)


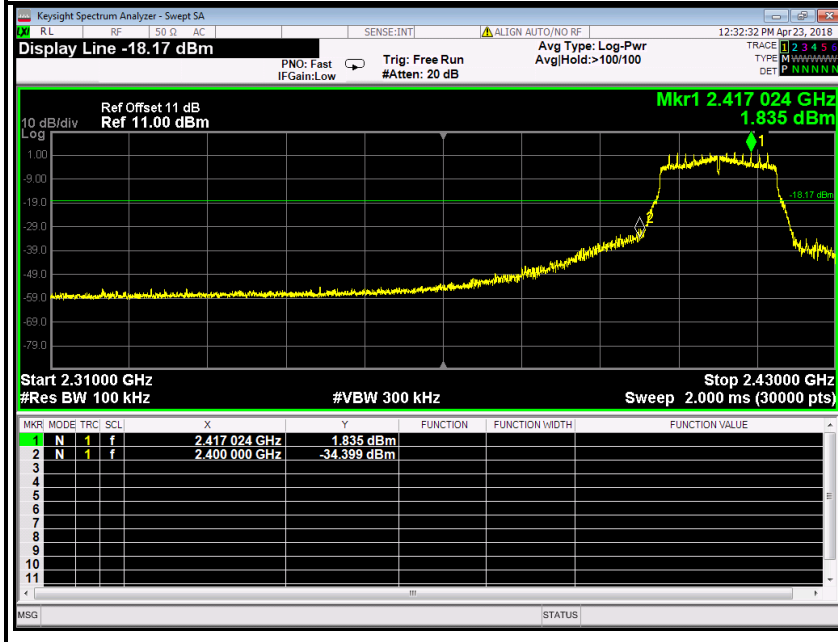


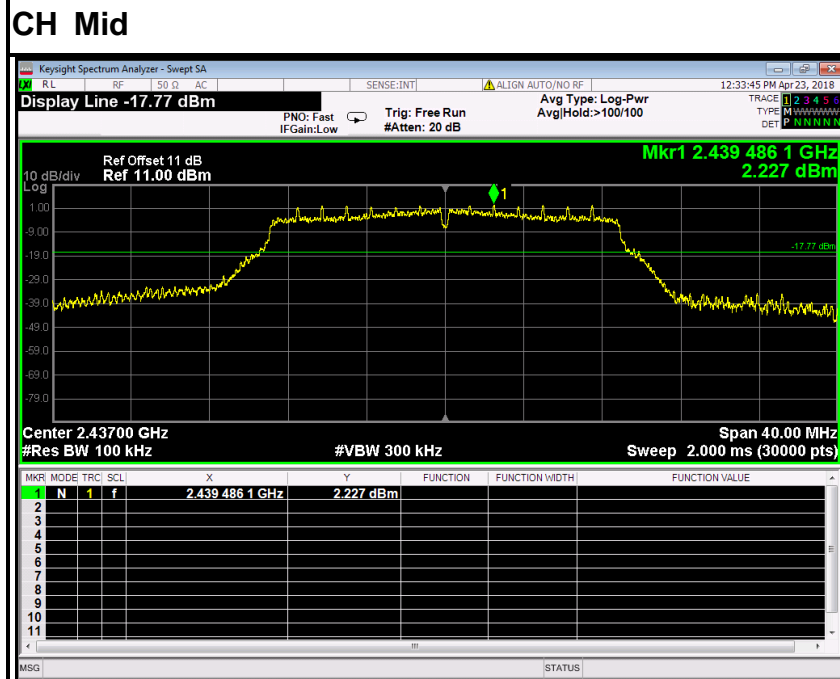
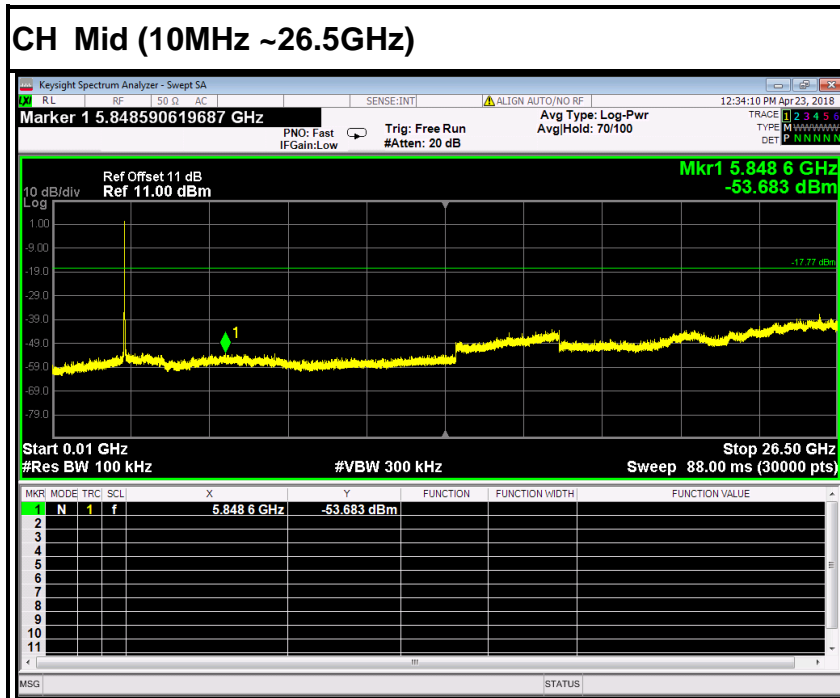


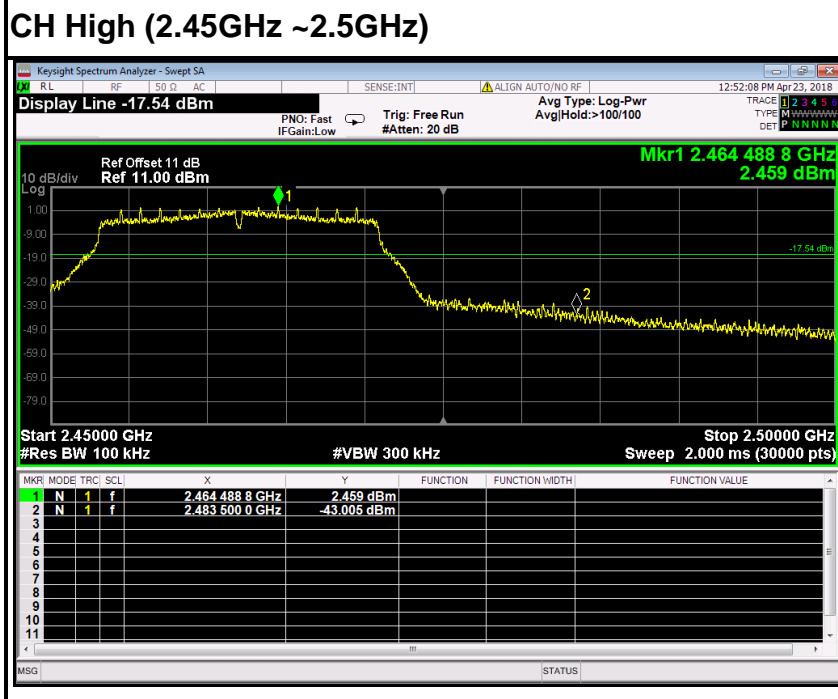
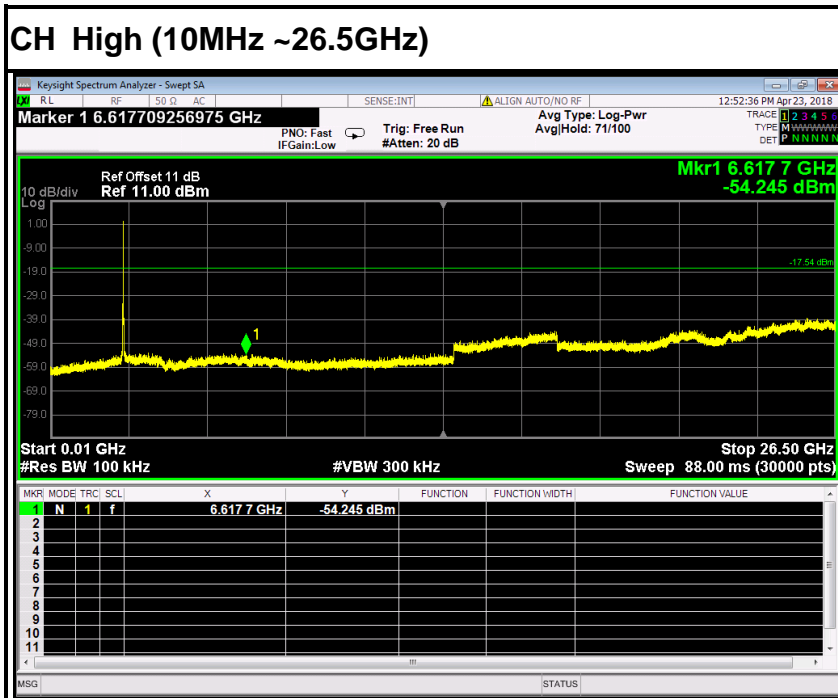




IEEE 802.11n HT40 MHz mode

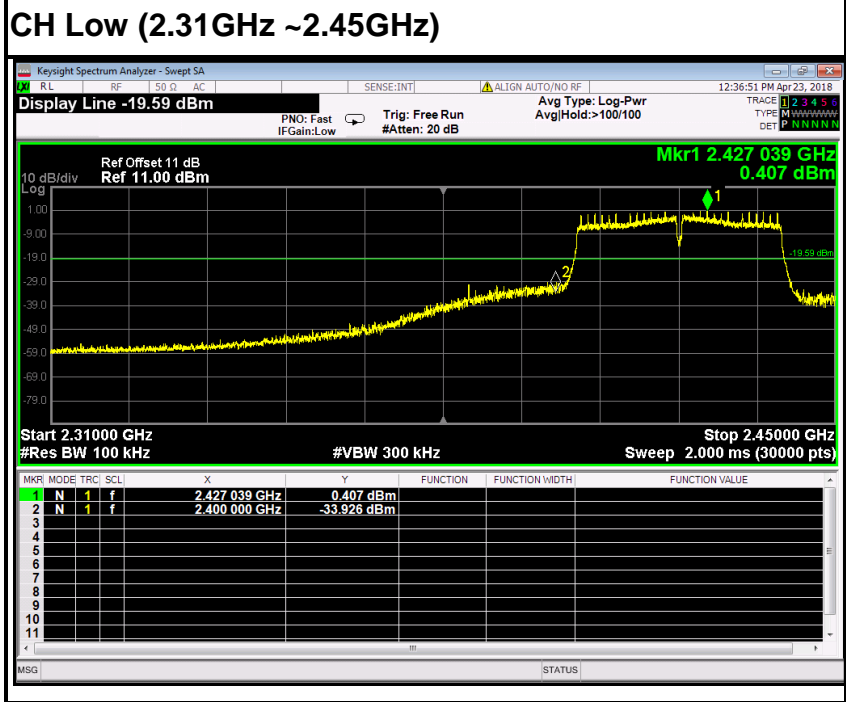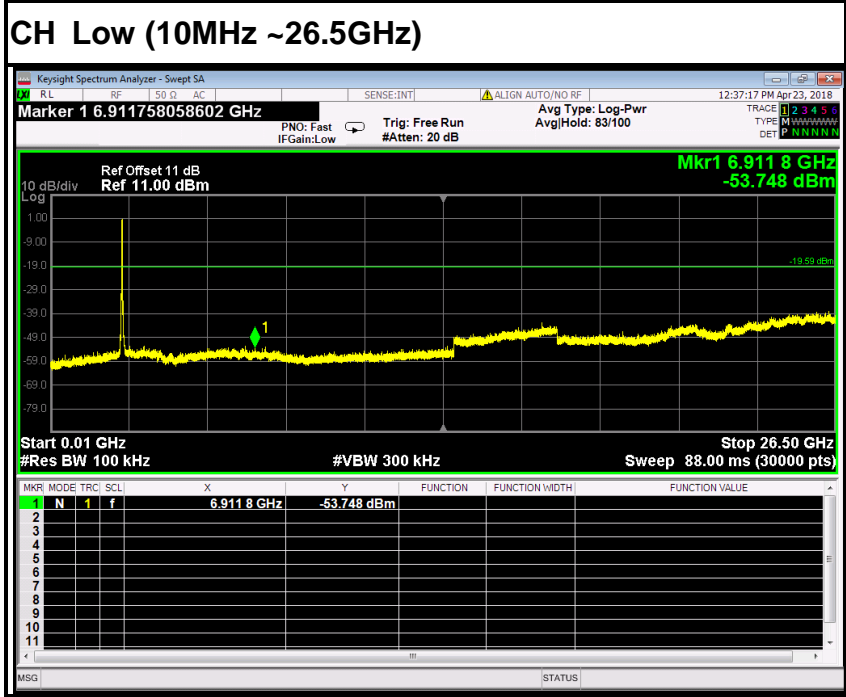

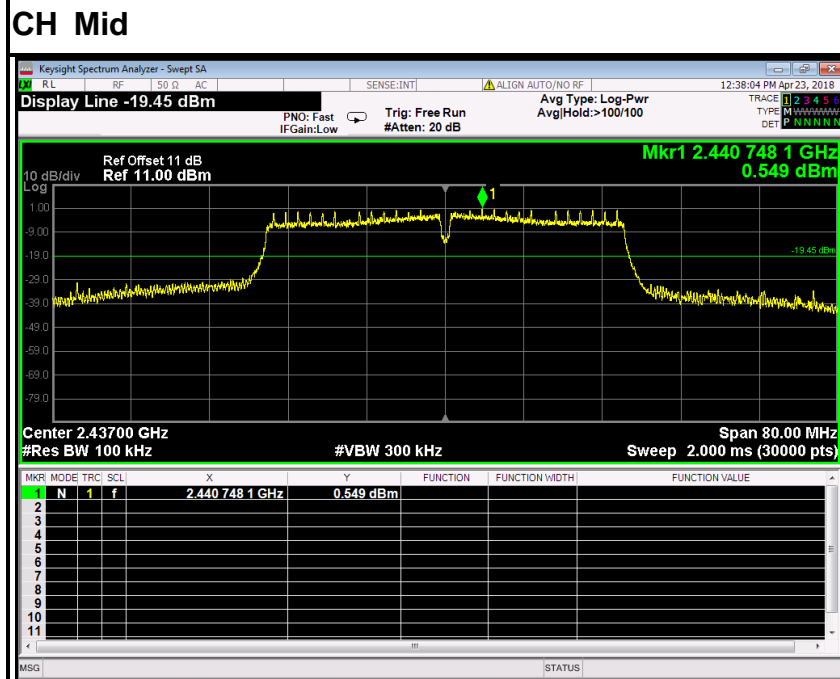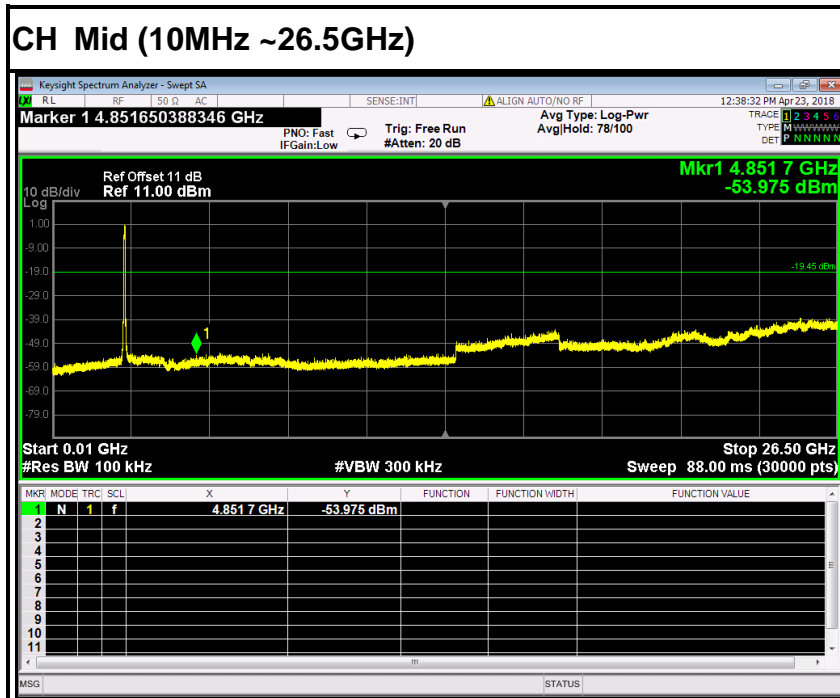

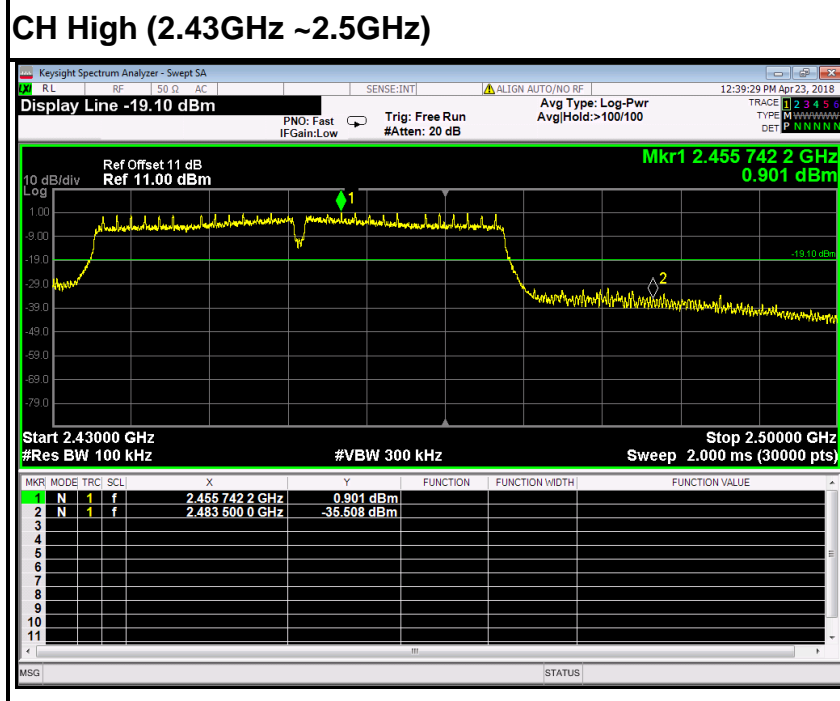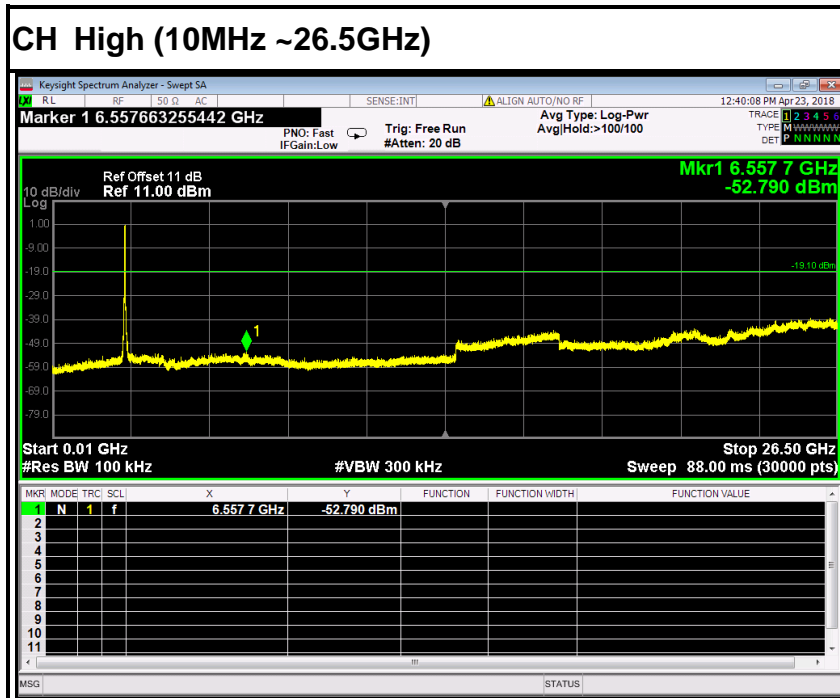



7.2.2. RADIATED EMISSIONS MEASUREMENT

7.2.2.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE:(1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).



7.2.2.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2018	02/20/2019
Amplifier	EMEC	EM330	060661	03/18/2018	03/17/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2018	02/20/2019
Loop Antenna	COM-POWER	AL-130	121044	01/30/2018	01/29/2019
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2018	02/27/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2018	02/27/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The FCC Site Registration number is 101879.
 3. N.C.R = No Calibration Required.



7.2.2.3. Measuring Instruments and Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.2.2.4. TEST PROCEDURE (please refer to measurement standard)

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:


--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.




7.2.2.5. TEST SETUP

Below 30MHz

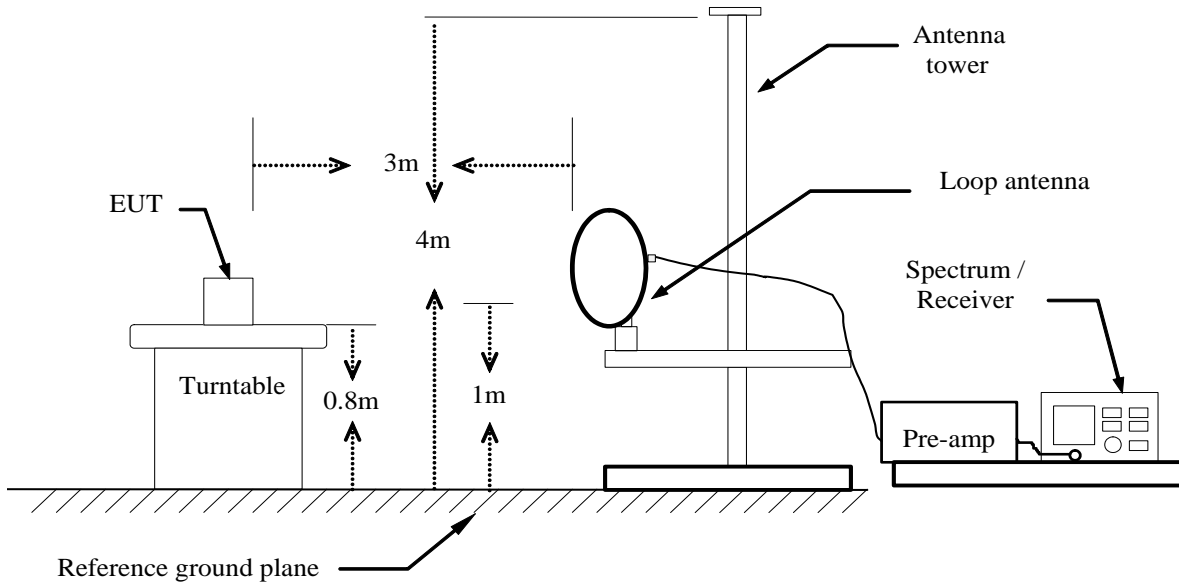


Below 1 GHz

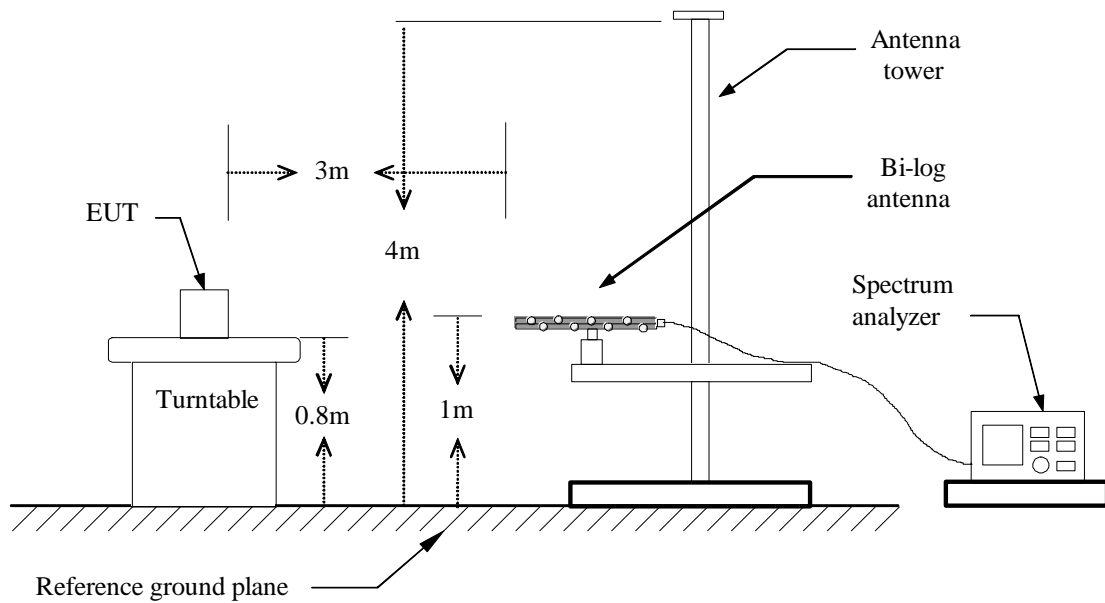



Above 1 GHz

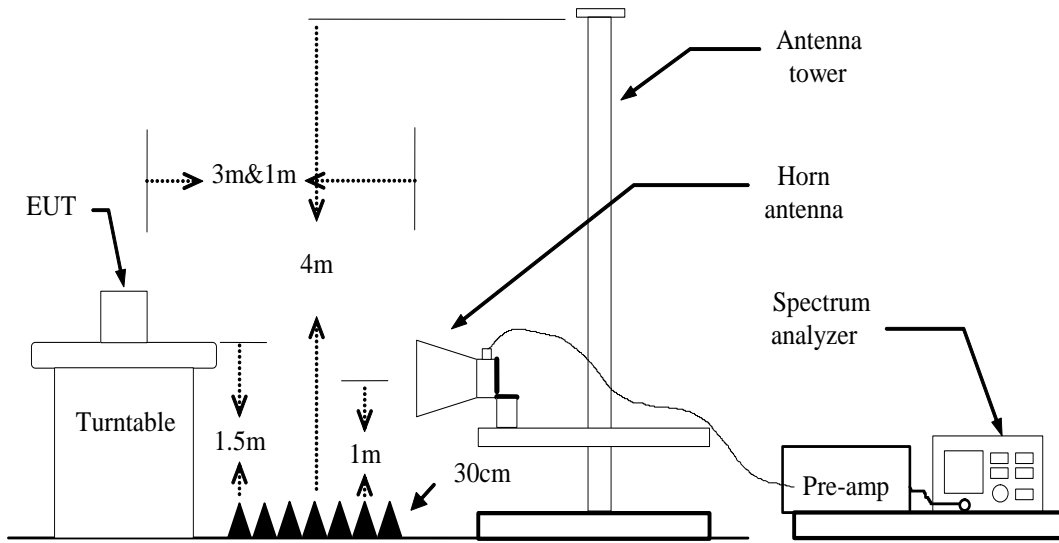

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



7.2.2.6. DATA SAPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	36.37	-12.20	24.17	40.00	-15.83	V	QP

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Q.P. = Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
 Peak = Peak Reading
 AVG = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)
 Result (dBuV/m) = Reading (dBuV) + Correction Factor

**7.2.2.7. TEST RESULTS****Below 1 GHz****Test Mode:** TX / IEEE 802.11b(CH Low)**Tested by:** Sam Zeng**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** April 27, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
103.7200	49.77	-13.92	35.85	43.50	-7.65	V	QP
223.0300	47.50	-10.80	36.70	46.00	-9.30	V	QP
296.7500	47.24	-9.96	37.28	46.00	-8.72	V	QP
392.7800	46.67	-8.48	38.19	46.00	-7.81	V	QP
668.2600	38.90	-4.83	34.07	46.00	-11.93	V	QP
792.4200	48.91	-4.01	44.90	46.00	-1.10	V	QP
197.8100	48.26	-12.35	35.91	43.50	-7.59	H	QP
296.7500	49.37	-9.96	39.41	46.00	-6.59	H	QP
371.4400	47.96	-8.70	39.26	46.00	-6.74	H	QP
392.7800	48.32	-8.48	39.84	46.00	-6.16	H	QP
792.4200	48.51	-4.01	44.50	46.00	-1.50	H	QP
885.5400	37.86	-2.40	35.46	46.00	-10.54	H	QP

Notes:


1. No emission found between lowest internal used/generated frequency to 30MHz.
2. Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel))

Remark:


1. Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.
4. Frequency (MHz). = Emission frequency in MHz
Reading (dBμV/m) = Receiver reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dBμV/m) = Limit stated in standard
Margin (dB) = Measured (dBμV/m) – Limits (dBμV/m)
Antenna Pole (H/V) = Current carrying line of reading



Vertical

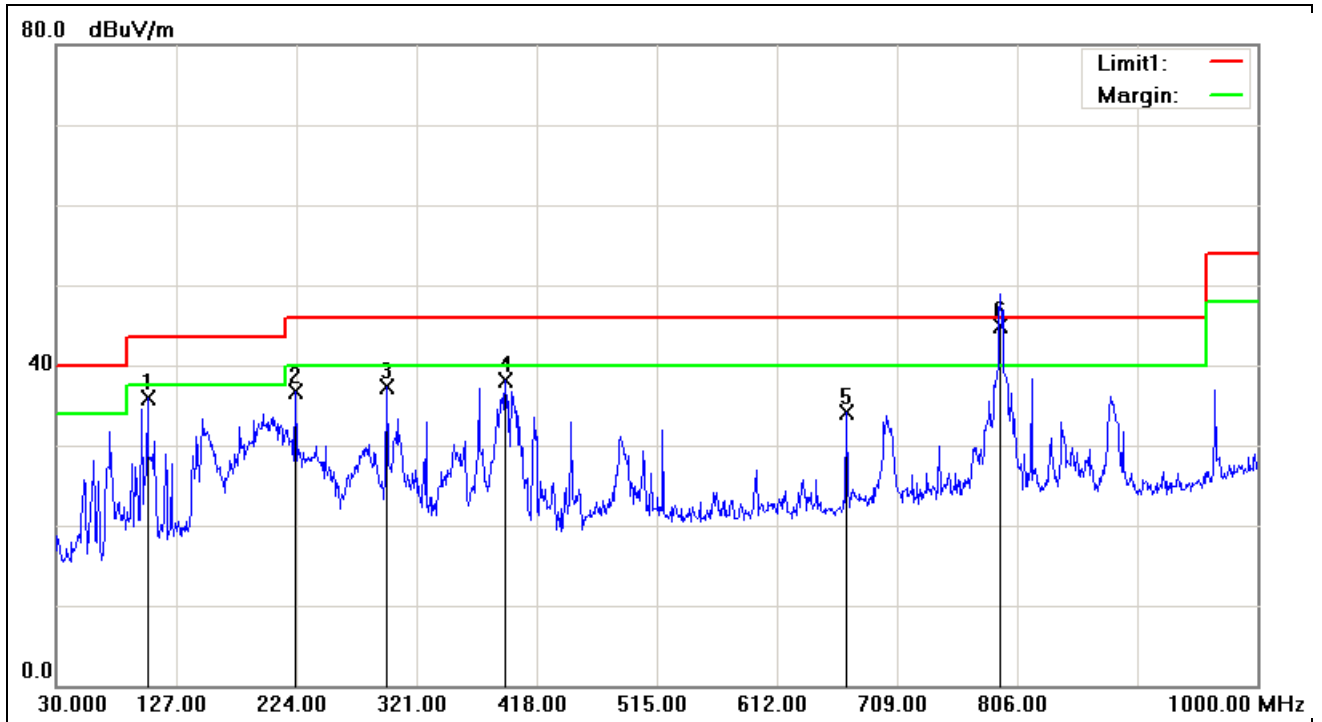

Horizontal

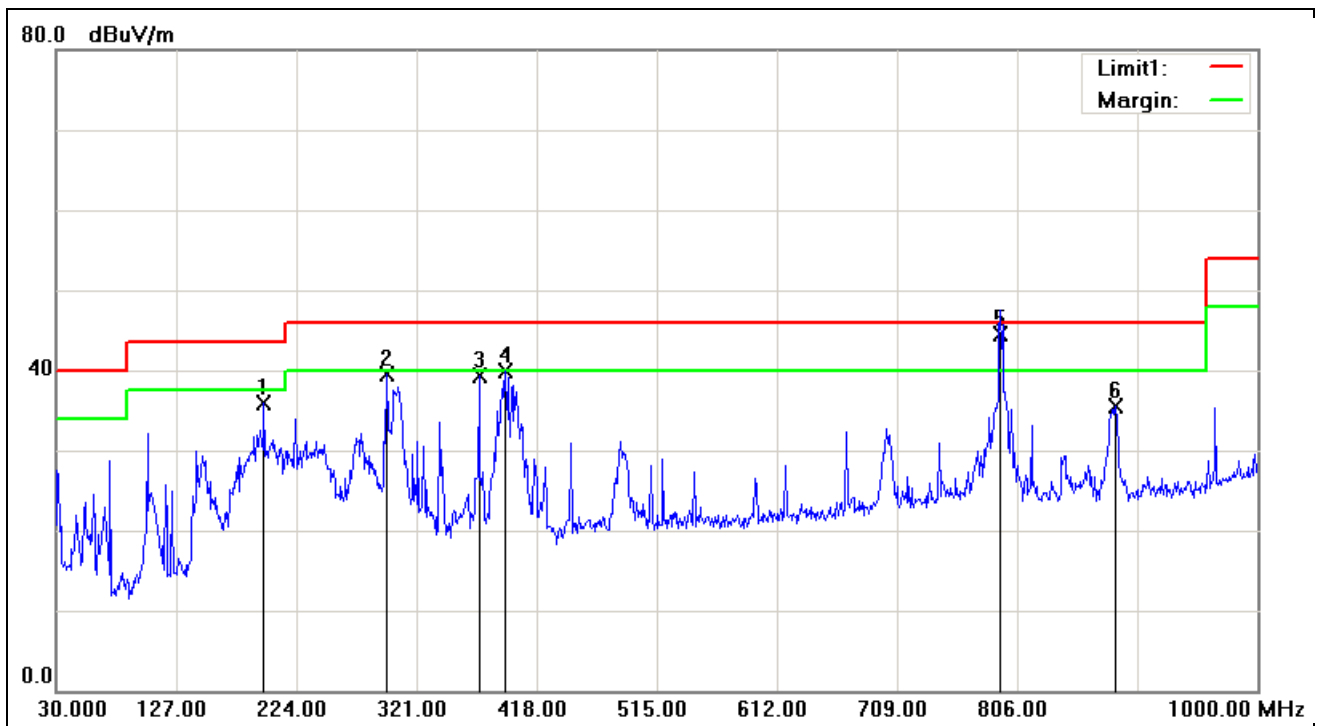



Above 1 GHz

Test Mode: TX / IEEE 802.11b(CH Low)

Tested by: Sam Zeng

Ambient temperature: 24°C **Relative humidity:** 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1180.000	55.85	-7.87	47.98	74.00	-26.02	V	peak
1738.000	49.66	-6.40	43.26	74.00	-30.74	V	peak
1909.000	49.46	-5.58	43.88	74.00	-30.12	V	peak
2674.000	44.93	-1.95	42.98	74.00	-31.02	V	peak
2809.000	44.08	-1.70	42.38	74.00	-31.62	V	peak
3619.000	44.63	-0.02	44.61	74.00	-29.39	V	peak
1189.000	55.31	-7.83	47.48	74.00	-26.52	H	Peak
1891.000	51.27	-5.69	45.58	74.00	-28.42	H	Peak
1981.000	52.12	-5.12	47.00	74.00	-27.00	H	Peak
2638.000	46.31	-2.01	44.30	74.00	-29.70	H	Peak
2935.000	43.49	-1.48	42.01	74.00	-31.99	H	peak
3610.000	43.78	-0.06	43.72	74.00	-30.28	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH Mid)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	55.98	-7.83	48.15	74.00	-25.85	V	Peak
1909.000	53.03	-5.58	47.45	74.00	-26.55	V	Peak
1981.000	48.70	-5.12	43.58	74.00	-30.42	V	Peak
2629.000	45.12	-2.03	43.09	74.00	-30.91	V	Peak
2818.000	43.33	-1.69	41.64	74.00	-32.36	V	Peak
3367.000	43.86	-0.74	43.12	74.00	-30.88	V	Peak
1180.000	52.42	-7.87	44.55	74.00	-29.45	H	Peak
1891.000	49.75	-5.69	44.06	74.00	-29.94	H	Peak
1981.000	54.44	-5.12	49.32	74.00	-24.68	H	Peak
2638.000	45.95	-2.01	43.94	74.00	-30.06	H	Peak
2836.000	43.74	-1.66	42.08	74.00	-31.92	H	Peak
3358.000	43.12	-0.76	42.36	74.00	-31.64	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11b (CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1180.000	55.37	-7.87	47.50	74.00	-26.50	V	Peak
1918.000	50.05	-5.52	44.53	74.00	-29.47	V	Peak
1981.000	48.70	-5.12	43.58	74.00	-30.42	V	Peak
2665.000	46.22	-1.96	44.26	74.00	-29.74	V	Peak
2845.000	44.33	-1.64	42.69	74.00	-31.31	V	Peak
3718.000	42.83	0.40	43.23	74.00	-30.77	V	Peak
1180.000	51.70	-7.87	43.83	74.00	-30.17	H	Peak
1891.000	51.85	-5.69	46.16	74.00	-27.84	H	Peak
1981.000	52.04	-5.12	46.92	74.00	-27.08	H	Peak
2197.000	46.09	-3.92	42.17	74.00	-31.83	H	Peak
2638.000	46.14	-2.01	44.13	74.00	-29.87	H	Peak
2854.000	43.81	-1.62	42.19	74.00	-31.81	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g(CH Low)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	58.30	-7.83	50.47	74.00	-23.53	V	Peak
1981.000	54.67	-5.12	49.55	74.00	-24.45	V	Peak
2251.000	46.38	-3.62	42.76	74.00	-31.24	V	Peak
2665.000	44.95	-1.96	42.99	74.00	-31.01	V	Peak
2809.000	44.58	-1.70	42.88	74.00	-31.12	V	Peak
3961.000	44.72	1.43	46.15	74.00	-27.85	V	Peak
1189.000	53.52	-7.83	45.69	74.00	-28.31	H	Peak
1891.000	52.74	-5.69	47.05	74.00	-26.95	H	Peak
1981.000	51.26	-5.12	46.14	74.00	-27.86	H	Peak
2233.000	45.88	-3.72	42.16	74.00	-31.84	H	Peak
2530.000	45.57	-2.21	43.36	74.00	-30.64	H	Peak
2827.000	44.50	-1.67	42.83	74.00	-31.17	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH Mid)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1180.000	57.28	-7.87	49.41	74.00	-24.59	V	Peak
1279.000	52.12	-7.50	44.62	74.00	-29.38	V	Peak
1981.000	50.43	-5.12	45.31	74.00	-28.69	V	Peak
2530.000	46.04	-2.21	43.83	74.00	-30.17	V	Peak
3079.000	44.29	-1.23	43.06	74.00	-30.94	V	Peak
3961.000	44.56	1.43	45.99	74.00	-28.01	V	Peak
1180.000	54.42	-7.87	46.55	74.00	-27.45	H	Peak
1882.000	51.10	-5.75	45.35	74.00	-28.65	H	Peak
1981.000	52.67	-5.12	47.55	74.00	-26.45	H	Peak
2629.000	45.10	-2.03	43.07	74.00	-30.93	H	Peak
2800.000	44.71	-1.72	42.99	74.00	-31.01	H	Peak
3961.000	43.79	1.43	45.22	74.00	-28.78	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11g (CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	57.31	-7.83	49.48	74.00	-24.52	V	Peak
1279.000	52.10	-7.50	44.60	74.00	-29.40	V	Peak
1981.000	50.18	-5.12	45.06	74.00	-28.94	V	Peak
2647.000	46.64	-2.00	44.64	74.00	-29.36	V	Peak
2818.000	44.75	-1.69	43.06	74.00	-30.94	V	Peak
3961.000	45.32	1.43	46.75	74.00	-27.25	V	Peak
1189.000	54.78	-7.83	46.95	74.00	-27.05	H	Peak
1891.000	52.78	-5.69	47.09	74.00	-26.91	H	Peak
1981.000	51.17	-5.12	46.05	74.00	-27.95	H	Peak
2593.000	46.23	-2.09	44.14	74.00	-29.86	H	Peak
2845.000	44.18	-1.64	42.54	74.00	-31.46	H	Peak
4978.000	42.63	4.91	47.54	74.00	-26.46	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz (CH Low)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1180.000	57.92	-7.87	50.05	74.00	-23.95	V	Peak
1891.000	49.18	-5.69	43.49	74.00	-30.51	V	Peak
1981.000	49.56	-5.12	44.44	74.00	-29.56	V	Peak
2647.000	45.51	-2.00	43.51	74.00	-30.49	V	Peak
2836.000	43.76	-1.66	42.10	74.00	-31.90	V	Peak
3961.000	45.91	1.43	47.34	74.00	-26.66	V	Peak
1189.000	55.93	-7.83	48.10	74.00	-25.90	H	Peak
1891.000	52.62	-5.69	46.93	74.00	-27.07	H	Peak
1972.000	51.52	-5.18	46.34	74.00	-27.66	H	Peak
2638.000	45.65	-2.01	43.64	74.00	-30.36	H	Peak
2827.000	44.86	-1.67	43.19	74.00	-30.81	H	Peak
3961.000	43.62	1.43	45.05	74.00	-28.95	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT20 MHz (CH Mid)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	65.50	-7.83	57.67	74.00	-16.33	V	Peak
1189.000	47.22	-7.83	39.39	54.00	-14.61	V	AVG
1909.000	50.41	-5.58	44.83	74.00	-29.17	V	Peak
2629.000	45.48	-2.03	43.45	74.00	-30.55	V	Peak
2863.000	46.71	-1.61	45.10	74.00	-28.90	V	Peak
3961.000	44.71	1.43	46.14	74.00	-27.86	V	Peak
4816.000	42.74	4.38	47.12	74.00	-26.88	V	Peak
1207.000	53.97	-7.76	46.21	74.00	-27.79	H	Peak
1891.000	53.60	-5.69	47.91	74.00	-26.09	H	Peak
1981.000	52.56	-5.12	47.44	74.00	-26.56	H	Peak
2638.000	44.46	-2.01	42.45	74.00	-31.55	H	Peak
2836.000	44.16	-1.66	42.50	74.00	-31.50	H	Peak
3115.000	44.87	-1.17	43.70	74.00	-30.30	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: TX / EEE 802.11n HT20 MHz (CH High)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RHDate: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	59.68	-7.83	51.85	74.00	-22.15	V	Peak
1279.000	51.73	-7.50	44.23	74.00	-29.77	V	Peak
1981.000	50.04	-5.12	44.92	74.00	-29.08	V	Peak
2638.000	44.79	-2.01	42.78	74.00	-31.22	V	Peak
2800.000	45.25	-1.72	43.53	74.00	-30.47	V	Peak
3961.000	44.45	1.43	45.88	74.00	-28.12	V	Peak
1180.000	52.69	-7.87	44.82	74.00	-29.18	H	Peak
1891.000	54.33	-5.69	48.64	74.00	-25.36	H	Peak
1972.000	51.67	-5.18	46.49	74.00	-27.51	H	Peak
2629.000	44.99	-2.03	42.96	74.00	-31.04	H	Peak
2854.000	44.62	-1.62	43.00	74.00	-31.00	H	Peak
5248.000	42.27	5.42	47.69	74.00	-26.31	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT40 MHz (CH Low)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1180.000	57.42	-7.87	49.55	74.00	-24.45	V	Peak
1891.000	49.18	-5.69	43.49	74.00	-30.51	V	Peak
1981.000	49.56	-5.12	44.44	74.00	-29.56	V	Peak
2647.000	45.01	-2.00	43.01	74.00	-30.99	V	Peak
3961.000	45.41	1.43	46.84	74.00	-27.16	V	Peak
4933.000	41.68	4.76	46.44	74.00	-27.56	V	Peak
1189.000	56.43	-7.83	48.60	74.00	-25.40	H	Peak
1891.000	52.62	-5.69	46.93	74.00	-27.07	H	Peak
1972.000	51.52	-5.18	46.34	74.00	-27.66	H	Peak
2638.000	45.65	-2.01	43.64	74.00	-30.36	H	Peak
2827.000	44.86	-1.67	43.19	74.00	-30.81	H	Peak
3682.000	44.03	0.25	44.28	74.00	-29.72	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT40 MHz (CH Mid)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	65.00	-7.83	57.17	74.00	-16.83	V	Peak
1189.000	48.06	-7.83	40.23	54.00	-13.77	V	AVG
1909.000	49.91	-5.58	44.33	74.00	-29.67	V	Peak
1972.000	49.00	-5.18	43.82	74.00	-30.18	V	Peak
2233.000	45.96	-3.72	42.24	74.00	-31.76	V	Peak
2629.000	44.98	-2.03	42.95	74.00	-31.05	V	Peak
2863.000	46.21	-1.61	44.60	74.00	-29.40	V	Peak
1207.000	52.97	-7.76	45.21	74.00	-28.79	H	Peak
1891.000	52.60	-5.69	46.91	74.00	-27.09	H	Peak
1981.000	51.56	-5.12	46.44	74.00	-27.56	H	Peak
2638.000	44.46	-2.01	42.45	74.00	-31.55	H	Peak
2836.000	44.66	-1.66	43.00	74.00	-31.00	H	Peak
3115.000	45.37	-1.17	44.20	74.00	-29.80	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / EEE 802.11n HT40 MHz (CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: April 19, 2018

Frequency (MHz)	Reading (dBUV)	Correction Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1189.000	59.18	-7.83	51.35	74.00	-22.65	V	Peak
1891.000	50.15	-5.69	44.46	74.00	-29.54	V	Peak
1981.000	49.54	-5.12	44.42	74.00	-29.58	V	Peak
2233.000	47.01	-3.72	43.29	74.00	-30.71	V	Peak
2638.000	45.29	-2.01	43.28	74.00	-30.72	V	Peak
2800.000	45.25	-1.72	43.53	74.00	-30.47	V	Peak
1180.000	52.69	-7.87	44.82	74.00	-29.18	H	Peak
1891.000	53.33	-5.69	47.64	74.00	-26.36	H	Peak
1972.000	52.17	-5.18	46.99	74.00	-27.01	H	Peak
2629.000	45.99	-2.03	43.96	74.00	-30.04	H	Peak
2854.000	45.12	-1.62	43.50	74.00	-30.50	H	Peak
5248.000	41.77	5.42	47.19	74.00	-26.81	H	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBUV/m) – Average limit (dBUV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.2 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

7.3.4. TEST SETUP





7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	9037	>500	PASS
Mid	2437	9047		PASS
High	2462	9043		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16310	>500	PASS
Mid	2437	16300		PASS
High	2462	16310		PASS

Test mode: IEEE 802.11n HT20 MHz



Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17520	>500	PASS
Mid	2437	17290		PASS
High	2462	17530		PASS



Test mode: IEEE 802.11n HT40 MHz



Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	36280	>500	PASS
Mid	2437	35780		PASS
High	2452	36290		PASS



Test Plot

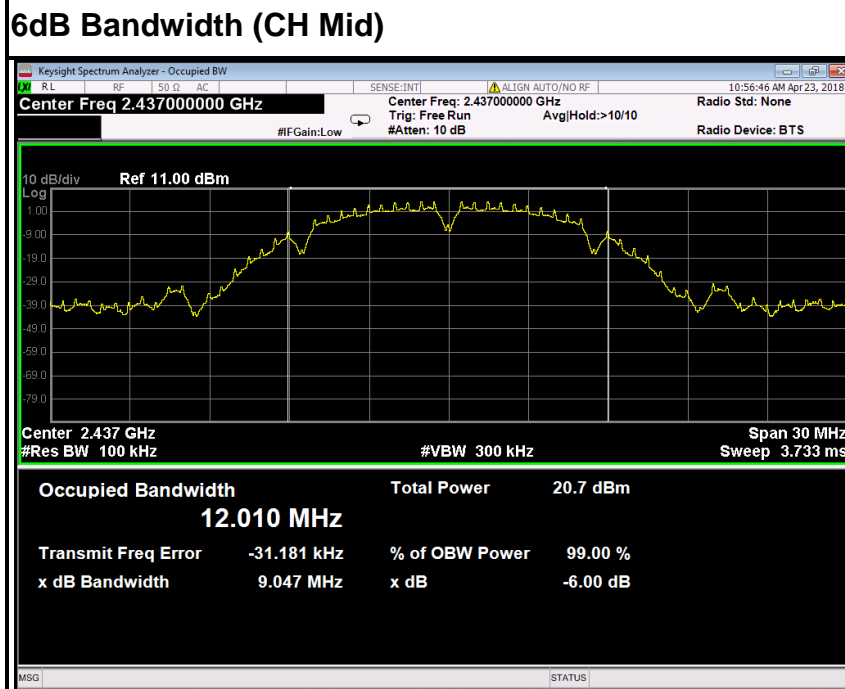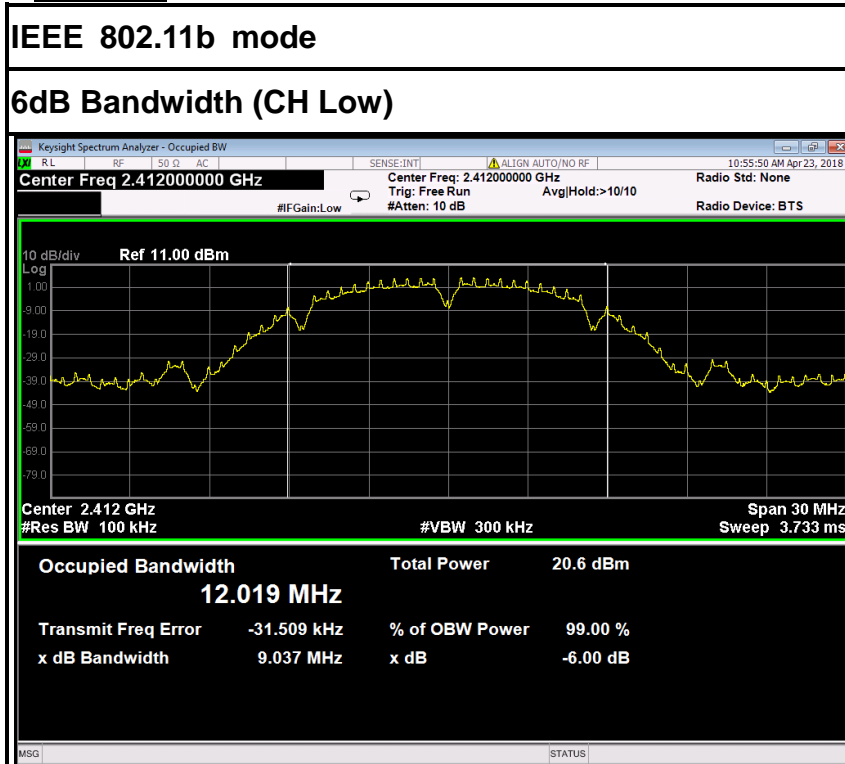

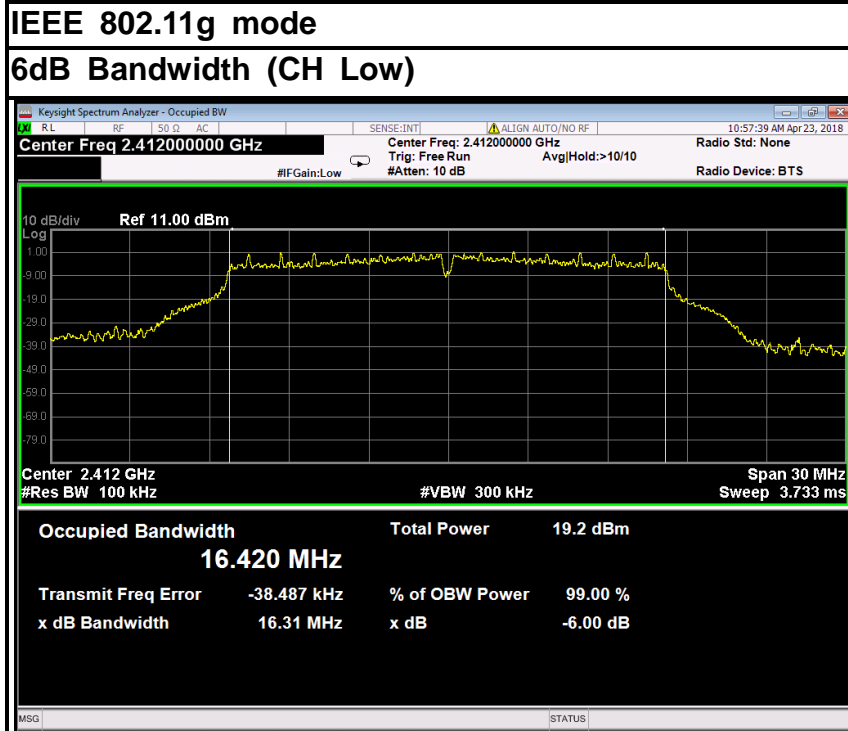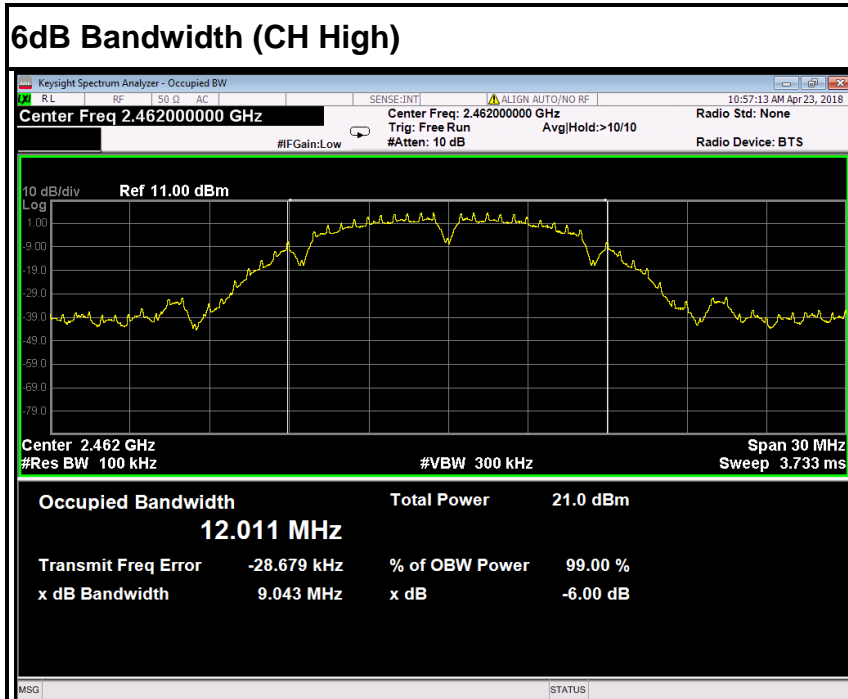


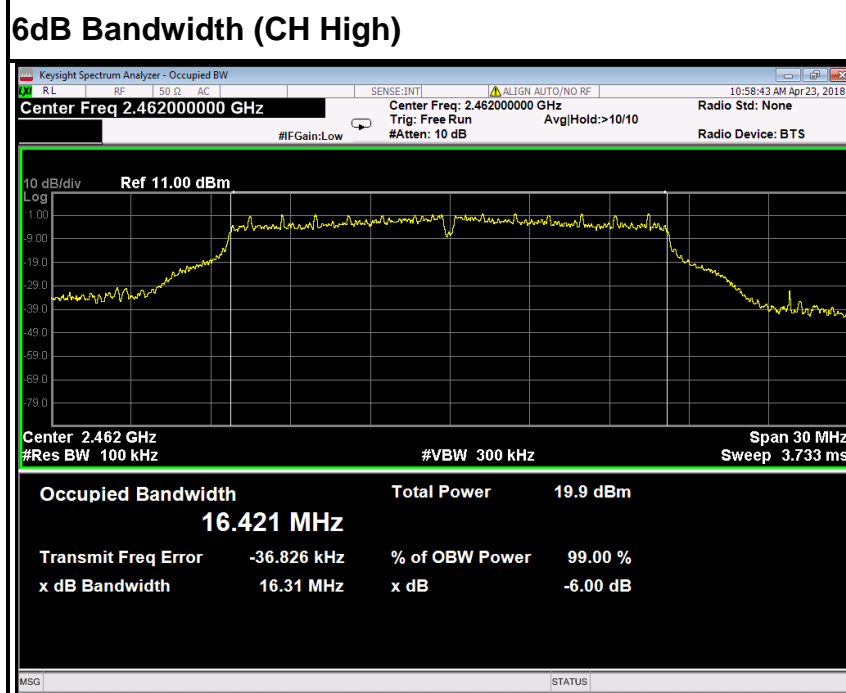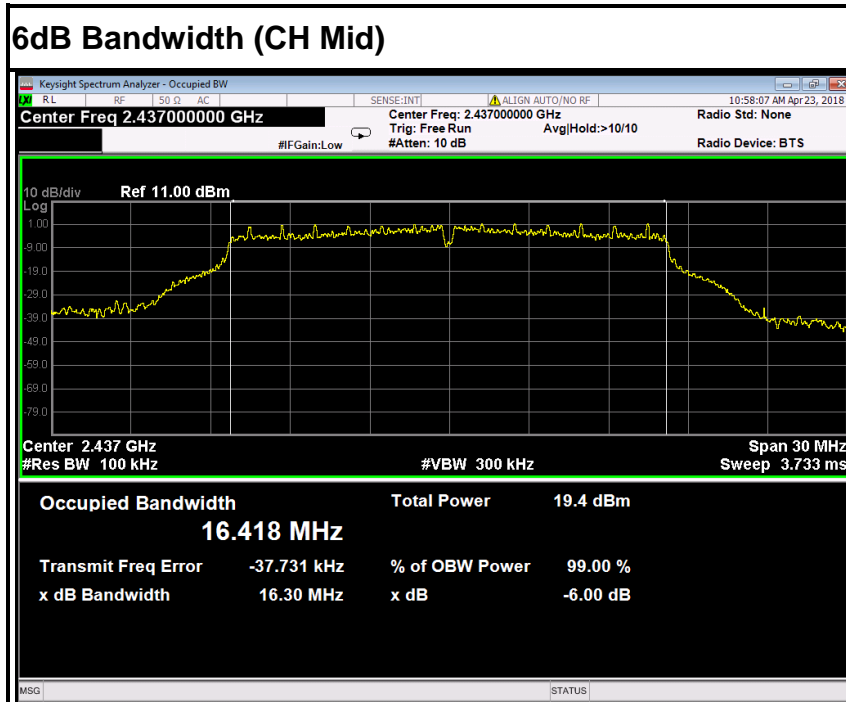





IEEE 802.11n HT20 MHz mode

6dB Bandwidth (CH Low)

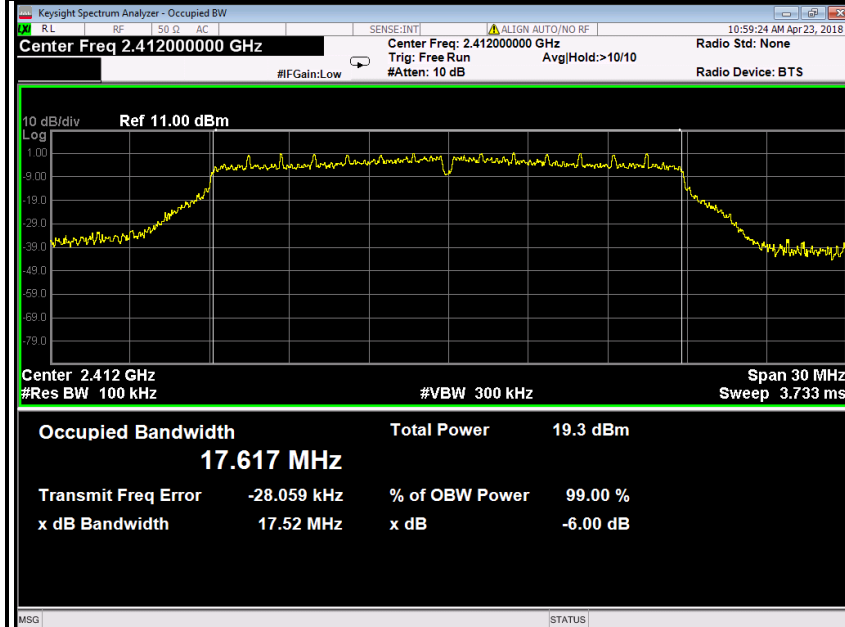




6dB Bandwidth (CH Mid)

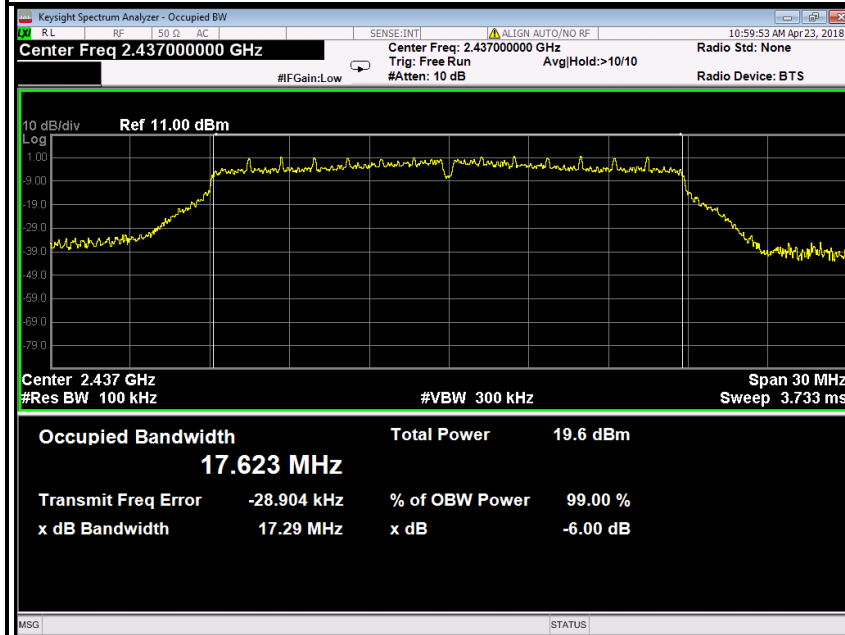

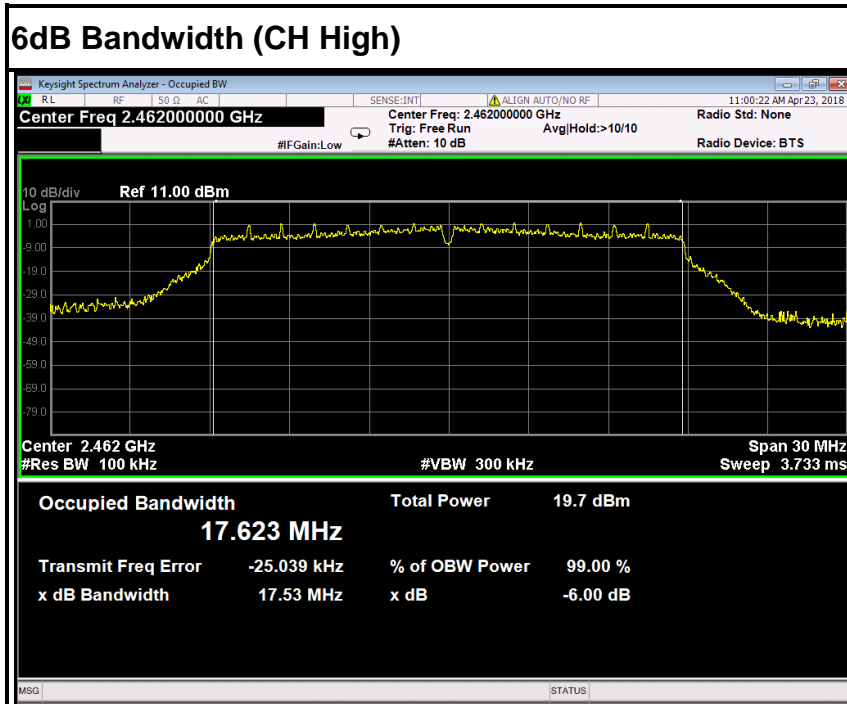

IEEE 802.11n HT40 MHz mode

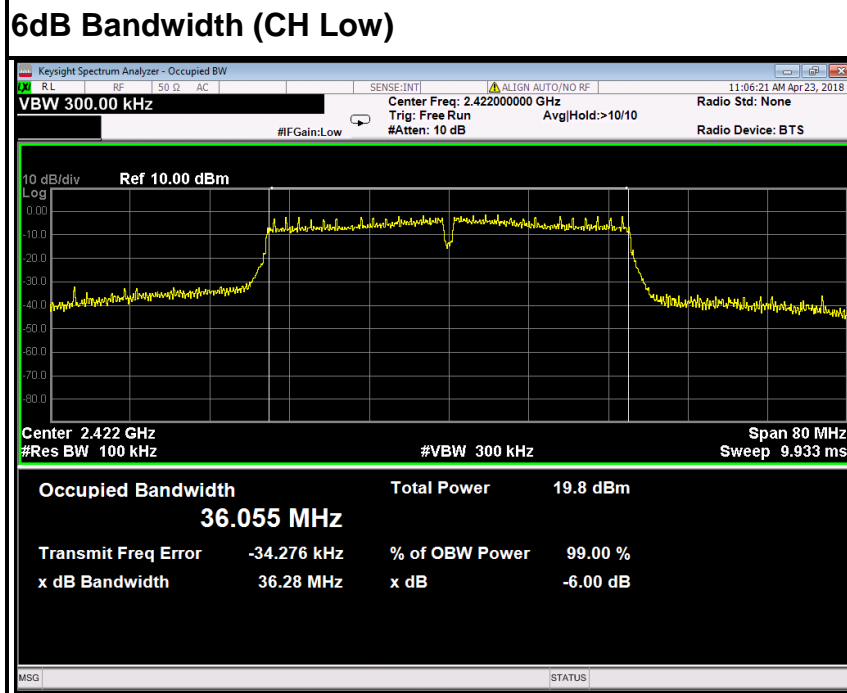

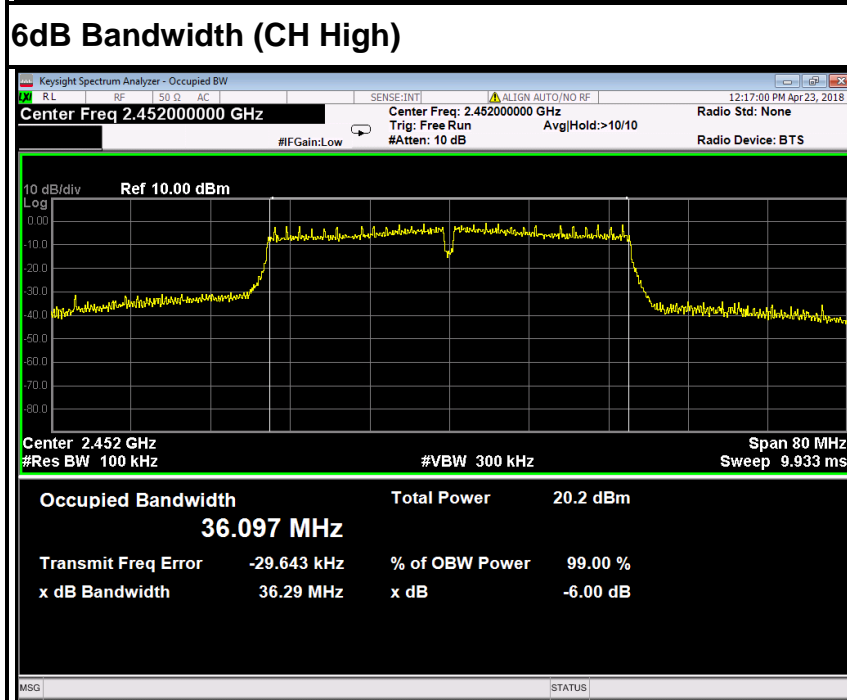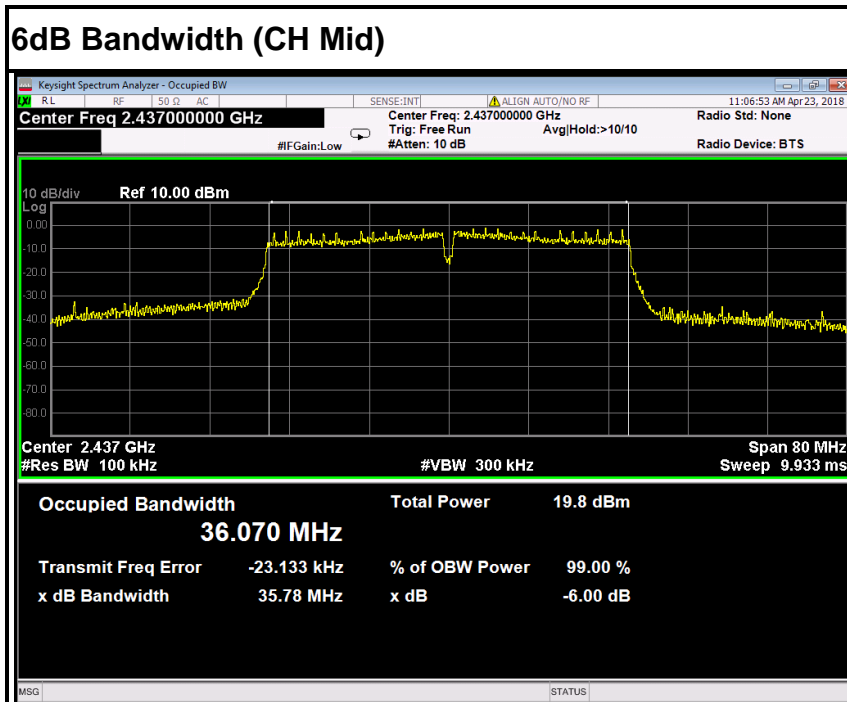



7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

IEEE 802.11b

T _{nom}	V _{nom}	Lowest channel 2412MHz	Middle channel 2437MHz	Highest channel 2462MHz
Conducted power [dBm/MHz] Measured with DSSS modulation		5.74	6.12	6.32
Radiated power [dBm/MHz] Measured with DSSS modulation		8.31	8.87	9.27
Gain [dBi] Calculated		2.57	2.75	2.95
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2018	02/20/2019
Power Sensor	Anritsu	MA2411B	1126150	02/21/2018	02/20/2019

7.5.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW ≥ DTS bandwidth


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW ≥ *DTS bandwidth*.
- b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.5.4. TEST SETUP





7.5.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	16.53	0.04498	Peak	1	PASS
Mid	2437	16.91	0.04909			PASS
High	2462	17.11	0.05140			PASS
Low	2412	13.79	0.02393	AVG	1	PASS
Mid	2437	14.27	0.02673			PASS
High	2462	14.40	0.02754			PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	23.23	0.21038	Peak	1	PASS
Mid	2437	23.57	0.22751			PASS
High	2462	23.94	0.24774			PASS
Low	2412	13.63	0.02307	AVG	1	PASS
Mid	2437	13.91	0.02460			PASS
High	2462	13.90	0.02455			PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	23.90	0.24547	Peak	1	PASS
Mid	2437	23.87	0.24378			PASS
High	2462	23.88	0.24434			PASS
Low	2412	13.91	0.02460	AVG	1	PASS
Mid	2437	14.04	0.02535			PASS
High	2462	13.93	0.02472			PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2422	18.44	0.06982	Peak	1	PASS
Mid	2437	18.61	0.07261			PASS
High	2452	18.30	0.06761			PASS
Low	2422	9.56	0.00904	AVG	1	PASS
Mid	2437	9.54	0.00899			PASS
High	2452	9.66	0.00925			PASS



7.6. BAND EDGES MEASUREMENT

7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2018	02/20/2019
Amplifier	EMEC	EM330	060661	03/18/2018	03/17/2019
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2018	02/20/2019
Loop Antenna	COM-POWER	AL-130	121044	01/30/2018	01/29/2019
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2018	02/27/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2018	02/27/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.


3. N.C.R = No Calibration Required.



7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO / Detector=PEAK
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.6.4. TEST SETUP

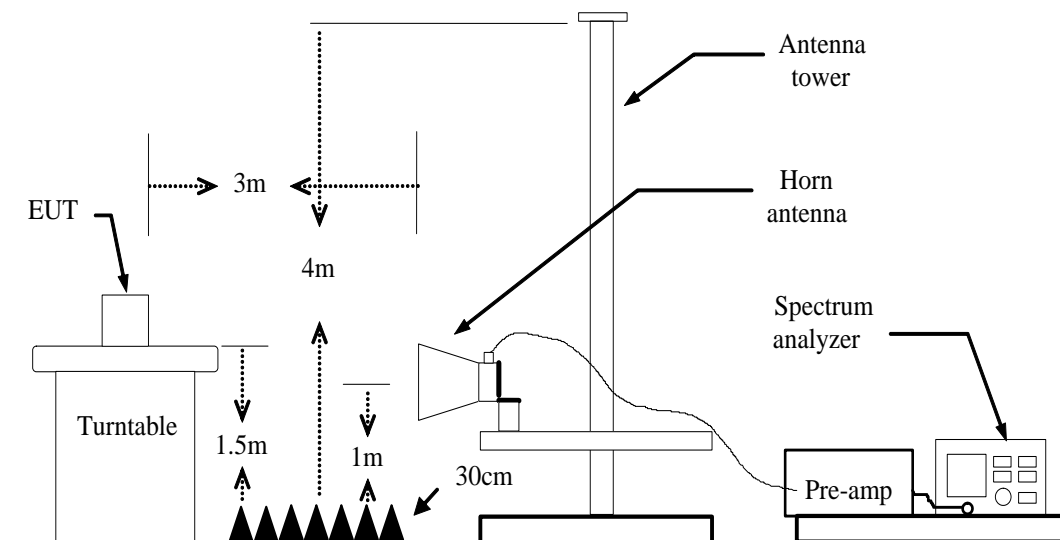






7.6.5. TEST RESULTS

Test Plot

IEEE 802.11b mode
Band Edges (CH Low)

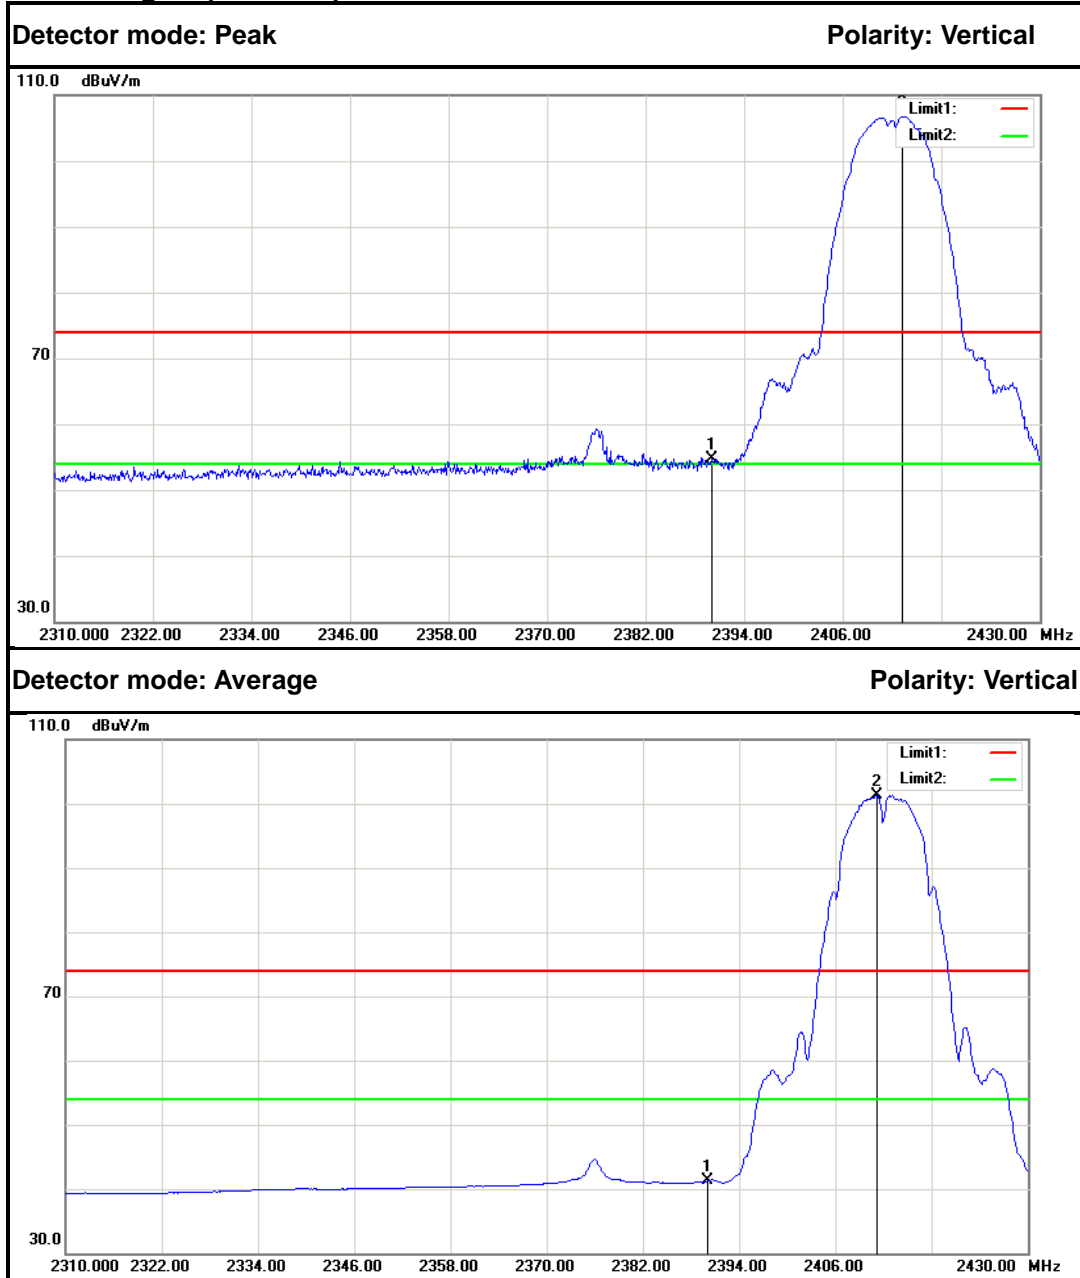



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.61	-2.86	54.75	74.00	-19.25	Peak	Vertical
2.	2413.320	109.47	-2.73	106.74	---	---	Peak	Vertical
1.	2390.000	44.06	-2.86	41.20	54.00	-12.80	Average	Vertical
2.	2411.160	104.13	-2.75	101.38	---	---	Average	Vertical

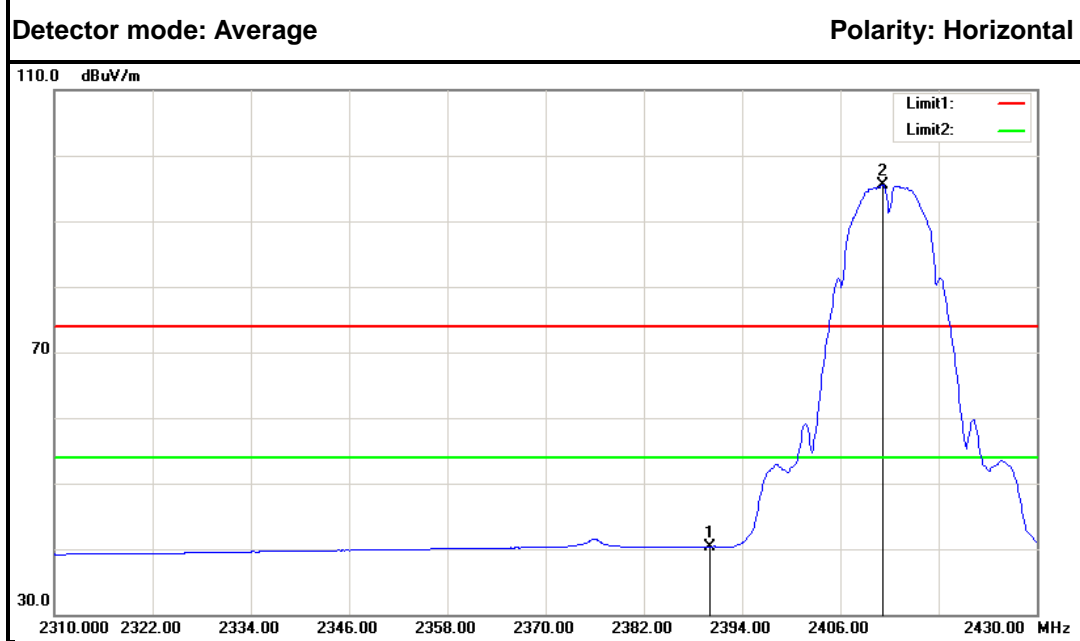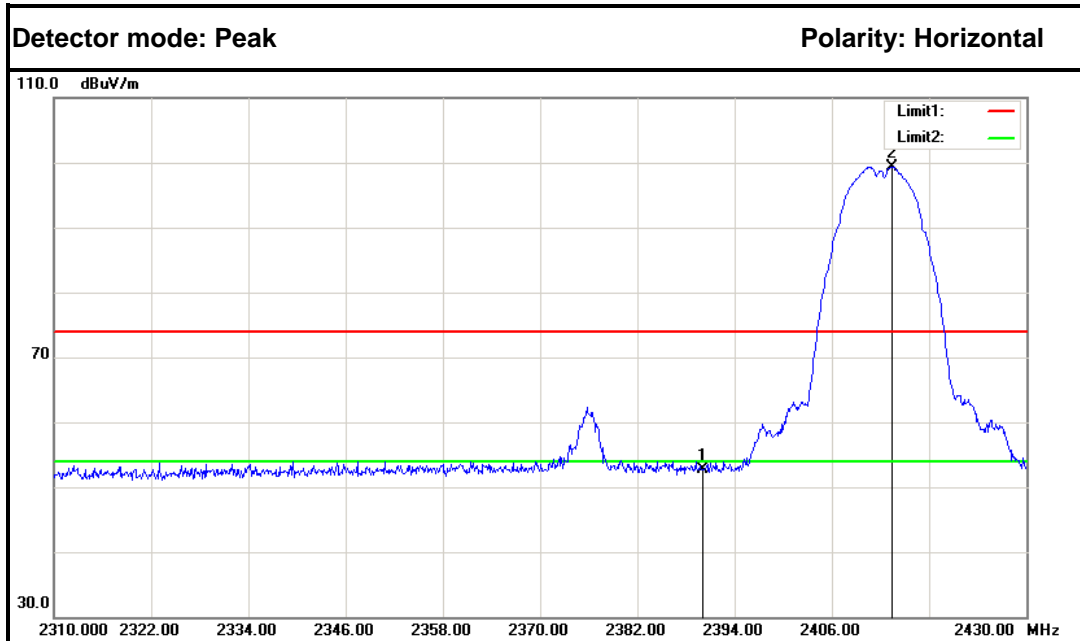



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.53	-2.86	52.67	74.00	-21.33	Peak	Horizontal
2.	2413.440	102.03	-2.73	99.30	---	---	Peak	Horizontal
1.	2390.000	43.23	-2.86	40.37	54.00	-13.63	Average	Horizontal
2.	2411.160	98.31	-2.75	95.56	---	---	Average	Horizontal



Band Edges (CH High)

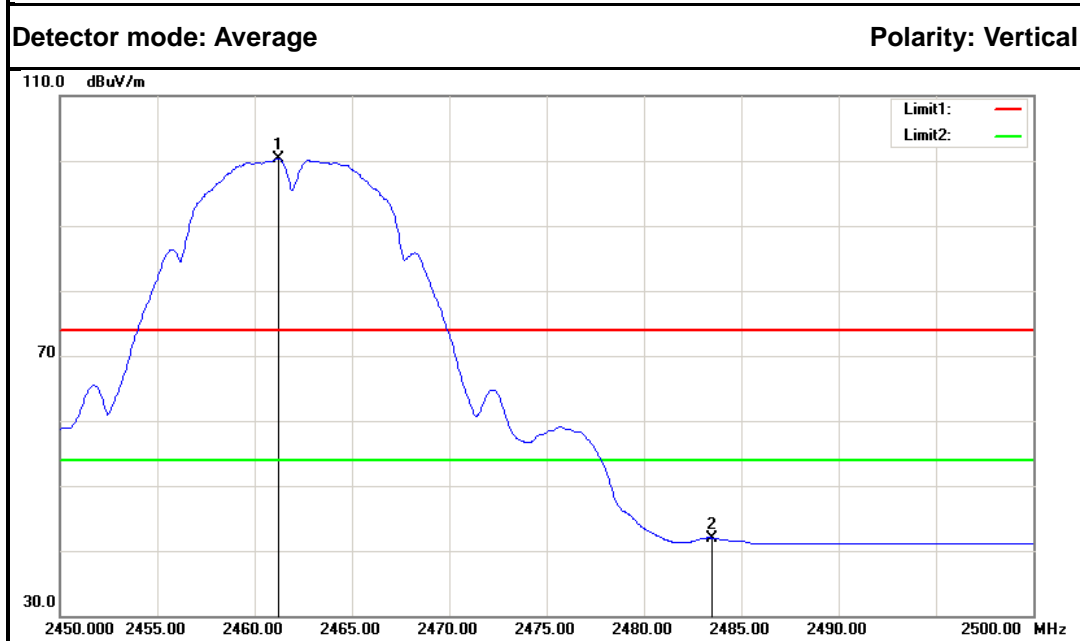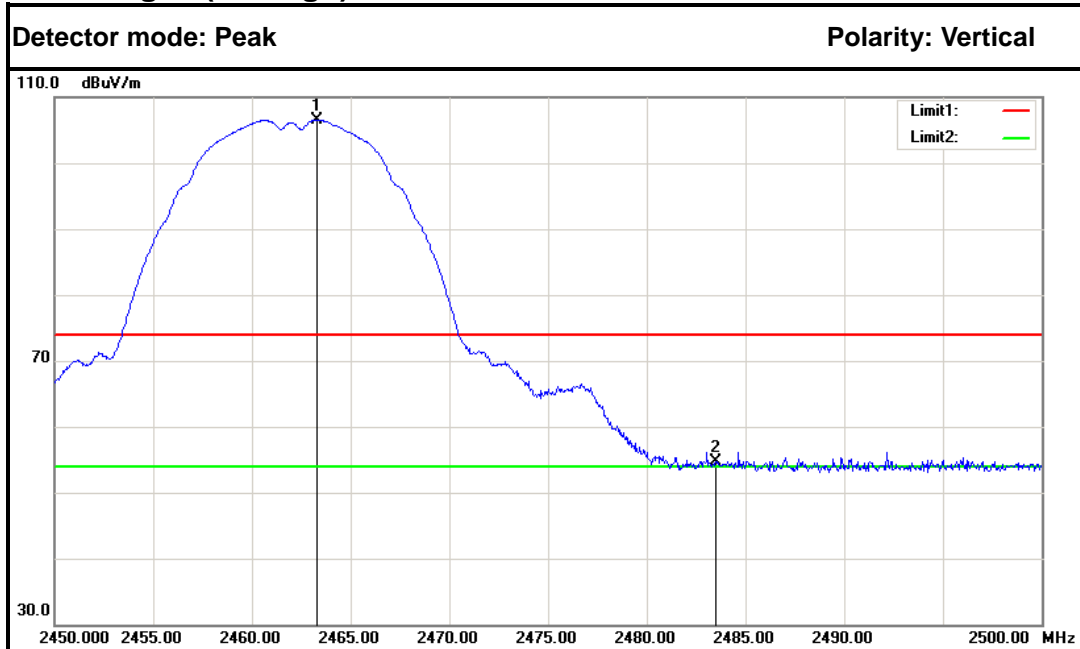



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.300	108.98	-2.46	106.52	---	---	Peak	Vertical
2.	2483.500	57.08	-2.35	54.73	74.00	-19.27	Peak	Vertical
1.	2461.200	102.76	-2.47	100.29	---	---	Average	Vertical
2.	2483.500	44.34	-2.35	41.99	54.00	-12.01	Average	Vertical

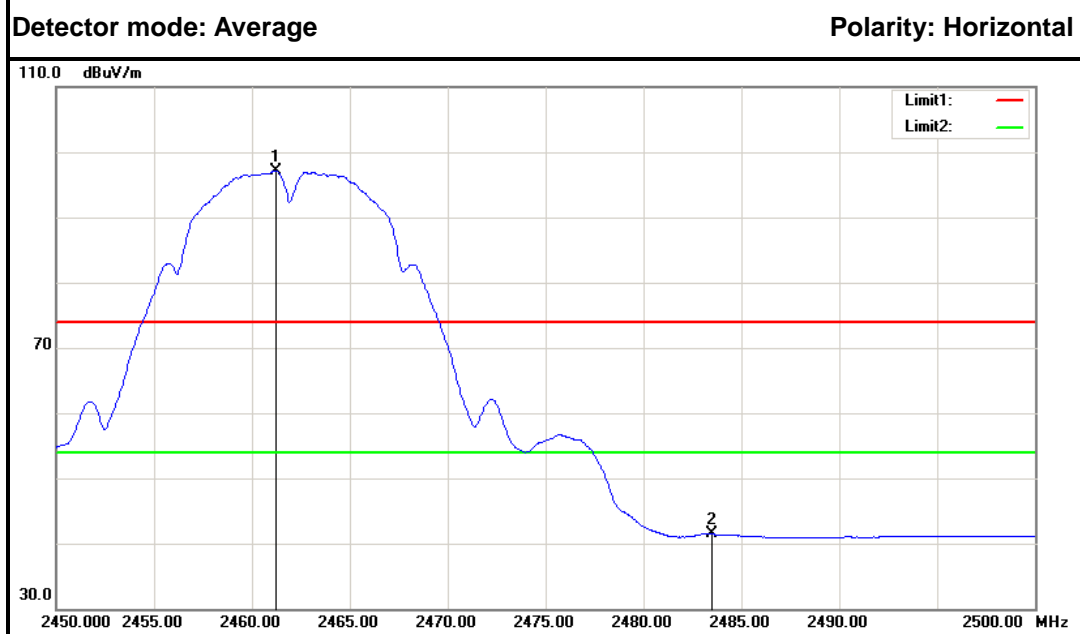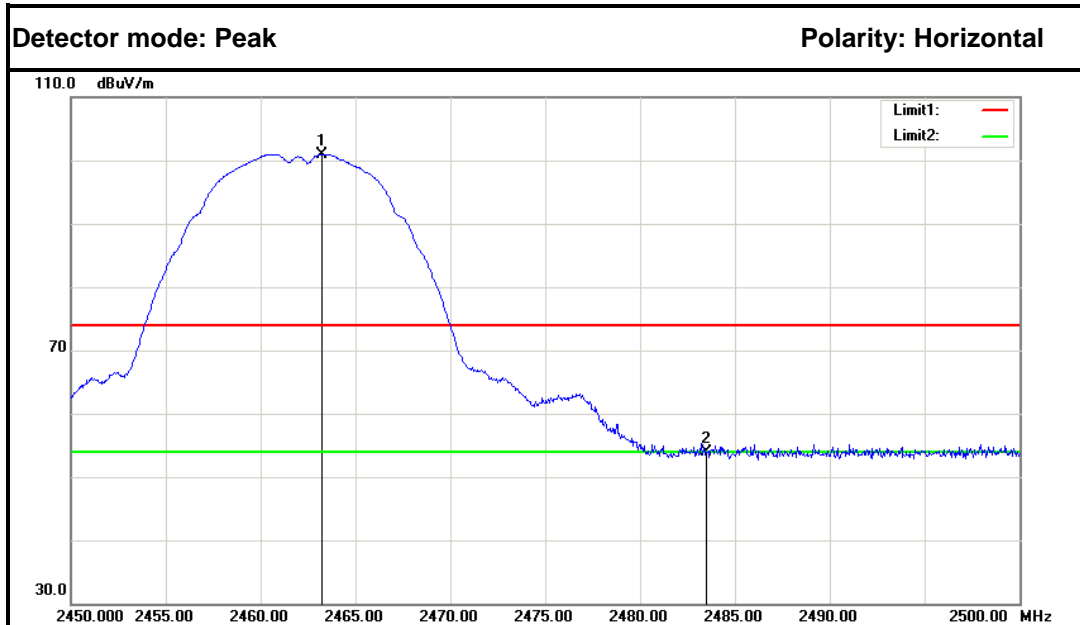



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.200	103.44	-2.46	100.98	---	---	Peak	Horizontal
2.	2483.500	56.27	-2.35	53.92	74.00	-20.08	Peak	Horizontal
1.	2461.200	99.59	-2.47	97.12	---	---	Average	Horizontal
2.	2483.500	43.80	-2.35	41.45	54.00	-12.55	Average	Horizontal



IEEE 802.11g mode
Band Edges (CH Low)

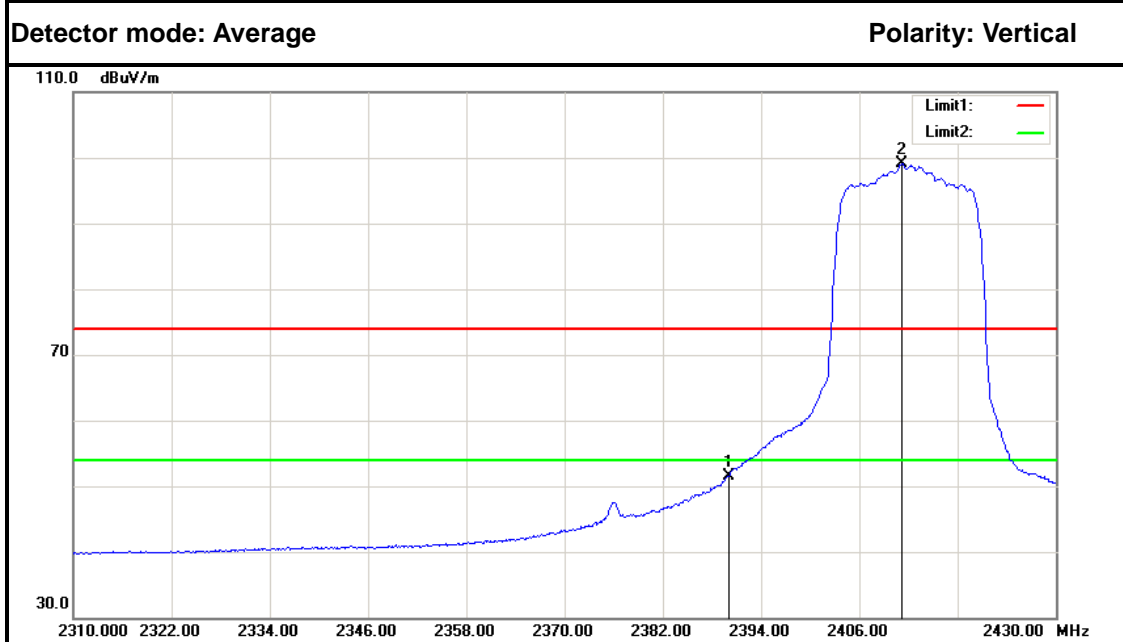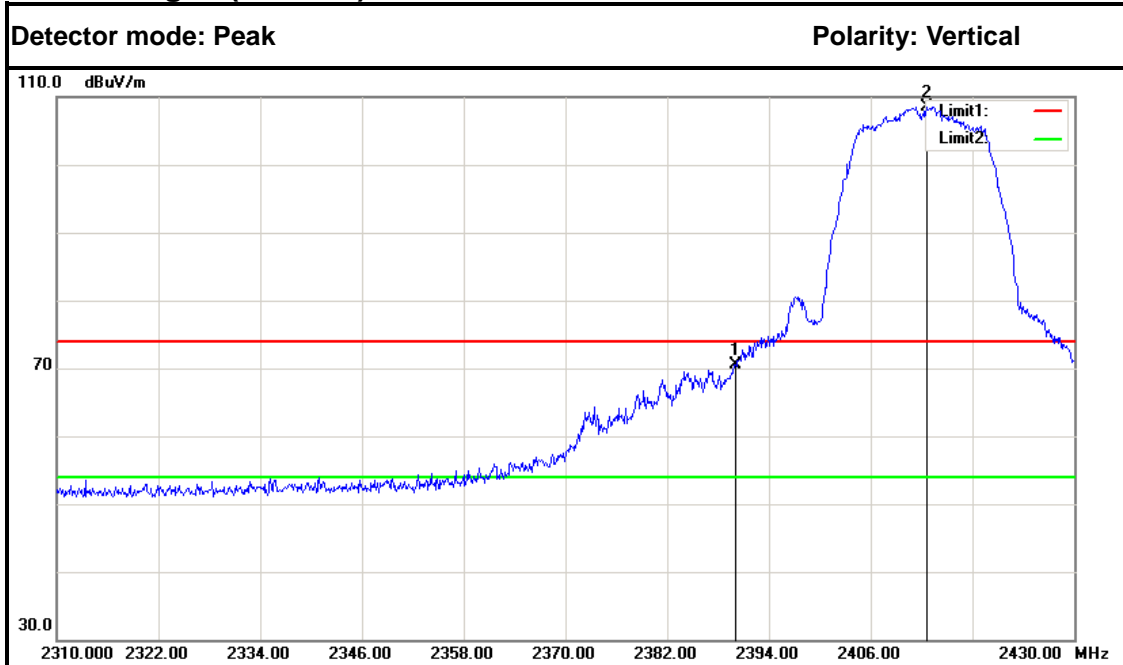



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	73.44	-2.86	70.58	74.00	-3.42	Peak	Vertical
2.	2412.600	111.22	-2.74	108.48	---	---	Peak	Vertical
1.	2390.000	54.34	-2.86	51.48	54.00	-2.52	Average	Vertical
2.	2411.160	101.84	-2.75	99.09	---	---	Average	Vertical

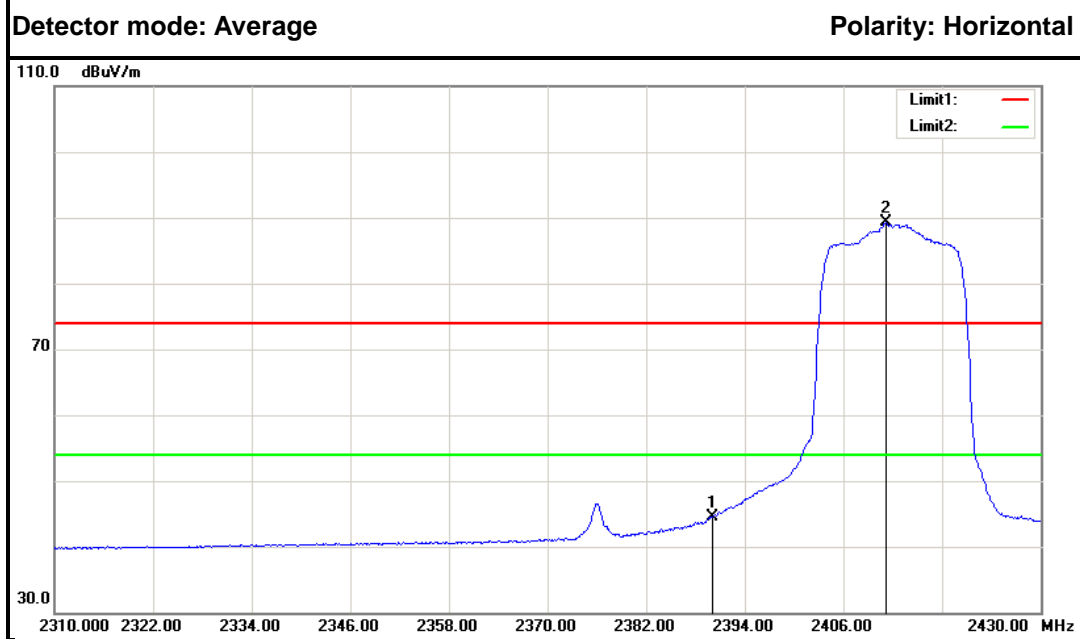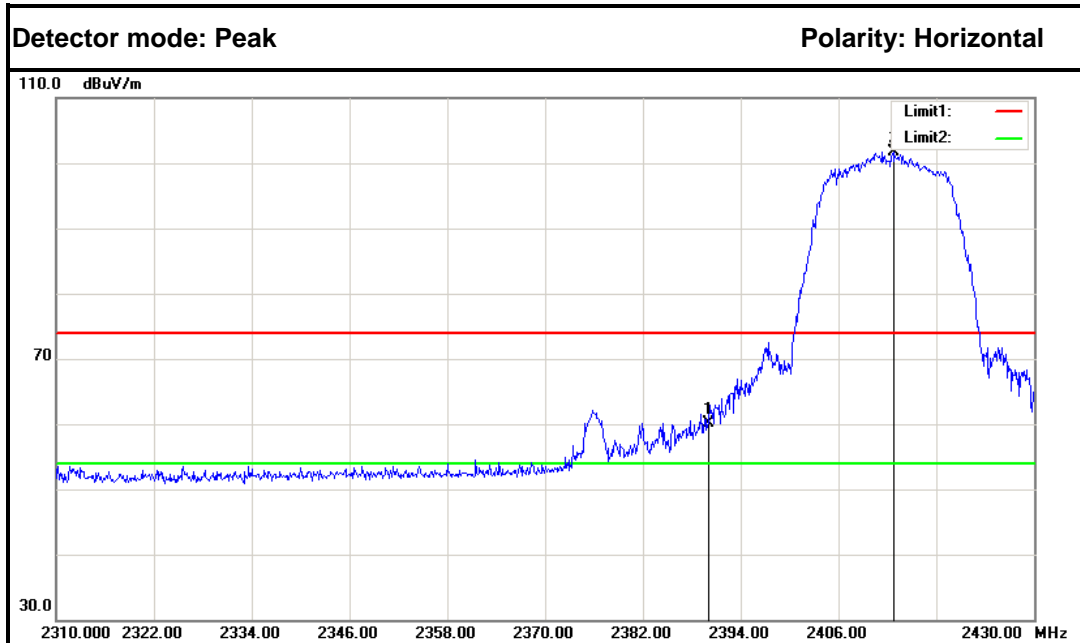



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	63.01	-2.86	60.15	74.00	-13.85	Peak	Horizontal
2.	2412.720	104.41	-2.74	101.67	---	---	Peak	Horizontal
1.	2390.000	47.36	-2.86	44.50	54.00	-9.50	Average	Horizontal
2.	2411.160	91.96	-2.75	89.21	---	---	Average	Horizontal



Band Edges (CH High)

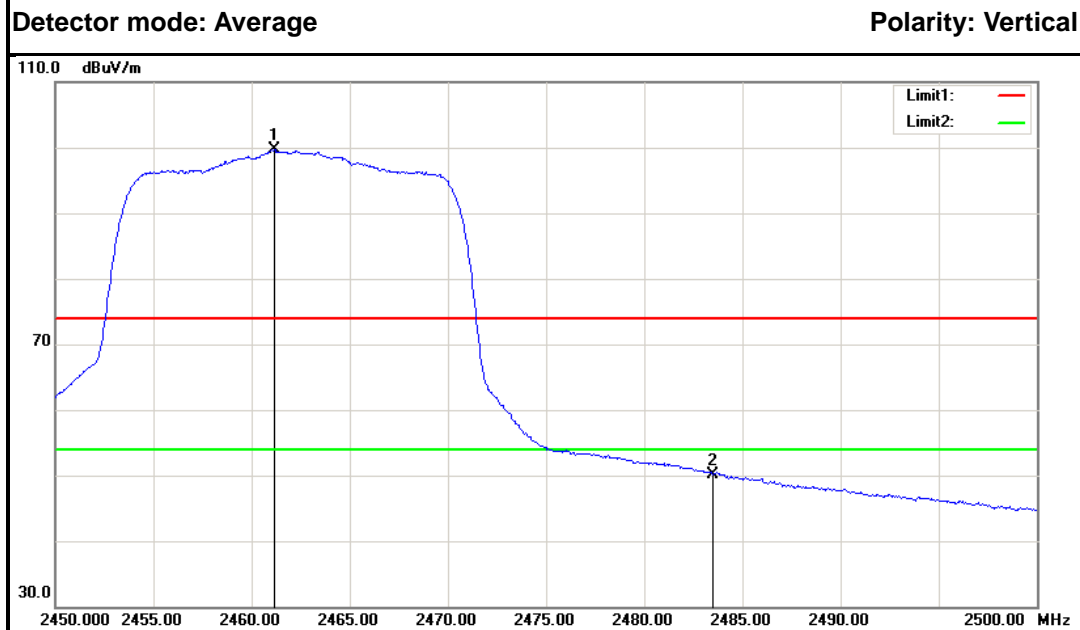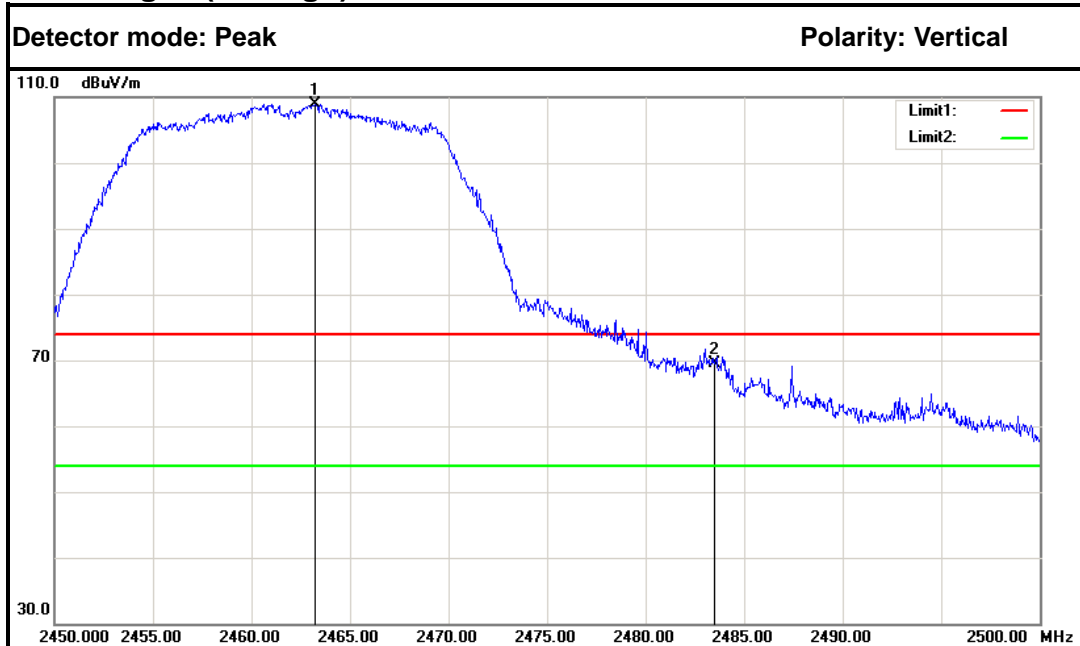



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.250	111.37	-2.46	108.91	---	---	Peak	Vertical
2.	2483.500	71.84	-2.35	69.49	74.00	-4.51	Peak	Vertical
1.	2461.150	102.27	-2.47	99.80	---	---	Average	Vertical
2.	2483.500	52.53	-2.35	50.18	54.00	-3.82	Average	Vertical

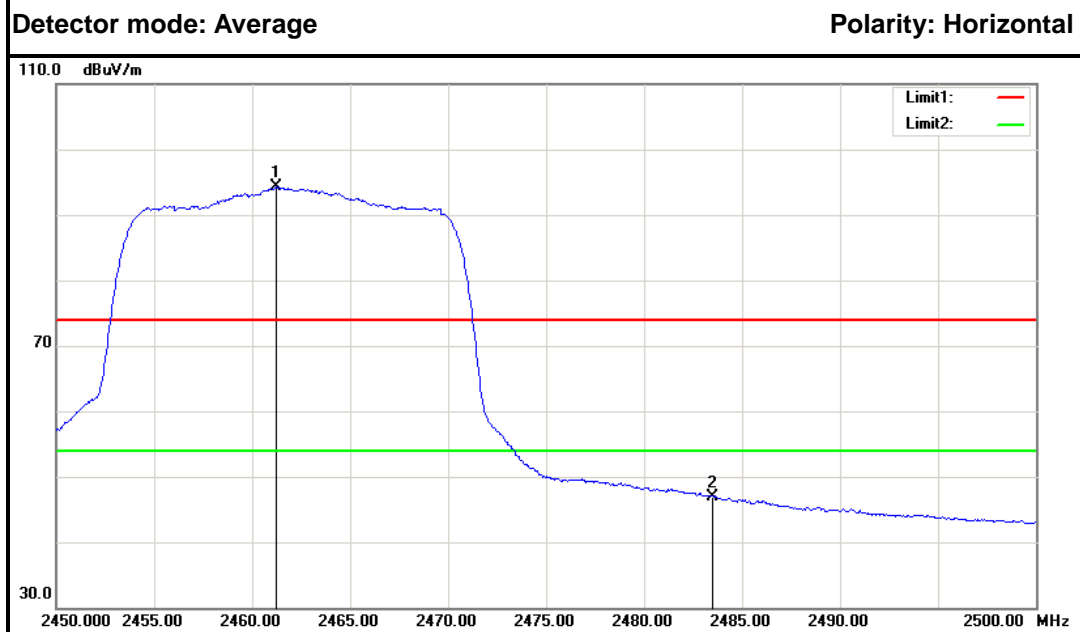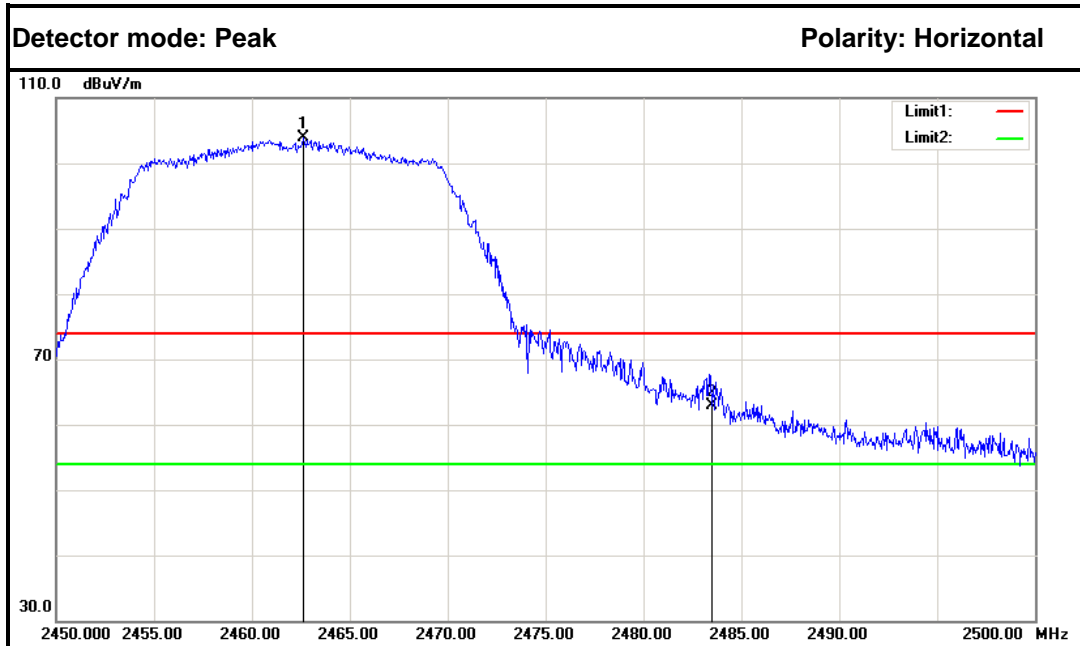



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2462.600	106.33	-2.46	103.87	---	---	Peak	Horizontal
2.	2483.500	65.33	-2.35	62.98	74.00	-11.02	Peak	Horizontal
1.	2461.200	96.70	-2.47	94.23	---	---	Average	Horizontal
2.	2483.500	49.35	-2.35	47.00	54.00	-7.00	Average	Horizontal



IEEE 802.11n HT20 MHz mode
Band Edges (CH Low)

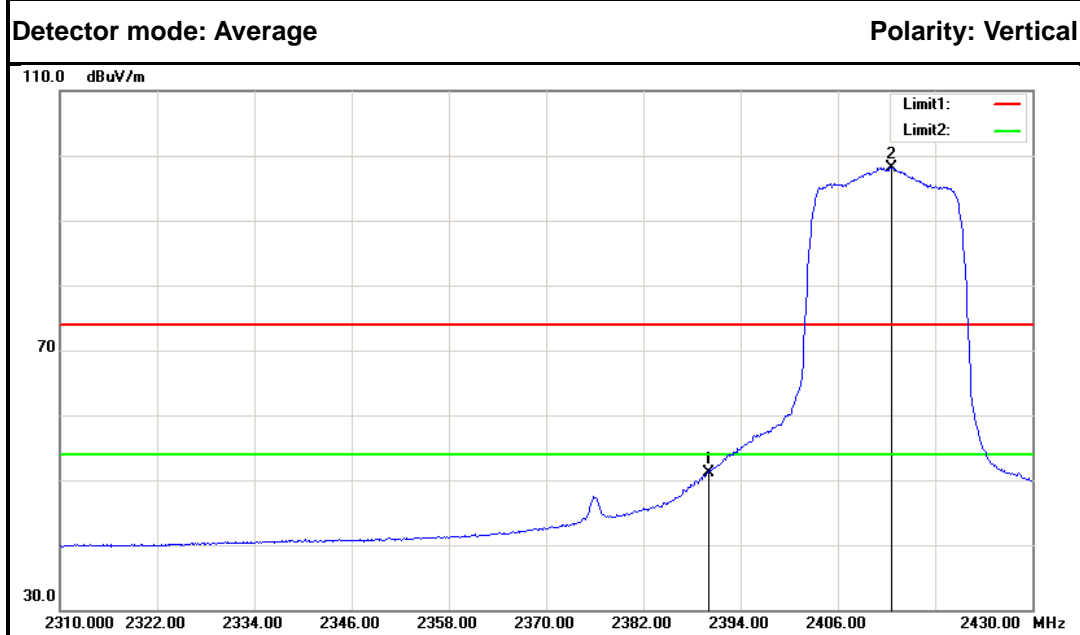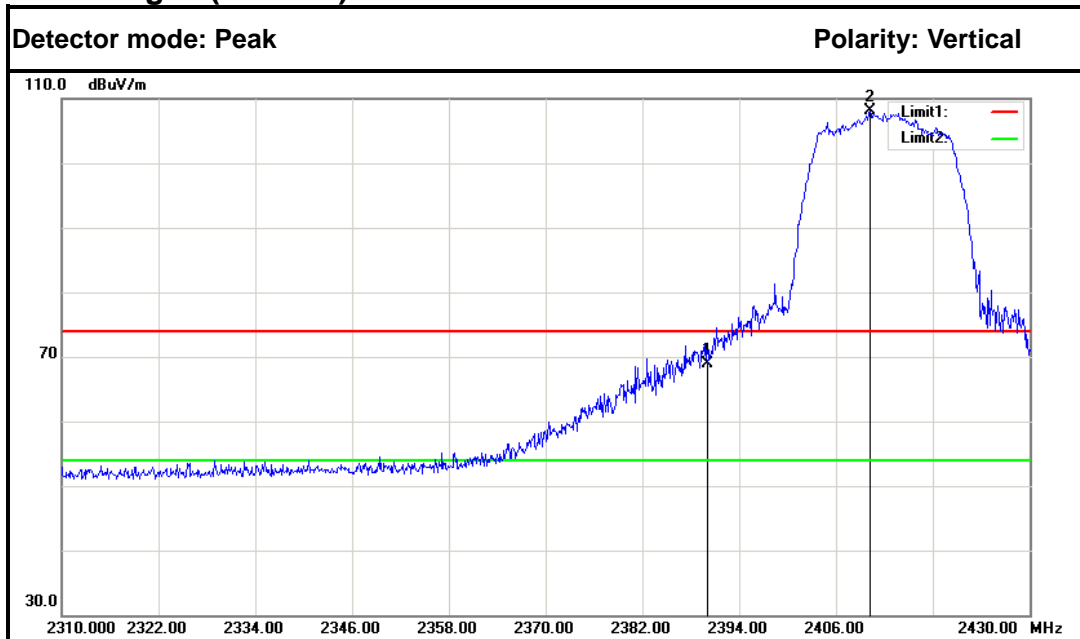



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	71.74	-2.86	68.88	74.00	-5.12	Peak	Vertical
2.	2410.200	110.76	-2.75	108.01	---	---	Peak	Vertical
1.	2390.000	53.97	-2.86	51.11	54.00	-2.89	Average	Vertical
2.	2412.600	100.85	-2.74	98.11	---	---	Average	Vertical

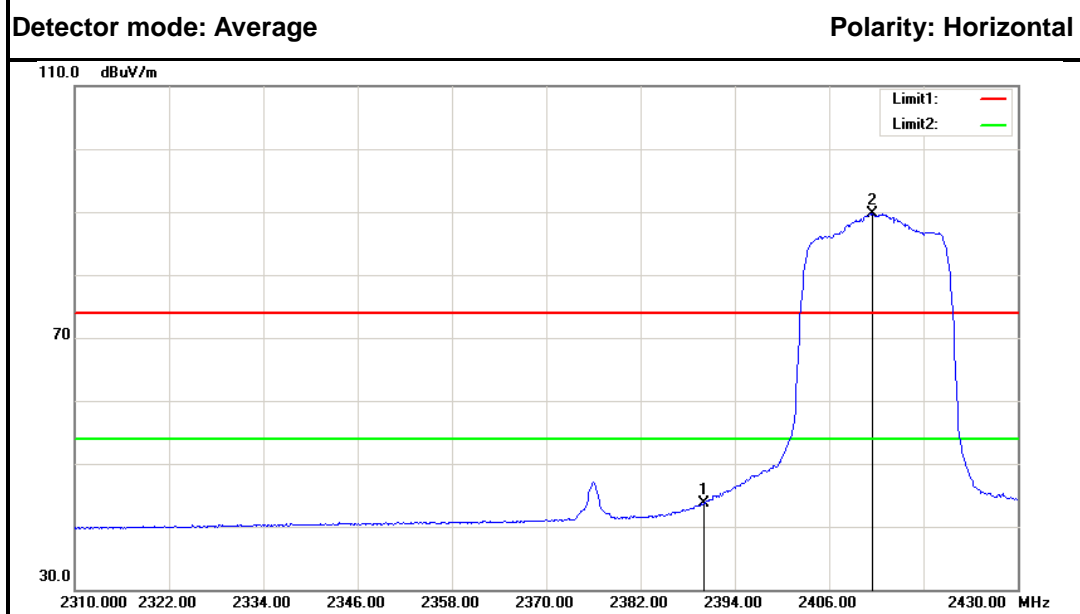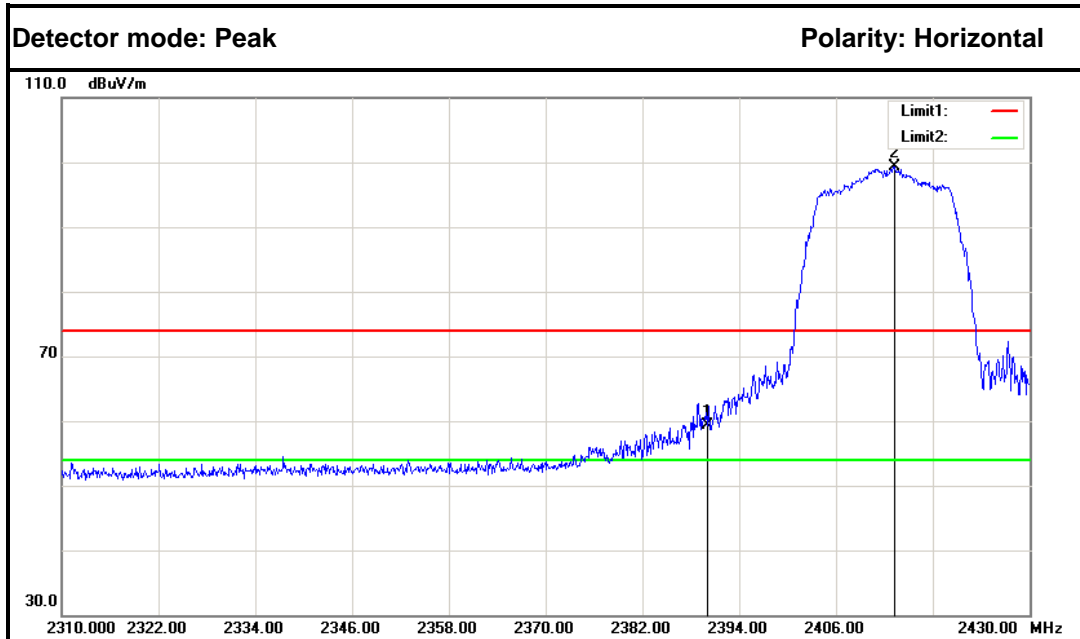



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	62.12	-2.86	59.26	74.00	-14.74	Peak	Horizontal
2.	2413.200	102.05	-2.74	99.31	---	---	Peak	Horizontal
1.	2390.000	46.56	-2.86	43.70	54.00	-10.30	Average	Horizontal
2.	2411.520	92.43	-2.74	89.69	---	---	Average	Horizontal



Band Edges (CH High)

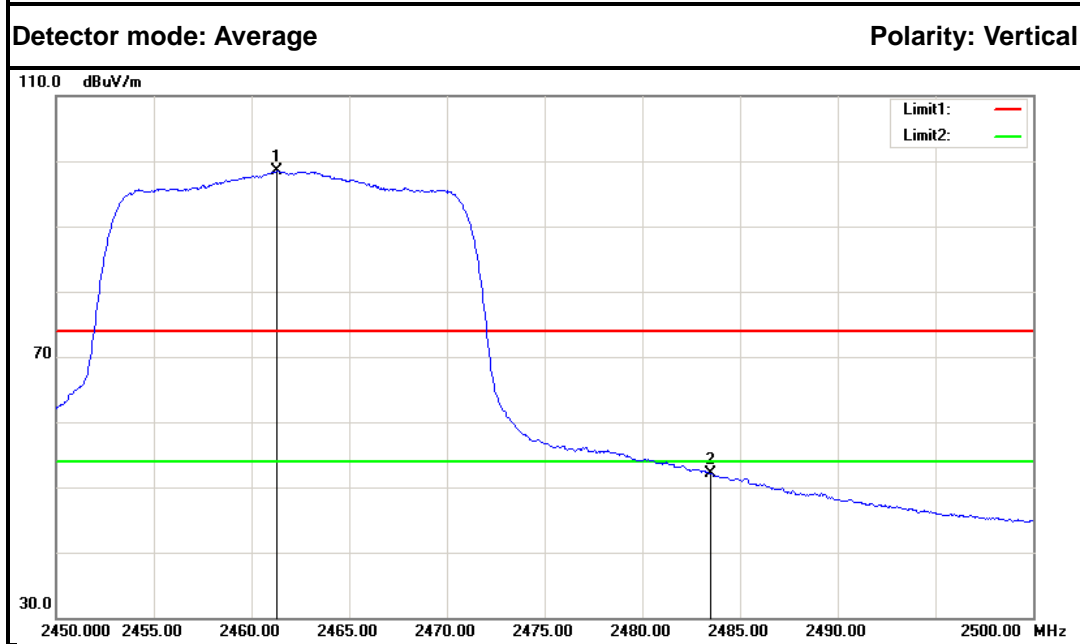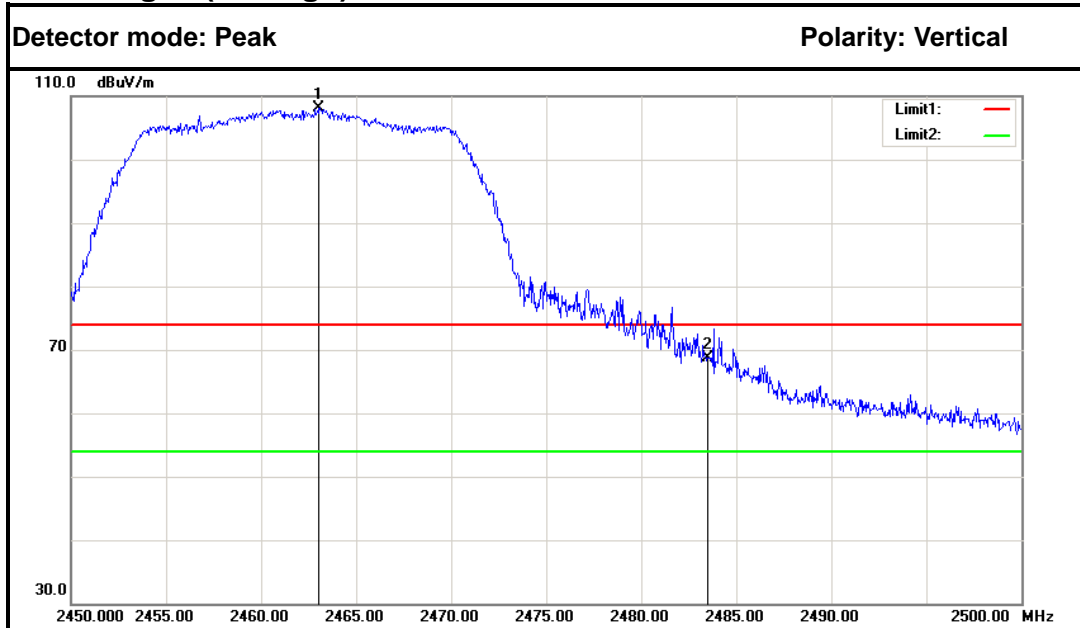



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.050	110.55	-2.46	108.09	---	---	Peak	Vertical
2.	2483.500	71.12	-2.35	68.77	74.00	-5.23	Peak	Vertical
1.	2461.300	100.95	-2.47	98.48	---	---	Average	Vertical
2.	2483.500	54.51	-2.35	52.16	54.00	-1.84	Average	Vertical

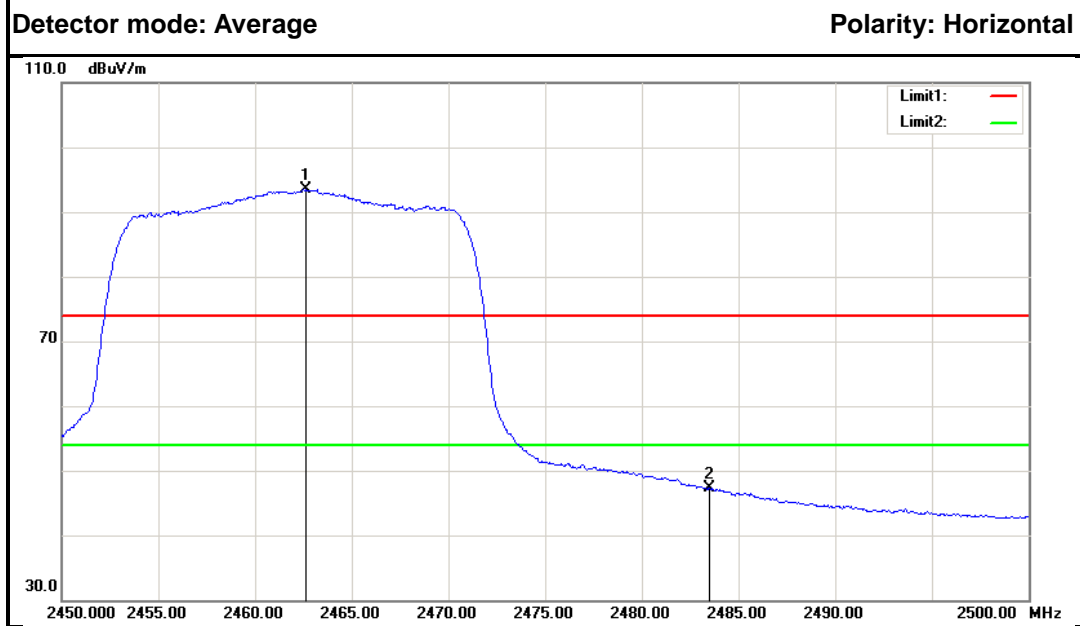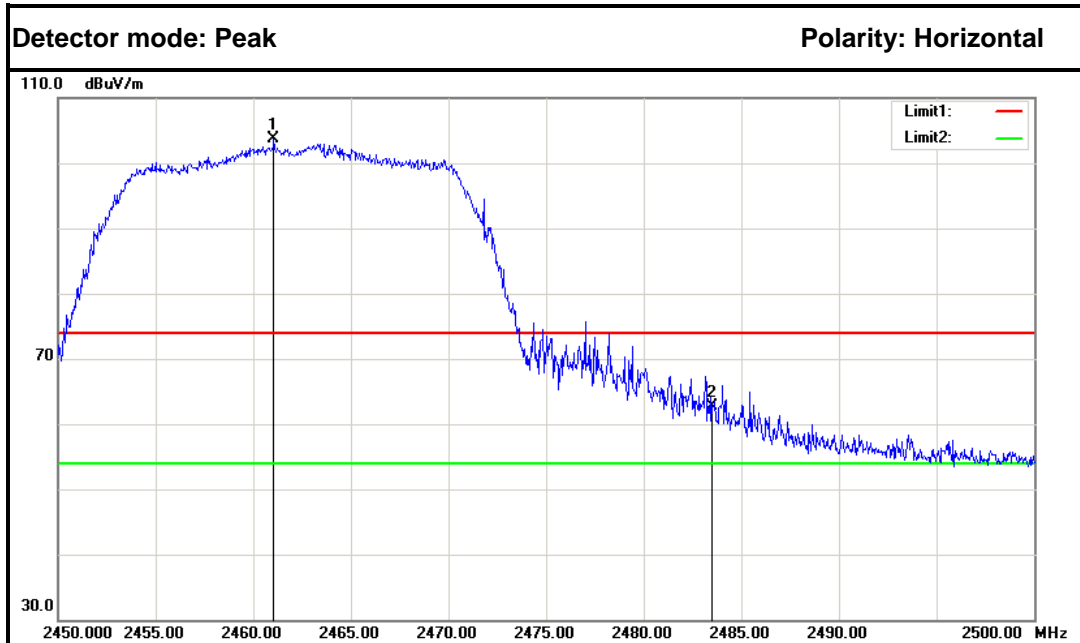



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2461.050	106.12	-2.47	103.65	---	---	Peak	Horizontal
2.	2483.500	65.15	-2.35	62.80	74.00	-11.20	Peak	Horizontal
1.	2462.650	95.88	-2.46	93.42	---	---	Average	Horizontal
2.	2483.500	49.57	-2.35	47.22	54.00	-6.78	Average	Horizontal



IEEE 802.11n HT40 MHz mode
Band Edges (CH Low)

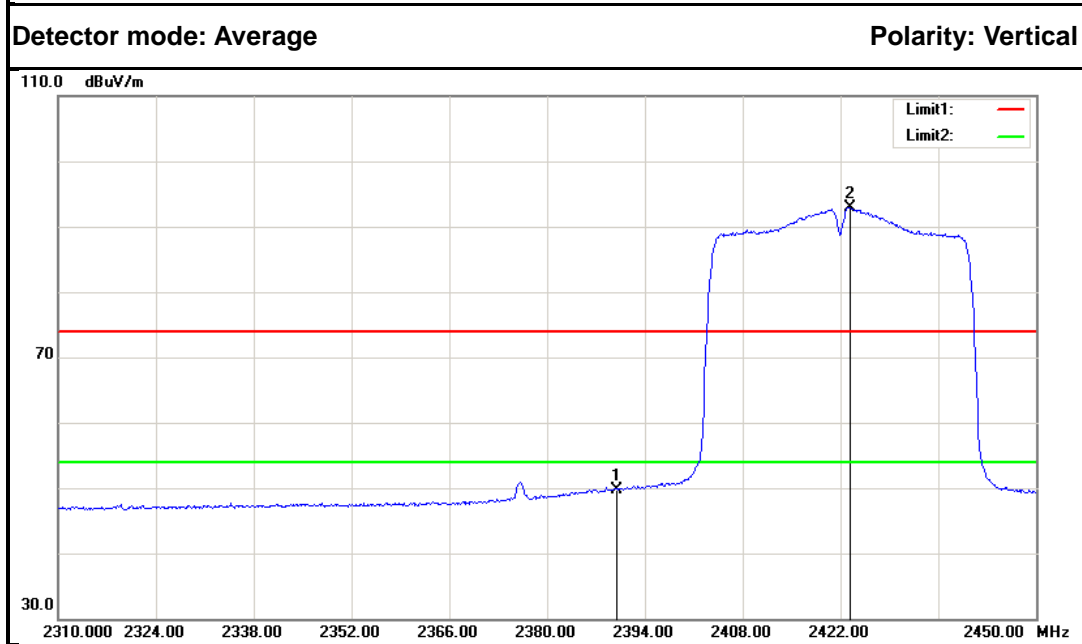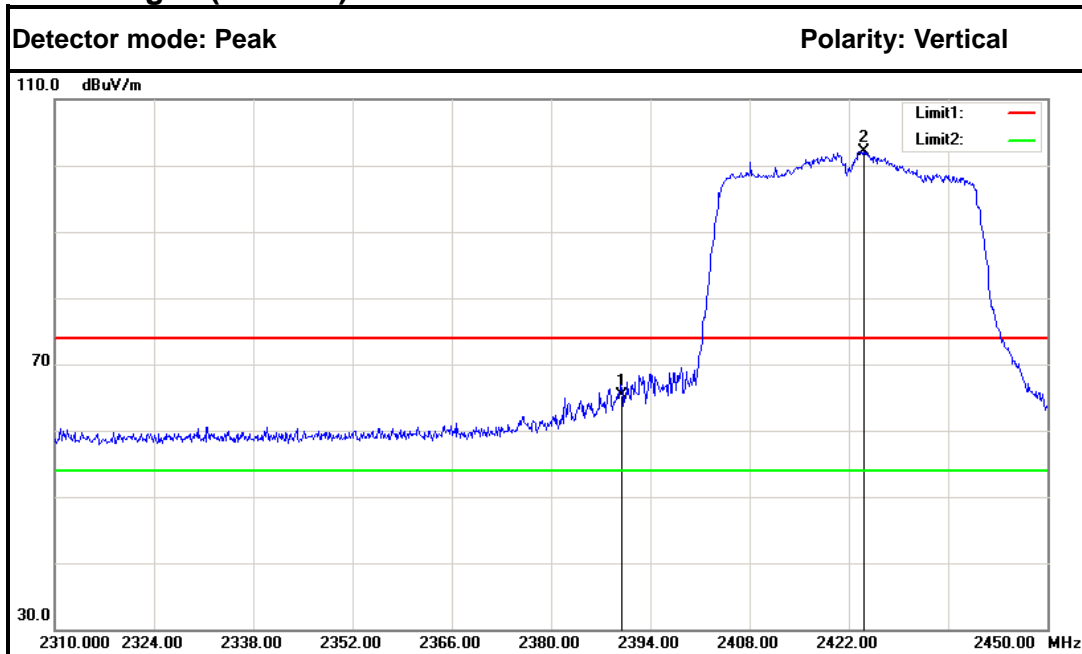



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	68.20	-2.86	65.34	74.00	-8.66	Peak	Vertical
2.	2424.100	104.79	-2.68	102.11	---	---	Peak	Vertical
1.	2390.000	52.58	-2.86	49.72	54.00	-4.28	Average	Vertical
2.	2423.400	95.64	-2.68	92.96	---	---	Average	Vertical

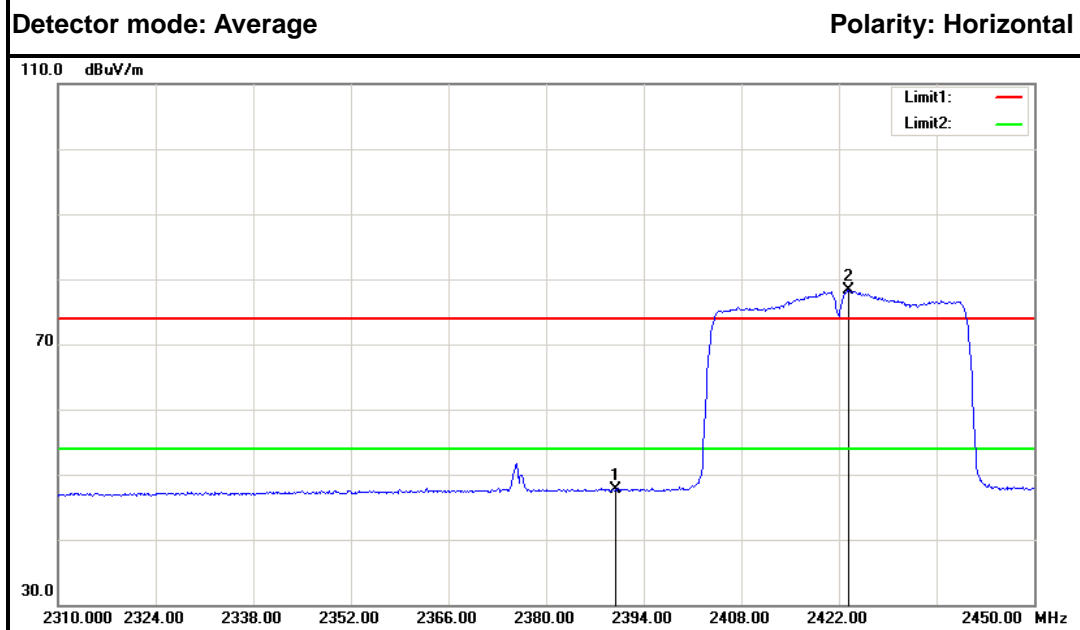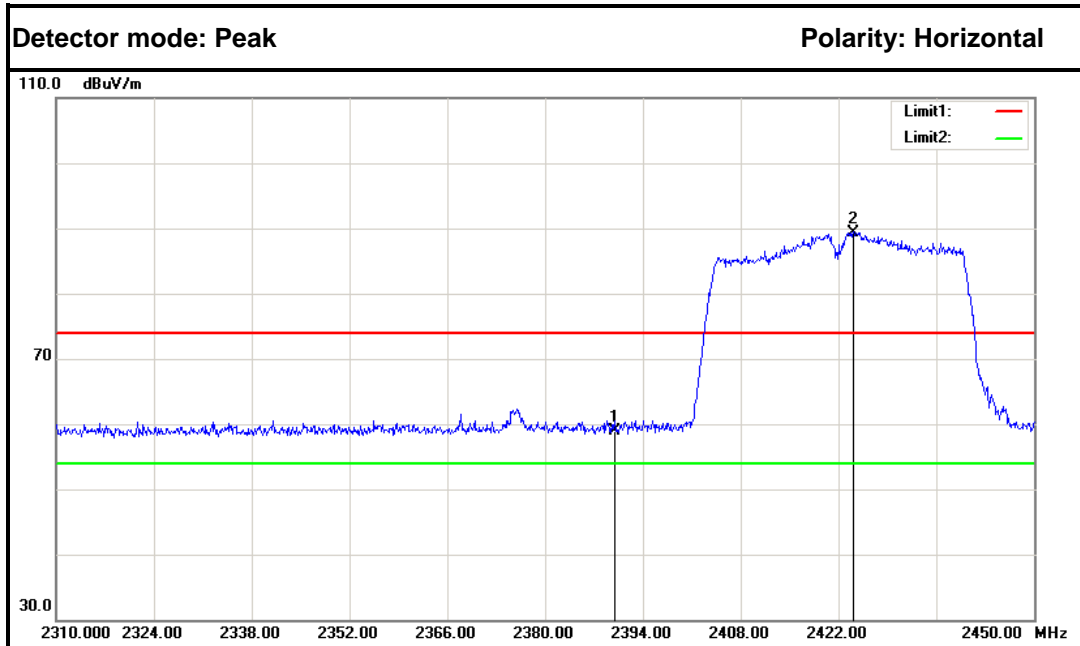



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	61.73	-2.86	58.87	74.00	-15.13	Peak	Horizontal
2.	2424.100	92.08	-2.68	89.40	---	---	Peak	Horizontal
1.	2390.000	50.49	-2.86	47.63	54.00	-6.37	Average	Horizontal
2.	2423.400	80.97	-2.68	78.29	---	---	Average	Horizontal



Band Edges (CH High)

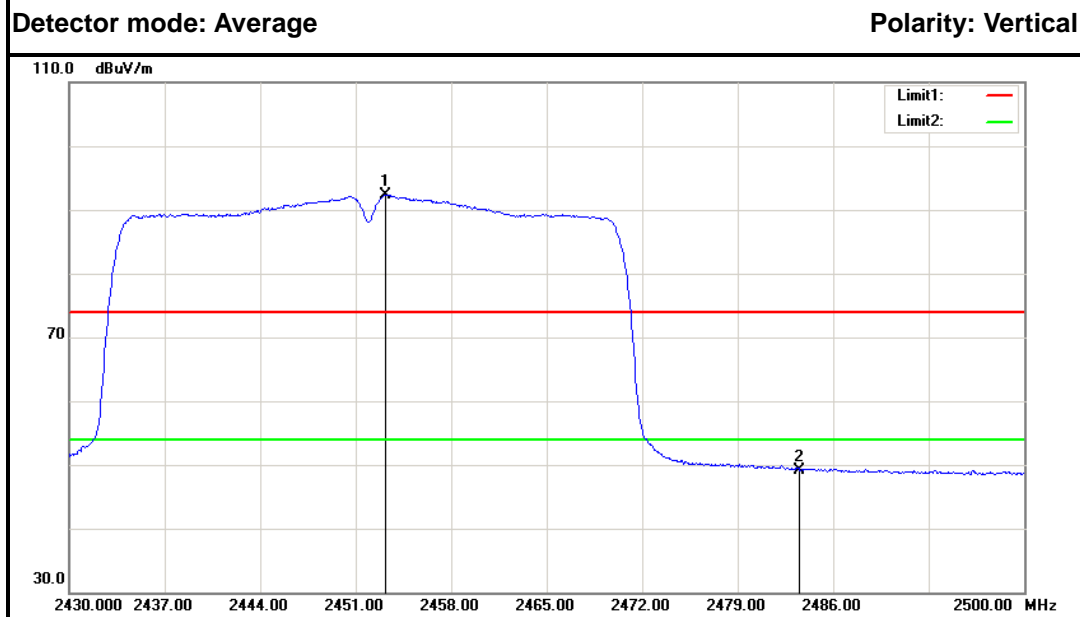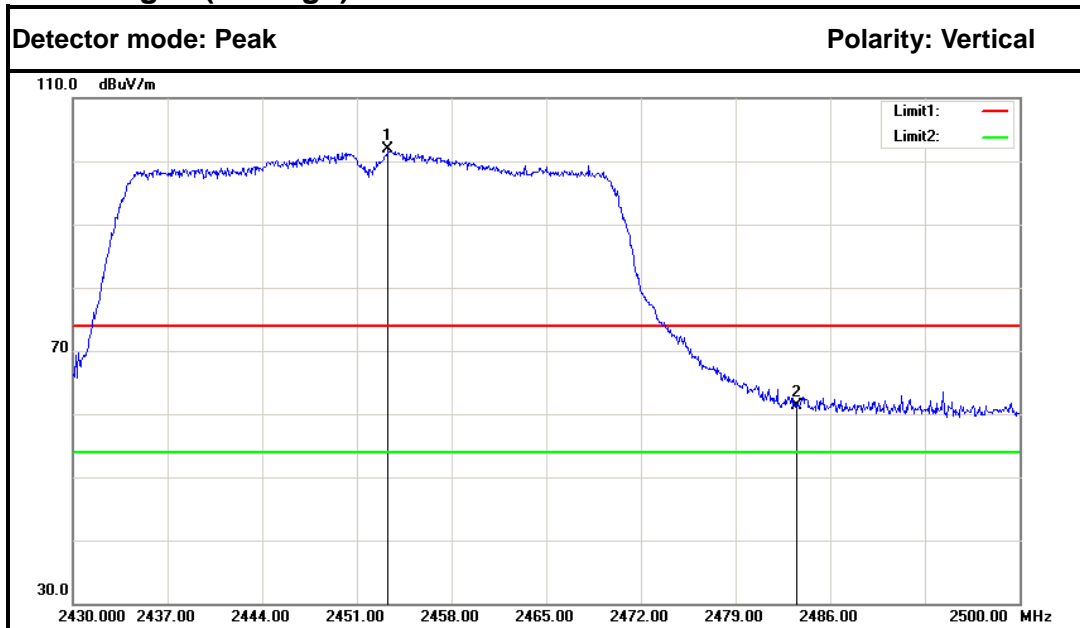

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2453.310	104.33	-2.52	101.81	---	---	Peak	Vertical
2.	2483.500	63.57	-2.35	61.22	74.00	-12.78	Peak	Vertical
1.	2453.170	94.86	-2.52	92.34	---	---	Average	Vertical
2.	2483.500	51.50	-2.35	49.15	54.00	-4.85	Average	Vertical

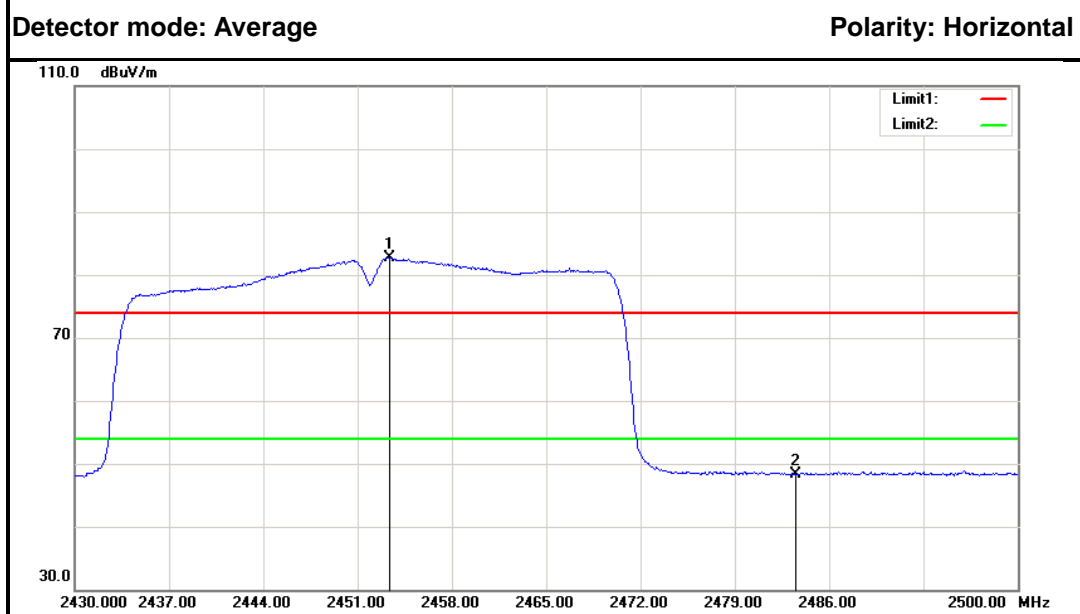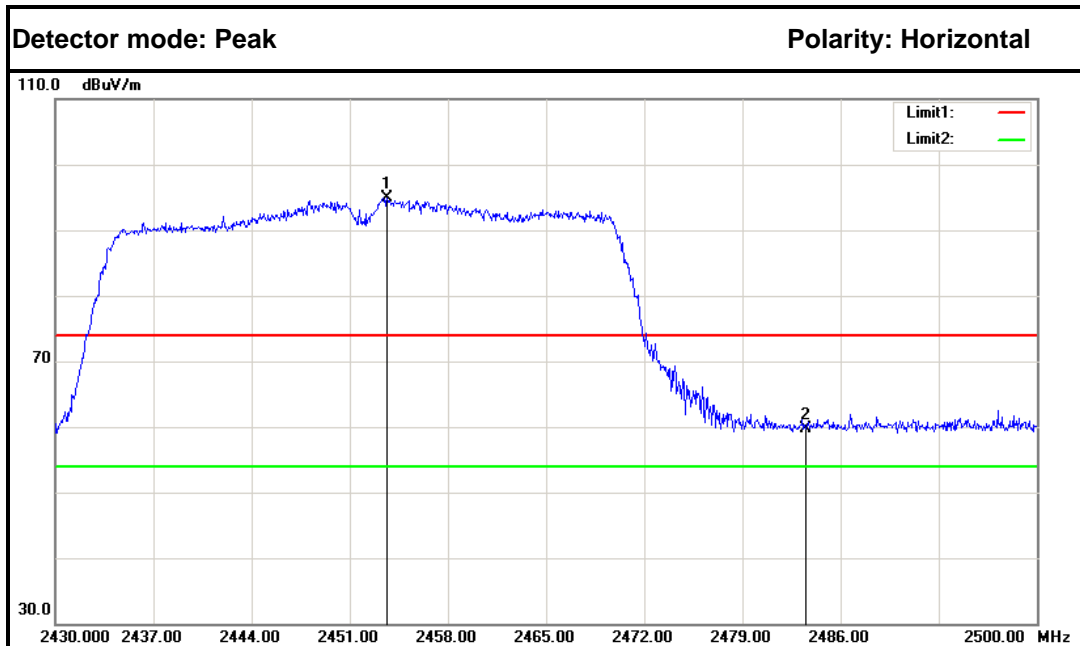

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2453.660	97.44	-2.51	94.93	---	---	Peak	Horizontal
2.	2483.500	62.14	-2.35	59.79	74.00	-14.21	Peak	Horizontal
1.	2453.380	85.22	-2.52	82.70	---	---	Average	Horizontal
2.	2483.500	50.75	-2.35	48.40	54.00	-5.60	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019


7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP





7.7.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-7.807	8	PASS
Mid	2437	-6.860		PASS
High	2462	-7.729		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-9.361	8	PASS
Mid	2437	-9.138		PASS
High	2462	-8.786		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-10.450	8	PASS
Mid	2437	-9.929		PASS
High	2462	-9.514		PASS



Test mode: IEEE 802.11n HT40 MHz


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-11.376	8	PASS
Mid	2437	-11.308		PASS
High	2452	-11.448		PASS




Test Plot



IEEE 802.11b mode

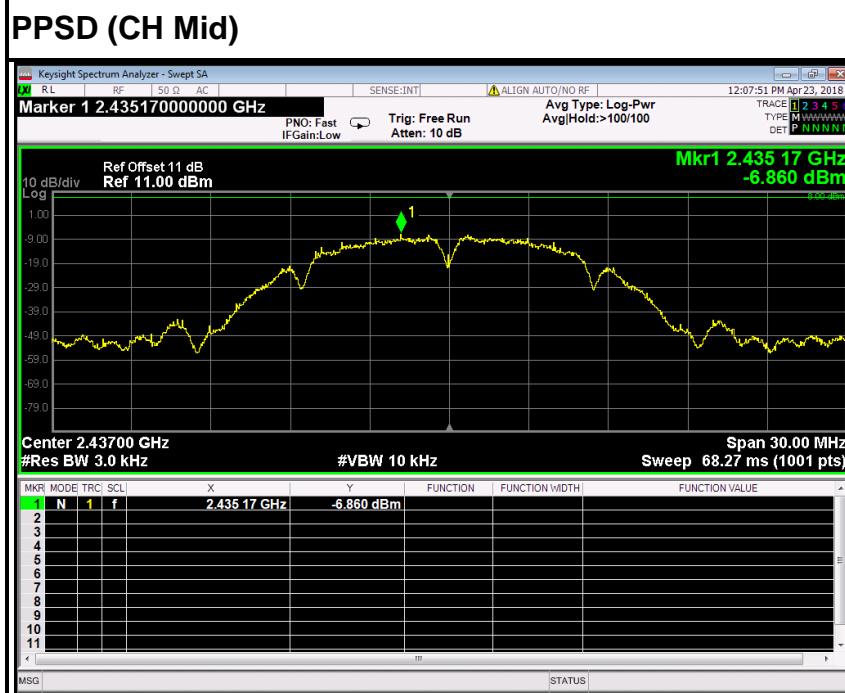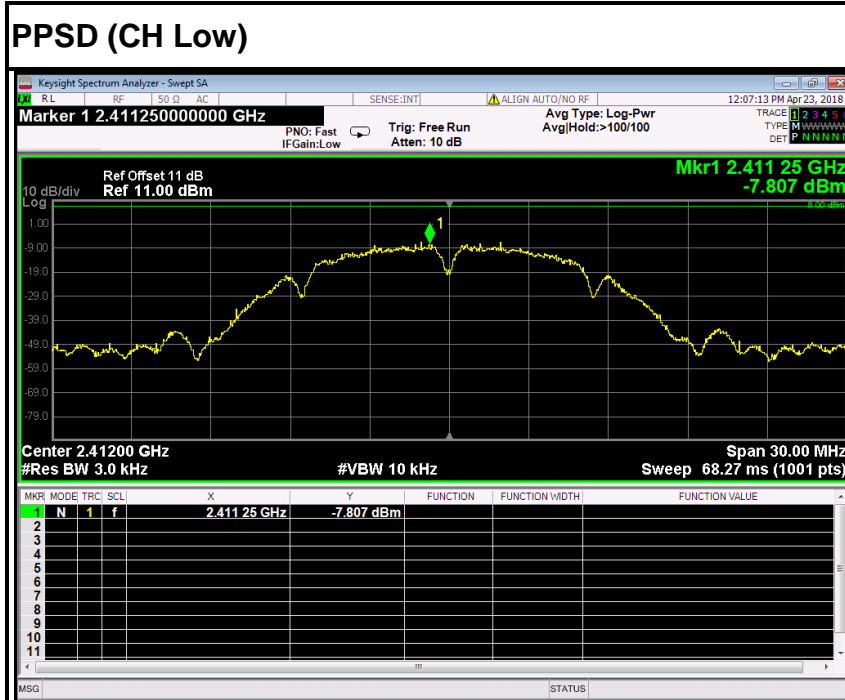

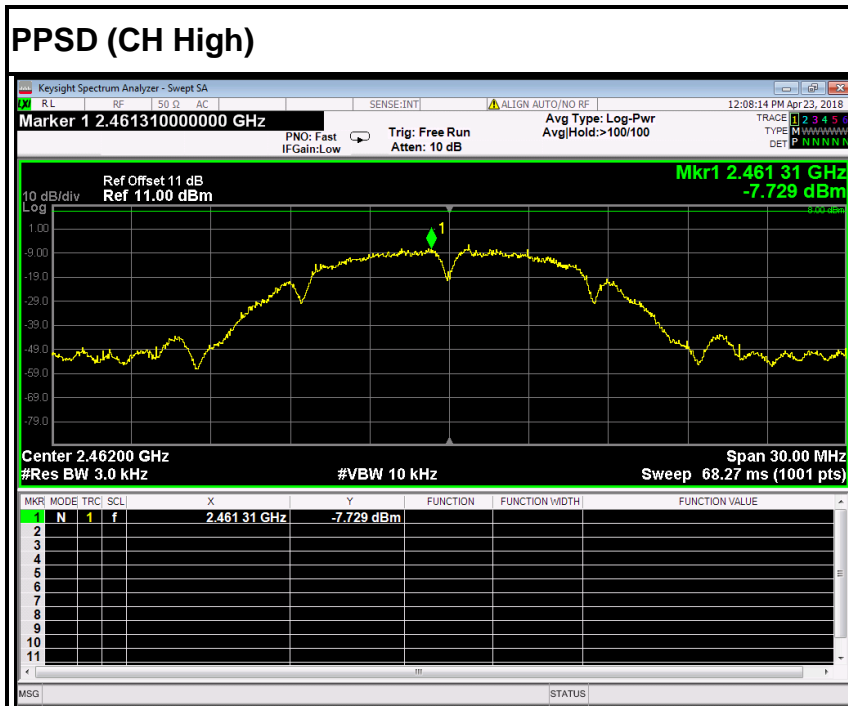

IEEE 802.11g mode

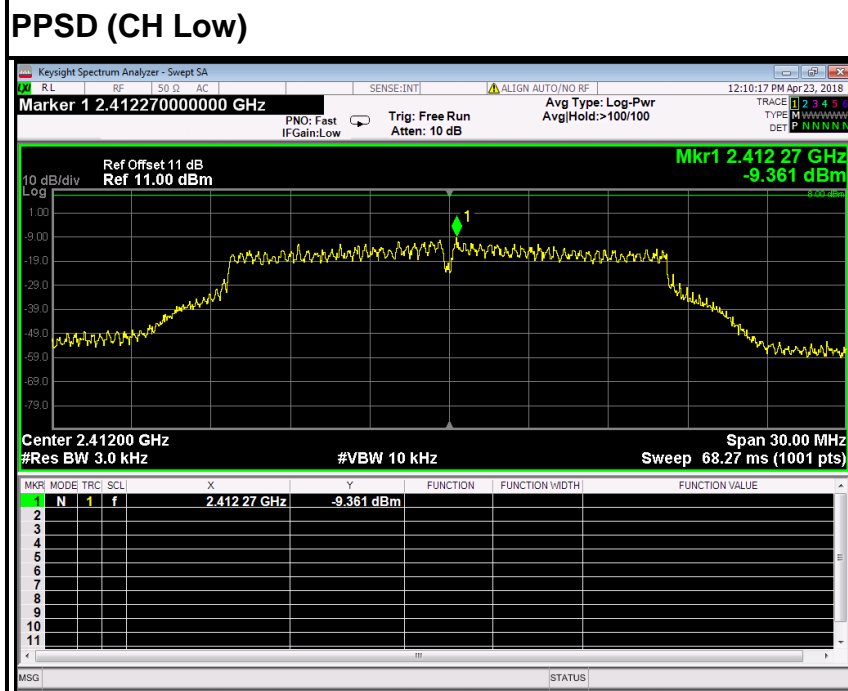


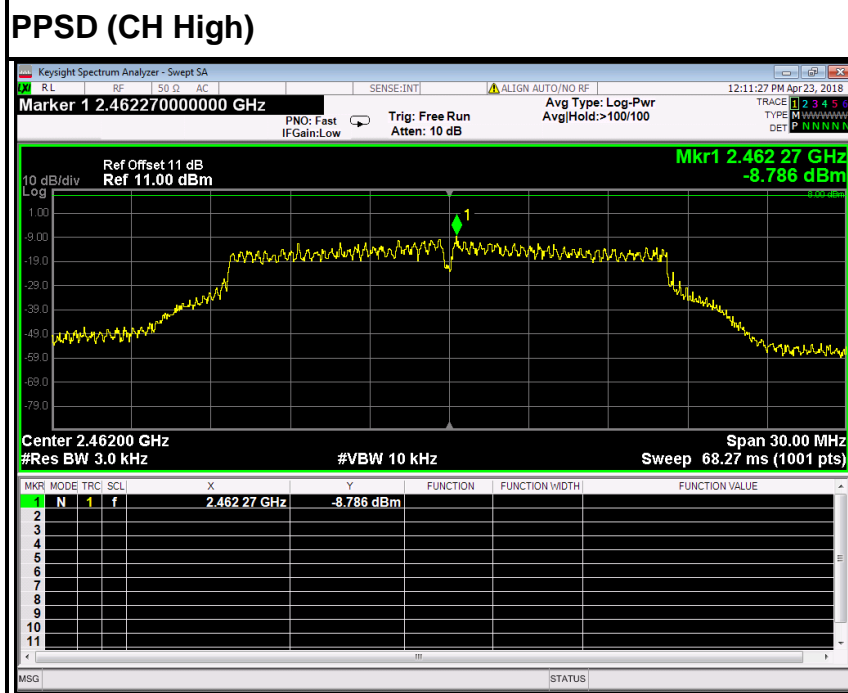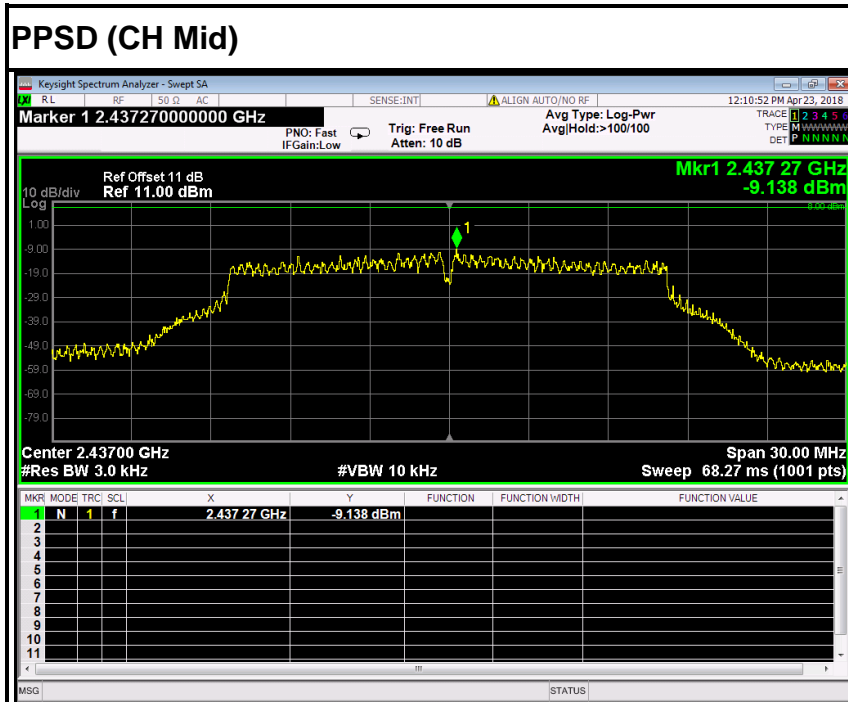





IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

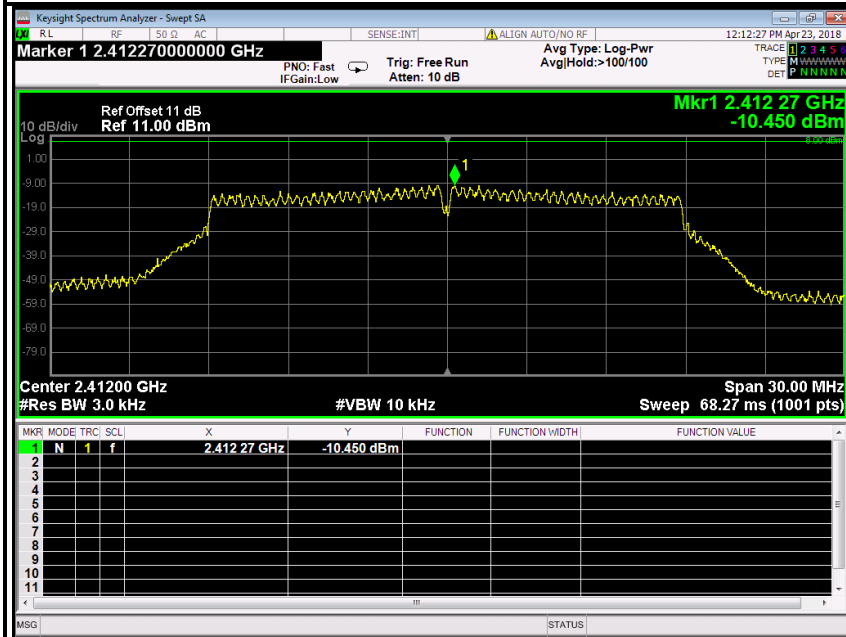

PPSD (CH Mid)

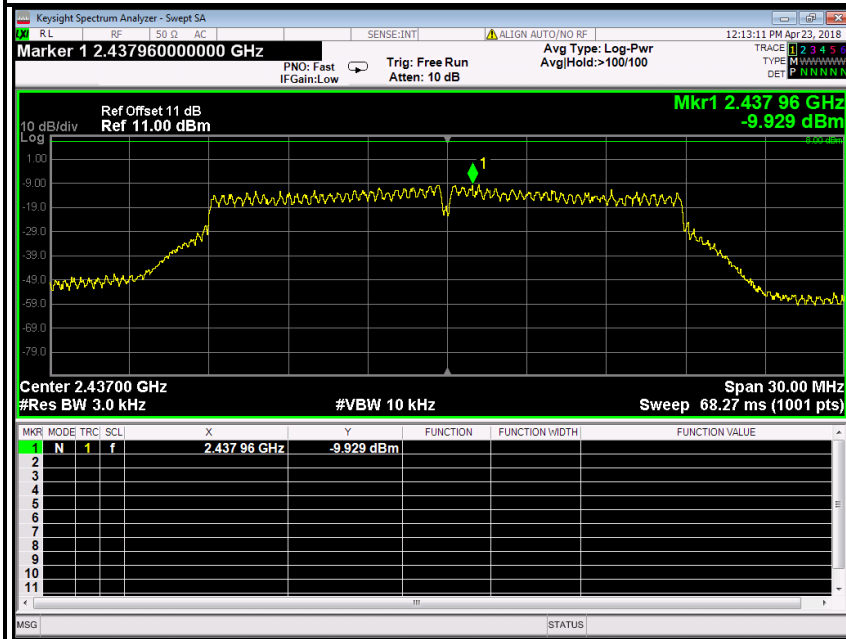

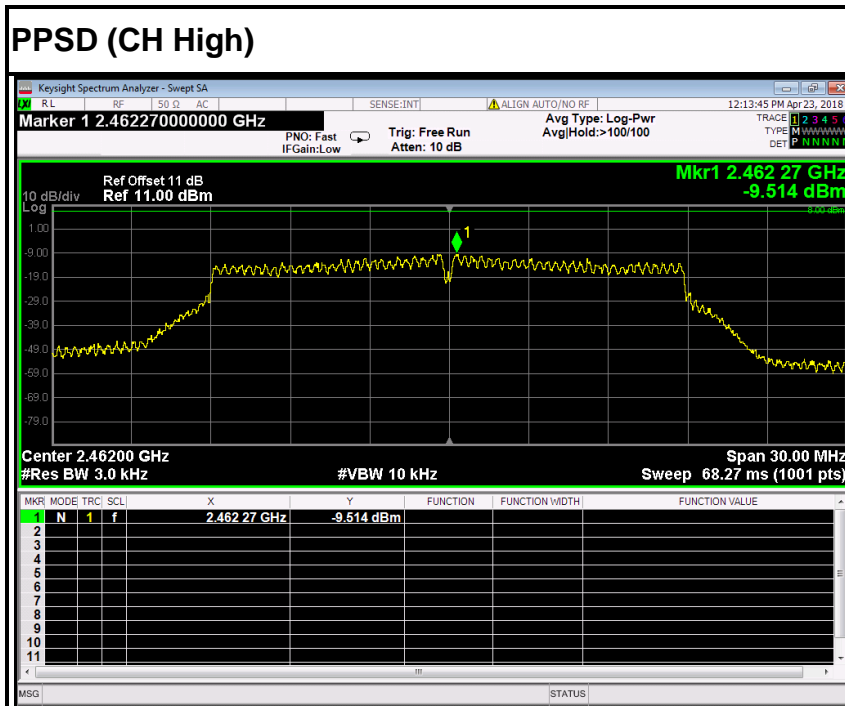

IEEE 802.11n HT40 MHz mode

