



EMC

TEST REPORT

REPORT NO. : F87063008
MODEL NO. : DB-456
DATE OF TEST : July 3, 1998

PREPARED FOR: DELTA ELECTRONICS INC.

ADDRESS : NO. 31-1, SHIEN PAM ROAD,
KUEI SHAN INDUSTRIAL ZONE,
TAOYUAN HSIEN, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 14 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION.....	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION.....	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION).....	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.1.1 EUT OPERATION CONDITION	8
4.2 TEST DATA OF CONDUCTED EMISSION	9
4.3 TEST DATA OF RADIATED EMISSION.....	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN...	12
6. ATTACHMENT I -TECHNICAL DESCRIPTION OF EUT	14



1.

CERTIFICATION

Issue Date: July 9, 1998

Product : COLOR MONITOR
 Trade Name : DELTA
 Model No. : DB-456
 Applicant : DELTA ELECTRONICS INC.
 Standard : FCC Part 15, Subpart B, Class B
 ANSI C63.4-1992
 CISPR 22:1993+A1+A2

We hereby certify that one sample of the designation has been tested in our facility on July 3, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

TESTED BY: Chris Yang, DATE: 7/9/98
 (Chris Yang)

CHECKED BY: Sharon Hsiung, DATE: 7/9/98
 (Sharon Hsiung)

APPROVED BY: Mike Su, DATE: 7/9/98
 (Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAP[®]

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	COLOR MONITOR
Model No.	:	DB-456
Power Supply Type	:	Switching
Power Cord	:	Nonshielded (1.8 m)
Data Cable	:	Shielded (1.5 m)

Note: The EUT is a 14" color monitor with resolution up to 1024 x 768.

The EUT is a high performance digital color monitor for use with IBM PC/XT/AT And PS/2 computers or compatibles with analog RGB output.

There is one ferrite core on the video cable outside the monitor.

For more detailed features description, please refer to ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT and User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No.	Product	Brand	Model No.	FCC ID	I/O Cable
1	PERSONAL COMPUTER	HP	VL SERIES 4 5/100	B94VECTRA500T	Nonshielded Power (1.8m)
2	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
3	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.2m) Nonshielded Power (1.8m)
4	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.5m) Nonshielded Power (1.8m)
5	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded Signal (1.5m)
6	VGA DISPLAY CARD	GORDIA	DSV3365	LUT-DSV3365	N/A

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site. Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594A	3144A00308	Sept. 1, 1998
HP Preamplifier	8447D	2944A08119	Aug. 2, 1998
ROHDE & SCHWARZ TEST RECEIVER	ESVP	893496/030	July 17, 1998
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 28, 1998
CHASE Bilog Antenna	CBL6112	2086	Dec. 26, 1998
EMCO Turn Table	1060	1195	N/A
EMCO Tower	1051	1163	N/A
Open Field Test Site	Site 2	ADT-R02	Sept. 26, 1998

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESH3	893495/006	July 23, 1998
ROHDE & SCHWARZ Spectrum Monitor	EZM	893787/013	July 24, 1998
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	Aug. 1, 1998
EMCO-L.I.S.N. Shielded Room	3825/2 Site 2	9204-1964 ADT-C02	July 22, 1998 N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.
And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

- Note: (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- Note: (1) The lower limit shall apply at the transition frequencies.
 (2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range	:	0.15 - 30 MHz (Conducted Emission) 30 - 1000 MHz (Radiated Emission)
Input Voltage	:	120 Vac, 60 Hz
Temperature	:	28 °C
Humidity	:	60 %
Atmospheric Pressure	:	998 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -2.0 dB at 0.190 MHz
	Minimum passing margin of radiated emission: -4.0 dB at 38.63 MHz

Note: The EUT was pretested under the following resolution & horizontal synchronization speed mode:

- * 1024x768 mode (48 kHz),
- * 800x600 mode (54 kHz)
- * 640x480 mode (31 kHz)

The worst emission levels were found under 1024x768 mode (48 kHz) and therefore the test data of only this mode is recorded.

4.1.1 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. PC sends "H" messages to monitor (EUT) and monitor displays "H" patterns on screen.
5. PC sends "H" messages to modem.
6. PC sends "H" messages to printer, and the printer prints them on paper.
7. Repeat steps 3-7.



4.2 TEST DATA OF CONDUCTED EMISSION


EUT: **COLOR MONITOR**MODEL: **DB-456**MODE: **1024x768 (48 kHz)**

6 dB Bandwidth: 10 kHz

TEST PERSONNEL:

Freq. [MHz]	L Level		N Level		Limit		Margin [dB (μV)]			
	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.150	61.40	41.00	58.40	39.80	66.00	56.00	-4.6	-15.0	-7.6	-16.2
0.190	58.00	52.00	56.60	51.80	64.04	54.04	-6.0	-2.0	-7.4	-2.2
0.285	43.70	-	39.20	-	60.67	50.67	-17.0	-	-21.5	-
0.770	35.70	-	24.20	-	56.00	46.00	-20.3	-	-31.8	-
9.000	36.40	-	34.80	-	60.00	50.00	-23.6	-	-25.2	-
19.405	40.90	-	40.70	-	60.00	50.00	-19.1	-	-19.3	-


- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission level of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

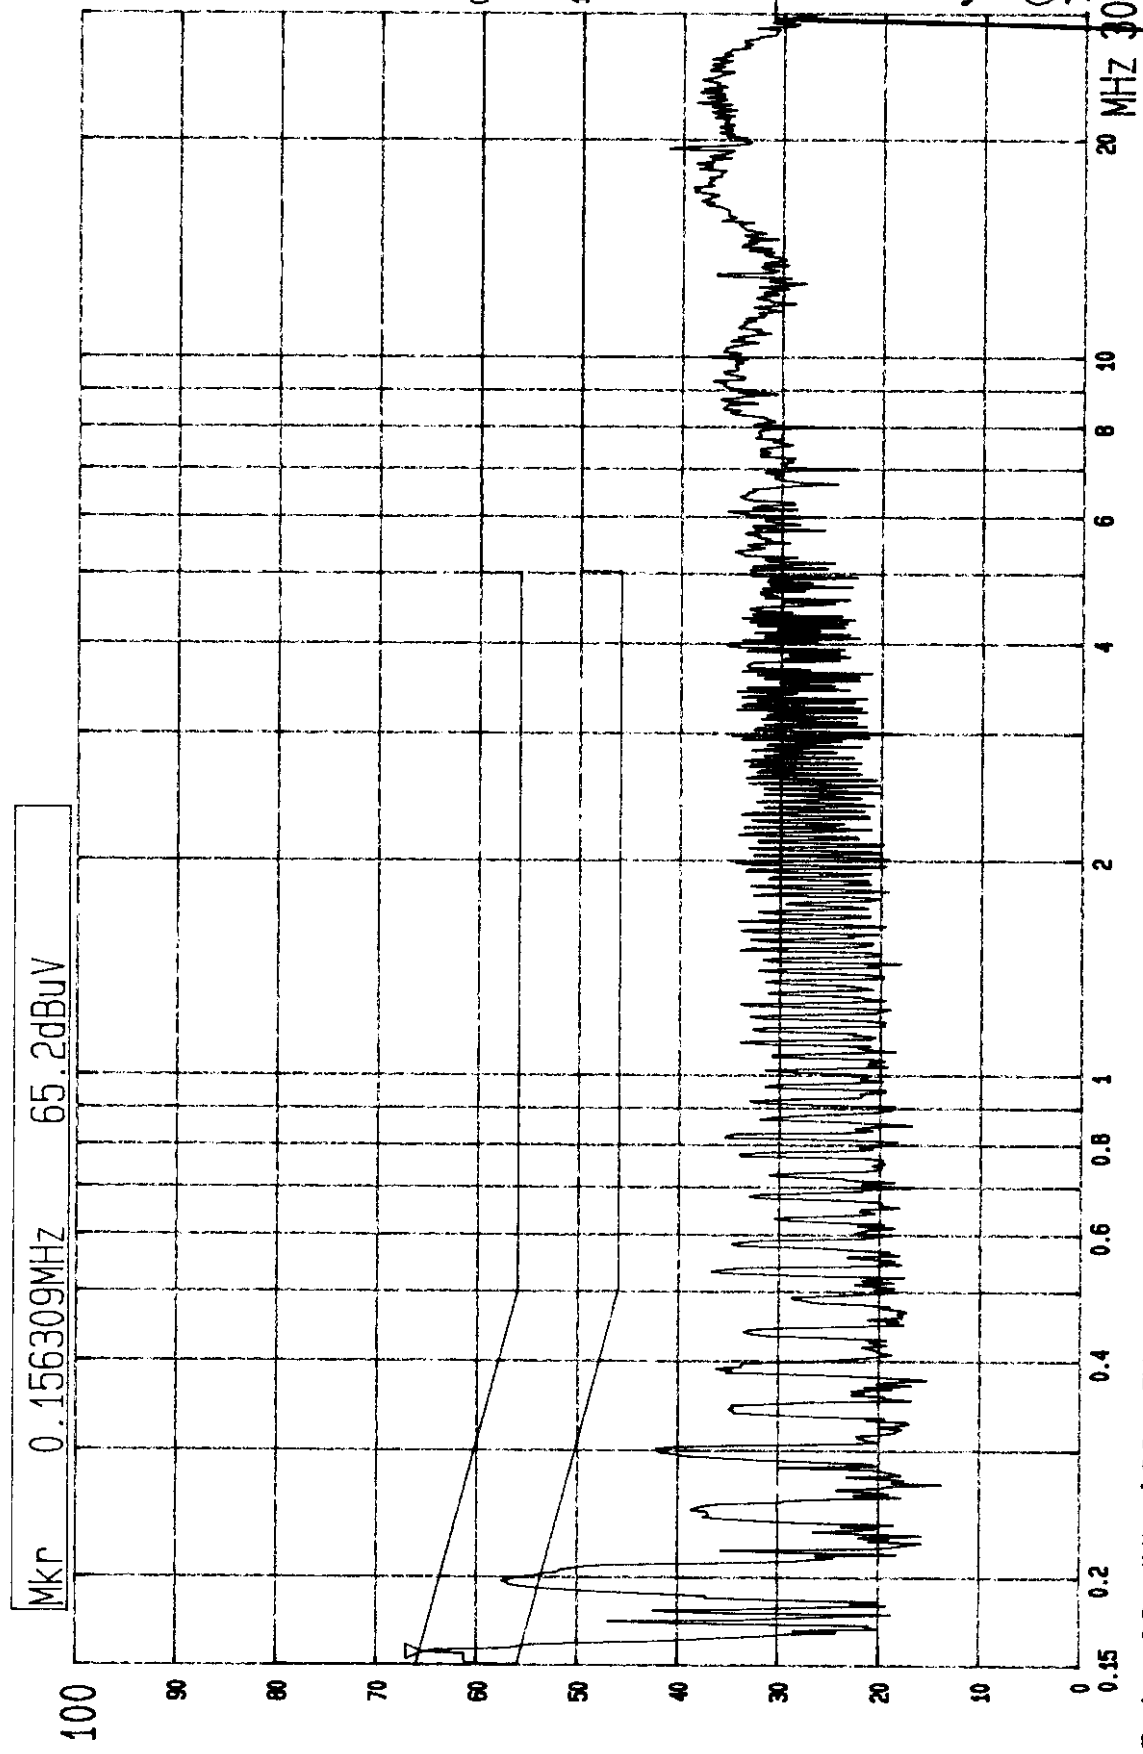

ADT CORP
LISN: L

--- Date 03.JUL.'98 Time 16:45:27
CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE)
MODEL: DB-456 1024X768 60HZ/48KHZ

Report No. F87063008
Page 9-2
Tested by Chris Young

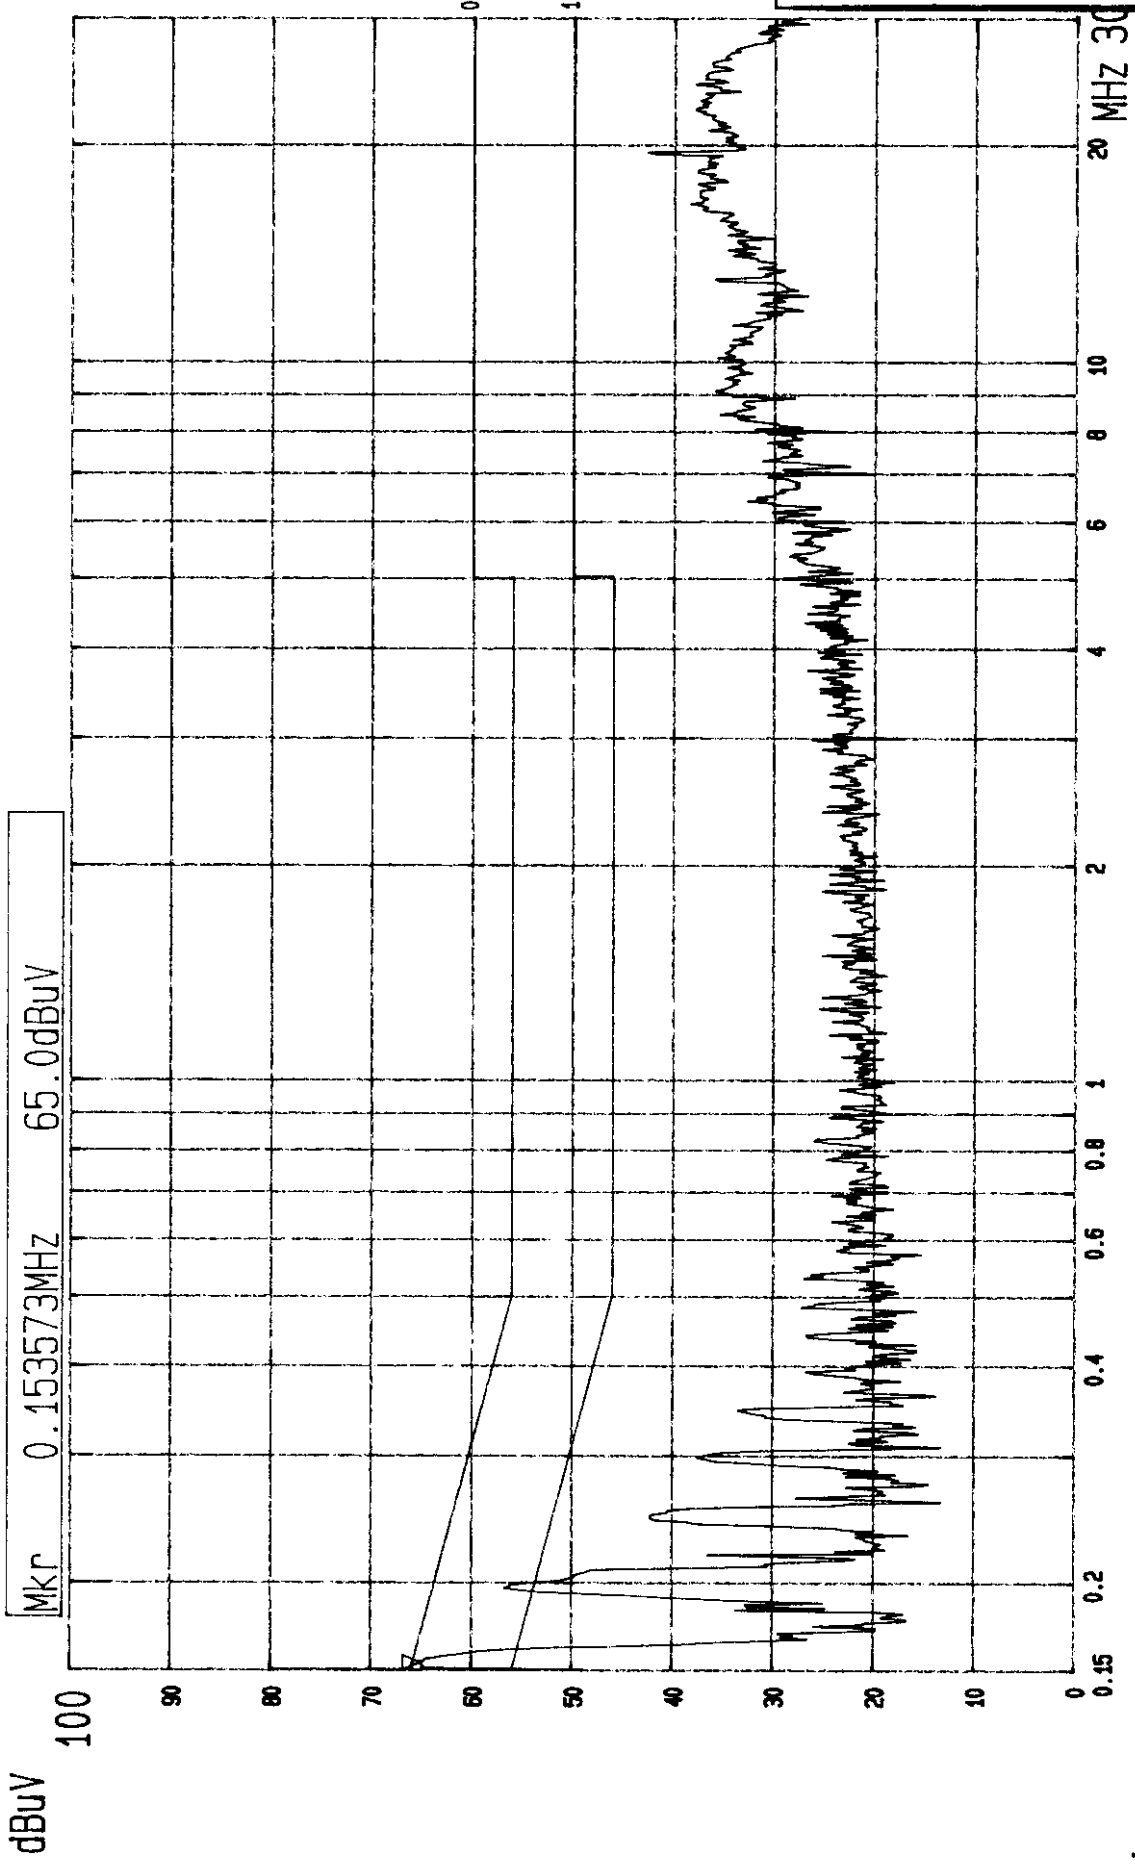

--- Date 03.JUL.'98 Time 16:40:21
CISPR 22 CLASS B CONDUCTION TEST (PEAK VALUE)
MODEL : DB-456 1024X768 60HZ/48KHZ
ADT CORP
LISN: N



4.3 TEST DATA OF RADIATED EMISSION

EUT: **COLOR MONITOR**

MODEL: **DB-456**

MODE: **1024x768 (48 kHz)**

ANTENNA: **CHASE BILOG CBL6112**

POLARITY: **Horizontal**

DETECTOR FUNCTION: **Quasi-peak**

6 dB BANDWIDTH: **120 kHz**

FREQUENCY RANGE: **30-1000 MHz**

MEASURED DISTANCE: **10 M**

TEST PERSONNEL: *Chris Yancy*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
72.95	8.3	13.0	21.3	30.0	-8.7
110.61	14.1	11.0	25.1	30.0	-4.9
117.08	14.8	7.4	22.2	30.0	-7.8
130.07	14.6	7.1	21.7	30.0	-8.3
182.14	12.3	10.1	22.4	30.0	-7.6
214.68	14.0	6.2	20.2	30.0	-9.8

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
 2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: COLOR MONITORMODEL: DB-456MODE: 1024x768 (48 kHz)ANTENNA: CHASE BILOG CBL6112POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 MTEST PERSONNEL: *Chris Young*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.63	14.4	11.6	26.0	30.0	-4.0
72.60	7.3	16.8	24.1	30.0	-5.9
110.60	13.3	11.5	24.8	30.0	-5.2
117.09	14.8	8.0	22.8	30.0	-7.2
208.16	13.9	11.0	24.9	30.0	-5.1
214.69	14.2	8.0	22.2	30.0	-7.8

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
 2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



6. ATTACHMENT I -TECHNICAL DESCRIPTION OF EUT

SPECIFICATIONS:

* CRT	Size : 14" (13.2" Viewable diagonal) Deflection Angle : 90 degrees Phosphor Pitch : 0.28 mm
* Graphics Standards Compatibility	XGA, 8514A, Super VGA, VGA, VESA (800x600)
* Resolution (Max)	1024 x 768 (Non-Interlaced)
* Video Band Width	85 MHz
* Synchronization	Horizontal : 30K ~ 57KHz Vertical : 50Hz ~ 120Hz
* Input Signal	Video-RGB Analog 0.7VP-P/75 ohms positive Vertical-TTL separate
* Display Colors	Unlimited
* Display Area	Factory Setting 256mm (H) x 192mm (V) Large Scan 280mm (H) x 210mm (V) (Dependent upon signal timing used)
* Power Source	AC 100 ~ 240V \pm 10% 50/60Hz \pm 3Hz
* Power Consumption	75W
* Input connector	Video: 15pin min D-SUB Power: 3pin plug
* Dimension	350mm (W) x 360mm (H) x 380mm (D)
* Weight	Net: 11.1kgs Gross: 13.0kgs
* User Controls and Function	Power-switch, Brightness, Contrast H-size, H center, V-size, V-center, Pincushion Trapezoid
* Operating Condition	Temperature : 10°C to 40°C Humidity : 10% ~ 90% Altitude : TO 10,000 feet
* Storage Conditions	Temperature : -20°C to 60°C Humidity : 10% ~ 95% Altitude : TO 50,000 feet
* Power Savings LED LED mode	ON ----- Green Standby/Suspend ----- Amber OFF ----- Amber
* Other Features	Compatible with the Display Data Channel DDC1 & DDV2B Plug & Play for Windows95/Windows98