

*EXHIBIT 3*

*Test Report*



*Test Report*

*TTEMC-F98091*

APPLICATION FOR CERTIFICATION  
Class II Permissive Change  
On Behalf of  
Delta Electronics, Inc.  
Color Monitor

Model : (1) 15C32A0W (2) 15C3220W63 (3) 15C32A08

FCC ID : H79DE-570

Brand : PHILIPS

Prepared for : Delta Electronics, Inc.  
No. 3, Tung Yuan Road, Chungli  
Industrial Zone, Taoyuan Hsien,  
Taiwan, R.O.C.

Prepared By : Taiwan Tokin EMC Eng. Corp.  
No. 53-11, Tin-Fu Tsun, Lin-Kou,  
Taipei Hsien, Taiwan, R.O.C.

Tel: (02) 2609-9301, 2609-2133

File Number : ATM-G98312  
Report Number : TTEMC-F98091  
Date of Test : May 26 / 30, 1998  
Date of Report : Jun. 01, 1998

# TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>1-1</b>
1.1. Description of Device (EUT).....	1-1
1.2. Tested System Details.....	1-2
1.3. Description of Test Facility .....	1-4
<b>2. POWERLINE CONDUCTED TEST.....</b>	<b>2-1</b>
2.1. Test Equipment .....	2-1
2.2. Block Diagram of Test Setup.....	2-1
2.3. Conducted Powerline Emission Limit (CLASS B) .....	2-2
2.4. EUT Configuration on Measurement .....	2-2
2.5. Operating Condition of EUT .....	2-2
2.6. Test Procedure .....	2-3
2.7. Line Conducted RF Voltage Measurement Results.....	2-3
<b>3. RADIATED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Radiation Limit (CLASS B) .....	3-2
3.4. EUT Configuration on Measurement .....	3-2
3.5. Operating Condition of EUT .....	3-2
3.6. Test Procedure .....	3-3
3.7. Radiated Emission Noise Measurement Results .....	3-4
<b>4. DEVIATIONS TO TEST SPECIFICATIONS .....</b>	<b>4-1</b>
<b>5. PHOTOGRAPHS .....</b>	<b>5-1</b>
5.1. Photos of Powerline Conducted Measurement.....	5-1
5.2. Photos of Radiated Measurement at Open Field Test Site .....	5-2
5.3. Photos of Radiated Measurement at Anechoic Chamber .....	5-4

APPENDIX I (Radiated Test Data at Anechoic Chamber)

## TEST REPORT CERTIFICATION (Class II Permissive Change)

Applicant : Delta Electronics, Inc.  
Manufacturer : Delta Electronics, Inc.  
FCC ID : H79DE-570  
EUT Description : Color Monitor  
(A) MODEL NO. : (1) 15C32A0W (2) 15C3220W63  
(3) 15C32A08  
(B) SERIAL NO. : N/A  
(B) BRAND : PHILIPS  
(C) POWER SUPPLY : AC 120V/60Hz

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 1996  
AND FCC / ANSI C63.4-1992

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15B Class B limits both radiated and conducted emissions.

The measurement results were contained in this test report and TAIWAN TOKIN EMC ENG. CORP. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report showed that the EUT to be technically compliant with the FCC official limits. TAIWAN TOKIN EMC ENG. CORP. recommend that this data was submitted for FCC certification purposes if a 6dB margin below FCC limits was obtained. This report applied to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : May 26 / 30, 1998

Prepared by :

  
(CHERRY WANG)

Test Engineer :

  
(ALLEN WANG)

Approve & Authorized Signer :

  
(JACKIE DENG) 6/3/98

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Description	:	Color Monitor
Model Number	:	(1) 15C32A0W (2) 15C3220W63 (3) 15C32A08
Serial Number	:	N/A
Brand	:	PHILIPS
FCC ID	:	H79DE-570
Applicant	:	Delta Electronics, Inc.
Manufacturer	:	No. 3, Tung Yuan Road, Chungli Industrial Zone, Taoyuan Hsien, Taiwan, R.O.C.
CRT	:	Philips, M/N M36EDR323X191/2F01
Data Cable	:	Shielded, Undetachable, 1.5m Bonded a ferrite core
Power Cord	:	Nonshielded, Detachable, 1.8m
Date of Test	:	May 26 / 30, 1998

Remark : This EUT is a modified version of original FCC ID H79DE-570. The difference are as follows:

(1) to change H. freq. from 69KHz into 60KHz.

(2) to re-layout main board.

(3) Repair Max Regulation from 1280x1024 to

1024x768 NA

## 1.2. Tested System Details

### 1.2.1. PERSONAL COMPUTER

Model Number	:	D5251A
Serial Number	:	US72150127
FCC ID.	:	By FCC DoC
Manufacturer	:	HP
CD-ROM	:	Sony, M/N CDU31A S/N 0101003580 FCC ID. KGACDU31A
VGA Card	:	Metabyte, M/N VS03 FCC ID. I27MM-VS03A
Sound Card	:	M/N DSAC-300, S/N F/D 0599964
Modem Crad	:	M/N DS560-450, S/N ED 0588020
Power Cord	:	Nonshielded, Detachable, 1.8m
Telephone Line	:	Nonshielded, Detachable, 2.1m

### 1.2.2. KEYBOARD

Model Number	:	SK-250S
Serial Number	:	M97054167
FCC ID	:	By FCC DoC
Manufacturer	:	HP
Data Cable	:	Shielded, Undetachable, 1.5m Bonded two ferrite cores

### 1.2.3. PRINTER

Model Number	:	2225C+
Serial Number	:	2806S05196
FCC ID	:	DSI6XU2225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Regulated, Model AD-09
Power Cord	:	Nonshielded, Undetachable, 2.0m
Data Cable	:	Shielded, Detachable, 1.2m

### 1.2.4. MODEM

Model Number	:	1414
Serial Number	:	950098202
FCC ID	:	IFAXDM1414
Manufacturer	:	Accex
Data Cable	:	Shielded, Detachable, 1.2m
Power Adapter	:	Amigo, Model AM-91000A Nonshielded, Undetachable, 1.8m

## 1.2.5. MOUSE

Model Number : M-S34  
 Serial Number : LZA62807002  
 FCC ID : DZL210472  
 Manufacturer : HP  
 Data Cable : Nonshielded, Undetachable, 1.8m

## 1.2.6. WALKMAN

Model Number : WM-18  
 Manufacturer : Dragon Art Ind. Ltd.  
 Data Cable : Nonshielded, Detachable, 1.8m

## 1.2.7. SPEAKER

Model Number : J-008  
 Serial Number : 97-C-009784-T  
 Manufacturer : Jazz Hipster  
 Data Cable : Nonshielded, Undetachable, 1.1m

## 1.2.8. JOYSTICK

Part Number : 1FD05015  
 Manufacturer : RAMBO  
 Data Cable : Nonshielded, Undetachable, 1.6m

## 1.2.9. MICROPHONE #1

Model Number : MIC-2  
 Manufacturer : Multimedia Microphone System  
 Data Cable : Nonshielded, Undetachable, 2.2m

## 1.2.10. MICROPHONE #2

Model Number : MIC-2  
 Manufacturer : Multimedia Microphone System  
 Data Cable : Nonshielded, Undetachable, 2.2m

## 1.2.11. TELEPHONE

Model Number : K-2500TRP  
 Serial Number : 1015198  
 Manufacturer : Kuo Yang  
 Data Cable : Nonshielded, Detachable, 1.8m

## 1.2.12. EARPHONE (Connected to Keyboard)

Model Number : N/A  
 Manufacturer : Cathay Pacific  
 Data Cable : Nonshielded, Undetachable, 1.3m

## 1.2.13. USB SIMULATOR

Model Number : N/A  
 Manufacturer : Philips  
 Data Cable \*2 : Nonshielded, Detachable, 1.9m

### 1.3. Description of Test Facility

Site Description (No. 4 Open Site)	:	May 14, 1997 file on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A.
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP lab. Code	:	200077-0



## 2. POWERLINE CONDUCTED TEST


### 2.1. Test Equipment

The following test equipments were used during the power line conducted tests :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	844591/015	Nov.25, 97'	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-1370-9	Jun.20, 97'	1 Year
3.	L.I.S.N. #2	Kyoritsu	KNW-407	8-1370-10	Jun.20, 97'	1 Year

### 2.2. Block Diagram of Test Setup

#### 2.2.1. EUT's Power Cord Connected to L.I.S.N. Directly

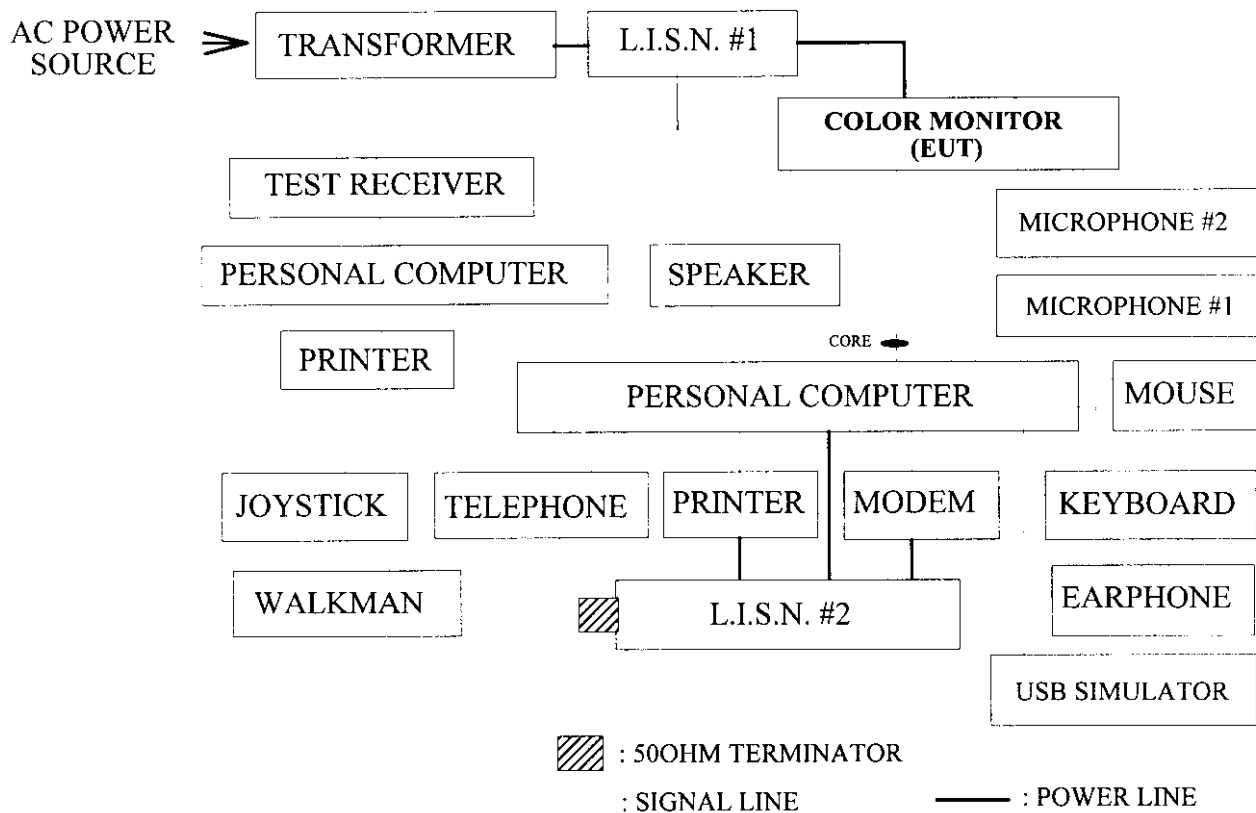






# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 14:50:31

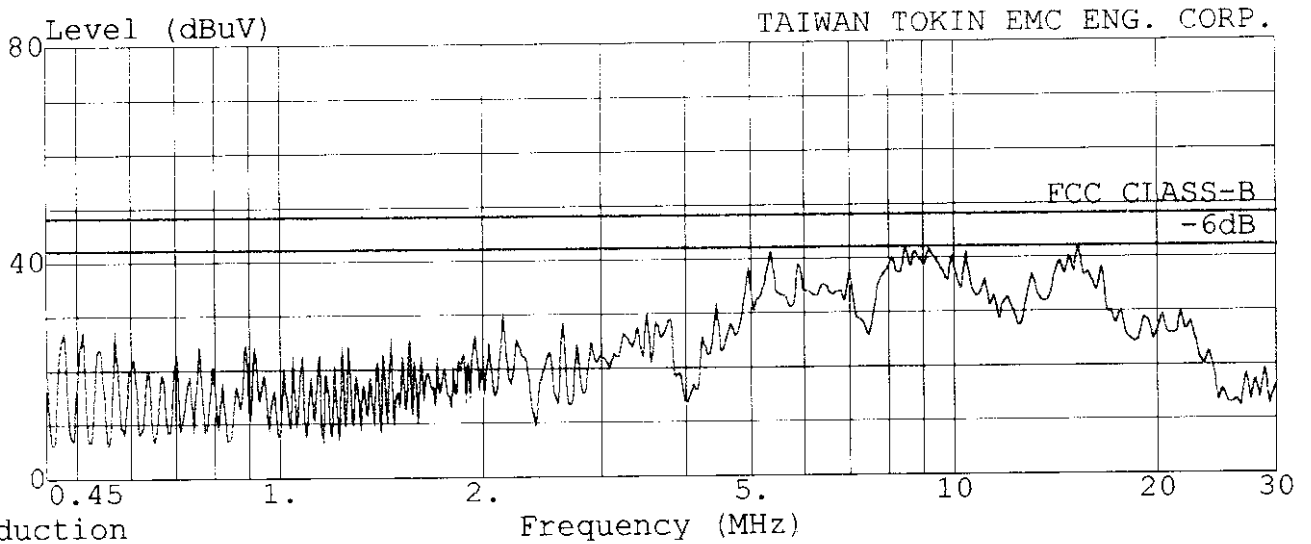

conduction

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 LINE

Margin: -6.0dB


EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 640X480 /60Hz 31.5KHz W/HP D5251A(8160) META CARD

:  
:

Ref Trace:

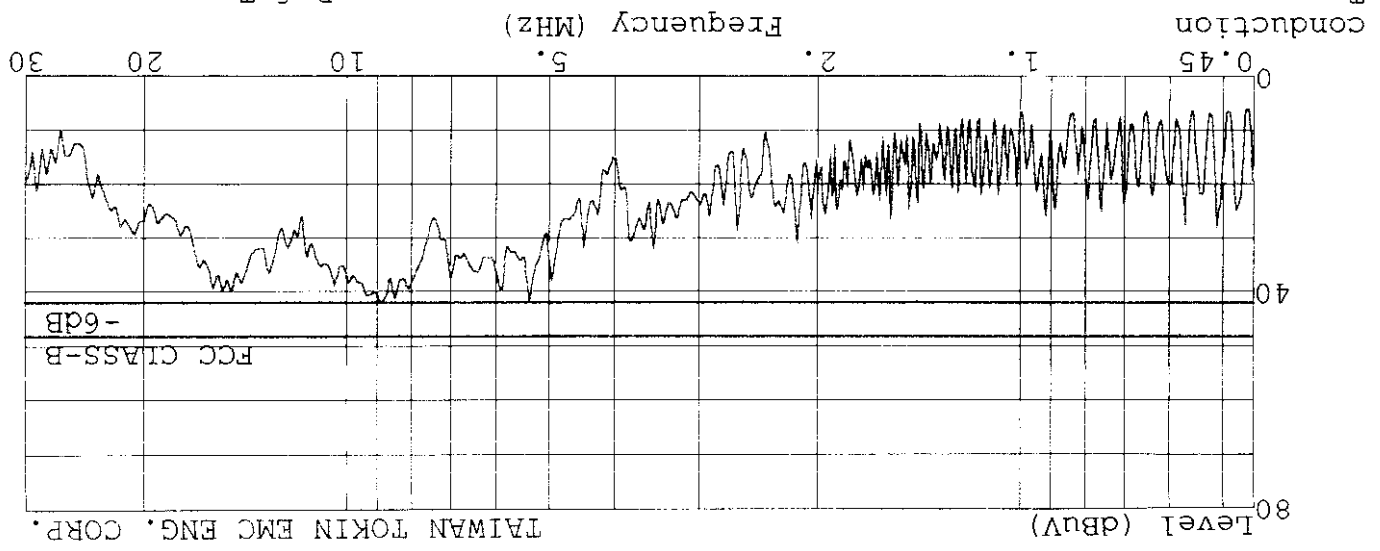

Trace :  
Limit : FCC CLASS-B  
Probe : LISN(FCC)8-1370-10 NEUTRAL  
Margin : -6.0dB  
EUT : MONITOR M/N:15C32A0W  
Power : 120Vac/60Hz  
Memo : 640X480 /60Hz 31.5KHz W/HP D5251A(8160) META CARD


# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel: 02-6092133 Fax: 02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI

Date: 5-26, 1998 Time: 15:32:26

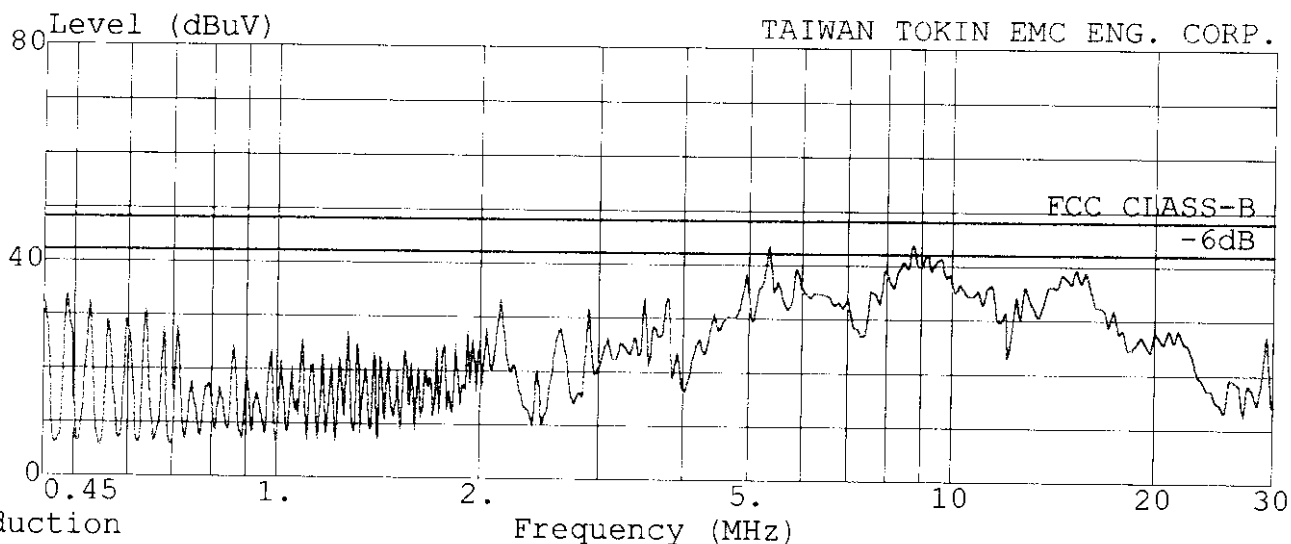

conduction

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 LINE

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 800x600/60Hz 38KHz W/HP D5251A(8160) META CARD

Ref Trace:


# TOKIN

TAIWAN TOKIN EMC ENG. CORP.

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 15:28:00

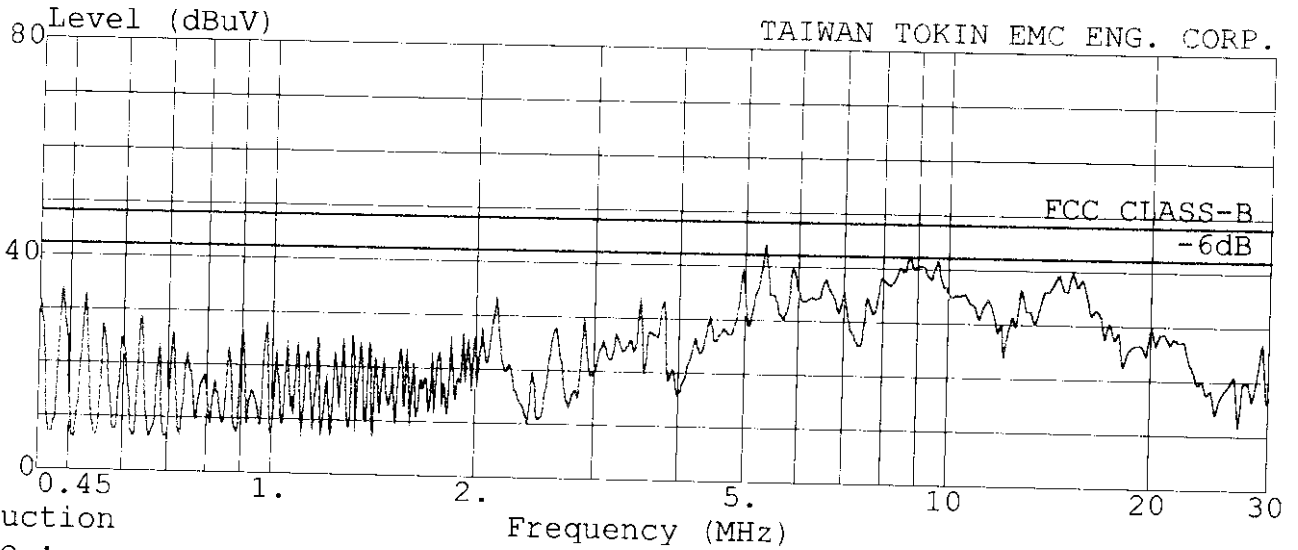

conduction

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 NEUTRAL

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 800x600/60Hz 38KHz W/HP D5251A(8160) META CARD

Ref Trace:


# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 15:42:42

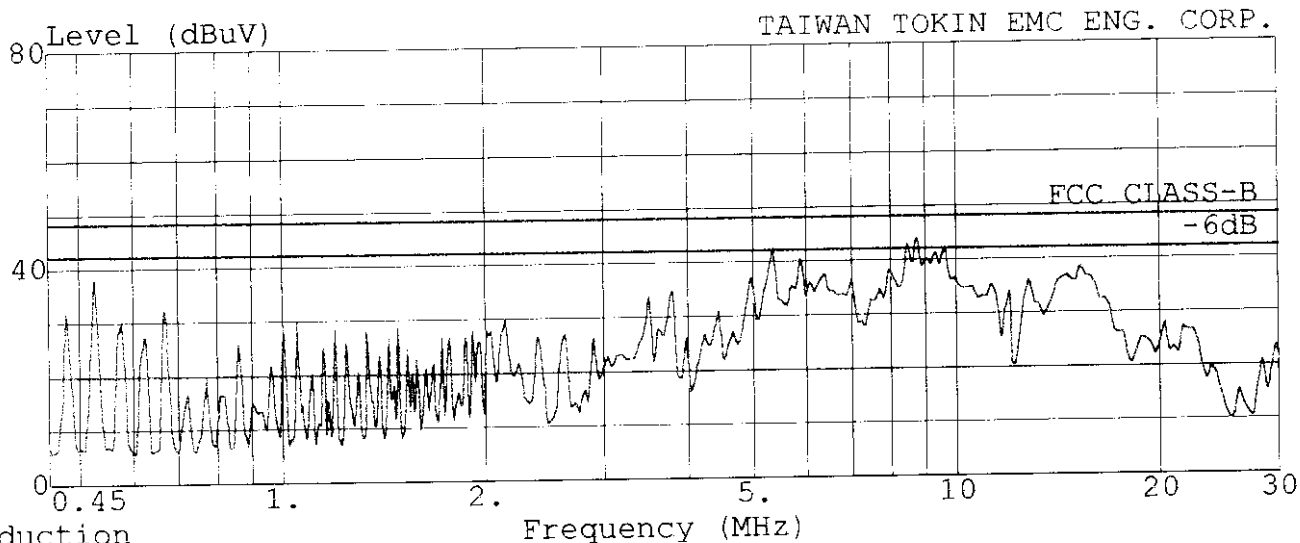

conduction

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 LINE

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 1024x768/ 60Hz 48KHz W/HP D5251A(8160) META CARD

:  
:

Ref Trace:




# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI Date: 5-26,1998 Time: 15:46:39

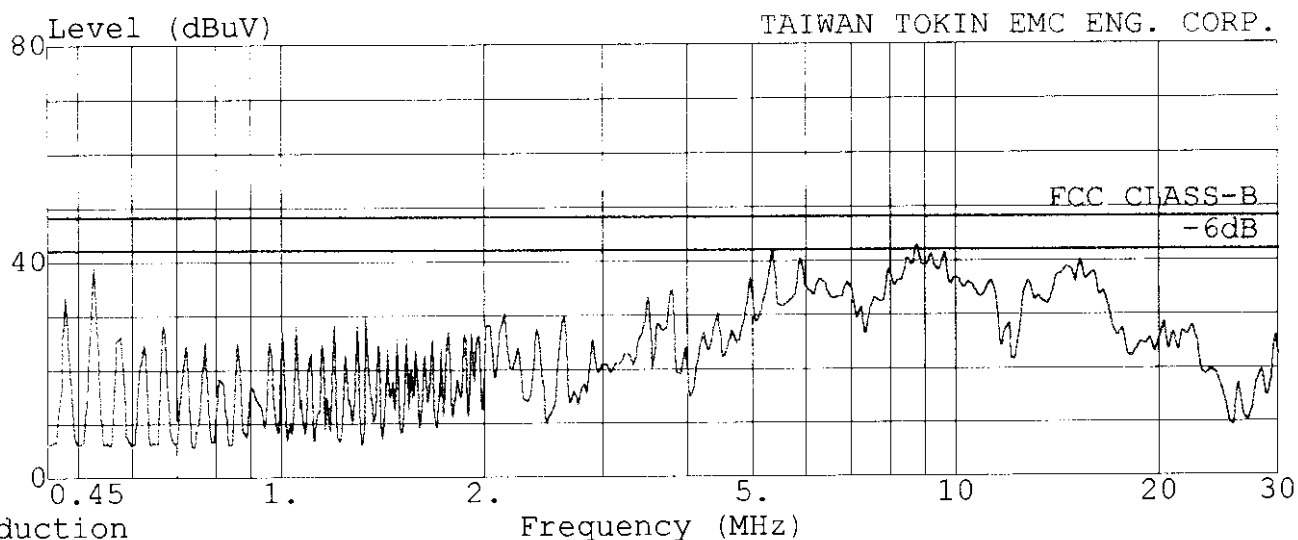

conduction

Frequency (MHz)

Ref Trace:

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 NEUTRAL

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 1024x768/ 60Hz 48KHz W/HP D5251A(8160) META CARD

:  
:


# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 16:07:56

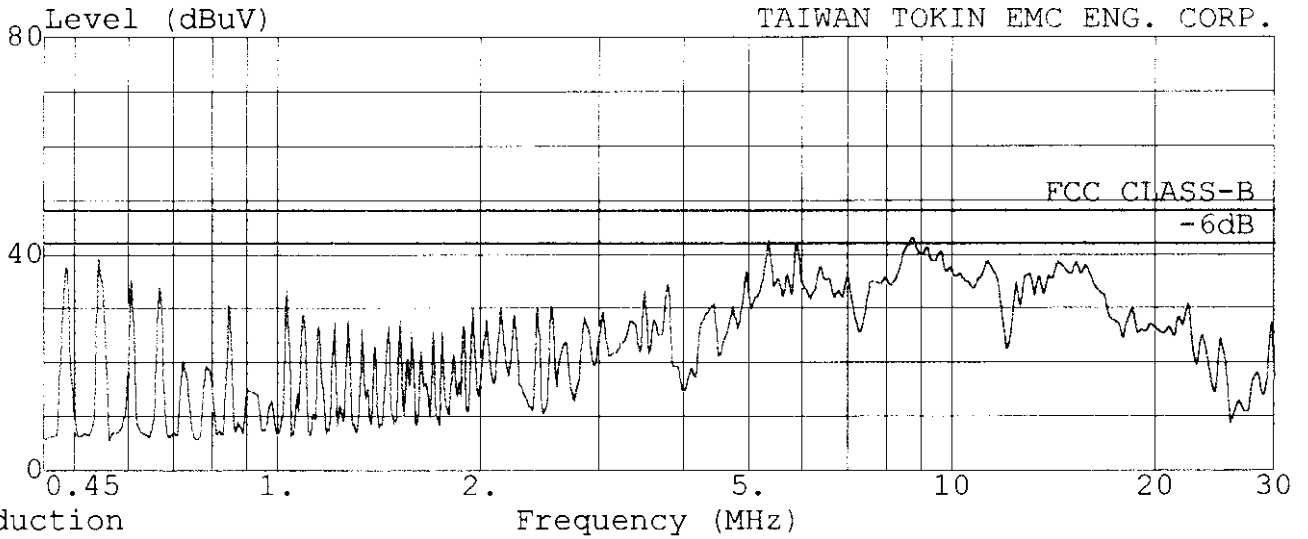

conduction

Frequency (MHz)

Ref Trace:

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 LINE

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 1024x768/ 75Hz 60KHz W/HP D5251A(8160) META CARD

:  
:

# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 16:13:14

conduction

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 LINE

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 1024x768/ 75Hz 60KHz W/HP D5251A(8160) META CARD

:  
:

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.485	36.75	-11.25	48.00	36.60	0.11	0.04	0.00	QP
2	0.542	39.61	-8.39	48.00	39.47	0.10	0.04	0.00	QP
3	5.329	41.51	-6.49	48.00	41.36	0.10	0.05	0.00	QP
4	5.857	37.76	-10.24	48.00	37.61	0.10	0.05	0.00	QP
5 !	8.720	42.67	-5.33	48.00	42.49	0.13	0.05	0.00	QP
6	14.431	39.23	-8.77	48.00	38.94	0.19	0.09	0.00	QP


TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI

Date: 5-26,1998 Time: 16:01:43

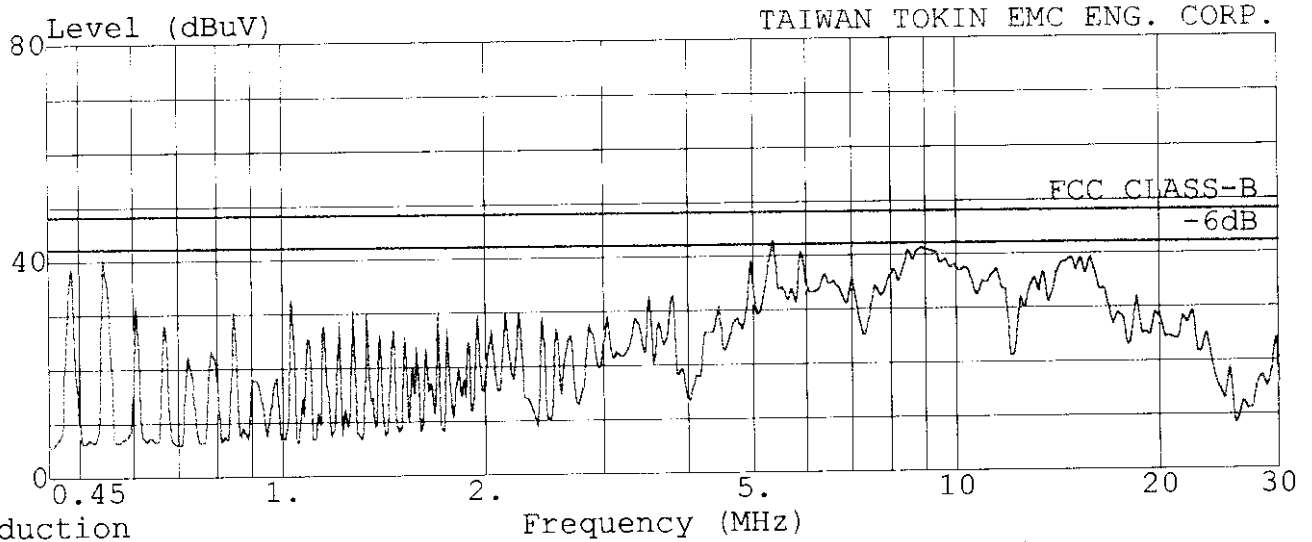

conduction

Frequency (MHz)

Ref Trace:

Trace :

Limit : FCC CLASS-B

Probe : LISN(FCC)8-1370-10 NEUTRAL

Margin: -6.0dB

EUT : MONITOR M/N:15C32A0W

Power : 120Vac/60Hz

Memo : 1024x768/ 75Hz 60KHz W/HP D5251A(8160) META CARD

:  
:  
:

# TOKIN

Test Site:  
#53-11 Tingfu Tsun, Linkou  
Taipei, Taiwan R.O.C.  
Tel:02-6092133 Fax:02-6099303

TAIWAN TOKIN EMC ENG. CORP.

Data#: File#: DELTA.EMI  
conduction

Date: 5-26,1998 Time: 16:06:43

Limit : FCC CLASS-B  
Probe : LISN(FCC)8-1370-10 NEUTRAL  
Margin: -6.0dB  
EUT : MONITOR M/N:15C32A0W  
Power : 120Vac/60Hz  
Memo : 1024x768/ 75Hz 60KHz W/HP D5251A(8160) META CARD  
:  
:

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark
	MHz	dB	dB	dB	dB	dB	dB	dB	
1	0.484	38.32	-9.68	48.00	38.17	0.11	0.04	0.00	QP
2	0.542	40.65	-7.35	48.00	40.51	0.10	0.04	0.00	QP
3	5.329	41.27	-6.73	48.00	41.12	0.10	0.05	0.00	QP
4	5.858	38.67	-9.33	48.00	38.52	0.10	0.05	0.00	QP
5	8.931	39.27	-8.73	48.00	39.09	0.13	0.05	0.00	QP
6	14.825	40.05	-7.95	48.00	39.75	0.20	0.10	0.00	QP

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment

The following test equipments are used during the radiated emission tests :

##### 3.1.1. Anechoic Chamber


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8593A	3212A01727	Aug. 02, 97'	1 Year
2.	Broadband Antenna	Schwarzbeck	BBA 9106	A3L	Dec. 24, 97'	1 Year
3.	Broadband Antenna	Schwarzbeck	UHALP 9107	A3H	Dec. 24, 97'	1 Year

##### 3.1.2. No. 4 Open Field Site

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESVS10	845165/018	Feb.17, 98'	1 Year
2.	Biconical Antenna	Chase	VBA6106A	1227	Apr.29, 98'	1 Year
3.	Log Periodic Antenna	Chase	UPA6109	1020	Apr.29, 98'	1 Year

#### 3.2. Block Diagram of Test Setup

##### 3.2.1. Block Diagram of connection between EUT and simulators

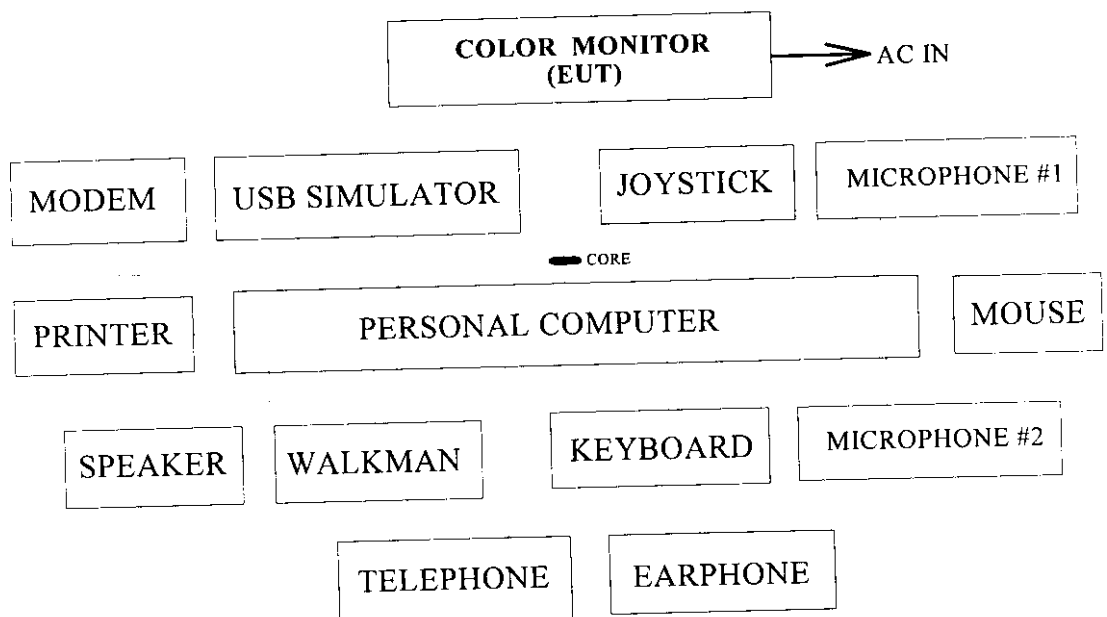

## 3.2.2. Anechoic Chamber &amp; Open Field Test Site Setup Diagram

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1METER TO 4 METER

3 METERS

EUT

0.8  
METER

TURN TABLE

GROUND PLANE

## 3.3. Radiation Limit (CLASS B)

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMITS	
		uV/M	dBuV/M
MHz	Meters		
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dBuV/M) = 20 log Emission level (uV/M)
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

## 3.4. EUT Configuration on Measurement

The configuration of EUT and its simulators were same as those used in conducted measurement. Please refer to 2.4.

## 3.5. Operating Condition of EUT

Same as conducted measurement which was listed in 2.5. except the test set up replaced by section 3.2.

### 3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above ground. The turn table rotate 360 degrees to determine the position of the maximum emission level. EUT was set 3 meters away from the receiving antenna which were mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) and dipole antenna were used as receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4-1992 on radiated measurement.

The bandwidth setting on the field strength meter (R&S TEST RECEIVER ESVS10) was 120KHz.

The frequency range from 30MHz to 1000MHz was checked.

The following test modes were measured within Anechoic Chamber and all the scanning wave form were attached within Appendix I. Finally, re-measured the worst operating situation (60KHz, 1024 x 768/75Hz) at No. 4 Open Site and all the test results are listed in section 3.7.

The detail of test modes are as follows:

- (1) 31.5KHz, 640 x 480 / 60Hz
- (2) 38KHz, 800 x 600 / 60Hz
- (3) 48KHz, 1024 x 768 / 60Hz
- (4) 60KHz, 1024 x 768 / 75Hz



### 3.7. Radiated Emission Noise Measurement Results

The frequency spectrum from 30 MHz to 1000MHz was investigated. All the emissions not reported below were too low against the FCC CLASS B limit.

Date of Test : May 30, 1998 Temperature : 31 °C  
 EUT : Color Monitor Humidity : 64 %  
 Test Mode : 60KHz , 1024 x 768 / 75Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Limits dBuV/m	Margin dBuV/m
			Horizontal dBuV	Horizontal dBuV/m		
39.383	20.08	1.67	3.40	25.15	40.00	14.85
55.136	13.54	1.89	14.05	29.48	40.00	10.52
* 63.013	<b>11.58</b>	<b>2.01</b>	<b>20.73</b>	<b>34.32</b>	<b>40.00</b>	<b>5.68</b>
70.890	12.15	2.05	10.11	24.31	40.00	15.69
78.767	13.46	2.10	15.54	31.10	40.00	8.90
157.533	20.67	2.80	9.05	32.52	43.50	10.98
173.287	21.49	2.88	3.48	27.85	43.50	15.65
212.670	21.49	3.17	2.99	27.65	43.50	15.85
236.301	23.75	3.35	11.19	38.29	46.00	7.71
307.189	13.78	3.76	3.86	21.40	46.00	24.60
315.066	14.03	3.82	3.98	21.83	46.00	24.17
393.833	16.18	4.25	1.06	21.49	46.00	24.51
425.340	16.42	4.41	-1.64	19.19	46.00	26.81
448.970	16.86	4.55	-1.80	19.61	46.00	26.39

- Remark :
1. All reading were Quasi-Peak values.
  2. The worst emission was detected at 63.013MHz with corrected signal level of 34.32dBuV/m (limit was 40.0dBuV/m) when the antenna was at horizontal polarization and was at 1.4m high and the turn table was at 30° .
  3. 0° is the table front facing the antenna. Degree was calculated from 0° clockwise facing the antenna.

Date of Test : May 30, 1998 Temperature : 31 °C  
 EUT : Color Monitor Humidity : 64 %  
 Test Mode : 60KHz , 1024 x 768 / 75Hz

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading		Emission Level Vertical dBuV/m	Limits dBuV/m	Margin dBuV/m
			Vertical dBuV				
31.506	22.68	1.53	9.90		34.11	40.00	5.89
* 36.810	20.06	1.61	15.14		36.81	40.00	3.19
39.383	19.09	1.67	12.31		33.07	40.00	6.93
55.136	14.14	1.89	16.91		32.94	40.00	7.06
63.013	13.45	2.01	19.41		34.87	40.00	5.13
65.810	12.76	2.00	15.90		30.66	40.00	9.34
70.890	12.83	2.05	16.35		31.23	40.00	8.77
78.767	14.43	2.10	16.77		33.30	40.00	6.70
126.027	18.47	2.56	2.90		23.93	43.50	19.57
133.903	18.93	2.60	1.66		23.19	43.50	20.31
157.533	19.93	2.80	7.10		29.83	43.50	13.67
236.301	22.92	3.35	5.48		31.75	46.00	14.25
315.066	14.40	3.82	8.71		26.93	46.00	19.07
362.326	15.29	4.06	0.53		19.88	46.00	26.12
393.833	15.89	4.25	6.70		26.84	46.00	19.16
433.216	16.24	4.45	-0.34		20.35	46.00	25.65
472.600	17.39	4.64	-0.79		21.24	46.00	24.76
504.107	18.02	4.80	-0.93		21.89	46.00	24.11


- Remark :
1. All reading were Quasi-Peak values.
  2. The worst emission was detected at 36.810MHz with corrected signal level of 36.81dBuV/m (limit was 40.0dBuV/m) when the antenna was at vertical polarization and was at 1m high and the turn table was at 225 ° .
  3. 0 ° is the table front facing the antenna. Degree was calculated from 0 ° clockwise facing the antenna.



#### **4. DEVIATIONS TO TEST SPECIFICATIONS**



[ NONE ]



# APPENDIX I



(Radiated Data at Anechoic Chamber)



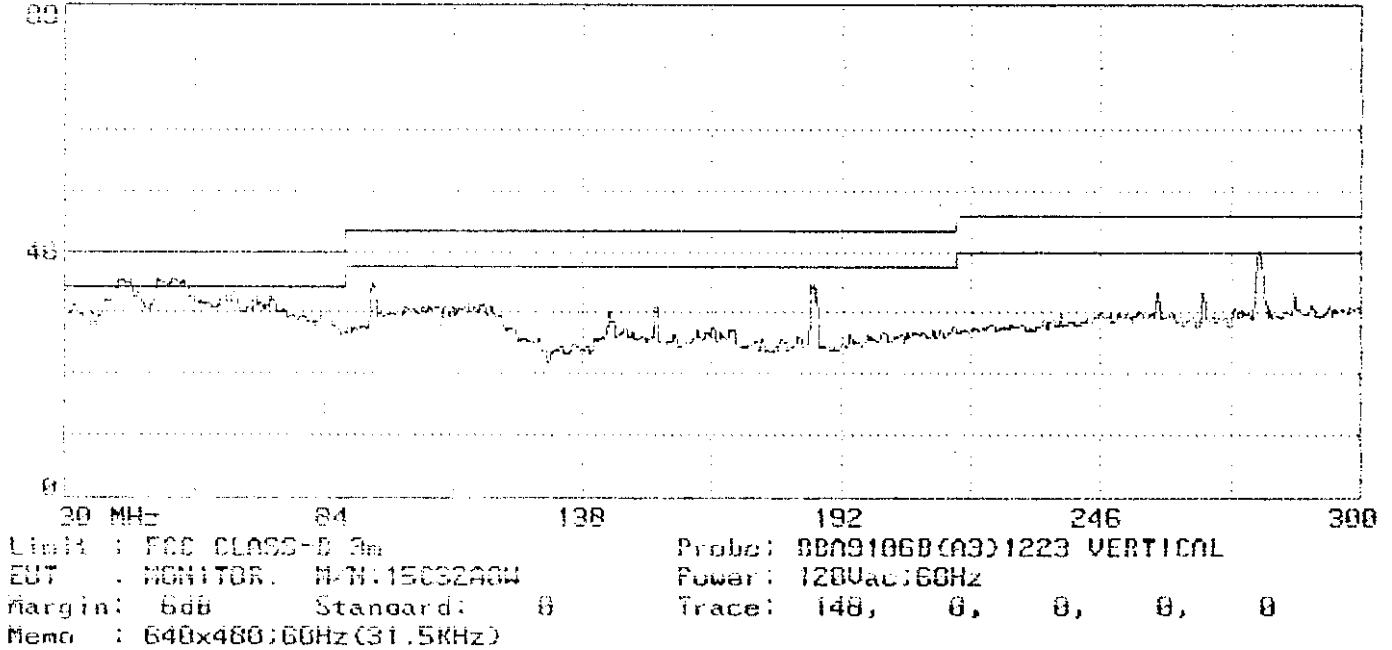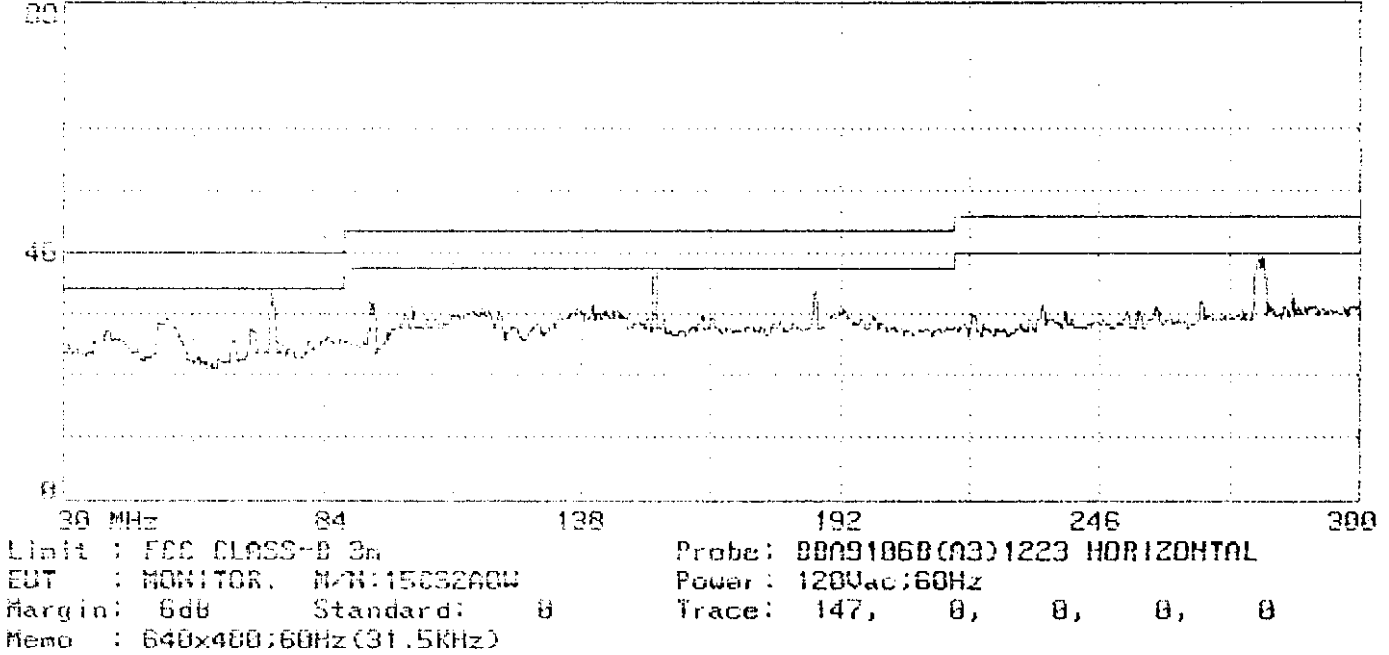


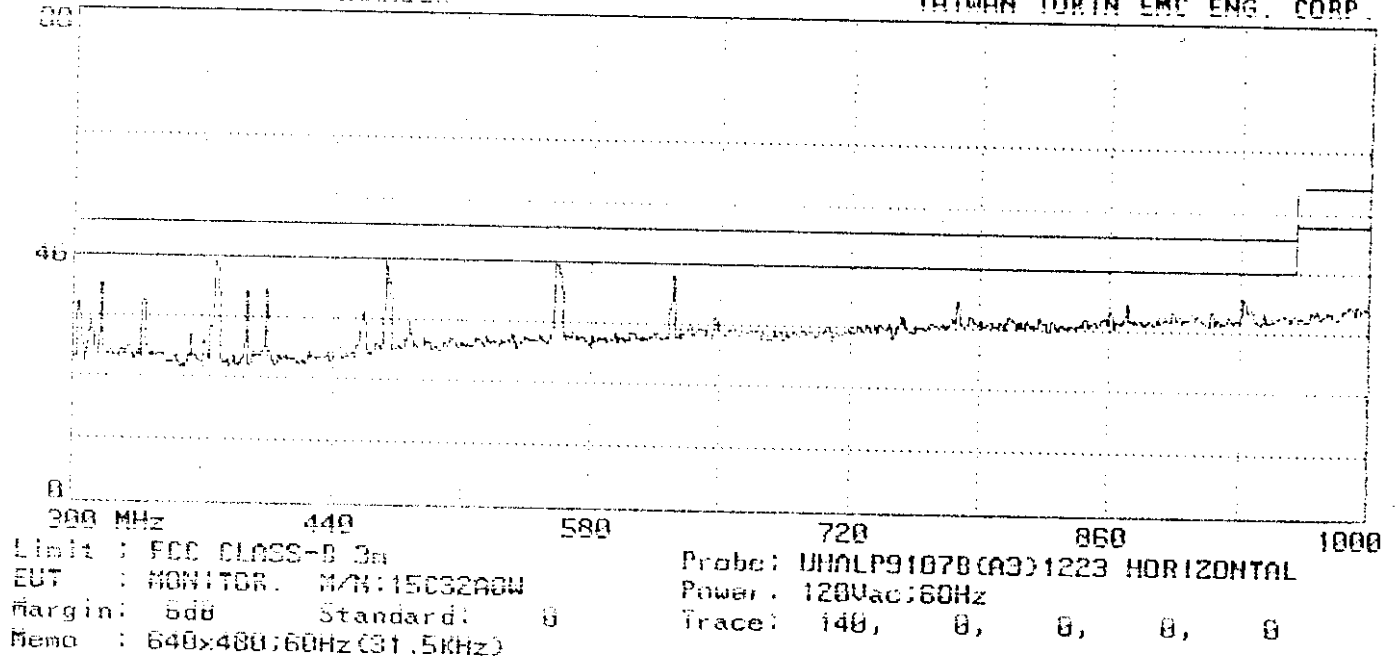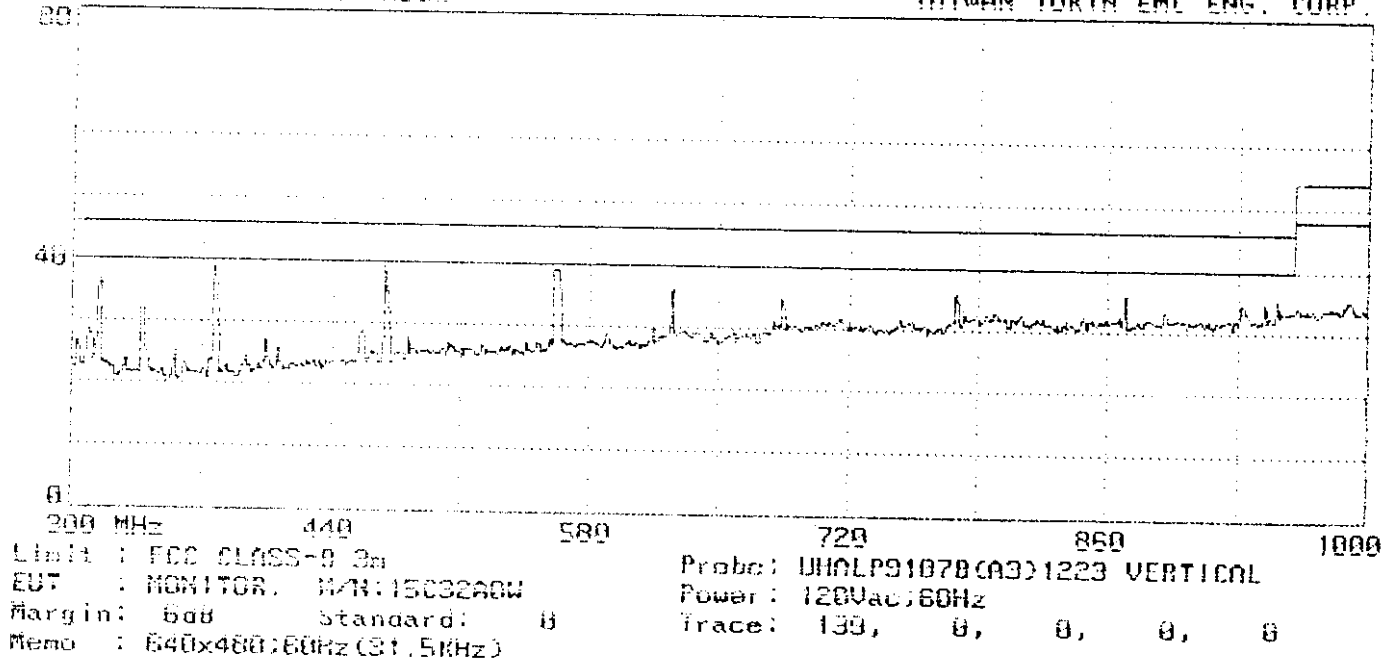

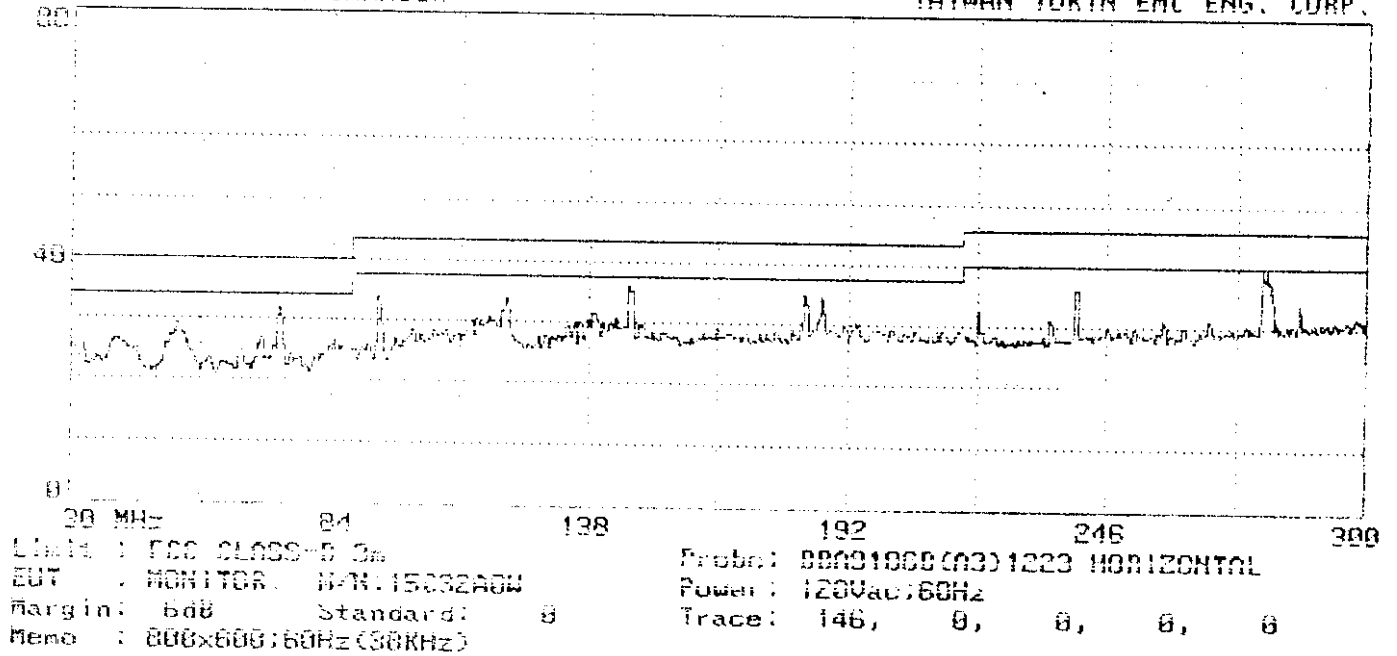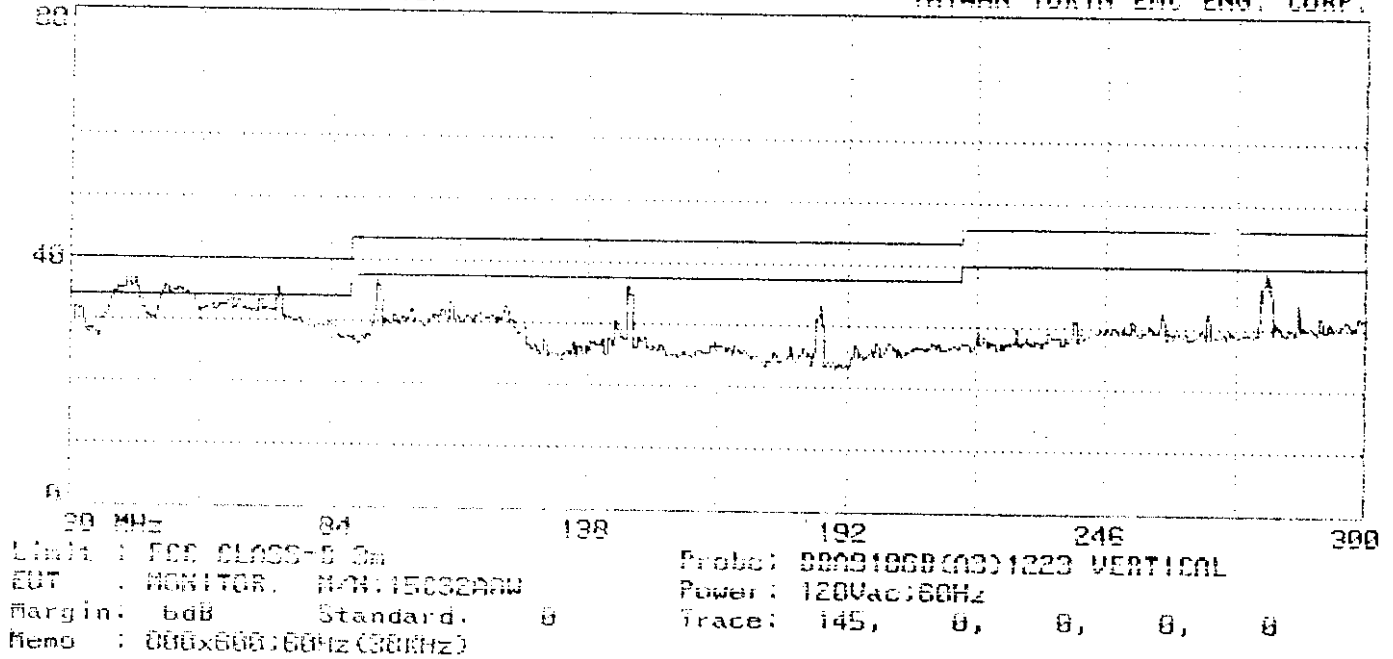

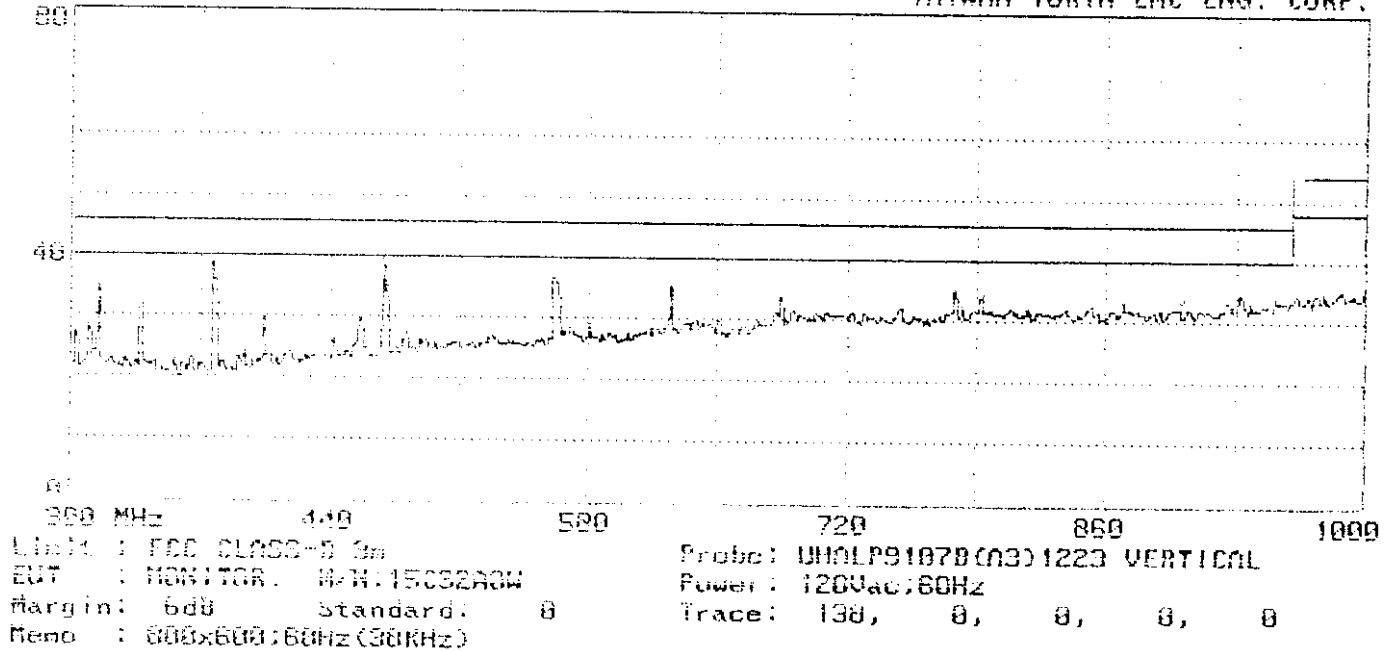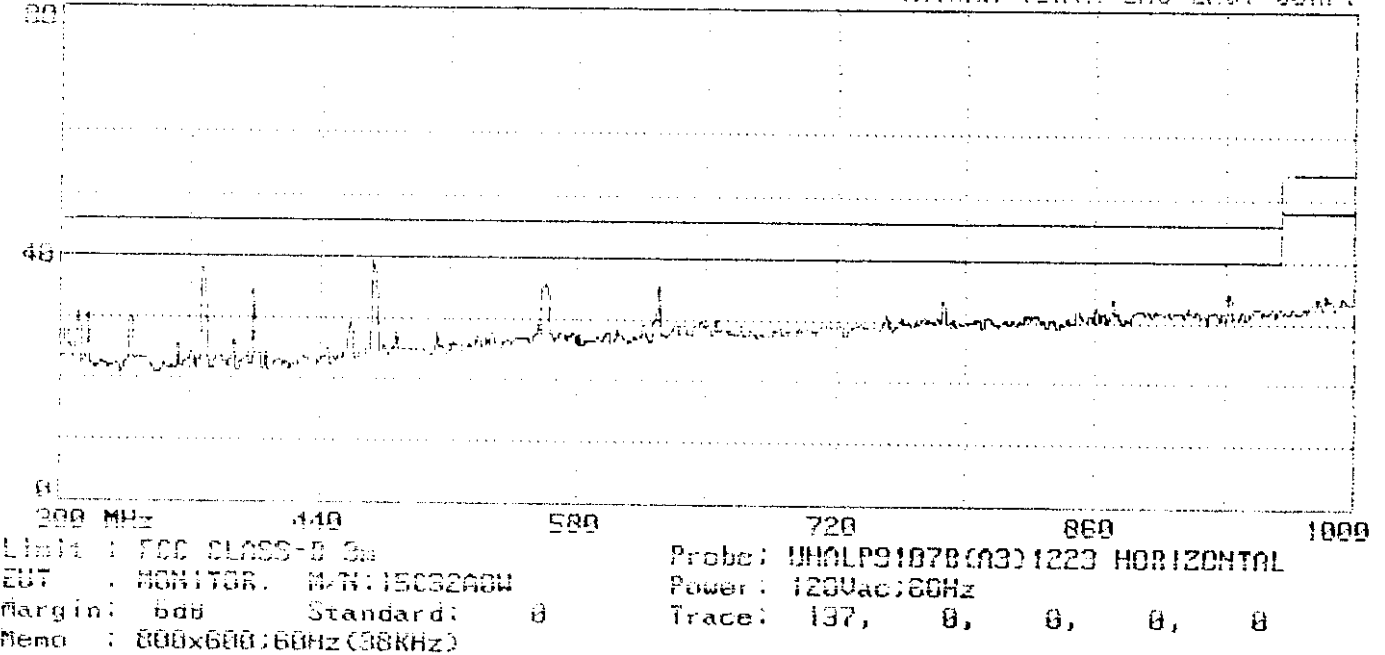




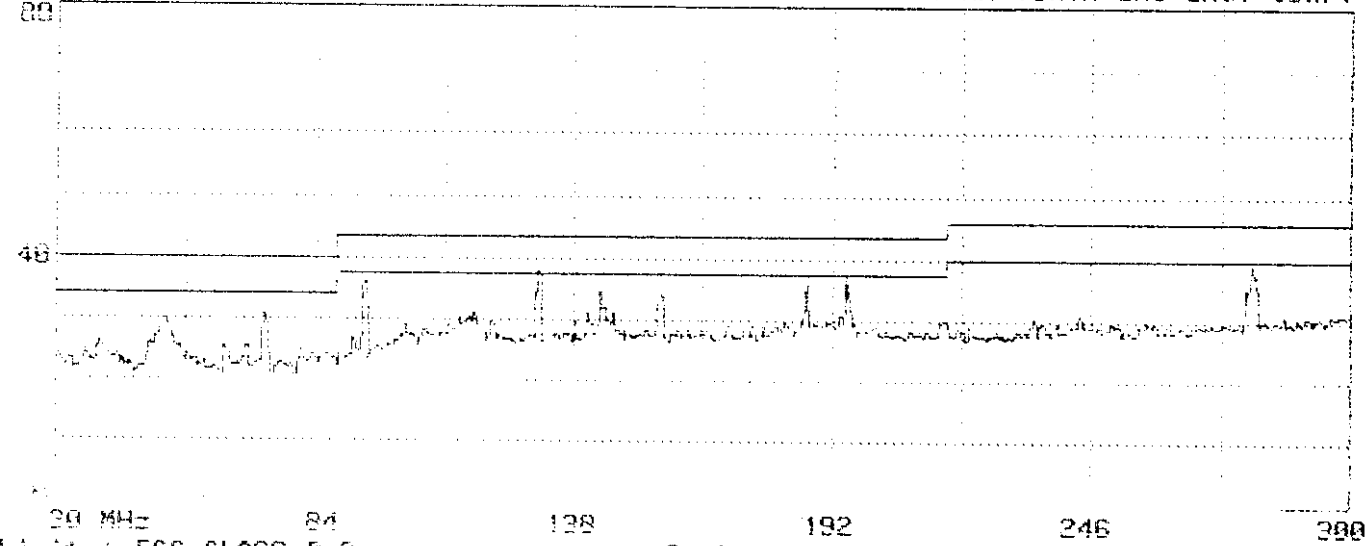



Limit : FCC CLASS-B 3m  
EUT : MONITOR. N/A. 15032A0W  
Margin: 6dB Standard: 0  
Memo : 1024x768:60Hz(40KHz)



Probe: 80091068(O3)1223 HORIZONTAL  
Power: 120Vac:60Hz  
Trace: 141, 0, 0, 0, 0

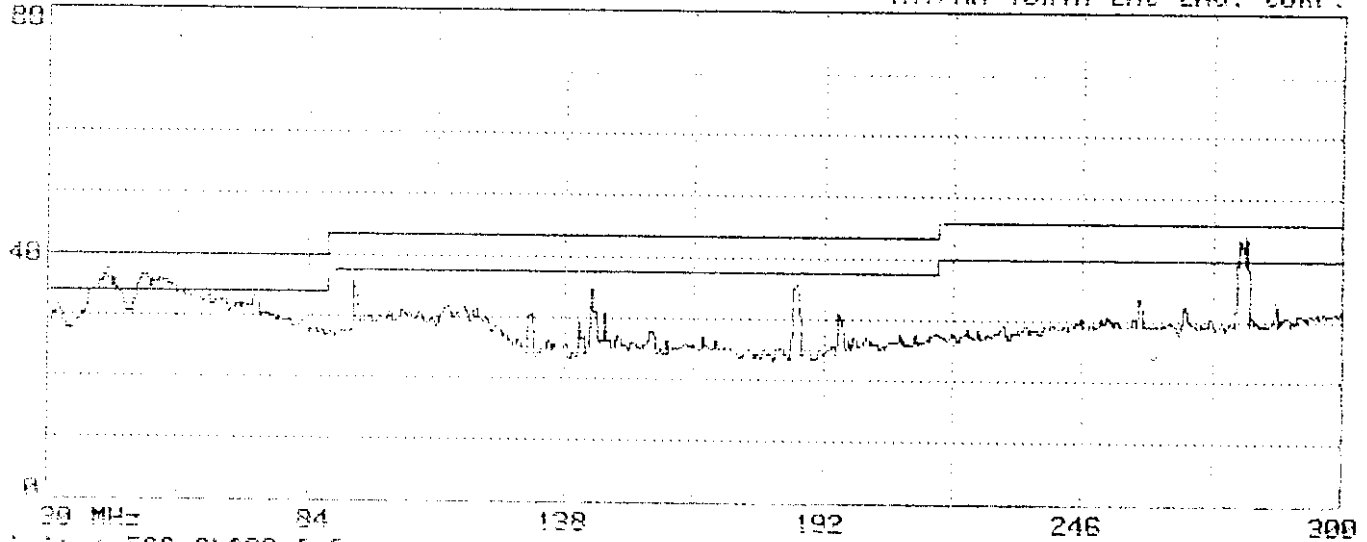


Limit : FCC CLASS-B 3m  
EUT : MONITOR. N/A. 15032A0W  
Margin: 6dB Standard: 0  
Memo : 1024x768:60Hz(40KHz)

Probe: 80091068(O3)1223 VERTICAL  
Power: 120Vac:60Hz  
Trace: 142, 0, 0, 0, 0

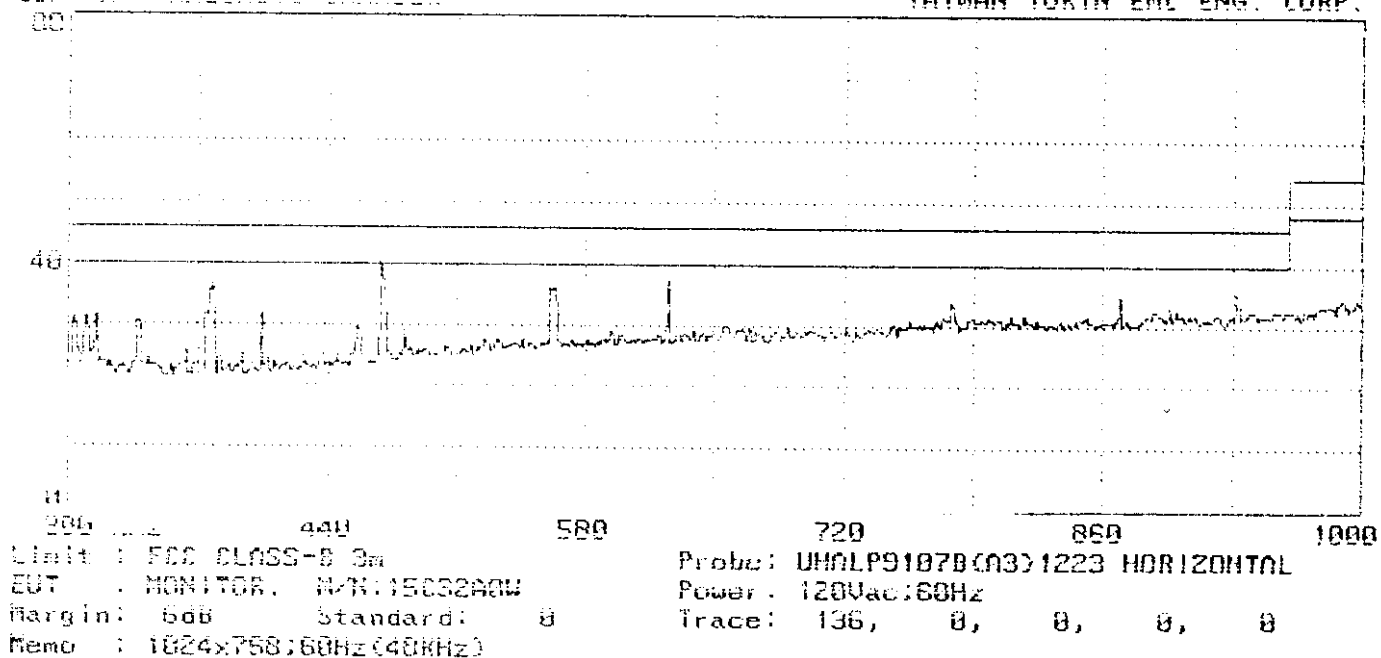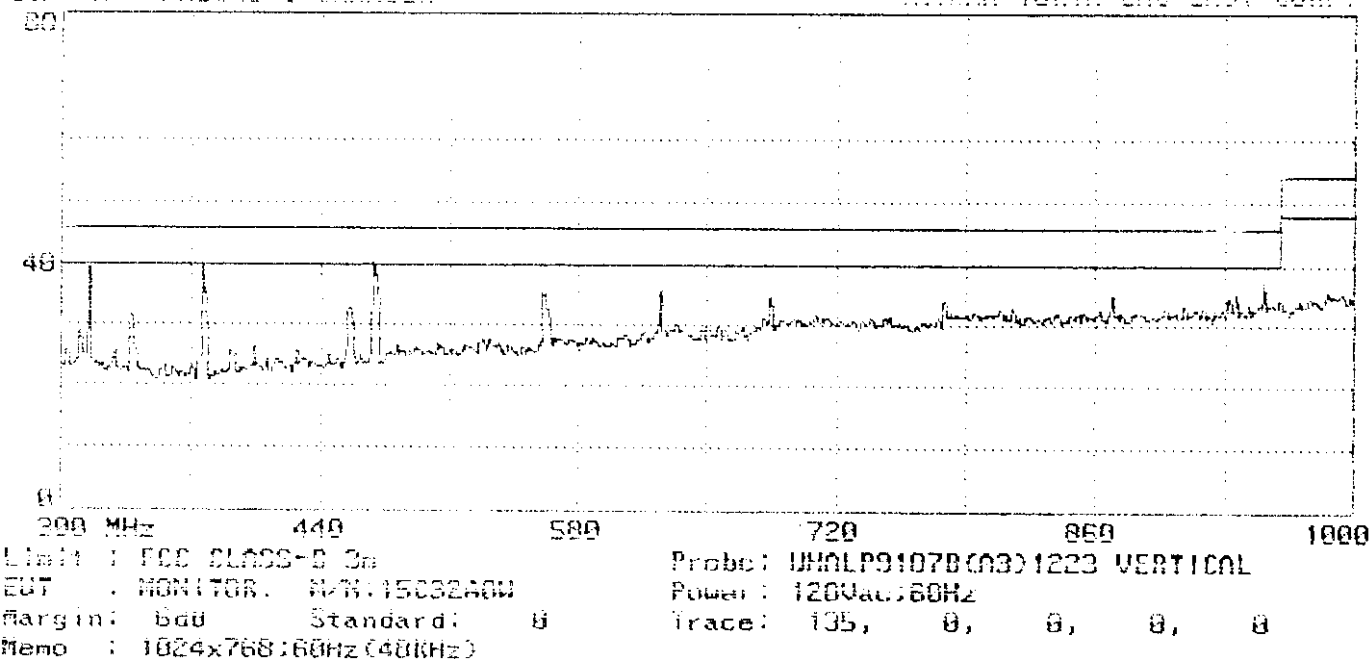


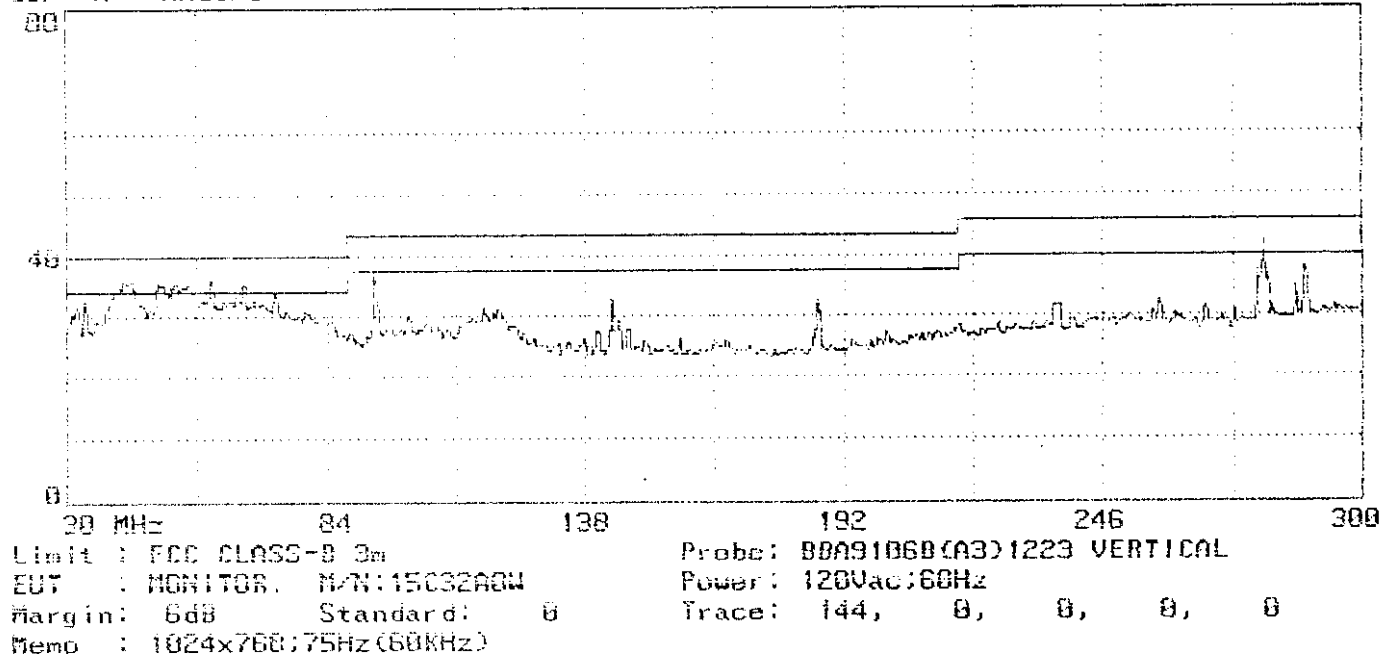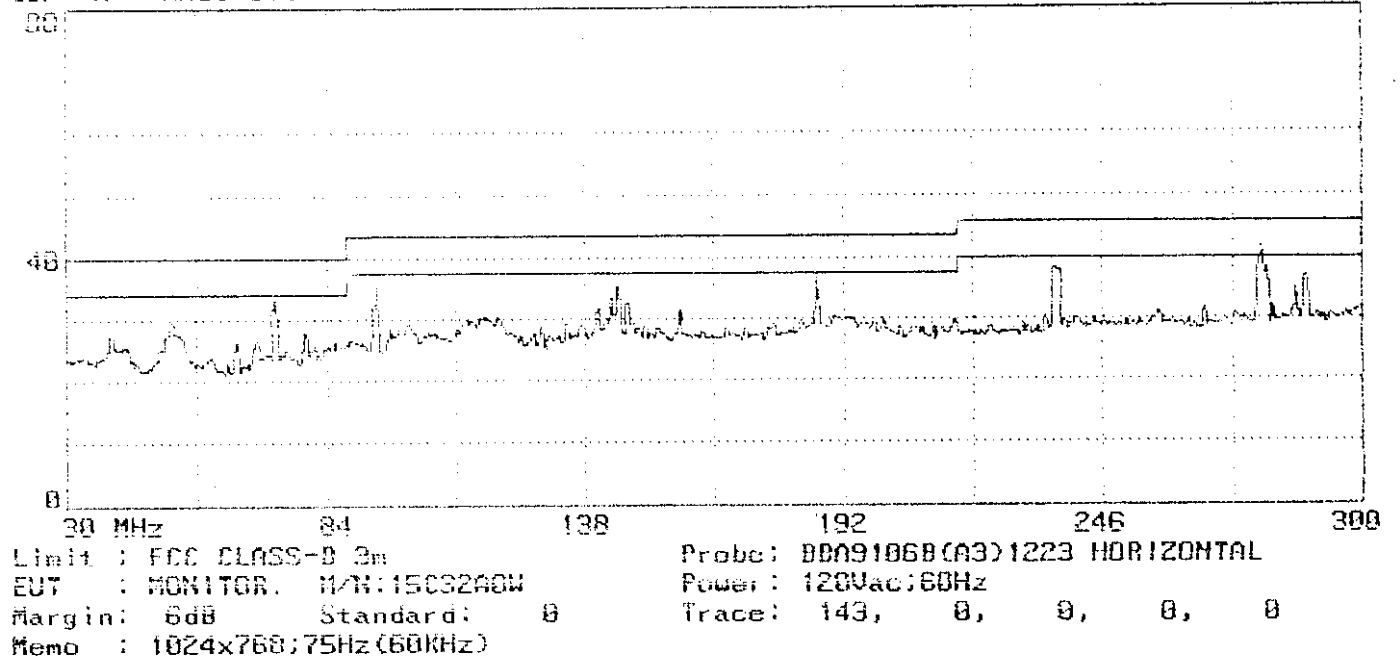

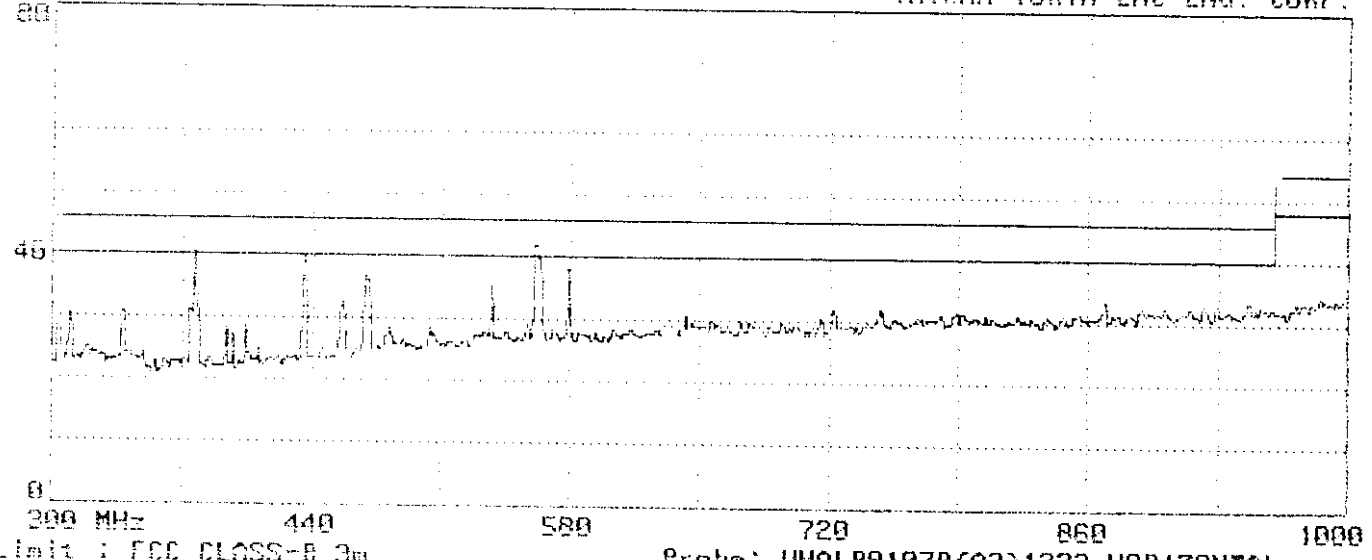

Limit : FCC CLASS-B 3m  
EUT : MONITOR. M/N: 15032A0W  
Margin: 6dB Standard: 0  
Memo : 1024x768;75Hz (60KHz)

Probe: UH0LP9107B(A3)1223 HORIZONTAL  
Power: 120Vac;60Hz  
Trace: 133, 0, 0, 0, 0

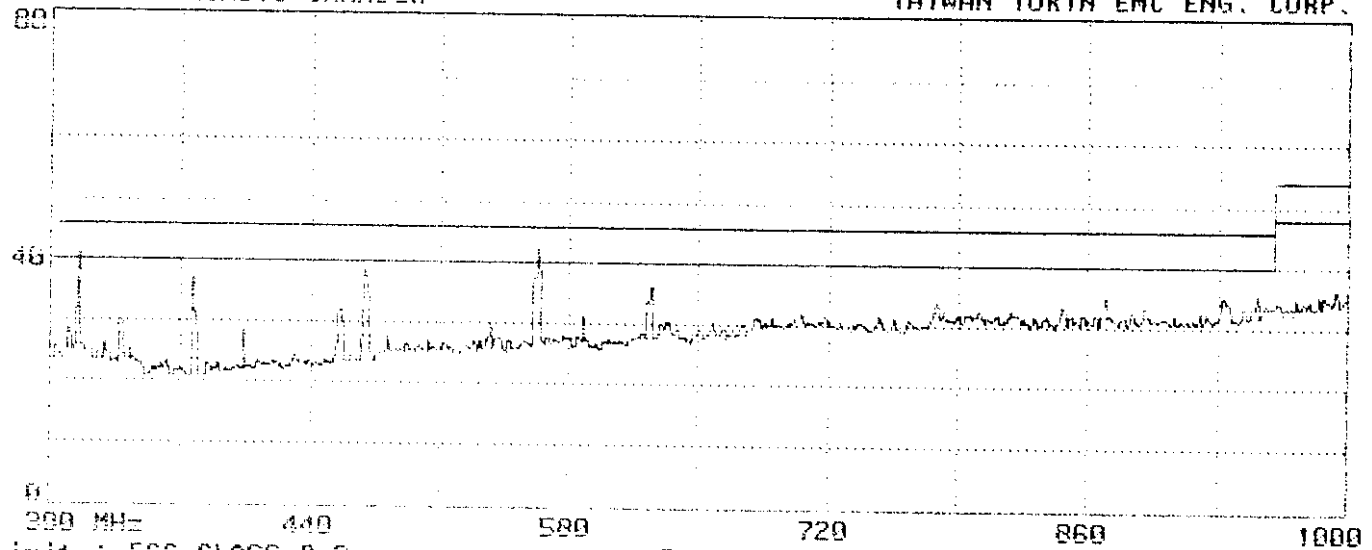

Limit : FCC CLASS-B 3m  
EUT : MONITOR. M/N: 15032A0W  
Margin: 6dB Standard: 0  
Memo : 1024x768;75Hz (60KHz)

Probe: UH0LP9107B(A3)1223 VERTICAL  
Power: 120Vac;60Hz  
Trace: 134, 0, 0, 0, 0