

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	Wi-Fi module		
Brand Name:	Delta		
Model No.:	DFWM-GIN00-DT0R		
Model Difference:	N/A		
FCC ID:	H79DFWM-GIN00		
Report No.:	E2/2014/60034		
Issue Date:	Aug. 12, 2014		
FCC Rule Part:	§15.247, Cat: DTS		
Prepared for:	Delta Electronics 3 Tungyan Road, Chungli Industrial Zone, Taoyuan County 32063 Taoyuan County Taiwan		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333		
BIC MRA Testing Laboratory 0513	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This doc- ument may be altered or revised by SGS Taiwan Ltd. per- sonnel only, and shall be noted in the revision section of the		

document.

41.1.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# VERIFICATION OF COMPLIANCE

Applicant:	Delta Electronics
	3 Tungyan Road, Chungli Industrial Zone, Taoyuan County 32063
	Taoyuan County Taiwan
Product Name:	Wi-Fi module
Brand Name:	Delta
Model No.:	DFWM-GIN00-DT0R
Model Difference:	N/A
FCC ID:	H79DFWM-GIN00
File Number:	E2/2014/60034
Date of test:	Jun. 26, 2014 ~ Aug. 08, 2014
Date of EUT Received:	Jun. 26, 2014

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date	Aug. 12, 2014
Prepared By:	Jazz Huang / Sr. Engineer Tiffany Kao	Date	Aug. 12, 2014
Approved By:	Tiffany Kao / Clerk Jim Chang Jim Chang / Supervisor	Date	Aug. 12, 2014

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Version

Version No.	Date	Description
00	Aug. 12, 2014	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Electronic Documents are used except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeildustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



## FCC ID: H79DFWM-GIN00

Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 4 of 85

## **Table of Contents**

1	GEN	ERAL INFORMATION	6
	1.1	Product description	6
	1.2	Related Submittal(s) / Grant (s)	8
	1.3	Test Methodology	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Configuration of Tested System	. 10
3	SUM	MARY OF TEST RESULTS	. 11
4	DES	CRIPTION OF TEST MODES	.12
5	MEA	SUREMENT UNCERTAINTY	. 13
6	CON	DUCTED EMISSION TEST	
	6.1	Standard Applicable:	. 14
	6.2	Measurement Equipment Used:	. 14
	6.3	EUT Setup:	
	6.4	Test SET-UP (Block Diagram of Configuration)	. 15
	6.5	Measurement Procedure:	
	6.6	Measurement Result:	. 15
7	PEA	K OUTPUT POWER MEASUREMENT	. 16
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	. 17
	7.3	Test Set-up:	. 18
	7.4	Measurement Procedure:	. 18
	7.5	Measurement Result:	. 22
8	6dB	BANDWIDTH	. 24
	8.1	Standard Applicable:	. 24
	8.2	Measurement Equipment Used:	. 24
	8.3	Test Set-up:	. 24
	8.4	Measurement Procedure:	. 24
	8.5	Measurement Result:	. 25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M



## FCC ID: H79DFWM-GIN00

9	BAN	D EDGES MEASUREMENT	
	9.1	Standard Applicable:	
	9.2	Measurement Equipment Used:	
	9.3	Test SET-UP:	
	9.4	Measurement Procedure:	
	9.5	Field Strength Calculation:	
	9.6	Measurement Result:	
10	SPUF	RIOUS EMISSION TEST	
	10.1	Standard Applicable	45
	10.2	Measurement Equipment Used:	45
	10.3	Test SET-UP:	
	10.4	Measurement Procedure:	46
	10.5	Field Strength Calculation	46
	10.6	Measurement Result:	46
11	PEAI	K POWER SPECTRAL DENSITY	74
	11.1	Standard Applicable:	74
	11.2	Measurement Equipment Used:	74
	11.3	Test Set-up:	74
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	74
	11.5	Measurement Result:	75
12	ANT	ENNA REQUIREMENT	
	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	81
13	MAX	IMUM PERMISSIBLE EXPOSURE (MPE)	
	13.1	Standard Applicable	
	13.2	Maximum Permissible Exposure (MPE) Evaluation	83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to Electronic Documents are used except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeildustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



### 1 **GENERAL INFORMATION**

### **Product description** 1.1

## General:

Product Name:	Wi-Fi module
Brand Name:	Delta
Model No.:	DFWM-GIN00-DT0R
Model Difference:	N/A
Hardware Version:	N/A
Software Version:	N/A
Power Supply:	3.3Vdc from DC Power Supply

### WLAN:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology		
11b/g	2412-2462	11	b: 16.11dBm g: 18.88dBm	DSSS, OFDM		
11n	HT20 2412-2462	11	n: 18.60dBm OFDM			
Antenna	a Designation:		Printed Antenna, -3.06dBi			
Modulation type:			CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM			
Transiti	on Rate:		802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n 20MHz: 6.5 – 72.2Mbps			

This report applies for WLAN, and complies with FCC rule part 15C.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### IEEE 802.11n Spec:

MCS					NCEDO		NDDDG		Datarate(Mbps)			
Index	Nss	Modulation	R	R NBPSC	NCBPS		NDBPS		800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bite per single carrier
NCBPS	Number of coded bite per symbol
NDBPS	Number of data bite per symbol
GI	Guard interval

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### **Related Submittal(s) / Grant (s)** 1.2

This submittal(s) (test report) is intended for FCC ID: H79DFWM-GIN00 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B under the DoC procedure.

#### **Test Methodology** 1.3

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Jun 2014 KDB558074 V03r02 for compliance to FCC 47CFR 15.247 requirements.

#### **Test Facility** 1.4

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009. FCC Registration Number: 628985. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, Canada Registration Number: 4620A-5.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. FCC Registration Number: 455997. The address of SGS Taiwan Ltd. Electronics & Communication Laboratory 1F, No.134, Wukung Road New Taipei City TAIWAN 24803, IC Registration Number: 4620A-6.

#### 1.5 **Special Accessories**

There are no special accessories used while test was conducted.

#### 1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Chino Solution and Solution a tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



### 2 SYSTEM TEST CONFIGURATION

### 2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 **Test Procedure**

## 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 & 6.2.2 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009, & Section 6.3, 6.4, 6.5.


Chino Solution and Solution a tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



### 2.4 **Configuration of Tested System**

## Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



## **Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L412	LR-027LM	Shielding	Un-shielding
3.	DC Power Supply	Agilent	E3640A	MY53140006	Shielding	Un-shielding
4.	Test Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### DESCRIPTION OF TEST MODES 4

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

802.11 b mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n 20MHz mode: Channel low (2412MHz), mid (2437MHz) and high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

The worst case is determined by the output power that generates the highest emission. As examined in the section of output power measurement, the section 7.5, the lowest data rate at b/g/n HT20 resulted the highest level of fundamental emission, and therefore, the lowest data rate is chosen as the worst-case to conduct the remaining of other mandatory test cases.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Chino Solution and Solution a tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms\_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



### 5 **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/- 2.586 dB		
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)		
6dB Bandwidth	+/- 123.36 Hz		
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB		
Peak Power Density	+/- 1.55 dB		
99% Power Bandwidth	+/- 123.36 Hz		
Temperature	+/- 0.8 °C		
Humidity	+/- 4.7 %		
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%		

Radiated Spurious Emission:

Measurement uncertainty (Polarization : <b>Vertical</b> )	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB			
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB			
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB			
	1GHz - 18GHz: +/- 4.08dB			
	18GHz - 40GHz: +/- 4.08dB			

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 6 **CONDUCTED EMISSION TEST**

### 6.1 **Standard Applicable:**

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV) Quasi-peak Average						
MHz							
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56	46					
5 to 30	60	50					
Note 1.The lower limit shall apply at the transition frequencies							

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 6.2 **Measurement Equipment Used:**

SGS Conducted Emission Test Site No.A									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due				
EMI Test Receiver	R&S	ESCI 3	101311	2014/06/20	2015/06/19				
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	2014/02/07	2015/02/06				
LISN	Schwarzbeck	NSLK 8127	8127-648	2014/06/10	2015/06/09				
LISN	Rolf-Heine	NNB-2/16Z	99012	2014/03/26	2015/03/25				
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.				

## 6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す另有説明, 止報告結果僅對測試之様品育, 同時此様品僅保留90 元。本報告未經本公司書面許可, 不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



## 6.4 Test SET-UP (Block Diagram of Configuration)

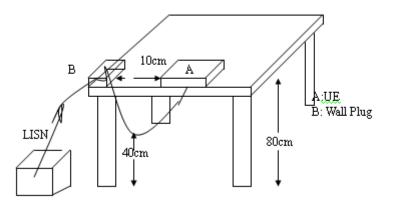

#### **Measurement Procedure:** 6.5

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

### 6.6 **Measurement Result:**

N/A, EUT powered from DC Power Supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



## 7 PEAK OUTPUT POWER MEASUREMENT

## 7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 7.2 **Measurement Equipment Used:**

SGS Conducted Room(ALL)										
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due					
Spectrum Analyzer	Agilent	N9010A	MY53400256	2013/10/26	2014/10/25					
Power Meter	Anritsu	ML2496A	1326001	2014/06/20	2015/06/19					
Power Sensor	Anritsu	MA2411B	1315048	2014/06/20	2015/06/19					
Power Sensor	Anritsu	MA2411B	1315049	2014/06/20	2015/06/19					
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	2	2014/01/06	2015/01/05					
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	3	2014/01/06	2015/01/05					
Coaxial Cable 80cm	WOKEN	00100A1F1A185C	1	2014/01/06	2015/01/05					
DC Block	Mini-Circuits	BLK-18-S+	BLK-18-S+ 4		2015/01/05					
DC Block	PASTERNACK	PE8210	5	2014/01/06	2015/01/05					
Splitter	RF-LAMBAD	RFLT2W1G18G	11-JSPF412-019	2014/01/06	2015/01/05					
Splitter	WOKEN	NA	DOM35LW1A2	2014/01/06	2015/01/05					
Attenuator	Mini-Circuits	BW-S10W2+	6	2014/01/06	2015/01/05					
Attenuator	WOKEN	218FS-10	7	2014/01/06	2015/01/05					
Temperature Chamber	TERCHY	MHK-120LK	1020582	2014/06/18	2015/06/17					
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15					
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/24	2015/04/23					
DC Power Supply	Agilent	E3640A	MY53140006	2014/05/31	2015/05/30					
DC Power Supply	Agilent	E3640A	MY53130054	2014/05/21	2015/05/20					


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET taken I to I and Wink unaPrad NewTainel/astr MukruPistrict NewTainel/City Taiwan2/4803/% th TAT SM 54, # TAT SM 54




## 7.3 Test Set-up:

Spectrum:



Power Meter:



## 7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

- 3. Record the max. Reading as observed from Spectrum or Power Meter.
- 4. Repeat above procedures until all frequency of interest measured was complete.

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode (n\_ht20) shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones. b =99%, g = 99%, n\_ht\_20 = 99%, where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## Formula:

*Duty Cycle = Ton / (Ton+Toff)* 

## **Test Procedure:**

Set span = 0, RBW = 1MHz, VBW = 3MHz, Detector = Peak Duty Cycle:

	Duty Cycle	Duty Factor(dB)
802.11b	0.990	0.087
802.11g	0.990	0.087
802.11n_20	0.990	0.087

Duty Cycle Factor:  $10 * \log (1/1.000) = 0$ 

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Duty Factor:**

## 802.11 b

Agilent Spectrum Analyzer - Swept SA				
🗶 RL RF 50Ω DC	PNO: East +++ Trig: Free Ru	Avg Type: Log-Pwr	01:25:45 PM Aug 07, 2014 TRACE 2 3 4 5 6 TYPE	Frequency
Ref Offset 11 dB 10 dB/div Ref 30.00 dBm	PNO: Fast Trig: Free Ru IFGain:Low #Atten: 30 dB		DET	Auto Tune
20.0 10.0 0.00				Center Fred 2.437000000 GH:
-10.0 -20.0 -30.0				Start Fred 2.437000000 GH:
-40.0 -50.0 -60.0				Stop Fred 2.437000000 GHz
Center 2.437000000 GHz Res BW 8 MHz MKR MODE TRC SCL X	VBW 8.0 MHz	Sweep 5	Span 0 Hz .000 ms (1001 pts) FUNCTION VALUE	CF Step 8.000000 MH <u>Auto</u> Mar
1 2 3 4 5 5 6 7 7 8 9 9			8	Freq Offse 0 H:
4 MISG	10	STATU		

### 802.11 g


	Analyzer - Swept SA RF 50 Ω DC		SENSE		ALIGN AUTO	01:26:49 PM Aug 07, 2014	
	ef Offset 11 dB	PNO: Fast IFGain:Low	Trig: Free R #Atten: 30 c	tun	Type: Log-Pwr	TYPE WWWWW	
		haises, where the	าสาราร์ เสราร์	qnHimeAatilanyny4	waterspecture	(Anina mana mana mana mana mana mana mana	Center Fre 2.437000000 GF
10.0 20.0 30.0							<b>Start Fr</b> 2.437000000 G
40.0 50.0 60.0							<b>Stop Fr</b> 2.437000000 G
enter 2.437 tes BW 8 M		VBW	8.0 MHz	FUNCTION	Sweep 5.	Span 0 Hz 000 ms (1001 pts) FUNCTION VALUE	CF St 8.000000 M <u>Auto</u> M
1 2 3 4 5 6							Freq Offs 0
7 8 9 10			10				
sg					STATUS		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 802.11 n 20 MHz

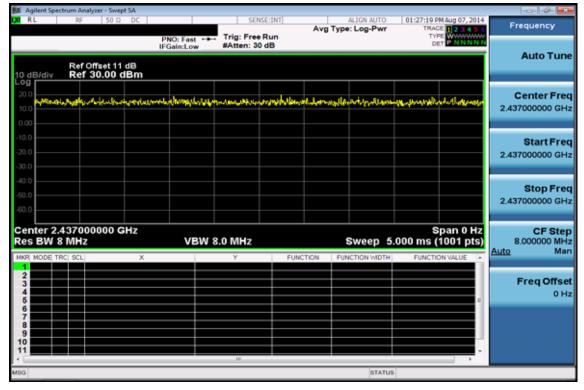

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



#### 7.5 **Measurement Result:**

### 802.11b

		Peak Power Output (dBm)							
СП	Frequency		Data Rate						
СН	(MHz)	1 2 5.5		11	- Required Limit				
1	2412	16.11	15.82	15.87	15.97	1 Watt = 30 dBm			
6	2437	16.01	15.77	15.87	15.87	1 Watt = 30 dBm			
11	2462	16.05	15.92	15.87	15.95	1 Watt = 30 dBm			

		Average Power Output (dBm)							
СП	Frequency		Data Rate						
СН	(MHz)	1 2 5.5 11		Required Limit					
1	2412	13.99	13.73	13.89	13.79	1 Watt = 30 dBm			
6	2437	13.88	13.65	13.63	13.65	1 Watt = 30 dBm			
11	2462	13.92	13.76	13.76	13.67	1 Watt = 30 dBm			

### 802.11g

			Peak Power Output(dBm)								
СН	CII Frequency Data Rate							Dequined Limit			
Сп	(MHz)	6	9	12	18	24	36	48	54	<b>Required Limit</b>	
1	2412	18.51	18.24	18.31	18.32	18.30	18.40	18.30	18.21	1 Watt = 30 dBm	
6	2437	18.62	18.37	18.52	18.46	18.37	18.33	18.39	18.42	1 Watt = 30 dBm	
11	2462	18.88	18.60	18.71	18.76	18.66	18.69	18.64	18.68	1 Watt = 30 dBm	

			Average Power Output(dBm)								
СН	Frequency Data Rate								D		
Сп	(MHz)	6	9	12	18	24	36	48	54	<b>Required Limit</b>	
1	2412	11.09	10.81	10.89	10.89	10.85	10.82	10.87	10.82	1 Watt = 30 dBm	
6	2437	11.13	10.92	10.93	11.01	10.90	10.90	10.89	10.83	1 Watt = 30 dBm	
11	2462	11.38	11.27	11.16	11.11	11.27	11.10	11.08	11.21	1 Watt = 30 dBm	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



802.11n 20M

			Peak Power Output(dBm)							
СН	Frequency Data Rate						Required			
Сп	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit
1	2412	18.47	18.32	18.33	18.33	18.18	18.37	18.19	18.28	1 Watt = 30 dBm
6	2437	18.58	18.29	18.46	18.30	18.36	18.44	18.29	18.30	1 Watt = 30 dBm
11	2462	18.60	18.32	18.32	18.42	18.35	18.47	18.31	18.34	1 Watt = 30 dBm

			Average Power Output(dBm)							
СН	Trequency Data Rate								Required	
Сп	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit
1	2412	11.03	10.81	10.84	10.77	10.91	10.91	10.84	10.75	1 Watt = 30 dBm
6	2437	11.13	10.89	10.85	11.00	10.86	10.96	11.00	11.01	1 Watt = 30 dBm
11	2462	11.18	10.92	10.92	11.06	10.91	10.92	11.05	10.96	1 Watt = 30 dBm

\* Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 8 6dB BANDWIDTH


## 8.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

## 8.2 Measurement Equipment Used:

Please refer to section 7.2 for the plots

## 8.3 Test Set-up:



## 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### 8.5 **Measurement Result:**

### 802.11b

Frequency	Frequency Bandwidth		Result	
(MHz)	(kHz)	(kHz)		
2412	10060	> 500	PASS	
2437	10060	> 500	PASS	
2462	10060	> 500	PASS	

### 802.11g

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2412	16380	> 500	PASS
2437	16370	> 500	PASS
2462	16370	> 500	PASS

### 802.11n\_20M

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2412	16860	> 500	PASS
2437	16850	> 500	PASS
2462	16950	> 500	PASS

\* Note: Offset 11dB for 2.4G 802.11b/g/n\_20;


\*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 802.11b 6dB Band Width Test Data CH-Low

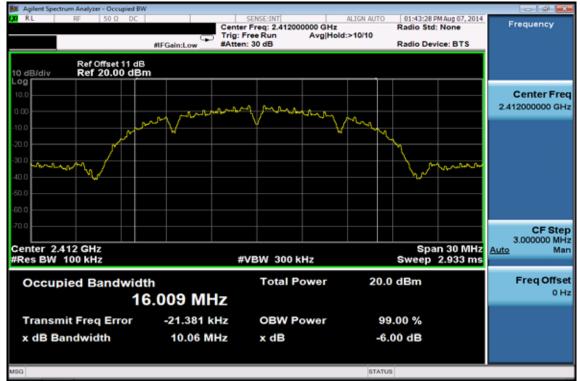


## 6dB Band Width Test Data CH-Mid

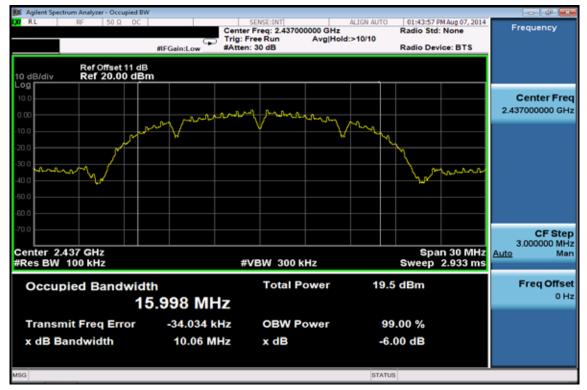

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## 6dB Band Width Test Data CH-High

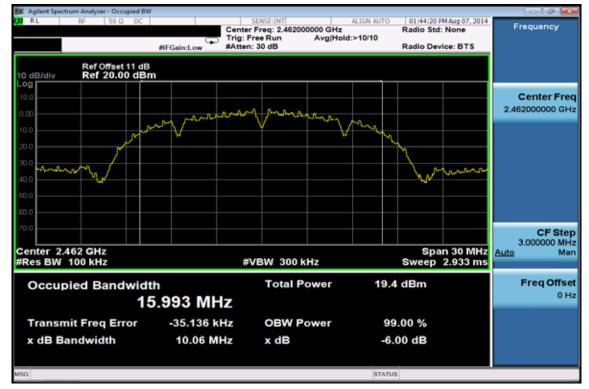

## 802.11g


## 6dB Band Width Test Data CH-Low

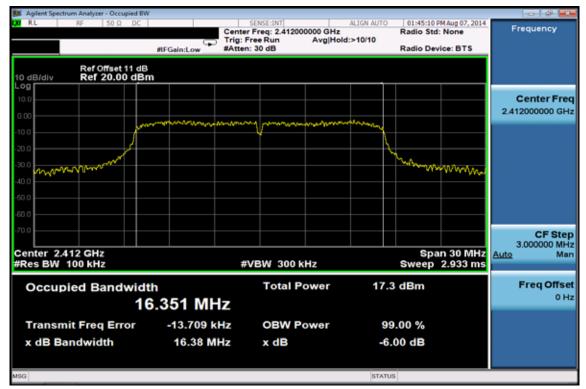


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



## 6dB Band Width Test Data CH-Mid

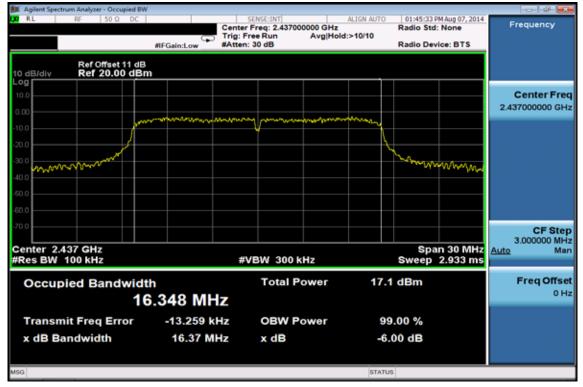


## 6dB Band Width Test Data CH-High

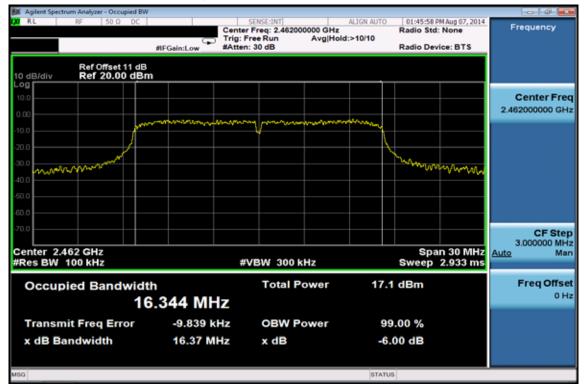


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 802.11n 20M 6dB Band Width Test Data CH-Low

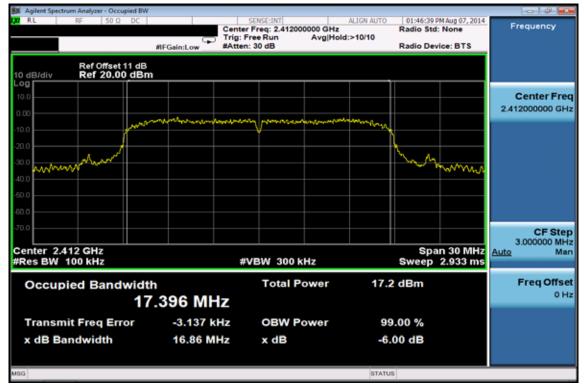


## 6dB Band Width Test Data CH-Mid

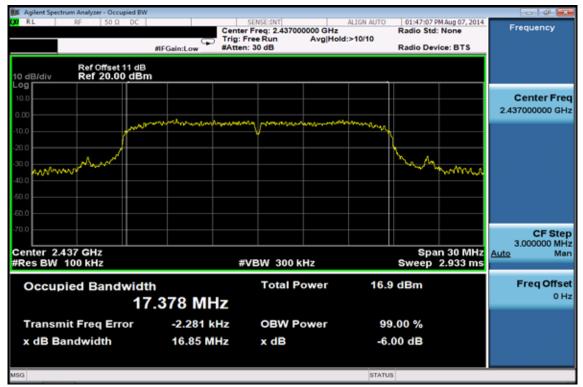

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



# 6dB Band Width Test Data CH-High

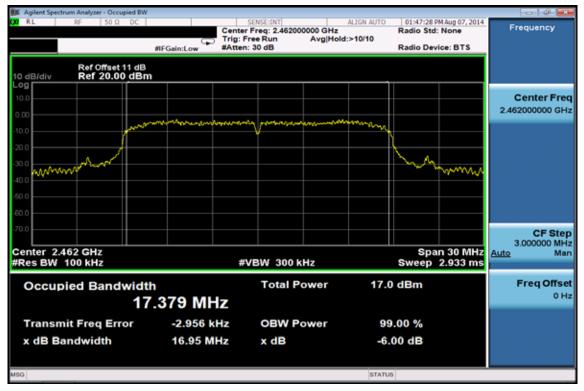

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report feiter only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 9 BAND EDGES MEASUREMENT

## 9.1 Standard Applicable:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

## 9.2 Measurement Equipment Used:

## 9.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で施非方有説明,此報告結果僅針測試之様品負責,同時此様品僅保留的反。本報告未經本公司書面許可,不可能冷複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or fallsification of the content or ap-



## 9.2.2 Radiated emission:


		SGS 966 Chamber	No.C		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESU 40	100363	2014/04/12	2015/04/11
Loop Antenna	ETS-Lindgren	6502	00143303	2014/01/16	2015/01/15
Broadband Antenna	TESEQ	CBL 6112D	35240	2014/01/17	2015/01/16
Horn Antenna	ETS-Lindgren	3117	00143272	2014/01/27	2015/01/26
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170-184	2014/01/23	2015/01/22
Horn Antenna	ETS-Lindgren	3160-09	00117911	2014/01/22	2015/01/21
Horn Antenna	ETS-Lindgren	3160-10	00117783	2014/01/22	2015/01/21
Pre Amplifier	R&S	SCU-18	10204	2014/03/26	2015/03/25
Pre Amplifier	R&S	SCU-26	100780	2014/03/26	2015/03/25
Pre Amplifier	R&S	SCU-40	100356	2014/03/26	2015/03/25
Pre Amplifier	EMC Instruments	EMC330	980096	2014/03/26	2015/03/25
Pre Amplifier	EMC Instruments	EMC184045	980135	2014/01/24	2015/01/23
Coaxial Cable	Huber+Suhner	RG 214/U	W21.03	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	RG 214/U	W22.03	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17413/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17404/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17394/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17386/4	2014/03/26	2015/03/25
Coaxial Cable	Huber+Suhner	SUCCOFLEX 104	MY17388/4	2014/03/26	2015/03/25
Attenuator	WOKEN	218FS-10	HY-151	2014/01/06	2015/01/05
Communication Tester	R&S	CMW500	131121	2014/01/16	2015/01/15
Communication Tester	Anritsu	MT8820C	6201107337	2014/04/23	2015/04/22
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.
Site NSA	SGS	966 Chamber C	SAC-C	2014/03/05	2015/03/04
Site VSWR	SGS	966 Chamber C	SAC-C	2014/04/10	2015/04/09
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M




### 9.3 **Test SET-UP:**

### 9.3.1 **Conducted Emission at antenna port:**




## 9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

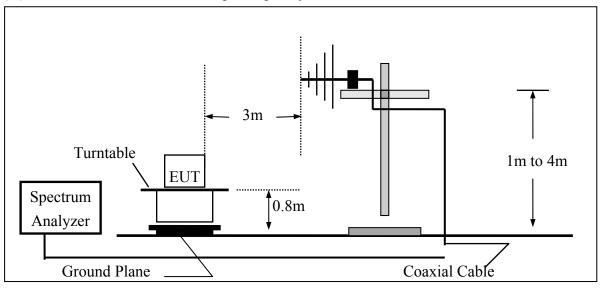

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

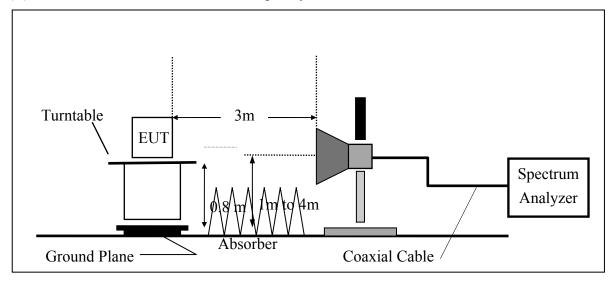

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 9.4 Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074 D01:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 9.5 **Field Strength Calculation:**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

### FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

#### 9.6 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 802.11b - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



## **Band Edges Test Data CH-High**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Report No.: E2/2014/60034 **Issue Date: Aug. 12, 2014** Page: 37 of 85

### **Radiated Emission:**

(Unwanted Emissions into Restricted Frequency Bands): 802.11 b mode

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	49.06	3.14	52.20	74.00	-21.80
2390.00	Average	Е	38.41	3.14	41.55	54.00	-12.45

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	49.78	3.14	52.92	74.00	-21.08
2390.00	Average	Е	39.07	3.14	42.21	54.00	-11.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/60034 **Issue Date: Aug. 12, 2014** Page: 38 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
2483.50	Peak	Е	46.27	3.35	49.62	74.00	-24.38
2483.50	Average	Е	34.96	3.35	38.31	54.00	-15.69

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
2483.50	Peak	Е	47.03	3.35	50.39	74.00	-23.61
2483.50	Average	Е	35.90	3.35	39.25	54.00	-14.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 802.11g - Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



# **Band Edges Test Data CH-High**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/60034 **Issue Date: Aug. 12, 2014** Page: 40 of 85

### **Radiated Emission:**

(Unwanted Emissions into Restricted Frequency Bands): 802.11 g mode

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	54.46	3.14	57.60	74.00	-16.40
2390.00	Average	Е	36.76	3.14	39.90	54.00	-14.10

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	56.03	3.14	59.17	74.00	-14.83
2390.00	Average	Е	37.77	3.14	40.91	54.00	-13.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/60034 **Issue Date: Aug. 12, 2014** Page: 41 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
2483.50	Peak	Е	57.04	3.35	60.39	74.00	-13.61
2483.50	Average	Е	36.09	3.35	39.44	54.00	-14.56

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
2483.50	Peak	Е	58.07	3.35	61.42	74.00	-12.58
2483.50	Average	Е	36.65	3.35	40.00	54.00	-14.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

# 802.11n\_20M- Unwanted Emissions into Non-Restricted Frequency Bands **Band Edges Test Data CH-Low**



## **Band Edges Test Data CH-High**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### Radiated Emission: 802.11 n\_20M mode

#### (Unwanted Emissions into Restricted Frequency Bands): 802.11 n 20M mode

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	61.00	3.14	64.14	74.00	-9.86
2390.00	Average	Е	38.35	3.14	41.49	54.00	-12.51

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	61.35	3.14	64.49	74.00	-9.51
2390.00	Average	Е	39.12	3.14	42.26	54.00	-11.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2014/60034 **Issue Date: Aug. 12, 2014** Page: 44 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
2483.50	Peak	Е	58.13	3.35	61.48	74.00	-12.52
2483.50	Average	Е	37.35	3.35	40.70	54.00	-13.30

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Peak	Е	58.79	3.35	62.14	74.00	-11.86
2483.50	Average	Е	37.61	3.35	40.96	54.00	-13.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **10 SPURIOUS EMISSION TEST 10.1 Standard Applicable**

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

### **10.2 Measurement Equipment Used:**

### **10.2.1** Conducted Emission at antenna port:

Refer to section 7.2 for details.

### 10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

### 10.3 Test SET-UP:

### **10.3.1** Conducted Emission at antenna port:

Refer to section 7.3 for details.

### 10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



### **10.4 Measurement Procedure:**

### **Radiated Emission:**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

### **Conducted Emission:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- 4. Via Software, combine 5 spans of frequency range into one plot
- 5. Repeat above procedures until all default test channel measured were complete.

### **10.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

### $\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

### **10.6 Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and Conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is advised to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



# **Conducted Spurious Emission Measurement Result (802.11b)** Ch Low 30MHz - 3GHz

💓 Agilent Spectrum Analyzer - Sw					- 4 -
LM RL RF 50 (	Q DC	SENSE:INT	ALIGN AUTO Avg Type: Log-Pwr	03:15:46 PM Aug 07, 2014 TRACE 1 2 3 4 5 6	Frequency
	PNO: Fast		Avg Hold: 100/100	DET P NNNN	
	IFGain:Lov	y whiten 30 db		-4 0 444 0 CU-	Auto Tune
10 dB/div Ref 20.00				r1 2.411 9 GHz 3.527 dBm	
10.0				1	Center Freq
0.00					1.515000000 GHz
-10.0				-16.47 d <del>Dm</del>	
-20.0					Start Freq
-30.0				H	30.000000 MHz
-40.0				had a second day of the second	
-50.0 Aprovation of the second damage		La sur dara francisca de la seconda de la	and the second	Profilery and all and property	Stop Freq
-60.0					3.00000000 GHz
-70.0					
Start 30 MHz		BW 200 KU-	Duran (	Stop 3.000 GHz	CF Step 297.000000 MHz
#Res BW 100 kHz		BW 300 kHz		.667 ms (1001 pts)	Auto Man
MKR MODE TRC SCL	× 2.411 9 GHz	3.527 dBm	FUNCTION FUNCTION WIDTH	FUNCTION VALUE	
2					Freq Offset
4 5					0 Hz
6					
8					
9					
11 					
MSG			STATU	5	

## Ch Low 3GHz – 26.5GHz

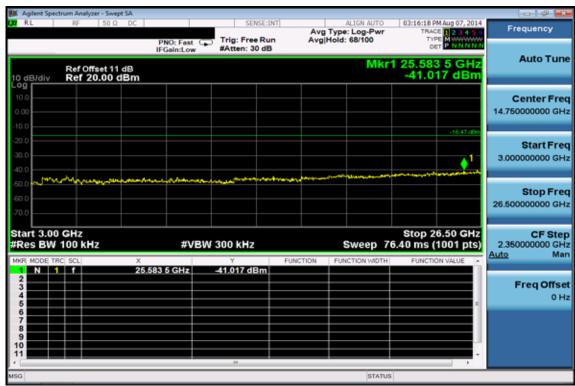


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Ch Mid 30MHz - 3GHz

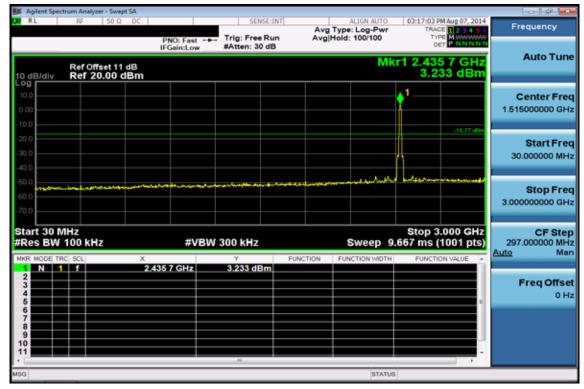


## Ch Mid 3GHz - 26.5GHz

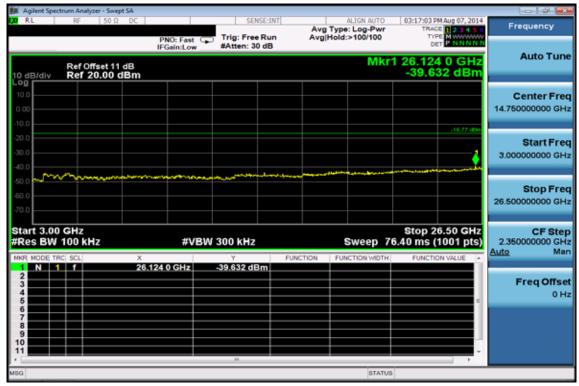


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Ch High 30MHz - 3GHz

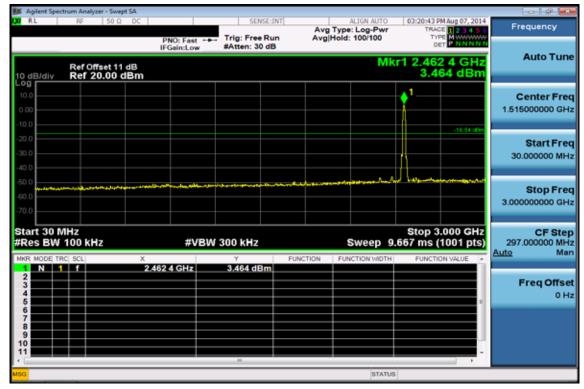

# Ch High 3GHz - 26.5GHz

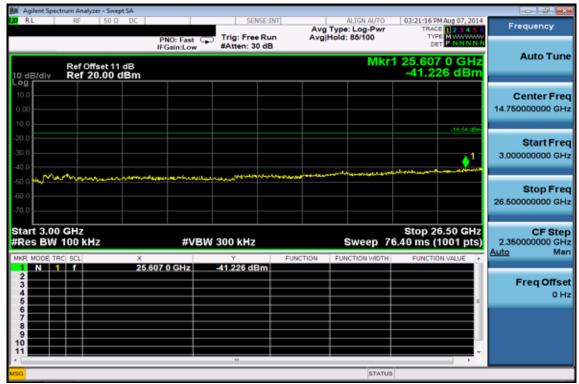

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

# **Conducted Spurious Emission Measurement Result (802.11g)** Ch Low 30MHz - 3GHz

	trum Analyzer - Swept									
XI RL	RF 50 Ω				E:INT		LIGN AUTO	TRA	M Aug 07, 2014	Frequency
10 dB/div	Ref Offset 11 Ref 20.00 d	IFGa	):Fast ↔ in:Low	#Atten: 30		, righted		r1 2.41	7 9 GHz 88 dBm	Auto Tune
10.0 0.00								1		Center Fred 1.515000000 GH2
-20.0 -30.0 -40.0									22.19 dQm	Start Free 30.000000 MHz
-50.0 -60.0 -70.0		and a second	enenat-spor			ويوسيقون والمحاولات	a de se a de s	L.A	4.11.1	Stop Free 3.000000000 GH2
Start 30 N #Res BW	100 kHz	x		300 kHz Y	FUNC		Sweep 9	.667 ms (	.000 GHz 1001 pts) ON VALUE	CF Step 297.000000 MH Auto Mar
1 N 1 2 3 4 5 6 7 8 9 9 10 11		2.417 9	GHz	-2.188 dBi	n					Freq Offset 0 Ha
r E							STATUS	1		


# Ch Low 3GHz - 26.5GHz

	ctrum Analyzer - Swe									- 0 ×
NO RL	RF 50 0	DC		SENS	٩	ALIGN Vg Type: Log vg Hold: 73/1	-Pwr	03:23:25 PM/ TRACE	Aug 07, 2014	Frequency
10 dB/div	Ref Offset 11 Ref 20.00	IFGai	Fast G	#Atten: 30					0 GHz	Auto Tune
10.0 0.00 -10.0										Center Freq 14.750000000 GHz
-20.0 -30.0 -40.0									22.19 dDn	Start Freq 3.000000000 GHz
-50.0 -50.0	******		And the last		#~~~~					Stop Freq 26.50000000 GHz
Start 3.00 #Res BW	100 kHz	X		/ 300 kHz Y	FUNCTION			Stop 26. 40 ms (10 FUNCTION	001 pts)	CF Step 2.350000000 GHz Auto Man
1 N 1 2 3 4 5 6 7 8 9 9 10 11		26.124 0 0	iHz	_41.588 dBr	n 					Freq Offset 0 Hz
* [										
190							STATUS			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### Ch Mid 30MHz - 3GHz

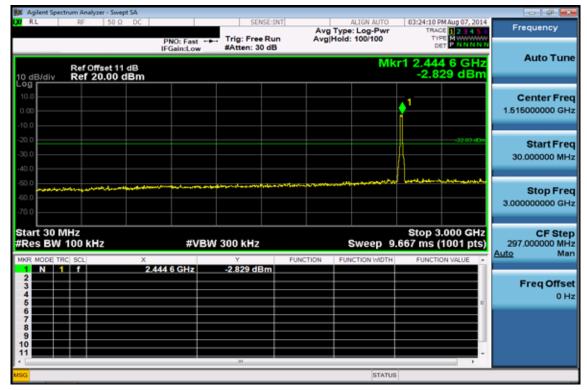


## Ch Mid 3GHz - 26.5GHz

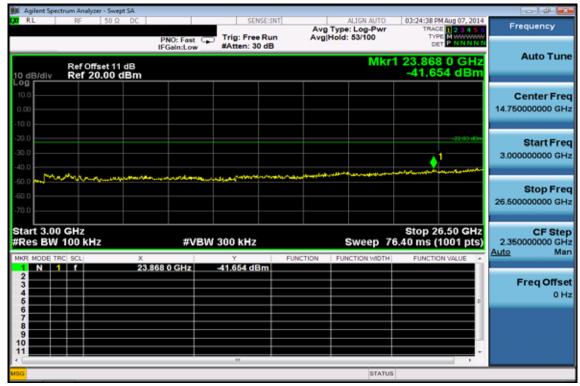


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Ch High 30MHz - 3GHz

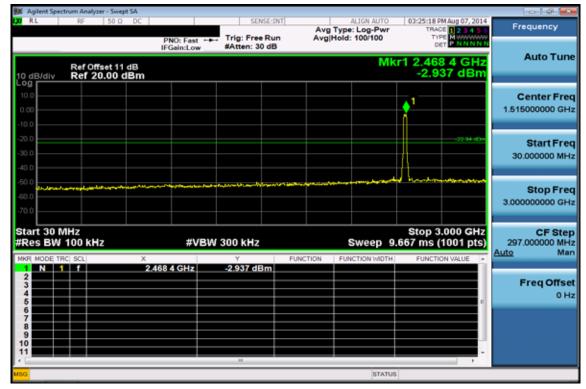

# Ch High 3GHz – 26.5GHz

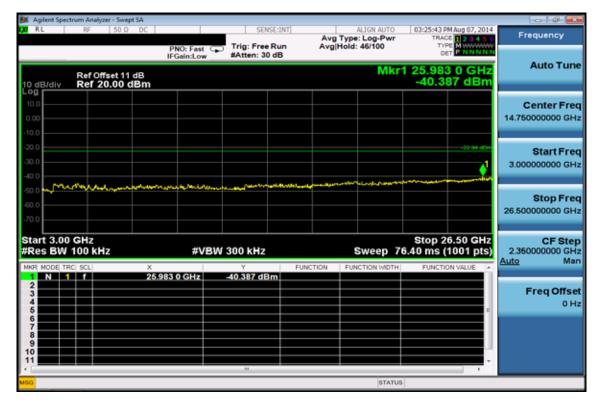


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Conducted Spurious Emission Measurement Result (802.11n\_20M) Ch Low 30MHz - 3GHz

🛤 Agilent Spectrum Analyzer - Swept							
<b>RL RF 50 Ω</b>	DC	SENSE:INT	Avg Typ	e: Log-Pwr	03:26:38 PM Aug TRACE	3456	Frequency
Ref Offset 11		Trig: Free Run #Atten: 30 dB	Avg Hold		r1 2.406 0 -1.910 c	GHZ	Auto Tune
10.0 0.00 -10.0					1		Center Freq 1.515000000 GHz
-20.0					-2	1.91 dBm	Start Freq 30.000000 MHz
-50.0 -60.0 -70.0	an a				And an and an end	a a di gina di	Stop Freq 3.000000000 GHz
Start 30 MHz #Res BW 100 kHz	#VI 2.406 0 GHz	BW 300 kHz -1.910 dBm		Sweep 9.	Stop 3.000 667 ms (1001 FUNCTION VAL	l pts)	CF Step 297.000000 MHz Auto Man
		-1.910 0.011					Freq Offset 0 Hz
7 8 9 10 11							
MSG				STATUS		•	

# Ch Low 3GHz – 26.5GHz

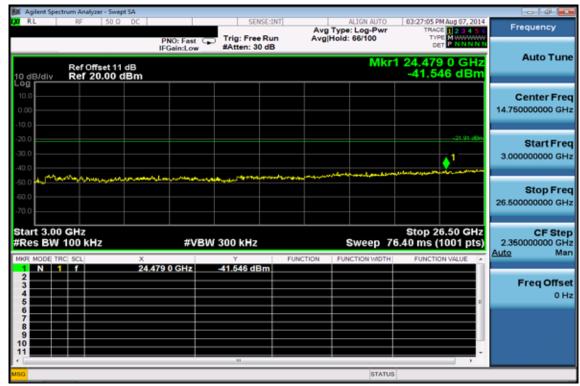


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### Ch Mid 30MHz - 3GHz

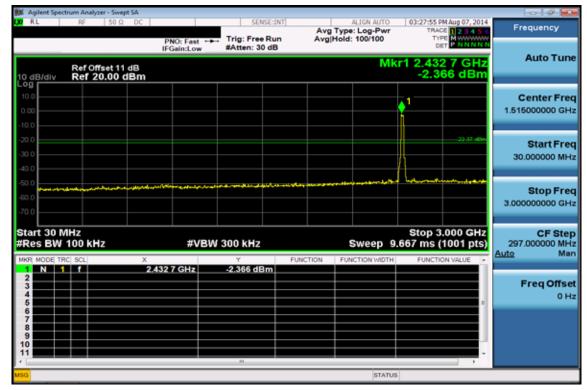


## Ch Mid 3GHz - 26.5GHz

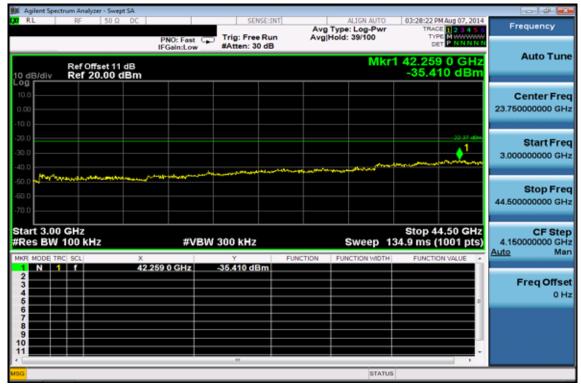


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Ch High 30MHz - 3GHz

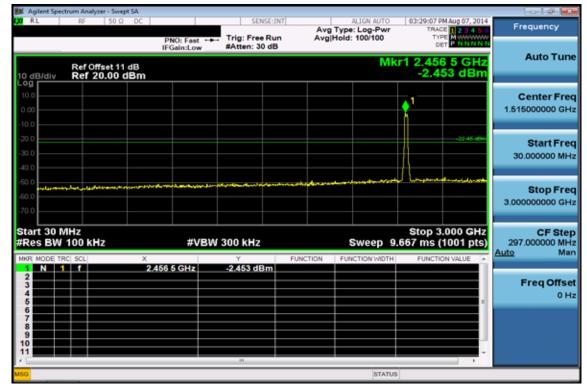

# Ch High 3GHz – 26.5GHz

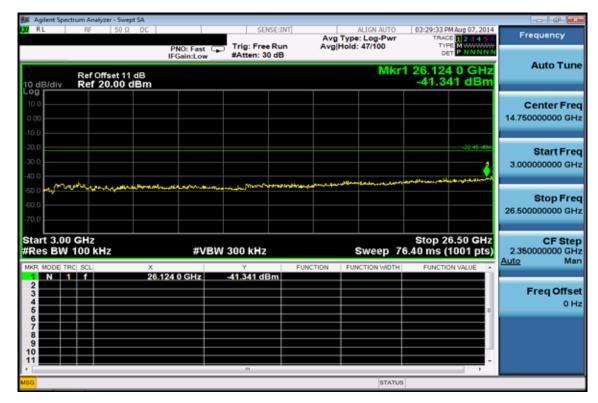

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **Radiated Spurious Emission Measurement Result (802.11b)**

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL
LUT FOI.	.L2 Flane	Measurement Antenna For.	. VENTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor( $dB\mu V/m$ ) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24120.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
125.06	Peak	S	53.73	-21.59	32.14	43.50	-11.36
217.21	Peak	S	54.95	-24.22	30.73	46.00	-15.27
243.40	Peak	S	50.66	-21.14	29.52	46.00	-16.48
395.69	Peak	S	46.87	-15.89	30.98	46.00	-15.02
486.87	Peak	S	43.69	-14.55	29.13	46.00	-16.87
800.18	Peak	S	36.55	-10.16	26.39	46.00	-19.61
4824.00	Peak	Н	42.71	0.38	43.09	74.00	-30.91
4824.00	Average	Н	37.32	0.38	37.70	54.00	-16.30
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					
19296.00	Peak	Н					
21708.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 57 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24120.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
111.48	Peak	S	45.35	-22.03	23.32	43.50	-20.18
226.91	Peak	S	48.68	-23.30	25.38	46.00	-20.62
364.65	Peak	S	46.44	-16.79	29.65	46.00	-16.35
390.84	Peak	S	54.69	-16.25	38.45	46.00	-7.55
399.57	Peak	S	54.18	-15.64	38.54	46.00	-7.46
700.27	Peak	S	36.56	-11.42	25.13	46.00	-20.87
4824.00	Peak	Н	43.22	0.38	43.60	74.00	-30.40
4824.00	Average	Н	39.88	0.38	40.26	54.00	-13.74
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					
19296.00	Peak	Н					
21708.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 58 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24370.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
125.06	Peak	S	53.46	-21.59	31.88	43.50	-11.62
399.57	Peak	S	43.55	-15.64	27.91	46.00	-18.09
513.06	Peak	S	38.28	-13.83	24.45	46.00	-21.55
685.72	Peak	S	39.79	-11.65	28.14	46.00	-17.86
690.57	Peak	S	39.70	-11.48	28.22	46.00	-17.78
698.33	Peak	S	40.54	-11.51	29.04	46.00	-16.96
4874.00	Average	Н	37.53	0.41	37.94	54.00	-16.06
4874.00	Peak	Н	45.24	0.41	45.65	74.00	-28.35
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					
	<b>D</b> 1	**					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 59 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	$dB\mu V/m$	dB
216.24	Peak	S	51.91	-24.26	27.65	46.00	-18.35
299.66	Peak	S	44.64	-19.05	25.60	46.00	-20.40
365.62	Peak	S	45.88	-16.82	29.06	46.00	-16.94
390.84	Peak	S	53.33	-16.25	37.08	46.00	-8.92
399.57	Peak	S	52.50	-15.64	36.86	46.00	-9.14
640.13	Peak	S	36.63	-11.95	24.69	46.00	-21.31
4874.00	Peak	Н	44.20	0.41	44.61	74.00	-29.39
4874.00	Average	Н	37.69	0.41	38.10	54.00	-15.90
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 60 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	dBµV/m	dB
39.70	Peak	S	56.91	-21.08	35.84	40.00	-4.16
125.06	Peak	S	52.08	-21.59	30.50	43.50	-13.00
300.63	Peak	S	47.79	-19.00	28.79	46.00	-17.21
337.49	Peak	S	42.54	-17.88	24.66	46.00	-21.34
396.66	Peak	S	41.09	-15.80	25.29	46.00	-20.71
599.39	Peak	S	35.66	-12.25	23.41	46.00	-22.59
4924.00	Average	Н	35.94	0.50	36.44	54.00	-17.56
4924.00	Peak	Н	43.71	0.50	44.21	74.00	-29.79
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 61 of 85

Operation Band	:802.11b	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
110.51	Peak	S	45.07	-22.06	23.00	43.50	-20.50
121.18	Peak	S	50.59	-21.69	28.90	43.50	-14.60
298.69	Peak	S	42.88	-19.09	23.79	46.00	-22.21
364.65	Peak	S	45.16	-16.79	28.36	46.00	-17.64
399.57	Peak	S	51.56	-15.64	35.92	46.00	-10.08
640.13	Peak	S	36.12	-11.95	24.18	46.00	-21.82
4924.00	Average	Н	35.33	0.51	35.84	54.00	-18.16
4924.00	Peak	Н	44.33	0.51	44.83	74.00	-29.17
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



### **Radiated Spurious Emission Measurement Result (802.11g)**

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24120.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
99.84	Peak	S	42.89	-23.19	19.71	43.50	-23.80
281.23	Peak	S	42.18	-19.54	22.64	46.00	-23.36
390.84	Peak	S	48.85	-16.25	32.61	46.00	-13.39
398.60	Peak	S	47.74	-15.71	32.03	46.00	-13.97
498.51	Peak	S	36.67	-14.21	22.46	46.00	-23.54
578.05	Peak	S	34.72	-12.24	22.48	46.00	-23.52
4824.00	Peak	Н	43.32	0.38	43.71	74.00	-30.29
4824.00	Average	Н	36.93	0.38	37.31	54.00	-16.69
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					
19296.00	Peak	Н					
21708.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 63 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24120.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	Peak	S	55.11	-27.05	28.06	40.00	-11.94
366.59	Peak	S	44.44	-16.85	27.59	46.00	-18.41
390.84	Peak	S	51.70	-16.25	35.45	46.00	-10.55
399.57	Peak	S	52.34	-15.64	36.71	46.00	-9.29
598.42	Peak	S	40.17	-12.25	27.92	46.00	-18.08
640.13	Peak	S	34.67	-11.95	22.72	46.00	-23.28
4824.00	Average	Н	37.85	0.38	38.23	54.00	-15.77
4824.00	Peak	Н	44.46	0.38	44.84	74.00	-29.16
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					
19296.00	Peak	Н					
21708.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 64 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24370.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	Peak	S	47.45	-21.71	25.74	40.00	-14.26
100.81	Peak	S	42.50	-23.05	19.45	43.50	-24.05
357.86	Peak	S	47.97	-16.93	31.04	46.00	-14.96
367.56	Peak	S	43.97	-16.85	27.12	46.00	-18.88
390.84	Peak	S	45.84	-16.25	29.59	46.00	-16.41
398.60	Peak	S	44.24	-15.71	28.53	46.00	-17.47
4874.00	Peak	Н	43.65	0.41	44.05	74.00	-29.95
4874.00	Average	Н	35.86	0.41	36.27	54.00	-17.73
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 65 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24370.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
103.72	Peak	S	47.46	-22.67	24.79	43.50	-18.71
156.10	Peak	S	55.58	-23.01	32.57	43.50	-10.93
210.42	Peak	S	46.15	-23.95	22.20	43.50	-21.30
256.01	Peak	S	43.42	-19.75	23.67	46.00	-22.33
390.84	Peak	S	51.96	-16.25	35.72	46.00	-10.28
399.57	Peak	S	51.85	-15.64	36.21	46.00	-9.79
4874.00	Peak	Н	42.59	0.41	43.00	74.00	-31.00
4874.00	Average	Н	34.32	0.41	34.73	54.00	-19.27
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 66 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
30.97	Peak	S	45.09	-16.34	28.75	40.00	-11.25
98.87	Peak	S	50.36	-23.34	27.02	43.50	-16.48
273.47	Peak	S	53.77	-19.72	34.05	46.00	-11.95
364.65	Peak	S	49.69	-16.79	32.90	46.00	-13.10
390.84	Peak	S	49.08	-16.25	32.83	46.00	-13.17
399.57	Peak	S	49.45	-15.64	33.81	46.00	-12.19
4924.00	Peak	Н	41.21	0.50	41.71	74.00	-32.29
4924.00	Average	Н	32.97	0.50	33.47	54.00	-20.53
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 67 of 85

Operation Band	:802.11g	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
42.61	Peak	S	47.34	-22.85	24.49	40.00	-15.51
52.31	Peak	S	55.53	-27.05	28.48	40.00	-11.52
298.69	Peak	S	43.20	-19.09	24.11	46.00	-21.89
366.59	Peak	S	43.35	-16.85	26.50	46.00	-19.50
390.84	Peak	S	50.45	-16.25	34.20	46.00	-11.80
399.57	Peak	S	48.48	-15.64	32.84	46.00	-13.16
4924.00	Peak	Н	42.41	0.51	42.91	74.00	-31.09
4924.00	Average	Н	33.75	0.51	34.26	54.00	-19.74
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



#### Radiated Spurious Emission Measurement Result (802.11n\_20M)

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
99.84	Peak	S	43.22	-23.19	20.03	43.50	-23.47
145.43	Peak	S	53.04	-22.43	30.61	43.50	-12.89
291.90	Peak	S	42.81	-19.31	23.50	46.00	-22.50
313.24	Peak	S	48.83	-18.57	30.27	46.00	-15.73
357.86	Peak	S	47.64	-16.93	30.71	46.00	-15.29
390.84	Peak	S	46.72	-16.25	30.47	46.00	-15.53
4824.00	Average	Н	36.65	0.38	37.03	54.00	-16.97
4824.00	Peak	Н	42.72	0.38	43.10	74.00	-30.90
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					

21708.00 Peak 24120.00 Peak

Peak

19296.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η Η

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 69 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2412 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24120.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
231.76	Peak	S	43.67	-22.53	21.15	46.00	-24.85
298.69	Peak	S	43.26	-19.09	24.16	46.00	-21.84
366.59	Peak	S	43.86	-16.85	27.02	46.00	-18.99
390.84	Peak	S	51.82	-16.25	35.57	46.00	-10.43
399.57	Peak	S	52.08	-15.64	36.45	46.00	-9.55
640.13	Peak	S	36.44	-11.95	24.50	46.00	-21.50
4824.00	Peak	Н	41.06	0.38	41.44	74.00	-32.56
4824.00	Average	Н	35.09	0.38	35.47	54.00	-18.53
7236.00	Peak	Н					
9648.00	Peak	Н					
12060.00	Peak	Н					
14472.00	Peak	Н					
16884.00	Peak	Н					
19296.00	Peak	Н					
21708.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 70 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

24370.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
34.85	Peak	S	47.79	-18.42	29.38	40.00	-10.62
67.83	Peak	S	54.38	-28.85	25.54	40.00	-14.46
190.05	Peak	S	52.45	-24.19	28.25	43.50	-15.25
220.12	Peak	S	52.50	-24.07	28.43	46.00	-17.57
395.69	Peak	S	44.28	-15.89	28.39	46.00	-17.61
503.36	Peak	S	37.96	-14.25	23.71	46.00	-22.29
4874.00	Peak	Н	42.44	0.41	42.85	74.00	-31.15
4874.00	Average	Н	36.25	0.41	36.66	54.00	-17.34
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 71 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2437 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

24370.00

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	$dB\mu V/m$	$dB\mu V/m$	dB
237.58	Peak	S	44.54	-21.88	22.66	46.00	-23.34
298.69	Peak	S	42.69	-19.09	23.59	46.00	-22.41
390.84	Peak	S	51.44	-16.25	35.19	46.00	-10.81
431.58	Peak	S	37.83	-15.09	22.73	46.00	-23.27
640.13	Peak	S	35.69	-11.95	23.75	46.00	-22.25
797.27	Peak	S	32.23	-10.17	22.06	46.00	-23.94
4874.00	Peak	Н	41.12	0.41	41.53	74.00	-32.47
4874.00	Average	Н	34.86	0.41	35.27	54.00	-18.73
7311.00	Peak	Н					
9748.00	Peak	Н					
12185.00	Peak	Н					
14622.00	Peak	Н					
17059.00	Peak	Н					
19496.00	Peak	Н					
21933.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η

Peak



Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 72 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
99.84	Peak	S	43.37	-23.19	20.18	43.50	-23.32
215.27	Peak	S	52.18	-24.31	27.87	43.50	-15.63
242.43	Peak	S	47.66	-21.28	26.38	46.00	-19.62
396.66	Peak	S	43.42	-15.80	27.63	46.00	-18.37
511.12	Peak	S	37.39	-13.75	23.65	46.00	-22.35
817.64	Peak	S	32.17	-9.96	22.22	46.00	-23.78
4924.00	Peak	Н	41.44	0.51	41.95	74.00	-32.05
4924.00	Average	Н	33.15	0.51	33.66	54.00	-20.34
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η



#### FCC ID: H79DFWM-GIN00

Report No.: E2/2014/60034 Issue Date: Aug. 12, 2014 Page: 73 of 85

Operation Band	:802.11n20M	Test Date	:2014-08-07
Fundamental Frequency	:2462 MHz	Temp./Humi.	:28.6deg_C/47RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$ 

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

24620.00

Peak

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV	dB	dBµV/m	dBµV/m	dB
171.62	Peak	S	42.89	-23.82	19.07	43.50	-24.43
232.73	Peak	S	44.81	-22.41	22.40	46.00	-23.60
364.65	Peak	S	42.66	-16.79	25.87	46.00	-20.13
390.84	Peak	S	50.84	-16.25	34.59	46.00	-11.41
431.58	Peak	S	38.48	-15.09	23.38	46.00	-22.62
598.42	Peak	S	38.37	-12.25	26.12	46.00	-19.88
4924.00	Peak	Н	40.97	0.51	41.47	74.00	-32.53
4924.00	Average	Н	34.28	0.51	34.79	54.00	-19.21
7386.00	Peak	Н					
9848.00	Peak	Н					
12310.00	Peak	Н					
14772.00	Peak	Н					
17234.00	Peak	Н					
19696.00	Peak	Н					
22158.00	Peak	Н					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Η

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 11 PEAK POWER SPECTRAL DENSITY

## **11.1 Standard Applicable:**

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### **11.2 Measurement Equipment Used:**

Refer to section 7.2 for details.

#### 11.3 Test Set-up:

Refer to section 7.3 for details. (Spectrum Option)

#### 11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW  $\geq$  3 kHz.
- 4. Set the VBW  $\geq$  3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Re非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### **11.5 Measurement Result:**

#### 802.11b

Frequency	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-15.018	8
2437	-15.262	8
2462	-15.390	8

802.11g

Frequency	<b>RF Power Density</b>	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-17.107	8
2437	-17.248	8
2462	-17.198	8

#### 802.11n\_20M

Frequency	<b>RF</b> Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2412	-12.080	8
2437	-12.331	8
2462	-12.636	8

\* Note: Offset 11dB for 2.4G 802.11b/g/n\_20. \*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCET taken I to I and Wink unaPrad NewTainel/astr MukruPistrict NewTainel/City Taiwan2/4803/% th TAT SM 54, # TAT SM 54



# 802.11b

# Power Spectral Density Test Plot (CH-Low)



# Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# Power Spectral Density Test Plot (CH-High)



#### 802.11g


# **Power Spectral Density Test Plot (CH-Low)**

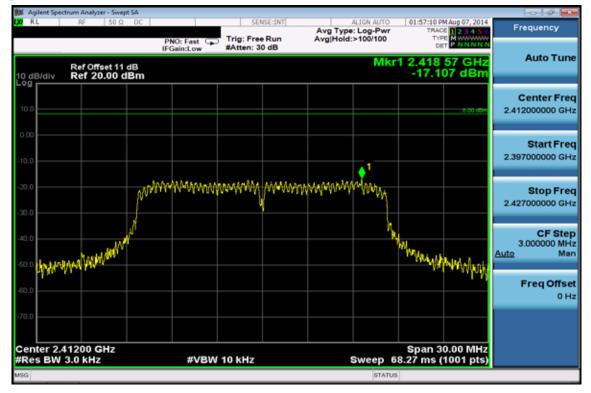


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Power Spectral Density Test Plot (CH-Mid)**

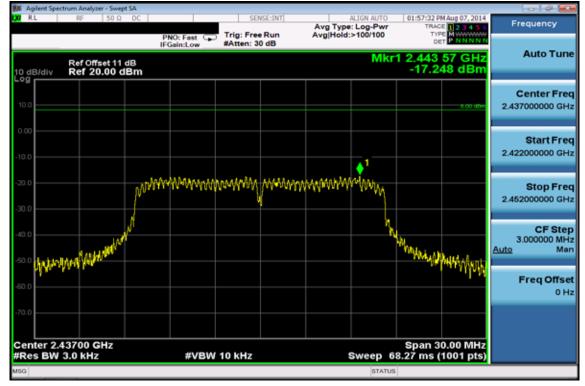

## Power Spectral Density Test Plot (CH-High)

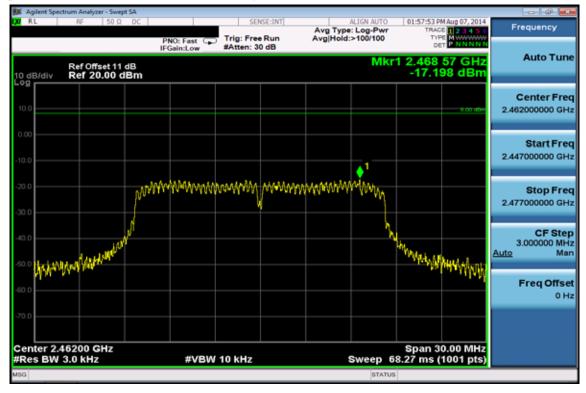


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




# 802.11n 20M

# Power Spectral Density Test Plot (CH-Low)

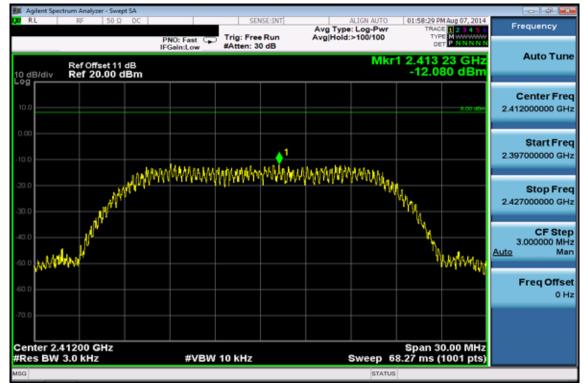


# Power Spectral Density Test Plot (CH-Mid)

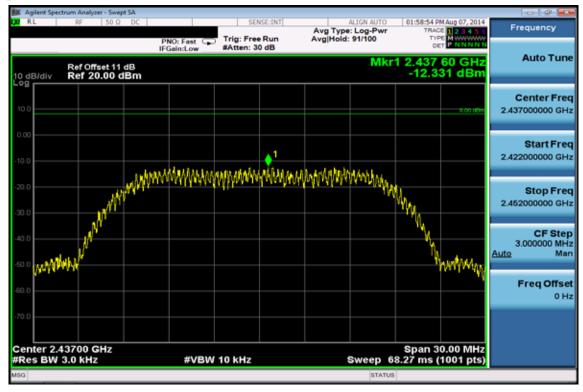

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# Power Spectral Density Test Plot (CH-High)

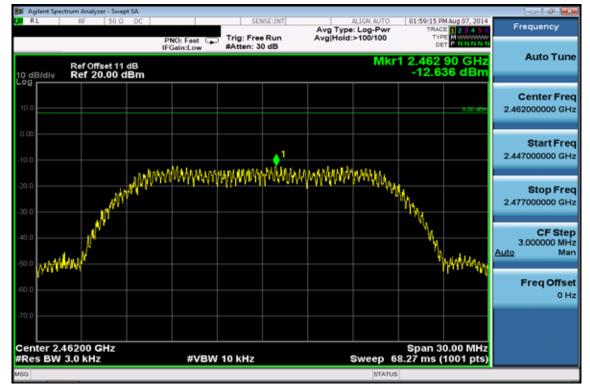

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report feiter only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# **12 ANTENNA REQUIREMENT**

## 12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

### **12.2 Antenna Connected Construction:**

The directional gains of antenna used for transmitting is -3.06dBi and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# **13 MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

### 13.1 Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a Mobile device, the MPE is required.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range	Electric Field	Magnetic Field	Power Density	Averaging Time			
(MHz)	Strength (V/m)	Strength (A/m)	$(mW/cm^2)$	(minute)			
	Limits for General Population/Uncontrolled Exposure						
0.3-1.34	614	1.63	*(100)	30			
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30			
30-300	27.5	0.073	0.2	30			
300-1500	/	/	F/1500	30			
1500-15000	/	/	1.0	30			

F =frequency in MHz

\* = Plane-wave equipment power density

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



# 13.2 Maximum Permissible Exposure (MPE) Evaluation

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	13.99	0.00	13.99	0.02506	1
2437.00	13.88	0.00	13.88	0.02443	1
2462.00	13.92	0.00	13.92	0.02466	1

# 802.11b Power Table

### MPE Prediction (802.11b)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

S=PG/4  $R^2$ 

Where: S = Power density

- P = Power input to antenna
- G = Power gain of the antenna in the direction of interest relative to an isotropic radiator
- R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	13.99	(dBm)
Maximum peak output power at antenna input terminal:	25.06109253	(mW)
Duty cycle:	100	(%)
Maximum Pav :	25.06109253	(mW)
Antenna gain (typical):	-3.06	(dBi)
Maximum antenna gain:	0.494310687	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2412	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.002466	(mW/cm^2)

#### **Measurement Result**

The predicted power density level at 20 cm is 0.00247mW/cm<sup>2</sup>. This is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2412MHz.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	11.09	0.00	11.09	0.01285	1
2437.00	11.13	0.00	11.13	0.01297	1
2462.00	11.38	0.00	11.38	0.01374	1

### MPE Prediction (802.11g)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

S=PG/4  $R^2$ 

Where: S = Power density

- P = Power input to antenna
- G = Power gain of the antenna in the direction of interest relative to an isotropic radiator
- R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	11.38	(dBm)
Maximum peak output power at antenna input terminal:	13.74041975	(mW)
Duty cycle:	100	(%)
Maximum Pav :	13.74041975	(mW)
Antenna gain (typical):	-0.36	(dBi)
Maximum antenna gain:	0.920449572	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.002517	(mW/cm^2)

#### **Measurement Result**

The predicted power density level at 20 cm is 0.00252 mW/cm2. This is below the uncontrolled exposure limit of 1 mW/cm2 at 2462.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2412.00	11.03	0.00	11.03	0.01268	1
2437.00	11.13	0.00	11.13	0.01297	1
2462.00	11.18	0.00	11.18	0.01312	1

#### 802.11n 20M (2.4G) Power Table

#### MPE Prediction (802.11n\_20M (2.4G))

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

S=PG/4  $R^2$ 

Where: S = Power density

- P = Power input to antenna
- G = Power gain of the antenna in the direction of interest relative to an isotropic radiator
- R = Distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	11.18	(dBm)
Maximum peak output power at antenna input terminal:	13.12199899	(mW)
Duty cycle:	100	(%)
Maximum Pav :	13.12199899	(mW)
Antenna gain (typical):	-3.06	(dBi)
Maximum antenna gain:	0.494310687	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm2)
Power density at predication frequency at 20 (cm)	0.001291	(mW/cm^2)

#### **Measurement Result**

The predicted power density level at 20 cm is 0.00129 mW/cm2. This is below the uncontrolled exposure limit of 1 mW/cm2 at 2462.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.