


## RFA-02-P33-70B-150

### Electrical Specifications

Frequency range	2400 MHz – 2500 MHz
Peak gain	2dBi
Average gain	1dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, vertical
Power handling	1W (cw)
Impedance	50 $\Omega$
Connector	I-PEX
Cable	$\varnothing$ 1.13mm

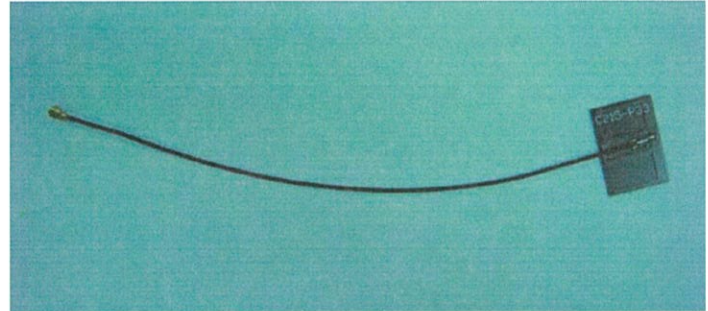

### Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 25°C
Wire material	§ 1.13 VW-1

