

Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 1 of 52

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: ZigBee Module

Brand Name: Delta

Model No.: DFZM-E7221-DT0R, DFZM-E7220-DT0R

Model Difference: DFZM-E7221-DT0R use build-in antenna &

DFZM-E7220-DT0R use external antenna

FCC ID: **H79DFZM-E7220**

Report No.: ER/2014/90003

Issue Date: Sep. 16, 2014

FCC Rule Part: §15.247, Cat: DTS

Delta Electronics

Prepared for: 3 Tungyuan Road, Chungli Industrial Zone,

Taoyuan County 32063 Taiwan

SGS Taiwan Ltd.

Electronics & Communication Laboratory

Prepared by: No.134, Wu Kung Road, New Taipei Industrial

Park, Wuku District, New Taipei City, Taiwan

24703





Testing Leboretory 0513 Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for elec-

This document is issued by the Company subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 wwv

SGS Taiwan Ltd.



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 2 of 52

VERIFICATION OF COMPLIANCE

Applicant: Delta Electronics

3 Tungyuan Road, Chungli Industrial Zone, Taoyuan County 32063

Taiwan

Product Name: ZigBee Module

Brand Name: Delta

Model No.: DFZM-E7221-DT0R, DFZM-E7220-DT0R

DFZM-E7221-DT0R use build-in antenna & **Model Difference:**

DFZM-E7220-DT0R use external antenna

FCC ID: H79DFZM-E7220

File Number: ER/2014/90003

Date of test: Sep. 01, 2014 ~ Sep. 16, 2014

Date of EUT Received: Sep. 16, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	IJ	Chen	Date	Sep. 16, 2014	
_	JJ Ch	en / Engineer			
Prepared By:	777	any Kao	Date	Sep. 16, 2014	
Approved By:	Jù	ny Kao / Clerk Chang	Date	Sep. 16, 2014	
	Jim Cha	ing / Supervisor			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices Office Windows States the Company in this act report of the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

SGS Taiwan Ltd.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 3 of 52

Version

Version No. Date		Description	
00 Sep. 16, 2014		Initial creation of document	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in unleast at any the prosequents of this document. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.
No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 4 of 52

Table of Contents

1	GEN	NERAL INFORMATION	6
	1.1	Product description.	6
	1.2	Related Submittal(s) / Grant (s)	7
	1.3	Test Methodology	7
	1.4	Test Facility	7
	1.5	Special Accessories	7
	1.6	Equipment Modifications	7
2	SYS	TEM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3	SUM	IMARY OF TEST RESULTS	10
4	DES	CRIPTION OF TEST MODES	10
5	MEA	ASUREMENT UNCERTAINTY	11
6	CON	NDUCTED EMISSION TEST	12
	6.1	Standard Applicable:	12
	6.2	Measurement Equipment Used:	12
	6.3	EUT Setup:	12
	6.4	Test SET-UP (Block Diagram of Configuration)	13
	6.5	Measurement Procedure:	13
	6.6	Measurement Result:	13
7	PEA	K OUTPUT POWER MEASUREMENT	14
	7.1	Standard Applicable:	14
	7.2	Measurement Equipment Used:	14
	7.3	Test Set-up:	15
	7.4	Measurement Procedure:	15
	7.5	Measurement Result:	17
8	6dB	BANDWIDTH	18
	8.1	Standard Applicable:	18
	8.2	Measurement Equipment Used:	18
	8.3	Test Set-up:	19
	8.4	Measurement Procedure:	19
	8.5	Measurement Result:	19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in unleast at any the prosequents of this document. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 5 of 52

9	BAN	D EDGES MEASUREMENT	22
	9.1	Standard Applicable:	22
	9.2	Measurement Equipment Used:	22
	9.3	Test SET-UP:	23
	9.4	Measurement Procedure:	24
	9.5	Field Strength Calculation:	25
	9.6	Measurement Result:	25
10	SPUF	RIOUS EMISSION TEST	31
	10.1	Standard Applicable	31
	10.2	Measurement Equipment Used:	31
	10.3	Test SET-UP:	31
	10.4	Measurement Procedure:	32
	10.5	Field Strength Calculation	32
	10.6	Measurement Result:	32
11	PEAI	K POWER SPECTRAL DENSITY	48
	11.1	Standard Applicable:	48
	11.2	Measurement Equipment Used:	48
	11.3	Test Set-up:	48
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	48
	11.5	Measurement Result:	49
12	ANT	ENNA REQUIREMENT	52
	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	52
13	Maxi	mum Permissible Exposure (MPE) Evaluation	53
	13.1	Standard Applicable	53
	13.2	Maximum Permissible Exposure (MPE) Evaluation	54
PН	ото	FRAPHS OF SET UP	56
рн	OTOG	CRAPHS OF EUT	62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in unleast at any the prosequents of this document. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 6 of 52

GENERAL INFORMATION

Product description

General:

Jeneral.	
Product Name:	ZigBee Module
Brand Name:	Delta
Model No.:	DFZM-E7221-DT0R, DFZM-E7220-DT0R
Model Difference:	DFZM-E7221-DT0R use build-in antenna &
model Billerence.	DFZM-E7220-DT0R use external antenna
Hardware Version:	N/A
Software Version:	N/A
Power Supply:	3.3Vdc from power supply
Operation Frequency:	2405~2480MHz
Channel number:	16 channels
Channel Spacing:	5MHz
Modulation Type:	O-QPSK
Rated Power:	8.32dBm (Peak)
Antenna Designation:	External: Dipole Antenna: 2.27dBi, Product No.: AR007WSW01A03 Internal: Printed Antenna: 0.68dBi, Model No.: DFZM-E7211-DT0R

The EUT is in compliance with FCC §15.247.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms-and-conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unapplied and offenders may be prosecuted to the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 7 of 52

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>H79DFZM-E7220</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B under the DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Apr 2013 KDB558074 D01 V03 for compliance to FCC 47CFR 15.247 requirements.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. FCC Registration Number: 455997.

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 8 of 52

SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for elec tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 9 of 52

Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	DELL	D505	20995915456	shielding	Un-shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of containing the containing the containing and the company's findings at the time of its intervention only and within the limits of containing the containing that the containing Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 10 of 52

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	(d) Spurious Emission	
§15.247(e) Peak Power Density		Compliant
§15.203 Antenna Requirement		Compliant

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2405MHz), mid (2440MHz) and high (2480MHz) with highest data rate are chosen for full testing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 11 of 52

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	
AC Power Line Conducted Emission	+/- 2.586 dB	
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)	
6dB Bandwidth	+/- 123.36 Hz	
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB	
Peak Power Density	+/- 1.55 dB	
Temperature	+/- 0.8 °C	
Humidity	+/- 4.7 %	
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%	

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB				
Magazinamant in a antainte	180MHz -417MHz: +/- 3.19dB				
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB				
(1 old ization : Vertical)	1GHz - 18GHz: +/- 4.04dB				
	18GHz - 40GHz: +/- 4.04dB				
	30MHz - 167MHz: +/- 4.22dB				
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB				
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB				
	1GHz - 18GHz: +/- 4.08dB				
	18GHz - 40GHz: +/- 4.08dB				

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 12 of 52

CONDUCTED EMISSION TEST

6.1 **Standard Applicable:**

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

	Limits		
Frequency range	dB((uV)	
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015	
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015	
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015	
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014	

6.3 **EUT Setup:**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

> 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 13 of 52

6.4 Test SET-UP (Block Diagram of Configuration)

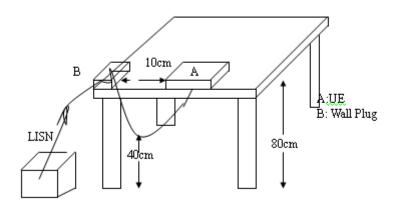

6.5 **Measurement Procedure:**

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 **Measurement Result:**

N/A, EUT powered from DC Power Supply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 14 of 52

PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

According to §15.247 (b)

- (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.2 **Measurement Equipment Used:**

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015	
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015	
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015	
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015	
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015	
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015	
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 15 of 52

Test Set-up: 7.3



Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

- 3. Record the max. Reading as observed from Spectrum or Power Meter.
- 4. Repeat above procedures until all frequency of interest measured was complete.
- 5. For MIMO operation, measurement is done per chain basis, and then sum the simultaneous transmitting output in linear.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 16 of 52

Pre-anaysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, resulted as obtained below, and showed only the most representative ones Tabular results as indicates below entails the results of duty factor for all supported modes.

Formula:


 $Duty\ Cycle = Ton/(Ton+Toff)$

Test Procedure:

Set span = 0, RBW = 1MHz, VBW = 3MHz, Detector = Peak Duty Cycle:

Duty Cycle	Duty Factor (dBm)
0.99	0.0

Duty Factor:

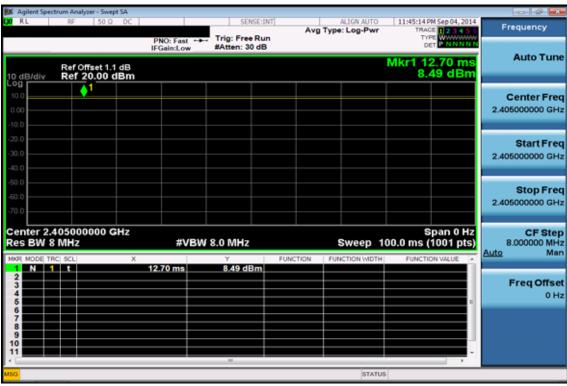

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

d. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 17 of 52

Measurement Result:

Frequency (MHz)	Peak Power Output (dBm)	Required Limit
2405	8.32	1 Watt = 30 dBm
2440	8.29	1 Watt = 30 dBm
2480	-4.81	1 Watt = 30 dBm

^{*} Note:

- 1. The duty cycle factor is compensated back to obtain the maximum value of the measurement in average.
- 2. Measured by power meter, cable loss as 1.1dB that offsets on the power meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

SGS Taiwan Ltd.



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 18 of 52

6dB BANDWIDTH

8.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

8.2 **Measurement Equipment Used:**

Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015						
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015						
Spectrum Analyzer Agilent		E4446A	MY51100003	05/19/2014	05/18/2015						
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015						
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015						
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015						
Attenuator Mini-Circuit		BW-S10W2+	002	02/27/2014	02/26/2015						
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 19 of 52

Test Set-up: 8.3



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 10M, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

8.5 **Measurement Result:**

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2405	1946	> 500	PASS
2440	1608	> 500	PASS
2480	1604	> 500	PASS

^{*} Note: Offset 1.1dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

^{*}Refer to next page for plots.


Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 20 of 52

6dB Band Width Test Data CH-Low

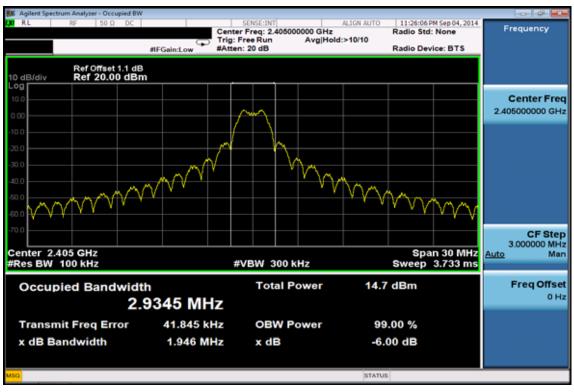

6dB Band Width Test Data CH-Mid

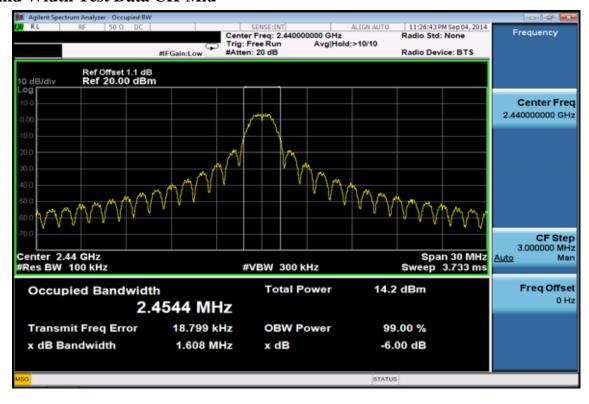

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices Office Windows States the Company in this act report of the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488


www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 21 of 52

6dB Band Width Test Data CH-High

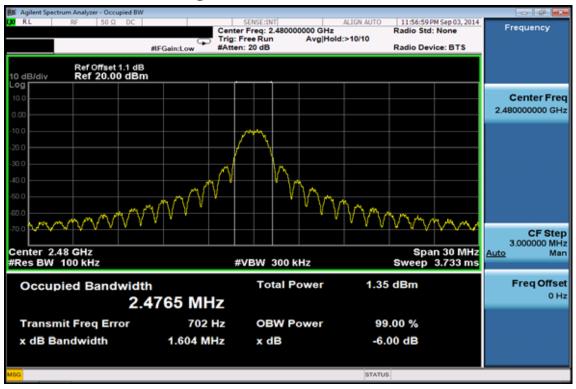

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the windows and the subject to the subj Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 22 of 52

BAND EDGES MEASUREMENT

Standard Applicable:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

Measurement Equipment Used: 9.2

Conducted Emission at antenna port:

Refer to section 7.2 for details.

Radiated emission:

966 Chamber										
EQUIPMENT	MFR	MODEL SERIAL		LAST	CAL DUE.					
ТҮРЕ		NUMBER	NUMBER	CAL.						
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015					
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015					
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015					
Spectrum Analyzer	R&S	FSV-30	101398	10/22/2013	10/21/2014					
Loop Antenna	ETS.LINDGREN	6502	00148045	07/03/2014	07/02/2015					
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/01/2015					
Horn antenna	ETS.LINDGREN	3117	123995	05/19/2014	05/18/2015					
Horn Antenna	Schwarzbeck	BBHA9170	184	01/23/2014	01/22/2015					
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015					
Pre-Amplifier	Agilent	8449B	3008A00578	01/03/2014	01/02/2015					
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/24/2014	01/23/2015					
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/27/2014	02/26/2015					
Attenuator	Mini-Circuit	BW-S10W2+	004	02/27/2014	02/26/2015					
Turn Table	HD	DT420	N/A	N.C.R	N.C.R					
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R					
Controller	HD	HD100	N/A	N.C.R	N.C.R					
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015					
3m Site NSA	SGS	966 chamber	N/A	07/15/2014	07/14/2015					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Offices Office Windows States the Company in this act report of the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

SGS Taiwan Ltd.

f (886-2) 2298-0488




Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 23 of 52


9.3 **Test SET-UP:**

Conducted Emission at antenna port:




9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

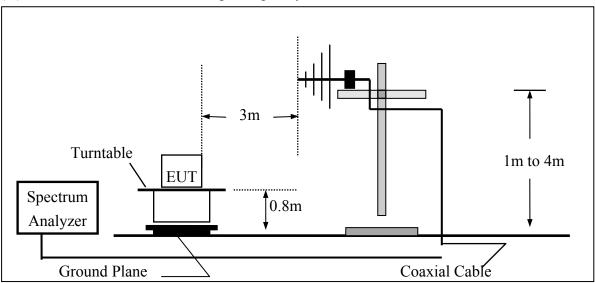

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

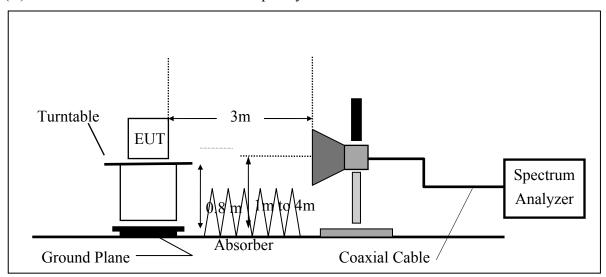

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 24 of 52

Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074 D01

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 25 of 52

9.5 **Field Strength Calculation:**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279


Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 26 of 52

Unwanted Emissions into Non-Restricted Frequency Bands Band Edges Test Data CH-Low

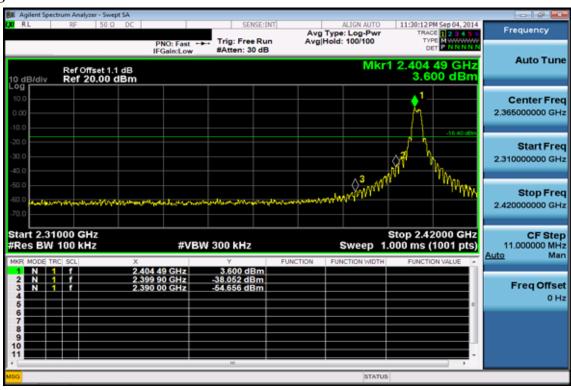

Band Edges Test Data CH-High

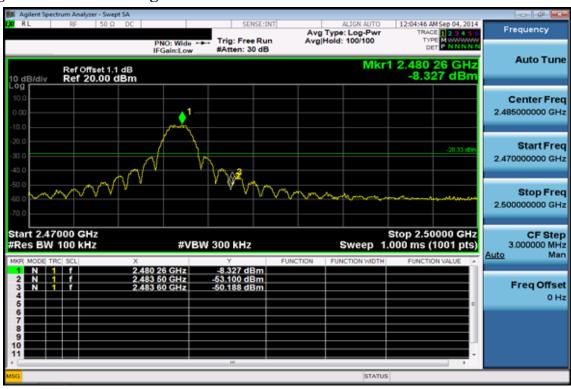

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 27 of 52

Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands)-Internal Antenna-DFZM-E7221-DT0R

:Zigbee **Test Date** :2014-09-03 **Operation Band** Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge LOW Engineer :Tin

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	E	Average	38.41	2.48	40.89	54.00	-13.11
2390.00	E	Peak	49.26	2.48	51.74	74.00	-22.26

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge LOW Engineer :Tin

EUT Pol. :E2 Plane Measurement Antenna Pol. :HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	38.55	2.48	41.03	54.00	-12.97
2390.00	E	Peak	51.85	2.48	54.33	74.00	-19.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 28 of 52

Operation Band :Zigbee Test Date :2014-09-03

:2480 MHz Fundamental Frequency Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge HIGH Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	E	Average	42.18	2.84	45.02	54.00	-8.98
2483.50	E	Peak	53.43	2.84	56.27	74.00	-17.73

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge HIGH Engineer :Tin

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	E	Average	45.51	2.84	48.35	54.00	-5.65
2483.50	E	Peak	57.14	2.84	59.98	74.00	-14.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 29 of 52

Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands)-External Antenna- DFZM-E7220-DT0R

Operation Band :Zigbee Test Date :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH

:Bandedge LOW Operation Mode Engineer :Tin

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	E	Average	39.83	2.48	42.31	54.00	-11.69
2390.00	E	Peak	52.80	2.48	55.28	74.00	-18.72

Operation Band Test Date :2014-09-03 :Zigbee Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge LOW Engineer :Tin

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	E	Average	38.54	2.48	41.02	54.00	-12.98
2390.00	E	Peak	51.13	2.48	53.61	74.00	-20.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices Office Windows States the Company in this act report of the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

台灣檢驗科技股份有限公司

www.tw.sqs.com



Report No.: ER/2014/90003 **Issue Date: Sep. 16, 2014**

Page: 30 of 52

Operation Band :Zigbee Test Date :2014-09-03

:2480 MHz Fundamental Frequency Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge HIGH Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	E	Average	49.78	2.84	52.62	54.00	-1.38
2483.50	E	Peak	61.24	2.84	64.08	74.00	-9.92

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :Bandedge HIGH Engineer :Tin

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	E	Average	44.79	2.84	47.63	54.00	-6.37
2483.50	E	Peak	55.86	2.84	58.70	74.00	-15.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 31 of 52

10 SPURIOUS EMISSION TEST

10.1 Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

10.2 Measurement Equipment Used:

10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

10.3 Test SET-UP:

10.3.1 Conducted Emission at antenna port:

Refer to section 7.3 for details.

10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24703/新北市五股區新北產業園區五工路 134 號



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 32 of 52

10.4 Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

Conducted Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- 3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- Via Software, combine 5 spans of frequency range into one plot 4
- Repeat above procedures until all default test channel measured were complete. 5.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA +	\mathbf{AF} +	CL - <i>A</i>	١G
-----------	-----------------	----------------------	----

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

10.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for elec tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

> 台灣檢驗科技股份有限公司 t (886-2) 2299-3279

SGS Taiwan Ltd.


No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488




Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 33 of 52

Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

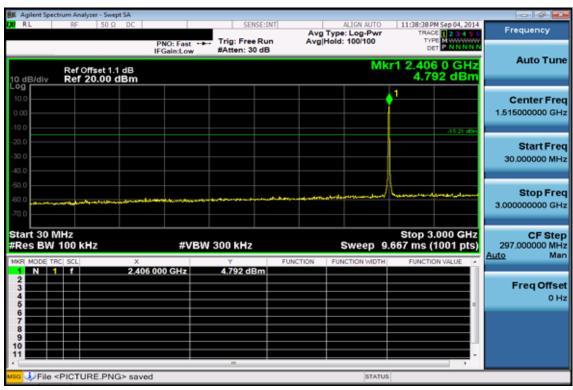

Ch Low 3GHz - 26.5GHz

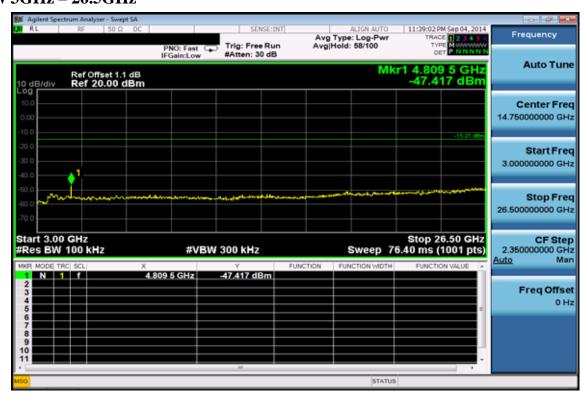

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

www.tw.sqs.com


Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 34 of 52

Ch Mid 30MHz - 3GHz

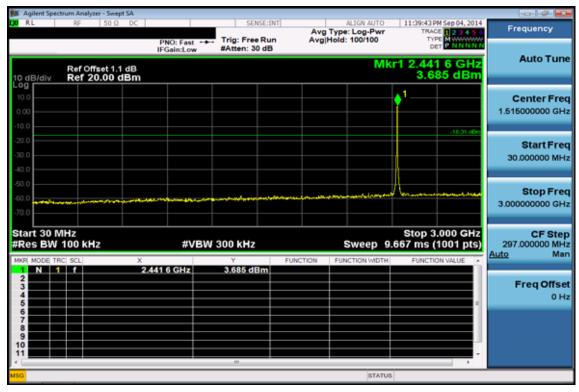

Ch Mid 3GHz - 26.5GHz

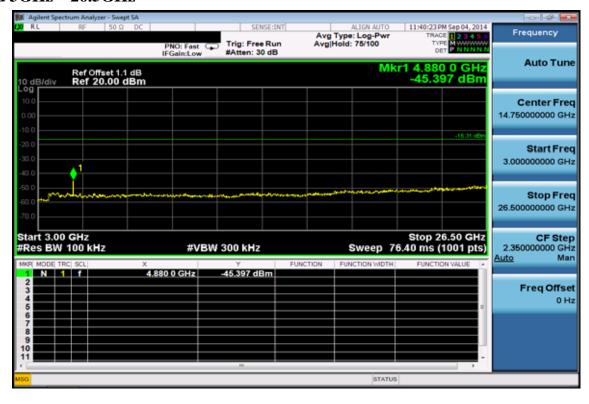

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the windows and the subject to the subj Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488

www.tw.sgs.com


Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 35 of 52

Ch High 30MHz - 3GHz

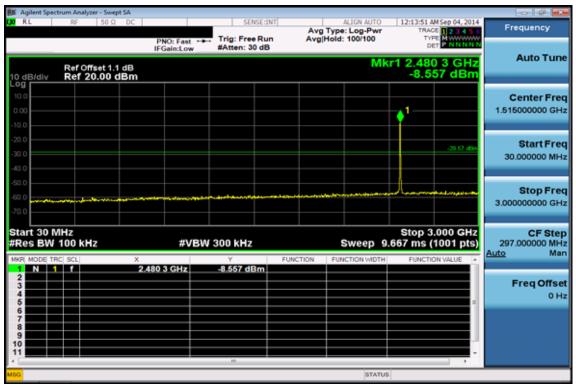

Ch High 3GHz - 26.5GHz

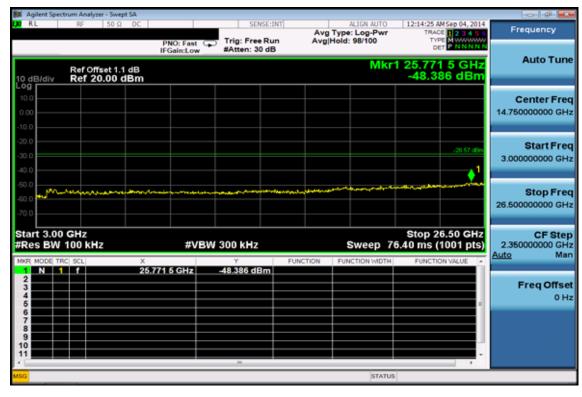

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the windows and the subject to the subj Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 36 of 52

Radiated Spurious Emission Measurement Result-Internal Antenna- DFZM-E7221-DT0R

Operation Band :Zigbee Test Date :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH

Operation Mode :TX LOW Engineer :Tin

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
44.55	S	Peak	42.71	-13.21	29.50	40.00	-10.50
157.07	S	Peak	44.90	-12.44	32.46	43.50	-11.04
313.24	S	Peak	35.42	-10.89	24.53	46.00	-21.47
499.48	S	Peak	36.17	-7.44	28.73	46.00	-17.27
666.32	S	Peak	33.71	-4.18	29.53	46.00	-16.47
960.23	S	Peak	27.33	0.36	27.69	54.00	-26.31
4810.00	Н	Average	25.88	6.79	32.67	54.00	-21.33
4810.00	Н	Peak	37.74	6.79	44.53	74.00	-29.47
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 37 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
71.71	S	Peak	34.50	-15.54	18.96	40.00	-21.04
158.04	S	Peak	44.33	-12.40	31.93	43.50	-11.57
431.58	S	Peak	34.74	-8.82	25.92	46.00	-20.08
466.50	S	Peak	29.64	-7.78	21.86	46.00	-24.14
700.27	S	Peak	34.62	-3.98	30.64	46.00	-15.36
803.09	S	Peak	29.59	-2.14	27.45	46.00	-18.55
4810.00	Н	Average	25.36	6.79	32.15	54.00	-21.85
4810.00	Н	Peak	38.05	6.79	44.84	74.00	-29.16
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 38 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2440 MHz Temp./Humi. :21 deg_C / 61 RH

Operation Mode :TX MID Engineer EUT Pol. :E2 Plane :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Measurement Antenna Pol.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
45.52	S	Peak	46.90	-13.16	33.74	40.00	-6.26
157.07	S	Peak	44.23	-12.44	31.79	43.50	-11.71
347.19	S	Peak	36.33	-10.20	26.13	46.00	-19.87
501.42	S	Peak	32.39	-7.42	24.97	46.00	-21.03
665.35	S	Peak	34.29	-4.20	30.09	46.00	-15.91
844.80	S	Peak	29.69	-1.85	27.84	46.00	-18.16
4880.00	Н	Average	25.50	6.92	32.42	54.00	-21.58
4880.00	Н	Peak	38.12	6.92	45.04	74.00	-28.96
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 39 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2440 MHz Temp./Humi. :21 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
71.71	S	Peak	34.21	-15.54	18.67	40.00	-21.33
157.07	S	Peak	44.46	-12.44	32.02	43.50	-11.48
445.16	S	Peak	39.53	-8.42	31.11	46.00	-14.89
558.65	S	Peak	28.48	-6.60	21.88	46.00	-24.12
700.27	S	Peak	33.64	-3.98	29.66	46.00	-16.34
990.30	S	Peak	26.69	0.36	27.05	54.00	-26.95
4880.00	Н	Average	25.48	6.92	32.40	54.00	-21.60
4880.00	Н	Peak	38.43	6.92	45.35	74.00	-28.65
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 40 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX HIGH Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
46.49	S	Peak	47.26	-13.11	34.15	40.00	-5.85
161.92	S	Peak	44.56	-12.45	32.11	43.50	-11.39
347.19	S	Peak	38.22	-10.20	28.02	46.00	-17.98
499.48	S	Peak	38.44	-7.44	31.00	46.00	-15.00
664.38	S	Peak	34.04	-4.23	29.81	46.00	-16.19
967.99	S	Peak	26.94	0.36	27.30	54.00	-26.70
4960.00	Н	Average	24.69	7.08	31.77	54.00	-22.23
4960.00	Н	Peak	37.24	7.08	44.32	74.00	-29.68
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to tis General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and conditions have a conditions of the first of the f Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 41 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX HIGH Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
75.59	S	Peak	36.49	-16.30	20.19	40.00	-19.81
157.07	S	Peak	44.97	-12.44	32.53	43.50	-10.97
431.58	S	Peak	34.82	-8.82	26.00	46.00	-20.00
559.62	S	Peak	29.24	-6.54	22.70	46.00	-23.30
696.39	S	Peak	33.93	-3.86	30.07	46.00	-15.93
985.45	S	Peak	26.32	0.29	26.61	54.00	-27.39
4960.00	Н	Average	24.66	7.08	31.74	54.00	-22.26
4960.00	Н	Peak	36.97	7.08	44.05	74.00	-29.95
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 42 of 52

Radiated Spurious Emission Measurement Result-External Antenna- DFZM-E7220-DT0R

Operation Band :Zigbee Test Date :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg C / 61 RH Operation Mode :TX LOW Engineer :Tin

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note: "F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
44.55	S	Peak	45.67	-13.21	32.46	40.00	-7.54
157.07	S	Peak	44.37	-12.44	31.93	43.50	-11.57
316.15	S	Peak	38.29	-10.89	27.40	46.00	-18.60
499.48	S	Peak	37.75	-7.44	30.31	46.00	-15.69
664.38	S	Peak	34.49	-4.23	30.26	46.00	-15.74
911.73	S	Peak	27.60	-0.44	27.16	46.00	-18.84
4810.00	Н	Average	30.38	6.79	37.17	54.00	-16.83
4810.00	Н	Peak	40.52	6.79	47.31	74.00	-26.69
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 43 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2405 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX LOW Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
74.62	S	Peak	34.92	-16.11	18.81	40.00	-21.19
159.01	S	Peak	44.43	-12.37	32.06	43.50	-11.44
431.58	S	Peak	35.78	-8.82	26.96	46.00	-19.04
547.01	S	Peak	29.66	-7.26	22.40	46.00	-23.60
696.39	S	Peak	34.38	-3.86	30.52	46.00	-15.48
952.47	S	Peak	27.07	0.29	27.36	46.00	-18.64
4810.00	Н	Average	26.01	6.79	32.80	54.00	-21.20
4810.00	Н	Peak	37.63	6.79	44.42	74.00	-29.58
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 44 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2440 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX MID Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
69.77	S	Peak	46.99	-15.17	31.82	40.00	-8.18
157.07	S	Peak	44.97	-12.44	32.53	43.50	-10.97
316.15	S	Peak	37.74	-10.89	26.85	46.00	-19.15
500.45	S	Peak	31.71	-7.42	24.29	46.00	-21.71
664.38	S	Peak	33.33	-4.23	29.10	46.00	-16.90
947.62	S	Peak	27.03	0.25	27.28	46.00	-18.72
4880.00	Н	Average	28.37	6.92	35.29	54.00	-18.71
4880.00	Н	Peak	39.26	6.92	46.18	74.00	-27.82
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 45 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2440 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX MID Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
71.71	S	Peak	34.67	-15.54	19.13	40.00	-20.87
158.04	S	Peak	44.68	-12.40	32.28	43.50	-11.22
431.58	S	Peak	34.59	-8.82	25.77	46.00	-20.23
498.51	S	Peak	30.94	-7.46	23.48	46.00	-22.52
700.27	S	Peak	33.76	-3.98	29.78	46.00	-16.22
947.62	S	Peak	27.52	0.25	27.77	46.00	-18.23
4880.00	Н	Average	25.18	6.92	32.10	54.00	-21.90
4880.00	Н	Peak	37.79	6.92	44.71	74.00	-29.29
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 46 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX HIGH Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
44.55	S	Peak	42.31	-13.21	29.10	40.00	-10.90
157.07	S	Peak	44.77	-12.44	32.33	43.50	-11.17
315.18	S	Peak	37.04	-10.89	26.15	46.00	-19.85
499.48	S	Peak	31.33	-7.44	23.89	46.00	-22.11
665.35	S	Peak	34.16	-4.20	29.96	46.00	-16.04
957.32	S	Peak	26.89	0.33	27.22	46.00	-18.78
4960.00	Н	Average	27.53	7.08	34.61	54.00	-19.39
4960.00	Н	Peak	39.46	7.08	46.54	74.00	-27.46
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 47 of 52

Operation Band :Zigbee **Test Date** :2014-09-03

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH Operation Mode :TX HIGH Engineer

EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
76.56	S	Peak	35.61	-16.47	19.14	40.00	-20.86
158.04	S	Peak	42.22	-12.40	29.82	43.50	-13.68
431.58	S	Peak	34.50	-8.82	25.68	46.00	-20.32
497.54	S	Peak	29.62	-7.46	22.16	46.00	-23.84
700.27	S	Peak	34.44	-3.98	30.46	46.00	-15.54
943.74	S	Peak	27.17	0.19	27.36	46.00	-18.64
4960.00	Н	Average	24.57	7.08	31.65	54.00	-22.35
4960.00	Н	Peak	37.26	7.08	44.34	74.00	-29.66
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices other wind an arrive of the states of the state Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 48 of 52

11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Measurement Equipment Used:

Refer to section 7.2 for details.

11.3 Test Set-up:

Refer to section 7.3 for details.

11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW \geq 3 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 49 of 52

11.5 Measurement Result:

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2405	-6.782	8
2440	-6.512	8
2480	-19.120	8

* Note: Offset 1.1dB


*Refer to next page for plots

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 50 of 52

Power Spectral Density Test Plot (CH-Low)

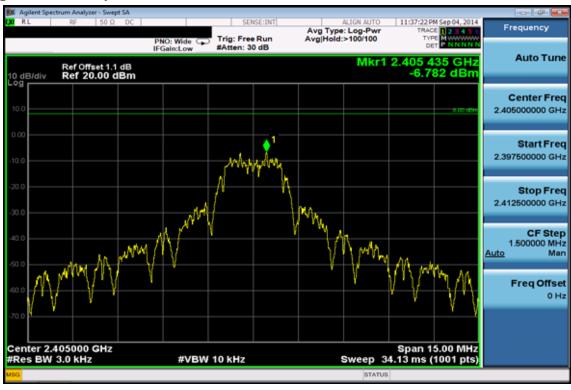

Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for so days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for electronic format document, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and the windows and the subject to the subj Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

台灣檢驗科技股份有限公司

www.tw.sgs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 51 of 52

Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

www.tw.sqs.com



Report No.: ER/2014/90003 Issue Date: Sep. 16, 2014

Page: 52 of 52

12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

12.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is Dipole antenna: 2.00dBi and Printed antenna: 0.68dBi. In addition, the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。