

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	ZigBee Module		
Brand Name:	N/A		
Model No.:	DFZM-E8211-DT0R, DFZM-E8210-DT0R		
Model Difference:	DFZM-E8211-DT0R use build-in antenna & DFZM-E8210-DT0R use external antenna		
FCC ID:	H79DFZM-E8210		
Report No.:	ER/2014/10094		
Issue Date:	Jun. 30, 2014		
FCC Rule Part:	§15.247, Cat: DTS		
Prepared for:	Delta Electronics 3 Tungyan Road, Chungli Industrial Zone, Taoyuan County 32063 Taiwan		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24703		
TAF DEC-MRA Testing Laboratory 0513	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	Delta Electronics 3 Tungyan Road, Chungli Industrial Zone, Taoyuan County 32063
Product Name:	Taiwan ZigBee Module
Brand Name:	N/A
Model No.:	DFZM-E8211-DT0R, DFZM-E8210-DT0R
Model Difference:	DFZM-E8211-DT0R use build-in antenna & DFZM-E8210-DT0R use external antenna
FCC ID:	H79DFZM-E8210
File Number:	ER/2014/10094
Date of test:	Feb. 14, 2014 ~ Jun. 23, 2014
Date of EUT Received:	Feb. 14, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	JJ (hen	Date	Jun. 30, 2014	
Prepared By:	JJ Chen / Er Judy	ngineer Hfn	Date	Jun. 30, 2014	
Approved By:	Judy Hsu / Jim Chang / St	h ang	Date	Jun. 30, 2014	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Version

Version No.	Date	Description
00	Jun. 30, 2014	Initial creation of document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134號



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 4 of 53

Table of Contents

1	GEN	ERAL INFORMATION	6
	1.1	Product description	6
	1.2	Related Submittal(s) / Grant (s)	7
	1.3	Test Methodology	7
	1.4	Test Facility	7
	1.5	Special Accessories	7
	1.6	Equipment Modifications	7
2	SYST	TEM TEST CONFIGURATION	8
	2.1	EUT Configuration	8
	2.2	EUT Exercise	8
	2.3	Test Procedure	8
	2.4	Configuration of Tested System	9
3	SUM	MARY OF TEST RESULTS	10
4	DES	CRIPTION OF TEST MODES	10
5	MEA	SUREMENT UNCERTAINTY	.11
6	CON	DUCTED EMISSION TEST	12
	6.1	Standard Applicable:	.12
	6.2	Measurement Equipment Used:	.12
	6.3	EUT Setup:	.12
	6.4	Test SET-UP (Block Diagram of Configuration)	.13
	6.5	Measurement Procedure:	.13
	6.6	Measurement Result:	.13
7	PEA	K OUTPUT POWER MEASUREMENT	14
	7.1	Standard Applicable:	
	7.2	Measurement Equipment Used:	.14
	7.3	Test Set-up:	.15
	7.4	Measurement Procedure:	.15
	7.5	Measurement Result:	.17
8	6dB	BANDWIDTH	18
	8.1	Standard Applicable:	.18
	8.2	Measurement Equipment Used:	.18
	8.3	Test Set-up:	.19
	8.4	Measurement Procedure:	.19
	8.5	Measurement Result:	.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134號



9	BAN	D EDGES MEASUREMENT	
	9.1	Standard Applicable:	22
	9.2	Measurement Equipment Used:	22
	9.3	Test SET-UP:	24
	9.4	Measurement Procedure:	25
	9.5	Field Strength Calculation:	26
	9.6	Measurement Result:	26
10	SPUF	RIOUS EMISSION TEST	
	10.1	Standard Applicable	32
	10.2	Measurement Equipment Used:	32
	10.3	Test SET-UP:	32
	10.4	Measurement Procedure:	33
	10.5	Field Strength Calculation	33
	10.6	Measurement Result:	33
11	PEAI	X POWER SPECTRAL DENSITY	
	11.1	Standard Applicable:	
	11.2	Measurement Equipment Used:	49
	11.3	Test Set-up:	49
	11.4	Measurement Procedure (following the measurement procedure 10.2 of KDB558074):	49
	11.5	Measurement Result:	50
12	ANTI	ENNA REQUIREMENT	
	12.1	Standard Applicable:	
	12.2	Antenna Connected Construction:	53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134號



1 **GENERAL INFORMATION**

Product description 1.1

General:

Product Name:	ZigBee Module
Brand Name:	NA
Model No.:	DFZM-E8211-DT0R, DFZM-E8210-DT0R
Model Difference:	DFZM-E8211-DT0R use build-in antenna & DFZM-E8210-DT0R use external antenna
Hardware Version:	N/A
Software Version:	N/A
Power Supply:	3.3Vdc from power supply
Operation Frequency:	2405~2480MHz
Channel number:	16 channels
Channel Spacing:	5MHz
Modulation Type:	O-QPSK
Rated Power:	19.25dBm (Peak)
Antenna Designation:	External: Dipole Antenna: 2.00dBi, Product No.: AR007WSW01A03 Internal: Printed Antenna: 0.68dBi, Model No.: DFZM-E8210-DT0R

The EUT is in compliance with FCC §15.247.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the fulle at vent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>H79DFZM-E8210</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with Subpart B under the DoC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Apr 2013 KDB558074 D01 V03 for compliance to FCC 47CFR 15.247 requirements.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. FCC Registration Number: 455997.

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to \$15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009,

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.4 **Configuration of Tested System**

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	DELL	E5400	3704625136	shielding	Un-shielding
3.	DC Power Supply	HP	E3640A	MY40005907	shielding	Un-shielding

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



FCC Rules Description Of Test		Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

SUMMARY OF TEST RESULTS 3

DESCRIPTION OF TEST MODES 4

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2405MHz) · mid (2440MHz) and high (2480MHz) with highest data rate are chosen for full testing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 **MEASUREMENT UNCERTAINTY**

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.55dB (for Spectrum) +/- 1.42 dB (for Power Meter)
6dB Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Peak Power Density	+/- 1.55 dB
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clearly intervention. Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134號



6 **CONDUCTED EMISSION TEST**

6.1 **Standard Applicable:**

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)						
MHz	Quasi-peak	Average					
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56	46					
5 to 30	60	50					
Note							
1. The lower limit shall apply at the transition frequencies							

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

Measurement Equipment Used: 6.2

Conducted Emission Test Site								
EQUIPMENT	EQUIPMENT MFR		SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015			
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015			
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015			
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014			

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4 Test SET-UP (Block Diagram of Configuration)

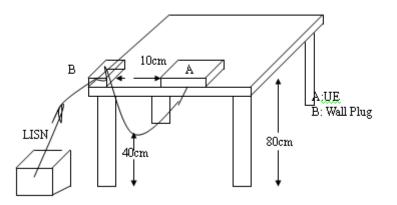

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

N/A, EUT powered from DC Power Supply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015			
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015			
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2013	05/18/2014			
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2013	03/07/2014			
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2013	02/26/2014			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015			
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2013	02/26/2014			
Splitter	Agilent	11636B	N/A	02/27/2013	02/26/2014			

7.2 Measurement Equipment Used:

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015			
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015			
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015			
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015			
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015			

Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.

7.3 Test Set-up:



7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto. Setting on spectrum is adjusted based on the mandatory procedure in 9.1.2 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.1.3 in KDB558074 is followed.

(Avg. power setting on Spectrum: Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

- 3. Record the max. Reading as observed from Spectrum or Power Meter.
- 4. Repeat above procedures until all frequency of interest measured was complete.
- 5. For MIMO operation, measurement is done per chain basis, and then sum the simultaneous transmitting output in linear.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Pre-anaysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, resulted as obtained below, and showed only the most representative ones Tabular results as indicates below entails the results of duty factor for all supported modes.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Test Procedure:

Set span = 0, RBW = 1MHz, VBW = 3MHz, Detector = Peak Duty Cycle:

Duty Cycle	Duty Factor (dBm)
0.99	0.0

Duty Factor:

		alyzer - Swept											
L XI RL	RF	50 Ω	DC	PNO: Fast		Trig: Free			Log-Pwr	TRA	AM Jun 05, 201 CE 1 2 3 4 5 /PE WWWW	6 ₩	Frequency
10 dB/div	Ref (Ref	Offset 11 30.00 d	dB Bm	IFGain:Lov		#Atten: 30) dB			Mkr1 7	9.00 m 16 dBn		Auto Tune
20.0 10.0									\	1			Center Fred 2.405000000 GHz
-10.0 -20.0 -30.0													Start Fred 2.405000000 GH:
-40.0 -50.0 -60.0													Stop Fred 2.405000000 GH
Center 2.4 Res BW 8	MHz		Hz	#\	/BW S	B.0 MHz		FUNCTION	weep 1	00.0 ms	Span 0 H (1001 pts)	CF Step 8.000000 MH: <u>Auto</u> Mar
1 N 1 2 3 4 5				79.00 ms		19.16 dE	3m					=	Freq Offse 0 H;
6 7 8 9 10 11												•	
MSG						III			 STATUS	5	•		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 **Measurement Result:**

Frequency (MHz)	Peak Power Output (dBm)	Required Limit
2405	19.25	1 Watt = 30 dBm
2440	19.24	1 Watt = 30 dBm
2480	-4.21	1 Watt = 30 dBm

- * Note:
- 1. The duty cycle factor is compensated back to obtain the maximum value of the measurement in average.
- 2. Measured by power meter, cable loss as 11dB that offsets on the power meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clearly intervention. Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8 **6dB BANDWIDTH**

8.1 **Standard Applicable:**

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

8.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015		
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015		
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2013	05/18/2014		
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2013	03/07/2014		
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2013	02/26/2014		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015		
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2013	02/26/2014		
Splitter	Agilent	11636B	N/A	02/27/2013	02/26/2014		

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015			
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015			
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015			
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015			
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015			

Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

たかうかすが、いれてきる本体的の意味がある。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Test Set-up: 8.3



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 10M, Detector=Peak,

Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.

- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency of interest measured was complete.

8.5 **Measurement Result:**

Frequency	Bandwidth	Limit	Result
(MHz)	(kHz)	(kHz)	
2405	1619	> 500	PASS
2440	1645	> 500	PASS
2480	1619	> 500	PASS

* Note: Offset 11dB


*Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


時非另有説明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90.tr。本報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6dB Band Width Test Data CH-Low

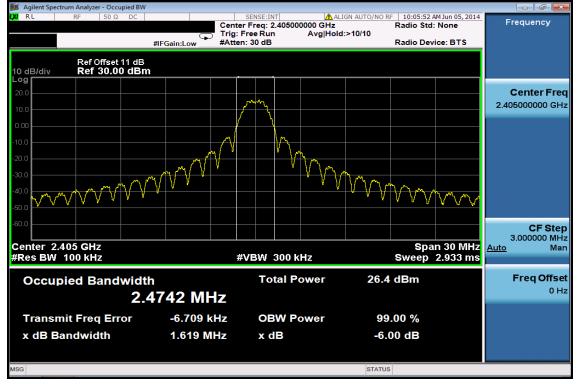

6dB Band Width Test Data CH-Mid

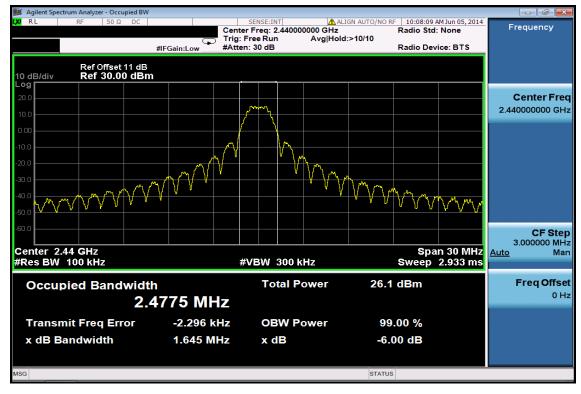


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Contest States the states are results and the states are results are results and the states are results ar tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

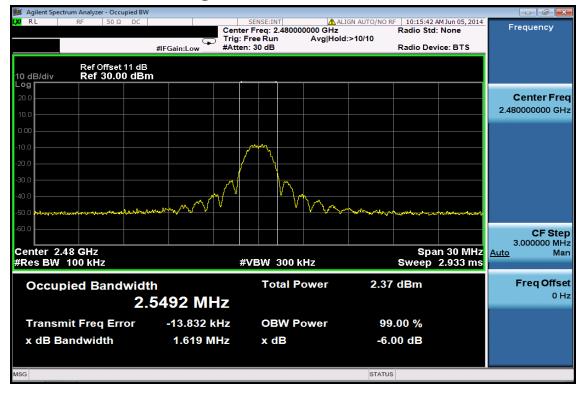

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9 BAND EDGES MEASUREMENT

9.1 Standard Applicable:

According to \$15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in \$15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

9.2.2 Radiated emission:

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/26/2013	05/25/2014			
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2013	05/18/2014			
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015			
Spectrum Analyzer	R&S	FSV-30	101398	10/22/2013	10/21/2014			
Loop Antenna	ETS.LINDGREN	6502	00148045	07/05/2013	07/04/2014			
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/01/2015			
Horn antenna	ETS.LINDGREN	3117	123995	05/19/2013	05/18/2014			
Horn Antenna	Schwarzbeck	BBHA9170	184	01/23/2014	01/22/2015			
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015			
Pre-Amplifier	Agilent	8449B	3008A00578	01/03/2014	01/02/2015			
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/24/2014	01/23/2015			
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/27/2013	02/26/2014			
Attenuator	Mini-Circuit	BW-S10W2+	004	02/27/2013	02/26/2014			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015			
3m Site NSA	SGS	966 chamber	N/A	07/15/2013	07/14/2014			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015			
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015			
Horn antenna	ETS.LINDGREN	3117	123995	05/19/2014	05/18/2015			
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/27/2014	02/26/2015			
Attenuator	Mini-Circuit	BW-S10W2+	004	02/27/2014	02/26/2015			


Note: The measurement was taken place with the long duration of the time, and additional equipment list as shown above indicate those equipment of which has been subject to undertake the calibration in intermediate period of time of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clearly intervention. Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




9.3 **Test SET-UP:**

9.3.1 **Conducted Emission at antenna port:**




9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

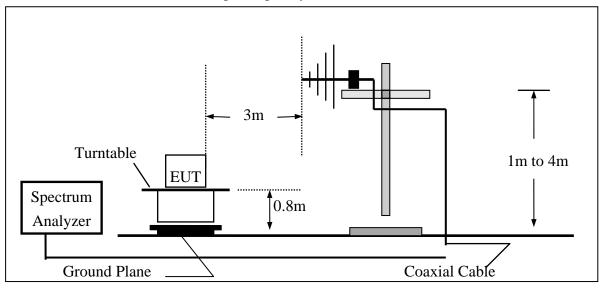

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

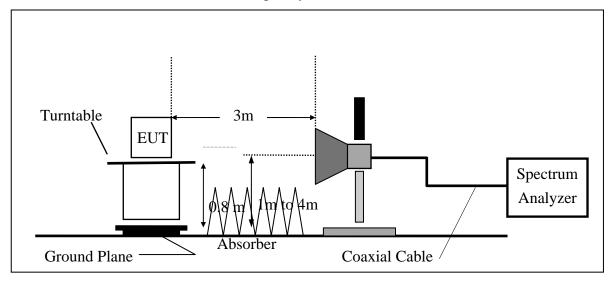

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
- 5. Mark the highest reading of the emission as the reference level measurement.
- 6. Set DL as the limit = reading on marker 1 20dBm
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074 D01

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3.EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7.On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.5 **Field Strength Calculation:**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.6 **Measurement Result:**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Unwanted Emissions into Non-Restricted Frequency Bands Band Edges Test Data CH-Low

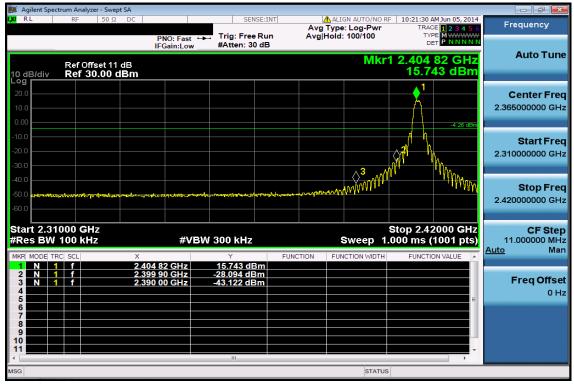

Band Edges Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs So therwise stated the results shown in this test report refer only to the sample(s) tested and social after feature for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands)-Internal Antenna-DFZM-E8210-DT0R						
Operation Band	:2.4G	Test Date	:2014-06-04			
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH			
Operation Mode	:Bandedge LOW	Engineer	:Curry			
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL			

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	45.44	2.42	47.86	54.00	-6.14
2390.00	E	Peak	56.71	2.42	59.13	74.00	-14.87

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	47.20	2.42	49.62	54.00	-4.38
2390.00	E	Peak	58.05	2.42	60.47	74.00	-13.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 29 of 53

Operation Band	:2.4G	Test Date	:2014-06-05
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	48.56	2.74	51.30	54.00	-2.70
2483.50	E	Peak	60.41	2.74	63.15	74.00	-10.85

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	49.89	2.74	52.63	54.00	-1.37
2483.50	E	Peak	61.73	2.74	64.47	74.00	-9.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Emission:

(Unwanted Emissions into Restricted Frequency Bands)-External Antenna-DFZM-E7210-DT0R						
Operation Band	:2.4G	Test Date	:2014-06-04			
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH			
Operation Mode	:Bandedge LOW	Engineer	:Curry			
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL			

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	45.24	2.42	47.66	54.00	-6.34
2390.00	E	Peak	56.71	2.42	59.13	74.00	-14.87

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge LOW	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	40.67	2.42	43.09	54.00	-10.91
2390.00	E	Peak	53.26	2.42	55.68	74.00	-18.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Fine Solution in the Solution in the Solution in the Solution of the Solution Solution Solution (Solution Solution) (Fine S tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 31 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	47.21	2.74	49.95	54.00	-4.05
2483.50	E	Peak	59.37	2.74	62.11	74.00	-11.89

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:Bandedge HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	41.57	2.74	44.31	54.00	-9.69
2483.50	E	Peak	53.68	2.74	56.42	74.00	-17.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10 SPURIOUS EMISSION TEST 10.1 Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

10.2 Measurement Equipment Used:

10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

10.3 Test SET-UP:

10.3.1 Conducted Emission at antenna port:

Refer to section 7.3 for details.

10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 7. Repeat above procedures until all default test channel measured were complete.

Conducted Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
- 4. Via Software, combine 5 spans of frequency range into one plot
- 5. Repeat above procedures until all default test channel measured were complete.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

	$\mathbf{F}\mathbf{D} = \mathbf{K}\mathbf{A} + \mathbf{A}\mathbf{F} + \mathbf{C}\mathbf{L} - \mathbf{A}\mathbf{U}$	
Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

FS = RA + AF + CL - AG

10.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

🝺 Agilent Spectrum Analyzer - Swept S	4				
<mark>() //</mark> RL RF 50 Ω I			ALIGN AUTO/NO RF 10: Type: Log-Pwr g Hold:>100/100	53:57 AM Jun 05, 2014 TRACE 1 2 3 4 5 6 TYPE M WWWWW	Frequency
Ref Offset 11 di 10 dB/div Ref 20.00 dB	IFGain:Low #Atte	en: 30 dB	Mkr1 2	.406 0 GHz 5.970 dBm	Auto Tune
10.0 0.00 -10.0				-4.U3 aBm	Center Freq 1.515000000 GHz
-20.0				~~///~/~~/~/~/~/~	Start Freq 30.000000 MHz
-50.0					Stop Freq 3.000000000 GHz
Start 30 MHz #Res BW 100 kHz	#VBW 300 I		Sweep 9.667		CF Step 297.000000 MHz Auto Man
MKR MODE TRC SCL 1 N 1 f 2 3 - - 3 - - - 5 - - - 6 - - - 7 - - - 8 - - - 9 - - - 10 - - - 11 - - - -	х ү 2.406 0 GHz 15.97	70 dBm	FUNCTION WIDTH F	UNCTION VALUE	Freq Offset 0 Hz
MSG			STATUS	Þ	

Ch Low 3GHz - 26.5GHz

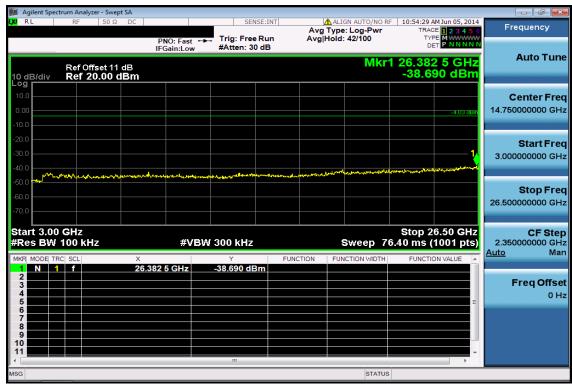


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms</u> and conditions of leability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Ch Mid 30MHz - 3GHz

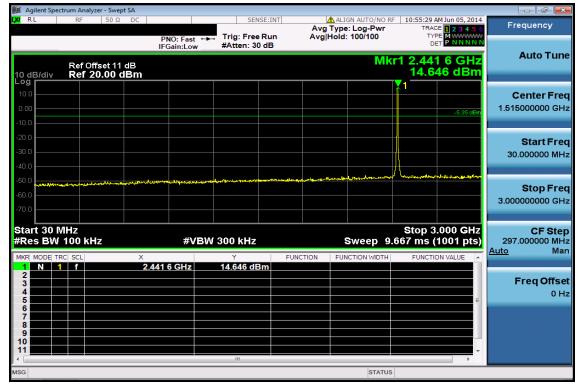

Ch Mid 3GHz – 26.5GHz


Ref Offset 11 dB WKT 120.889 0 GHz 10 dB/div Ref 20.00 dBm -38.684 dBm 20 dB/div Ref 20.60 dBm -38.684 dBm 20 dB/div Ref 20.80 dBm -38.684 dBm 20 dB/div -38.68	💓 Agilent Spectrum Analyzer - Swept SA				
Important model Marten: 30 dB Marten: 30 dB Marten: 25.889 0 GHz Auto Tune 10 dB/div Ref Offset11 dB -38.684 dBm -38.684 dBm -38.684 dBm 14.75000000 GHz 10 dB/div Ref 20.00 dBm -39.684 dBm -39.684 dBm -39.684 dBm 14.75000000 GHz 10 dB/div Ref 20.00 dBm -39.684 dBm -39.684 dBm -39.684 dBm -39.684 dBm 10 dB/div Ref 20.00 dBm -39.684 dBm -39.684 dBm -39.684 dBm -39.684 dBm 10 dB/div	LXI RL RF 50Ω DC		Avg Type: Log-Pv	Vr TRACE 1 2 3 4 5 6	Frequency
100	10 dB/div Ref 20.00 dBm	FIG. Fast) dB	ьет Р NNNNN kr1 25.889 0 GHz	Auto Tune
30.0	0.00			-5.35 dBm	
60.0 Image: Construction of the construc	-30.0		مر المربوب	normerlanser and the second second	
#Res BW 100 kHz #VBW 300 kHz Sweep 76.40 ms (1001 pts) MKR MODE TC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 25.889 0 GHz -33.634 dBm Freq Offset 3 - - - - - - 3 - - - - - - 4 - - - - - - 5 - - - - - - 6 - - - - - - 7 - - - - - - 8 - - - - - - 10 - - - - - - 11 - - - - - -	-50.0				
2 3 5 <td>#Res BW 100 kHz</td> <td>Y</td> <td>FUNCTION FUNCTION WIE</td> <td>76.40 ms (1001 pts)</td> <td>2.350000000 GHz</td>	#Res BW 100 kHz	Y	FUNCTION FUNCTION WIE	76.40 ms (1001 pts)	2.350000000 GHz
	2 3 4 5			E	Freq Offset 0 Hz
	7 8 9 9 9 9 10 10 10 10 10 10 10 10 10 10 10 10 10				
	MSG	m	STA		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Ch High 30MHz - 3GHz

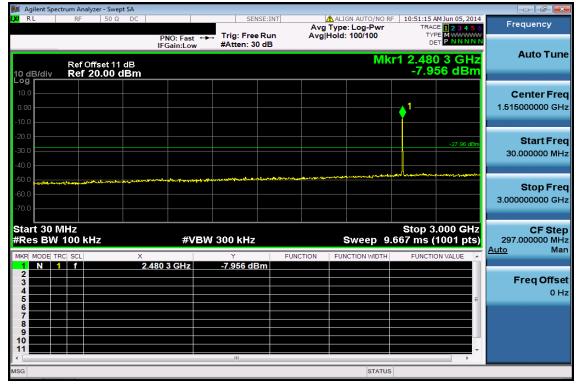

Ch High 3GHz - 26.5GHz

	ctrum Analyze									
LXI RL	RF	50 Ω DC				ALIGN AU Avg Type: Log Vg Hold: 100/	g-Pwr	10:52:10 AM Jun (TRACE 1 2 TYPE MW	3456	Frequency
10 dB/div		set 11 dB).00 dBm	PNO: Fast IFGain:Low				Mkr1 2	25.842 0 -38.117 c	GHz	Auto Tune
10.0 0.00 -10.0										Center Freq 14.750000000 GHz
-20.0 -30.0 -40.0	مراجع مراجع		Annerington Advertis		چې ^{ري} بېرې وارو او ور	And a	icetury and a first a		. <u>96</u> cm 1	Start Freq 3.000000000 GHz
-50.0										Stop Freq 26.500000000 GHz
Start 3.00 #Res BW	100 kH	Х		'BW 300 kHz	FUNCTIO		ep 76.4	Stop 26.50 0 ms (1001 FUNCTION VAL	pts)	CF Step 2.350000000 GHz <u>Auto</u> Man
1 N 4 2 3 3 4 5 6 7 7 8 9 10 11		25.	842 0 GHz	-38.117 dB						Freq Offset 0 Hz
MSG							STATUS			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Spurious Emission Measurement Result-Internal Antenna-DFZM-E8210-DT0R Operation Band :2014-06-04 :2.4G Test Date **Fundamental Frequency** :2405 MHz Temp./Humi. :20.8 deg_C / 52 RH **Operation Mode** :TX LOW Engineer :Curry EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	49.14	-13.97	35.17	40.00	-4.83
89.17	S	Peak	44.55	-18.86	25.69	43.50	-17.81
319.06	S	Peak	41.20	-10.98	30.22	46.00	-15.78
499.48	S	Peak	39.17	-7.54	31.63	46.00	-14.37
696.39	S	Peak	29.61	-3.94	25.67	46.00	-20.33
799.21	S	Peak	36.87	-2.31	34.56	46.00	-11.44
4810.00	Н	Average	41.68	6.82	48.50	54.00	-5.50
4810.00	Н	Peak	45.39	6.82	52.21	74.00	-21.79
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 38 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
54.25	S	Peak	39.03	-13.22	25.81	40.00	-14.19
145.43	S	Peak	41.35	-12.95	28.40	43.50	-15.10
304.51	S	Peak	38.20	-11.13	27.07	46.00	-18.93
480.08	S	Peak	36.13	-7.75	28.38	46.00	-17.62
696.39	S	Peak	33.27	-3.94	29.33	46.00	-16.67
798.24	S	Peak	35.49	-2.33	33.16	46.00	-12.84
4810.00	Н	Average	39.82	6.82	46.64	54.00	-7.36
4810.00	Н	Peak	42.03	6.82	48.85	74.00	-25.15
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 39 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2440 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	48.34	-13.97	34.37	40.00	-5.63
111.48	S	Peak	40.24	-15.88	24.36	43.50	-19.14
270.56	S	Peak	41.30	-11.93	29.37	46.00	-16.63
498.51	S	Peak	35.74	-7.56	28.18	46.00	-17.82
696.39	S	Peak	29.68	-3.94	25.74	46.00	-20.26
796.30	S	Peak	34.24	-2.38	31.86	46.00	-14.14
4880.00	Н	Average	39.75	6.95	46.70	54.00	-7.30
4880.00	Н	Peak	48.97	6.95	55.92	74.00	-18.08
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 40 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2440 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
144.46	S	Peak	41.81	-12.99	28.82	43.50	-14.68
209.45	S	Peak	43.69	-15.04	28.65	43.50	-14.85
313.24	S	Peak	39.66	-10.99	28.67	46.00	-17.33
480.08	S	Peak	35.22	-7.75	27.47	46.00	-18.53
696.39	S	Peak	32.79	-3.94	28.85	46.00	-17.15
797.27	S	Peak	35.61	-2.35	33.26	46.00	-12.74
4880.00	Н	Average	37.42	6.95	44.37	54.00	-9.63
4880.00	Н	Peak	41.44	6.95	48.39	74.00	-25.61
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 41 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	47.70	-13.97	33.73	40.00	-6.27
92.08	S	Peak	46.16	-18.75	27.41	43.50	-16.09
271.53	S	Peak	41.08	-11.89	29.19	46.00	-16.81
499.48	S	Peak	37.94	-7.54	30.40	46.00	-15.60
666.32	S	Peak	30.20	-4.14	26.06	46.00	-19.94
799.21	S	Peak	37.25	-2.31	34.94	46.00	-11.06
4960.00	Н	Average	24.66	7.09	31.75	54.00	-22.25
4960.00	Н	Peak	37.13	7.09	44.22	74.00	-29.78
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 42 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	37.63	-13.39	24.24	40.00	-15.76
144.46	S	Peak	42.50	-12.99	29.51	43.50	-13.99
319.06	S	Peak	38.02	-10.98	27.04	46.00	-18.96
480.08	S	Peak	36.07	-7.75	28.32	46.00	-17.68
576.11	S	Peak	32.34	-5.49	26.85	46.00	-19.15
799.21	S	Peak	35.48	-2.31	33.17	46.00	-12.83
4960.00	Н	Average	24.56	7.09	31.65	54.00	-22.35
4960.00	Н	Peak	37.51	7.09	44.60	74.00	-29.40
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						



Radiated Spurious Emission Measurement Result-External Antenna-DFZM-E7210-DT0R Test Date **Operation Band** :2014-06-04 :2.4G Fundamental Frequency :2405 MHz Temp./Humi. :20.8 deg_C / 52 RH **Operation Mode** :TX LOW Engineer :Curry EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol. Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	49.21	-13.97	35.24	40.00	-4.76
268.62	S	Peak	42.49	-12.04	30.45	46.00	-15.55
398.60	S	Peak	34.76	-9.19	25.57	46.00	-20.43
499.48	S	Peak	34.83	-7.54	27.29	46.00	-18.71
696.39	S	Peak	31.96	-3.94	28.02	46.00	-17.98
799.21	S	Peak	36.23	-2.31	33.92	46.00	-12.08
4810.00	Н	Average	38.70	6.82	45.52	54.00	-8.48
4810.00	Н	Peak	47.80	6.82	54.62	74.00	-19.38
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 44 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2405 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX LOW	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
57.16	S	Peak	39.76	-13.41	26.35	40.00	-13.65
144.46	S	Peak	42.59	-12.99	29.60	43.50	-13.90
320.03	S	Peak	39.86	-10.97	28.89	46.00	-17.11
480.08	S	Peak	35.43	-7.75	27.68	46.00	-18.32
696.39	S	Peak	29.93	-3.94	25.99	46.00	-20.01
798.24	S	Peak	33.93	-2.33	31.60	46.00	-14.40
4810.00	Н	Average	32.86	6.82	39.68	54.00	-14.32
4810.00	Н	Peak	40.56	6.82	47.38	74.00	-26.62
7215.00	Н						
9620.00	Н						
12025.00	Н						
14430.00	Н						
16835.00	Н						
19240.00	Н						
21645.00	Н						
24050.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 45 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2440 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	50.36	-13.97	36.39	40.00	-3.61
273.47	S	Peak	42.14	-11.81	30.33	46.00	-15.67
398.60	S	Peak	35.50	-9.19	26.31	46.00	-19.69
499.48	S	Peak	38.13	-7.54	30.59	46.00	-15.41
696.39	S	Peak	30.93	-3.94	26.99	46.00	-19.01
799.21	S	Peak	38.47	-2.31	36.16	46.00	-9.84
4880.00	Н	Average	40.67	6.95	47.62	54.00	-6.38
4880.00	Н	Peak	50.03	6.95	56.98	74.00	-17.02
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 46 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2440 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX MID	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
40.67	S	Peak	39.55	-13.39	26.16	40.00	-13.84
144.46	S	Peak	44.12	-12.99	31.13	43.50	-12.37
318.09	S	Peak	43.12	-10.98	32.14	46.00	-13.86
480.08	S	Peak	35.76	-7.75	28.01	46.00	-17.99
696.39	S	Peak	30.76	-3.94	26.82	46.00	-19.18
797.27	S	Peak	34.53	-2.35	32.18	46.00	-13.82
4880.00	Н	Average	34.84	6.95	41.79	54.00	-12.21
4880.00	Н	Peak	43.84	6.95	50.79	74.00	-23.21
7320.00	Н						
9760.00	Н						
12200.00	Н						
14640.00	Н						
17080.00	Н						
19520.00	Н						
21960.00	Н						
24400.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 47 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
62.01	S	Peak	50.71	-13.97	36.74	40.00	-3.26
87.23	S	Peak	48.13	-18.50	29.63	40.00	-10.37
280.26	S	Peak	43.77	-11.52	32.25	46.00	-13.75
499.48	S	Peak	37.64	-7.54	30.10	46.00	-15.90
696.39	S	Peak	31.11	-3.94	27.17	46.00	-18.83
799.21	S	Peak	38.01	-2.31	35.70	46.00	-10.30
4960.00	Н	Average	24.42	7.09	31.51	54.00	-22.49
4960.00	Н	Peak	36.62	7.09	43.71	74.00	-30.29
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						



Report No.: ER/2014/10094 Issue Date: Jun. 30, 2014 Page: 48 of 53

Operation Band	:2.4G	Test Date	:2014-06-04
Fundamental Frequency	:2480 MHz	Temp./Humi.	:20.8 deg_C / 52 RH
Operation Mode	:TX HIGH	Engineer	:Curry
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre_Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
39.70	S	Peak	39.71	-13.45	26.26	40.00	-13.74
144.46	S	Peak	42.60	-12.99	29.61	43.50	-13.89
320.03	S	Peak	40.90	-10.97	29.93	46.00	-16.07
480.08	S	Peak	35.13	-7.75	27.38	46.00	-18.62
696.39	S	Peak	31.19	-3.94	27.25	46.00	-18.75
798.24	S	Peak	34.08	-2.33	31.75	46.00	-14.25
4960.00	Н	Average	24.29	7.09	31.38	54.00	-22.62
4960.00	Н	Peak	37.11	7.09	44.20	74.00	-29.80
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						



11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Measurement Equipment Used:

Refer to section 7.2 for details.

11.3 Test Set-up:

Refer to section 7.3 for details.

11.4 Measurement Procedure (following the measurement procedure 10.2 of KDB558074):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS channel bandwidth.
- 3. Set the RBW \geq 3 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.5 Measurement Result:

Frequency	RF Power Density	Maximum Limit
MHz	Reading (dBm)	(dBm)
2405	3.948	8
2440	3.579	8
2480	-19.899	8

* Note: Offset 11dB

*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defineders may be prosecuted to the fulleat extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24703/新北市五股區新北產業園區五工路 134號



12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

12.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is External antenna: 2.00dBi and Printed antenna: 0.68dBi. In addition, the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and set of the formation of the set of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law