

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Product Name:	zigBee module
Brand Name:	Delta
Marketing Name:	N/A
Model No.:	DFZM-TT211-DT0R, DFZM-TT210-DT0R
Model Difference:	Build-in Antenna & External Antenna
FCC ID:	H79DFZM-TT211
Report No.:	E2/2016/10076
Issue Date:	Mar. 28, 2016
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	Delta Electronics, Inc. 252 Shangying Road, Guishan Industrial Zone, Taoyuan County 33341, Taiwan, R.O.C.
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Indus- trial Park, Wuku District, New Taipei City, Taiwan 24803



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



# **VERIFICATION OF COMPLIANCE**

Applicant: Product Name:	Delta Electronics, Inc. 252 Shangying Road, Guishan Industrial Zone, Taoyuan County 33341, Taiwan, R.O.C. zigBee module
Brand Name:	Delta
Marketing Name:	N/A
Model No.:	DFZM-TT211-DT0R, DFZM-TT210-DT0R
Model Difference:	Build-in Antenna & External Antenna
FCC ID:	H79DFZM-TT211
Report Number:	E2/2016/10076
Date of test:	Jan. 30, 2016 ~ Mar. 28, 2016
Date of EUT Received:	Jan. 30, 2016

# We hereby certify that:

Unless 除非另:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Curry Chen	Date	Mar. 28, 2016
	Curry Chen / Engineer		
Prepared By:	Allen Isai	Date	Mar. 28, 2016
-	Allen Tsai / Engineer		
Approved By:	Sim Chang	Date	Mar. 28, 2016
	Jim Chang / Asst. Manager		
	n in this test report refer only to the sample(s) tested and such samp 品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可{		or 90 days only.



# **Revision History**

Report Number	Revision	Description	Issue Date
E2/2016/10076	Rev.00	Initial creation of document	Mar. 28, 2016

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# **Table of Contents**

1	GENE	ERAL INFORMATION	
	1.1	Product Description	6
	1.2	Product Feature of Equipment Under Test	7
	1.3	Test Methodology of Applied Standards	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2	SYST	EM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Measurement Results Explanation Example	9
	2.5	Configuration of Tested System	10
3	SUMN	MARY OF TEST RESULTS	11
4	DESC	RIPTION OF TEST MODES	11
	4.1	Operated in 2400 ~ 2483.5MHz Band	11
	4.2	The Worst Test Modes and Channel Details	12
5	MEAS	SUREMENT UNCERTAINTY	13
5 6		SUREMENT UNCERTAINTY DUCTED EMISSION TEST	
-			14
-	CONE	DUCTED EMISSION TEST	<b>14</b> 14
-	<b>CONE</b> 6.1	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup:	14 14 14
-	<b>CONE</b> 6.1 6.2	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration)	<b>14</b> 14 14 14
-	<b>CONE</b> 6.1 6.2 6.3	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup:	<b>14</b> 14 14 14
-	6.1 6.2 6.3 6.4	DUCTED EMISSION TEST Standard Applicable: Measurement Equipment Used: EUT Setup: Test SET-UP (Block Diagram of Configuration)	<b>14</b> 14 14 14 15 15
-	CONE 6.1 6.2 6.3 6.4 6.5 6.6	DUCTED EMISSION TEST.         Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:	<b>14</b> 14 14 15 15 15
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6	Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:         Measurement Result:	<b>14</b> 14 14 15 15 15 15
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK	DUCTED EMISSION TEST	<b>14</b> 14 14 15 15 15 <b>16</b>
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK 7.1	DUCTED EMISSION TEST	<ol> <li>14</li> <li>14</li> <li>14</li> <li>15</li> <li>15</li> <li>15</li> <li>16</li> <li>16</li> </ol>
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK 7.1 7.2	Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:         Measurement Result:         Standard Applicable:         Standard Applicable:         Measurement Equipment Used:	<b>14</b> 14 14 15 15 15 <b>16</b> 16 16
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK 7.1 7.2 7.3	Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:         Measurement Result:         X         OUTPUT POWER MEASUREMENT         Standard Applicable:         Measurement Equipment Used:         Test Set-up:	<b>14</b> 14 14 14 15 15 15 <b>16</b> 16 16 17
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK 7.1 7.2 7.3 7.4 7.5	Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:         Measurement Result:         COUTPUT POWER MEASUREMENT         Standard Applicable:         Measurement Equipment Used:         Test Set-up:         Measurement Procedure:	<b>14</b> 14 14 14 15 15 15 16 16 16 17 18
6	CONE 6.1 6.2 6.3 6.4 6.5 6.6 PEAK 7.1 7.2 7.3 7.4 7.5	Standard Applicable:         Measurement Equipment Used:         EUT Setup:         Test SET-UP (Block Diagram of Configuration)         Measurement Procedure:         Measurement Result:         COUTPUT POWER MEASUREMENT         Standard Applicable:         Measurement Equipment Used:         Test Set-up:         Measurement Result:         Measurement Result:         Measurement Equipment Used:         Measurement Equipment Used:         Measurement Result         Measurement Result         Measurement Result	<ul> <li>14</li> <li>14</li> <li>14</li> <li>15</li> <li>15</li> <li>16</li> <li>16</li> <li>16</li> <li>17</li> <li>18</li> <li>19</li> </ul>



	8.3	Test Set-up:	19
	8.4	Measurement Procedure:	20
	8.5	Measurement Result:	20
9	COND	DUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	23
	9.1	Standard Applicable	23
	9.2	Measurement Equipment Used:	23
	9.3	Test SET-UP:	23
	9.4	Measurement Procedure	24
	9.5	Measurement Result	24
10	RADI	ATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	29
	10.1	Standard Applicable	29
	10.2	Measurement Equipment Used	
	10.3	Test SET-UP	31
	10.4	Measurement Procedure	32
	10.5	Field Strength Calculation	
	10.6	Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	
	10.7	Measurement Result (Internal Anternna):	33
	10.8	Measurement Result (External Anternna):	47
11	PEAK	POWER SPECTRAL DENSITY	61
	11.1	Standard Applicable:	61
	11.2	Measurement Equipment Used:	61
	11.3	Test Set-up:	61
	11.4	Measurement Procedure:	61
	11.5	Measurement Result:	62
12	ANTE	NNA REQUIREMENT	65
	12.1	Standard Applicable:	65
	12.2	Antenna Connected Construction:	65



### **GENERAL INFORMATION** 1

#### 1.1 **Product Description**

### General:

Product Name:	zigBee module
Brand Name:	Delta
Marketing Name:	N/A
Model No.:	DFZM-TT211-DT0R, DFZM-TT210-DT0R
Model Difference:	Build-in Antenna & External Antenna
Software version:	
Hardware version:	
Power Supply:	3.3VDC from Power supply

### Zigbee:

Frequency Range:	2405 – 2480MHz			
Channel number:	16 channels	16 channels		
Modulation type:	O-QPSK	O-QPSK		
Transmit Power:	19.77 dBm			
Antonno Decignotion:	Build-in:	PCB antenna, Antenna Gain: -2.06dBi : Model No.: DFZM-TT211-DT0R, Supplier: N/A		
Antenna Designation:	External:	Dipole antenna, Antenna Gain: 2.3dBi Part No.: RFDPA870900SMAB801, Supplier: Walsin Technology Corporation		



# 1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is supporting Zigbee features, and below is details of information.

Product Feature			
Product Name:	zigBee module		
Brand Name:	Delta		
Marketing Name:	N/A		
Model No.:	DFZM-TT211-DT0R, DFZM-TT210-DT0R		
Model Difference:	Build-in Antenna & External Antenna		
FCC ID:	H79DFZM-TT211		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for su days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### Test Methodology of Applied Standards 1.3

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance

ANSI C63.10:2013

Note:

- 1. All test items have been performed and record as per the above standards.
- 2. The composite system is compliance with FCC Subpart B is authorized under a DoC procedure.

#### Test Facility 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 990257

## 1.5 Special Accessories

There are no special accessories used while test was conducted.

### **1.6 Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### SYSTEM TEST CONFIGURATION 2

#### **EUT Configuration** 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### Test Procedure 2.3

### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

### 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

### Note:


The spectrum analyzer offset is derived from RF cable loss 1dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 2.5 Configuration of Tested System

Fig. 2-1 Conducted (Antenna Port) & Radiated Emission & Conduction Configuration



**Table 2-1 Equipment Used in Tested System** 

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	ZigBee Test Soft- ware	N/A	N/A	N/A	N/A	N/A
2.	Test tool kit	N/A	N/A	N/A	N/A	Shielded
3.	DC Power Supply	Agilent	E3640A	MY53140006	N/A	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

#### **DESCRIPTION OF TEST MODES** 4

#### Operated in 2400 ~ 2483.5MHz Band 4.1

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2405 MHz	5	2425 MHz	9	2445 MHz	13	2465 MHz
2	2410 MHz	6	2430 MHz	10	2450 MHz	14	2470 MHz
3	2415 MHz	7	2435 MHz	11	2455 MHz	15	2475 MHz
4	2420 MHz	8	2440 MHz	12	2460 MHz	16	2480 MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCT chaven Lie Link 134 WurkungPord NewTainel/actr WurkuDistrict NewTainel/City Taiwan24803/% th to T. By 134 bit



# 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE TESTED MODULATIO				
Zigbee	1 to 16	1,8,16	O-QPSK		
RADIATED EMISSION TEST (ABOVE 1 GHz)					
MODE	AVAILABLE TESTED MODULATION				
Zigbee	1 to 16	1,8,16	O-QPSK		

### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST					
MODEAVAILABLE CHANNELTESTED CHANNELMODULATION					
Zigbee	1 to 16	1,8,16	O-QPSK		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **MEASUREMENT UNCERTAINTY** 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : <b>Vertical</b> )	30MHz - 180MHz: +/- 3.37dB	
	180MHz -417MHz: +/- 3.19dB	
	0.417GHz-1GHz: +/- 3.19dB	
	1GHz - 18GHz: +/- 4.04dB	
	18GHz - 40GHz: +/- 4.04dB	

	30MHz - 167MHz: +/- 4.22dB	
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB	
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB	
	1GHz - 18GHz: +/- 4.08dB	
	18GHz - 40GHz: +/- 4.08dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### CONDUCTED EMISSION TEST 6

#### 6.1 **Standard Applicable:**

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

	Limits			
Frequency range	dB(	uV)		
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		
Note				
1. The lower limit shall apply at the transition frequencies				
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50				

MHz.

## 6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL LAST CAL D						
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI 3	101311	06/18/2015	06/17/2016	
Coaxial Cables	N/A	N30N30-1042-15 0cm	N/A	02/07/2016	02/06/2017	
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016	
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.	


## 6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 6.4 Test SET-UP (Block Diagram of Configuration)

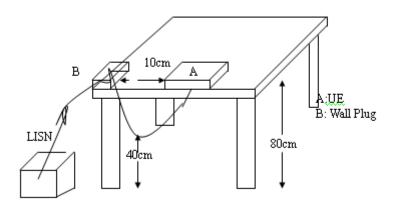

### 6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 **Measurement Result:**

N/A, This device is powered by power supply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### PEAK OUTPUT POWER MEASUREMENT 7

#### 7.1 **Standard Applicable:**

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

## 7.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016	
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016	
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016	
Power Sensor	Anritsu	MA2411B	1315049	06/23/2015	06/22/2016	
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016	
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016	
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016	
Temperature Cham- ber	TERCHY	MHK-120LK	1020582	06/23/2015	06/22/2016	

# 7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



# 7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna. port to the power meter.

### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

## **Duty Factor:**

	Duty Cycle (%)	Duty Factor (dB)	
Zigbee mode	12.50	9.03	

Duty Cycle Factor:10\*log(1/12.5/100)=9.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 7.5 Measurement Result:

### ZigBee mode:

### Zigbee mode

СН	Frequency (MHz)	Peak Power Output(dBm)	Required Limit
1	2405	19.77	1 Watt = 30 dBm
8	2440	18.36	1 Watt = 30 dBm
16	2480	2.04	1 Watt = 30 dBm

СН	Frequency (MHz)	Average Power Output(dBm)	Required Limit
1	2405	16.71	1 Watt = 30 dBm
8	2440	15.34	1 Watt = 30 dBm
16	2480	-1.10	1 Watt = 30 dBm

\*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter



#### 6dB BANDWIDTH MEASUREMENT 8


#### 8.1 **Standard Applicable**

The minimum 6 dB bandwidth shall be at least 500 kHz.

## 8.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT MFR MODEL SERIAL LAST CAL DU						
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4440A	MY45304525	05/05/2015	05/04/2016	
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017	
Attenuator	Mini-Circuit	BW-S10W2+	002	01/02/2016	01/01/2017	

#### 8.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3\*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3\*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

#### 8.5 Measurement Result:


Zigbee mode			
Frequency (MHz)	6dB Bandwidth (MHz)	Bandwidth (MHz)	Result
2405	1.611	> 0.5	PASS
2440	1.599	> 0.5	PASS
2480	1.604	> 0.5	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



## ZigBee mode 6dB Band Width Test Data CH-Low

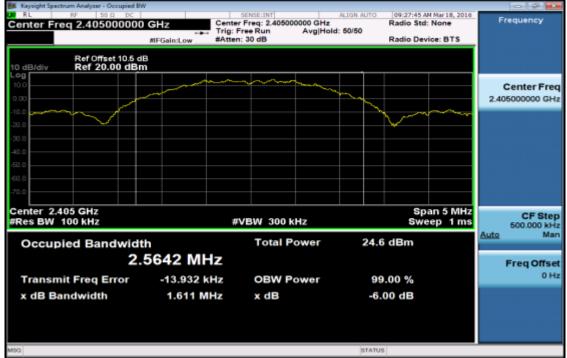


# 6dB Band Width Test Data CH-Mid

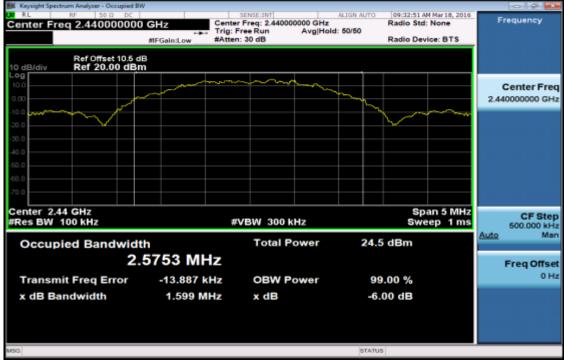

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號





# 6dB Band Width Test Data CH-High

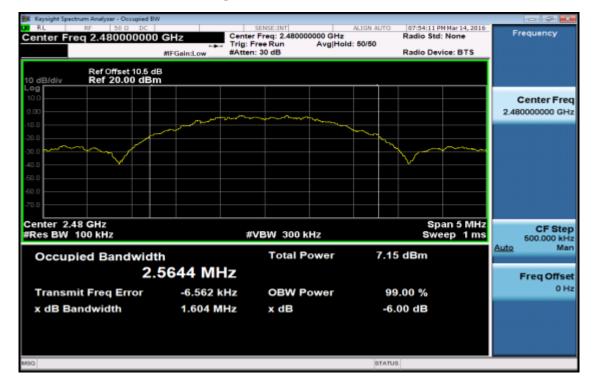

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



### CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


#### 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

## 9.2 Measurement Equipment Used:

Conducted Emission Test Site											
EQUIPMENT	MFR MODEL SERIAL L				CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	E4440A	MY45304525	05/05/2015	05/04/2016						
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017						
Attenuator	Mini-Circuit	BW-S10W2+	002	01/02/2016	01/01/2017						
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017						

#### 9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



# 9.4 Measurement Procedure

### **Conducted Band Edge:**

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

## **Conducted Spurious Emission:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

## 9.5 Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.



# ZigBee mode **Band Edges Test Data CH-Low**

Keysight Spectrum Analyzer - Swept SA			
Center Freq 2.370000000	GHz	ALIGN AUTO 09:28:23 AM Mar 18, 2016 Avg Type: Log-Pwr TRACE 12:34 5 6	Frequency
Ref Offset 10.5 dB 10 dB/div Ref 20.00 dBm	PNO: Fast Trig: Free Run IFGain:Low #Atten: 30 dB	Mkr3 2.390 00 GHz -51.45 dBm	Auto Tune
10.0 0.00 -10.0		-679.694	Center Freq 2.370000000 GHz
-20.0		3 2 May 10 May 10 10 10 10	Start Freq 2.310000000 GHz
-50.0	94444444 		Stop Freq 2.43000000 GHz
Start 2.31000 GHz #Res BW 100 kHz MKR MODE TRC SCL X		Stop 2.43000 GHz Sweep 11.53 ms (1001 pts)	CF Step 12.000000 MHz Auto Man
2 N 1 f 2.39	14 44 GHz 14.24 dBm 9 90 GHz -41.57 dBm 0 00 GHz -51.45 dBm		Freq Offset 0 Hz
7 8 9 10 11			
MSG		STATUS	

# **Band Edges Test Data CH-High**

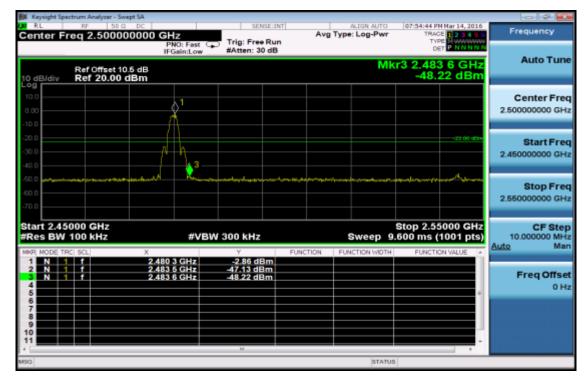


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Conducted Spurious Emission Measurement Result** CH-Low 30MHz - 3GHz

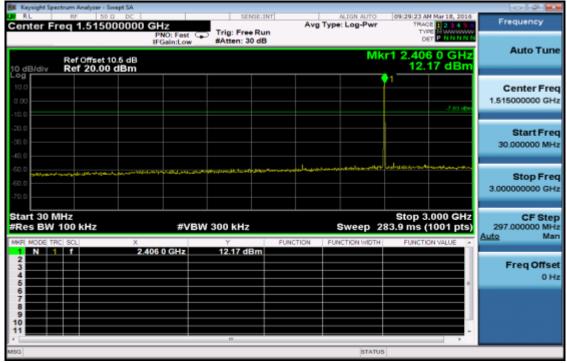

# CH-Low 3GHz – 26.5GHz

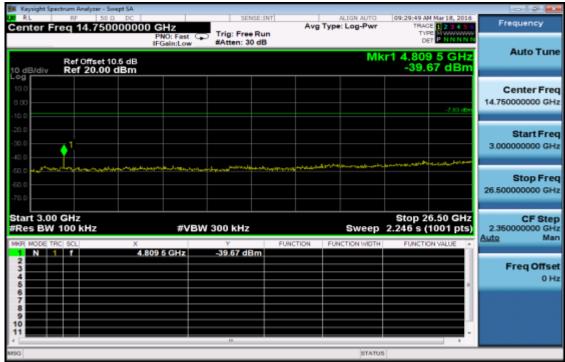

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# CH-Mid 30MHz – 3GHz

🗱 Keysight Sp	ectrum Analyzer - Swept SA							
Center F	req 1.51500000	PNO: Fast (	Trig: Free Ru	Avg	Type: Log-Pwr	09:34:57 AM Mar 18, TRACE 1 2 3 TYPE NWW DET P NN	150	Frequency
10 dB/div	Ref Offset 10.5 dB Ref 20.00 dBm	IFGain:Low	#Atten: 30 dB		Mk	r1 2.438 7 G 12.69 di		Auto Tune
10.0 0.00						-4.3	1.64	Center Freq 1.515000000 GHz
-20.0 -30.0 -40.0								Start Free 30.000000 MH:
-50.0 -60.0 -70.0	an di sa kana sa kana kana kana kana kana kan	aravi Anakowikyach,	ar you a good and and and and and and and and and an	allynari yw ar Addred	an a	al malana an		Stop Free 3.000000000 GH:
Start 30 I #Res BW	100 kHz	#VB	W 300 kHz	FUNCTION	Sweep 2	Stop 3.000 G 83.9 ms (1001 ) FUNCTION VALUE	pts)	CF Step 297.000000 MH Auto Mar
1 N 2 3 4 5		2.438 7 GHz	12.69 dBm					Freq Offset 0 Ha
6 7 8 9 10								
							1	
MSG					STATUS	ł.		

# CH-Mid 3GHz – 26.5GHz

🇱 Keysight Spe	ctrum Analyzer -	- Swept SA								
Center Fi			GHz		SE:INT	Avg Typ	ALIGN AUTO	TRAC	Mar 18, 2016	Frequency
10 dB/div	Ref Offset Ref 20.0	IF 10.5 dB	NO: Fast Gain:Low	Trig: Free #Atten: 30			M	cr1 4.880	PNNNN	Auto Tune
10.0 0.00									-7.31 eBe	Center Freq 14.750000000 GHz
-20.0 -30.0 -40.0	•1							م. ع. الم. م. الم. و	un calculation	Start Freq 3.000000000 GHz
-50.0	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ang berget the second		harman and the and the second	1993 AN 1994 AN		ماليوند ولي الحرير طلا			Stop Freq 26.50000000 GHz
Start 3.00 #Res BW	100 kHz	X		V 300 kHz Y	FUNC	TION   FL	Sweep	2.246 s (	6.50 GHz 1001 pts)	CF Step 2.35000000 GHz Auto Man
1 N 1 2 3 4 5 6 7 7 8 9 10 11		4.880	0 GHz	-40.02 dB						Freq Offset 0 Hz
MSG							STATU	8		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCT chaven Lie Link 134 WurkungPord NewTainel/actr WurkuDistrict NewTainel/City Taiwan24803/% th to T. By 134 bit

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# CH-High 30MHz – 3GHz

Keysight Spectrum Analyzer - Swept SA				
Center Freq 1.515000000	PNO: Fast 😱 Trig: Free Run	Avg Type: Log-Pwr	07:55:02 PM Mar 14, 2016 TRACE 1 2 3 4 5 6 TYPE NUMBER DET P NN NN N	Frequency
Ref Offset 10.6 dB 10 dB/div Ref 20.00 dBm	IFGain:Low #Atten: 30 dB	Mk	r1 2.480 3 GHz -4.01 dBm	Auto Tun
0 00 10.0				Center Fre 1.515000000 GH
20.0			-24 UT 0640	Start Fre 30.000000 MH
50.0 advertising of a summer larger to approximation of the sum of		algeneration and an and a second s	and a second	Stop Fre 3.000000000 GF
Start 30 MHz Res BW 100 kHz	#VBW 300 kHz	Sweep 2	Stop 3.000 GHz 83.9 ms (1001 pts)	CF Ste 297.000000 MH Auto Ma
	480 3 GHz -4.01 dBm	PONCTION	FUNCTION VALUE	Freq Offse
6 7 8 9 10				
11	17	STATUS	•	

# CH- High 3GHz – 26.5GHz

Keysight Spectrum Analyzer - Swept SA					- 3 🛋
Center Freg 14.7500000	000 GHz		ALIGN AUTO pe: Log-Pwr	07:55:19 PM Mar 14, 2016 TRACE 1 2 3 4 5 6	Frequency
Ref Offset 10.5 dB	PN0: Fast Trig: Fre IFGain:Low #Atten: 3		Mkr	TYPE P NNNNN DET P NNNNN 1 26.053 5 GHz	Auto Tune
10 dB/div Ref 20.00 dBm				-40.34 dBm	
10.0 0.00 -10.0					Center Freq 14.750000000 GHz
-20.0		لا مار موجد مرجد الم	14 drag	مور ال 24. موال المراجع ال	Start Freq 3.000000000 GHz
-50.0 •••••••••••••••••••••••••••••••••••					Stop Freq 26.50000000 GHz
Start 3.00 GHz #Res BW 100 kHz	#VBW 300 kHz			Stop 26.50 GHz 2.246 s (1001 pts)	CF Step 2.35000000 GHz Auto Man
MIRE MODE TRC SCL X 1 N 1 7 2 2 3 4 5 6	26.053 5 GHz -40.34 d		UNCTION WIDTH	FUNCTION VALUE	Freq Offset 0 Hz
7 8 9 10 11				-	
MSG			STATUS		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCT chaven Lie Link 134 WurkungPord NewTainel/actr WurkuDistrict NewTainel/City Taiwan24803/% th to T. By 134 bit

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# 10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

# **10.1 Standard Applicable**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (dBµV/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




## **10.2 Measurement Equipment Used**

966 Chamber											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESCI7	100760	05/04/2015	05/03/2016						
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/28/2016	01/27/2017						
Loop Antenna	ETS.LINDGREN	6502	148045	09/07/2015	09/06/2016						
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/14/2015	12/13/2016						
Horn antenna	ETS.LINDGREN	3117	123995	05/05/2015	05/04/2016						
Pre-Amplifier	Agilent	8447D	2944A07676	01/02/2016	01/01/2017						
Pre-Amplifier	EMC Instruments Corp.	EMC0126530	980038	01/02/2016	01/01/2017						
Turn Table	HD	DT420	N/A	N.C.R	N.C.R						
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R						
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R						
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2016	01/01/2017						
3m Site NSA	SGS	966 chamber	N/A	07/02/2015	07/01/2016						




# 10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

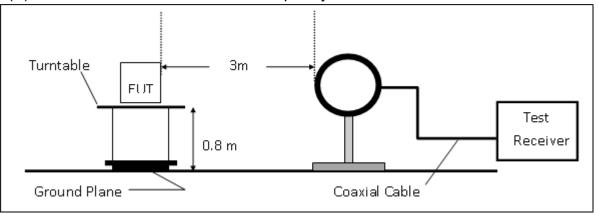

# (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

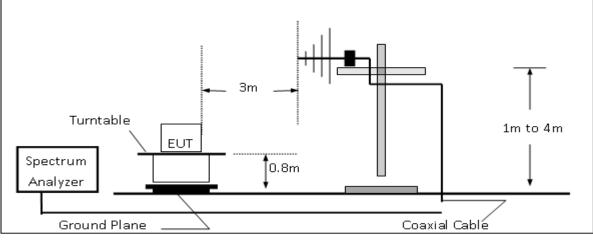

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

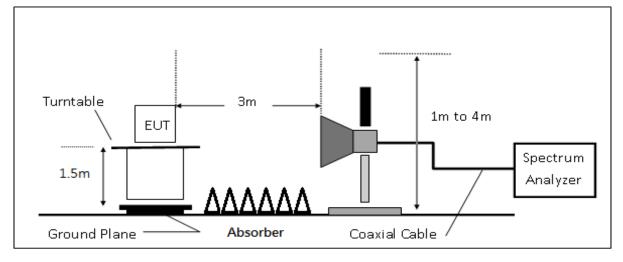

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### **10.4 Measurement Procedure**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the 4. highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



## **10.5 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

# FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

## Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

# 10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

## 10.7 Measurement Result (Internal Anternna):

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



## Radiated Band Edge Measurement Result (Internal Antenna)

	U		Υ.				
Operation M	lode :	ZigBee	Test Date	Test Date : 2016/3/17			
Fundamenta	al Frequenc	y: 2405 MH	Hz Temp. / H	lumi. :		22.7deg_C	/57RH
Operation B	and :	BE CH L	•			Pony	
EUT Pol. :		E2	Measurer	nent Anten	na Pol. :	Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	46.66	5.78	52.44	74	-21.56
2390.00	E	Average	33.08	5.78	38.86	54	-15.14
Operation N	lode ·	ZigBee	Test Date	<u>.</u>		2016/3/17	
Fundamenta		-				22.7deg_C	/57RH
Operation B		BE CH L	•			Pony	
EUT Pol. :	and .	E2	•	nent Anten	na Pol	Horizontal	
LOT FOL.		LZ	Measurer		na F 01	nonzontai	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2341.32	S	Peak	52.03	5.66	57.69	74	-16.31
2341.32	S	Average	35.04	5.66	40.70	54	-13.30
2390.00	Е	Peak	49.15	5.78	54.93	74	-19.07
2390.00	E	Average	33.08	5.78	38.86	54	-15.14
Operation M	lode ·	ZigBee	Test Date	<b>.</b> .		2016/3/17	
Fundamenta		•					
Operation B		BE CH H				22.7deg_C	
	anu .		• •		na Dal I	Pony	
EUT Pol. :		E2	Measurer	ment Anten	na Pol. :	Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
-		Mode	Reading Level		FS	@3m	-
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	47.24	5.88	53.12	74	-20.88
2483.50	E	Average	32.48	5.88	38.36	54	-15.64
Operation M	lode :	ZigBee	Test Date	e :		2016/3/17	
Fundamenta		-				22.7deg_C	;/57RH
Operation B		BE CH H	•			Pony	
EUT Pol. :		E2	• •	nent Anten	na Pol. :	Horizontal	
Eroa	Noto	Detector	Sportum	Factor	Actual	Limit	Margin
Freq.	Note	Detector	Spectum Reading Lovel	Factor	Actual FS	Limit	Margin
		Mode	Reading Level	40		@3m	٩D
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	47.72	5.88	53.60	74 54	-20.40
2483.50	E	Average	34.43	5.88	40.31	54	-13.69

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# **Radiated Spurious Emission Measurement Result (Internal Antenna)**

For Frequer	ncy form 3	0MHz to 1000	)MHz				
Fundamer	Operation Mode: Fundamental Frequency: Operation Band:		Frequency: 2405 MHz Temp. / Humi. :				/57RH
EUT Pol. :		E2		urement Anten	na Pol. :	Pony Vertical	
97 -							
1							
87 -							
4							
77 -							
67 -							
1							
58							FCC RSE QP
m//m							FCC RSE QP
58 [(m//\n 488 			5				
ے 38 -			¥				
3							
29 -				\$ *			
	4 ×						
19							
9-							
9							
30	1 I I	272.5		15	757.5	5	1000
			Frequer	ncy [MHz]			
Freq.	Note	Detector	Spectum		Actual	Limit	Margin
		Mode	Reading Lev		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
36.79	S	Peak	32.30	-10.93	21.37	40	-18.63
44.55	S	Peak	36.17	-16.05	20.12	40	-19.88
101.78	S	Peak	35.33	-17.52	17.80	43.5	-25.70

37.90

52.00

36.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Peak

Peak

S

S

S

151.25

433.52

518.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCT chaven Lie Link 134 WurkungPord NewTainel/actr WurkuDistrict NewTainel/City Taiwan24803/% th to T. By 134 bit

-17.02

-9.55

-7.40

20.88

42.44

28.77

43.5

46

46

-22.62

-3.56

-17.23



Operation Mode : Fundamental Frequency : Operation Band : EUT Pol. :			icy: 2405	Tx CH Low Test		e : Iumi. : ineer : nent Anten	na Pol. :	2016/3/17 22.7deg_C/57RH Pony Horizontal			
97 -											
87 -											
77 -											
67 -											
58 - [(ɯ/ʌ									FCC RSI	E QP	
Level [(dBuV/m)]				5							
38 - 38 -					5						
29 -					×						
19 -	1 ×		4 ×								
9 -		*									
0 -							т. т. р			_	
3			272.5	Free		515 Frequency [MHz]		757.5		1000	
	Freq.	Note	Detector		pectum	Factor	Actual	Limit	Margin		
	MHz	F/H/E/S	Mode PK/QP/AV		ling Level	dD	FS	@3m	٩D		
-	33.88	<u>г/п/Е/З</u> S	Progr/Av Peak		dBμV 22.47	dB -9.27	dBµV/m 13.19	dBµV/m 40	dB -26.81	-	
	33.00 101.78	S	Peak		22.47 34.74	-9.27 -17.52	17.22	40 43.5	-26.28		
	159.98	S			27.20	-17.52 -17.52	9.68	43.5 43.5	-20.20 -33.82		
	159.98 266.68	S	Peak		27.20 29.66	-17.52 -13.86	9.68 15.80	43.5 46	-33.82 -30.20		
		S	Peak		29.00 52.53	-13.86 -9.55	42.98	40 46	-30.20 -3.02		
	433.52	S S	Peak								
	518.88	3	Peak	2	11.75	-7.40	34.36	46	-11.64		




07	Operation Fundamer Operation EUT Pol. :	ntal Frequen Band :	ZigBe icy : 2440 Tx CH E2	MHz	Test Date Temp. / H Test Engi Measurer	lumi. :	na Pol. :	2016/3/17 22.7deg_C Pony Vertical	/57RH	
97	]									
87	-									
77	<u>-</u>									
67										
58	1									
Level [(dBuV/m)]	]								FCC RSE QF	
Level [(o		ſ		×						
38					5					
29	i X				×					
19	2 X		3			6 ×				
9	1									
	1									
0	30	г т т	272.5		515 Frequency [MH:	z]	757.5	5	10	000
	Freq.	Note	Detector	•	ectum	Factor	Actual	Limit	Margin	
			Mode		ng Level		FS	@3m	15	
-	MHz	F/H/E/S	PK/QP/AV		BµV	dB	dBµV/m	dBµV/m	dB	
	37.76	S	Peak		1.72	-11.49	30.23	40	-9.77	
	101.78	S	Peak		6.09	-17.52	18.57	43.5	-24.93	
	266.68	S	Peak		0.32	-13.86	16.46	46	-29.54	
	433.52	S	Peak		2.76	-9.55	43.20	46	-2.80	
	518.88	S	Peak		9.00	-7.40	31.60	46	-14.40	
	578.05	S	Peak	2	7.99	-6.45	21.54	46	-24.46	




	Operation Fundamer Operation EUT Pol. :	ntal Frequen Band :	ZigBe cy: 2440 Tx CH E2	MHz Temp I Mid Test E	Date : / Humi. : Engineer : urement Anter	nna Pol. :	2016/3/17 22.7deg_C Pony Horizontal	/57RH	
97	-								
87									
77	<u> </u>								
	-								
67									
58	-							FCC RSE QP	
[(m/\ngp)] lava1									
level	-								
38					ļ,				
29	-								
	2 ×				5 *	6 *			
19				×					
9	-								
0	-								
	30	r. 1,2 F	272.5	5: Frequen		757.	5	1000	)
	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
			Mode	Reading Lev		FS	@3m		
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	35.82	S	QP	45.20	-10.35	34.85	40	-5.15	
	96.93	S	Peak	42.83	-18.27	24.56	43.5	-18.94	
	434.49	S	QP	26.50	-9.41	17.09	46	-28.91	
	515.97	S	Peak	41.67	-7.67	34.00	46	-12.00	
	579.02	S	Peak	29.31	-6.38	22.93	46	-23.07	
	738.10	S	Peak	26.17	-4.25	21.92	46	-24.08	



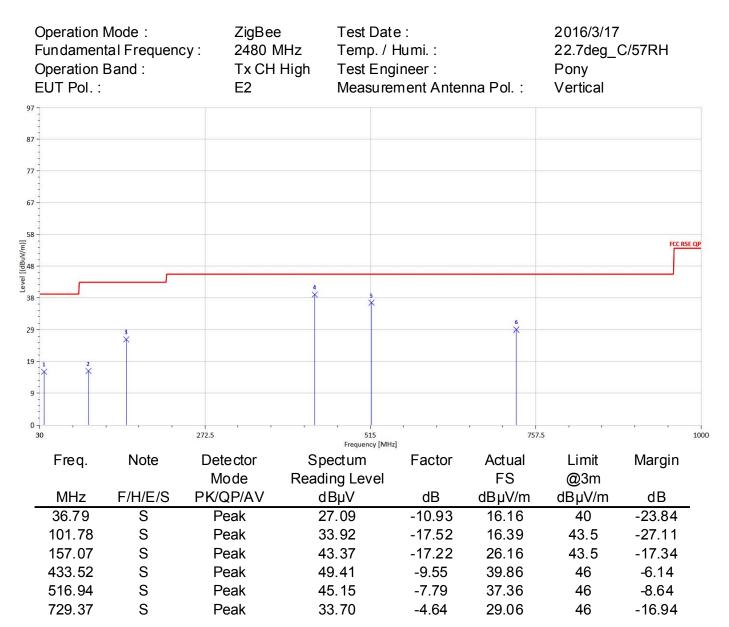



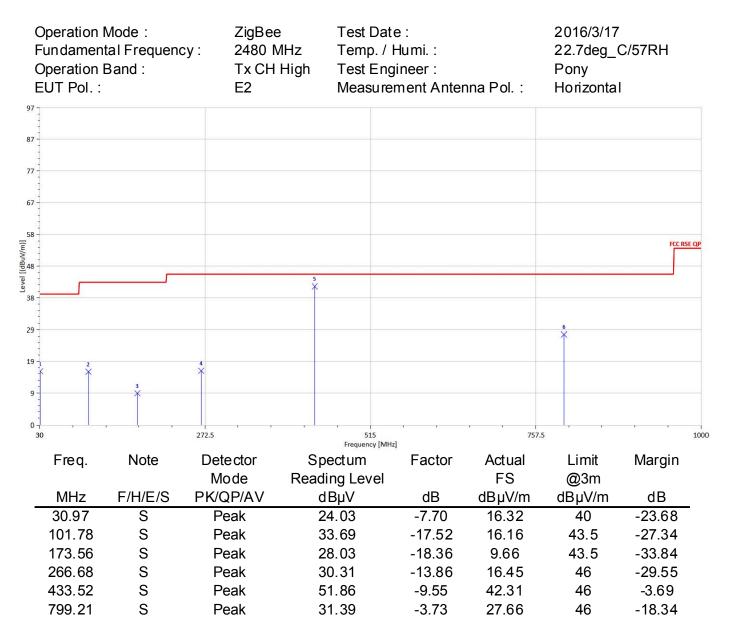



9620.00


9620.00

Н

Н

# Radiated Spurious Emission Measurement Result (Internal Antenna) For Frequency above 1GHz

Operation Mode :	ZigBee	Test Date :	2016/3/17
Fundamental Frequency :	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol.:	Vertical

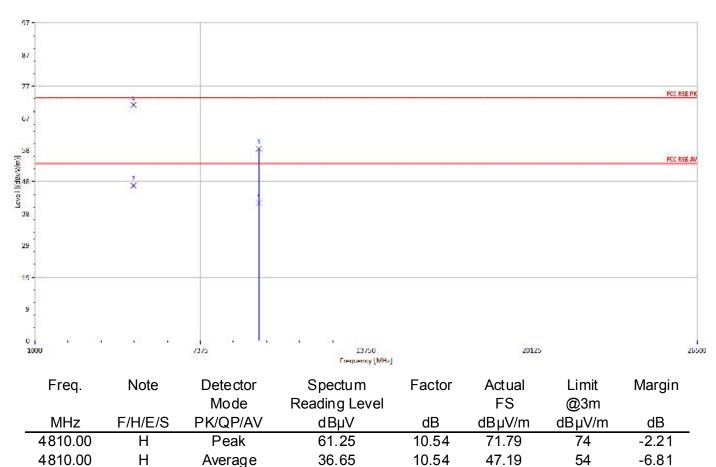

41.57

25.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Average

Contentiones stated the results shown in this test report refer only to the sample(s) tested and statistic sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

16.98

16.98

58.55

42.13

74


54

-15.45

-11.87




Operation Mode :	ZigBee	Test Date :	2016/3/17
Fundamental Frequency :	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol.:	E2	Measurement Antenna Pol.:	Horizontal

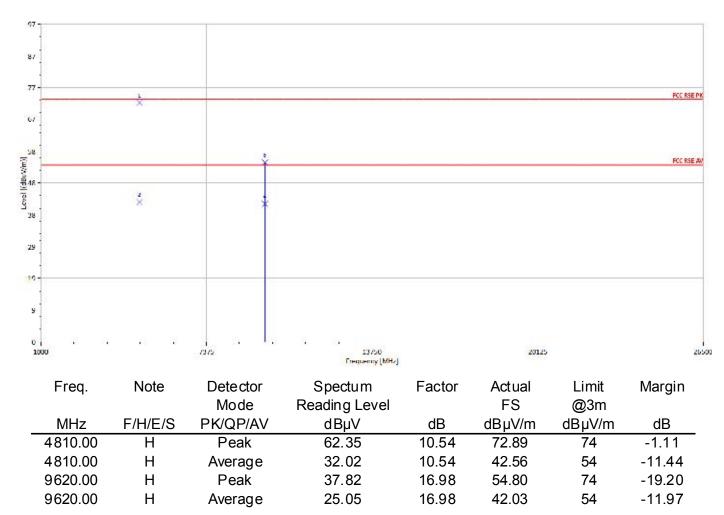




Operation Mode :	ZigBee	Test Date :	2016/3/17
Fundamental Frequency :	2440 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

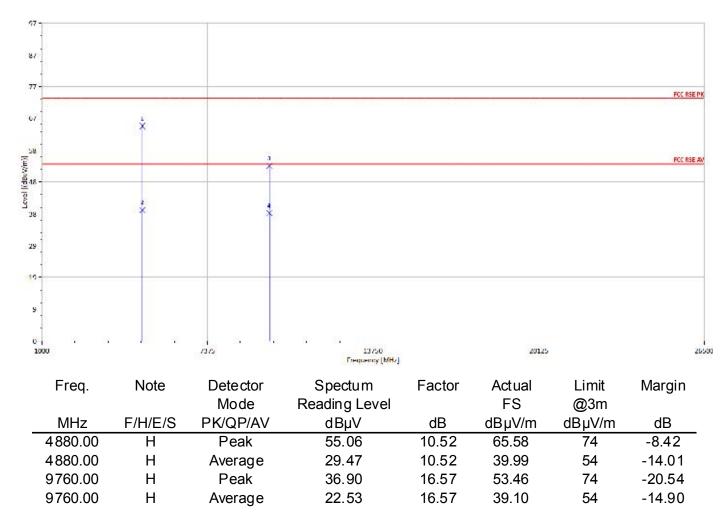




Operation Mode :	ZigBee	Test Date :	2016/3/17
Fundamental Frequency :	2440 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

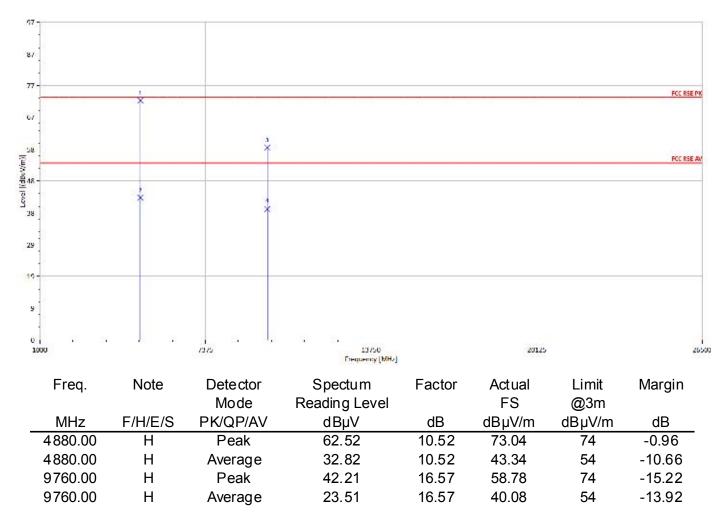



Operation Mode :	ZigBee	Test Date :	2016/3/17
Fundamental Frequency :	2480 MHz	Temp. / Humi. :	22.7deg C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol. :	Vertical

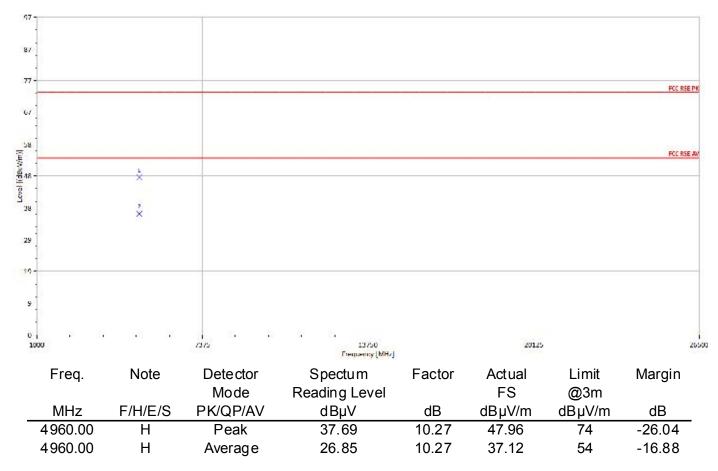



Operation Mode:	ZigBee	Test Date :	2016/3/17
Fundamental Frequency:	2480 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

-97	1							
87								
77								FCC RSE PK
67	1							
Lovel ((dbuV/m))		T						FCC RSE AV
10 48	<u>_</u>	×						
RC Level J		×						
29								
10 9								
0	] 	13 X	, 10	. 13750 Ганданау (МН2)		20125		26500
	Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	4960.00	Н	Peak	40.49	10.27	50.76	74	-23.24
	4960.00	Н	Average	24.96	10.27	35.23	54	-18.77



# 10.8 Measurement Result (External Anternna): **Radiated Band Edge Measurement Result (External Antenna)**

Operation Mode : Fundamental Frequency : Operation Band : EUT Pol. :		y: 2405 M	BE CH Low Test Eng		Humi. :		//57RH
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
	Г/Ц/Г/0	Mode	Reading Level	dD	FS dDu\//m	@3m	٩D
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	S	Peak	51.49	5.78	57.27	74	-16.73
2390.00	S	Average	33.51	5.78	39.29	54	-14.71
Operation Mode : Fundamental Frequency : Operation Band :		y : 2405 M BE CH	BE CH Low Test Engi		lumi. : ineer :		/57RH
EUT Pol. :		E2	Measure	ment Anten	na Pol. :	Horizontal	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2341.44	S	Peak	51.44	5.66	57.10	74	-16.90
2341.44	S	Average	33.11	5.66	38.77	54	-15.23
2390.00	Е	Peak	47.12	5.78	52.90	74	-21.10
2390.00	Е	Average	32.81	5.78	38.59	54	-15.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation M	lode :	ZigBee	Test Dat	Test Date:		2016/3/17		
Fundamenta	al Frequency	y: 2480 M	Hz Temp. /	Temp. / Humi. :			22.7deg_C/57RH	
Operation B	and :	BE CH	High Test Eng	gineer :		Pony		
EUT Pol. :		E2	Measure	ment Anten	na Pol. :	Vertical		
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m	·	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2483.50	E	Peak	50.25	5.88	56.13	74	-17.87	
2483.50	Е	Average	36.37	5.88	42.25	54	-11.75	
Operation Mode :		ZigBee	ZigBee Test Date :			2016/3/17		
Fundamenta	al Frequency	y: 2480 M	Hz Temp. /	Temp. / Humi. :			22.7deg_C/57RH	
Operation B	and :	BE CH	High Test Eng	gineer :		Pony		
EUT Pol. :		E2	Measure	ment Anten	na Pol. :	Horizontal		
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m	·	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2483.50	E	Peak	48.36	5.88	54.24	74	-19.76	
2483.50	E	Average	35.60	5.88	41.48	54	-12.52	



#### **Radiated Spurious Emission Measurement Result (External Antenna)** For Frequency form 30MHz to 1000MHz


Operation Fundamer Operation EUT Pol. :	Mode : ntal Frequer Band :	ZigBe ncy: 2405 Tx CH E2	ee Test D MHz Temp. I Low Test E	oate : / Humi. : ingineer : irement Anten	ina Pol. :	2016/3/17 22.7deg_C Pony Vertical	/57RH
97							
87 -							
77							
67							
6/-							
58 [(m//m)] 88							FCC RSE QP
Level			3 ¥			6 ×	
38			4				
29 19 9	2		×				
0 -  30		272.5	51 Frequence		757.5	· · · · ·	1000
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
-		Mode	Reading Lev	el	FS	@3m	-
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	25.77	-8.22	17.55	40	-22.45
101.78	S	Peak	35.46	-17.52	17.94	43.5	-25.56
433.52	S	Peak	51.48	-9.55	41.93	46	-4.07
442.25	S	Peak	44.50	-9.47	35.02	46	-10.98
514.03	S	Peak	34.65	-7.67	26.97	46	-19.03
897.18	S	QP	42.92	-2.37	40.55	46	-5.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation EUT Pol. :	ntal Frequen Band :	ZigBe ncy: 2405 Tx CH E2	MHz Temp. / I Low Test En	Humi. :	na Pol. :	2016/3/17 22.7deg_C Pony Horizontal	/57RH
97 -							
87 -							
77 -							
67							
58 - E							FCC RSE QP
دوبوا [[dBu\/m]] 88 							
٩ - <u></u>			* 				
29 -					6 ×		
19	3						
9- -	×						
30		272.5	515 Frequency [N		757.5		1000
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
MHz	F/H/E/S	Mode PK/QP/AV	Reading Leve dBµV	l dB	FS dBµV/m	@3m dBµV/m	dB
31.94	S	Peak	22.75	-8.22	14.53	40	-25.47
96.93	S	Peak	32.50	-18.27	14.23	43.5	-29.27
101.78	S	Peak	34.86	-17.52	17.33	43.5	-26.17
433.52	S	Peak	50.35	-9.55	40.79	46	-5.21
516.94	S	Peak	42.62	-7.79	34.82	46	-11.18
717.73	S	Peak	36.02	-4.96	31.06	46	-14.94




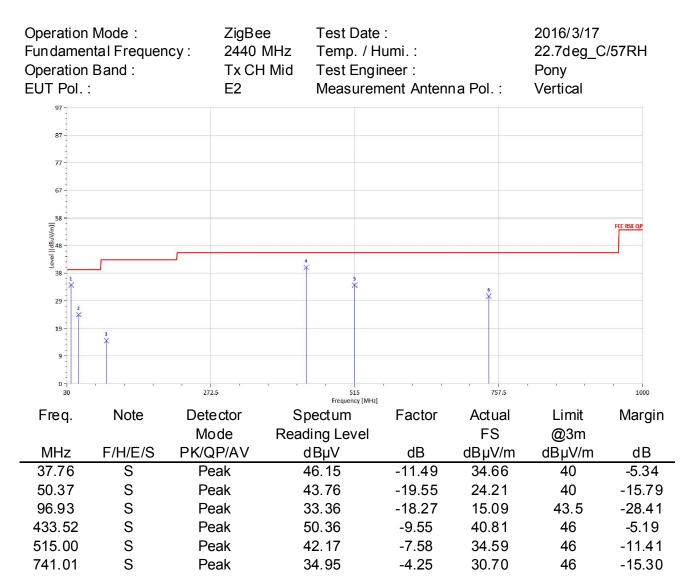




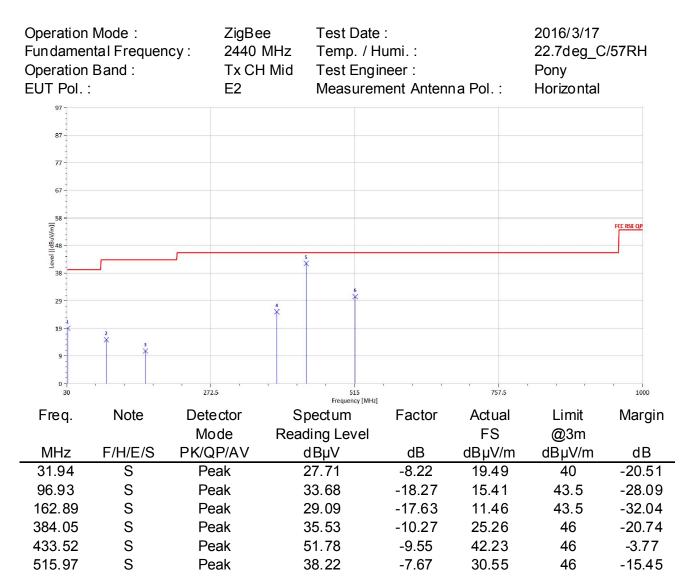



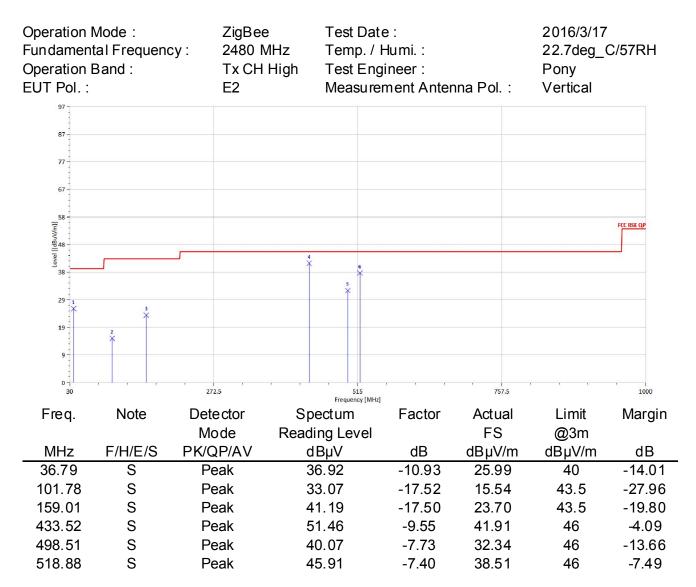



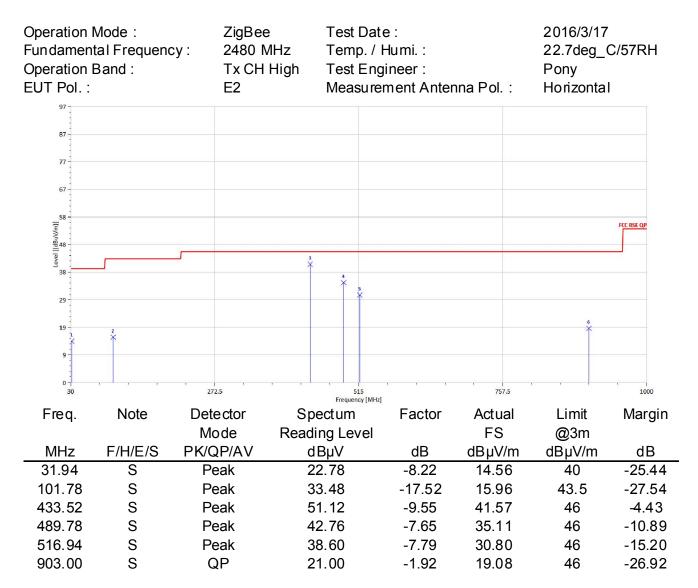



4810.00

Н

# Radiated Spurious Emission Measurement Result (External Antenna) For Frequency above 1GHz

Operation I Fundamen Operation I EUT Pol. :	tal Frequen	ZigBe cy: 2405 Tx CH E2	MHz Temp. / Low Test Eng	Humi. :	na Pol. :	2016/3/17 22.7deg_C/ Pony Vertical	57RH
97 -							
87-							
77	1						FCC RSE PK
67 -	× ·						
58	×						FCC RSE AV
السرامة المعالم المعالم المحالم المحالم محالم المحالم ا							TCC. KSC AV
	*						
29	×						
19							
9-							
0	, l., ļ.	7375	13750 Frequency [M	нz]	20125	r i	26500
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Leve		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2939.00	S	Peak	63.97	7.14	71.11	74	-2.89
2939.00	S	Average	24.93	7.14	32.07	54	-21.93
4810.00	Н	Peak	51.51	10.54	62.05	74	-11.95

28.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Average

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Inis document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SCT chaven Lie Link 134 WurkungPord NewTainel/actr WurkuDistrict NewTainel/City Taiwan24803/% th to T. By 134 bit

10.54


38.84

54

-15.16



Operation Mode:	ZigBee	Test Date :	2016/3/17
Fundamental Frequency:	2405 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	E2	Measurement Antenna Pol. :	Horizontal

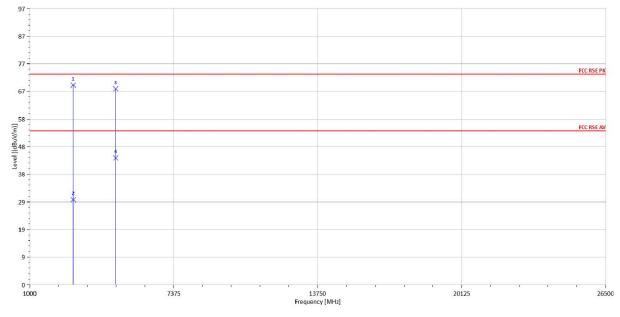


Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2932.00	S	Peak	62.91	7.17	70.09	74	-3.91
2932.00	S	Average	22.69	7.17	29.86	54	-24.14
4810.00	Н	Peak	58.29	10.54	68.83	74	-5.17
4810.00	Н	Average	33.98	10.54	44.52	54	-9.48



Operation I Fundament Operation I EUT Pol. :	tal Frequenc	ZigBee cy : 2440 M Tx CH E2	1Hz Temp. Mid Test E	pate : / Humi. : Ingineer : Irement Antenr	na Pol. :	2016/3/17 22.7deg_C/ Pony Vertical	/57RH
97 87 77							FCC RSE PK
67 58	1						FCC RSE AV
[[(m/)/ngp]] 48 48 38	×						
29 19 9							
0	, , ,	7375	1373 Frequency		20125		26500
Freq.	Note	Detector Mode	Spectum Reading Lev		Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	d BµV	dB	dBµV/m	dBµV/m	dB
4880.00 4880.00	H H	Peak Average	49.67 31.54	10.52 10.52	60.18 42.06	74 54	-13.82 -11.94



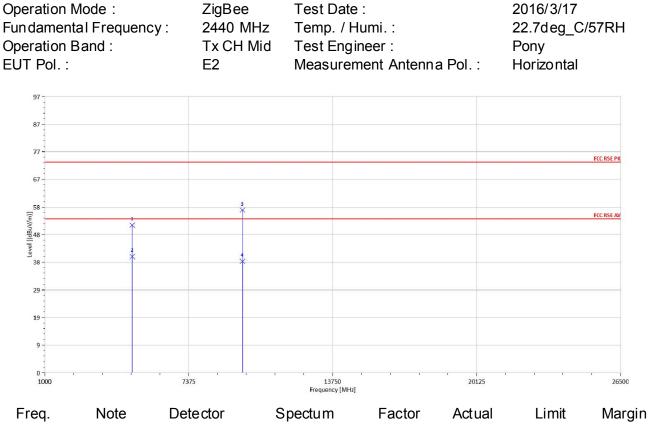

		11010	B 010 0101	opoolann	1 0.0101	7 101 0101		initian ginn	
			Mode	Reading Level		FS	@3m		
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4880.00	Н	Peak	41.31	10.52	51.82	74	-22.18	•
	4880.00	Н	Average	30.27	10.52	40.79	54	-13.21	
	9760.00	Н	Peak	40.55	16.57	57.12	74	-16.88	
	9760.00	Н	Average	22.54	16.57	39.11	54	-14.89	



Operation N Fundament Operation E EUT Pol. :	al Frequenc	ZigBee 2480 M Tx CH E2	/Hz Tem <sub>l</sub> High Test	Date : p. / Humi. : Engineer : surement Anter	nna Pol. :	2016/3/17 22.7deg_C Pony Vertical	C/57RH
97 -							
87 -							
77							
//							FCC RSE PK
67							
58							
Bu//m)							FCC RSE AV
58 [[m//\m] 48 8	1						
38	$\frown$						
29 -	*						
19 -							
9 -							
o -		- I I	- I I I	1 1 1 1		ı ı ı	1
1000		7375		750 cy [MHz]	20125		26500
Freq.	Note	Detector	Spectum		Actual	Limit	Margin
• • • •		Mode	Reading Le		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	d BµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	31.17	10.27	41.43	74	-32.57
4960.00	Н	Average	21.53	10.27	31.80	54	-22.20



Operation M Fundamenta Operation E EUT Pol. :	al Frequenc	ZigBee y : 2480 M Tx CH I E2	lHz Temp High Test∣	Date : p. / Humi. : Engineer : surement Anter	nna Pol. :	2016/3/17 22.7deg_C Pony Horizontal	C/57RH
97 -							
87							
-							
77							FCC RSE PK
67 -							
58							
[(ɯ/ʌŋ	1						FCC RSE AV
Level [[dBu//m]] و1984							
38 -	*						
29 -							
-							
19 -							
9 -							
0							
1000		7375	137 Frequence		20125		26500
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Le		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Peak	40.37	10.27	50.64	74	-23.36
4960.00	Н	Average	25.65	10.27	35.92	54	-18.08



# **11 PEAK POWER SPECTRAL DENSITY**


## **11.1 Standard Applicable:**

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### **11.2 Measurement Equipment Used:**

Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
Spectrum Analyzer	Agilent	N9010A	MY50420195	12/21/2015	12/20/2016						
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2016	01/01/2017						
Attenuator	Mini-Circuit	BW-S10W2+	002	01/02/2016	01/01/2017						
Splitter	Agilent	11636B	N/A	01/02/2016	01/01/2017						

#### 11.3 Test Set-up:



### **11.4 Measurement Procedure:**

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz.
- 5. Set the VBW = 10 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

での時期のでの時期では、 除非另有就明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### **11.5 Measurement Result:**

#### ZigBee mode

Ziabee mode

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2405	4.27	8	PASS
2440	3.18	8	PASS
2480	-14.05	8	PASS

Note: Refer to next page for plots.



## **ZigBee mode Power Spectral Density Test Plot (CH-Low)**



# Power Spectral Density Test Plot (CH-Mid)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Power Spectral Density Test Plot (CH-High)**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-paragrace of this document is unavity and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



# **12 ANTENNA REQUIREMENT**

### 12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

### **12.2 Antenna Connected Construction:**

An embedded-in antenna design is used.

The internal antenna is designed as permanently attached and the external one is designed with a unique connector. There is no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.