



TABLE OF CONTENTS

GENERAL INFORMATION 2

MODIFICATION LIST 5

CONDUCTED POWER LINE TEST 6

 1 TEST INSTRUMENTS & FACILITIES 6

 2 TEST PROCEDURE..... 6

 3 TEST SETUP..... 7

 4 CONFIGURATION OF THE EUT..... 9

 5 EUT OPERATING CONDITION 15

 6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B : 15

 7 RESULT OF CONDUCTED POWER LINE TEST 16

RADIATED EMISSION TEST 17

 1 TEST INSTRUMENTS & FACILITIES 17

 2 TEST PROCEDURE..... 18

 3 TEST SETUP..... 18

 4 CONFIGURATION OF THE EUT..... 19

 5 EUT OPERATING CONDITION 19

 6 LIMIT OF RADIATED EMISSION CLASS B : 19

 7 RESULT OF RADIATED EMISSION TEST 20

PHOTO OF FCC ID LABEL 22

APPENDIX A

PHOTOS OF TEST CONFIGURATION

APPENDIX B

PHOTOS OF EUT

GENERAL INFORMATION

- 1 APPLICANT : DELTA ELECTRONICS INCORPORATED
- 2 ADDRESS : No. 3, Tung Yuan Road,
Chung Li Industrial Zone,
Taoyuan, Taiwan, R. O. C.
- 3 MANUFACTURER : DELTA ELECTRONICS INCORPORATED
- 4 ADDRESS : No. 3, Tung Yuan Road,
Chung Li Industrial Zone,
Taoyuan, Taiwan, R. O. C.
- 5 DESCRIPTION OF EUT :
- EUT : NOTEBOOK
- FCC ID : H79DN-715
- Model Number : DN-715
- Serial # : N/A
- Data Cable : N/A
- Power Cord : UN-SHIELDED
- Power Supply Type : SWITCHING ADAPTOR

5.1 The test mode shown as below were investigate, and worst case of the test modes were shown in the test report.

5.1.1 1024 x 768

5.1.2 800 x 600

5.1.3 640 x 480

The test mode of (2) 800 x 600 is worst case, and the final test data were shown with this test mode.

6 FEATURES OF EUT :

- | | | |
|------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6.1 | CPU: | Intel®Pentium III™ Processor (uPGA2 package) |
| 6.2 | Core logic: | Intel 440BX AGPset |
| 6.3 | L2 Cache: | On-die 256KB cache |
| 6.4 | System BIOS: | SystemSoft® <ul style="list-style-type: none"> • 256KB(2Mbit) Flash EPROM • Includes SMBIOS 2.1(DMI 2.0), ACPI 1.0 |
| 6.5 | Memory: | 2 x 144 pin SODIMM slots |
| 6.6 | Display: | <ul style="list-style-type: none"> • 14.1” TFT LCD • Resolution: 1024 x 768(XGA) |
| 6.7 | Video Processor: | ATI 3D RAGE LT PRO graphics accelerator <ul style="list-style-type: none"> • 2X AGP Bus • HW 3D graphics user interface • 64 bit memory data bus |
| 6.8 | Video Memory: | 8 MB SGRAM |
| 6.8 | CD-ROM: | 12.7mm high <ul style="list-style-type: none"> • average 17X speed, maximum up to 24X speed |
| 6.9 | FDD: | 12.7mm high <ul style="list-style-type: none"> • supports 3.5” disks with 1.44 MB capacity |
| 6.10 | HDD: | <ul style="list-style-type: none"> • Ultra-DMA/33, 2.5”/9.5mm high • higher capacity |
| 6.11 | Keyboard: | <ul style="list-style-type: none"> • 86, 87 or 90 keys • Windows keys • Key spacing: 19mm • Key travel: 3mm |
| 6.12 | Pointing Device: | Touch pad with two buttons |
| 6.13 | PCMCIA: | Supports Type I(2), II(2) and III(1) |
| 6.14 | Audio Processor: | Maestro-3 PCI audio accelerator <ul style="list-style-type: none"> • 3D positional stereo surround support • Two Built-in stereo speakers |

- 6.15 External Connectors:
- Serial port x 1
 - Parallel port (EPP/ECP) x 1
 - VGA monitor port x 1
 - PS/2 keyboard/mouse port x 1
 - USB x 1
 - IR port x 1
 - DC input x 1
 - Stereo Earphone-out port x 1
 - Microphone-in port x 1
 - Line in-port x 1
 - 2 buttons for volume control
 - Port replicator expansion port x 1
 - RJ-11 x 1
 - Kensington Security Lock x 1
 - RCA jack x 1 for TV-out (NTSC/PAL)
- 6.16 Fax/Modem: Internal 56Kbps V.90 PCI Modem (Optional)
- 6.17 AC adapter: Universal AC adapter
- Input: AC 100-240v, 50/60Hz
 - Output: DC 60W, 20V
- 6.18 Accessory: Port Replicator (Option)

MODIFICATION LIST

THE FOLLOWING ACCESSORIES WERE ADDED TO THE EUT DURING TESTING :

1. A core is added on the DC cable of AC/DC adapter at P.C. end.
2. These are nickel-plated housing case.
3. One conductive gasket is paste on the upper case to contact the CD-ROM.
4. One conductive gasket is paste on the upper case nearly CD-ROM to contact the shielding plate.
5. One conductive gasket is paste on the LED board at EAR jack.
6. Five conductive gaskets are pastes on the I/O bracket to contact the shielding plate.
7. Three conductive gaskets are pastes on the upper case to contact the I/O bracket.
8. One conductive gasket is paste on the upper case to contact the PS2 connector.
9. One conductive gaskets are pastes on the ground pads of motherboard (45mm).
10. One conductive gaskets are pastes on the ground pads of motherboard (55mm).
11. One conductive gasket is paste on LCD cable.
12. One conductive gasket is paste on LCD frame.

CONDUCTED POWER LINE TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the conducted test :


Item	Instruments/ Facilities	Specification	Manufacturer	Model #	Date Of Cal.
1	EMI Receiver	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESHS 30	MAR/99
2	LISN	50•/50uH/100A 9KHz ~ 30MHz	SCHWARZ BECK	NNLK 8121	MAR/99
3	LISN	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESH3-Z5	MAR/99
4	ESXS-K1	Version 2.03b	ROHDE & SCHWARZ	1082.9678.02 840.913/246	N/A
5	Cables	10KHz ~ 30MHz		NO : 10	JUL/99

2 TEST PROCEDURE


- 2.1 The EUT was tested according to **ANSI C63.4 - 1992 & CISPR 22**.
- 2.2 The EUT was placed 0.4 meter from the conducting wall of shielding room and kept at least 0.8 meter from any other grounded conducting surface.
- 2.3 The frequency range form 0.15 MHz to 30 MHz was investigated.
- 2.4 The LISN used was 50 Ohm / 50 uHenry as specified by **ANSI C63.4 - 1992 & CISPR 22**.
and AC power source is 110V/60Hz.
- 2.5 All the support peripherals are connect to the other LISN.
- 2.6 Cables and peripherals were moved to find the maximum emission levels for each frequency.

3 TEST SETUP

3.1 Typical : Setup Of Conducted Test

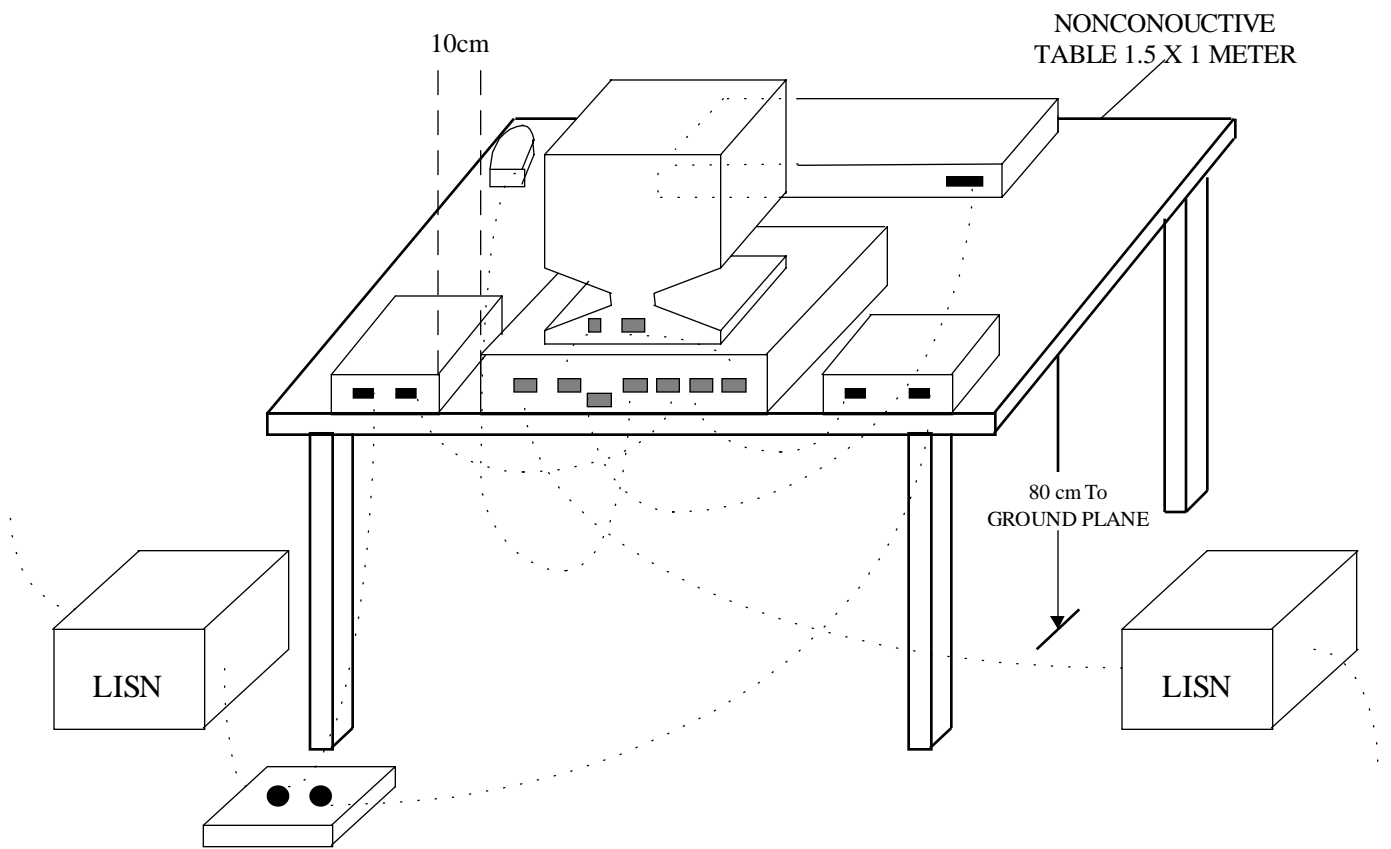

3.2 Block Diagram Of Conducted Test

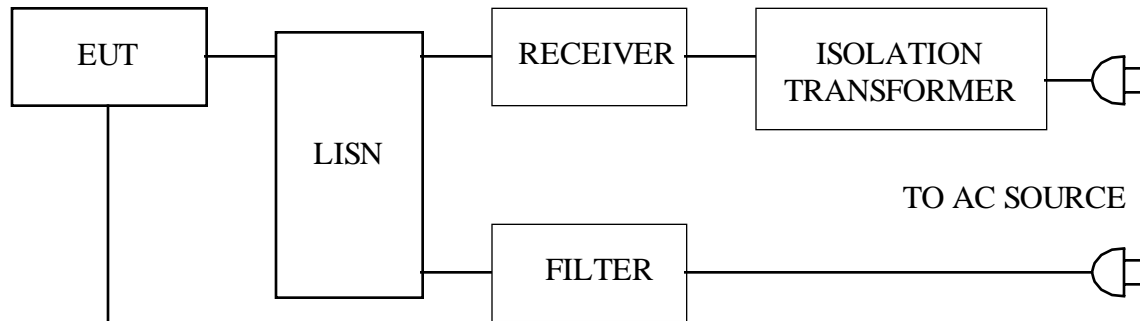

- Monitor
- Printer
- Modem
- Mouse
- Key Board
- TV
- Micro Phone
- Walk Man
- Speaker
- Adaptor
- Network Cable
- Telephone

4 CONFIGURATION OF THE EUT

The EUT was configured according to **ANSI C63.4 - 1992 & CISPR 22**. All I/O ports were connected to the appropriate peripherals. All peripherals and cables are listed below (including internal device) :

4.1 EUT

EUT Type : Proto Type Engineer Type Mass Production
 Condition when received : Good Damage :
 Connector Type : Metal Type Plastic Type
 Device : NOTEBOOK
 Applicant : DELTA
 Manufacturer : DELTA
 Model Number : DN-715
 Serial Number : N/A
 FCC ID : H79DN-715
 Data Cable : N/A
 Power Cord (Adapter) AC : Un-Shielded, 1.5 m
 Power Cord (Adapter) DC : Shielded, 1.3 m

4.2 PERIPHERALS

Monitor
 Manufacturer : HITACHI
 Model Number : CM769ET
 Serial Number : DJ71
 FCC ID : FCC DoC
 Data Cable : Shielded, 1.5 m, Connected to the VGA port
 Power Cord : Un-Shielded, 1.8 m

Printer

Manufacturer : HP
Model Number : DJ400
Serial Number : MY7781C1BB
FCC ID : B94C2642X
Data Cable : Shielded, 1.5 m, Connected to the Printer port
Power Cord & Adaptor : Un-Shielded, 1.8 m

 Modem

Manufacturer : ACEEX
Model Number : 1414
Serial Number : 9013522
FCC ID : IFAXDM1414
Data Cable : Shielded, 1.5 m, Connected to the COM port
Power Cord & Adaptor : Un-Shielded, 1.8 m

 Mouse (PSII)

Manufacturer : HP
Model Number : M-S34
Serial Number : LZA64519290
FCC ID : DZL211029
Data Cable : Shielded, 1.8 m, Connected to the PSII port
Power Cord : N/A



KeyBoard (PSII)

Manufacturer : AST
Model Number : SK-2000REW
Serial Number : N/A
FCC ID : GYUR26SK
Data Cable : Shielded, 1.5 m, Connected to the PSII port
Power Cord : N/A

TV

Manufacturer : NEC
Model Number : C-19R25(T)
Serial Number : N/A
FCC ID : N/A
Data Cable : Shielded, 1.5 m, Connected to the AV/S-Video port
Power Cord : Un-Shielded

Micro Phone

Manufacturer : SR
Model Number : SR-M02
Serial Number : N/A
FCC ID : N/A
Data Cable : Un-Shielded, Connected to the MIC port
Power Cord : N/A



Walk Man

Manufacturer : National
Model Number : RQ-310
Serial Number : N/A
FCC ID : N/A
Data Cable : Shielded, 1.5 m, Connected to the Line In port
Power Cord : N/A

Speaker

Manufacturer : JASS HIPSTER
Model Number : J-008
Serial Number : N/A
FCC ID : N/A
Data Cable : Un-Shielded, 1.5 m, Connected to the Line Out port
Power Cord : N/A

Telephone :

Manufacturer : U-TECH
Model Number : SA-917
Serial Number : 308004060
FCC ID : N/A
Data Cable : Un-Shielded
Power Cord : N/A

4.3 Internal Devices

 CD ROM

Manufacturer : MATSUSHITA
Model Number : CR-175-D
Serial Number : 9803DKA60923
FCC ID : N/A
Data Cable : Un-Shielded, 0.4 m
Power Cord : Un-Shielded, 0.4 m

 HDD

Manufacturer : HITACHI
Model Number : DK239A-65
Serial Number : QW7LL112312
FCC ID : N/A
Data Cable : Un-Shielded, 0.4 m
Power Cord : Un-Shielded, 0.4 m

 FDD

Manufacturer : NEC
Model Number : FD1238T
Serial Number : 134-506792-036-1
FCC ID : N/A
Data Cable : Un-Shielded, 0.4 m
Power Cord : Un-Shielded, 0.4 m



LCD Pannel

Manufacturer : SAMSUNG
Model Number : LT141X5-124
Serial Number : 3N9K57807D
FCC ID : N/A
Data Cable : Un-Shielded, 0.2 m
Power Cord : Un-Shielded, 0.2 m

4.4 REMARK :

5 EUT OPERATING CONDITION

5.1 Operating condition is according to **ANSI C63.4 - 1992 & CISPR 22.**

5.2 The oscillator frequency of the EUT were 100 MHz.
CPU : Intel PIII 500 MHz

5.3 Turn on the power of all equipments.

5.4 Test program sent “H” pattern to peripherals as following :

- 5.4.1 Printer
- 5.4.2 Monitor
- 5.4.3 Modem
- 5.4.4 Keyboard

5.5 The photos of conducted test configuration, please refer to appendix A.

6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B :

CISPR 22

Frequency Range	Quasi Peak	Average
0.15 ~ 0.5 MHz	66 - 56 dBuV	56 - 46 dBuV
0.5 ~ 5 MHz	56 dBuV	46 dBuV
5 ~ 30 MHz	60 dBuV	50 dBuV

6.1 In the above table, the tighter limit applies at the band edges.

7 RESULT OF CONDUCTED POWER LINE TEST

7.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.

7.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.

7.3 Temperature : 27 °, Humidity : 75 % RH.

7.4 Deviations from the specifications : None

7.5 Quasi-Peak :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.190	53.86	56.23	64.04
0.219	47.38	47.96	62.86
0.508	36.23	33.72	56.00
1.960	36.84	35.31	56.00
5.375	35.50	34.68	60.00
24.640	19.72	20.32	60.00

7.6 Average :

Frequency (MHz)	Line 1 (dBuV)	Line 2 (dBuV)	Limit (dBuV)
0.190	47.73	47.22	54.04
0.312	39.62	40.81	49.92
0.567	33.49	33.40	46.00
1.960	36.74	35.07	46.00
5.375	33.53	32.74	50.00
24.640	16.82	16.74	50.00

REMARK			
1.	Model	:	DN-715
2.	Measuring mode	:	800 x 600
3.	Uncertainty in conduction emission measured	:	< ± 2.0dB.
4.	“ * ”,	means this data is worse case emission level.	
5.	Result : PASSED		

RADIATED EMISSION TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the radiated emission test :

Item	Instruments /facilities	Specification	Manufacturer	Model # / S/N#	Location	Date of Cal.
1	OPEN AREA TEST SITE	<input checked="" type="checkbox"/> OATS 1 <input type="checkbox"/> OATS 2				NOV/99 JUN/99
2	EMI TEST RECEIVER	20MHz ~ 5GHz	ROHDE & SCHWARZ	ESBI 845636/007	Open Site I	SEP/99
3	PRE-AMPLIFIER	0.1MHz ~ 1.3 GHz	HP	8447D 1937A02095	Open Site II	MAY/99
4	EMI TEST RECEIVER	20Hz ~ 26.5GHz	ROHDE & SCHWARZ	ESMI 845442/006	Open Site II	APR/99
5	PRE-AMPLIFIER	20MHz ~ 7GHz	ROHDE & SCHWARZ	ESMI-Z7 664126/008	Open Site I	SEP/99
6	ANTENNA (BI-LOG)	25MHz ~ 2GHz	SCHAFFNER	CBL6112B S/N : 2614	Open Site II	JUN/99
7	ANTENNA (BI-LOG)	25MHz ~ 2GHz	SCHAFFNER	CBL6112B S/N : 2611	Open Site I	JUN/99
8	CABLES	30MHz ~ 1GHz		No. 2, No. 4 No. 1, No. 3	OATS 1 OATS 2	NOV/99 JUN/99
9	ANTENNA (DIPOLE)	30 ~ 300MHz	ROHDE & SCHWARZ	HZ-12 842899/08		JUL/99
10	ANTENNA (DIPOLE)	300 ~ 1000MHz	ROHDE & SCHWARZ	HZ-13 842007/0004		JUL/99
11	EMIVM	30 ~ 1000MHz	AUDIX	A582445 A582443	OATS 1 OATS 2	N/A


Note : 1. Items 1 ~ 8 upon which need to calibrated are with period of 1 year, except item 9-10.

2. Items 2 (for Site 1) is used for the final measurement.

2 TEST PROCEDURE

- 2.1 The EUT was test according to **ANSI C63.4 - 1992 & CISPR 22**.
- 2.2 The radiated test was performed at HomeTek Lab's Open Site I.
- 2.3 The frequency range from 30 MHz to 1 GHz, the measurement were made at 10 meters, with a BI-log antenna.

3 TEST SETUP

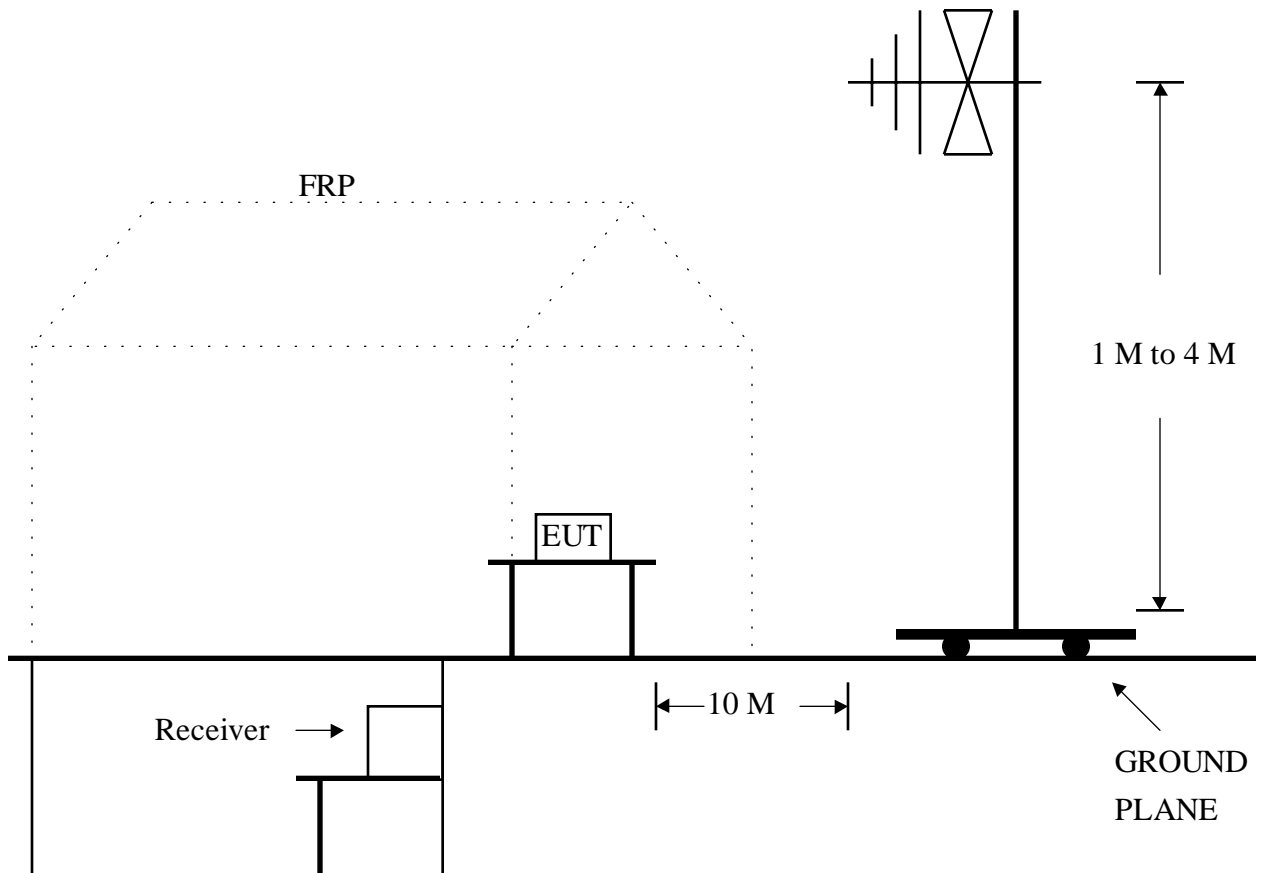

4 CONFIGURATION OF THE EUT

Same as “Conducted Power Line test”, section 4

5 EUT OPERATING CONDITION

5.1 Same as “Conducted Power Line test”, section 5

5.2 The radiated emission in the frequency range from 30 MHz - 1000 MHz was test in a horizontal and vertical polarization at HomeTek Lab’s open site I.

5.3 The photos of radiated test configuration, please refer to appendix A.

6 LIMIT OF RADIATED EMISSION CLASS B :

CISPR 22

Frequency (MHz)	Measurement Distance	Limit (dBuV/m)
30 - 230	10 (M)	30
230 - 1000	10 (M)	37

6.1 The tighter limit shall apply at the edge between two frequency bands.

6.2 Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7 RESULT OF RADIATED EMISSION TEST

- 7.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 7.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 7.3 The measurements were made at 10 meters of HomeTek Lab's open site I.
- 7.4 Temperature : 27 °, Humidity : 75 % RH.
- 7.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
76.04	13.23	6.00	0.71	19.94	30
135.38	11.82	10.90	1.03	23.75	30
153.42	15.43	9.58	1.04	26.05	30
195.42	18.40	8.90	1.22	28.52	30
224.73	16.30	9.04	1.32	26.66	30
233.18	21.09	9.74	1.35	32.18	37
350.03	17.31	14.16	1.79	33.26	37
600.13	11.39	18.70	2.32	32.41	37

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 600.13 MHz .
- Corrected Reading : (11.39) + (18.70) + (2.32) = 32.41 . (Emission Level)

7.6 Radiated Emission data : **Vertical**


Frequency (MHz)	Reading Level (dBuV)	ANT factor (dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)
36.01	10.34	14.60	0.43	25.37	30
72.51	15.19	5.40	0.71	21.30	30
120.02	13.76	11.60	0.91	26.27	30
183.51	16.58	8.36	1.19	26.13	30
200.16	14.42	9.00	1.27	24.69	30
300.03	17.40	13.00	1.50	31.90	37
358.25	17.20	14.44	1.76	33.40	37
600.10	12.30	18.70	2.32	33.32	37

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 600.10 MHz .
- Corrected Reading : (12.30) + (18.70) + (2.32) = 33.32 . (Emission Level)

REMARK	
1.	Model : DN-715
2.	Measuring mode : 800 x 600
3.	Uncertainty in radiated emission measured : < ± 4.0dB.
4.	“ * ”, means this data is worse case emission level.
5.	Result : PASSED

PHOTO OF FCC ID LABEL

SAMPLE OF FCC ID LABEL :

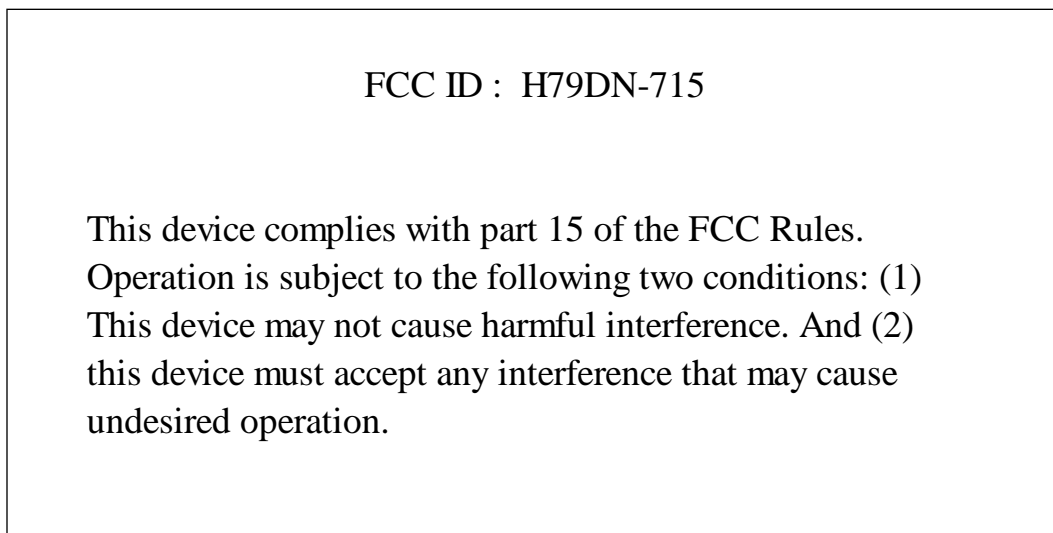**Please refer to appendix B photo of ID location.**