

FCC Part 15 EMI TEST REPORT

of

E.U.T. : LauncherPlus
FCC ID. : H79ESSQL300
Model No. : QL300

for

APPLICANT : Delta Electronics, Inc.
ADDRESS : 3, Tungyuan Road, Chungli Industrial Zone,
32063 Taoyuan County TAIWAN

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: emc@etc.org.tw

Report Number : 17-03-RBF-006-01

TEST REPORT CERTIFICATION

Applicant : Delta Electronics, Inc.
3, Tungyuan Road, Chungli Industrial Zone, 32063 Taoyuan County
TAIWAN

Manufacturer : Delta Electronics, Inc.
3, Tungyuan Road, Chungli Industrial Zone, 32063 Taoyuan County
TAIWAN

Description of EUT

- a) Type of EUT : LauncherPlus
- b) Trade Name : Delta, Vivitek
- c) Model No. : QL300
- d) Power Supply : DC 5V from USB

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Emission Bandwidth	Pass
Output Power	Pass
100 kHz Bandwidth of Band Edges	Pass
Power Density	Pass
Out-of-Band Conducted Emission	Pass
Duty Cycle	N.A.

Date Test Item Received : Mar. 06, 2017
Date Test Campaign Completed : Apr. 05, 2017
Date of Issue : Apr. 11, 2017

Test Engineer : Peter Liao
(Peter Liao, Engineer)

Approve & Authorized Signer : S. S. Liou
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN




Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation	31
4.6 Photos of Radiation Measuring Setup.....	32
5 CONDUCTED EMISSION MEASUREMENT.....	34
5.1 Standard Applicable	34
5.2 Measurement Procedure.....	34
5.3 Conducted Emission Data	35
5.4 Result Data Calculation	37
5.5 Conducted Measurement Equipment	37
5.6 Photos of Conduction Measuring Setup.....	38
6 ANTENNA REQUIREMENT	39
6.1 Standard Applicable	39
6.2 Antenna Construction and Directional Gain.....	39
7 EMISSION BANDWIDTH MEASUREMENT.....	40
7.1 Standard Applicable	40
7.2 Measurement Procedure.....	40

7.3 Measurement Equipment	40
7.4 Measurement Data	41
8 OUTPUT POWER MEASUREMENT	54
8.1 Standard Applicable	54
8.2 Measurement Procedure	54
8.3 Measurement Equipment	54
8.4 Measurement Data	55
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	57
9.1 Standard Applicable	57
9.2 Measurement Procedure	57
9.3 Measurement Equipment	57
9.4 Measurement Data	58
10 POWER DENSITY MEASUREMENT	65
10.1 Standard Applicable	65
10.2 Measurement Procedure	65
10.3 Measurement Equipment	65
10.4 Measurement Data	66
11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT	80
11.1 Standard Applicable	80
11.2 Measurement Procedure	80
11.3 Measurement Equipment	80
11.4 Measurement Data	81
12. DUTY CYCLE	100
12.1 Standard Applicable	100
12.2 Measurement Equipment	100
12.3 Measurement Data	100

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : LauncherPlus
- b) Trade Name : Delta, Vivitek
- c) Model No. : QL300
- d) Power Supply : DC 5V from USB

1.2 Characteristics of Device

The product is a LauncherPlus.

Specification	
Product / Model	LauncherPlus / QL300
Power Consumption	USB , 5VDC, 500mA
Interface	USB
Buttons	5
Dimensions	70 x 70 x 15 mm (L x W x H)
Weight	60g
OS supported	Window Windos 7 and above / Mac 10.7 and above
Features	Full "Desktop Streamer" features
Software Upgradeable	Yes

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v03r05.

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
LauncherPlus *	Delta Electronics, Inc.	QL300	0.1m Shielded USB Cable
Notebook PC	ASUS	X555L	0.9m Unshielded AC Power Cord

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


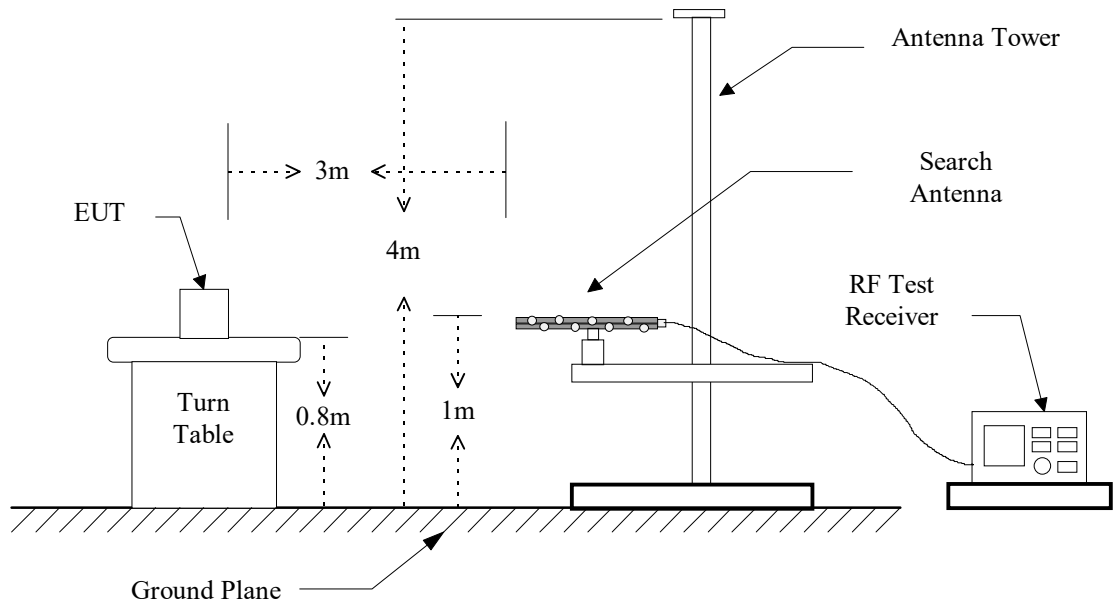


Figure 2 : Frequencies measured above 1 GHz configuration

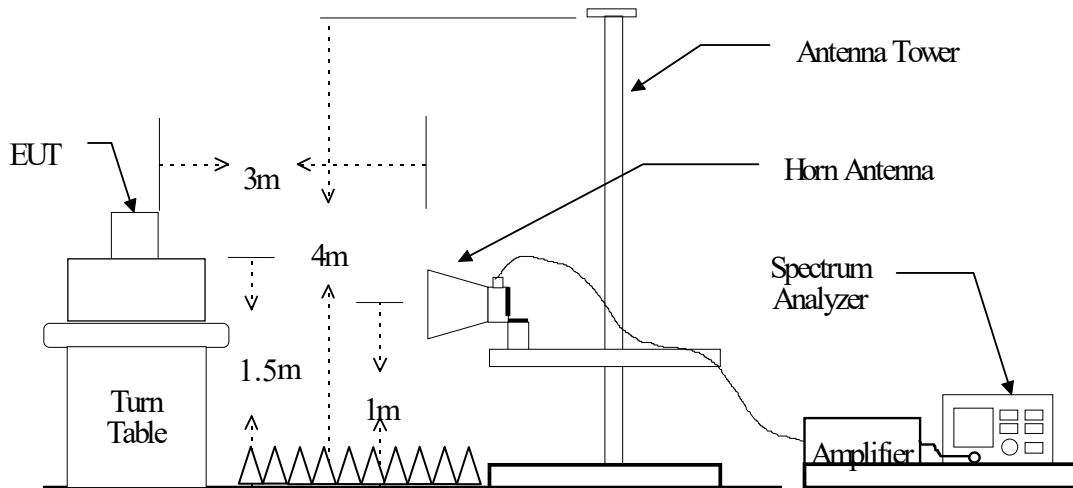

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
EMI Test Receiver	Rohde & Schwarz	ESCI	2016/09/07	2017/09/06
Double Ridged Antenna	EMCO	3115	2016/10/05	2017/10/04
Double Ridged Guide Horn Antenna	EMCO	3116	2016/10/05	2017/10/04
Log-periodic Antenna	EMCO	3146	2016/07/05	2017/07/04
Biconical Antenna	EMCO	3110B	2016/07/05	2017/07/04
Amplifier	HP	8449B	2016/10/14	2017/10/13
Amplifier	HP	8447D	2016/12/05	2017/12/04
Amplifier	HP	83051A	2016/07/18	2017/07/17

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

A. (802.11b)

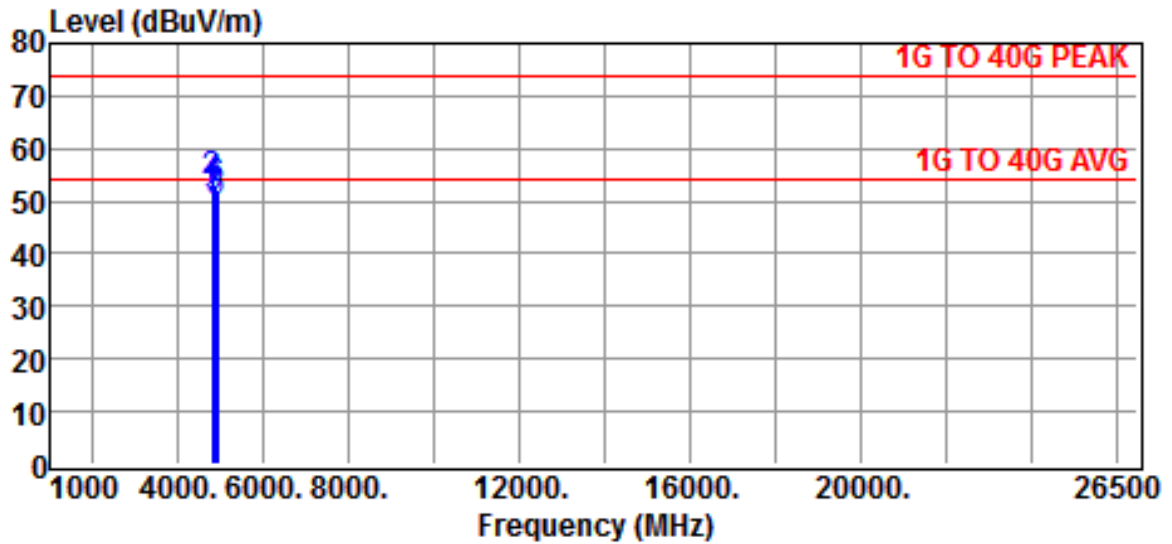


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:802.11B MODE		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
4824.0000	50.09	1.31	51.40	54.00	-2.60	Average
4824.0000	52.19	1.31	53.50	74.00	-20.50	Peak
4874.0000	49.53	1.47	51.00	54.00	-3.00	Average
4874.0000	51.53	1.47	53.00	74.00	-21.00	Peak
4924.0000	48.35	1.65	50.00	54.00	-4.00	Average
4924.0000	50.45	1.65	52.10	74.00	-21.90	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

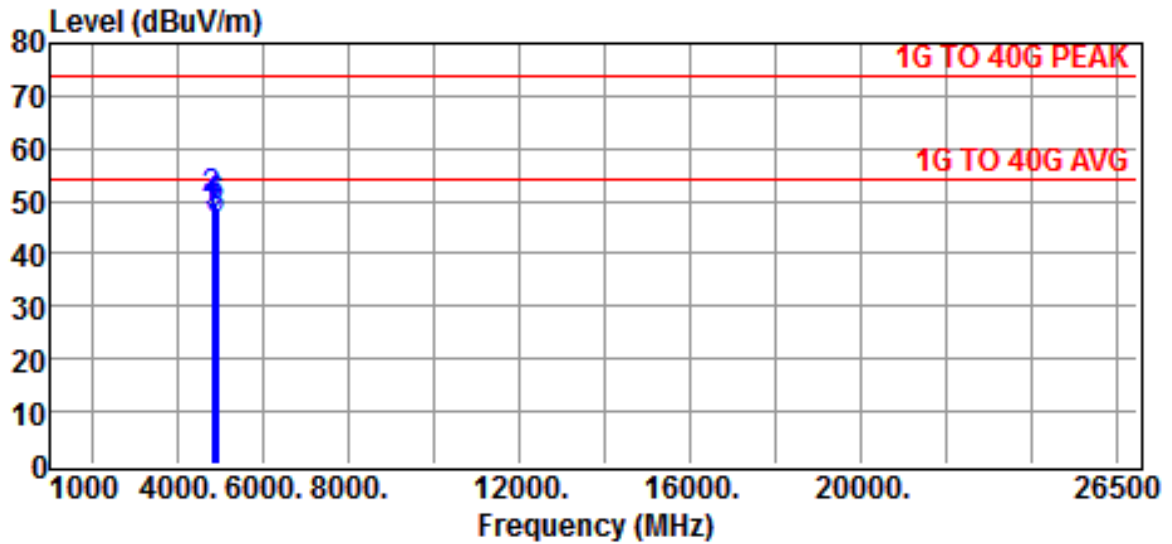


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:802.11B MODE		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4824.0000	46.99	1.31	48.30	54.00	-5.70	Average
4824.0000	49.09	1.31	50.40	74.00	-23.60	Peak
4874.0000	45.73	1.47	47.20	54.00	-6.80	Average
4874.0000	47.93	1.47	49.40	74.00	-24.60	Peak
4924.0000	44.85	1.65	46.50	54.00	-7.50	Average
4924.0000	47.05	1.65	48.70	74.00	-25.30	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

B. (802.11g)

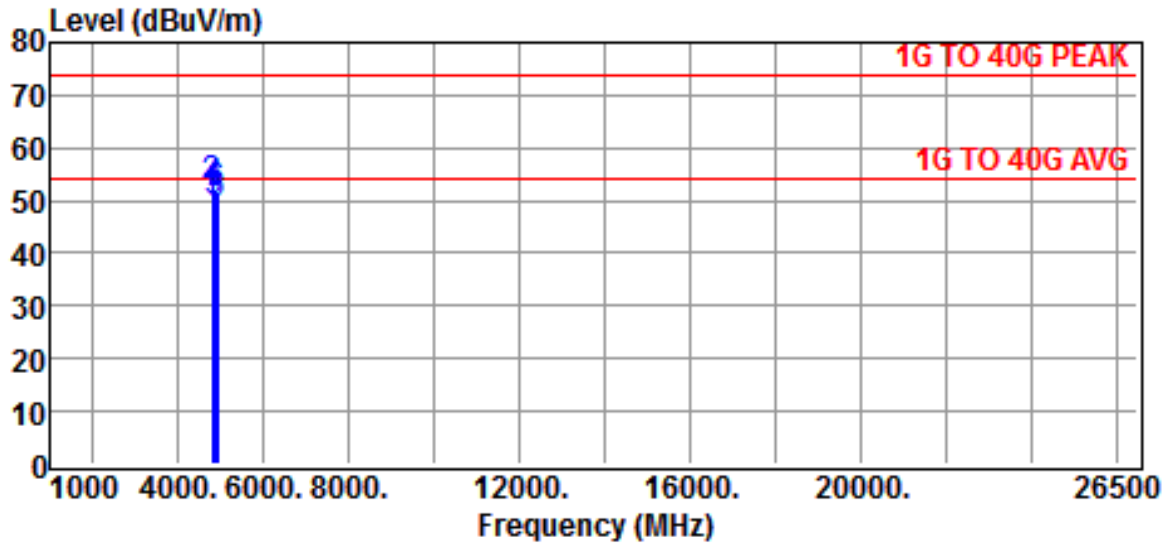


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	: 802.11G MODE		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4824.0000	49.09	1.31	50.40	54.00	-3.60	Average
4824.0000	51.39	1.31	52.70	74.00	-21.30	Peak
4874.0000	48.53	1.47	50.00	54.00	-4.00	Average
4874.0000	50.53	1.47	52.00	74.00	-22.00	Peak
4924.0000	47.55	1.65	49.20	54.00	-4.80	Average
4924.0000	49.65	1.65	51.30	74.00	-22.70	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

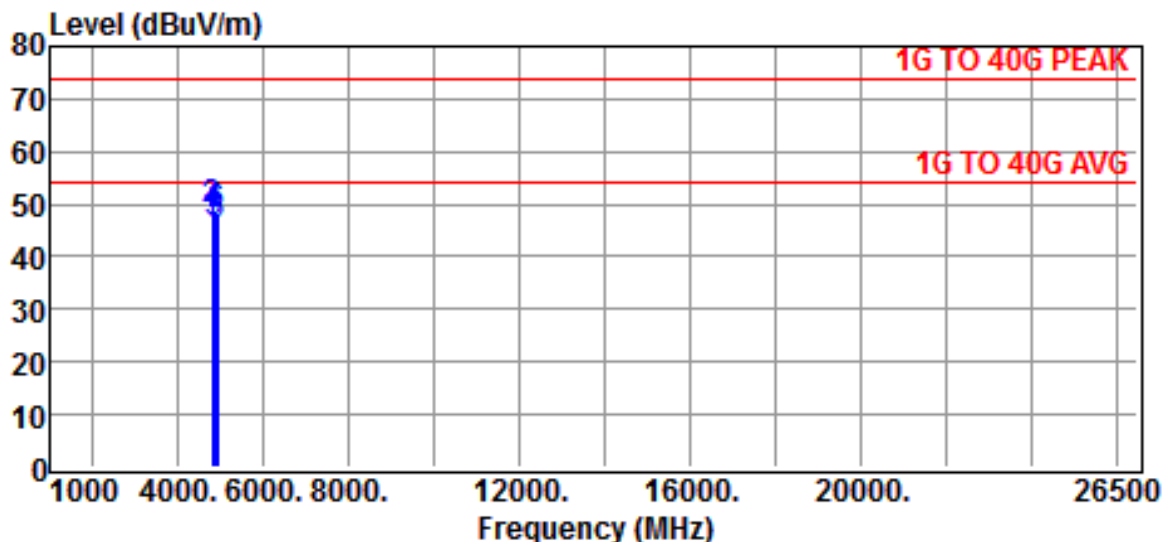


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:802.11G MODE		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits dBµV/m	Over limit dB	Detector
4824.0000	45.79	1.31	47.10	54.00	-6.90	Average
4824.0000	47.79	1.31	49.10	74.00	-24.90	Peak
4874.0000	44.93	1.47	46.40	54.00	-7.60	Average
4874.0000	47.03	1.47	48.50	74.00	-25.50	Peak
4924.0000	44.15	1.65	45.80	54.00	-8.20	Average
4924.0000	46.25	1.65	47.90	74.00	-26.10	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

C. (802.11n HT-20)

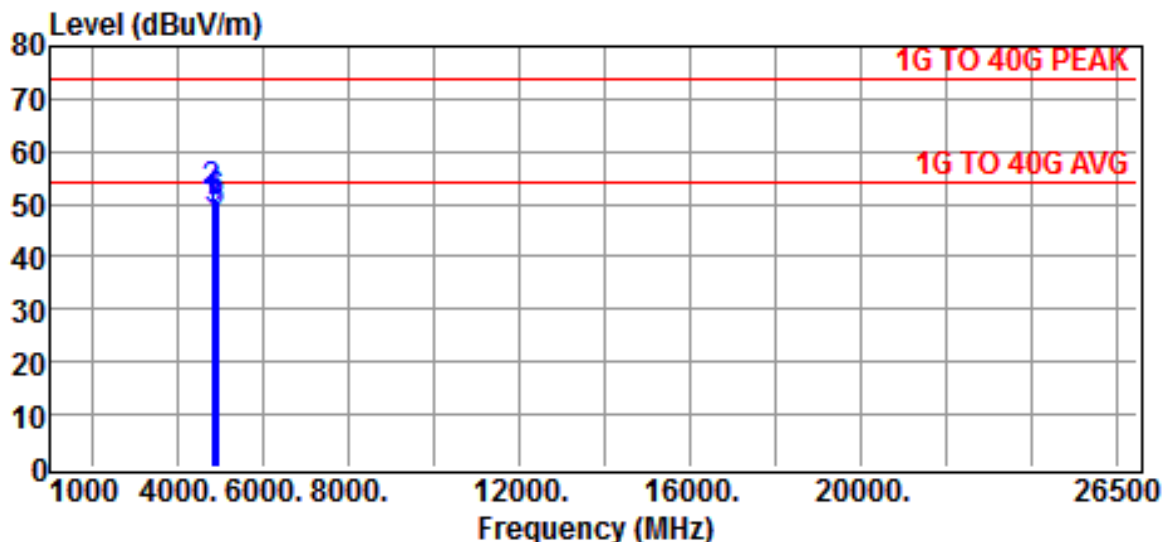


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:11N20		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4824.0000	48.59	1.31	49.90	54.00	-4.10	Average
4824.0000	50.69	1.31	52.00	74.00	-22.00	Peak
4874.0000	47.63	1.47	49.10	54.00	-4.90	Average
4874.0000	49.73	1.47	51.20	74.00	-22.80	Peak
4924.0000	46.55	1.65	48.20	54.00	-5.80	Average
4924.0000	48.75	1.65	50.40	74.00	-23.60	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

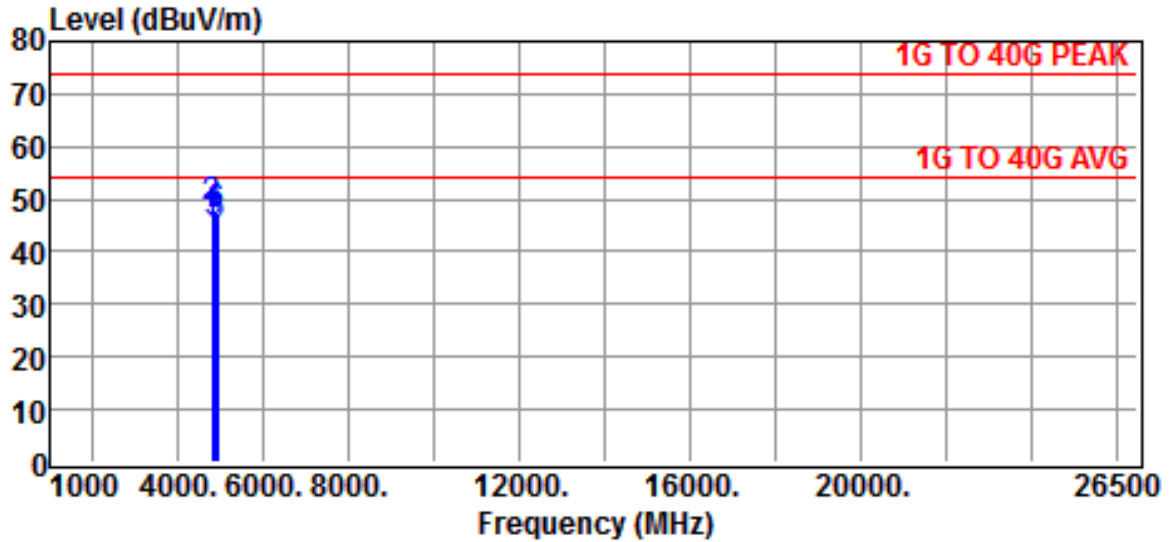


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:11N20		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4824.0000	44.89	1.31	46.20	54.00	-7.80	Average
4824.0000	46.99	1.31	48.30	74.00	-25.70	Peak
4874.0000	43.93	1.47	45.40	54.00	-8.60	Average
4874.0000	46.03	1.47	47.50	74.00	-26.50	Peak
4924.0000	43.25	1.65	44.90	54.00	-9.10	Average
4924.0000	45.35	1.65	47.00	74.00	-27.00	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

D. (802.11n HT-40)

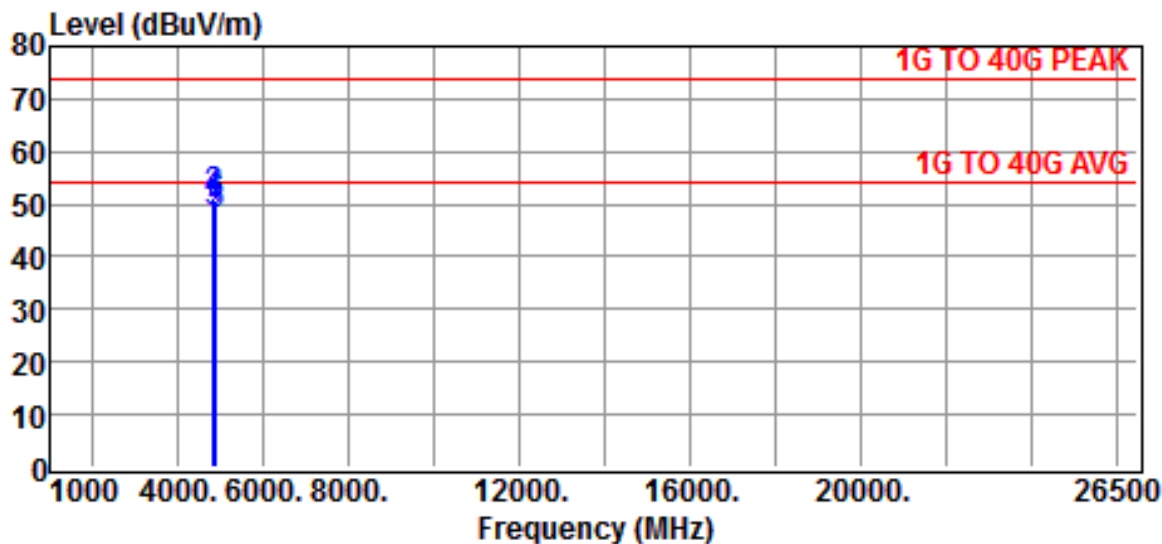


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:11N40		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4844.0000	47.83	1.37	49.20	54.00	-4.80	Average
4844.0000	50.03	1.37	51.40	74.00	-22.60	Peak
4874.0000	47.03	1.47	48.50	54.00	-5.50	Average
4874.0000	49.13	1.47	50.60	74.00	-23.40	Peak
4904.0000	46.31	1.59	47.90	54.00	-6.10	Average
4904.0000	48.41	1.59	50.00	74.00	-24.00	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

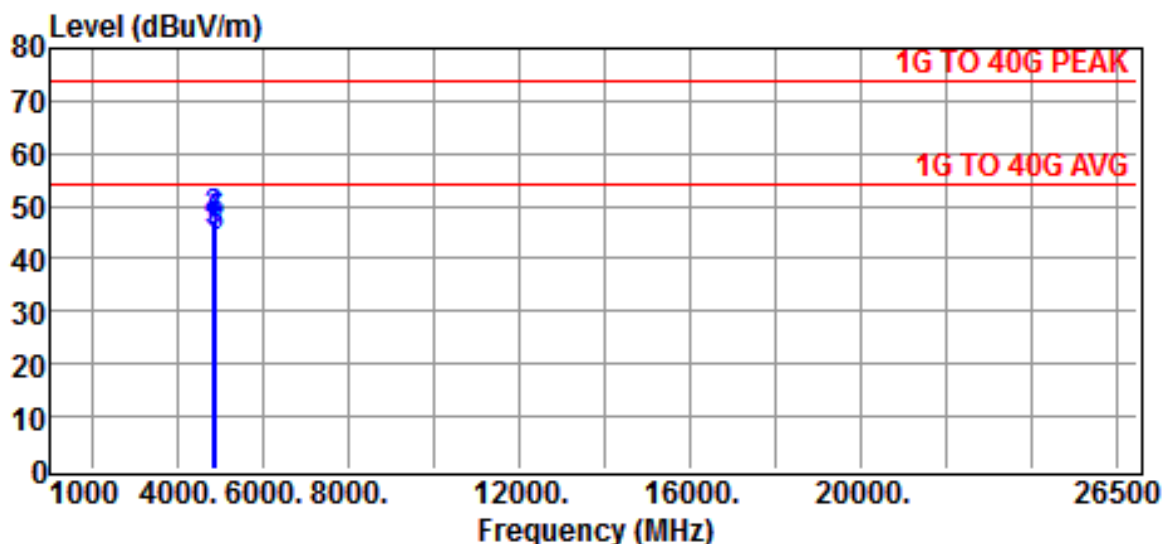

Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:11N40		
Test Mode	:TX RX-LO 2412 - MI 2437 - HI 2462MHz		


Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
4844.0000	43.83	1.37	45.20	54.00	-8.80	Average
4844.0000	46.03	1.37	47.40	74.00	-26.60	Peak
4874.0000	43.33	1.47	44.80	54.00	-9.20	Average
4874.0000	45.43	1.47	46.90	74.00	-27.10	Peak
4904.0000	44.71	1.59	46.30	74.00	-27.70	Peak
4904.0000	42.51	1.59	44.10	74.00	-29.90	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result

4.4.2 Radiated Emission of Restricted bands

Mode: 802.11b

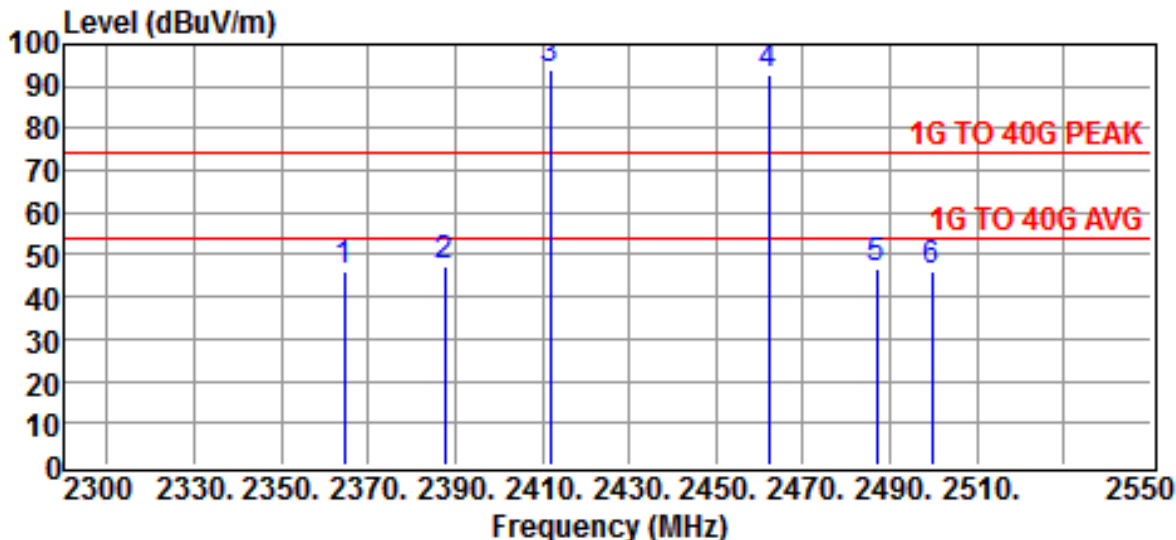


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11B

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
2364.5000	51.84	-5.67	46.17	54.00	-7.83	Peak
2387.5000	52.83	-5.60	47.23	54.00	-6.77	Peak
2412.0000	99.54	-5.56	93.98	-	-	Peak
2462.0000	98.14	-5.45	92.69	-	-	Peak
2487.0000	51.87	-5.40	46.47	54.00	-7.53	Peak
2499.5000	51.50	-5.36	46.14	54.00	-7.86	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

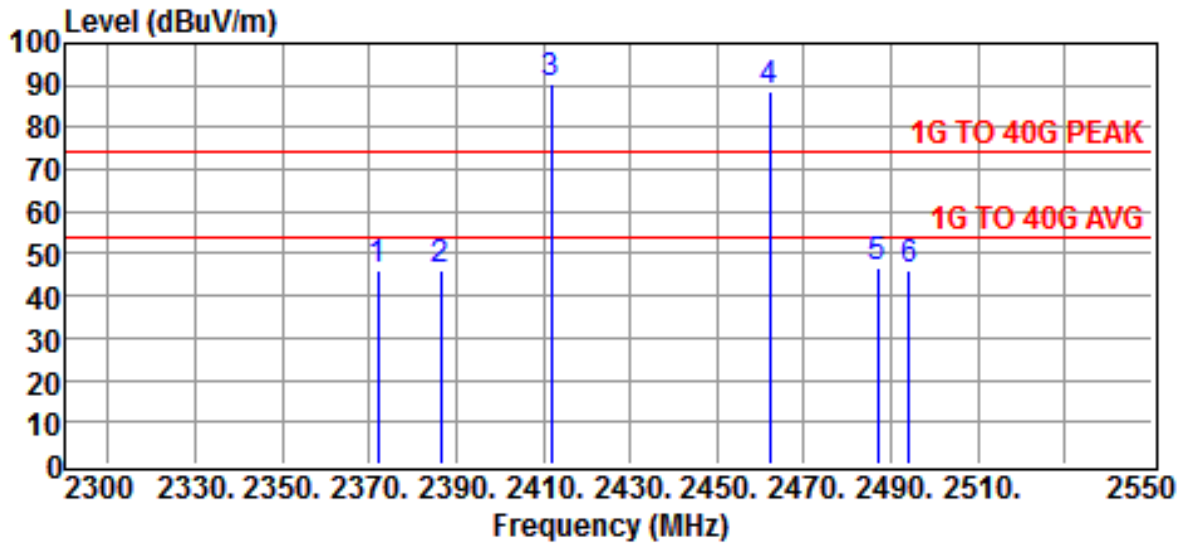


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11B

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2372.0000	51.77	-5.63	46.14	54.00	-7.86	Peak
2386.5000	51.77	-5.60	46.17	54.00	-7.83	Peak
2412.0000	95.95	-5.56	90.39	-	-	Peak
2462.0000	94.14	-5.45	88.69	-	-	Peak
2487.0000	51.87	-5.40	46.47	54.00	-7.53	Peak
2494.0000	51.40	-5.36	46.04	54.00	-7.96	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

Mode: 802.11g

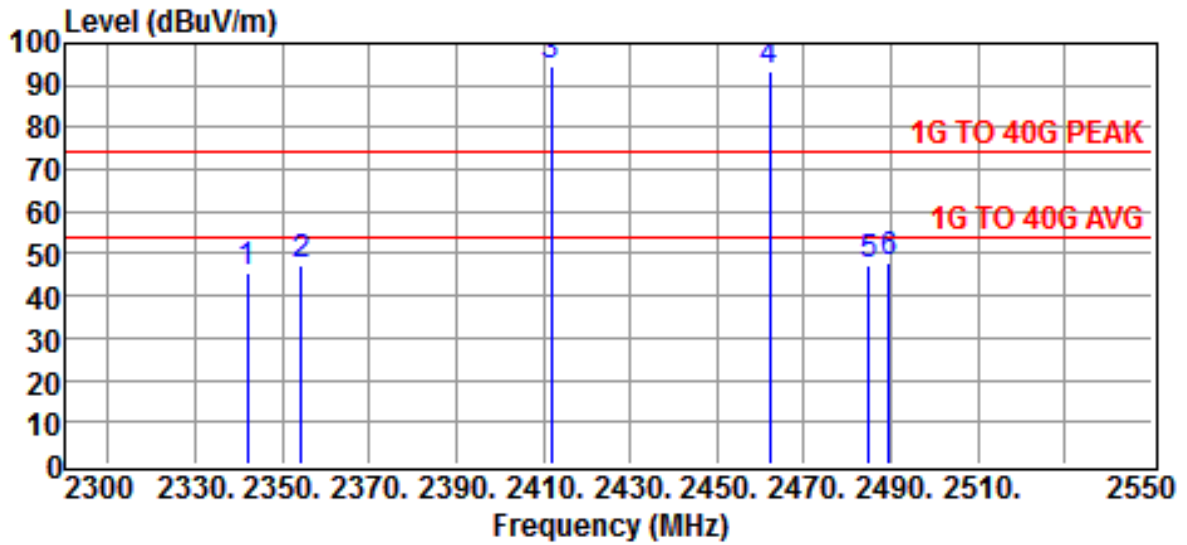


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11G

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2342.0000	51.27	-5.71	45.56	54.00	-8.44	Peak
2354.5000	52.93	-5.67	47.26	54.00	-6.74	Peak
2412.0000	100.36	-5.56	94.80	-	-	Peak
2462.0000	98.65	-5.45	93.20	-	-	Peak
2485.0000	52.62	-5.40	47.22	54.00	-6.78	Peak
2489.5000	53.27	-5.36	47.91	54.00	-6.09	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

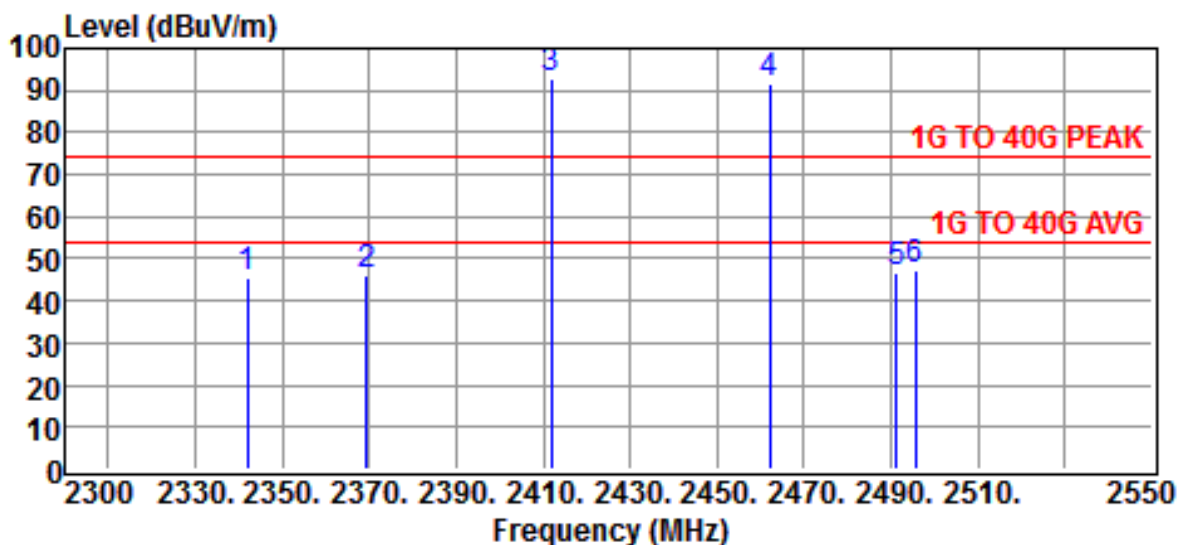


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11G

Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
2342.0000	51.27	-5.71	45.56	54.00	-8.44	Peak
2369.5000	52.02	-5.63	46.39	54.00	-7.61	Peak
2412.0000	98.46	-5.56	92.90	-	-	Peak
2462.0000	97.35	-5.45	91.90	-	-	Peak
2491.2500	51.80	-5.36	46.44	54.00	-7.56	Peak
2495.5000	52.52	-5.36	47.16	54.00	-6.84	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

Mode: 802.11n HT-20

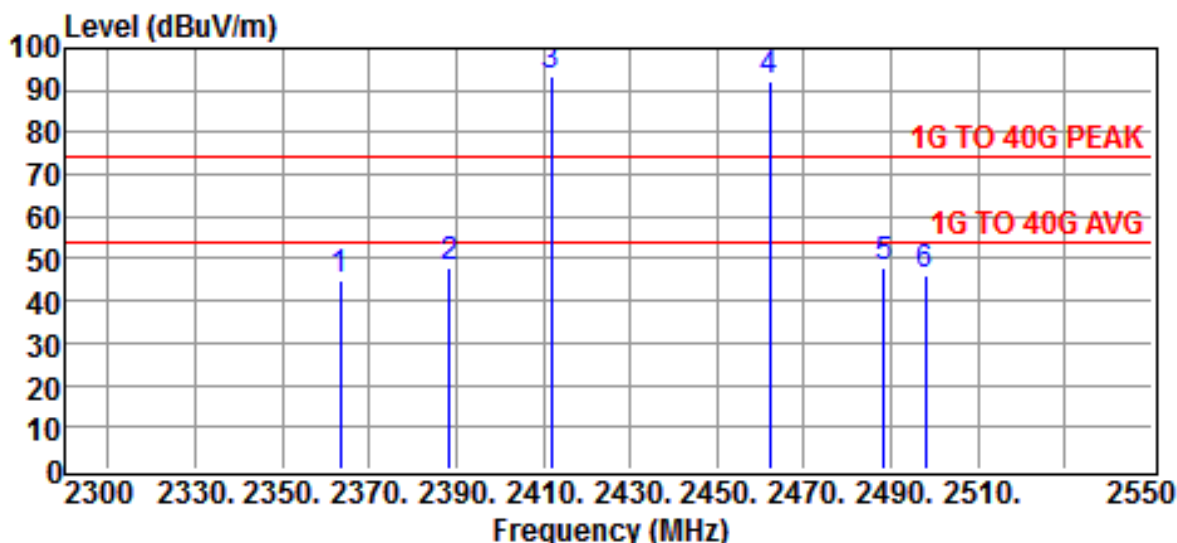


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11N20

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2363.5000	50.66	-5.67	44.99	54.00	-9.01	Peak
2388.5000	53.41	-5.60	47.81	54.00	-6.19	Peak
2412.0000	99.06	-5.56	93.50	-	-	Peak
2462.0000	97.45	-5.45	92.00	-	-	Peak
2488.5000	53.22	-5.36	47.86	54.00	-6.14	Peak
2498.0000	51.44	-5.36	46.08	54.00	-7.92	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

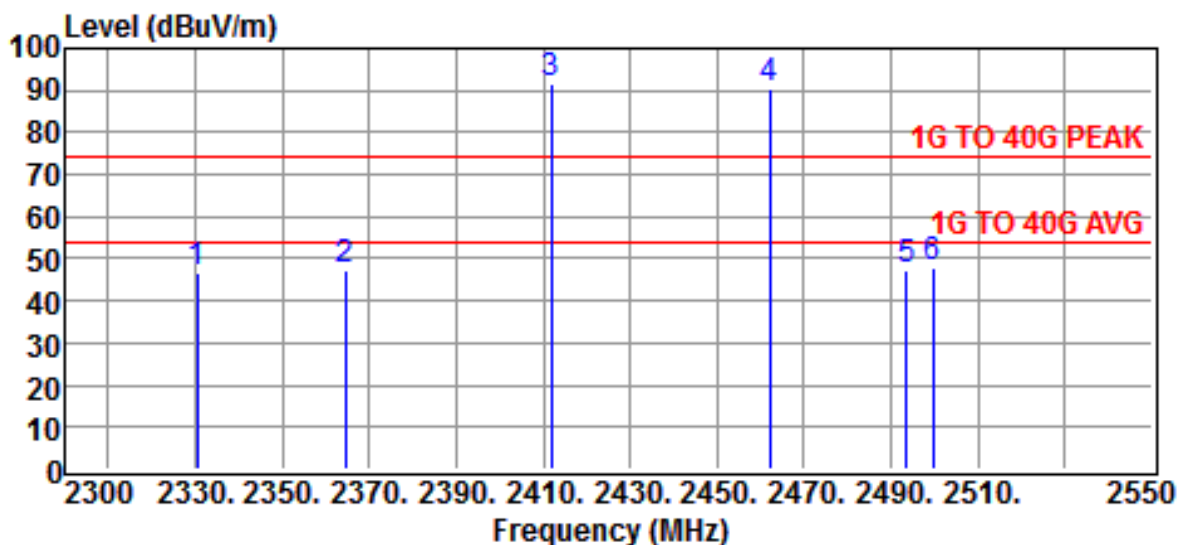


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11N20

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2330.5000	52.38	-5.76	46.62	54.00	-7.38	Peak
2364.5000	52.91	-5.67	47.24	54.00	-6.76	Peak
2412.0000	97.36	-5.56	91.80	-	-	Peak
2462.0000	96.15	-5.45	90.70	-	-	Peak
2493.5000	52.77	-5.36	47.41	54.00	-6.59	Peak
2499.5000	53.13	-5.36	47.77	54.00	-6.23	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

Mode: 802.11n HT-40

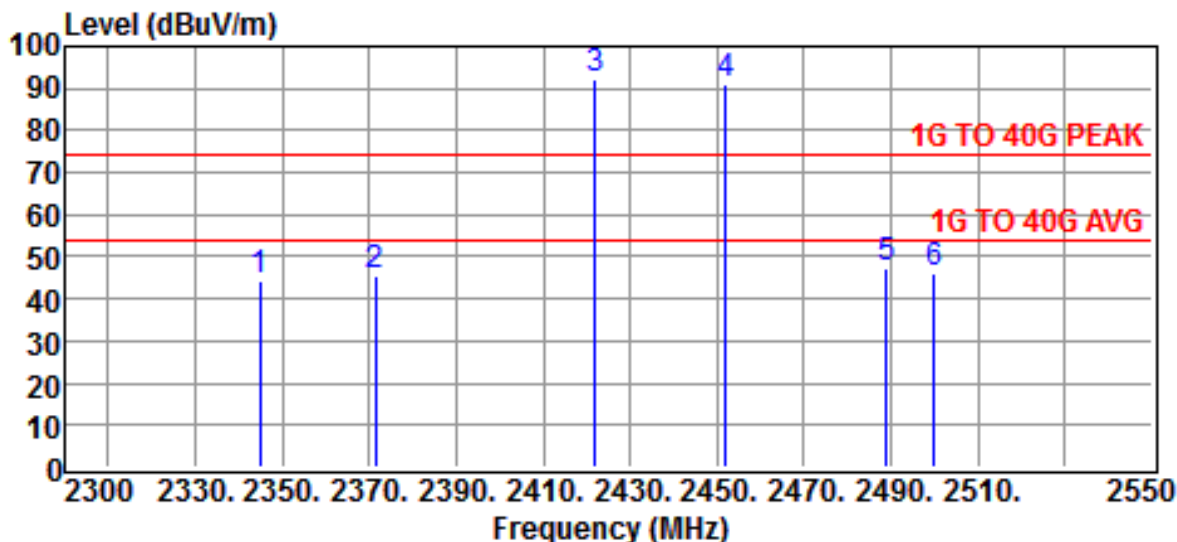


Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11N40

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
2345.0000	50.19	-5.71	44.48	54.00	-9.52	Peak
2371.5000	51.03	-5.63	45.40	54.00	-8.60	Peak
2422.0000	97.82	-5.52	92.30	-	-	Peak
2452.0000	96.48	-5.48	91.00	-	-	Peak
2489.0000	52.48	-5.36	47.12	54.00	-6.88	Peak
2500.0000	51.53	-5.36	46.17	54.00	-7.83	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

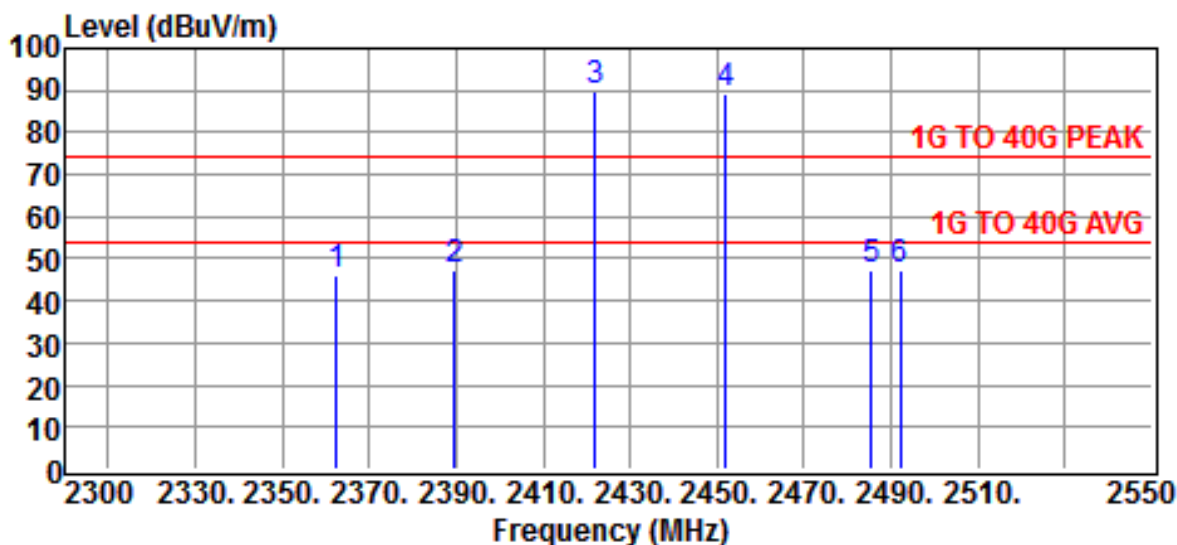

Site	:CHAMBER#2	Date	:2017-03-11
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:DC 5V (POWER FROM PC)	Temp.	:25 °C
Engineer	:Peter Liao	Humi.	:65 %
Test Mode	:OPERATION MODE	Test Mode	:11N40


Freq MHz	Reading dBµV	Correction Factor dB	Result dBµV/m	Limits (AVG) dBµV/m	Over limit dB	Detector
2362.5000	51.84	-5.67	46.17	54.00	-7.83	Peak
2389.7500	52.70	-5.60	47.10	54.00	-6.90	Peak
2422.0000	95.62	-5.52	90.10	-	-	Peak
2452.0000	94.68	-5.48	89.20	-	-	Peak
2485.5000	52.47	-5.40	47.07	54.00	-6.93	Peak
2492.0000	52.77	-5.36	47.41	54.00	-6.59	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.3 Other Emission

a) Emission frequencies below 1 GHz

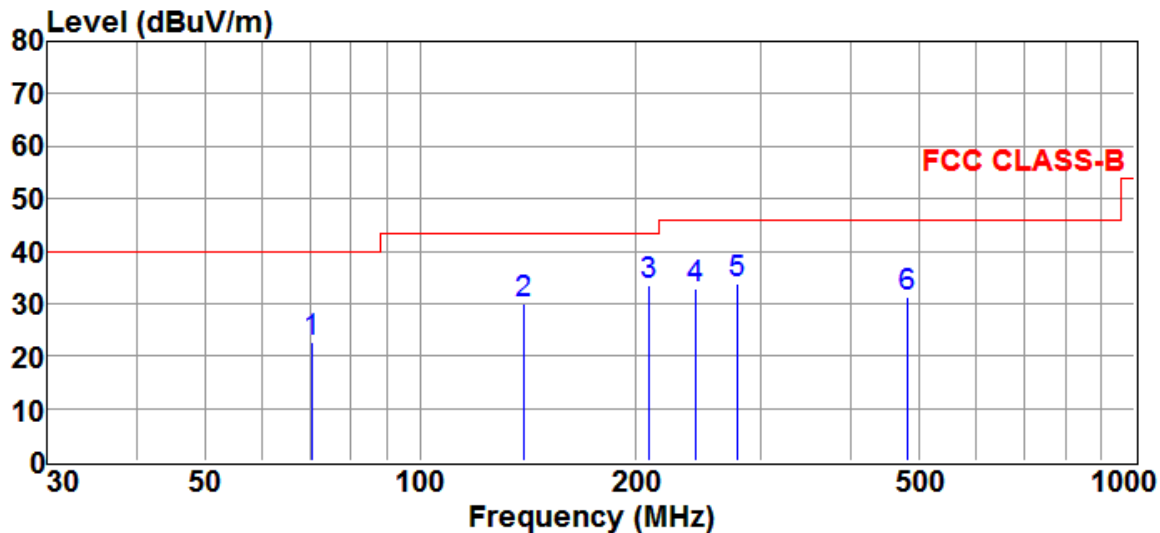


Site	:Open Site #2	Date	:2017-04-05
EUT	:LauncherPlus	Ant. Pol.	:HORIZONTAL
Model	:QL300	Detector	:
Power Rating	:From PC(DC 5V)	Engineer	:Peter Liao
Limit	:FCC CLASS-B	Temp.	:25 °C
Memo	:Operation	Humi.	:59 %

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
70.5840	9.4	13.2	22.6	40.0	-17.4	QP
139.3610	11.2	18.8	30.0	43.5	-13.5	QP
208.5800	15.3	18.2	33.5	43.5	-10.0	QP
242.5250	14.1	18.8	32.9	46.0	-13.1	QP
278.0670	13.8	20.1	33.9	46.0	-12.1	QP
482.2160	7.1	24.3	31.4	46.0	-14.6	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

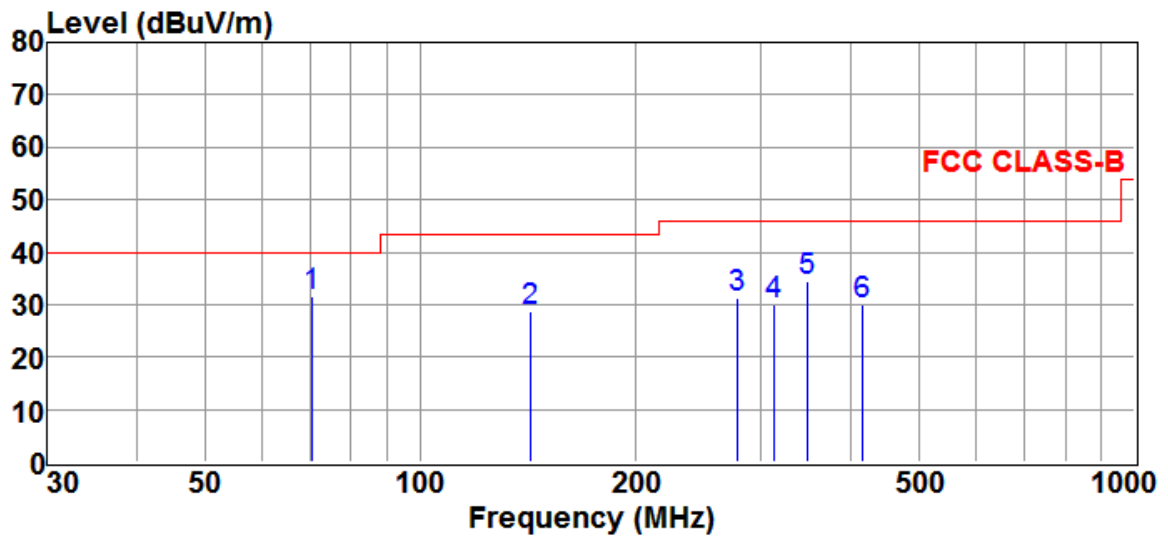


Site	:Open Site #2	Date	:2017-04-05
EUT	:LauncherPlus	Ant. Pol.	:VERTICAL
Model	:QL300	Detector	:
Power Rating	:From PC(DC 5V)	Engineer	:Peter Liao
Limit	:FCC CLASS-B	Temp.	:25 °C
Memo	:Operation	Humi.	:59 %

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits dBμV/m	Over limit dB	Detector
70.5840	18.5	13.2	31.7	40.0	-8.3	QP
142.3240	10.0	18.7	28.7	43.5	-14.8	QP
278.0670	11.2	20.1	31.3	46.0	-14.7	QP
312.1790	8.7	21.2	29.9	46.0	-16.1	QP
348.0270	12.4	22.0	34.4	46.0	-11.6	QP
416.1790	6.5	23.4	29.9	46.0	-16.1	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

b) Emission frequencies Above 1GHz

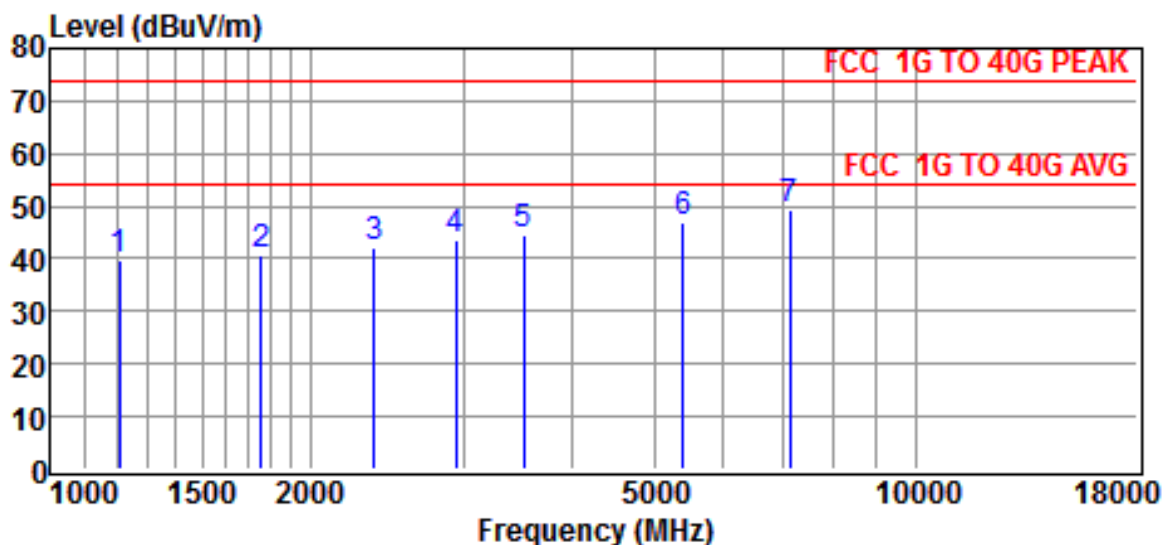


Site	:Chamber #2	Date	:2017-03-31
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:From PC(DC 5V)	Temp.	:23 °C
Engineer	:Peter Liao	Humi.	:59 %
Test Mode	:NoteBook PC with ac adaptor	Test Mode	:Operation

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
1203.1990	50.47	-10.84	39.63	54.00	-14.37	Peak
1751.9550	49.11	-8.38	40.73	54.00	-13.27	Peak
2366.3080	47.96	-5.91	42.05	54.00	-11.95	Peak
2939.1150	47.68	-4.01	43.67	54.00	-10.33	Peak
3526.1340	46.62	-2.02	44.60	54.00	-9.40	Peak
5377.3540	44.66	2.25	46.91	54.00	-7.09	Peak
7158.8060	44.55	4.98	49.53	54.00	-4.47	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

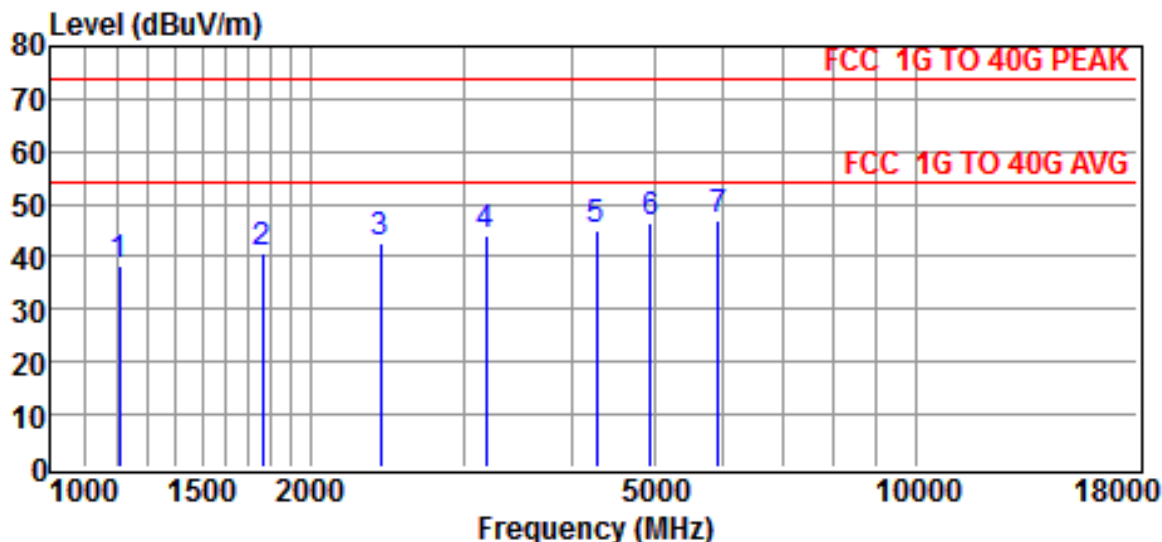

Site	:Chamber #2	Date	:2017-03-31
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL300
Power Rating	:From PC(DC 5V)	Temp.	:23 °C
Engineer	:Peter Liao	Humi.	:59 %
Test Mode	:NoteBook PC with ac adaptor	Test Mode	:Operation

Freq MHz	Reading dBμV	Correction Factor dB	Result dBμV/m	Limits (AVG) dBμV/m	Over limit dB	Detector
1203.1990	49.08	-10.84	38.24	54.00	-15.76	Peak
1762.1120	48.99	-8.25	40.74	54.00	-13.26	Peak
2407.7030	48.29	-5.82	42.47	54.00	-11.53	Peak
3186.8690	47.30	-3.15	44.15	54.00	-9.85	Peak
4279.5890	45.34	-0.25	45.09	54.00	-8.91	Peak
4944.9930	45.23	1.33	46.56	54.00	-7.44	Peak
5915.5160	44.12	3.02	47.14	54.00	-6.86	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where



$$\text{Corrected Factor} = \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

(Below 1GHz)



(Above 1GHz)

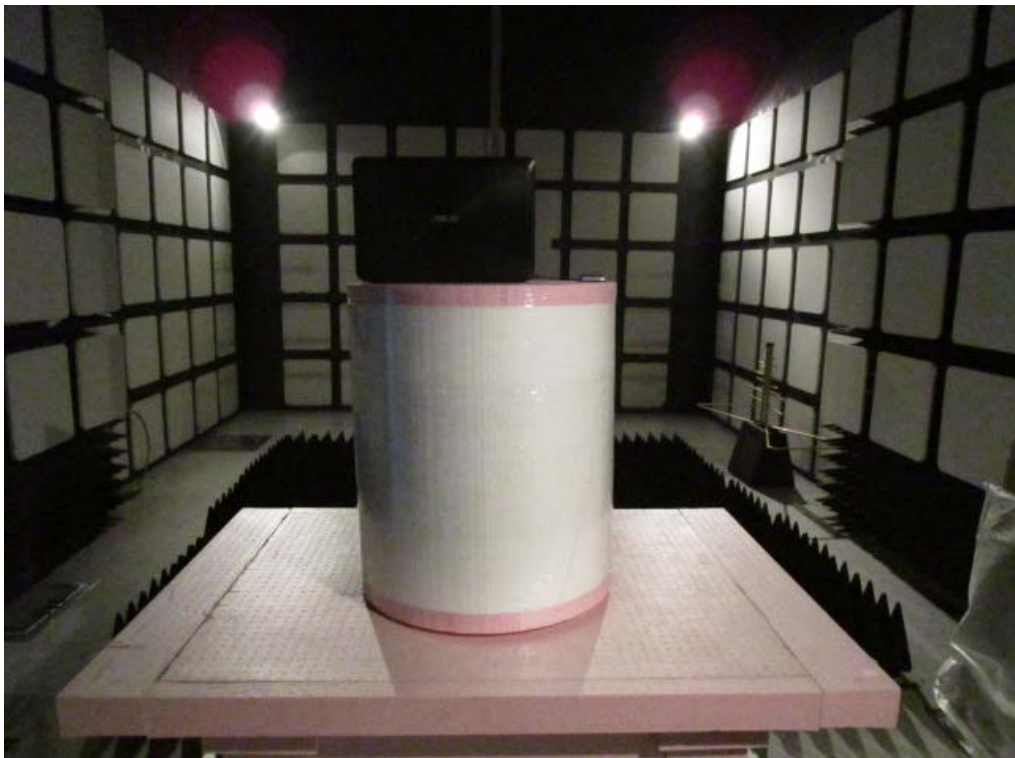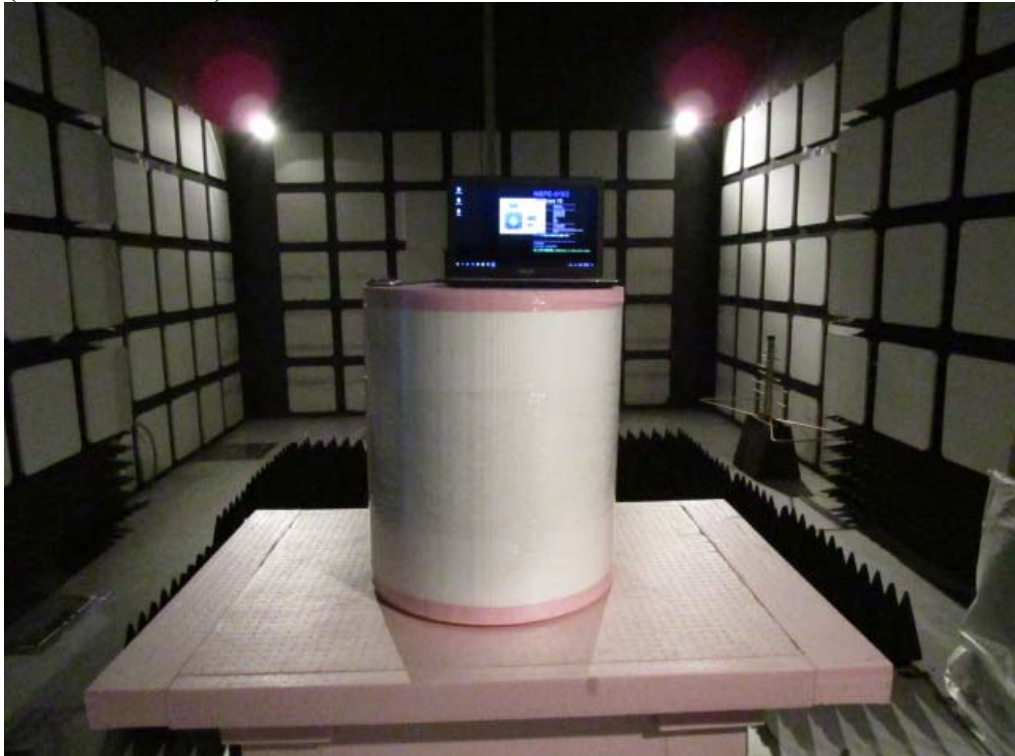

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

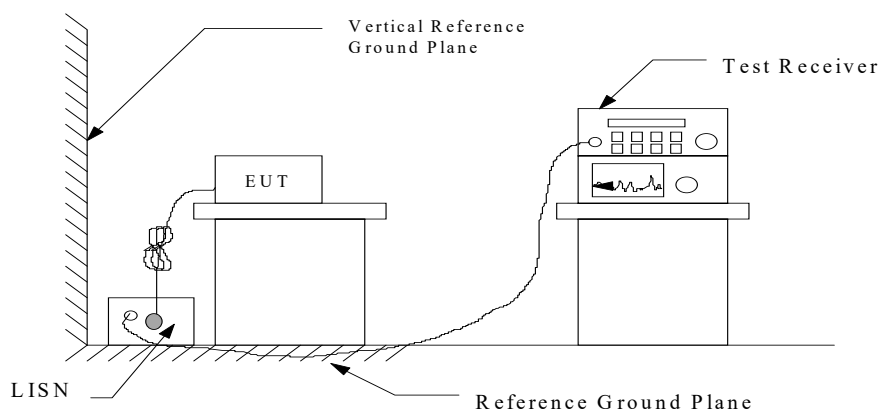

5.3 Conducted Emission Data

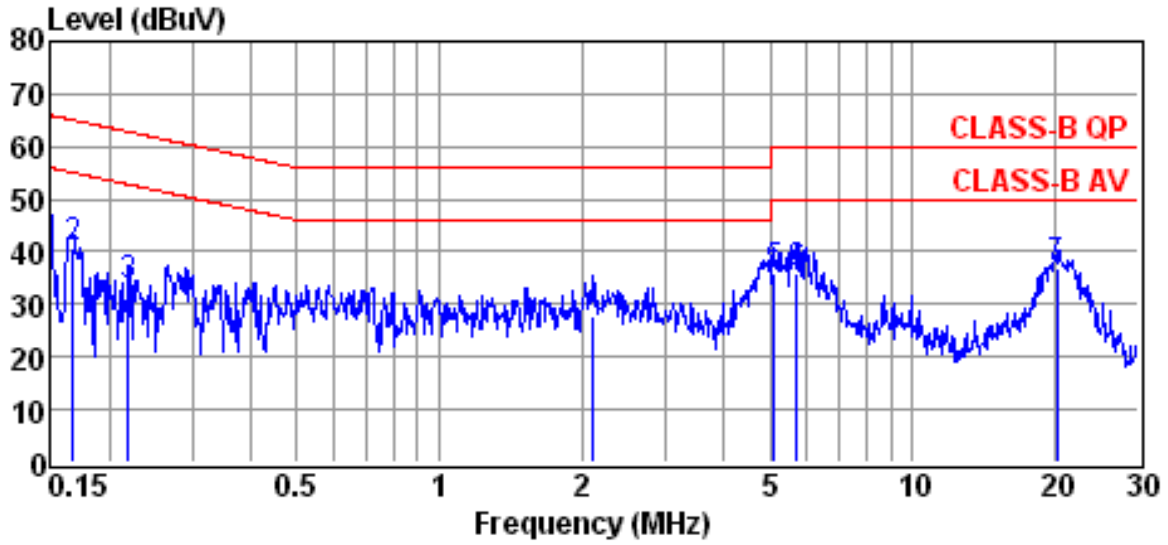


Site	: conducted #1	Date	: 03-30-2017
Condition	: CLASS-B QP	LISN	: NEUTRAL
Tem / Hum	: 23 °C / 61%	Test Mode	: WiFi
EUT	: LauncherPlus	Power Rating	: DC 5V(From PC)
Memo	: Operation	Memo	:

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1500	37.50	10.17	47.67	66.00	-18.33	QP
0.1677	30.54	10.17	40.71	65.08	-24.37	QP
0.2197	23.33	10.16	33.49	62.83	-29.34	QP
2.1100	17.66	10.28	27.94	56.00	-28.06	QP
5.1120	25.53	10.42	35.95	60.00	-24.05	QP
5.6830	25.63	10.45	36.08	60.00	-23.92	QP
20.2700	25.80	11.15	36.95	60.00	-23.05	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

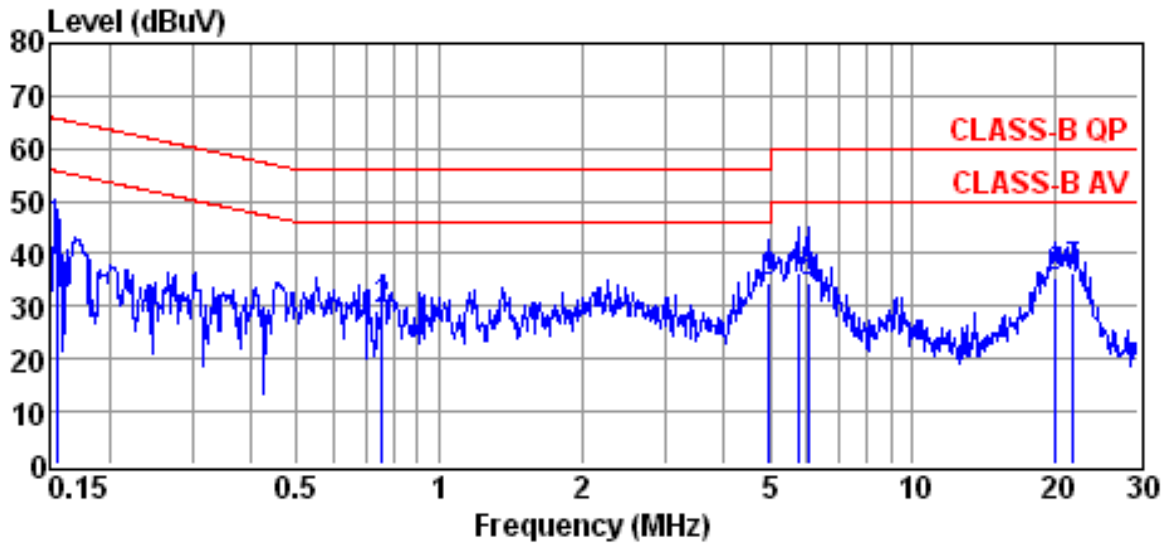

Site	: conducted #1	Date	: 03-30-2017
Condition	: CLASS-B QP	LISN	: LINE
Tem / Hum	: 23 °C / 61%	Test Mode	: WiFi
EUT	: LauncherPlus	Power Rating	: DC 5V(From PC)
Memo	: Operation	Memo	:

Freq (MHz)	Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Remark
0.1549	34.55	10.17	44.72	65.74	-21.02	QP
0.7589	19.16	10.20	29.36	56.00	-26.64	QP
4.9780	24.11	10.43	34.54	56.00	-21.46	QP
5.7440	25.89	10.47	36.36	60.00	-23.64	QP
6.0240	24.09	10.49	34.58	60.00	-25.42	QP
20.0560	24.33	11.28	35.61	60.00	-24.39	QP
21.9460	24.84	11.33	36.17	60.00	-23.83	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2016/12/05	2017/12/04
LISN	Rohde & Schwarz	ESH2-Z5	2016/05/05	2017/05/04

5.6 Photos of Conduction Measuring Setup



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

The antenna gain is -3.37 dBi so there is no need to reduce the power.
Please see internal photos and the antenna specifications.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
 - 1) Set RBW = 100 kHz.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

7.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 10.02 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 10.02 MHz
- c) Channel High: 6 dB Emission Bandwidth is 10.02 MHz

B. 802.11g @6 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 16.50 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 16.50 MHz
- c) Channel High: 6 dB Emission Bandwidth is 16.50 MHz

C. 802.11n HT-20 @6.5 Mbps

Antenna1

- a) Channel Low: 6 dB Emission Bandwidth is 17.76 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.76 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.76 MHz

Antenna2

- a) Channel Low: 6 dB Emission Bandwidth is 17.76 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.76 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.76 MHz

D. 802.11n HT-40 @13.5 Mbps

Antenna1

- a) Channel Low: 6 dB Emission Bandwidth is 36.60 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 36.60 MHz
- c) Channel High: 6 dB Emission Bandwidth is 36.60 MHz

Antenna2

- a) Channel Low: 6 dB Emission Bandwidth is 36.60 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 36.60 MHz
- c) Channel High: 6 dB Emission Bandwidth is 36.60 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ ($1 \text{ GHz} < f \leq 18 \text{ GHz}$).


802.11b / Channel Low



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.37 dB
SWT 5 ms 10.200000000 MHz

Ref 10 dBm

Att 30 dB

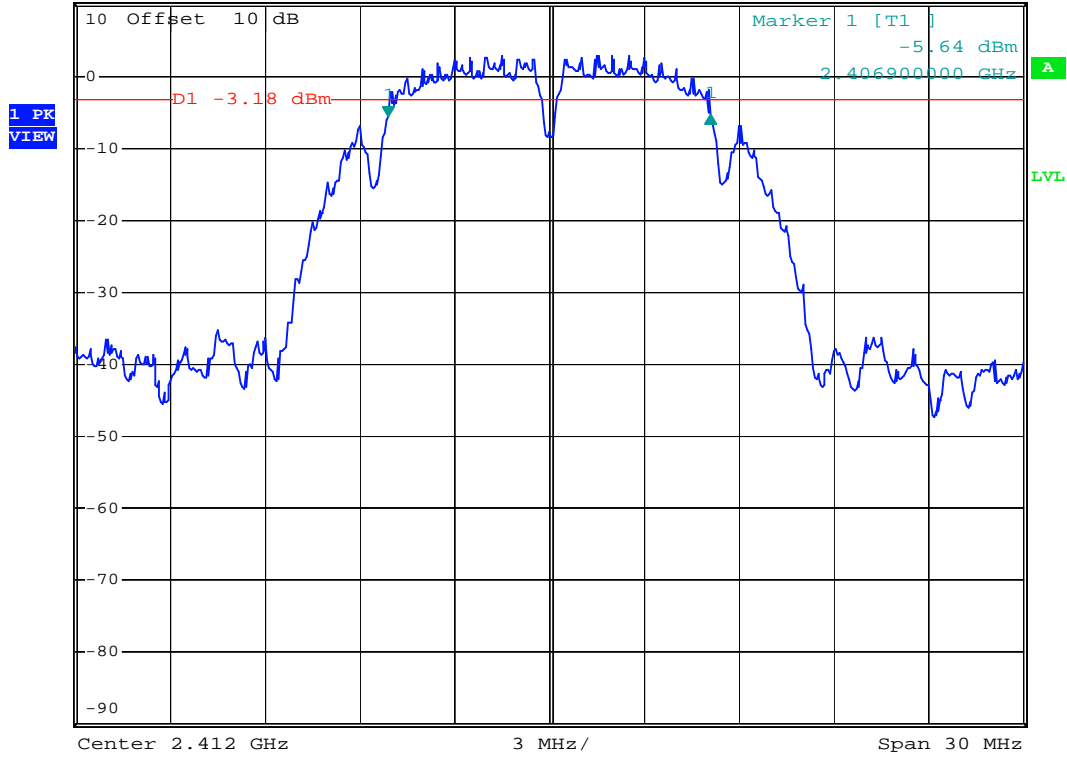


802.11b / Channel Mid



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 1.45 dB
SWT 5 ms 10.200000000 MHz

Ref 10 dBm

Att 30 dB

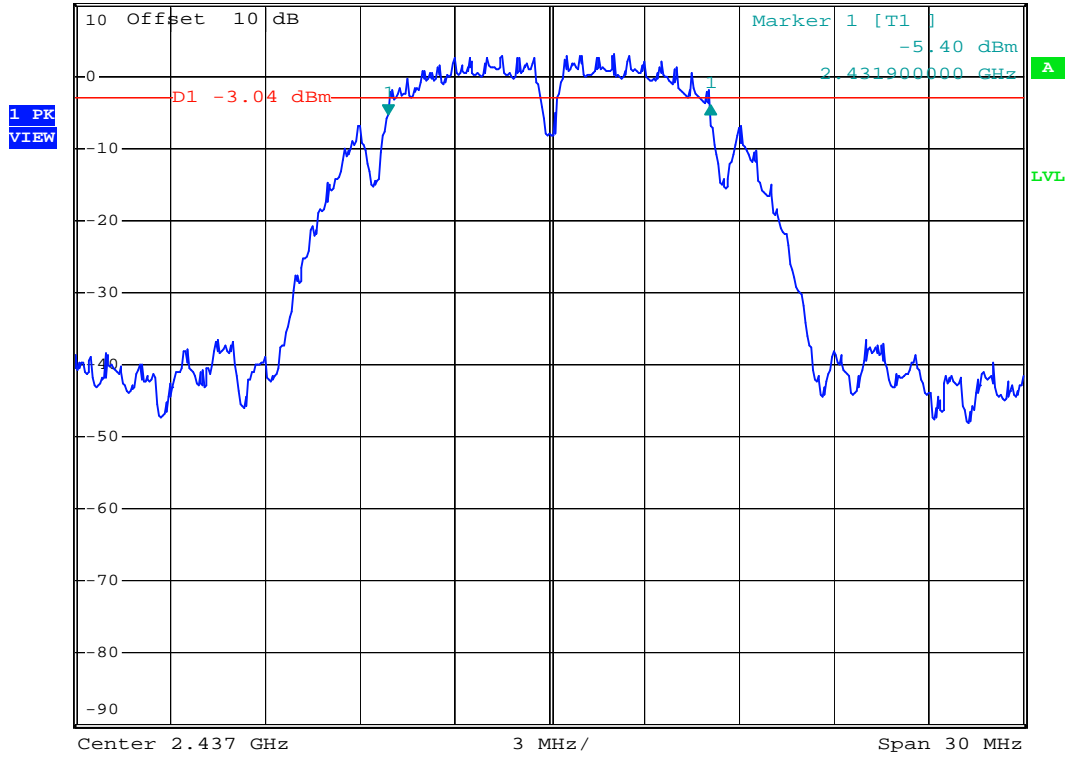


802.11b / Channel High



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.72 dB
SWT 5 ms 10.200000000 MHz

Ref 10 dBm

Att 30 dB

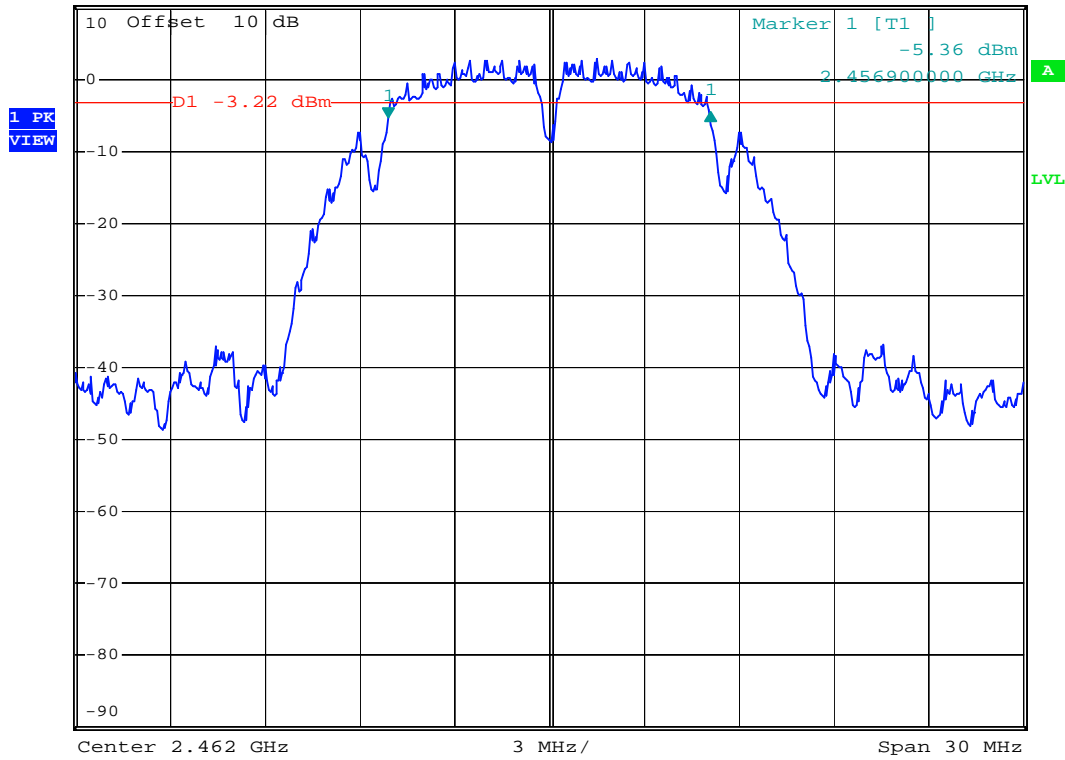


802.11g / Channel Low



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.72 dB
SWT 5 ms 16.500000000 MHz

Ref 10 dBm

Att 30 dB

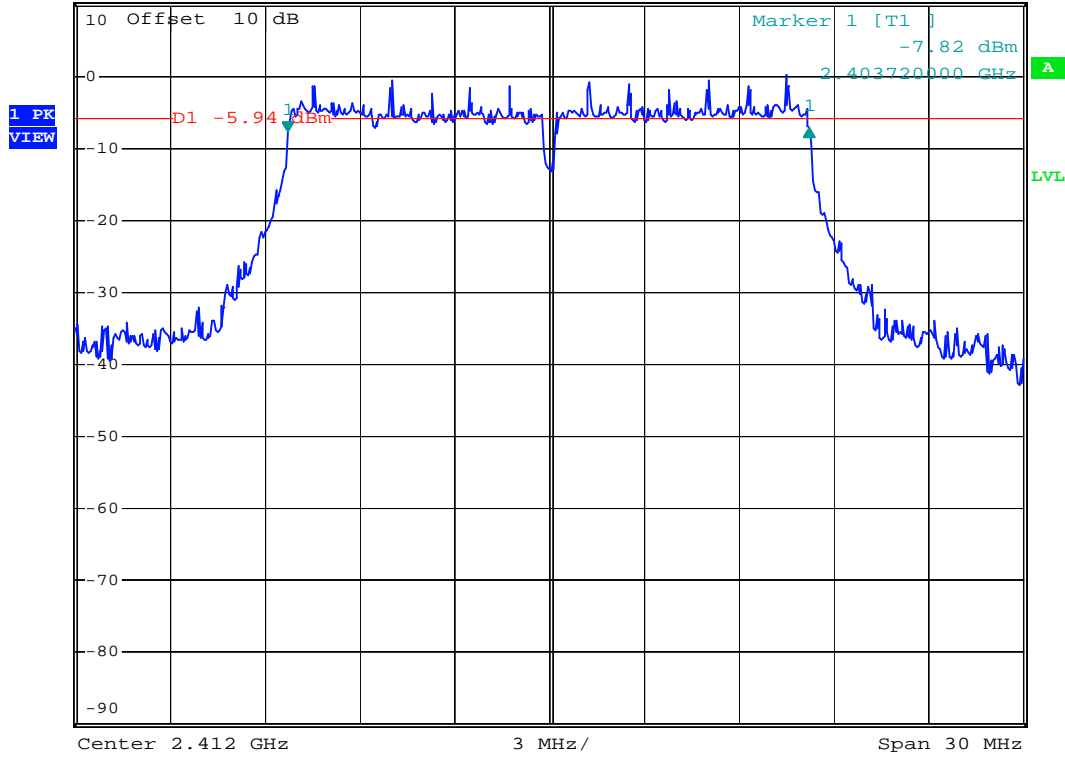


802.11g / Channel Mid



*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -1.01 dB
SWT 5 ms 16.500000000 MHz

Ref 10 dBm

Att 30 dB

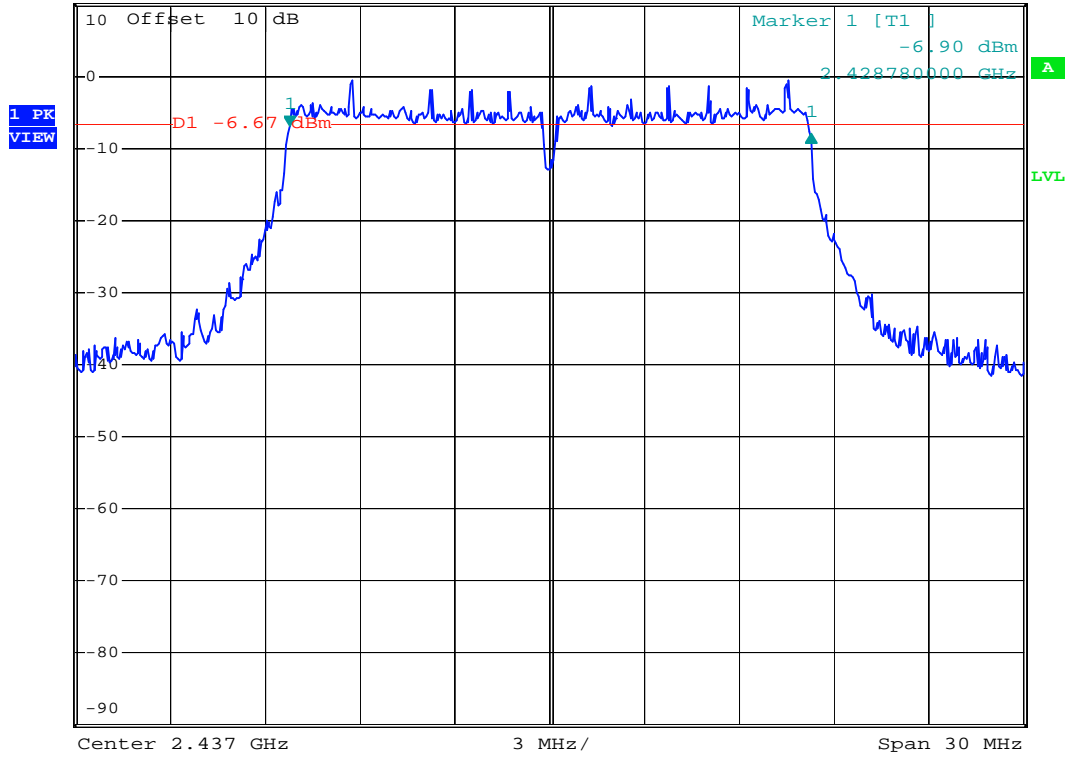


802.11g / Channel High




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.55 dB
SWT 5 ms 16.500000000 MHz

Ref 10 dBm


Att 30 dB

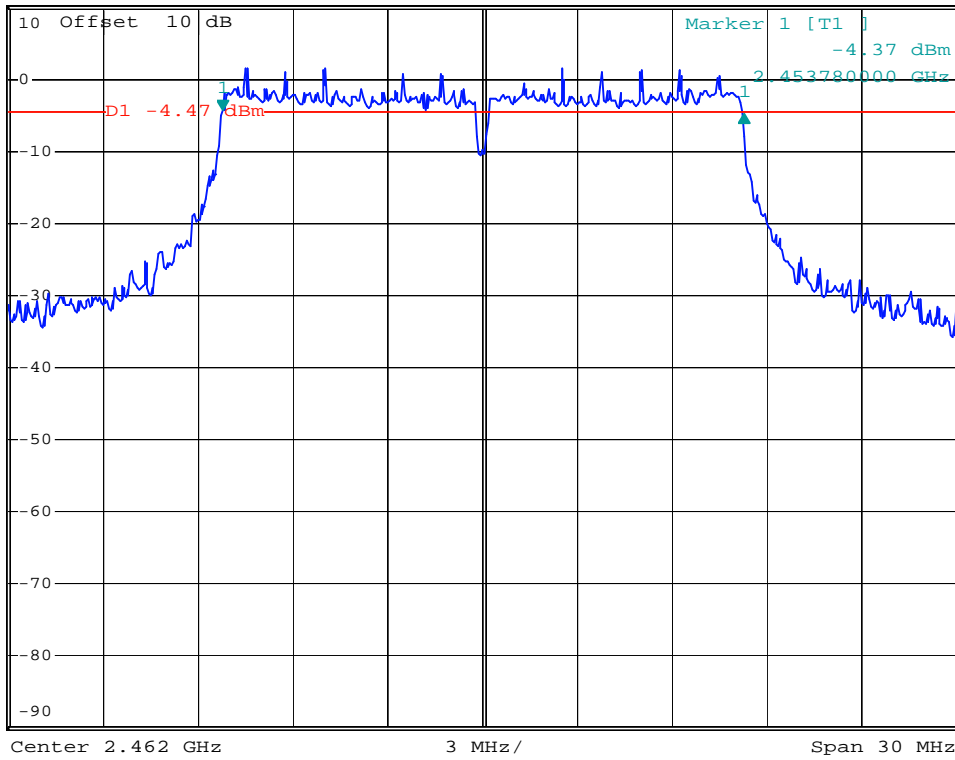

802.11n HT-20/ Channel Low (Antenna1)

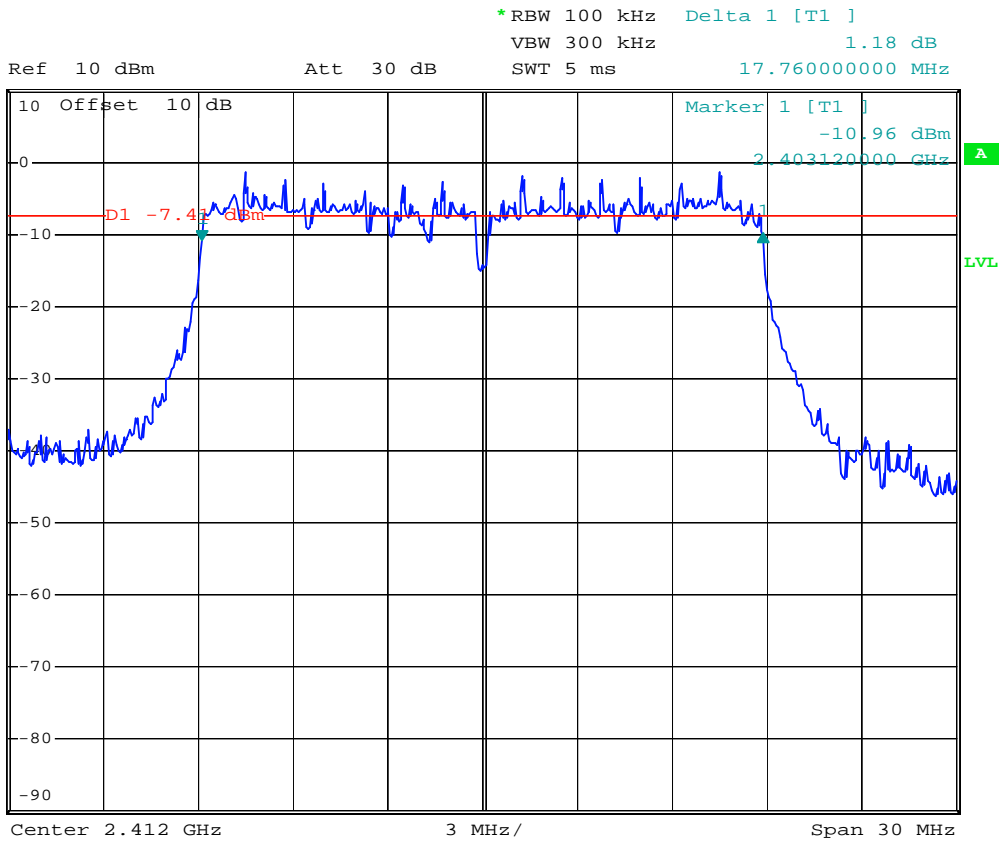


802.11n HT-20/ Channel Low (Antenna2)

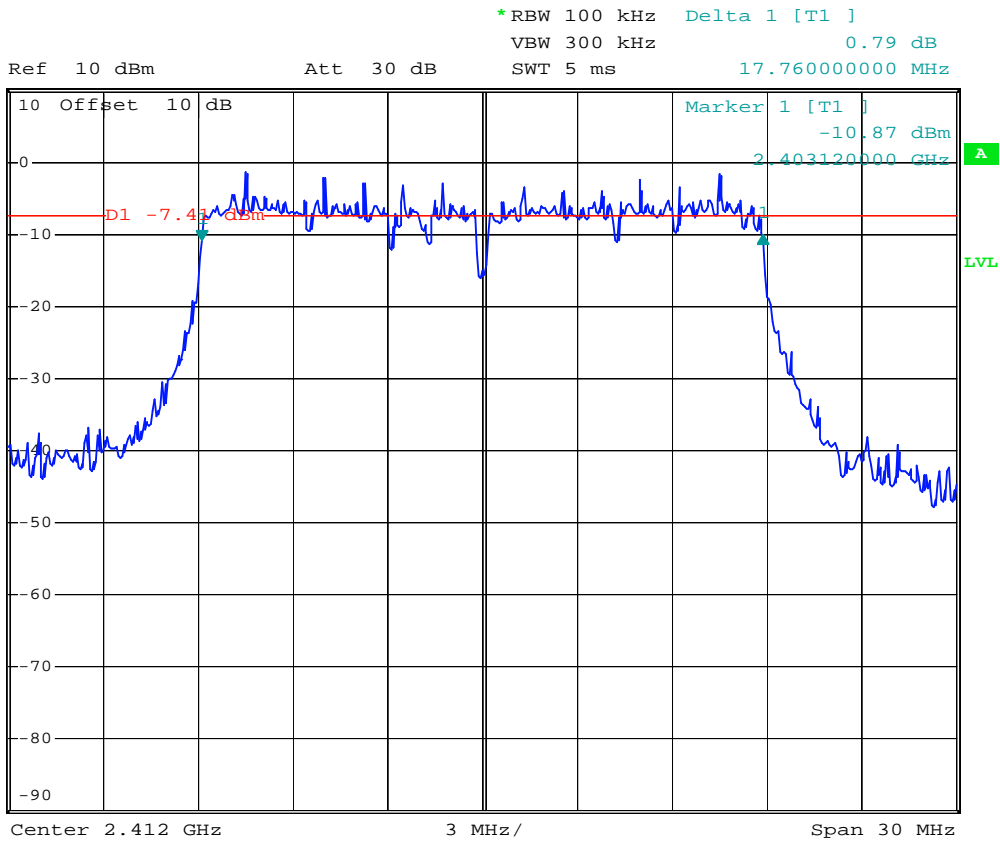

802.11n HT-20/ Channel Mid (Antenna1)




Ref 10 dBm Att 30 dB *RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.64 dB
SWT 5 ms 17.760000000 MHz

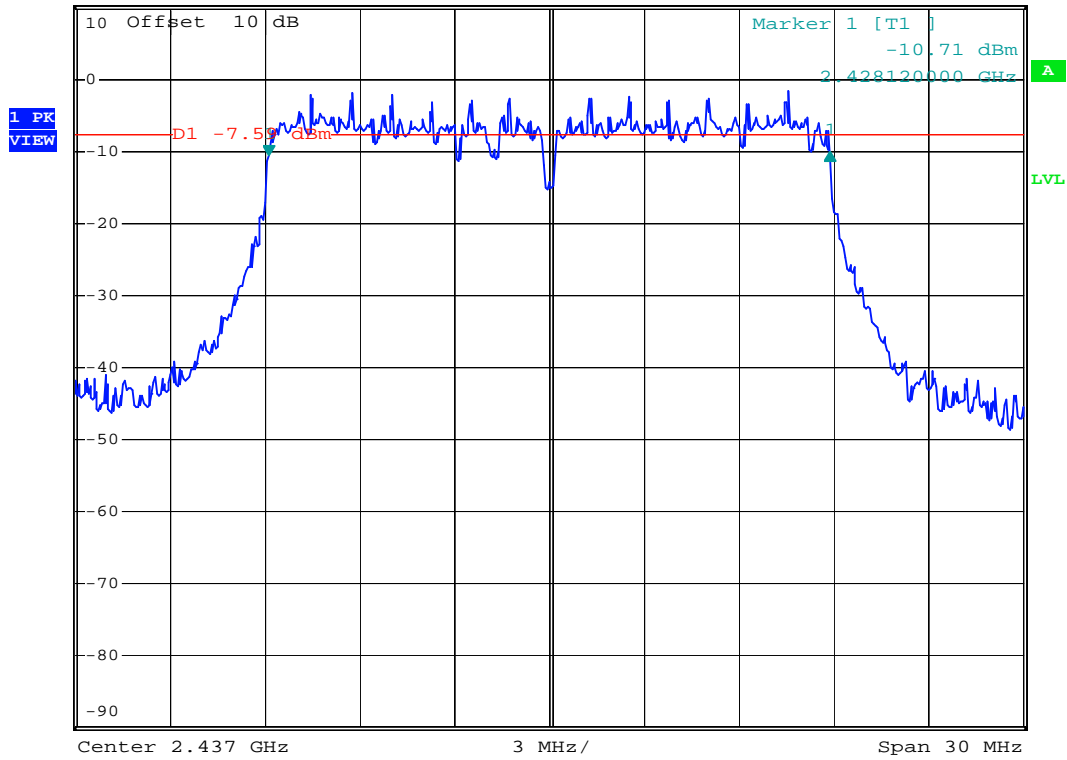

802.11n HT-20/ Channel Mid (Antenna2)




Ref 10 dBm Att 30 dB *RBW 100 kHz Delta 1 [T1]
VBW 300 kHz 0.45 dB
SWT 5 ms 17.760000000 MHz

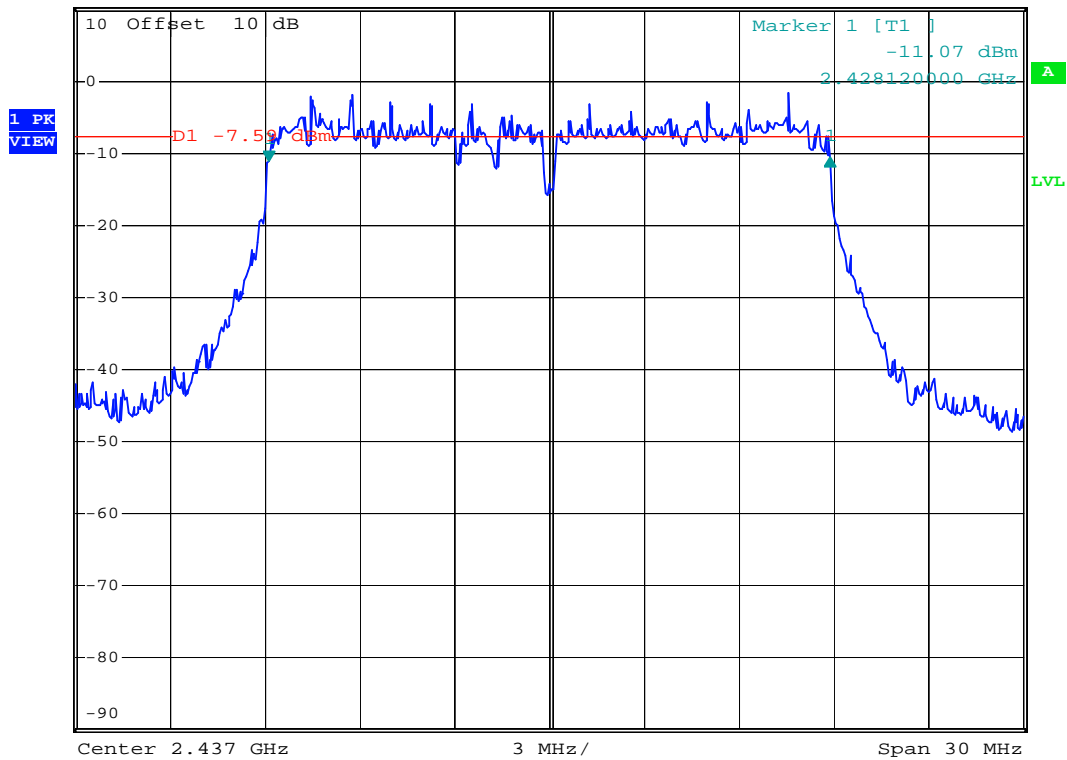

802.11n HT-20/ Channel High (Antenna1)




Ref 10 dBm Att 30 dB *RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.12 dB
SWT 5 ms 17.760000000 MHz

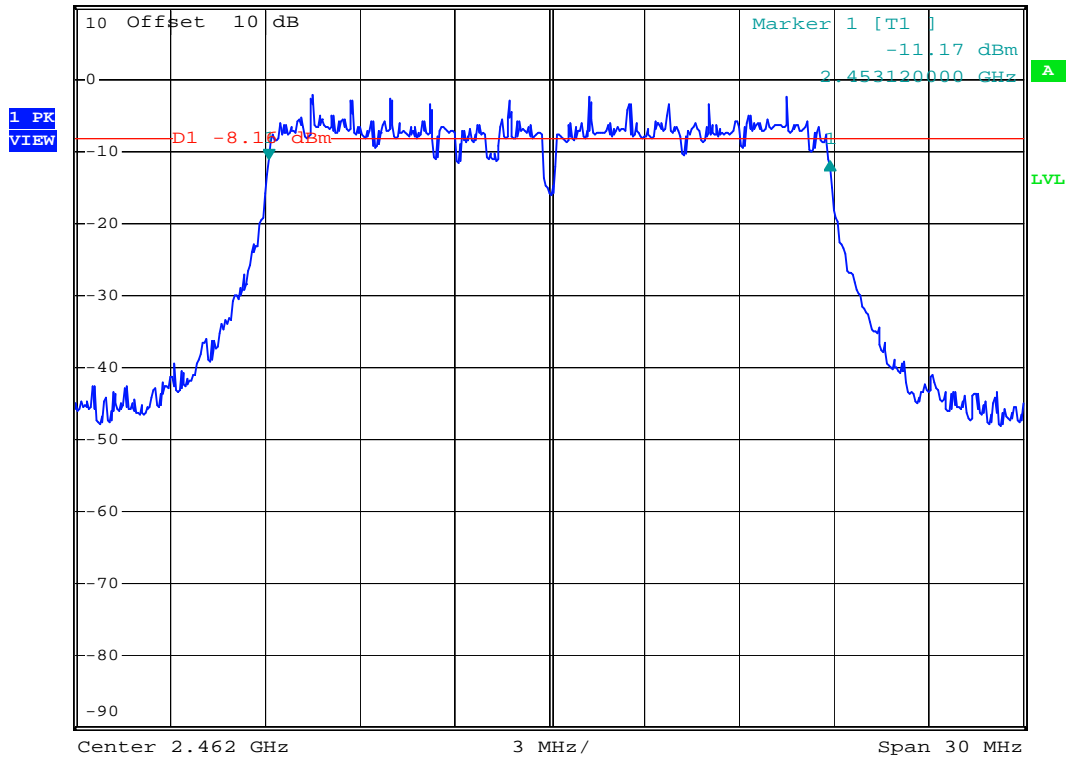


802.11n HT-20/ Channel High (Antenna2)




Ref 10 dBm Att 30 dB *RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.15 dB
SWT 5 ms 17.760000000 MHz

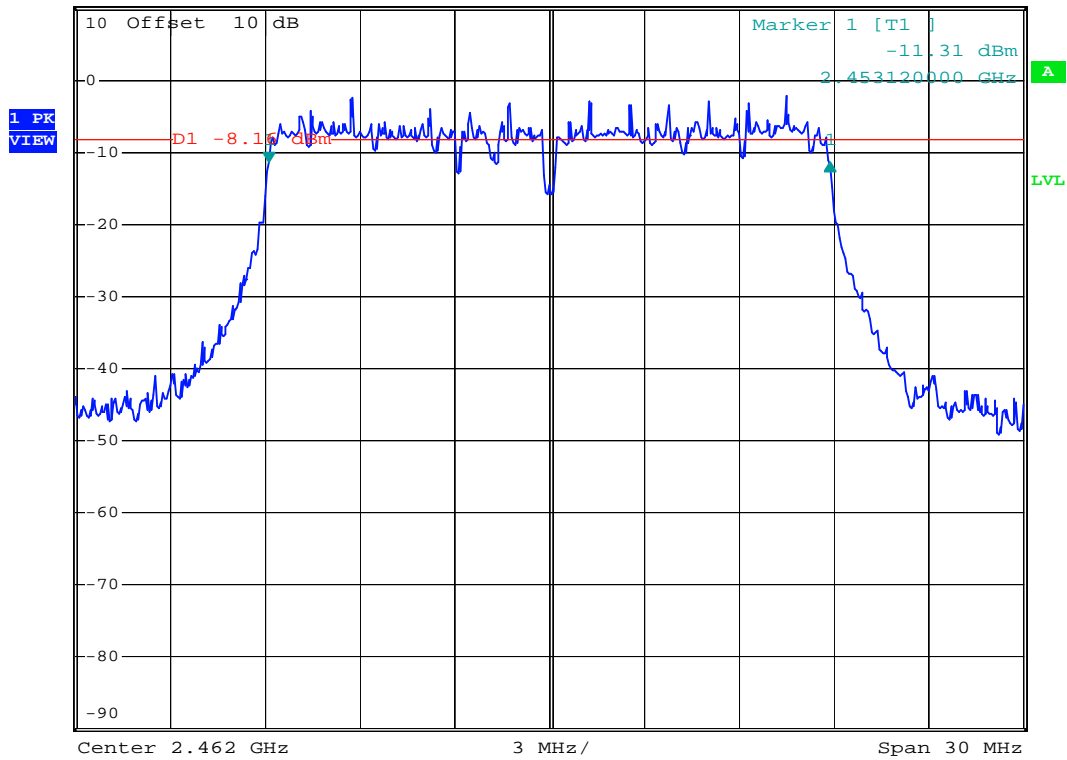


802.11n HT-40/ Channel Low (Antenna1)

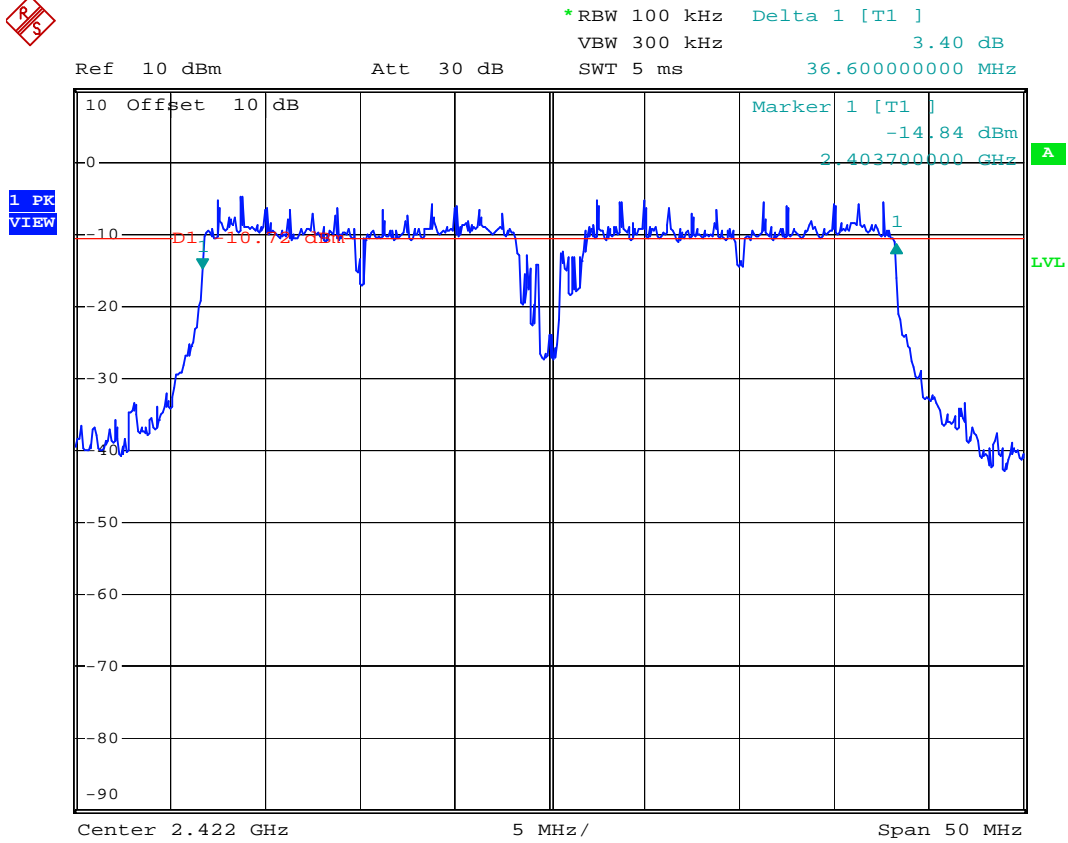


802.11n HT-40/ Channel Low (Antenna2)

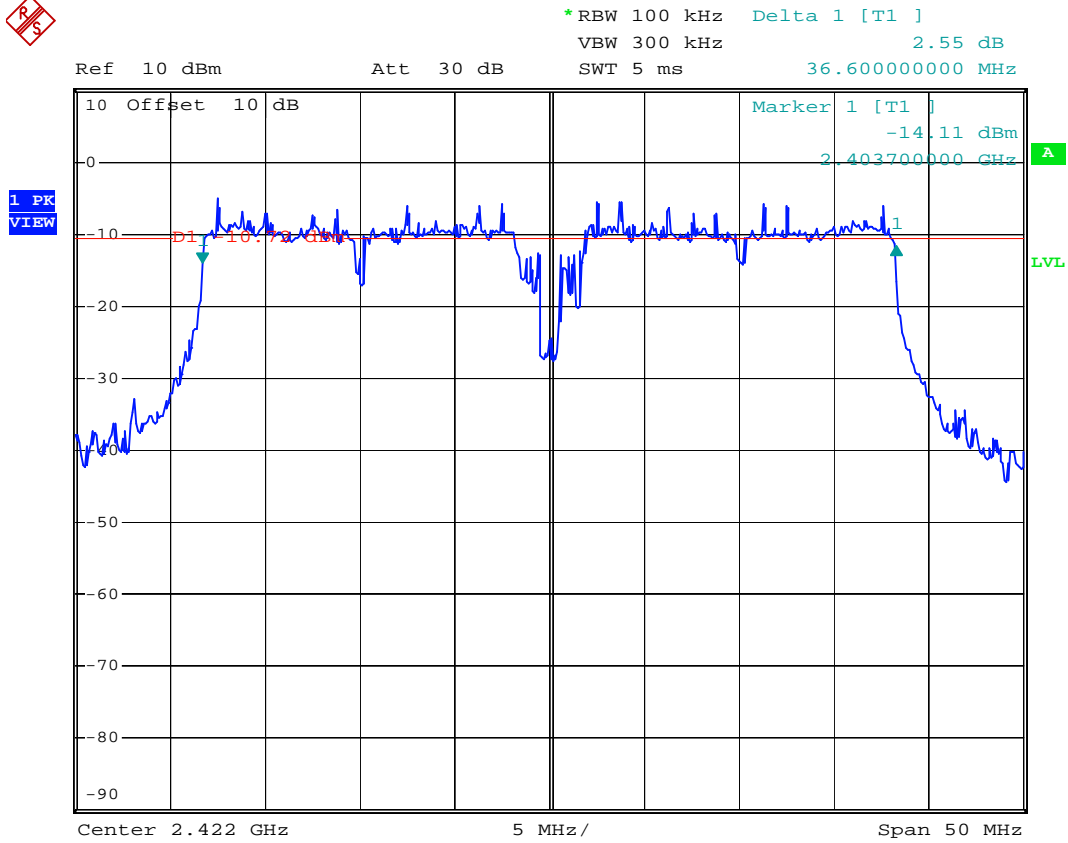


802.11n HT-40/ Channel Mid (Antenna1)

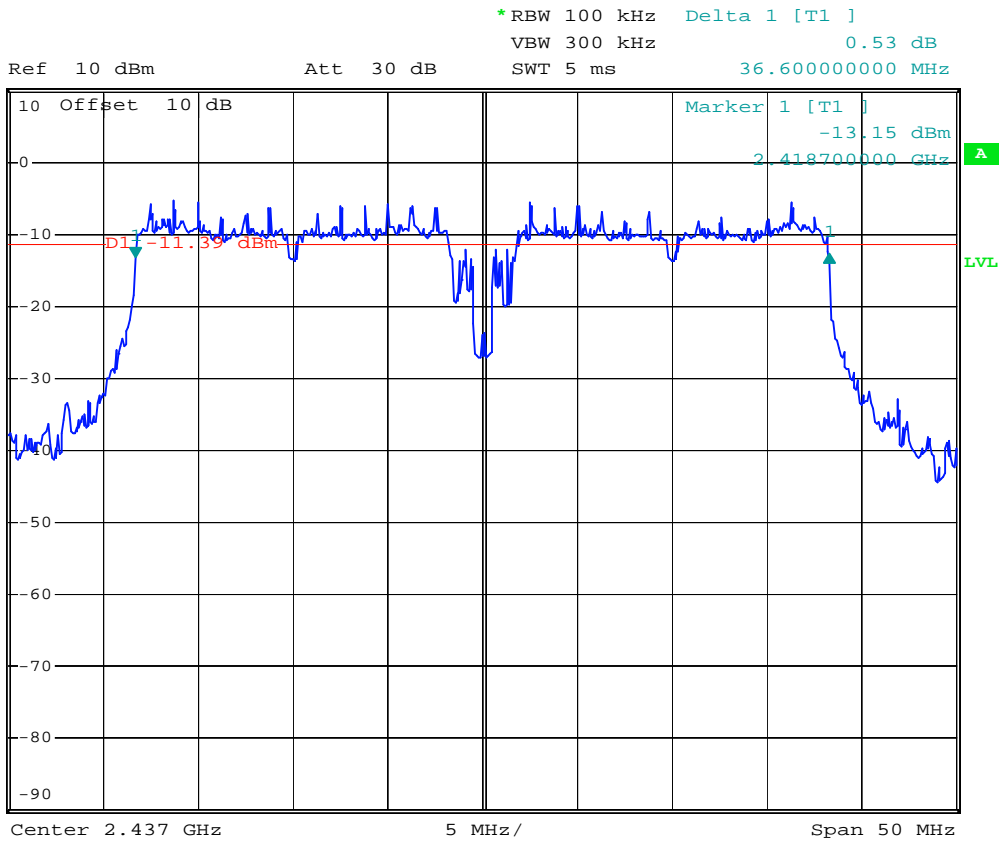


802.11n HT-40/ Channel Mid (Antenna2)

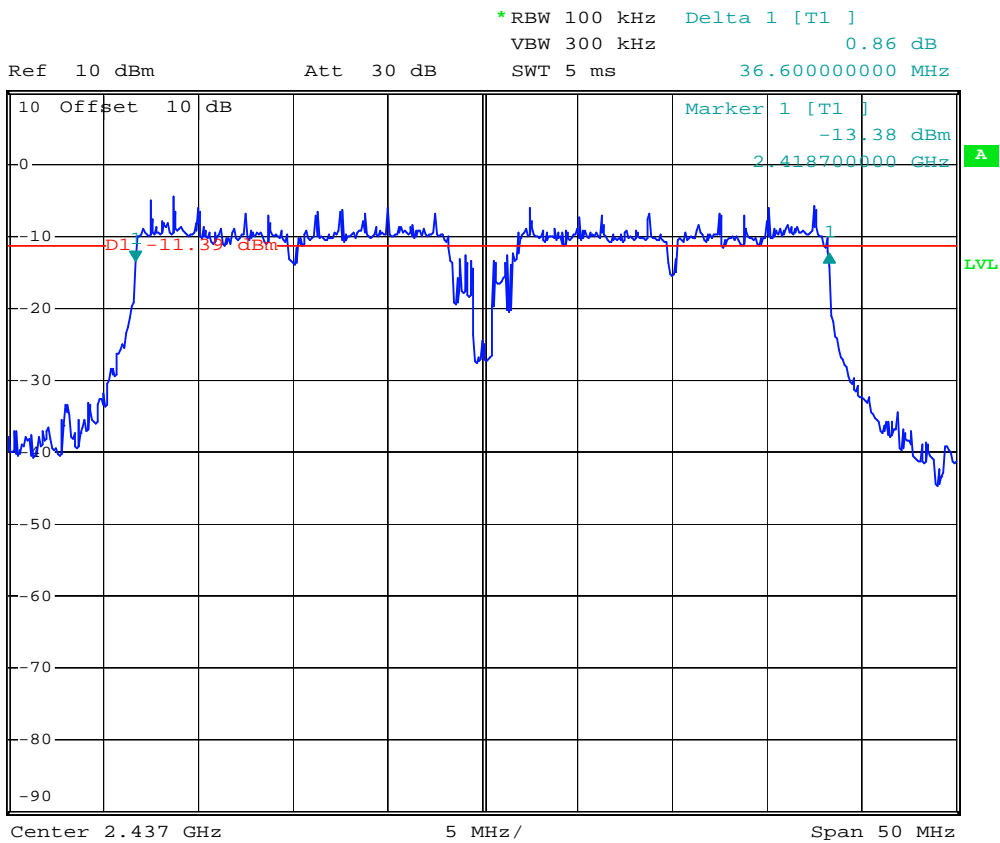

802.11n HT-40/ Channel High (Antenna1)

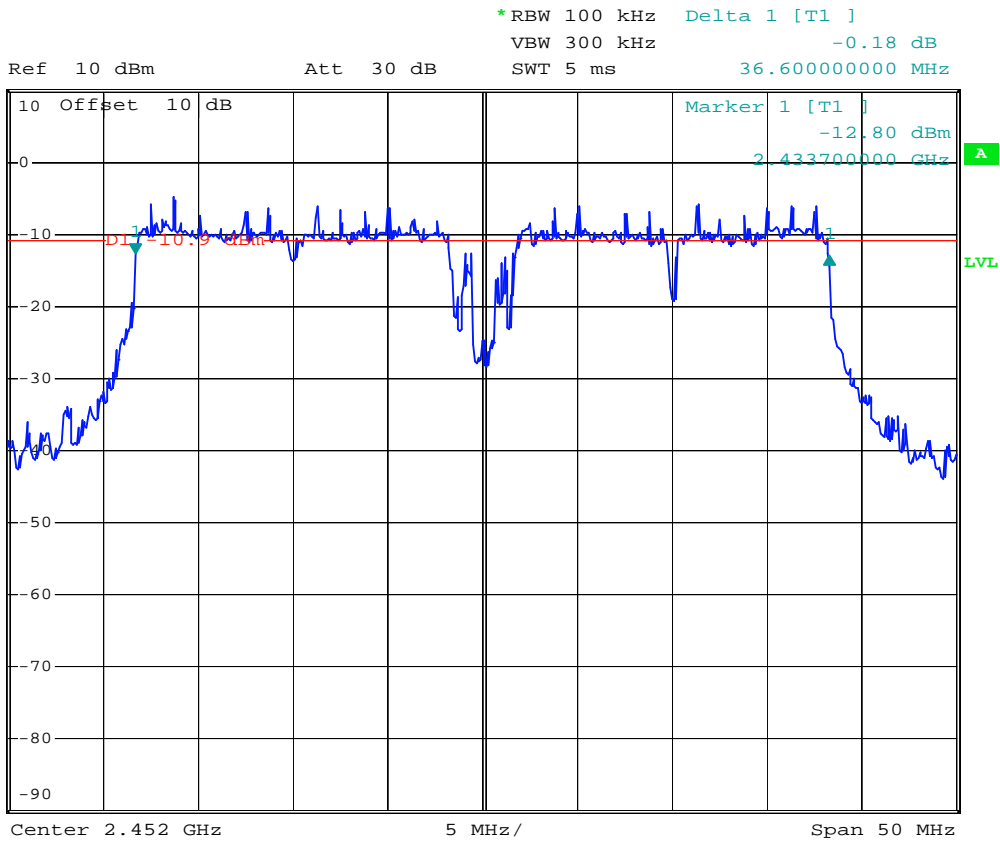

802.11n HT-40/ Channel High (Antenna2)

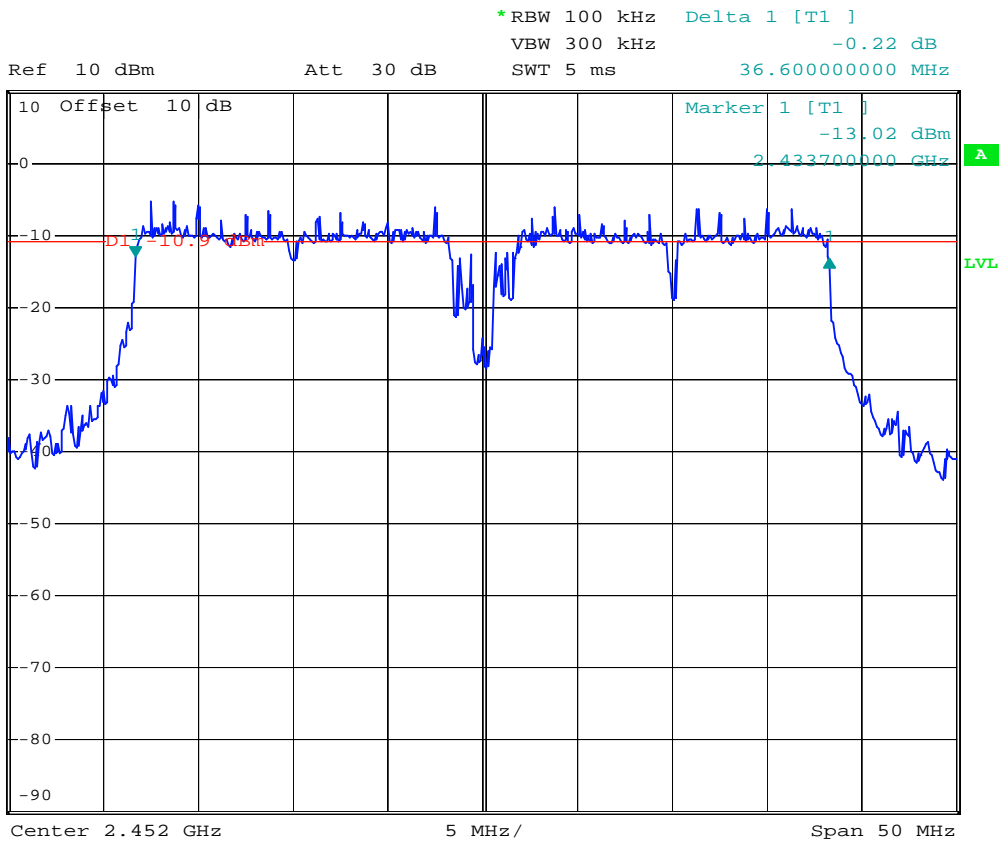

8 OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


8.2 Measurement Procedure

Measurement Procedure:

9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER +SENSOR	ANRITSU	ML2487A +MA2491A	2016/05/12	2017/05/11
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

8.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	13.85	24.266
	Channel Mid:2437MHz	13.83	24.155
	Channel High:2462MHz	13.70	23.442

B. 802.11g @6 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	13.32	21.478
	Channel Mid:2437MHz	13.10	20.417
	Channel High:2462MHz	12.17	16.482

C. 802.11n HT-20 @6.5 Mbps

Antenna1

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	10.74	11.858
	Channel Mid:2437MHz	10.63	11.561
	Channel High:2462MHz	10.20	10.471

Antenna2

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	10.90	12.303
	Channel Mid:2437MHz	10.36	10.864
	Channel High:2462MHz	10.17	10.399

Total Power (Antenna1+Antenna2)

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	13.83	24.161
	Channel Mid:2437MHz	13.51	22.425
	Channel High:2462MHz	13.20	20.870

D. 802.11n HT-40 @13.5 Mbps**Antenna1**

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	10.70	11.749
	Channel Mid:2437MHz	10.43	11.041
	Channel High:2452MHz	10.20	10.471

Antenna2

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	10.36	10.864
	Channel Mid:2437MHz	10.24	10.568
	Channel High:2452MHz	10.09	10.209

Total Power (Antenna1+Antenna2)

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	13.54	22.613
	Channel Mid:2437MHz	13.35	21.609
	Channel High:2452MHz	13.16	20.680

Note : The expanded uncertainty: 2dB.

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW to 1 MHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

9.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

D. 802.11n HT-40 @13.5 Mbps


- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.


802.11b



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -52.50 dBm
Ref 10 dBm *Att 20 dB SWT 10 ms 2.390600000 GHz

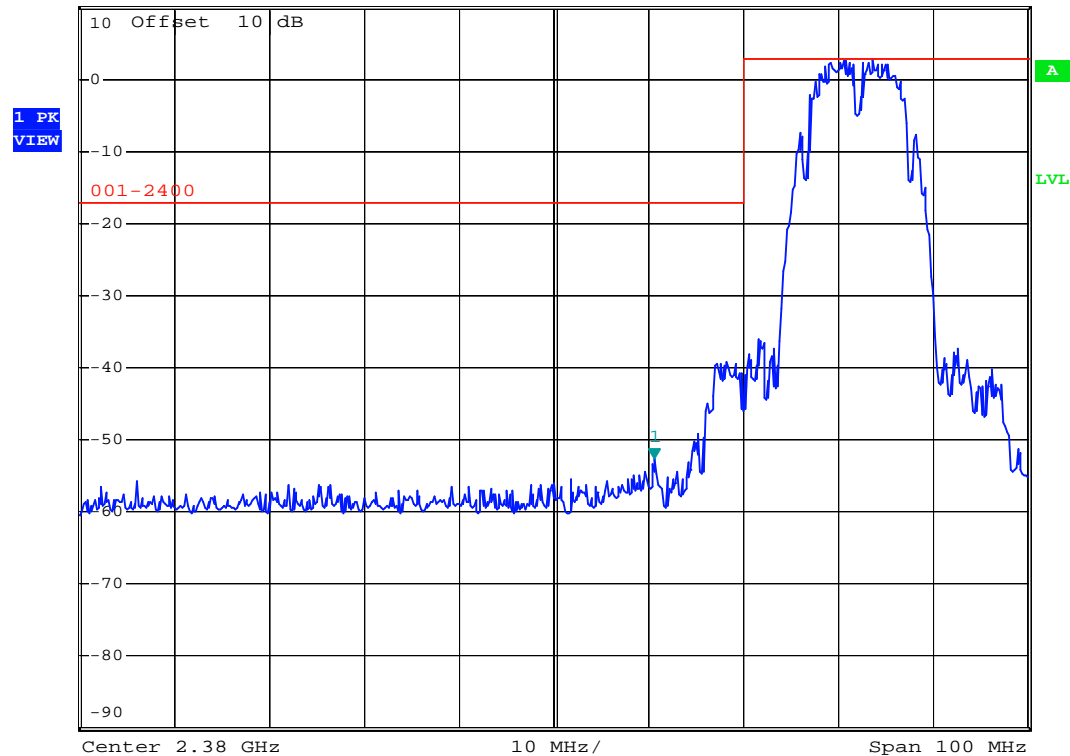


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.92 dBm
Ref 10 dBm *Att 20 dB SWT 10 ms 2.492000000 GHz

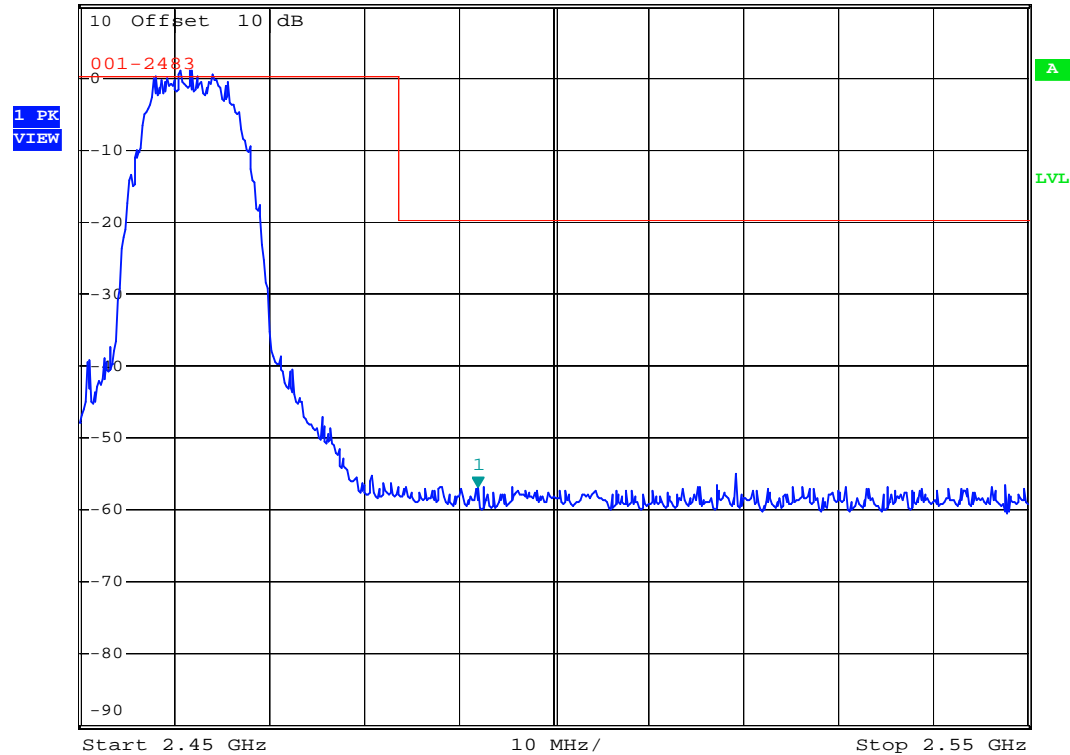


802.11g



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -48.90 dBm
SWT 10 ms 2.391600000 GHz

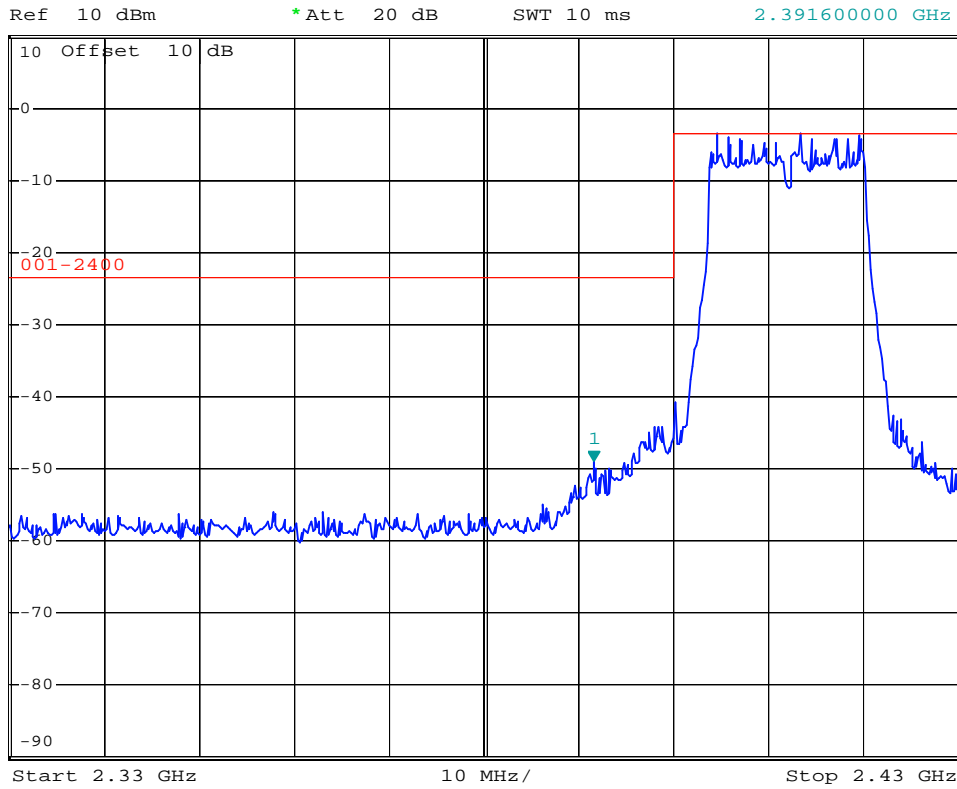


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -55.79 dBm
SWT 10 ms 2.487200000 GHz

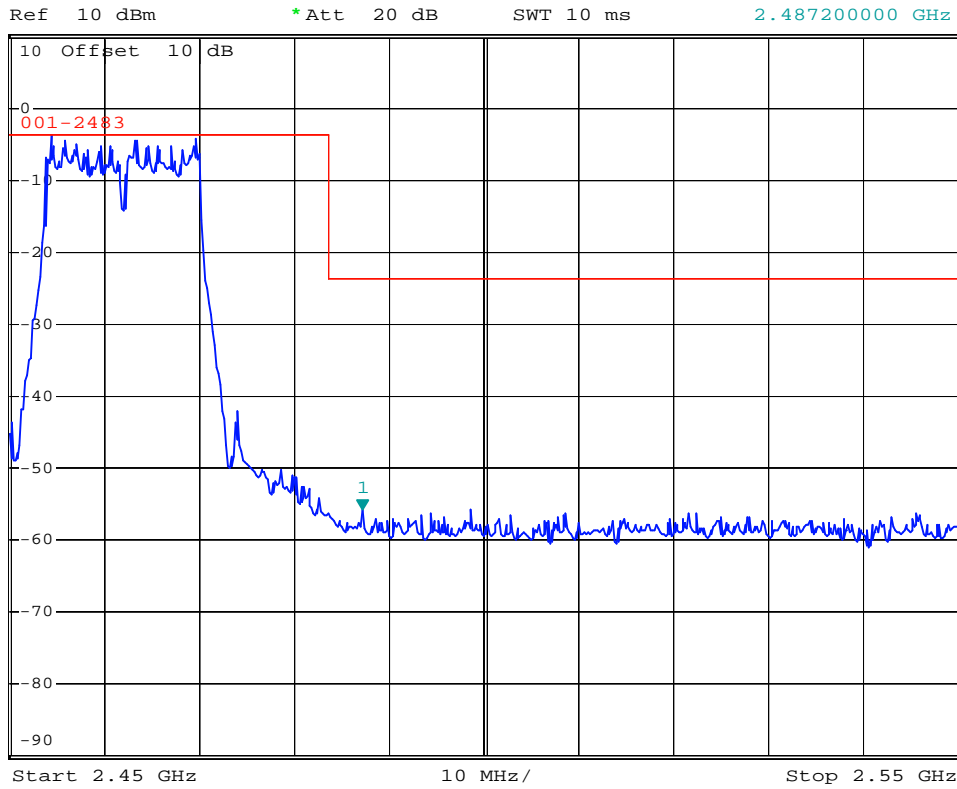


802.11n HT-20 (Antenna1)



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -40.23 dBm
SWT 10 ms 2.397800000 GHz

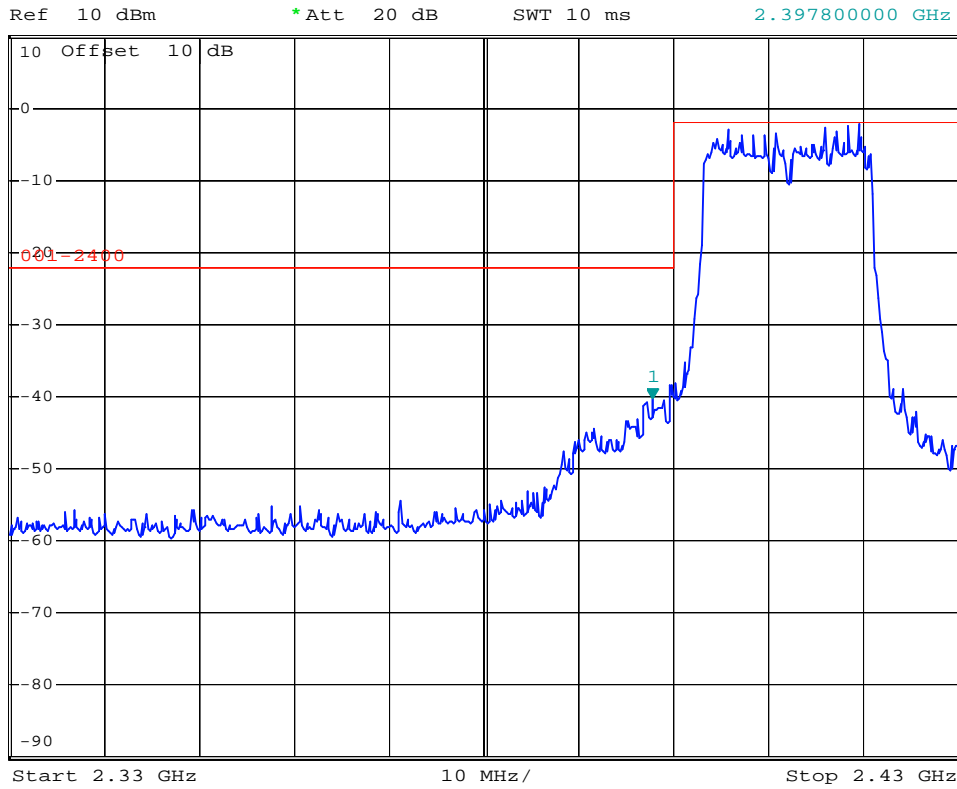


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.26 dBm
SWT 10 ms 2.490200000 GHz

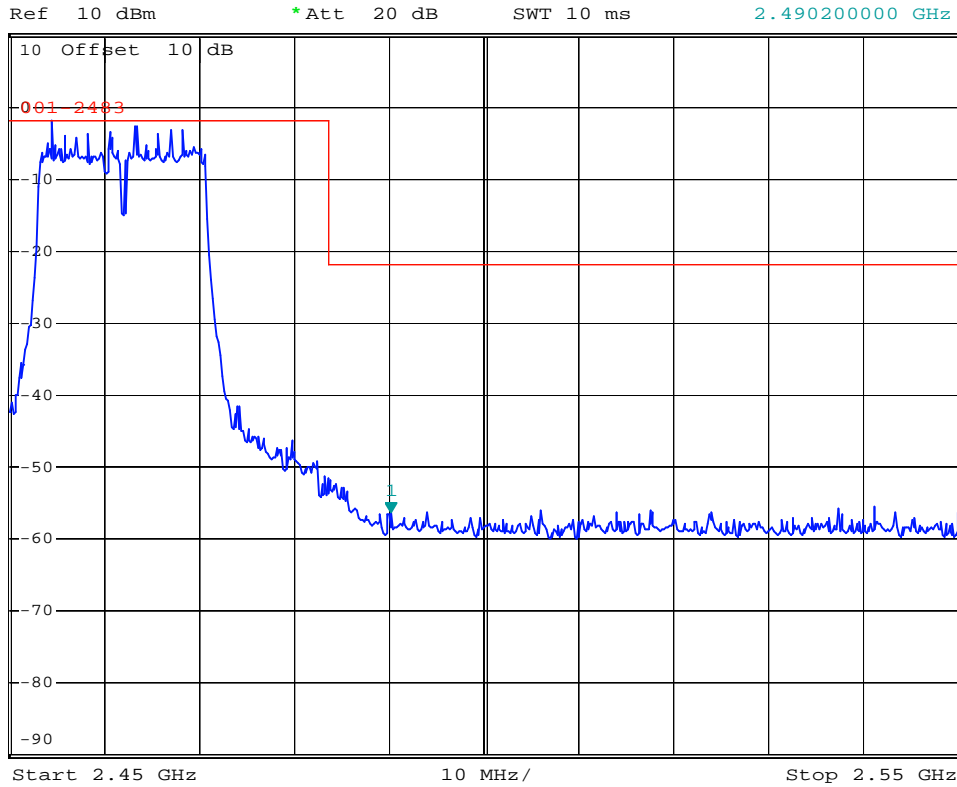


802.11n HT-20 (Antenna2)





*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -41.09 dBm
Ref 10 dBm *Att 20 dB SWT 10 ms 2.396800000 GHz

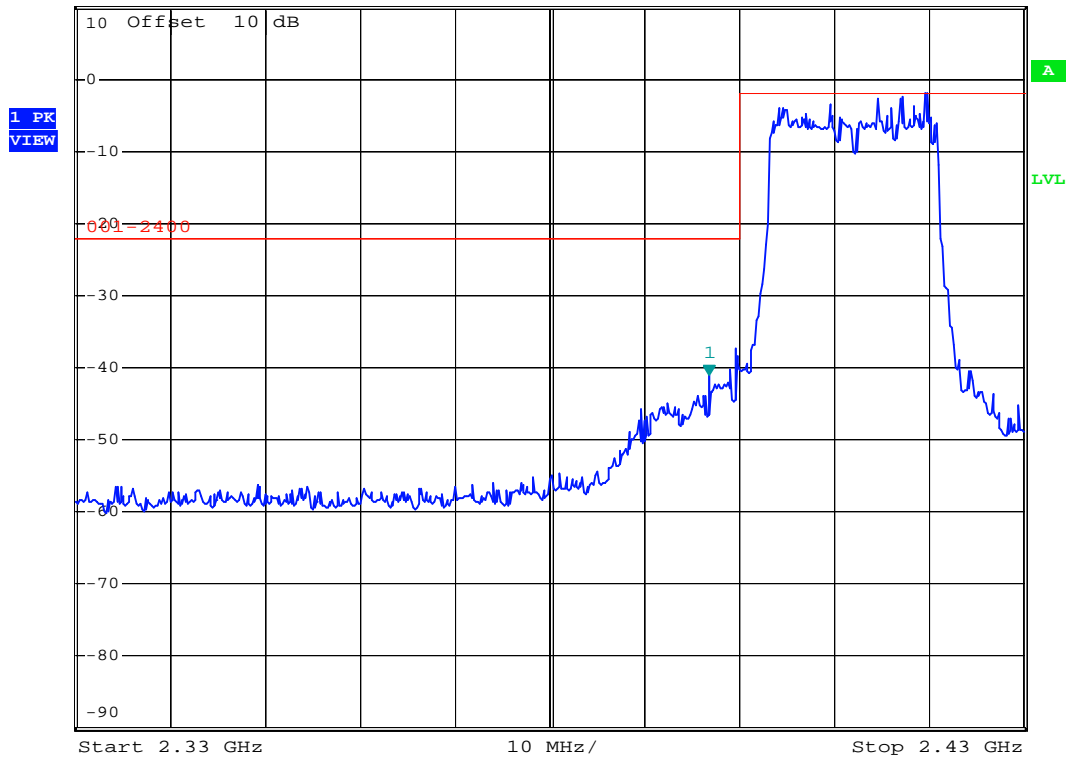

*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -55.43 dBm
Ref 10 dBm *Att 20 dB SWT 10 ms 2.506200000 GHz

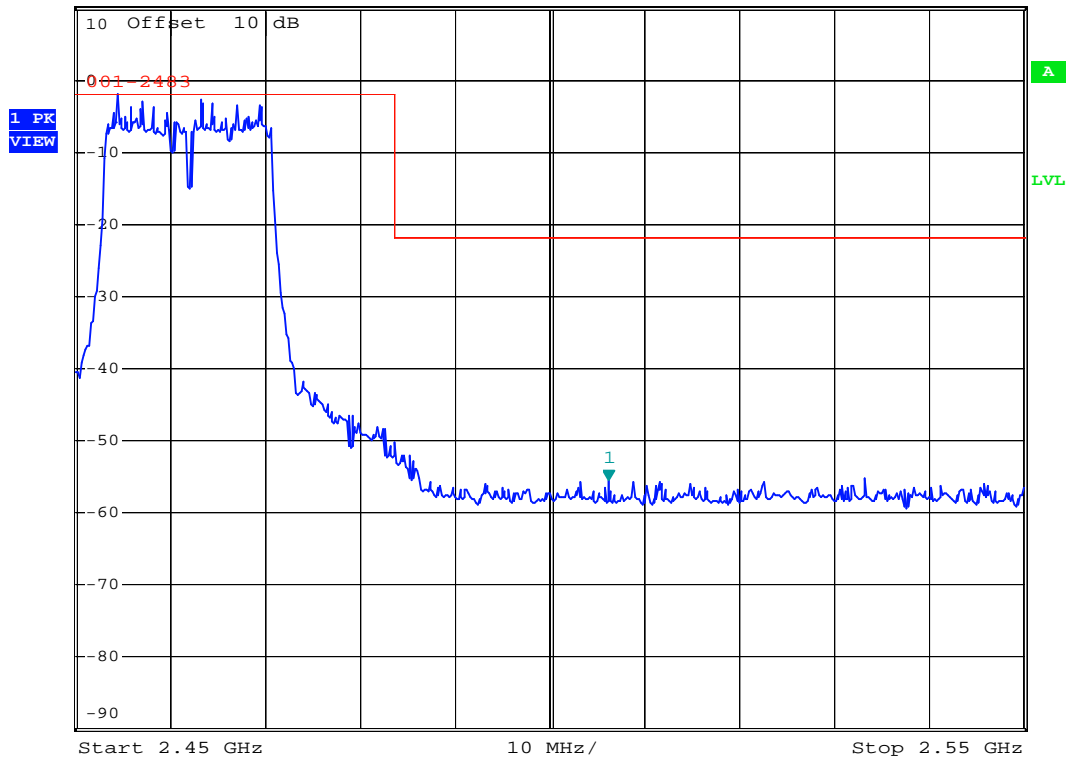


802.11n HT-40 (Antenna1)

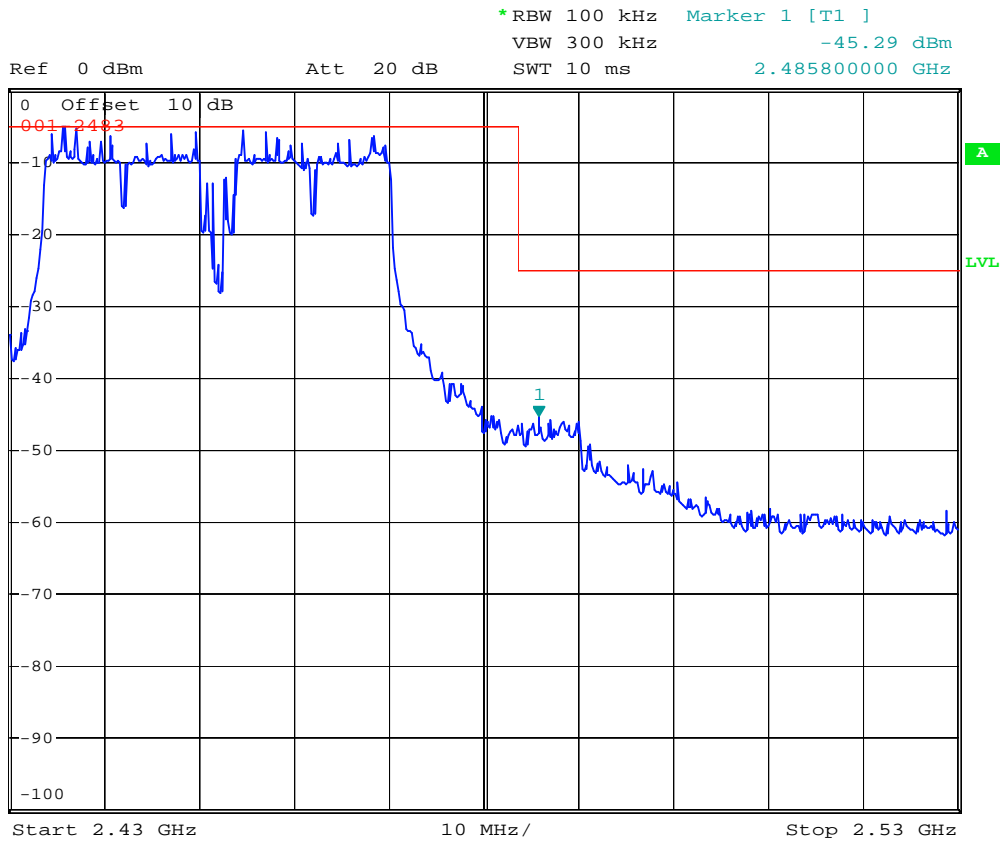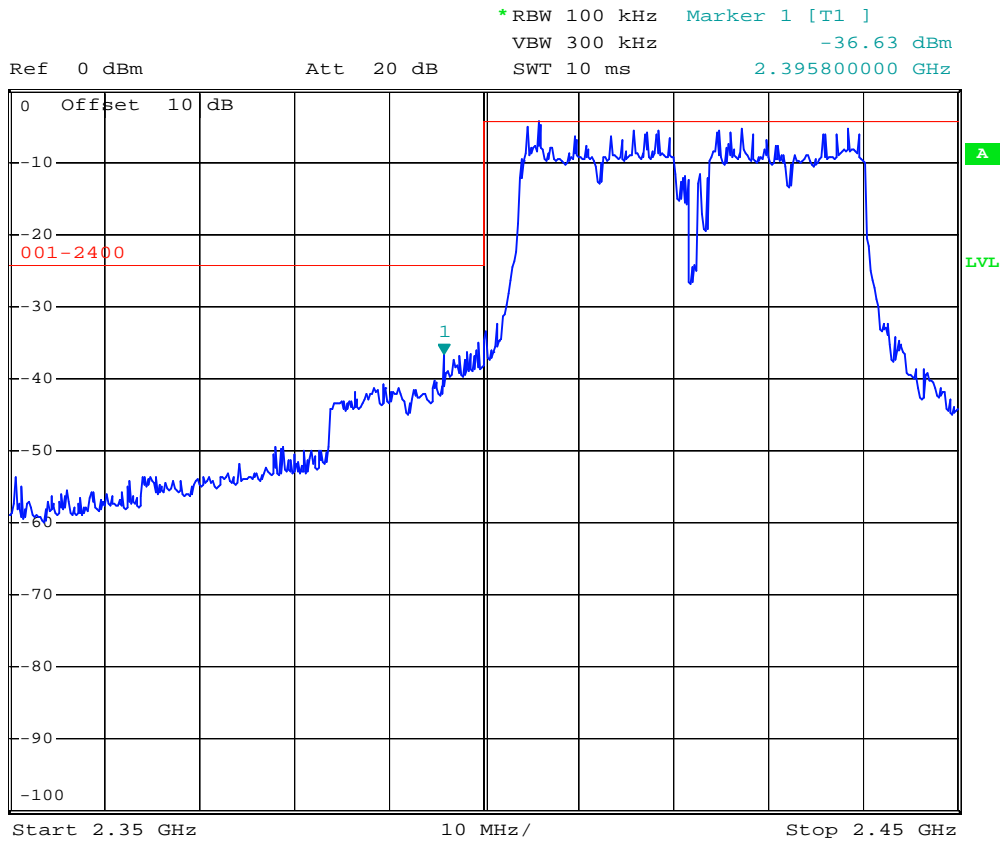


802.11n HT-40 (Antenna2)



Ref 0 dBm Att 20 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -36.51 dBm
SWT 10 ms 2.397000000 GHz

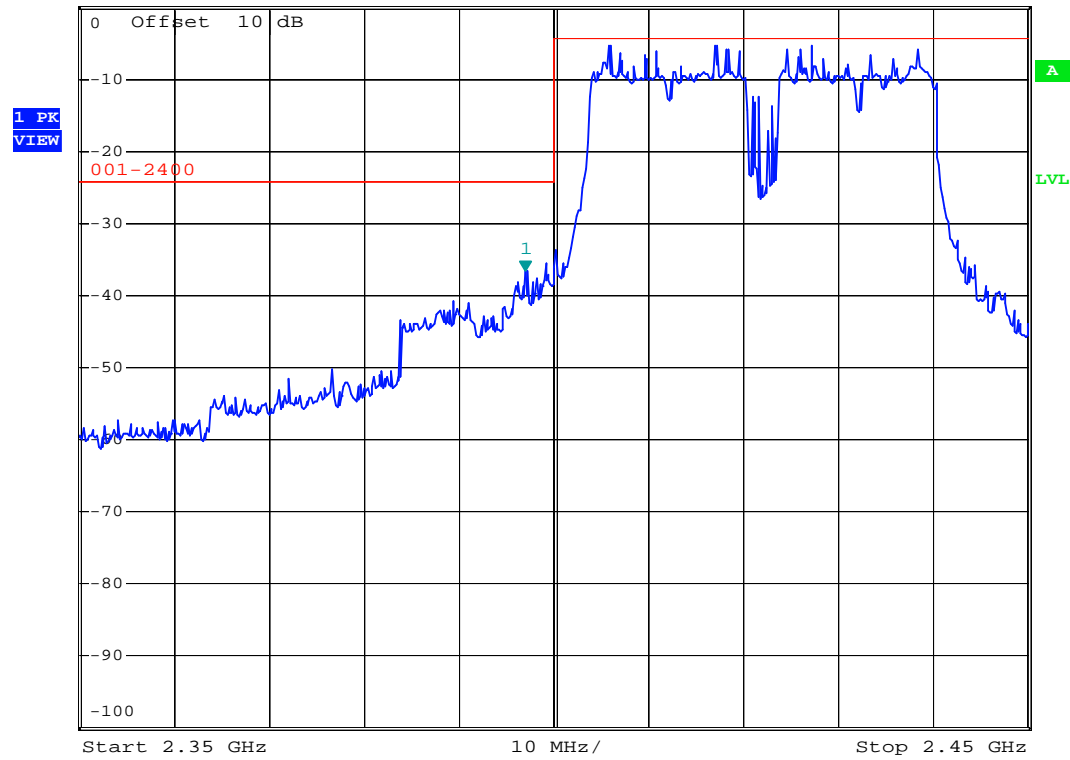

Ref 0 dBm Att 20 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -45.39 dBm
SWT 10 ms 2.488600000 GHz

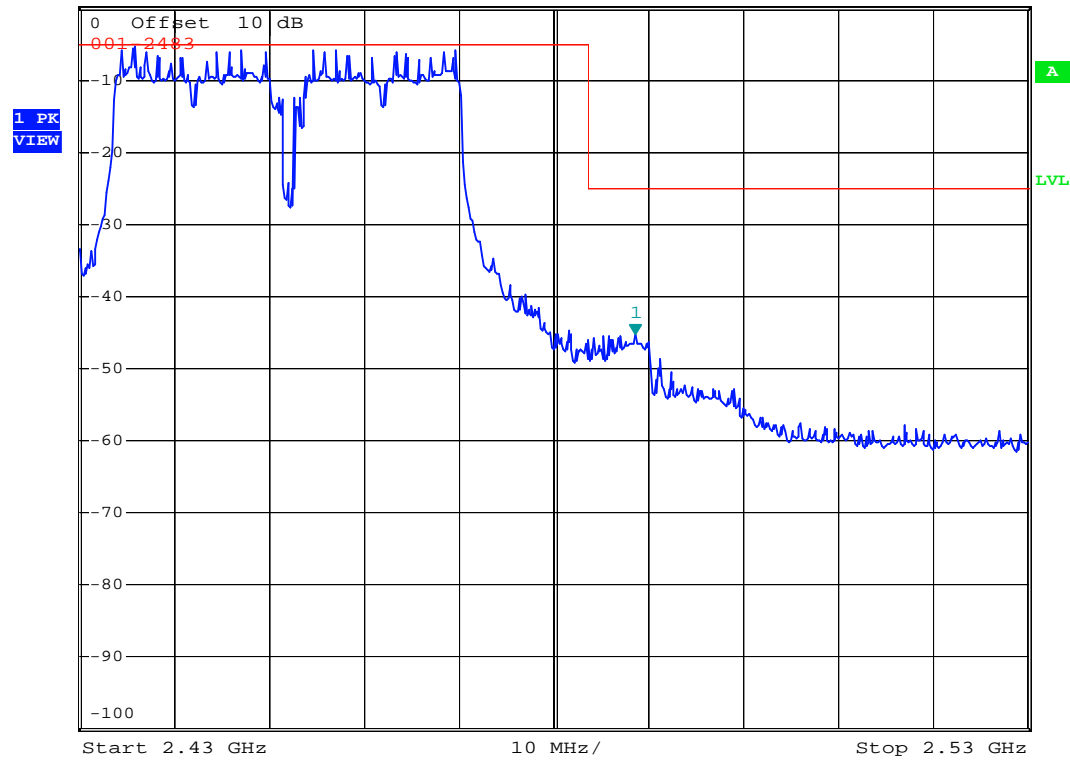

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
6. Set the VBW $\geq 3 \times \text{RBW}$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

10.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Channel Low: Maximun PSD is -12.47 dBm
- b) Channel Mid: Maximun PSD is -12.97 dBm
- c) Channel High: Maximun PSD is -12.84 dBm

B. 802.11g @6 Mbps

- a) Channel Low: Maximun PSD is -16.78 dBm
- b) Channel Mid: Maximun PSD is -17.26 dBm
- c) Channel High: Maximun PSD is -17.80 dBm

C. 802.11n HT-20 @6.5 Mbps

Antenna1

- a) Channel Low: Maximun PSD is -17.42 dBm
- b) Channel Mid: Maximun PSD is -17.62 dBm
- c) Channel High: Maximun PSD is -18.27 dBm

Antenna2

- a) Channel Low: Maximun PSD is -17.71 dBm
- b) Channel Mid: Maximun PSD is -18.02 dBm
- c) Channel High: Maximun PSD is -17.82 dBm

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log(N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	2412	-17.42	3.01	-14.41	8.00	Pass
	2437	-17.62	3.01	-14.61	8.00	Pass
	2462	-18.27	3.01	-15.26	8.00	Pass
1	2412	-17.71	3.01	-14.70	8.00	Pass
	2437	-18.02	3.01	-15.01	8.00	Pass
	2462	-17.82	3.01	-14.81	8.00	Pass

D. 802.11n HT-40 @13.5 Mbps

Antenna1

- a) Channel Low: Maximun PSD is -21.90 dBm
- b) Channel Mid: Maximun PSD is -21.50 dBm
- c) Channel High: Maximun PSD is -21.70 dBm

Antenna2

- a) Channel Low: Maximun PSD is -22.05 dBm
- b) Channel Mid: Maximun PSD is -21.26 dBm
- c) Channel High: Maximun PSD is -22.07 dBm

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log(N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	2422	-21.90	3.01	-18.89	8.00	Pass
	2437	-21.50	3.01	-18.49	8.00	Pass
	2452	-21.70	3.01	-18.69	8.00	Pass
1	2422	-22.05	3.01	-19.04	8.00	Pass
	2437	-21.26	3.01	-18.25	8.00	Pass
	2452	-22.07	3.01	-19.06	8.00	Pass

Note : The expanded uncertainty: 2dB.

802.11b / Channel Low




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -12.47 dBm
SWT 1.7 s 2.413713600 GHz

Ref 0 dBm

Att 20 dB

1 PK
VIEW

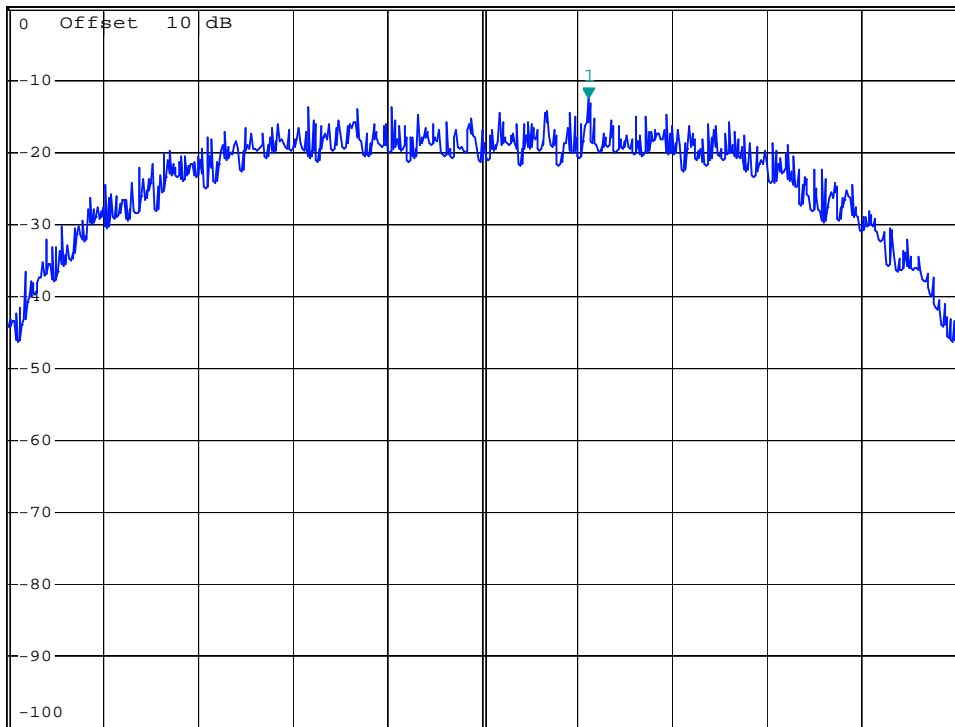

Center 2.412 GHz

1.53 MHz/

Span 15.3 MHz

802.11b / Channel Mid




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -12.97 dBm
SWT 1.7 s 2.438713600 GHz

Ref 0 dBm

Att 20 dB

1 PK
VIEW

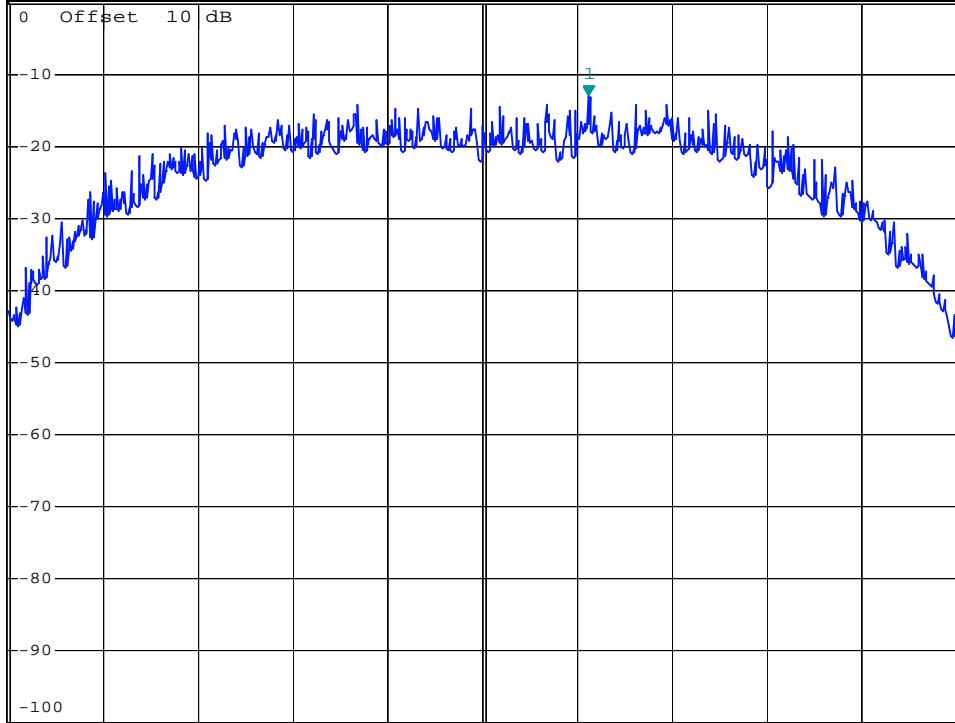

Center 2.437 GHz

1.53 MHz/

Span 15.3 MHz

802.11b / Channel High




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -12.84 dBm
SWT 1.7 s 2.463713600 GHz

Ref 0 dBm

Att 20 dB

1 PK
VIEW

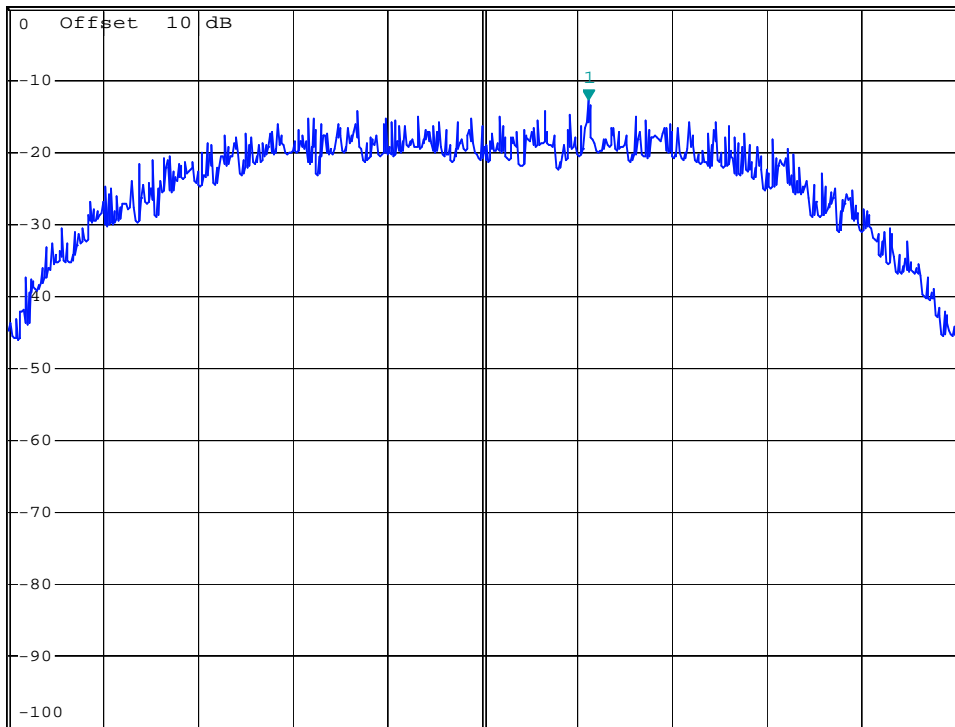

Center 2.462 GHz

1.53 MHz/

Span 15.3 MHz

802.11g / Channel Low




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -16.78 dBm
SWT 2.8 s 2.419474500 GHz

Ref 0 dBm

Att 20 dB

1 PK
VIEW

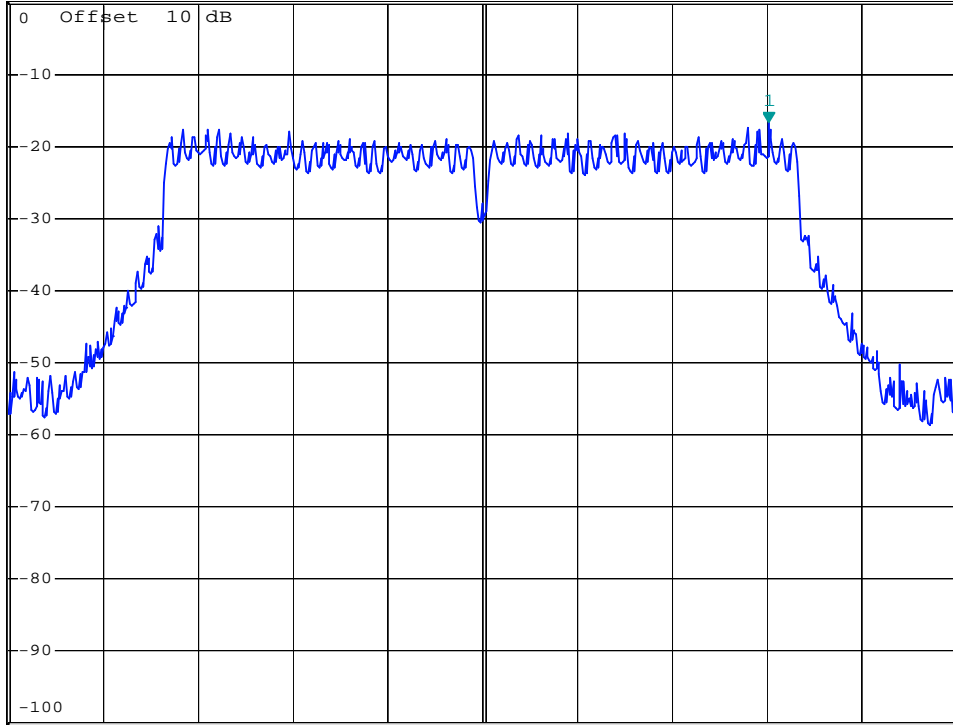

Center 2.412 GHz

2.475 MHz/

Span 24.75 MHz

802.11g / Channel Mid




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -17.26 dBm
SWT 2.8 s 2.429822500 GHz

Ref 0 dBm

Att 20 dB

1 PK
VIEW

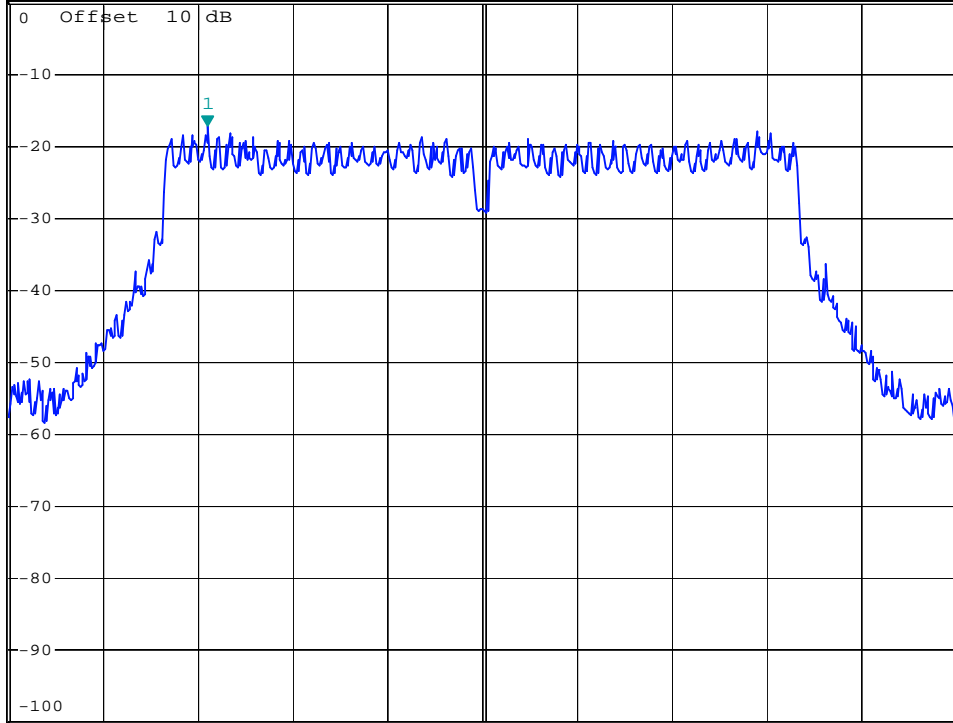

Center 2.437 GHz


2.475 MHz/

Span 24.75 MHz

802.11g / Channel High



*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -17.80 dBm
SWT 2.8 s 2.460713000 GHz

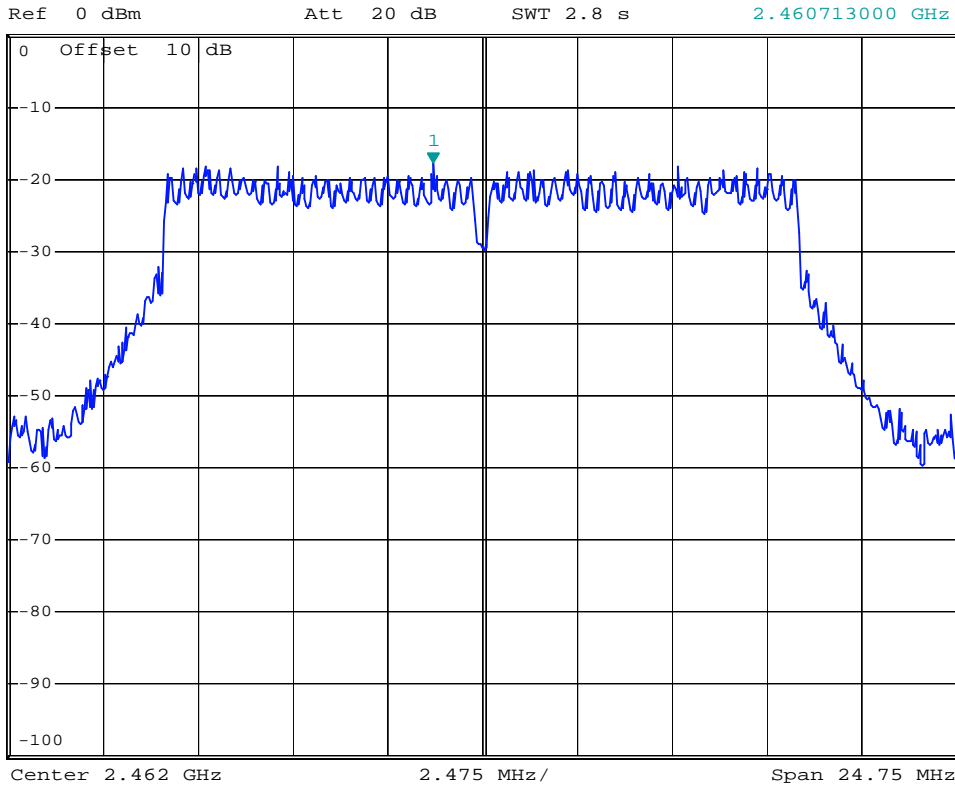


802.11n HT-20/Channel Low

Antenna1




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -16.86 dBm
SWT 3 s 2.415463200 GHz

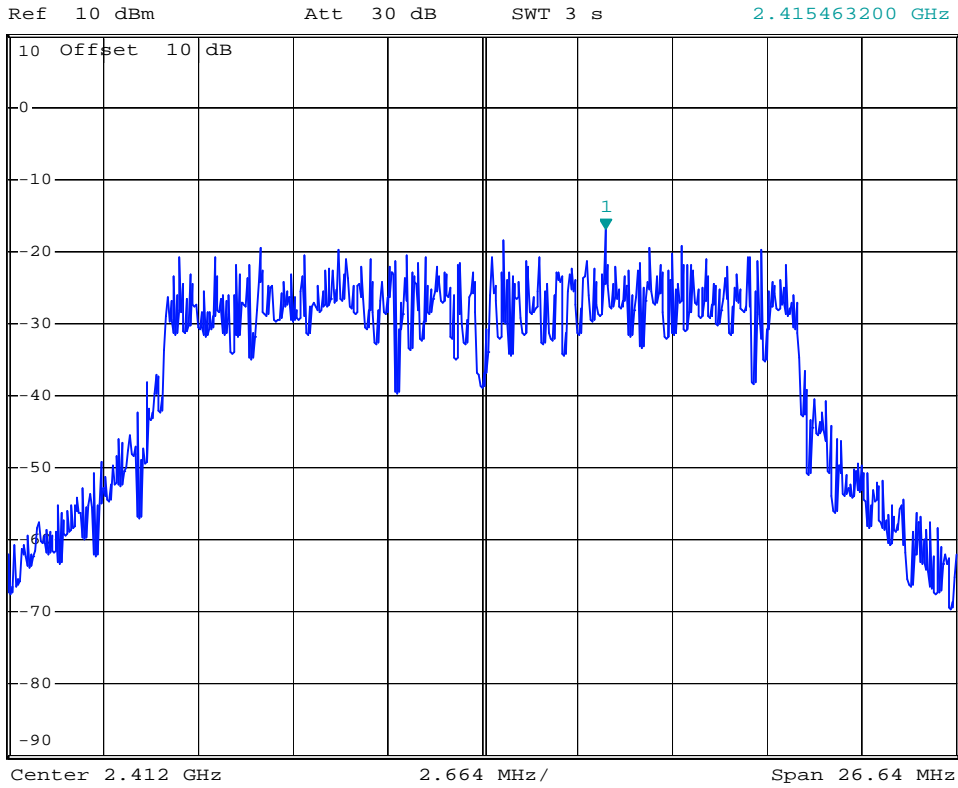

Antenna2



*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -17.71 dBm
SWT 3 s 2.404180480 GHz

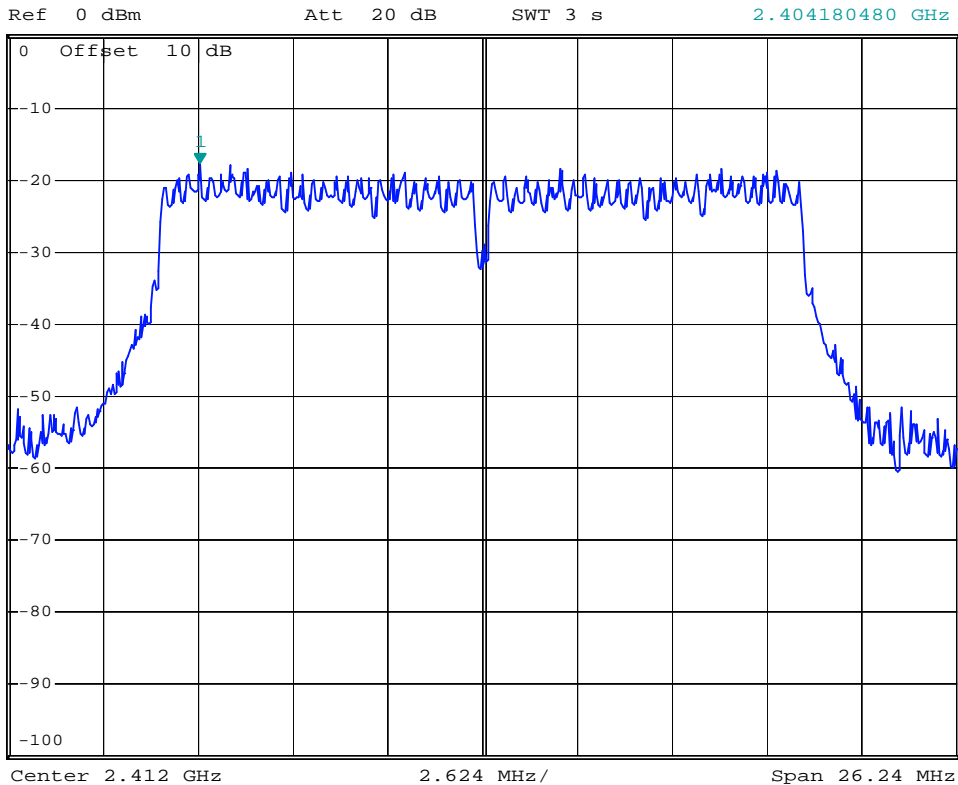


802.11n HT-20/ Channel Mid

Antenna1




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -17.62 dBm
SWT 3 s 2.441985600 GHz

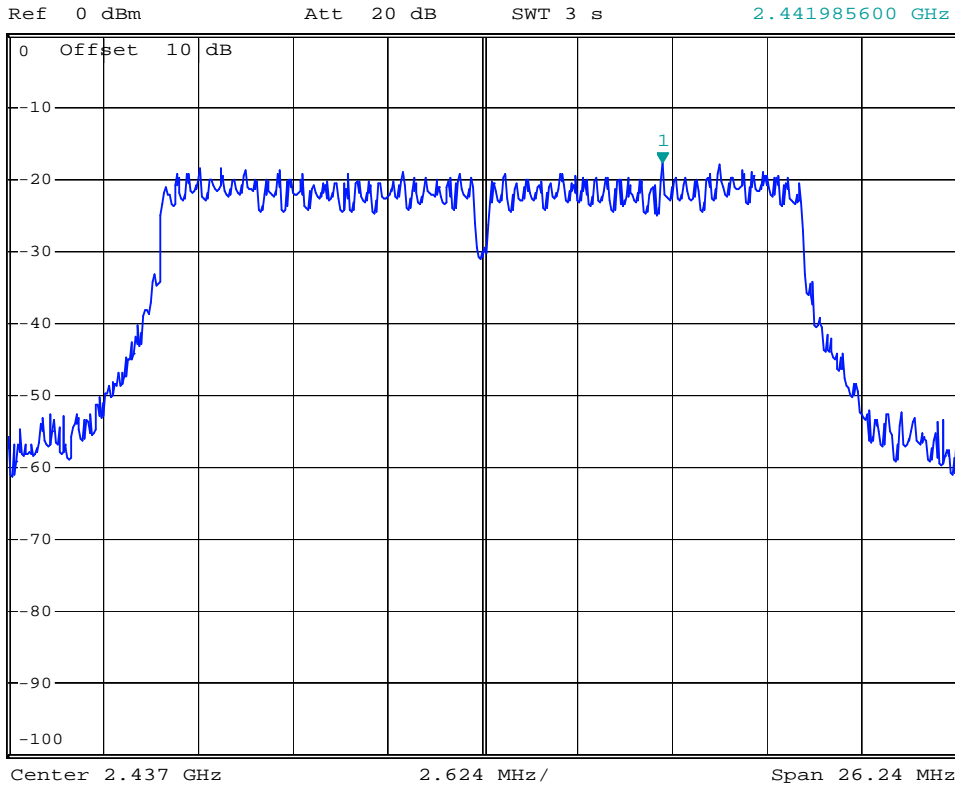

Antenna2




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -18.02 dBm
SWT 3 s 2.443560000 GHz

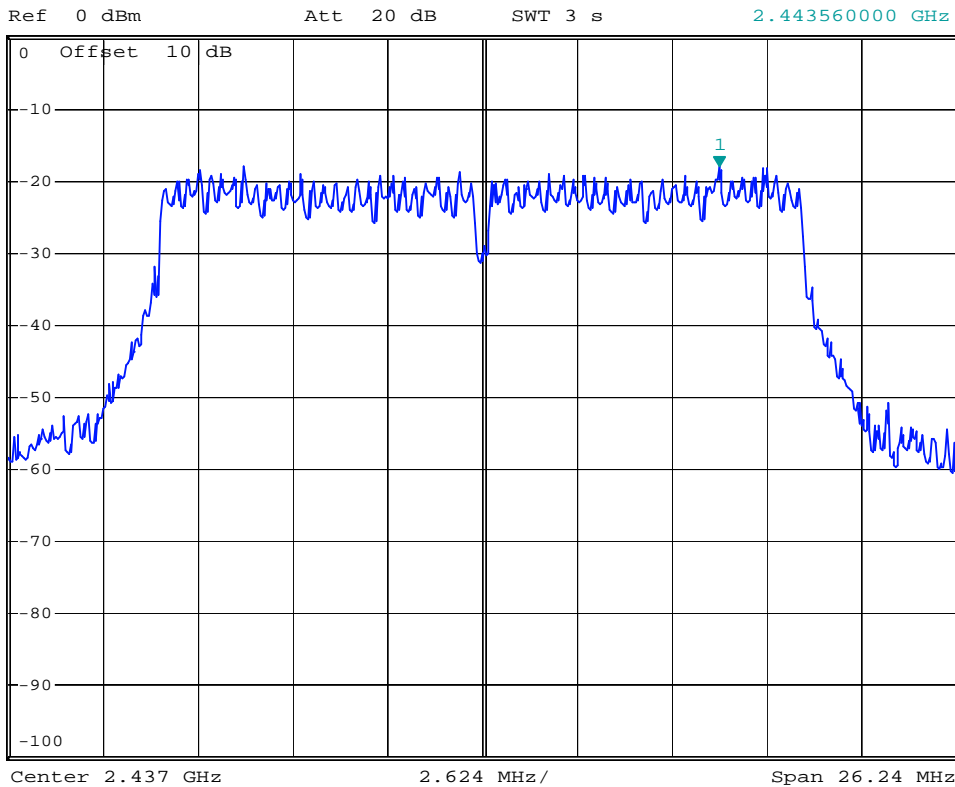


802.11n HT-20/ Channel High

Antenna1

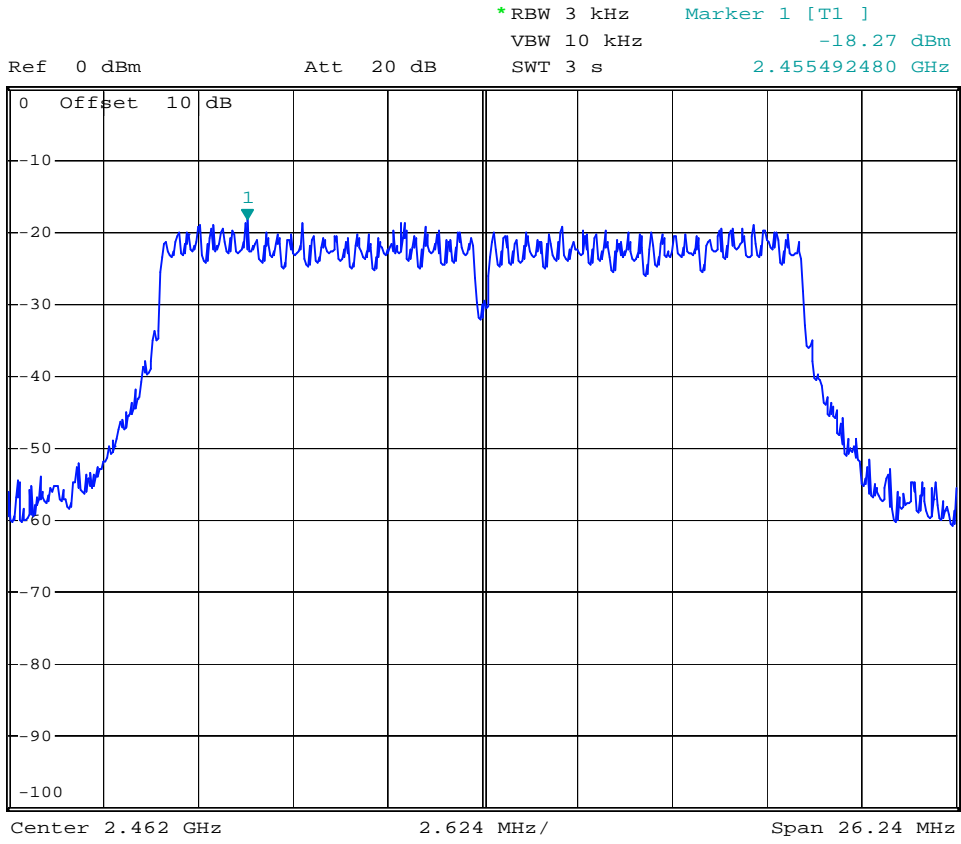


Antenna2

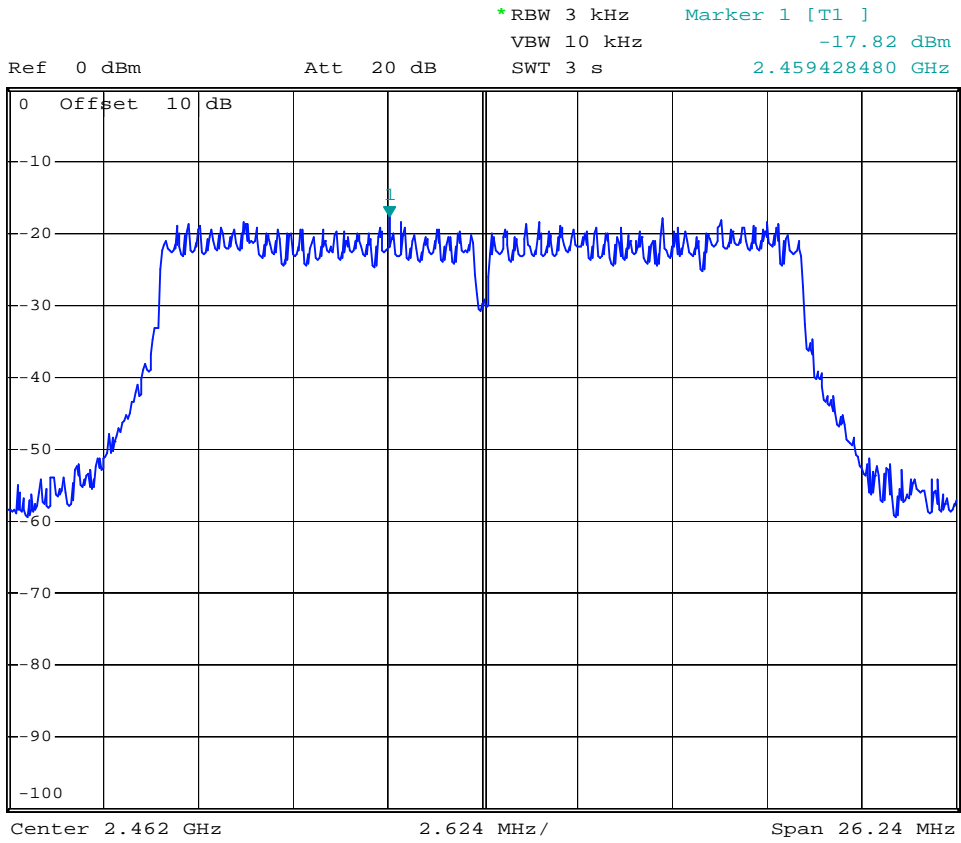


802.11n HT-40/ Channel Low

Antenna1

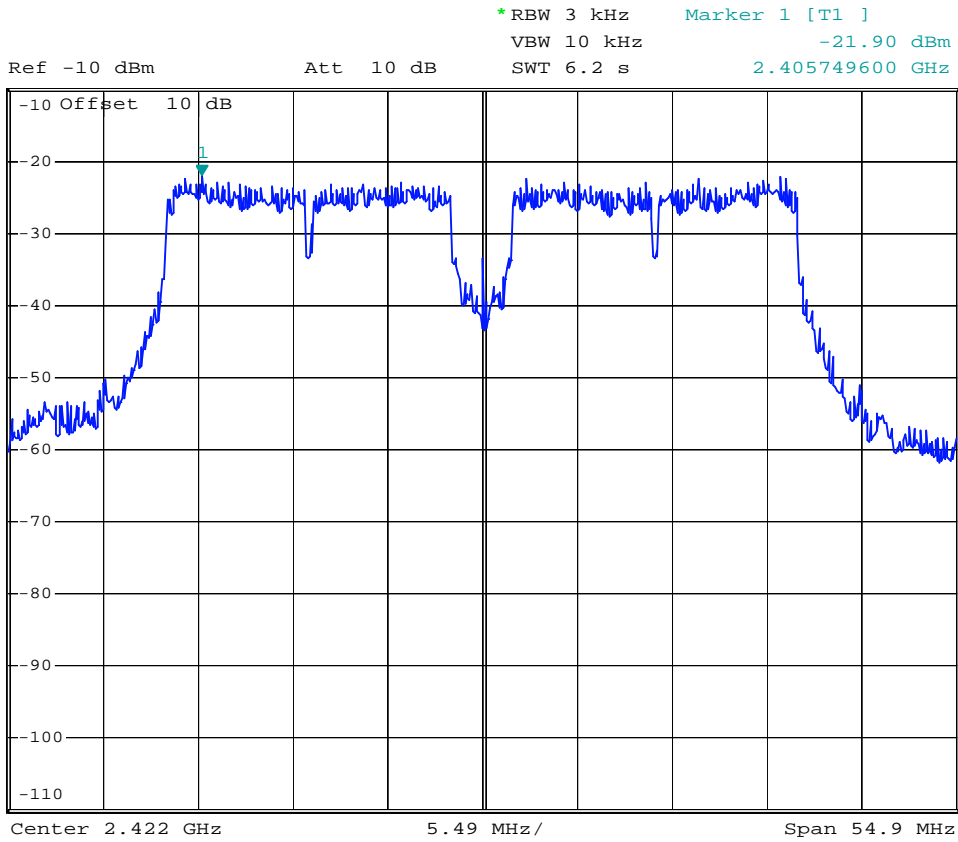

Antenna2

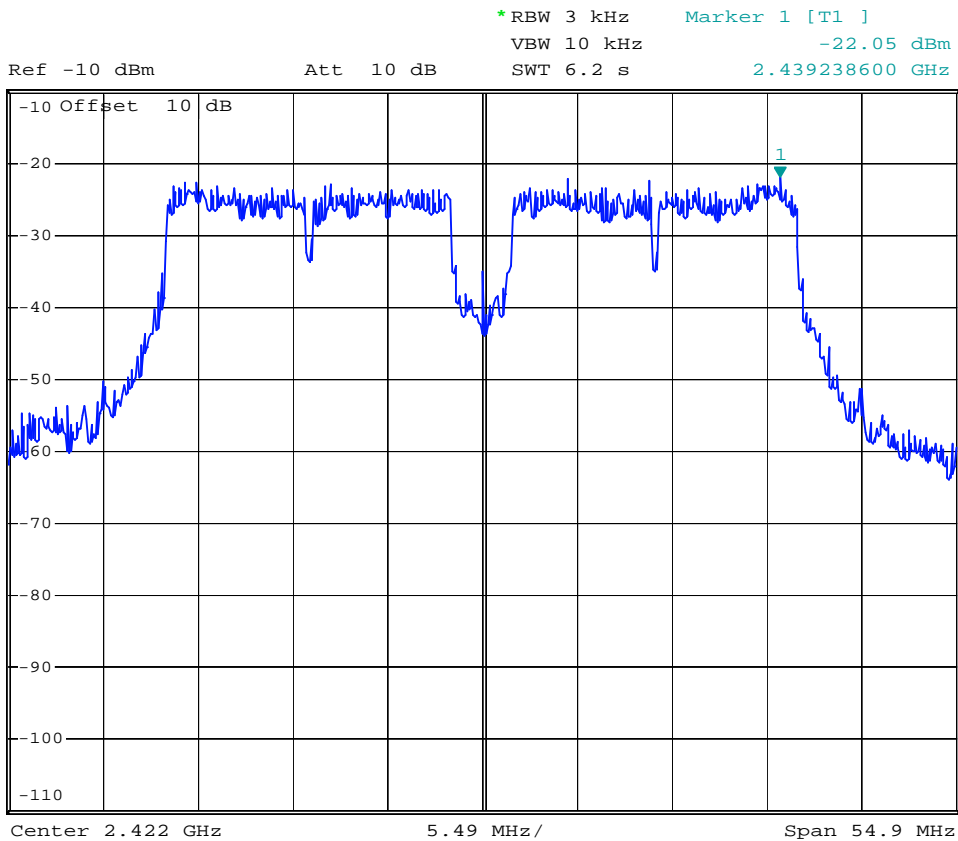


802.11n HT-40 Channel Mid

Antenna1




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -21.50 dBm
SWT 6.2 s 2.434474600 GHz

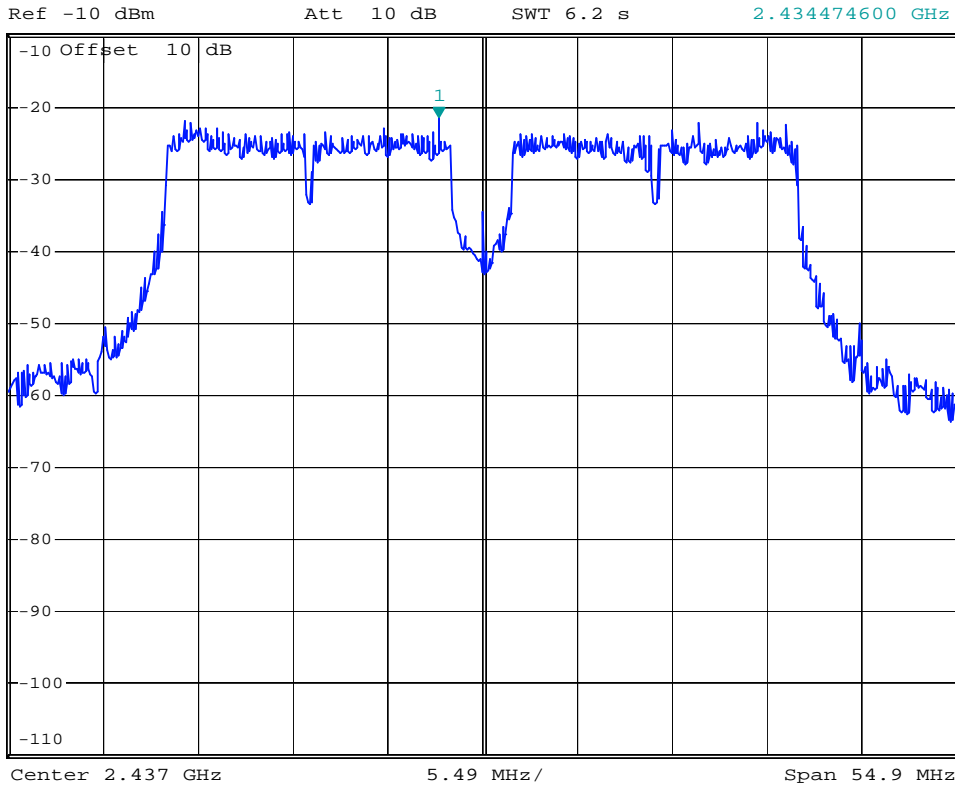


Antenna2




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -21.26 dBm
SWT 6.2 s 2.431949200 GHz

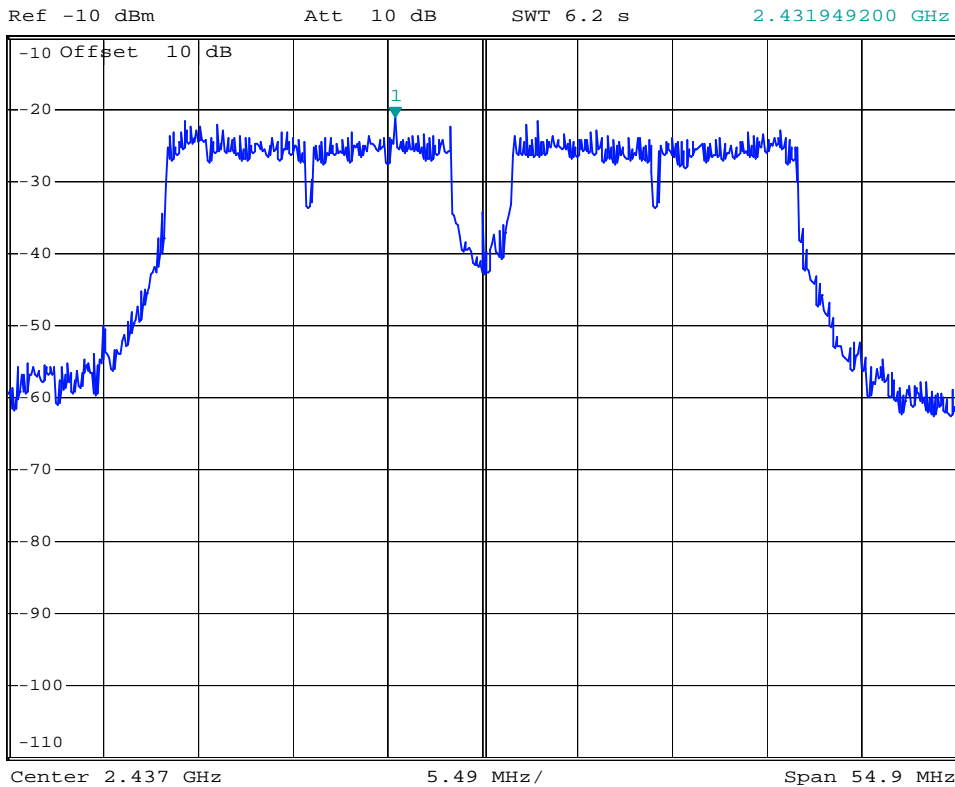

802.11n HT-40/ Channel High Antenna1

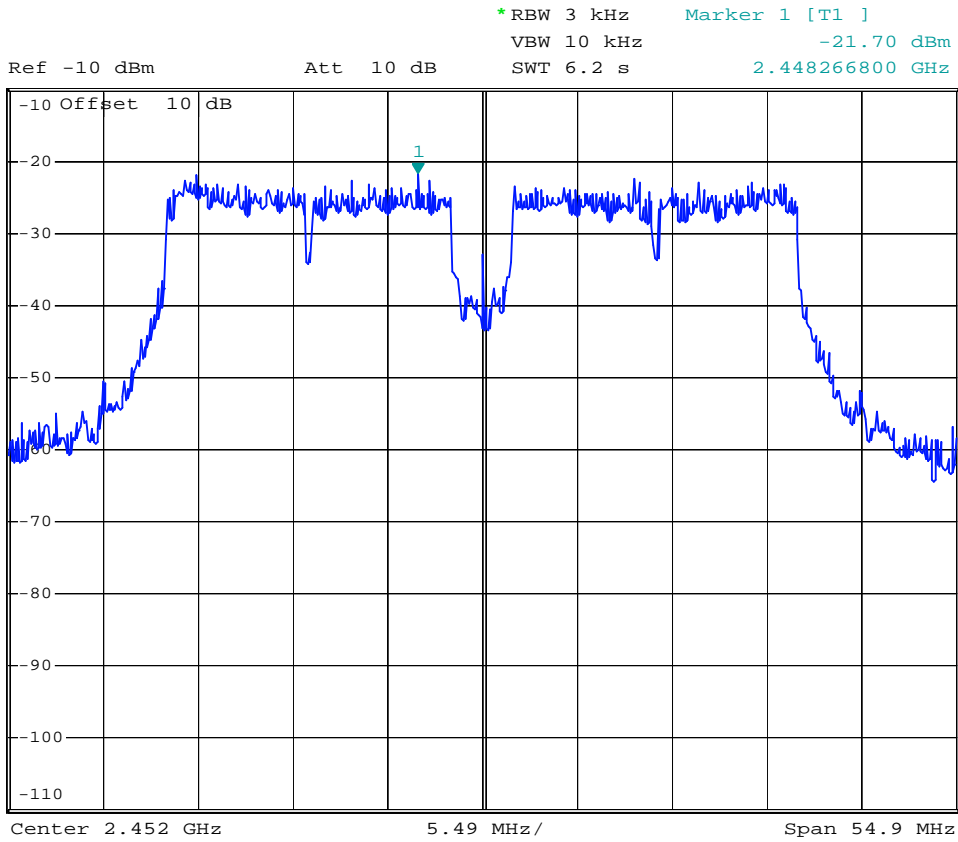

Antenna2

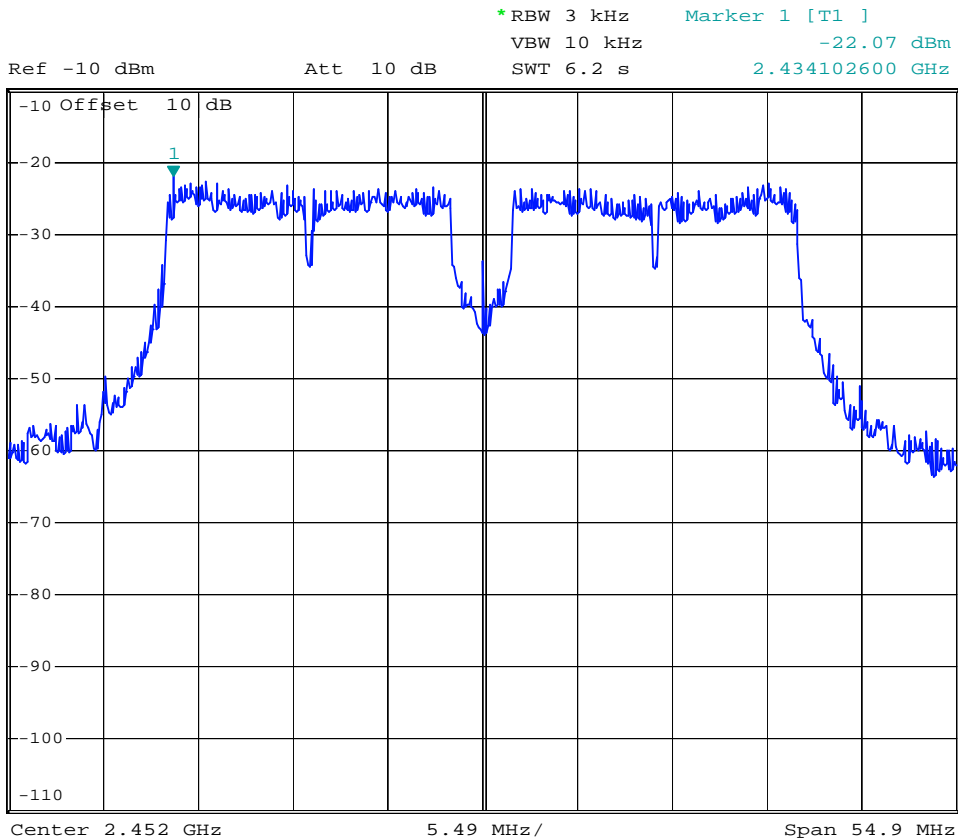

11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02
Attenuator	MINI-CIRCUITS	BW-S10W2+	2016/09/30	2017/09/29

11.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

D. 802.11n HT-40 @13.5 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.


802.11b / Channel Low



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.11 dBm
*Att 20 dB SWT 100 ms 674.080000000 MHz

Ref 10 dBm


1 PK
VIEW

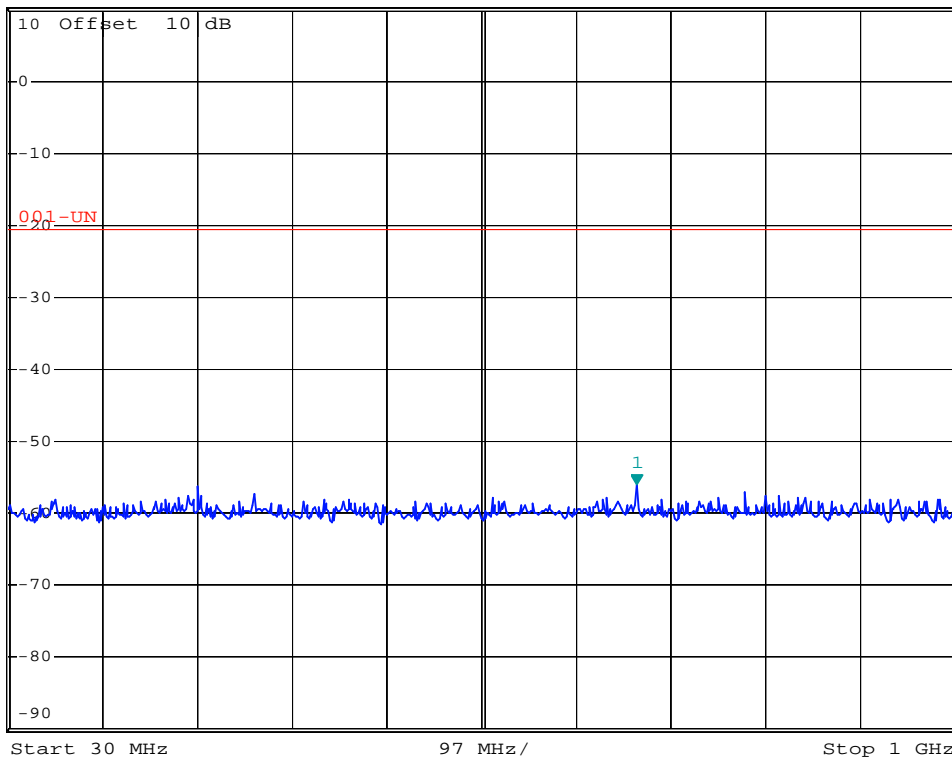

*RBW 100 kHz
VBW 300 kHz
*Att 20 dB SWT 2.6 s

Ref 10 dBm

1 PK
VIEW

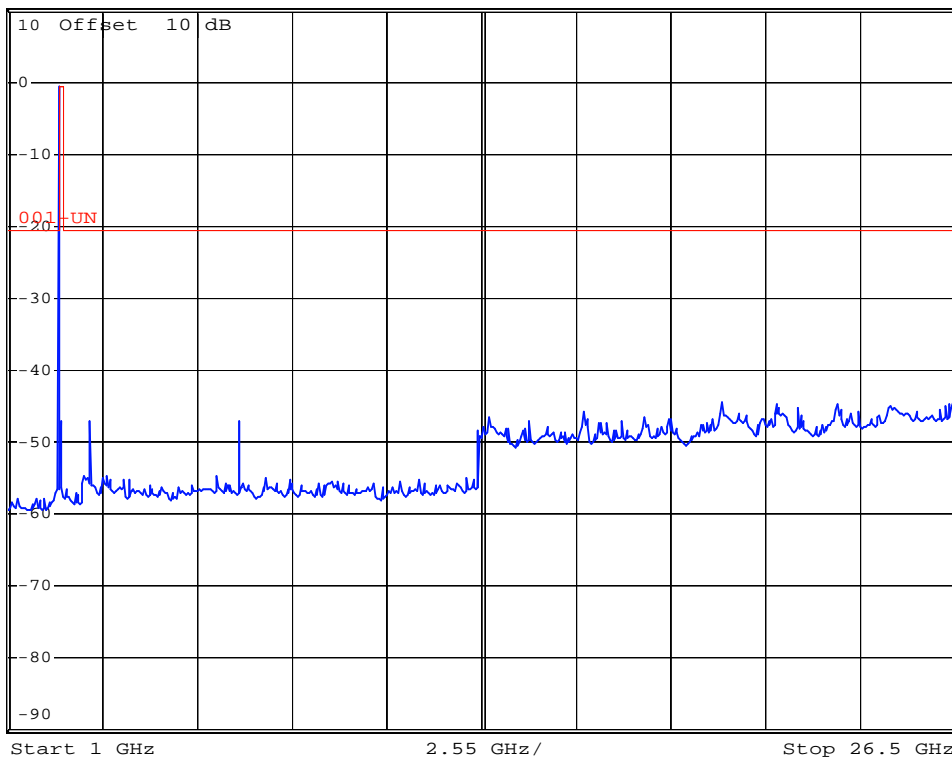


802.11b / Channel High




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.50 dBm
*Att 20 dB SWT 100 ms 724.520000000 MHz

Ref 10 dBm

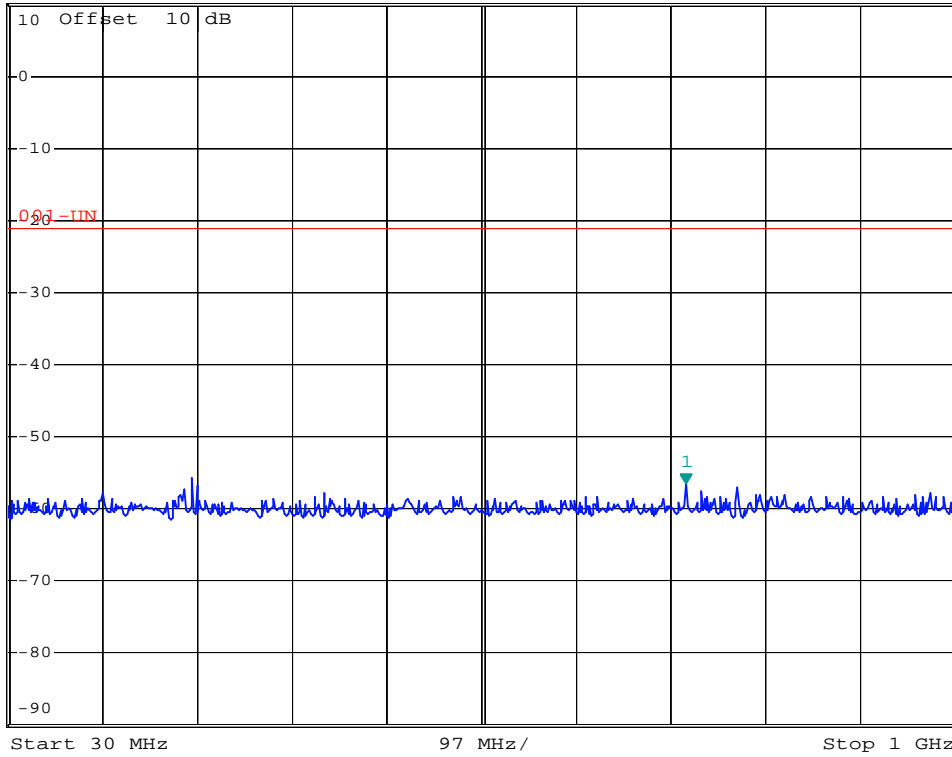

*RBW 100 kHz
VBW 300 kHz
*Att 20 dB SWT 2.6 s

Ref 10 dBm

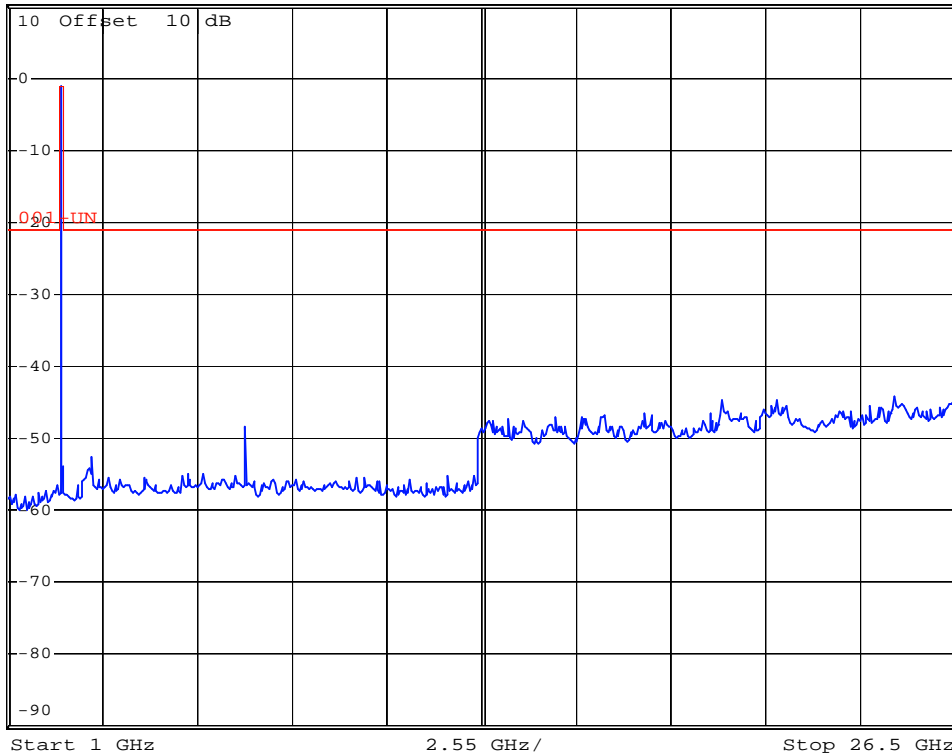

802.11g / Channel Mid




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -55.23 dBm
SWT 100 ms 222.060000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

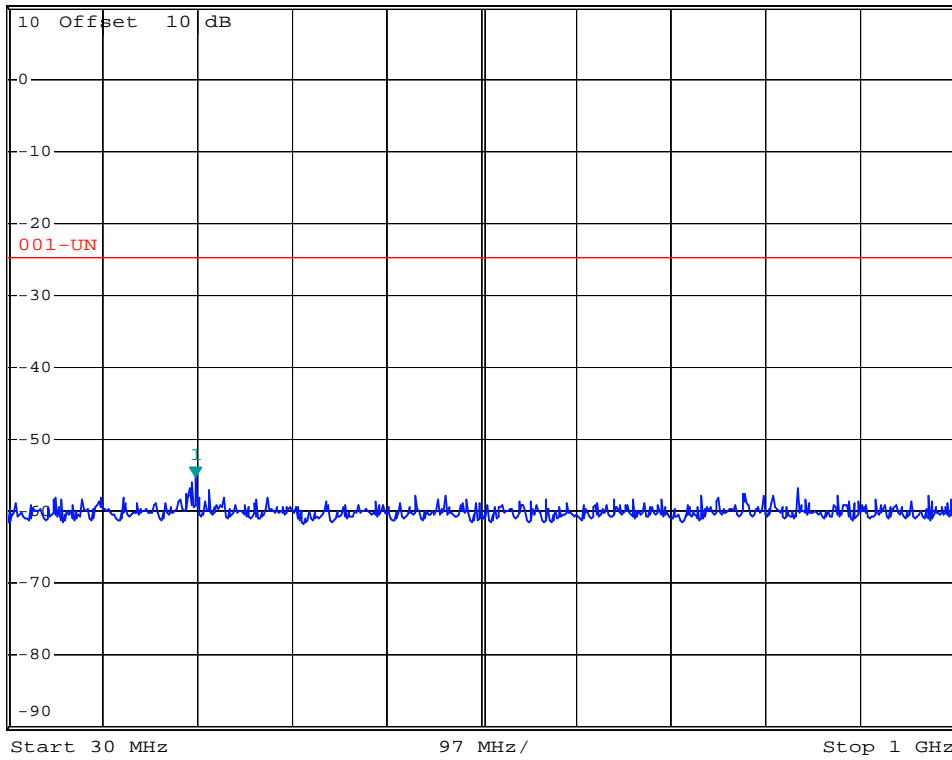


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

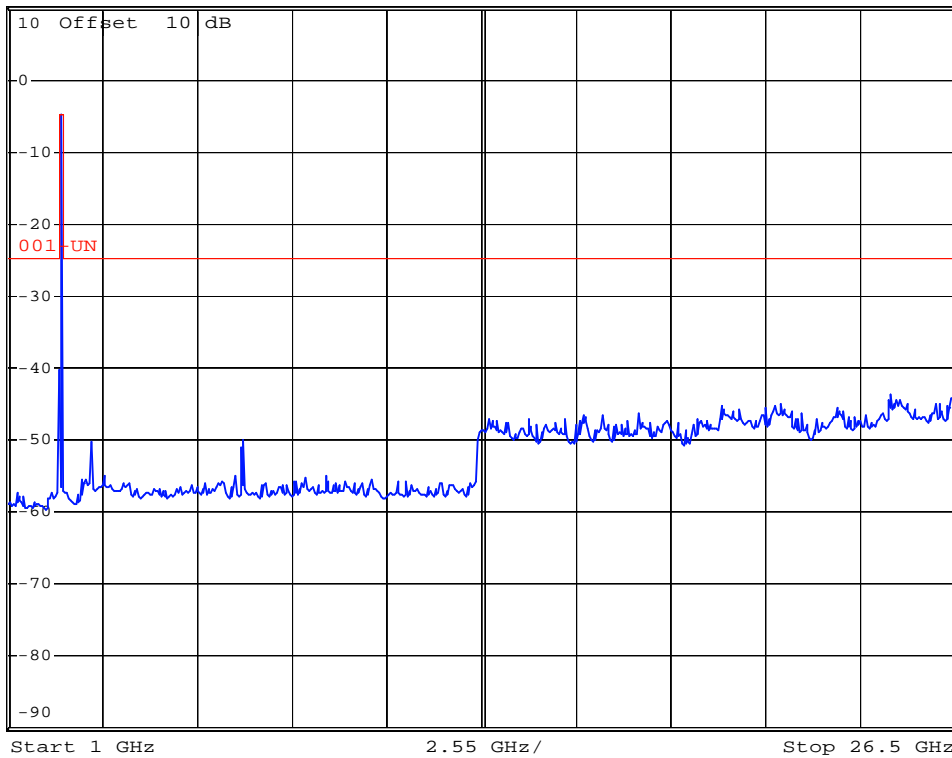

802.11g / Channel High




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -55.73 dBm
SWT 100 ms 214.300000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

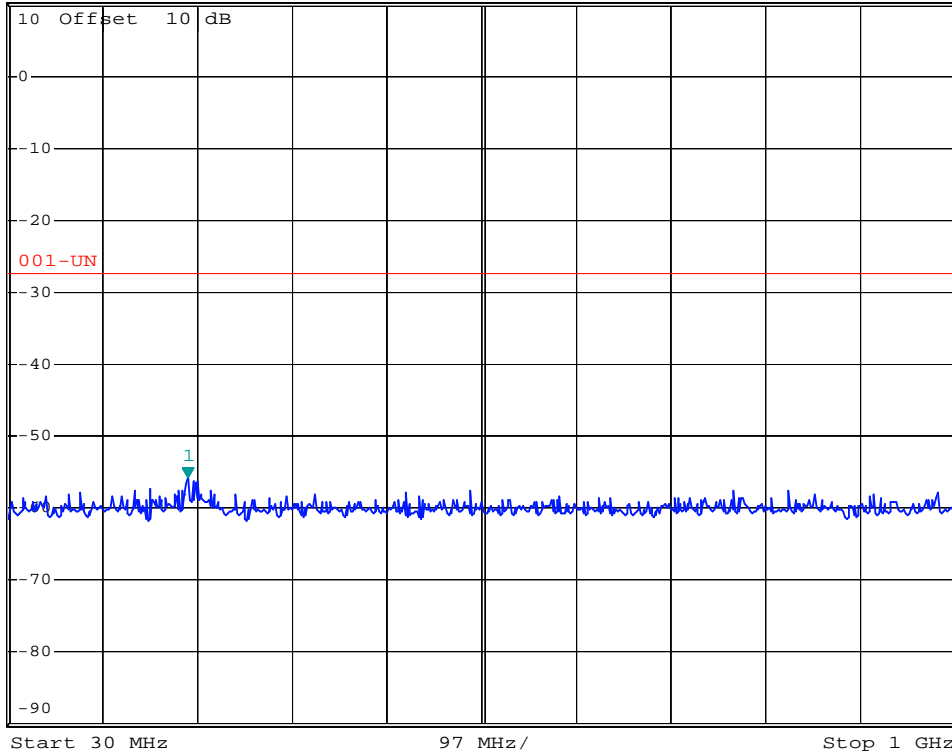


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

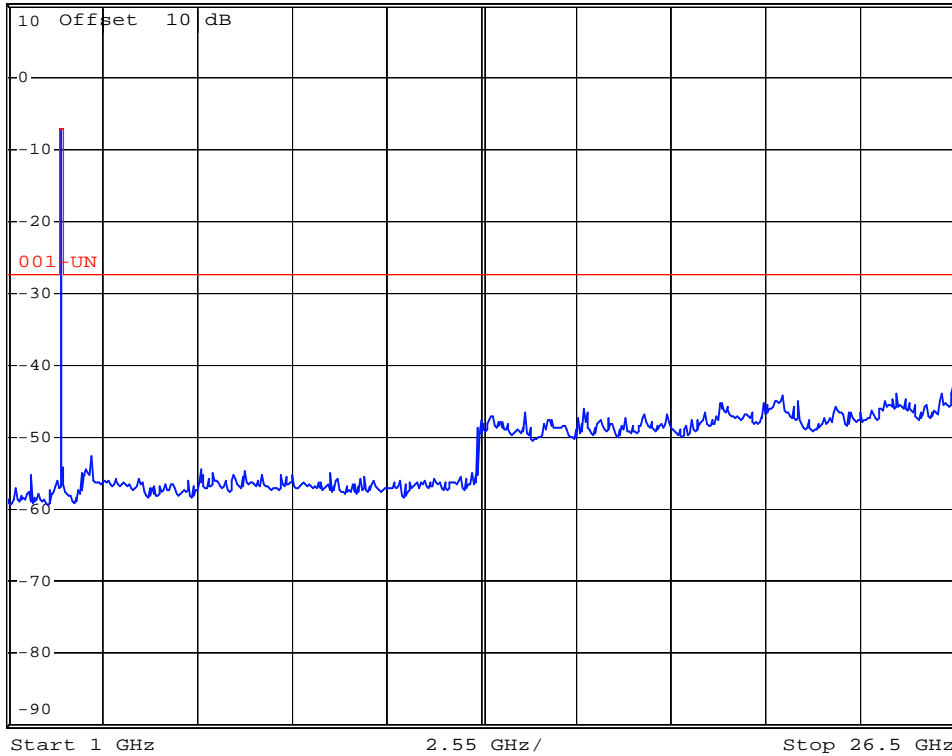

802.11n HT-20/ Channel Mid (Antenna1)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.22 dBm
SWT 100 ms 212.360000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

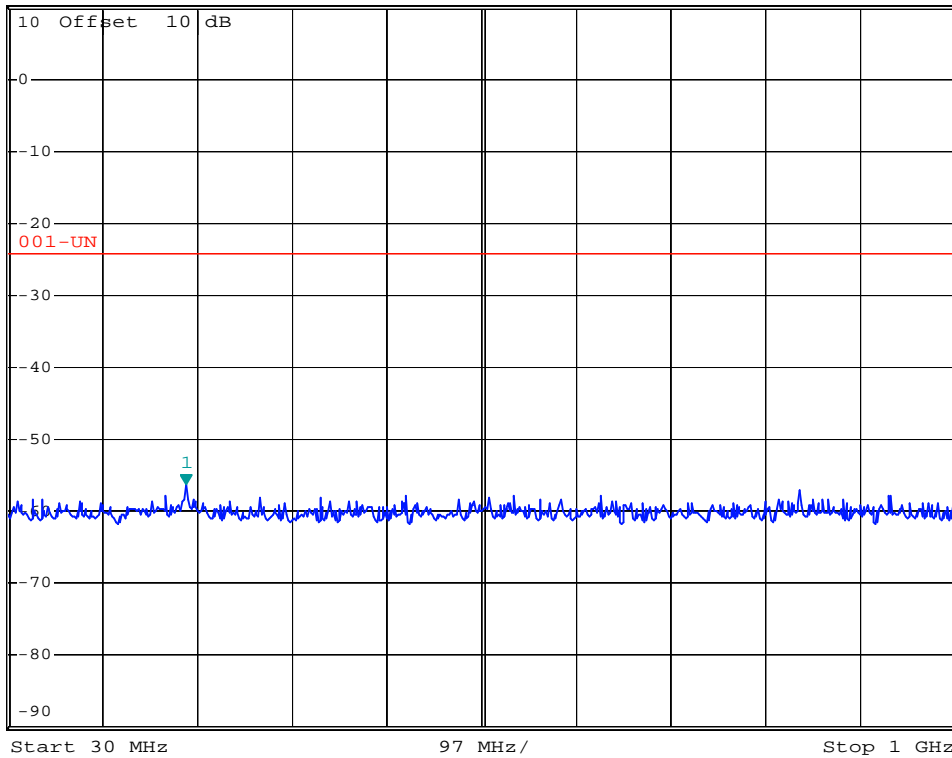


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

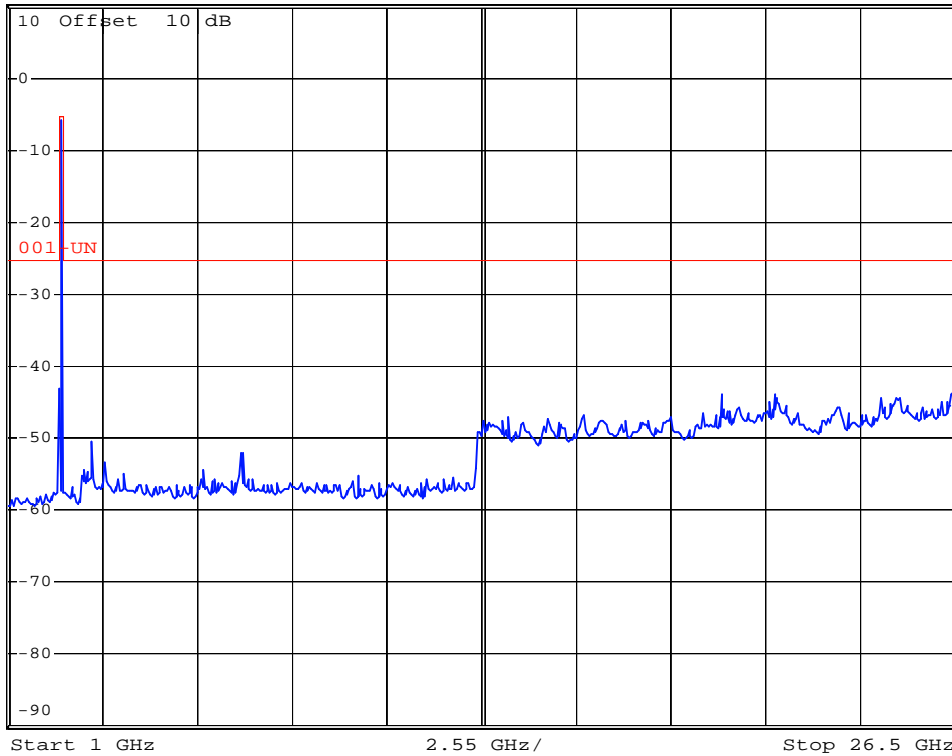

802.11n HT-20/ Channel High (Antenna1)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -55.76 dBm
SWT 100 ms 218.18000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

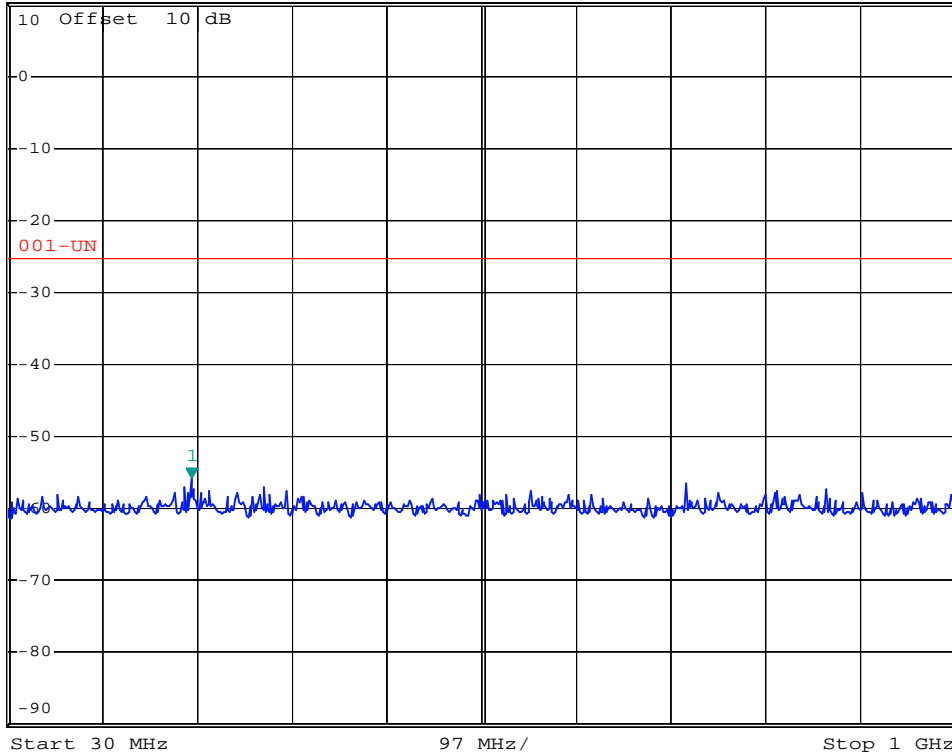


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB


1 PK
VIEW

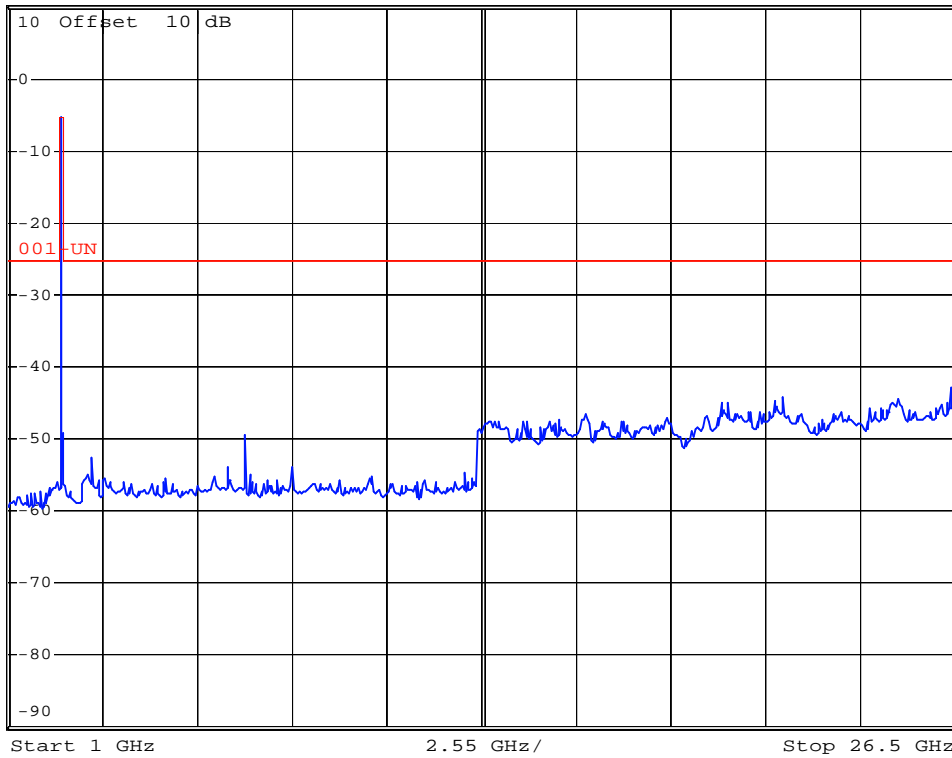


802.11n HT-20/ Channel Low (Antenna2)



*RBW 100 kHz Marker 1 [T1]
 VBW 300 kHz -55.34 dBm
 SWT 100 ms 220.12000000 MHz

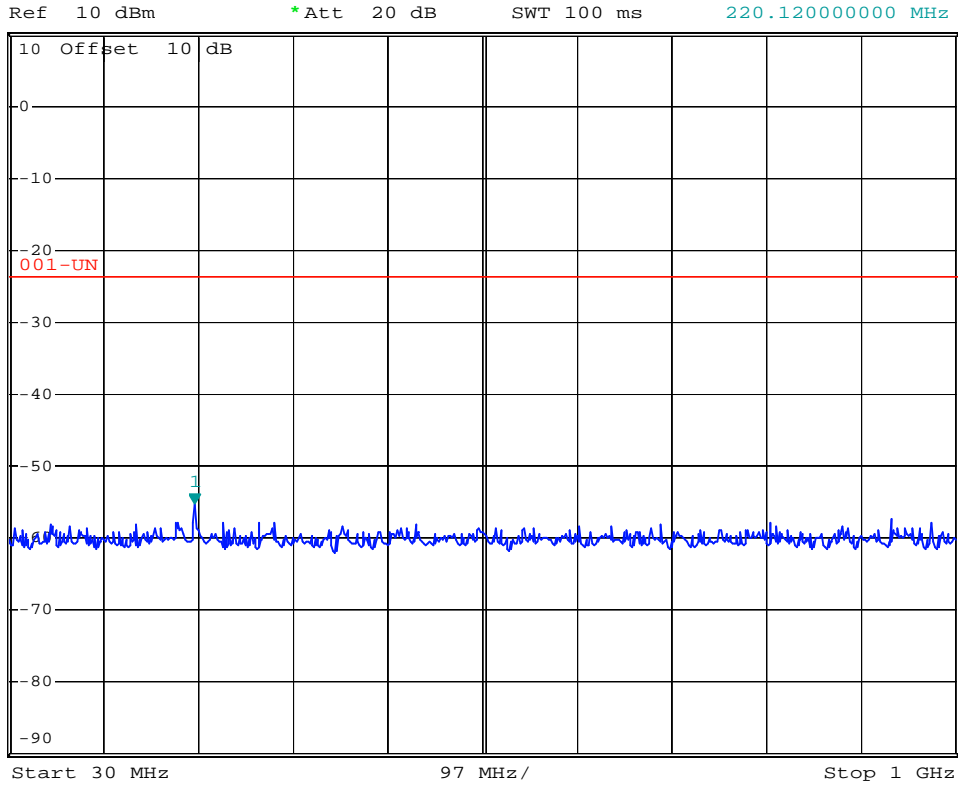

*RBW 100 kHz
 VBW 300 kHz
 SWT 2.6 s

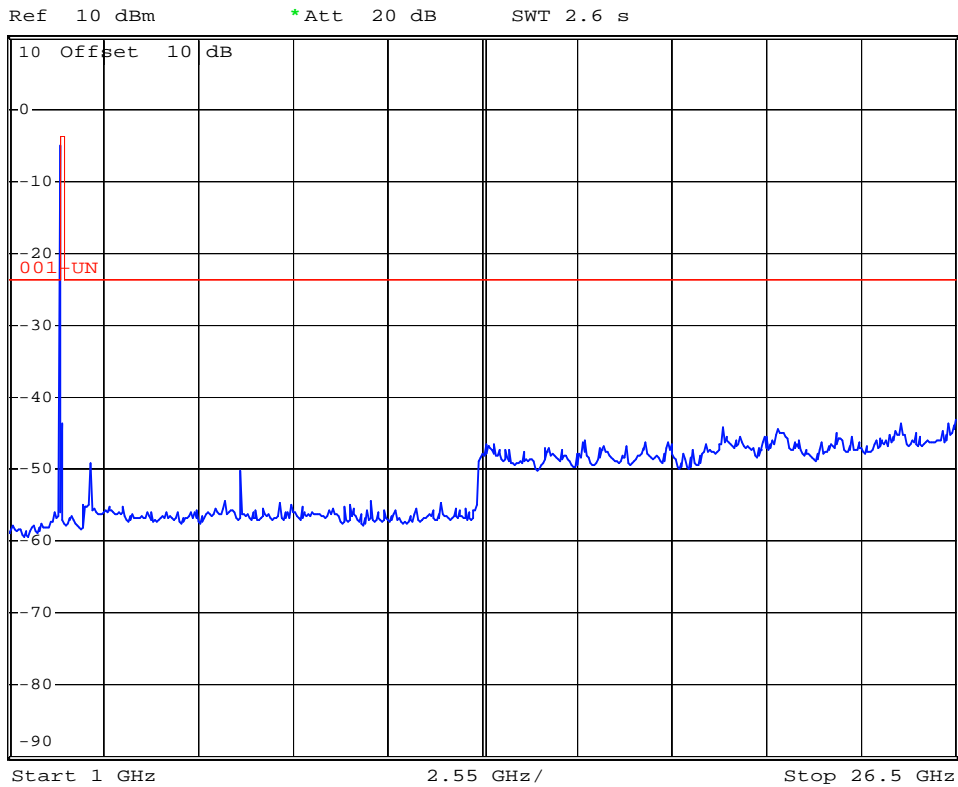

802.11n HT-20/ Channel Mid (Antenna2)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.65 dBm
SWT 100 ms 94.020000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

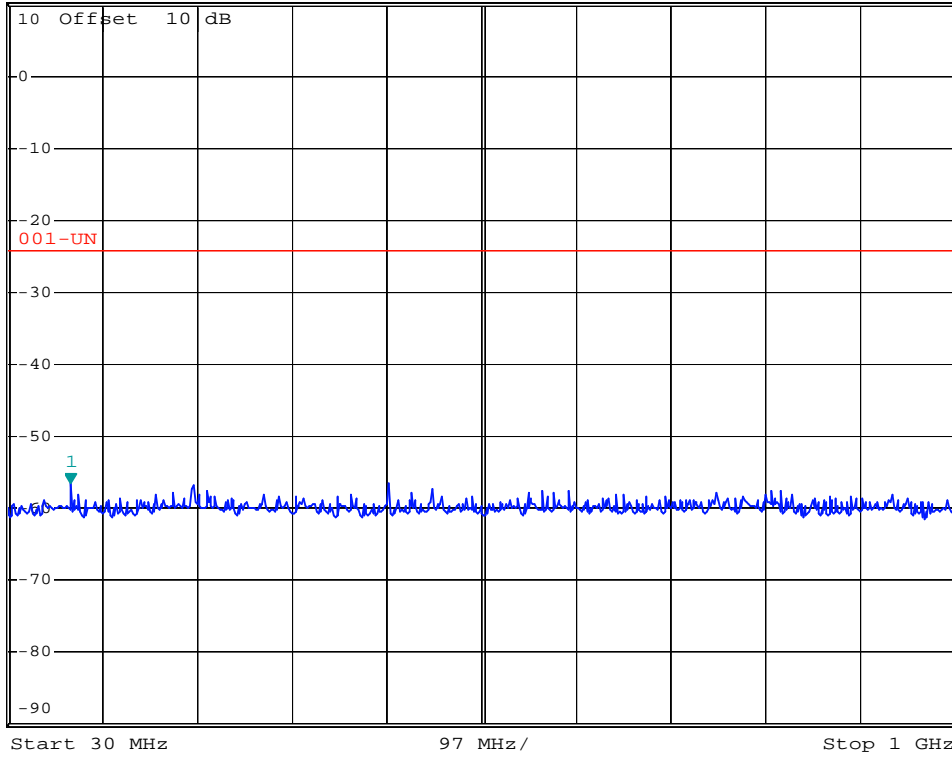


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

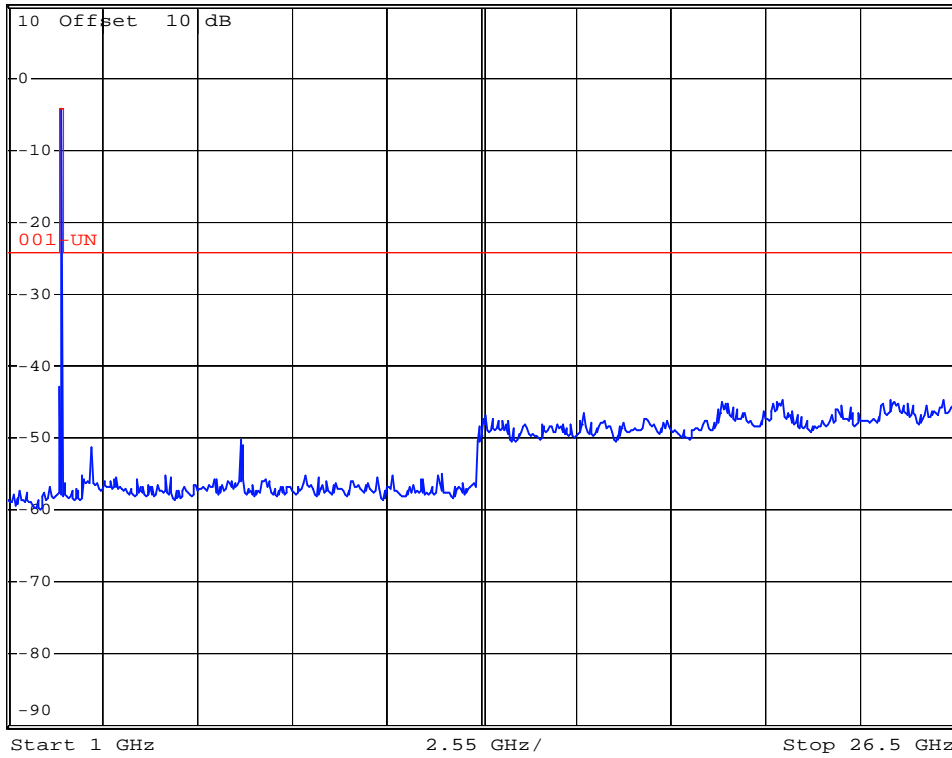

802.11n HT-20/ Channel High (Antenna2)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -56.90 dBm
SWT 100 ms 379.200000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

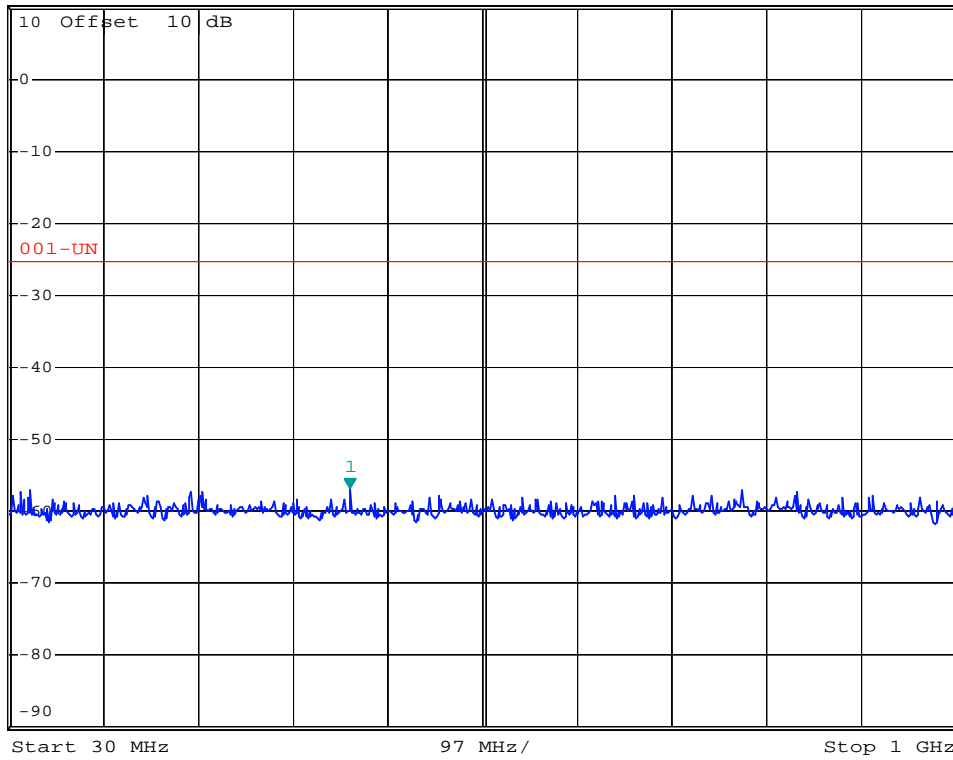


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 10 dBm

*Att 20 dB


1 PK
VIEW

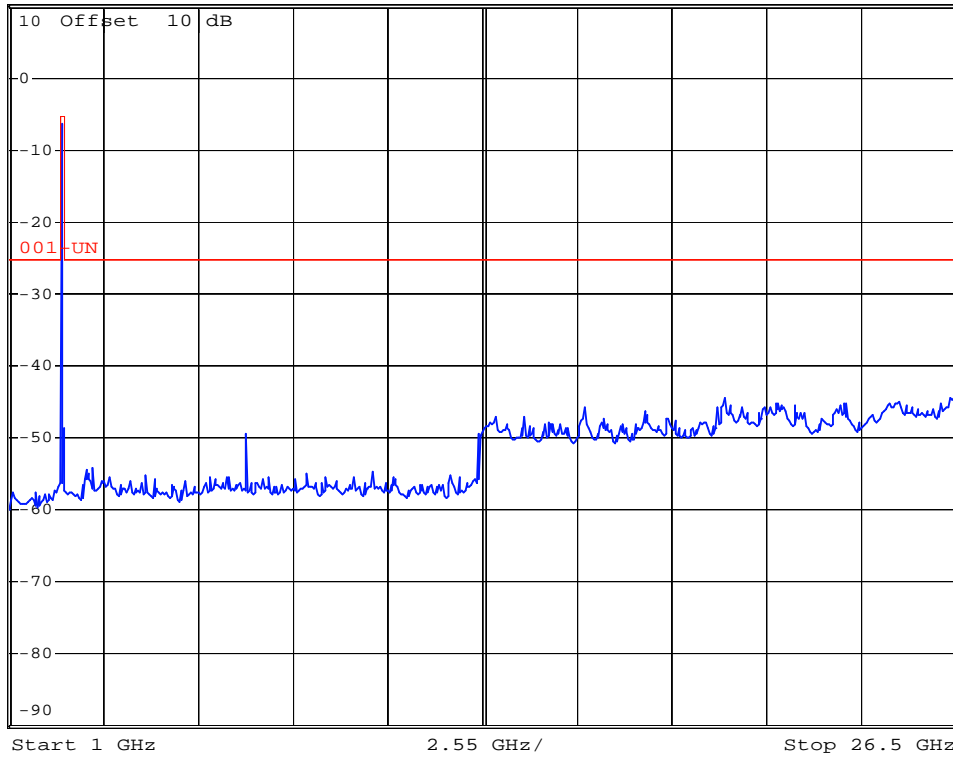


802.11n HT-40/ Channel Mid (Antenna1)



*RBW 100 kHz Marker 1 [T1]
 VBW 300 kHz -57.88 dBm
 Att 20 dB SWT 100 ms 214.300000000 MHz

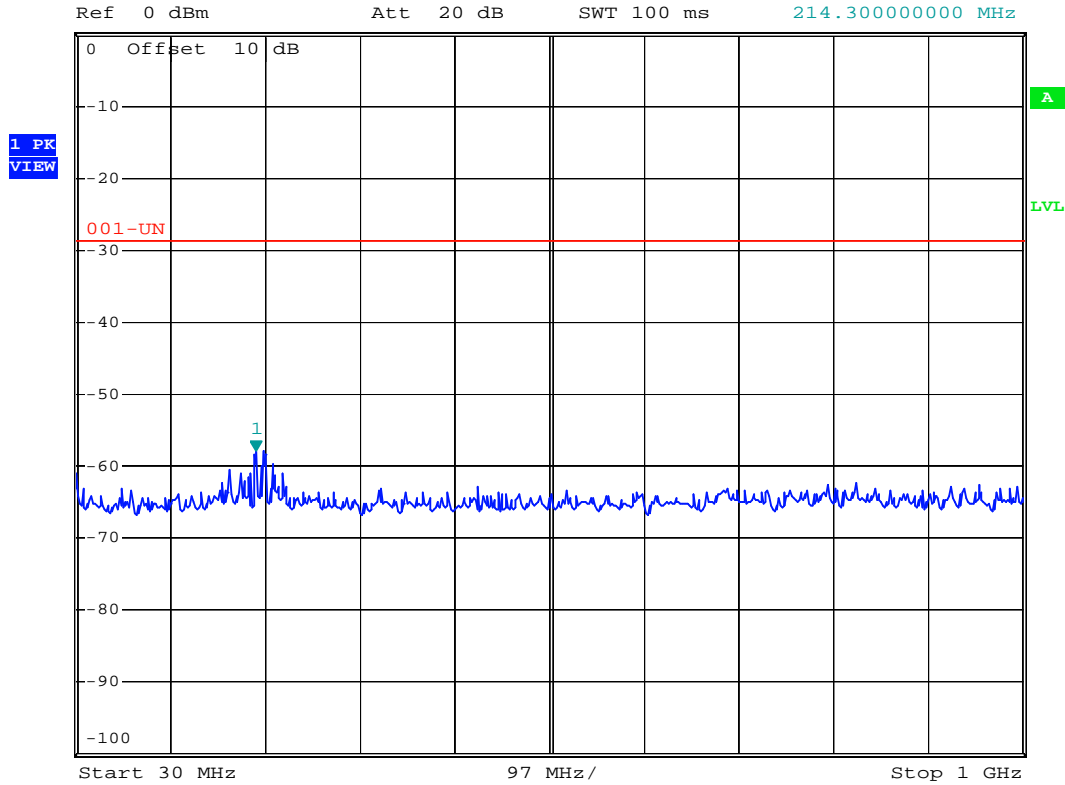

*RBW 100 kHz
 VBW 300 kHz
 Att 20 dB SWT 2.6 s

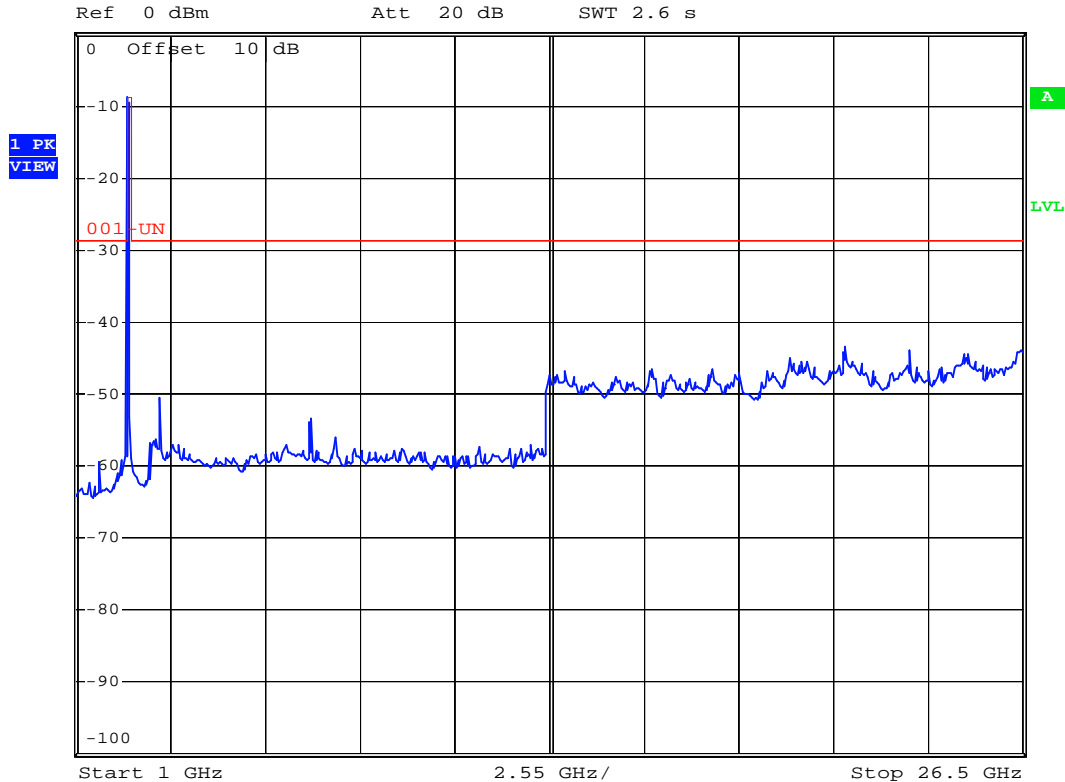


802.11n HT-40/ Channel High (Antenna1)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -57.43 dBm
Ref 0 dBm Att 20 dB SWT 100 ms 222.060000000 MHz

1 PK
VIEW

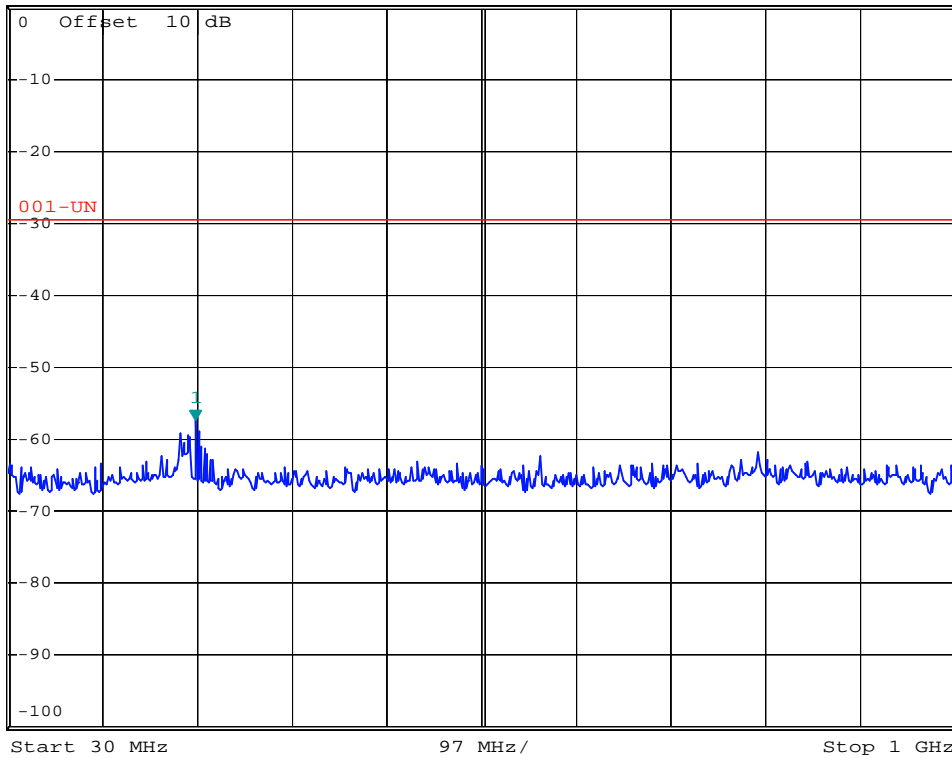

*RBW 100 kHz
VBW 300 kHz
Ref 0 dBm Att 20 dB SWT 2.6 s


1 PK
VIEW

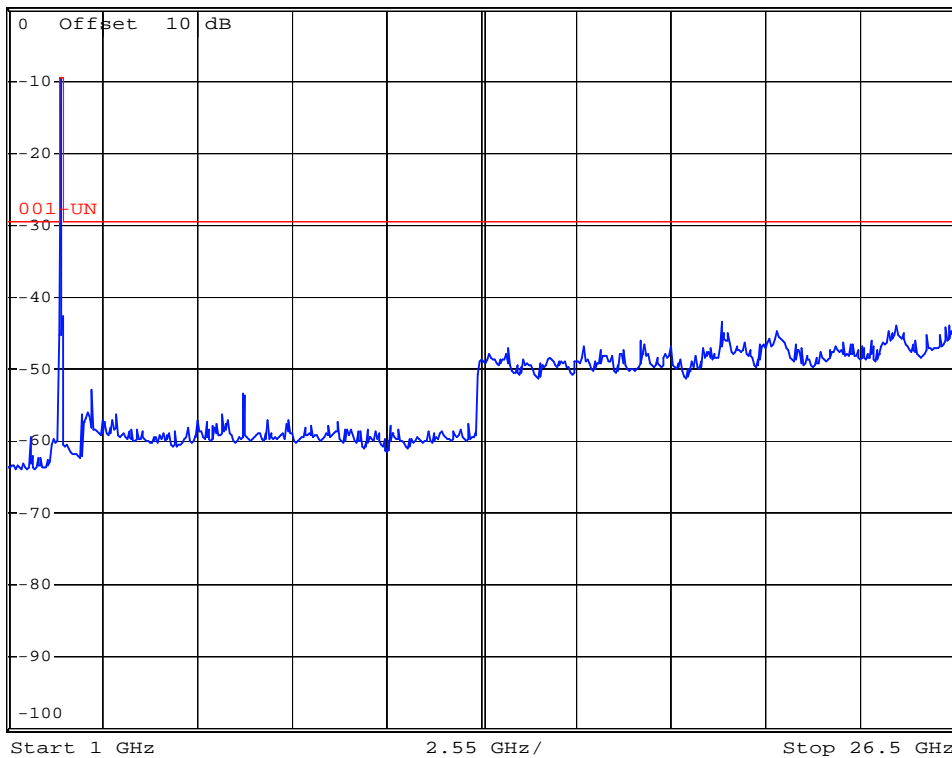


802.11n HT-40/ Channel Low (Antenna2)



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -58.02 dBm
SWT 100 ms 224.00000000 MHz

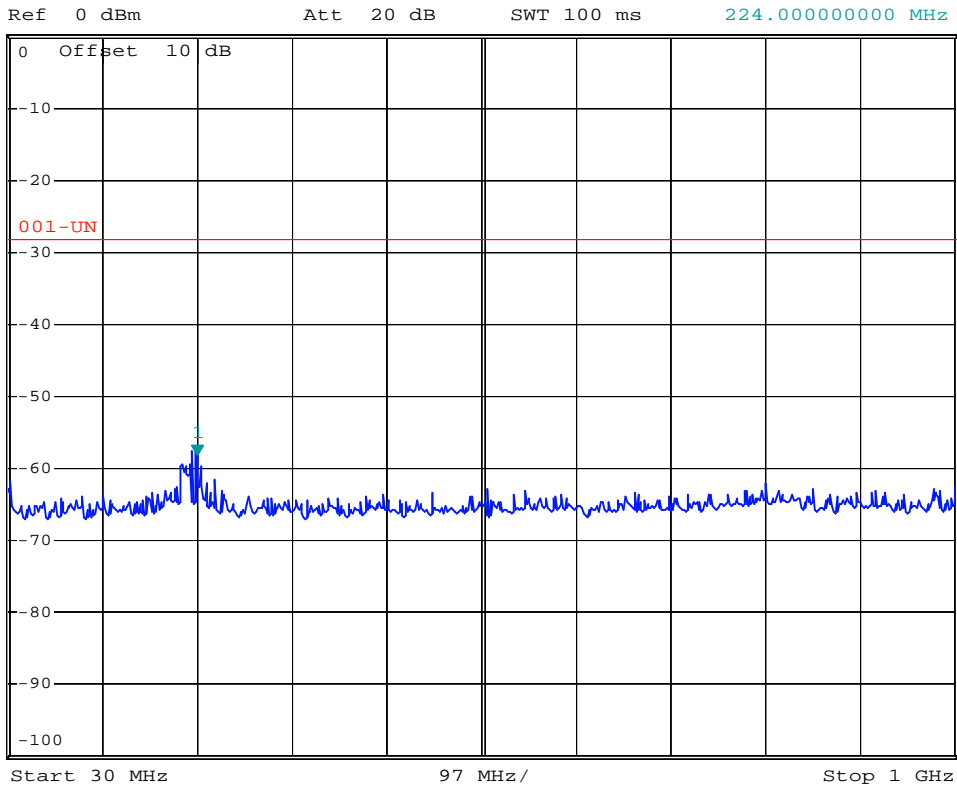

*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

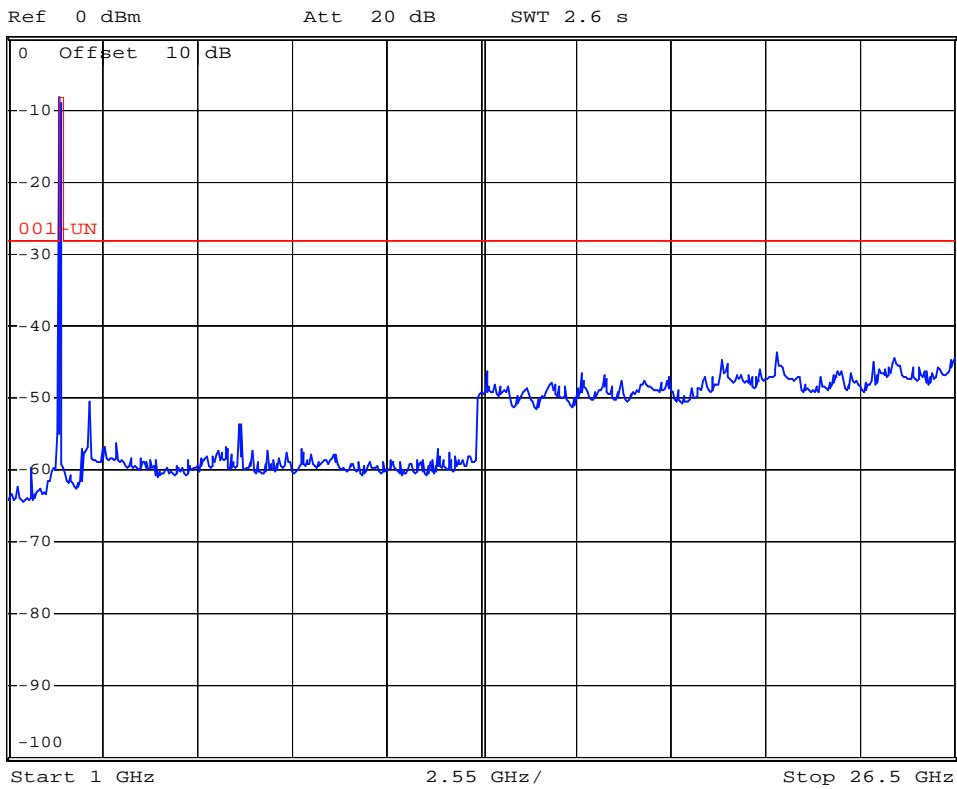

802.11n HT-40/ Channel Mid (Antenna2)




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -58.38 dBm
SWT 100 ms 212.360000000 MHz

Ref 0 dBm

Att 20 dB

1 PK VIEW

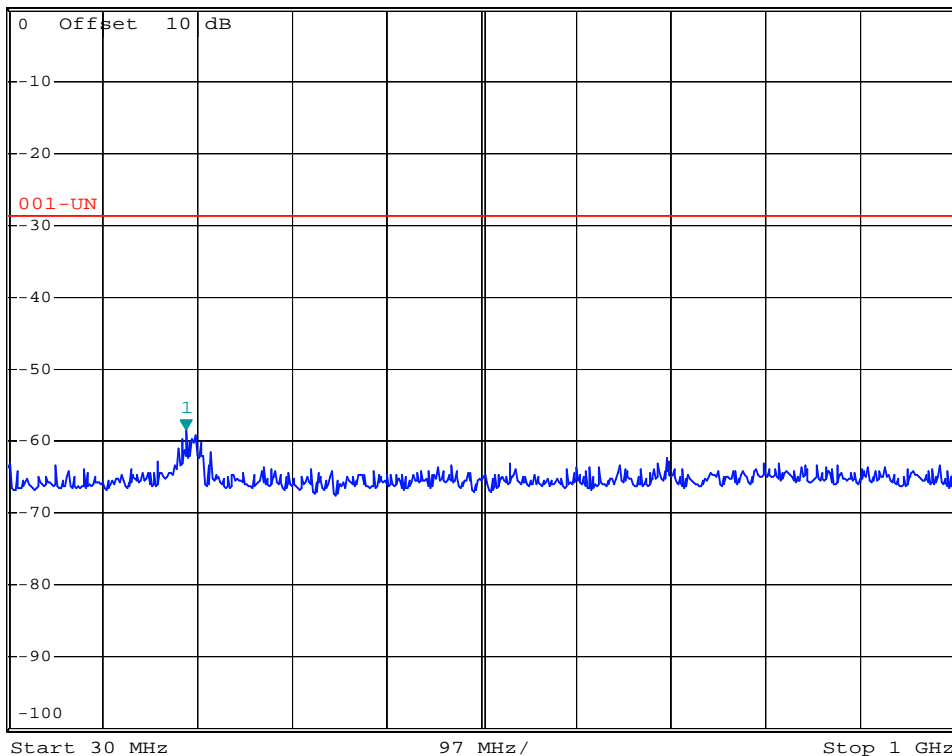


*RBW 100 kHz
VBW 300 kHz
SWT 2.6 s

Ref 0 dBm

Att 20 dB

1 PK VIEW

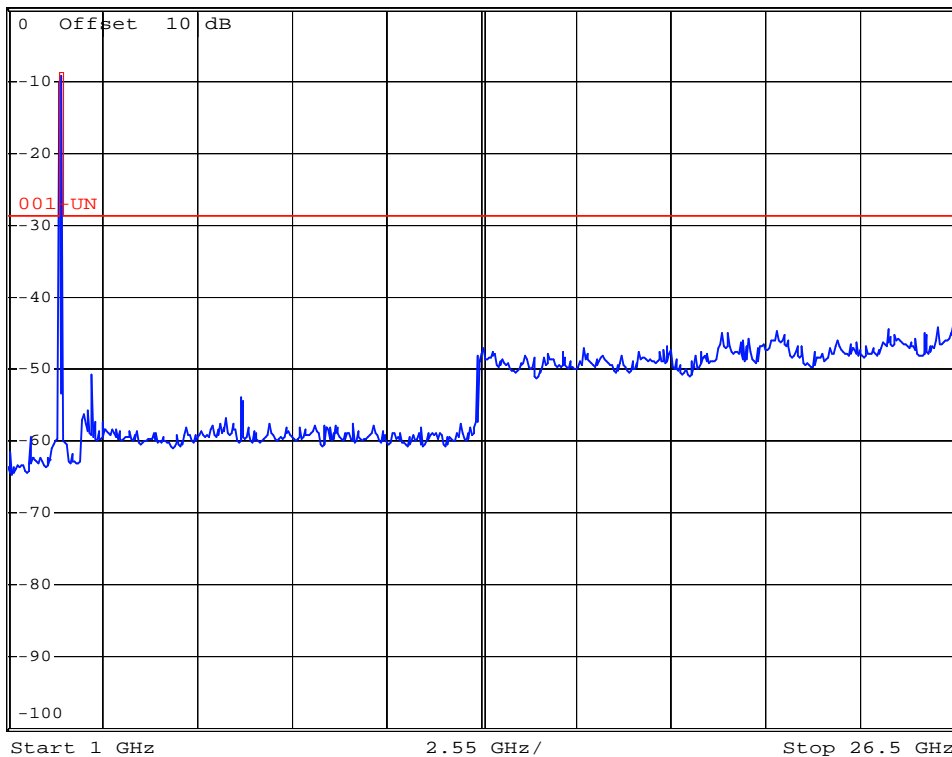

12. DUTY CYCLE

12.1 Standard Applicable

None. Reference only.

12.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2016/10/03	2017/10/02

12.3 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

Duty Cycle Calculation

Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
802.11b	8.88	8.82	99.3	0.113	0.01
802.11g	1.65	1.46	88.5	0.685	1
802.11n HT-20 (ANT1)	1.66	1.47	88.6	0.680	1
802.11n HT-20 (ANT2)	1.66	1.47	88.6	0.680	1
802.11n HT-40 (ANT1)	1.65	1.47	89.1	0.680	1
802.11n HT-40 (ANT2)	1.65	1.47	89.1	0.680	1

Note:


1. VBW = 10 Hz, when the duty cycle is no less than 98%.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots.


802.11b



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -0.43 dB
SWT 30 ms 8.880000 ms
Ref 20 dBm Att 40 dB

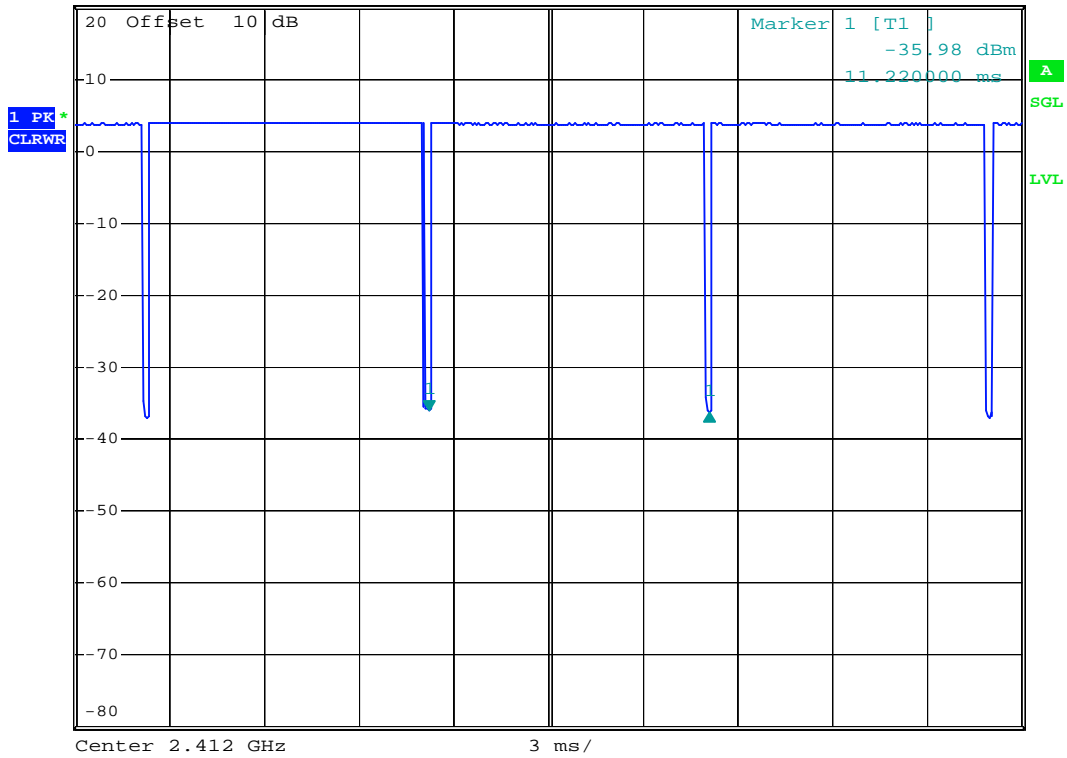


RBW 1 MHz Delta 1 [T1]
VBW 3 MHz 1.59 dB
SWT 30 ms 8.820000 ms
Ref 20 dBm Att 40 dB

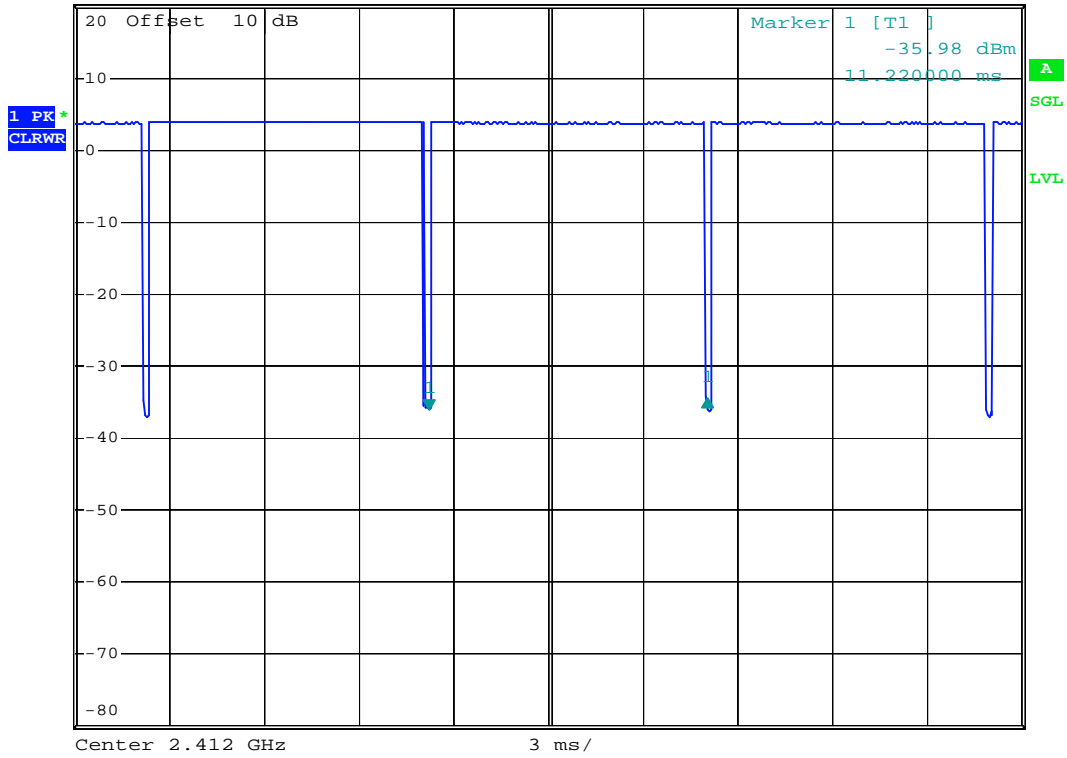


802.11g





RBW 1 MHz Delta 1 [T1]
VBW 3 MHz 0.20 dB
Ref 20 dBm Att 40 dB SWT 5 ms 1.650000 ms

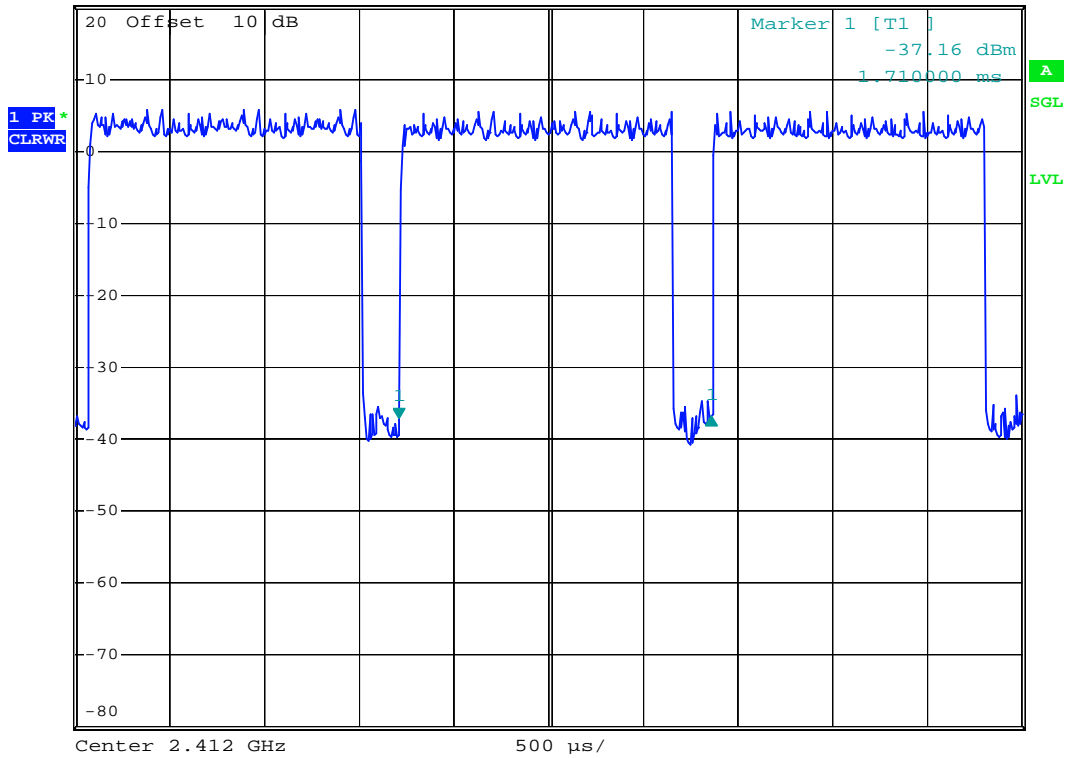

RBW 1 MHz Delta 1 [T1]
VBW 3 MHz 1.00 dB
Ref 20 dBm Att 40 dB SWT 5 ms 1.460000 ms

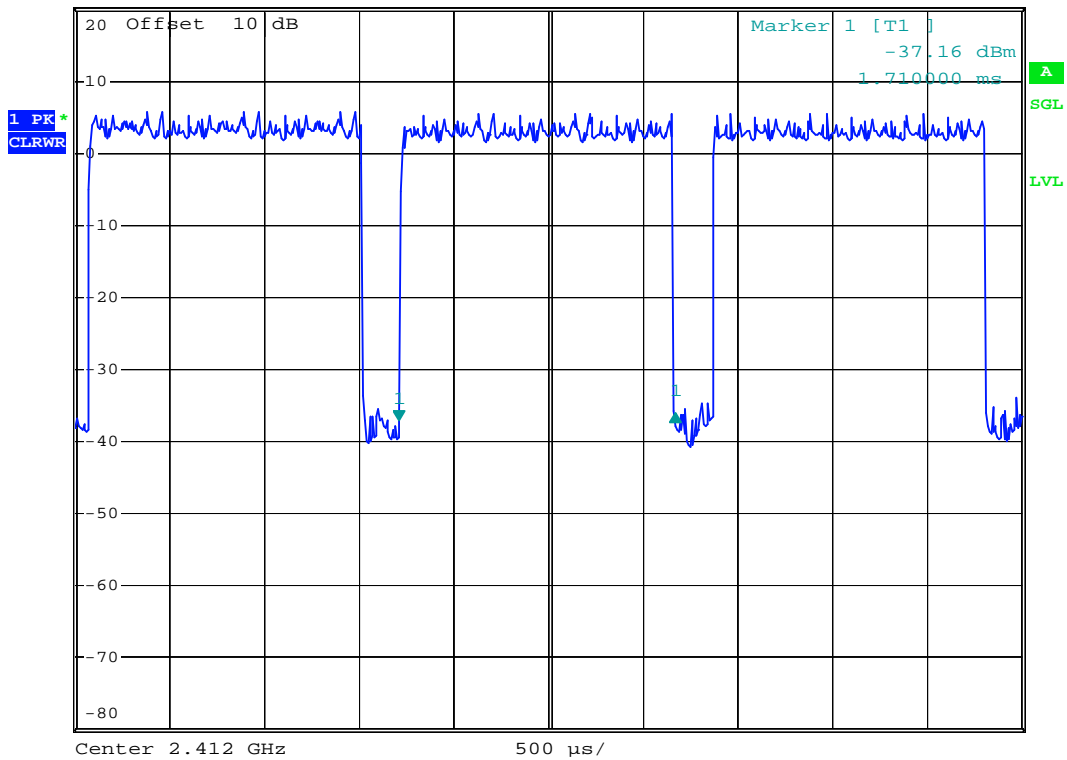


802.11n HT-20 (Antenna1)

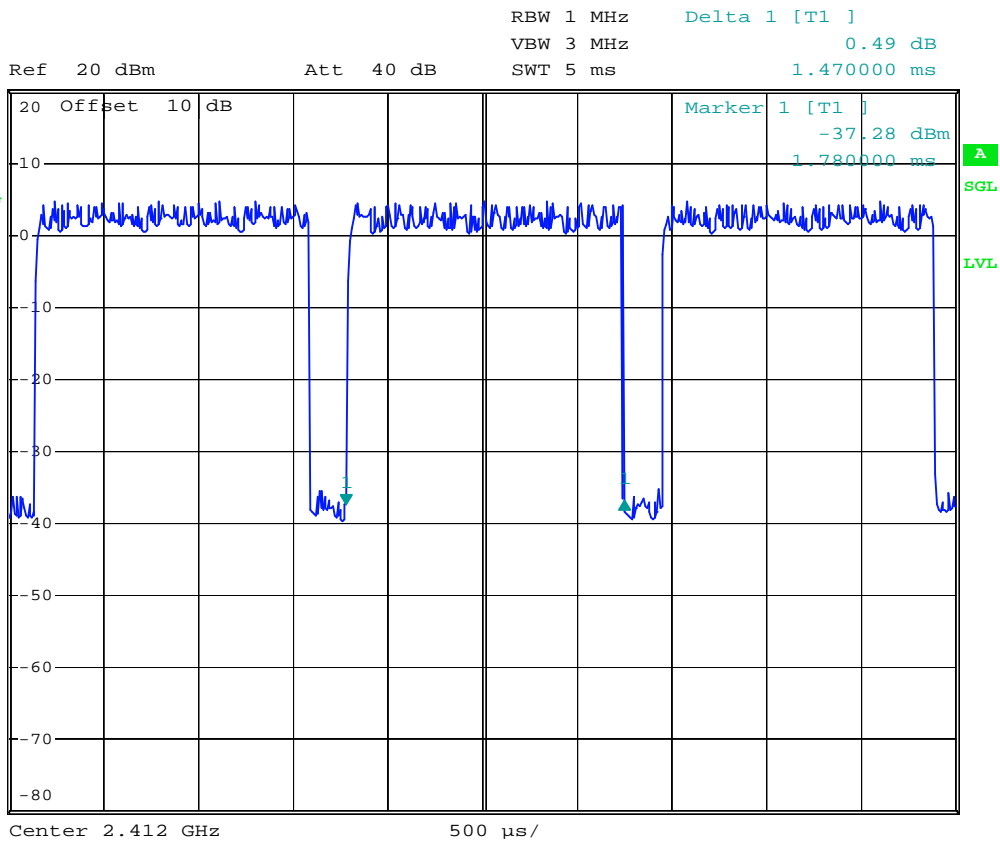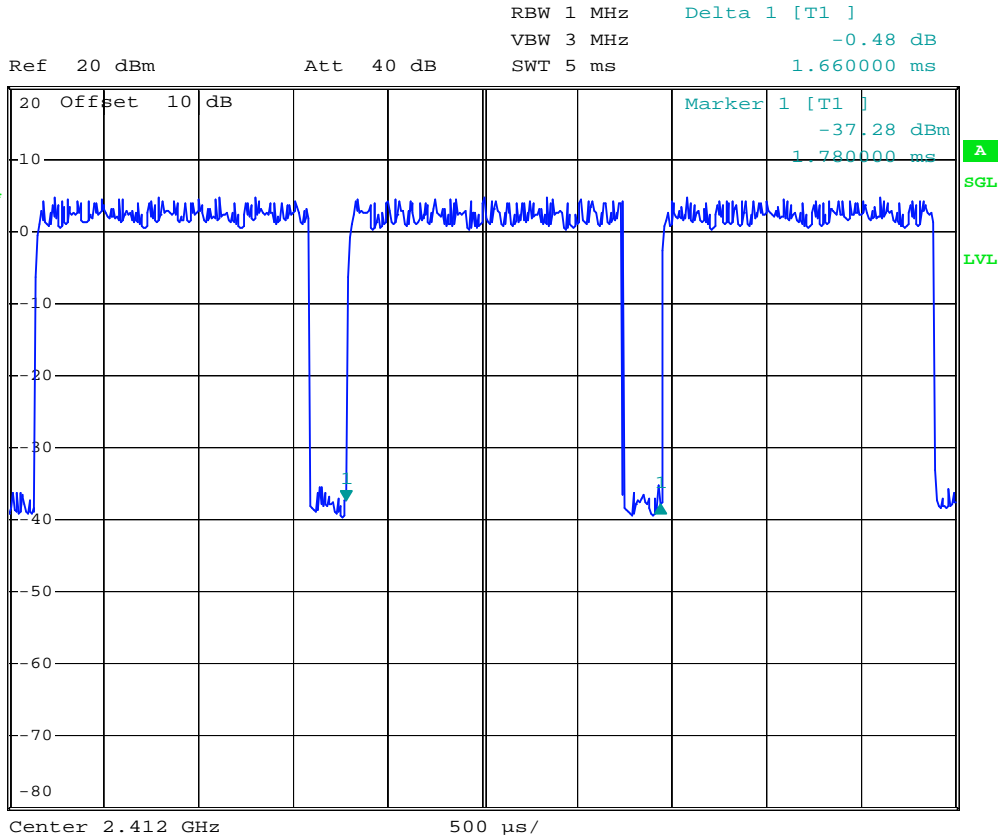


802.11n HT-20 (Antenna2)





RBW 1 MHz Delta 1 [T1]
VBW 3 MHz -0.48 dB
SWT 5 ms 1.660000 ms
Ref 20 dBm Att 40 dB

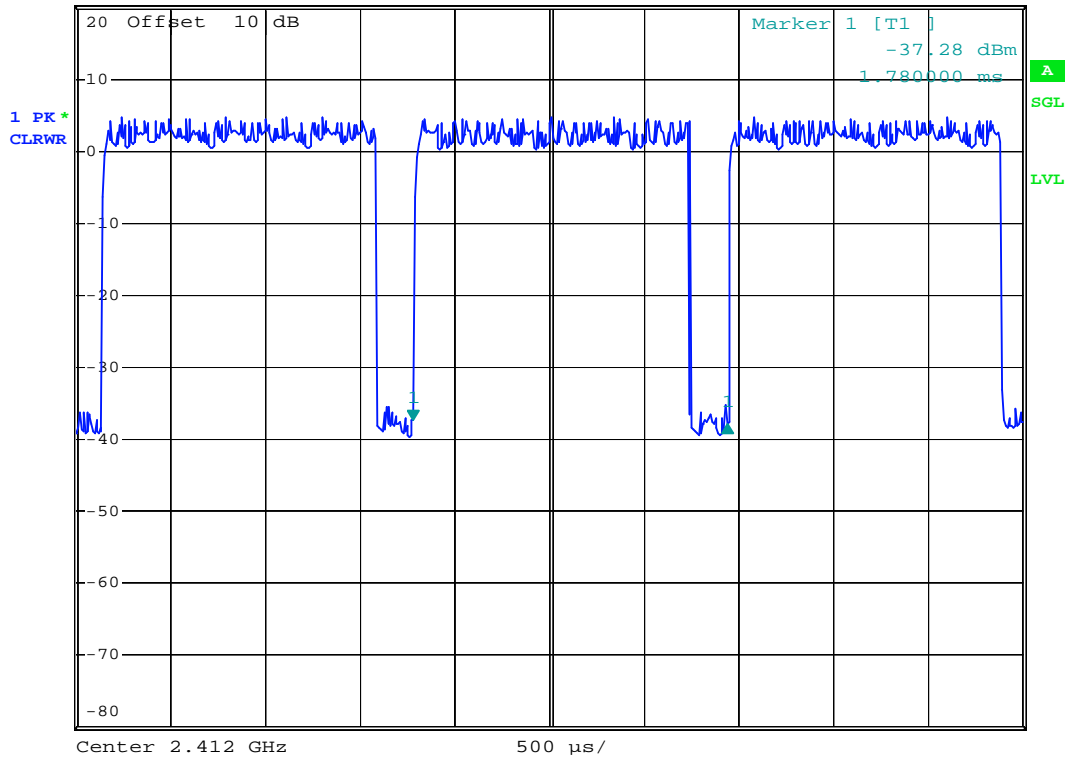



RBW 1 MHz Delta 1 [T1]
VBW 3 MHz 0.49 dB
SWT 5 ms 1.470000 ms
Ref 20 dBm Att 40 dB

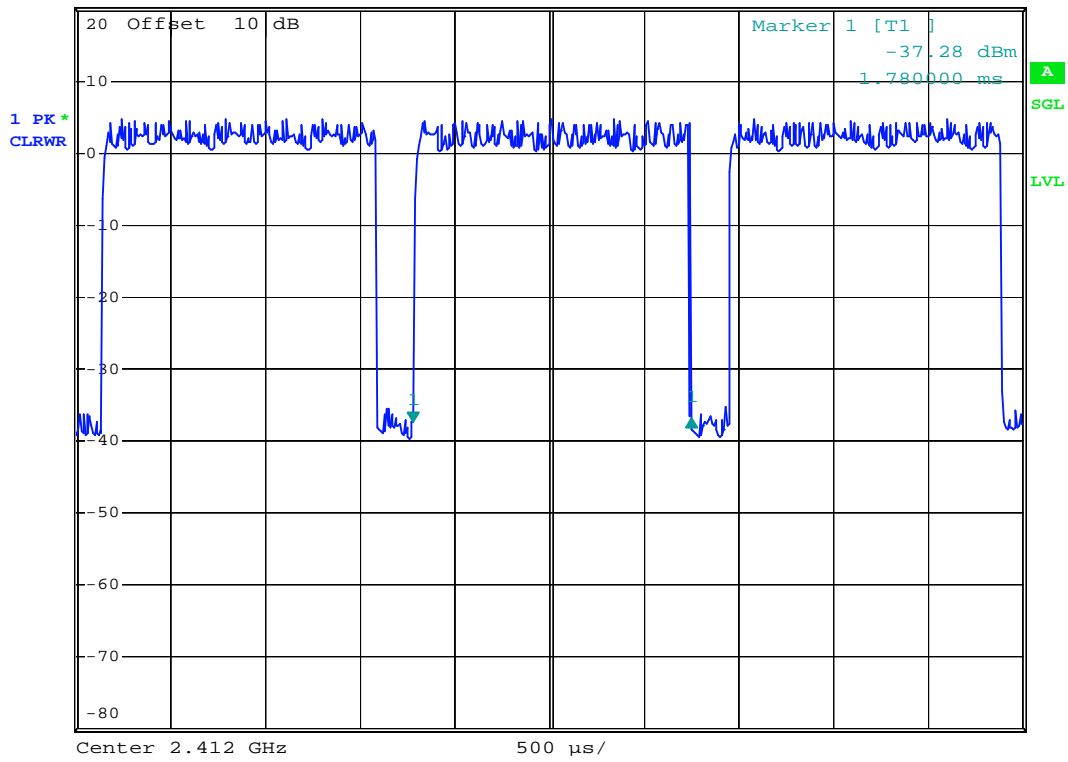

802.11n HT-40 (Antenna1)

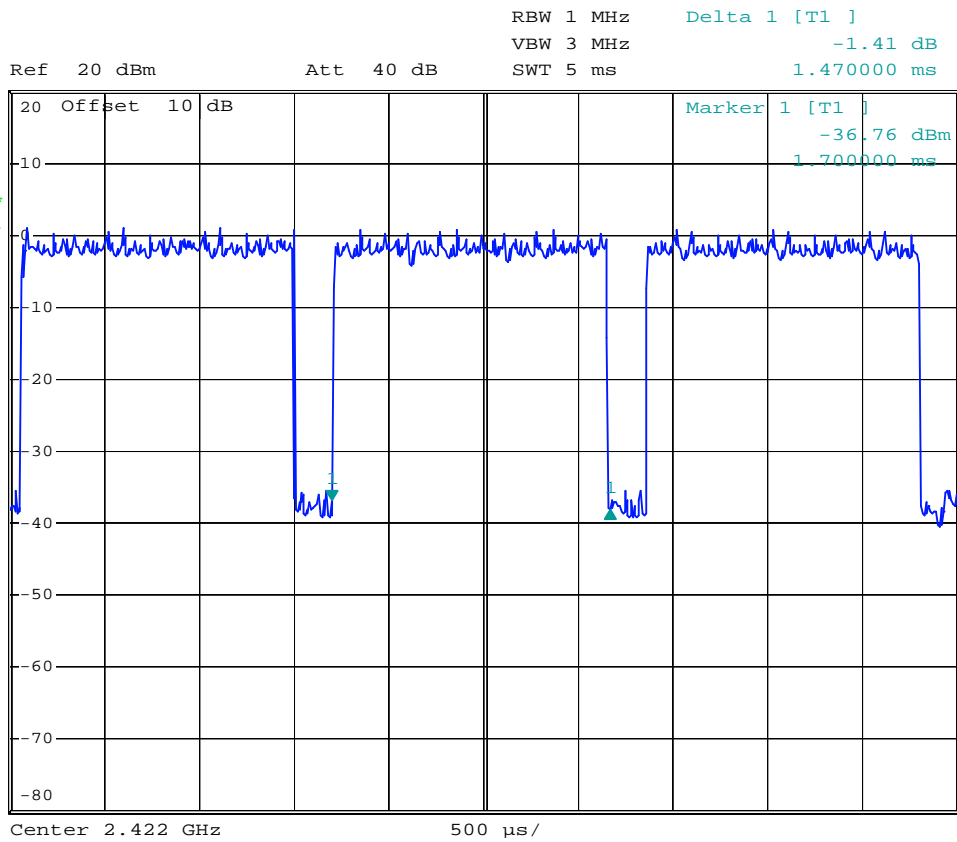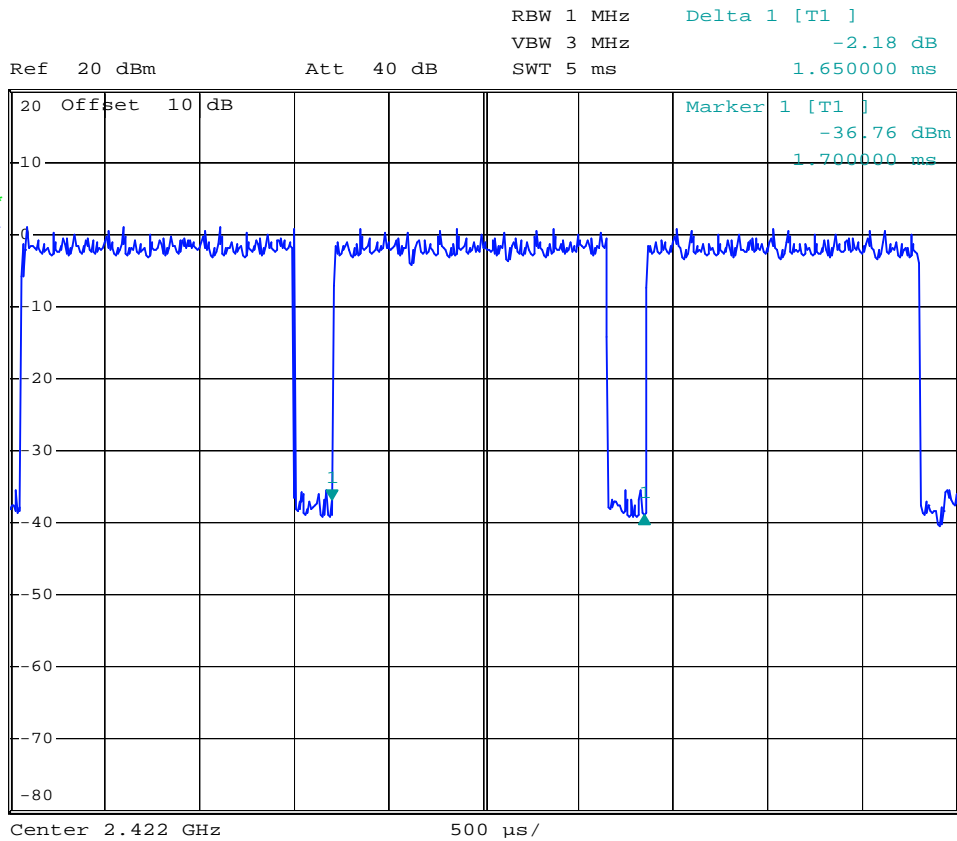

802.11n HT-40 (Antenna2)

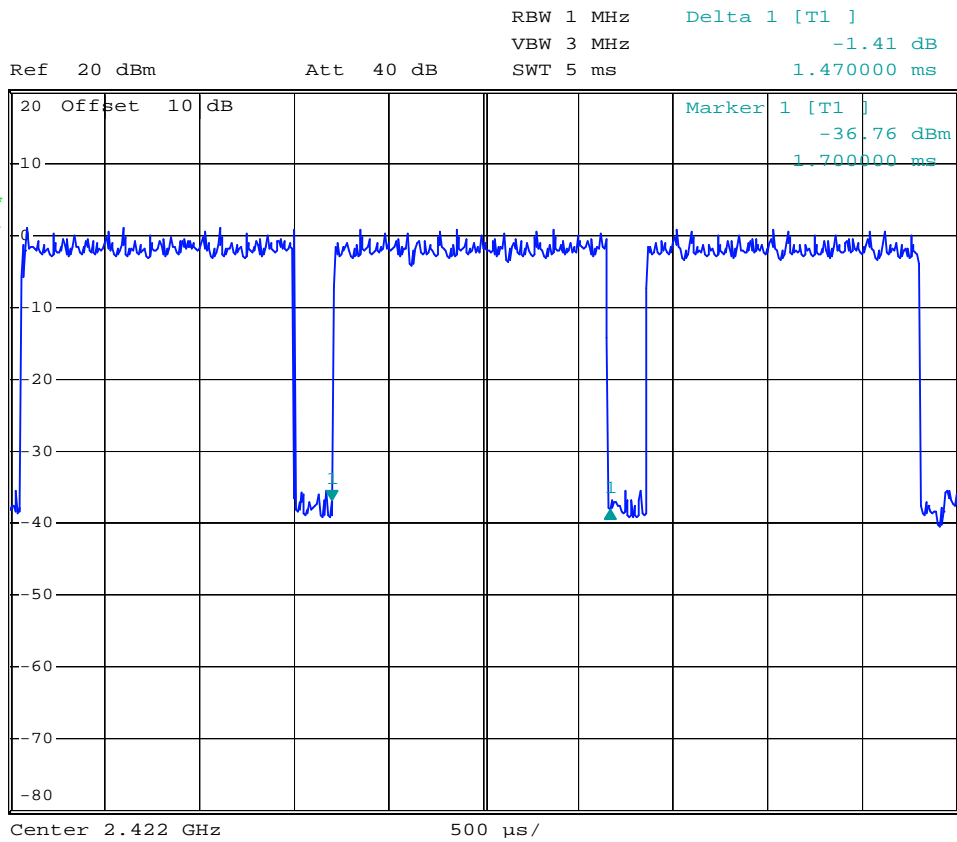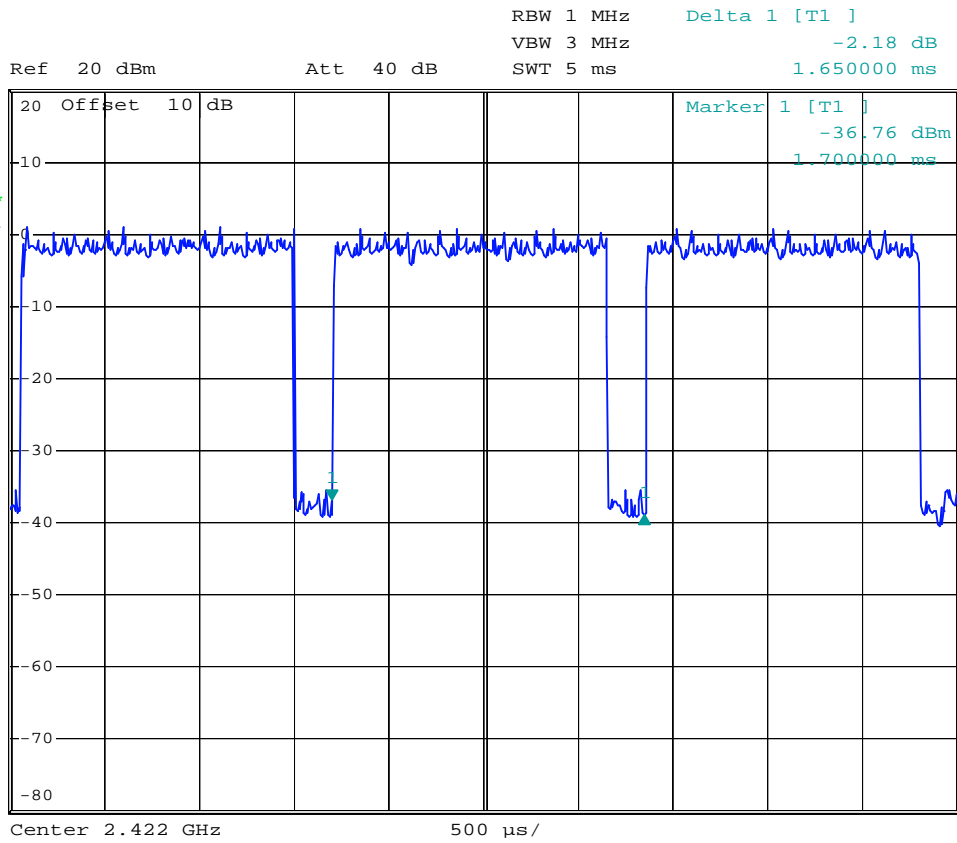

CONSTRUCTION PHOTOS OF EUT

(A) EUT (Trade name: Delta)

1.



2.



CONSTRUCTION PHOTOS OF EUT

3.



4.



CONSTRUCTION PHOTOS OF EUT

5.



6.




CONSTRUCTION PHOTOS OF EUT

7.




8.

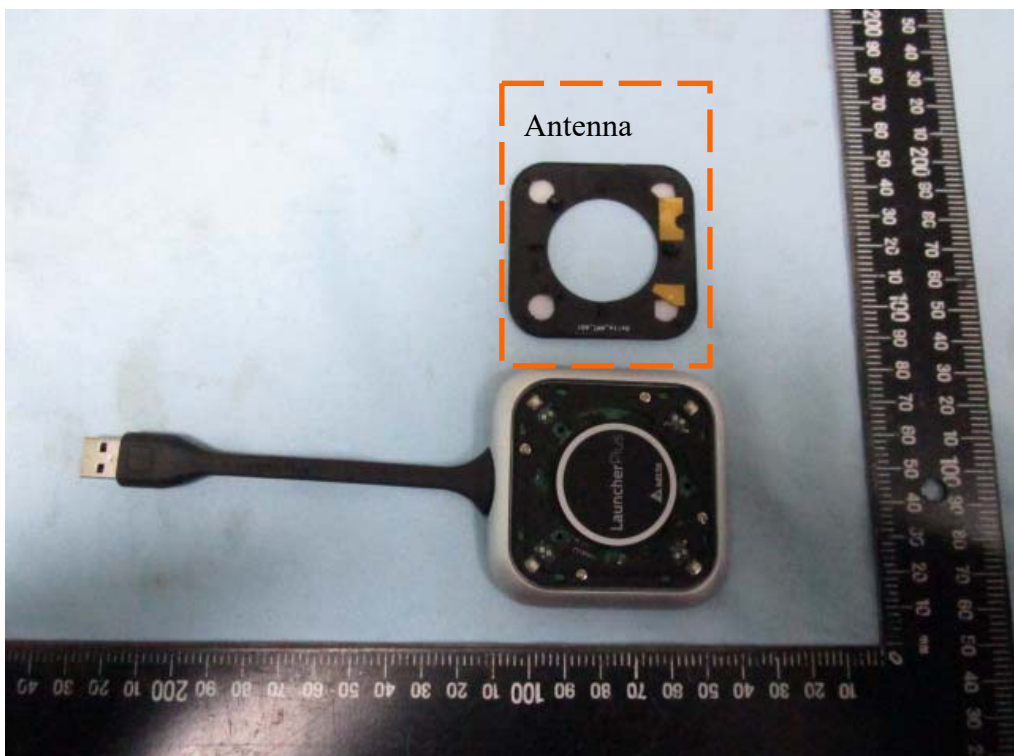

CONSTRUCTION PHOTOS OF EUT

9.

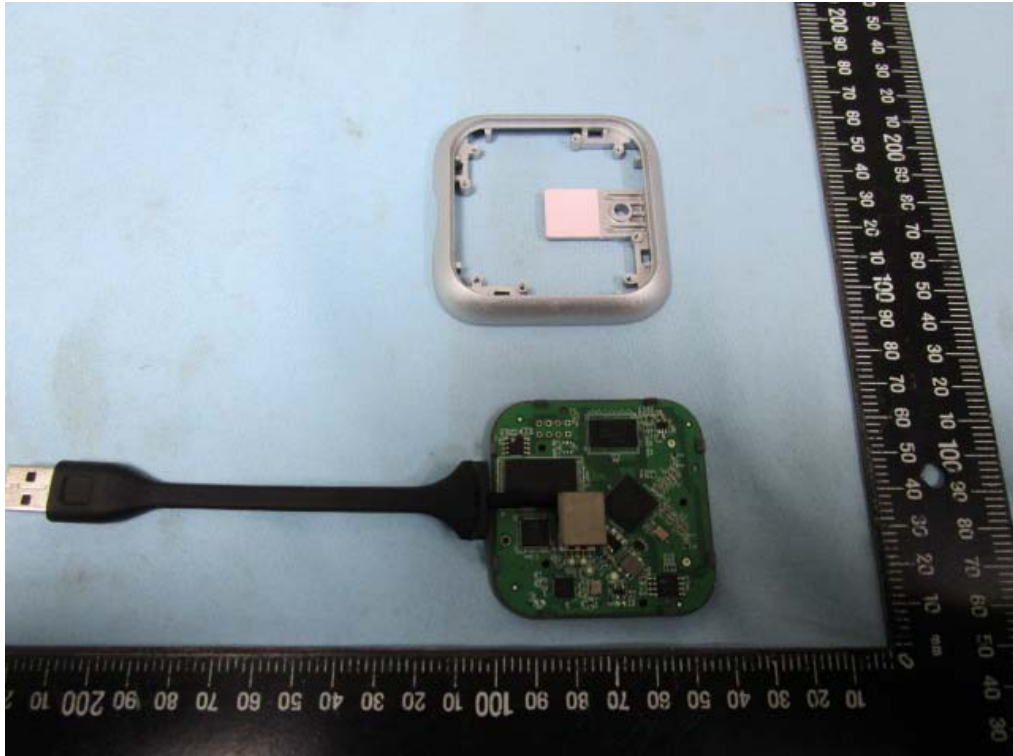


10.




CONSTRUCTION PHOTOS OF EUT

11.

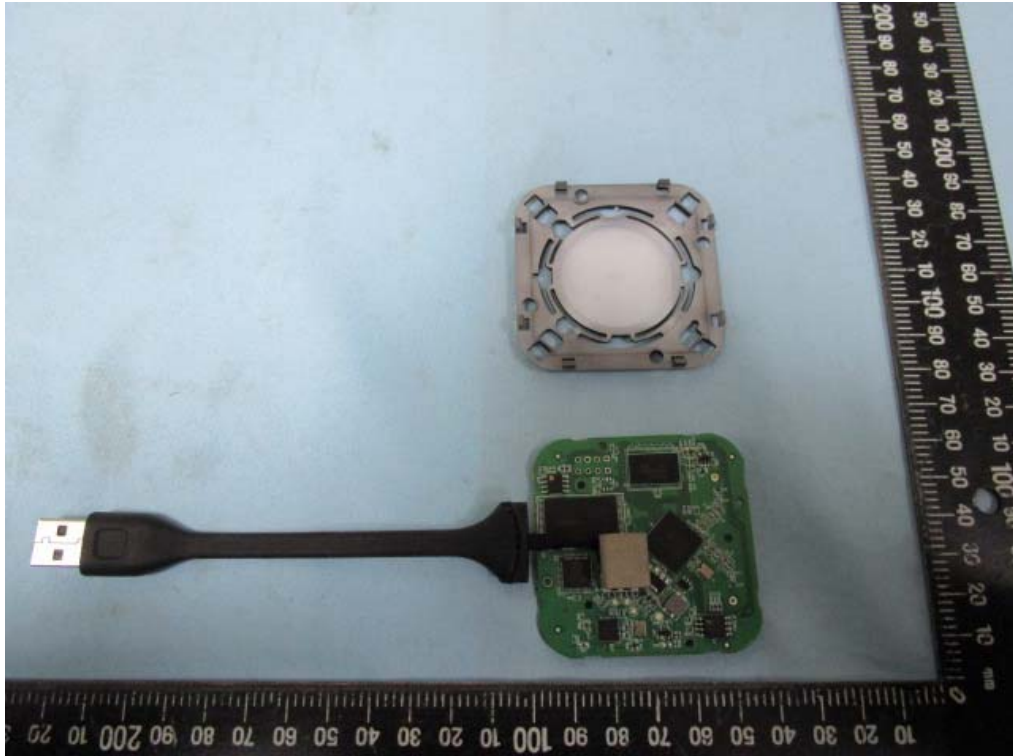


12.

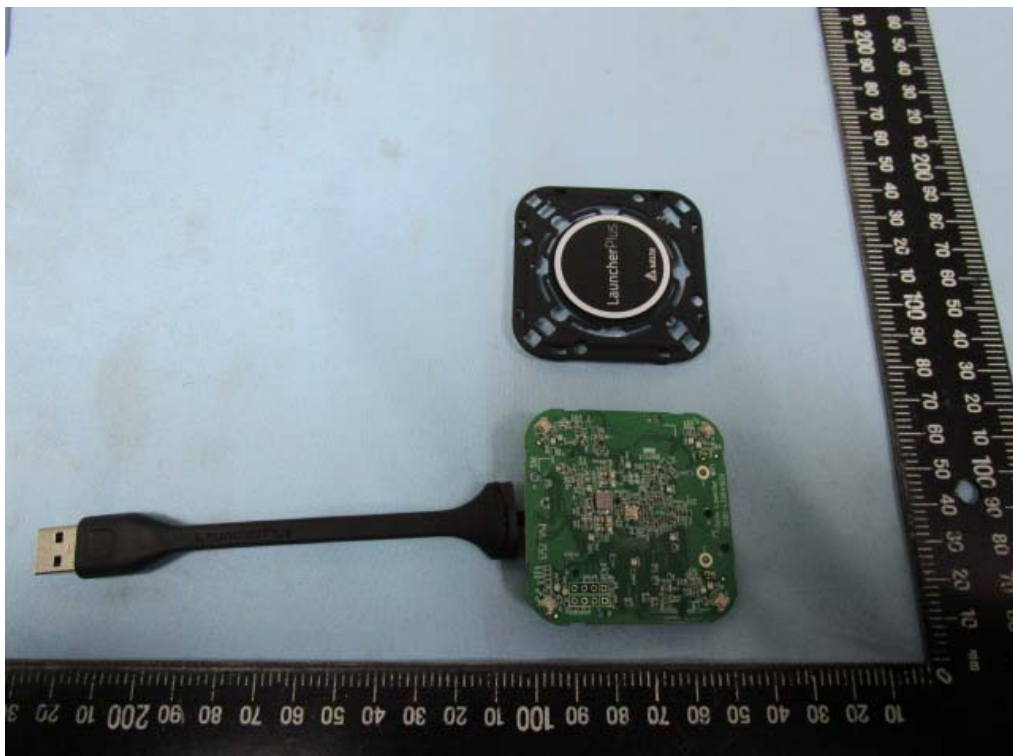


CONSTRUCTION PHOTOS OF EUT

13.

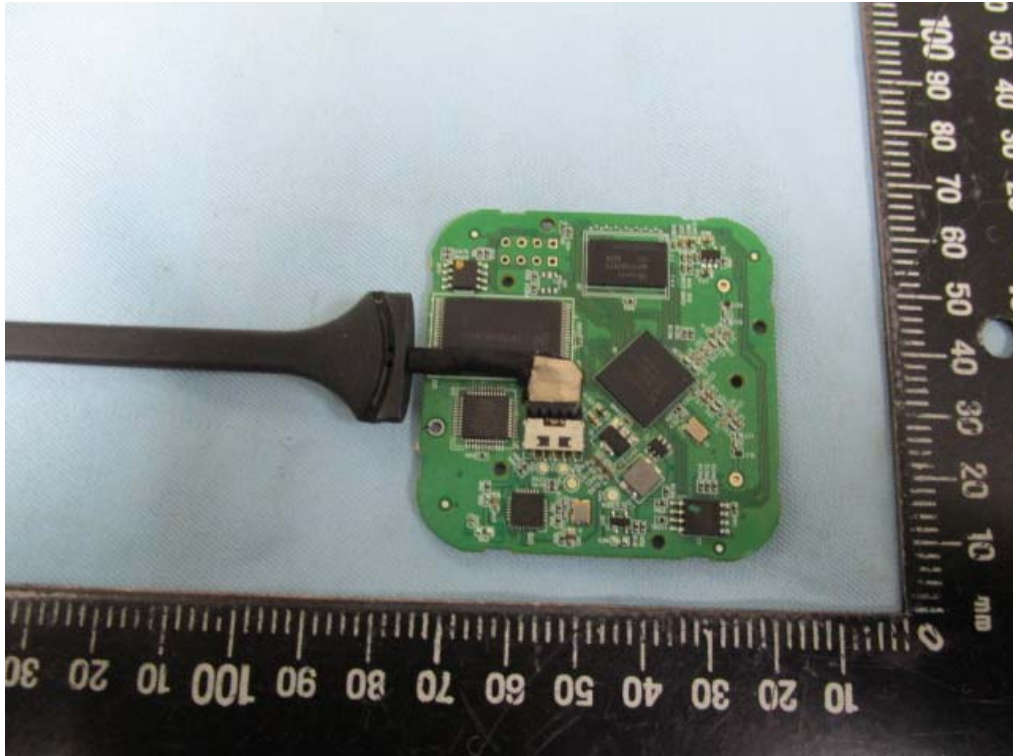

14.

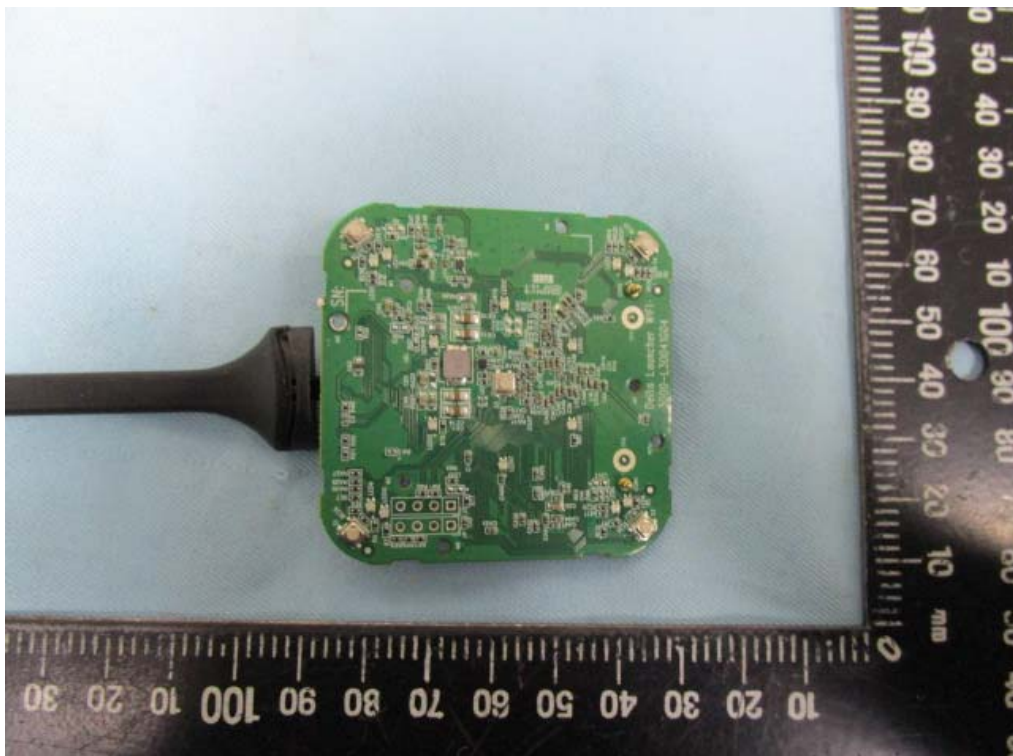


(B) EUT (Trade name: Vivitek)

1.



2.

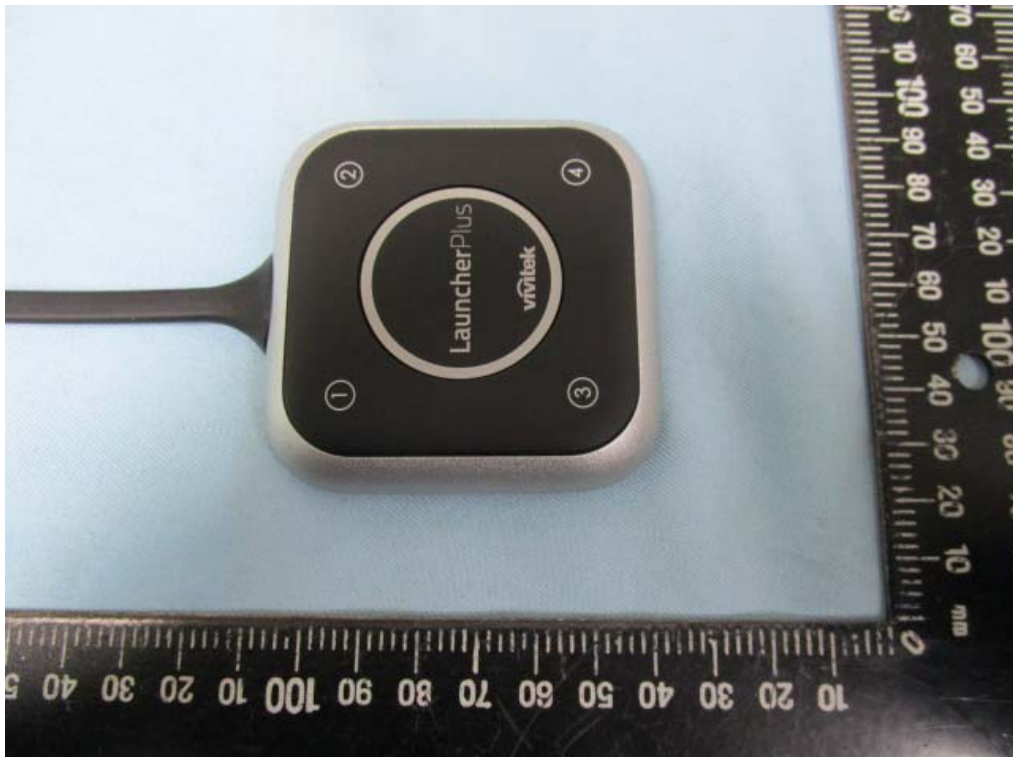

CONSTRUCTION PHOTOS OF EUT

3.

