

Wi-Fi 2.4GHz Band

Frequency: 2422 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 2422.6$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 51.935$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn917; Calibrated: 2017/1/6
- Probe: EX3DV4 - SN3665; ConvF(7.32, 7.32, 7.32); Calibrated: 2016/5/26;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Front/Main+Aux Ant/802.11n HT40/ch3 5mm/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.47 W/kg



Front/Main+Aux Ant/802.11n HT40/ch3 5mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.927 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

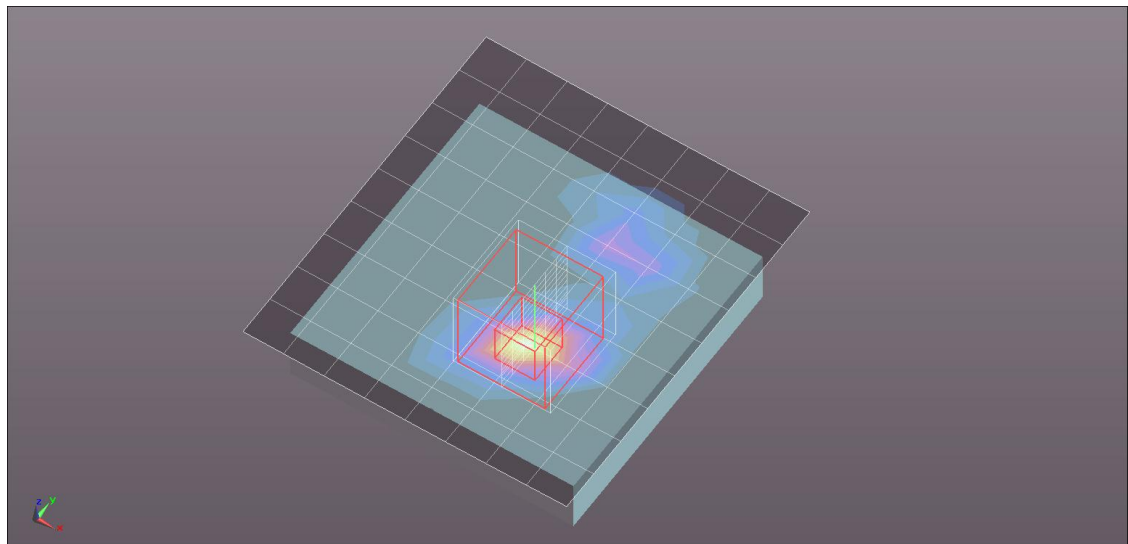

Wi-Fi 2.4GHz Band

Frequency: 2422 MHz; Duty Cycle: 1:1

Front/Main+Aux Ant/802.11n HT40/ch3 5mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.581 W/kg

