



## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **CTA-01-160700201**

**FCC ID**.....: **H79Q3PLUS**

Compiled by

( position+printed name+signature)..: File administrators Kevin Liu

*Kevin Liu*

Supervised by

( position+printed name+signature)..: Project Engineer Kevin Liu

*Kevin Liu*

Approved by

( position+printed name+signature)..: RF Manager Eric Wang

*Eric Wang*

Date of issue.....: July 20, 2016

**Representative Laboratory Name** ..: **Shenzhen CTA Testing Technology Co., Ltd.**

Address .....: Room 520,5th Floor, No.1053 Xixiang Baoyuan Road, Baoan District,Shenzhen,China

**Testing Laboratory Name** .....: **Dongguan Yaxu (AiT) Technology Limited**

Address .....: No. 22,JinQianLing Street 3, JiTiGang Village, Huang-Jiang Town, DongGuan, Guangdong, 523757 China

**Applicant's name**.....: **Delta Electronics Incorporated**

Address .....: 3, Tungyuan Road Chungli Industrial Zone Taoyuan County 32063, Taiwan

**Test specification** .....

Standard .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen CTA Testing Technology Co., Ltd.

**Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....

Trade Mark .....: VIVITEK

**Manufacturer**.....: **Delta Electronics Incorporated**

Model/Type reference.....: Q3PLUS

Listed Models .....: Q3PLUS-WH, Q3PLUS-BK, Q3PLUS-RD, Q3PLUS-GD, Q3-BK, Q3-WH, Q3HP2704A, Q3HP2702A, Q3HP2706A, Q3HP2708

Modulation Type .....: GFSK,8DPSK, $\pi$ /4DQPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating .....: DC 7.40V / DC 12V adapter from AC 120V/60Hz

Hardware version .....: 2800-AV69S8-06 2016-06-08 V69+S805

Software version .....: V1.0-2016.07.18

Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>CTA-01-160700201</b>	July 20, 2016
		Date of issue

Equipment under Test : HD Pocket Projector

Model /Type : Q3PLUS

Listed Models : Q3PLUS-WH, Q3PLUS-BK, Q3PLUS-RD, Q3PLUS-GD,  
Q3-BK, Q3-WH, Q3HP2704A, Q3HP2702A, Q3HP2706A,  
Q3HP2708

**Applicant** : **Delta Electronics Incorporated**

Address : 3, Tungyuan Road Chungli Industrial Zone Taoyuan  
County 32063, Taiwan

**Manufacturer** : **Delta Electronics Incorporated**

Address : 3, Tungyuan Road Chungli Industrial Zone Taoyuan  
County 32063, Taiwan

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	2016-07-20	Initial Issue	Eric Wang

## Contents

<b><u>1</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>5</u></b>
<b><u>2</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>6</u></b>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	EUT operation mode	6
2.5	Internal Identification of AE used during the test	7
2.6	Related Submittal(s) / Grant (s)	7
2.7	Modifications	7
<b><u>3</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>8</u></b>
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Conditions	8
3.5	Summary of measurement results	9
3.6	Equipments Used during the Test	10
<b><u>4</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>11</u></b>
4.1	AC Power Conducted Emission	11
4.2	Radiated Emissions and Band-edge Radiated Measurements	14
4.3	Duty Cycle	23
4.4	Maximum Peak Output Power	24
4.5	20dB Bandwidth	27
4.6	Frequency Separation	29
4.7	Band-edge measurements for RF conducted emissions	31
4.8	Spurious RF Conducted Emission	34
4.9	Number of hopping frequency	41
4.10	Time of Occupancy (Dwell Time)	42
4.11	Pseudorandom Frequency Hopping Sequence	44
4.12	Antenna Requirement	45
<b><u>5</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>46</u></b>
<b><u>6</u></b>	<b><u>EXTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>46</u></b>
<b><u>7</u></b>	<b><u>INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>46</u></b>

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[DA00-75](#) : Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	June. 12, 2016
Testing commenced on	:	June. 13, 2016
Testing concluded on	:	July. 20, 2016

### 2.2 Product Description

The **Delta Electronics Incorporated** 's Model: Q3PLUS or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	HD Pocket Projector
Model Number	Q3PLUS
Modulation Type	GFSK,8DPSK, $\pi$ /4DQPSK
Antenna information	Internal and maximum gain is 2.541dBi
BT FCC Operation frequency	2402MHz-2480MHz
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	6.00VDC to 8.40VDC (nominal: 7.40VDC)
Adapter information	Mode:ADP-36PH A Input:AC 100-240V 50/60Hz 1A Output:DC12V 3A

### 2.3 Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 7.40V / DC 12V adapter from AC 120V/60Hz

### 2.4 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel .

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452

11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

## 2.5 Internal Identification of AE used during the test

AE ID*	Description
AE1	Notebook

Mode:R510V

Trade:ASUS

\*AE ID: is used to identify the test sample in the lab internally.

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: H79Q3PLUS** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

##### Dongguan Yaxu (AiT) Technology Limited

No. 22, JinQianLing Street 3, JiTiGang Village, Huang-Jiang Town, DongGuan, Guangdong, 523757 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4, CISPR 22/EN 55022 and CISPR16-1-4:2010 SVSWR requirements.

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

##### CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

##### FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

##### Industry Canada(IC)-Registration No: IC6819A

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

##### VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dngguan Yaxu (AiT) technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Asia Institute Technology (Dongguan) Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

#### 3.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
20dB Emission Bandwidth (EBW)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch00, TM3_3DH5_Ch39, TM3_3DH5_Ch78,
Carrier Frequency Separation	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Number of Hopping Channel	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop , TM3_3DH5_Hop,
Time of Occupancy (Dwell Time)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch39 , TM3_3DH5_Ch39.



Maximum Peak Conducted Output Power	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch39, TM1_DH3_Ch78, TM2_2DH3_Ch00, TM2_2DH3_Ch39, TM2_2DH3_Ch78, TM3_3DH3_Ch00, TM3_3DH3_Ch39, TM3_3DH3_Ch78,
Bandedge spurious emission (Conducted)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch78, TM1_DH3_Hopping TM3_3DH3_Ch00, TM3_3DH3_Ch78, TM3_3DH3_Hopping

Conducted RF Spurious Emission	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch39, TM3_3DH5_Ch78.
Radiated Emissions in the Restricted Bands	Meas. Method	ANSI C63.10:2009 30 MHz to 1 GHz: Pre: RBW=100kHz; VBW=300kHz; Det. = Peak. Final: RBW=120kHz; Det. = CISPR Quasi-Peak. 1 GHz to 26.5GHz: Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak; Sweep-time= Auto; Trace = Single. Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep-time= Auto; Trace ≥ MaxHold * 100.
	Test Environment	NTNV
	EUT Conf.	30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.). 1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).

**Note:**

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.
3. We pre-test both AC 120V/60Hz and AC 240V/50Hz for AC conducted emission, recorded worst case at AC 120V/60Hz;

**3.5 Summary of measurement results**

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Not applicable for FHSS!
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK	<input checked="" type="checkbox"/> Hopping	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	GFSK $\pi/4$ DQPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle	GFSK $\pi/4$ DQPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

		8DPSK	<input checked="" type="checkbox"/> Highest	8DPSK	<input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>				
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest <input checked="" type="checkbox"/> Hopping	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest <input checked="" type="checkbox"/> Hopping	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205	Band edge compliance radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest <input checked="" type="checkbox"/> Hopping	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

## Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report


### 3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2016/05/28	2017/05/27
LISN	R&S	ESH2-Z5	860014/010	2016/05/28	2017/05/27
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/05/28	2017/05/27
EMI Test Receiver	R&S	ESCI	103710	2016/05/28	2017/05/27
Spectrum Analyzer	Agilent	N9020A	MY49100067	2016/05/17	2017/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/16	2017/05/15
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/16	2017/05/15
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/16	2017/05/15
Amplifier	Agilent	8349B	3008A02306	2016/05/16	2017/05/15
Amplifier	Agilent	8447D	2944A10176	2016/05/16	2017/05/15
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2016/05/16	2017/05/15
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2016/05/16	2017/05/15
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/05/28	2017/05/27
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/05/28	2017/05/27
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/05/28	2017/05/27
RF Cable	Megalon	RF-A303	N/A	2016/05/28	2017/05/27
Power Sensor	R&S	NRP-Z4	823.3618.03	2016/05/28	2017/05/27
Power Meter	R&S	NRVS	1020.1809.02	2016/05/28	2017/05/27

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

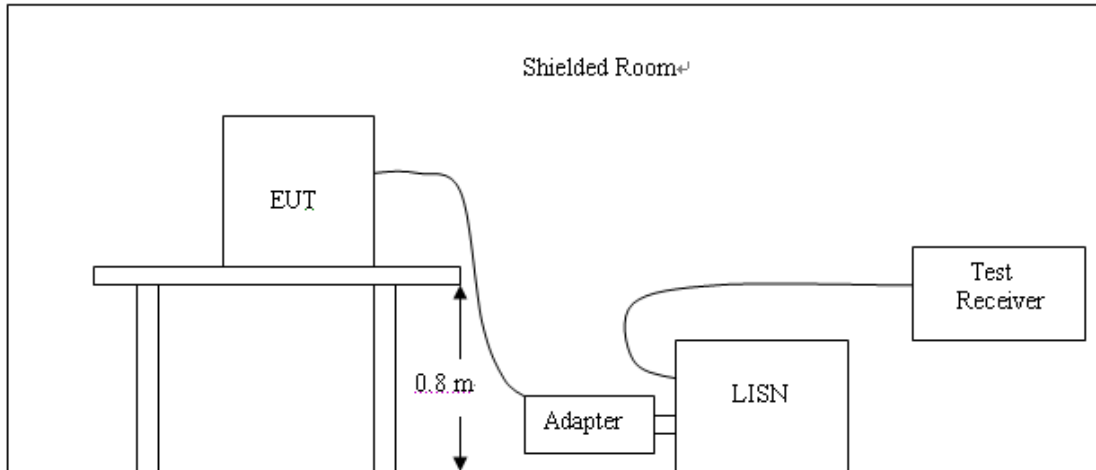

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. The EUT received DC12V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency


#### TEST RESULTS

Remark:

1. The AC Power Conducted Emission measurement is performed at both TX and RX (Idle) mode, recorded worst case at TX mode.
2. We tested voltage at both AC 120V/60Hz and AC 240/50Hz, recorded worst case at AC 120V/60Hz.

L:


100.0 dBuV

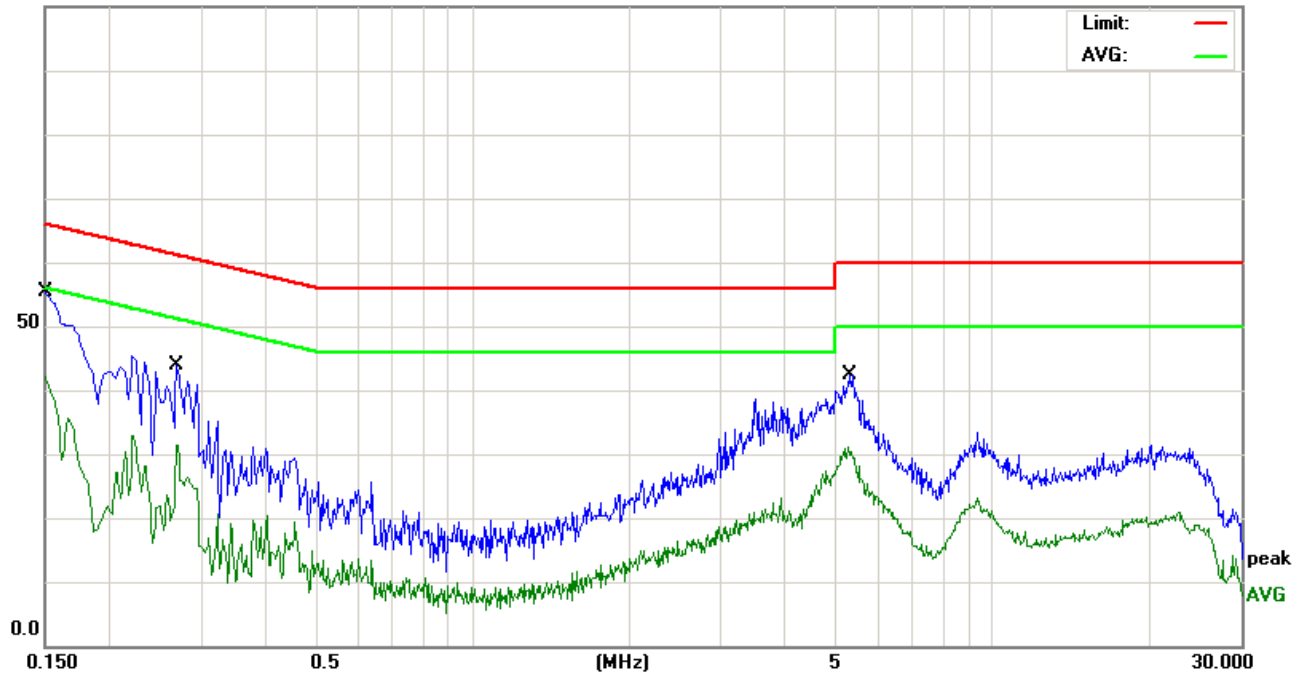

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1500	43.41	11.94	55.35	65.99	-10.64	QP
2		0.1500	30.29	11.94	42.23	55.99	-13.76	AVG
3		0.2700	33.05	10.83	43.88	61.12	-17.24	QP
4		0.2700	20.63	10.83	31.46	51.12	-19.66	AVG
5		5.2700	20.99	10.12	31.11	50.00	-18.89	AVG
6		5.2940	32.37	10.12	42.49	60.00	-17.51	QP

N:




100.0 dBuV

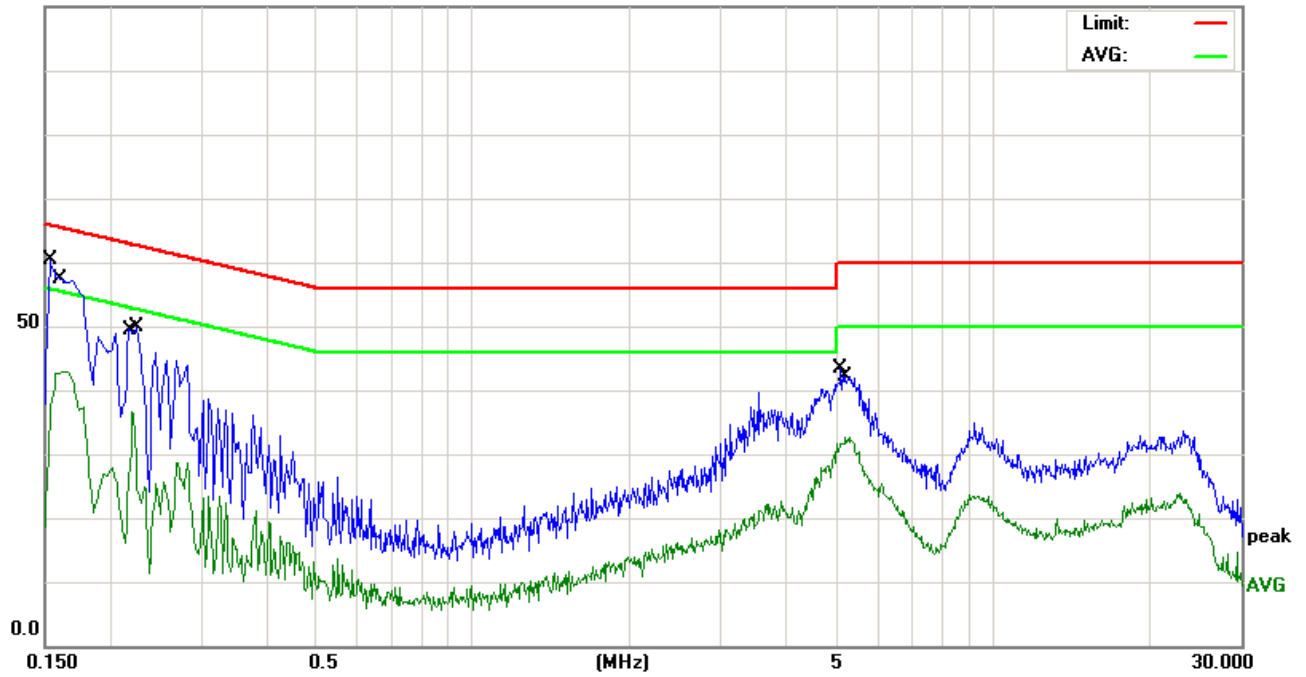

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	48.61	11.84	60.45	65.78	-5.33	QP
2		0.1620	31.12	11.68	42.80	55.36	-12.56	AVG
3		0.2220	25.54	10.98	36.52	52.74	-16.22	AVG
4		0.2260	38.95	10.96	49.91	62.59	-12.68	QP
5		5.0939	33.27	10.11	43.38	60.00	-16.62	QP
6		5.2100	22.63	10.11	32.74	50.00	-17.26	AVG

## 4.2 Radiated Emissions and Band-edge Radiated Measurements

### TEST CONFIGURATION

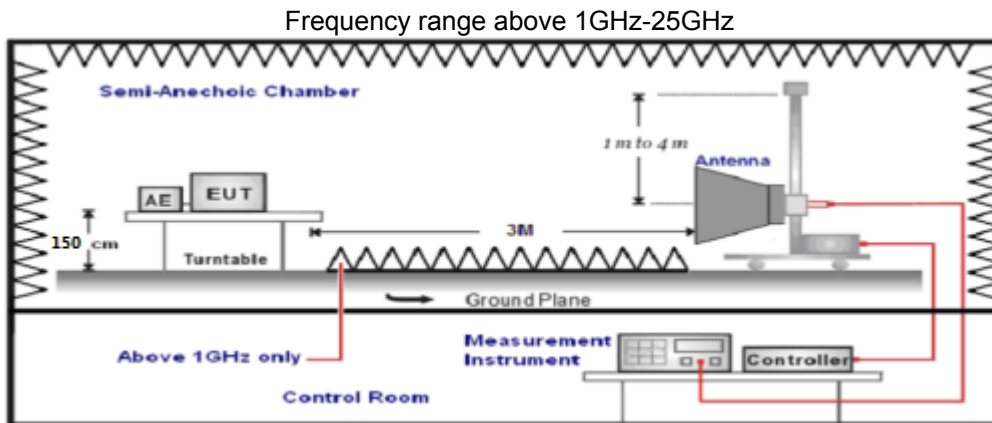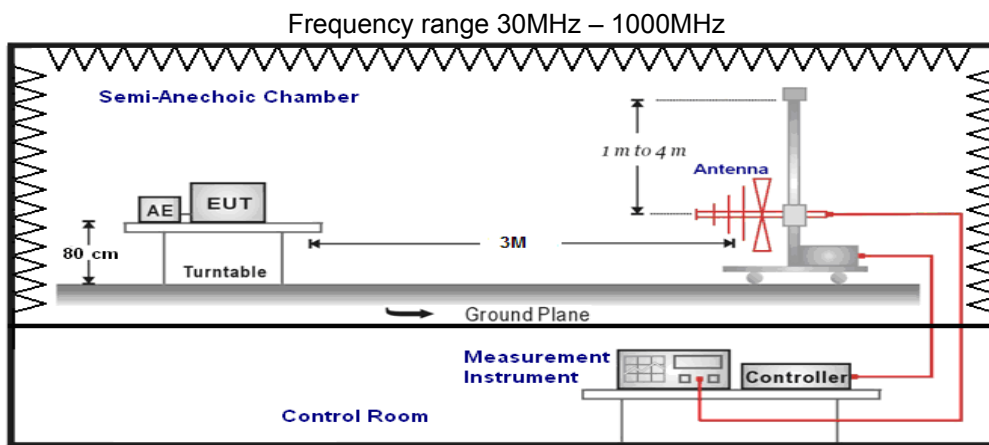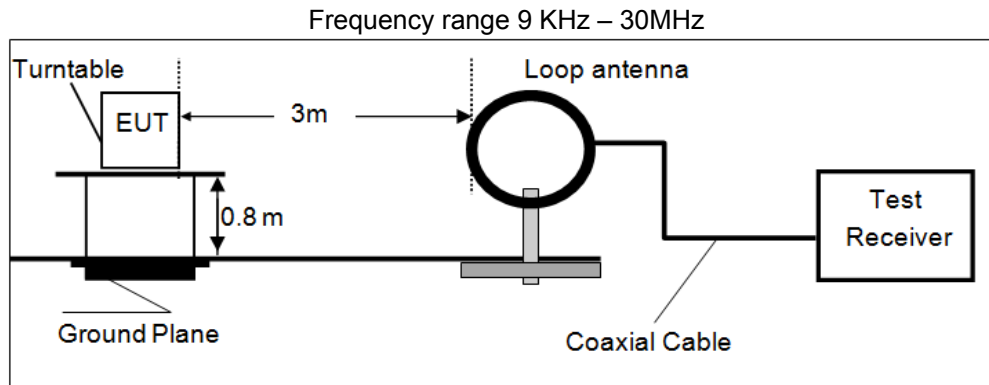

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz and 1.50m above ground plane for above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz. so radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3

18GHz-25GHz	Horn Antenna	1
-------------	--------------	---

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak
	Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

More procedure as follows;

### 1) Sequence of testing 9 kHz to 30 MHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### 2) Sequence of testing 30 MHz to 1 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 4) Sequence of testing above 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

#### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

#### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	



For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### **RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	300	$20\log(2400/F(\text{KHz}))+80$	$2400/F(\text{KHz})$
0.49-1.705	30	$20\log(24000/F(\text{KHz}))+40$	$24000/F(\text{KHz})$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

### **TEST RESULTS**


Remark:


1. The radiated measurement are performed the each test mode (GFSK, 8DPSK) and channel (low/mid/high), the datum recorded below is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested Bandedge at hopping and non-hopping mode according to DA 00 705, recorded worst case at non-hopping mode.
5. We tested at difference data Packect, recorded worst case.
6. “---” means not recorded as emission levels lower than limit.
7. Margin= Limit - Level

#### ***For 9KHz to 30MHz***

Frequency (MHz)	Corrected Reading (dB $\mu$ V/m)@3m	FCC Limit (dB $\mu$ V/m) @3m	Margin (dB)	Detector	Result
12.56	48.95	69.54	20.59	QP	PASS
25.28	45.79	69.54	23.75	QP	PASS

For 30MHz to 1000MHz

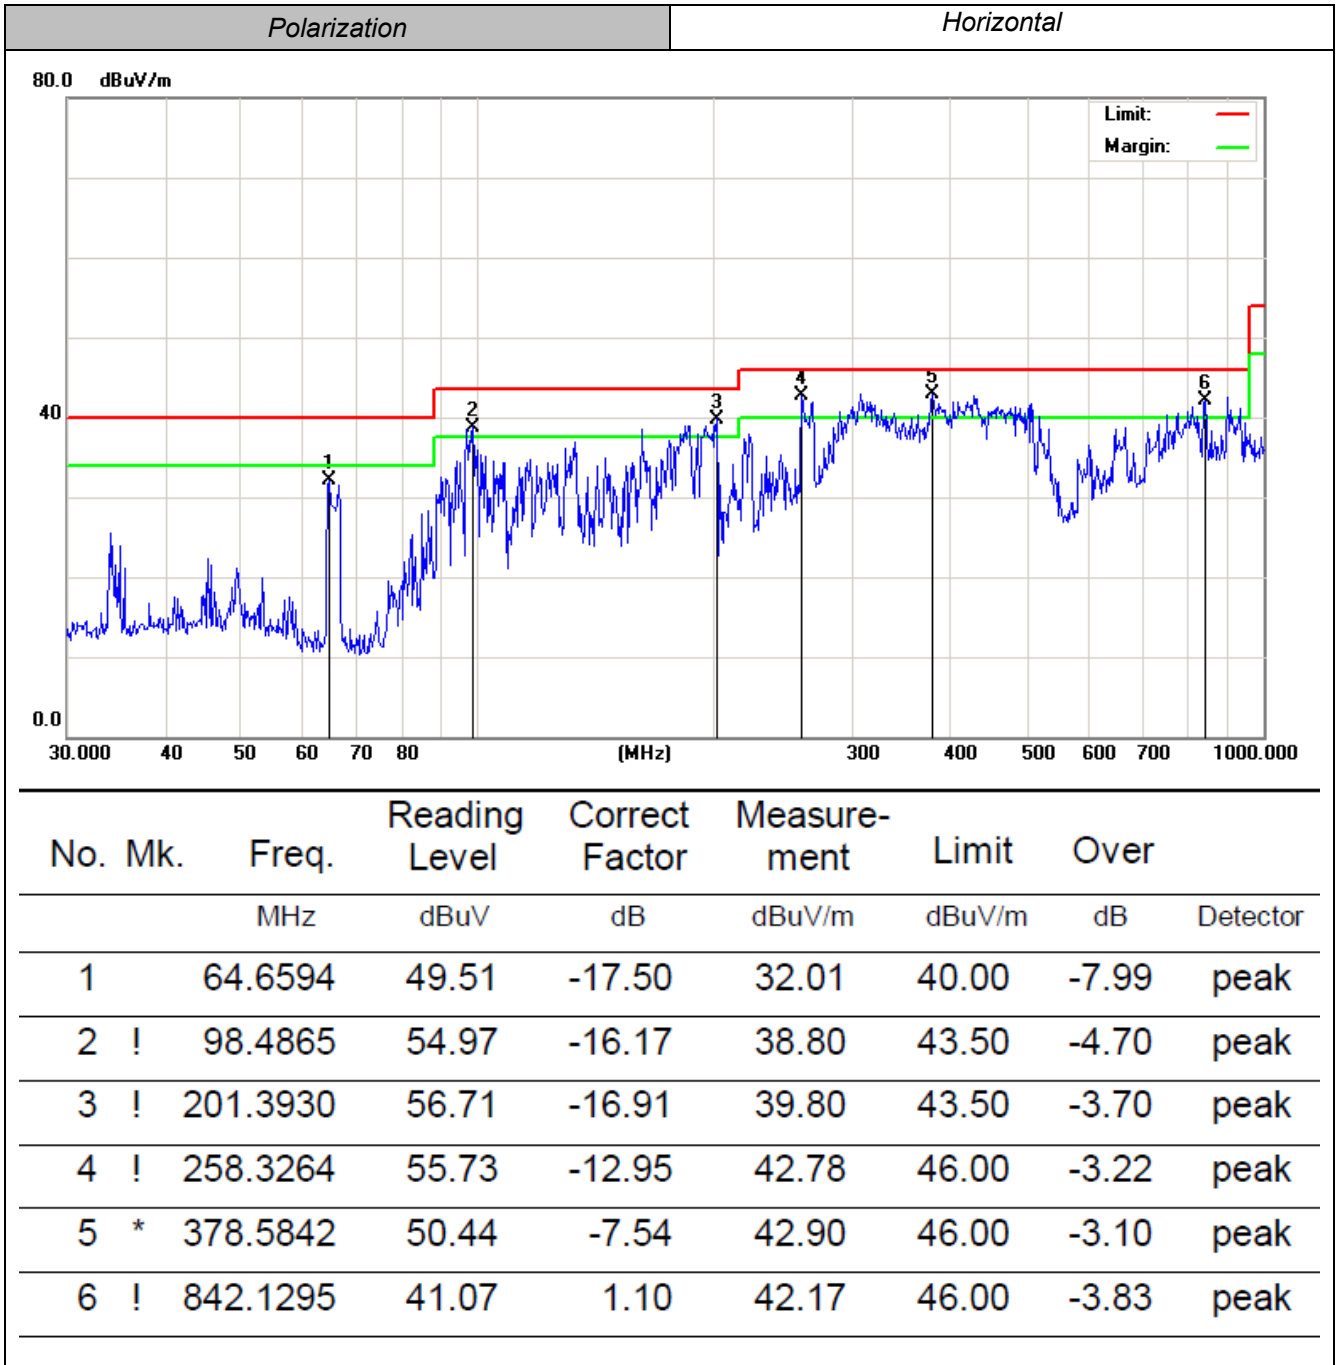

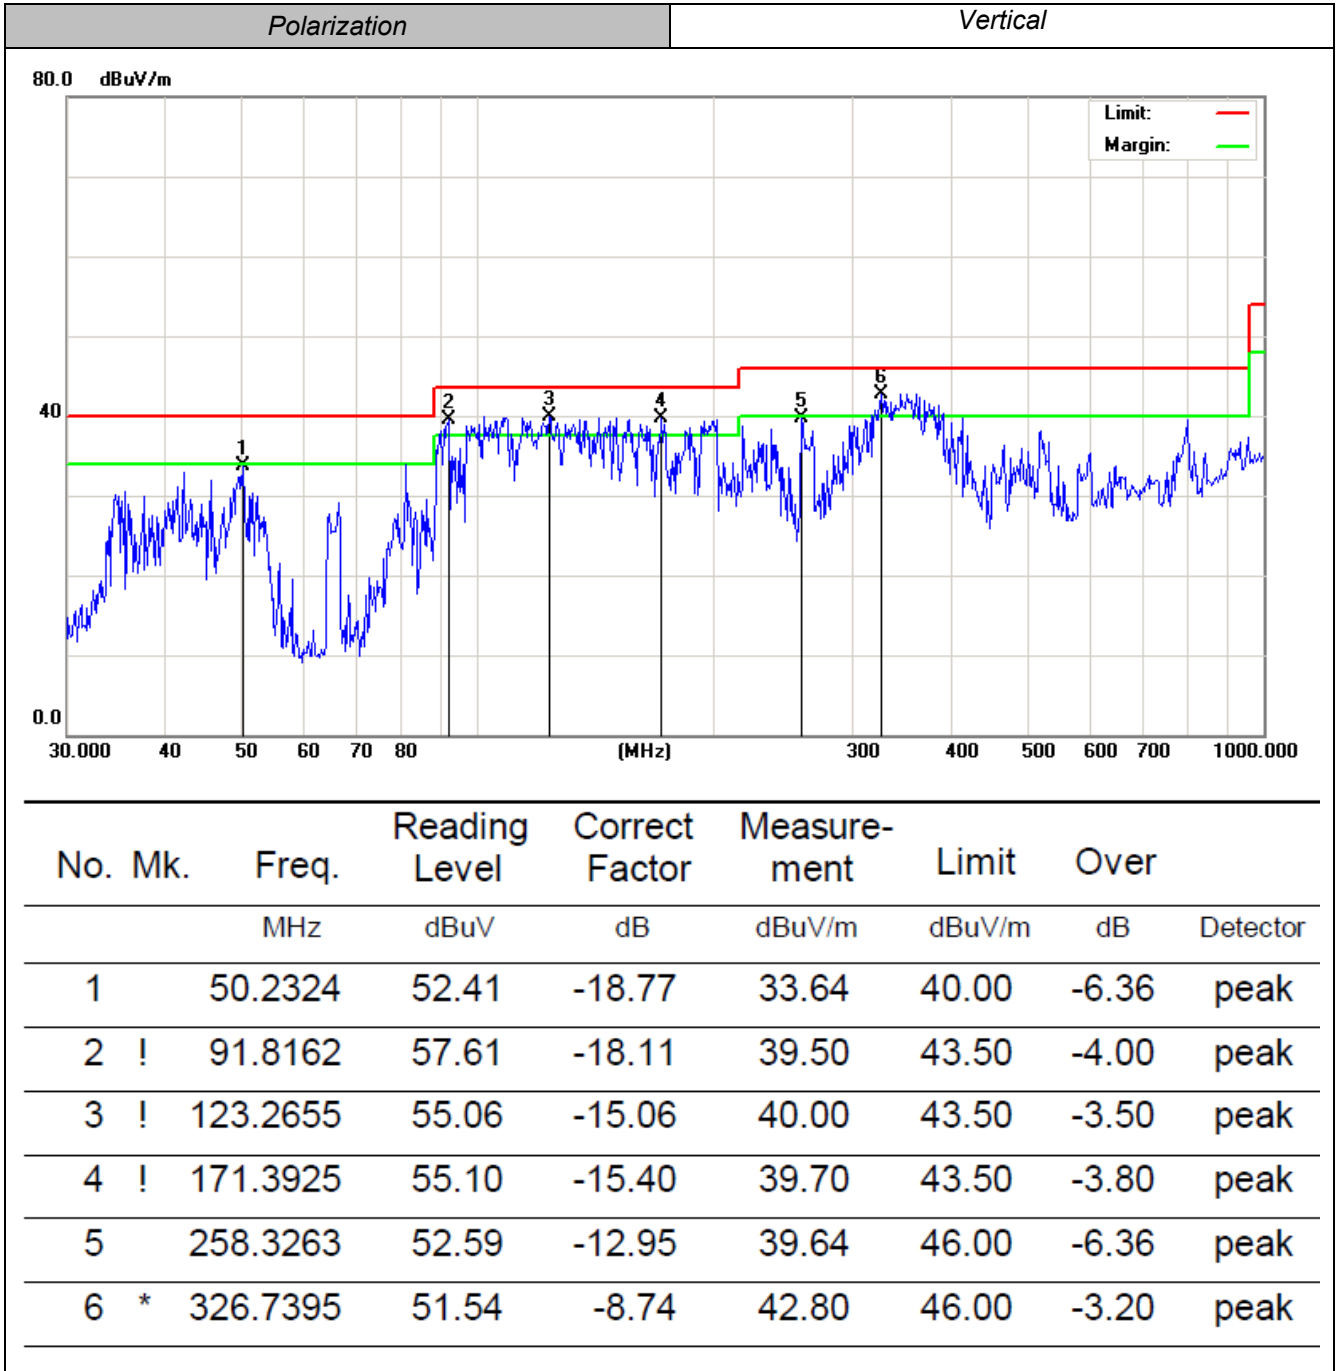

**For 1GHz to 25GHz**

Note: We tested GFSK Mode and 8DPSK, recorded the worst case at the GFSK (DH5) Mode.

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	98.15	PK	--	--	64.75	28.78	4.61	0.00	33.40
1	2402.00	89.11	AV	--	--	55.71	28.78	4.61	0.00	33.40
2	2390.00	47.82	PK	74	26.18	14.50	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	45.85	PK	74	28.15	12.43	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	54.78	PK	74	19.22	50.27	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5150.25	45.77	PK	74	28.23	38.50	34.44	7.12	34.28	7.27
5	5150.25	--	AV	54	--	--	--	--	--	--
6	7206.00	49.79	PK	74	24.21	38.68	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	97.24	PK	--	--	63.84	28.78	4.61	0.00	33.40
1	2402.00	88.45	AV	--	--	55.05	28.78	4.61	0.00	33.40
2	2390.00	46.12	PK	74	27.88	12.80	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	44.99	PK	74	29.01	11.60	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	53.52	PK	74	20.48	49.01	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5225.75	46.35	PK	74	27.65	38.94	34.57	7.16	34.31	7.41
5	5225.75	--	AV	54	--	--	--	--	--	--
6	7206.00	50.82	PK	74	23.18	39.71	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

Frequency(MHz):				2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	98.01	PK	--	--	64.50	28.85	4.66	0.00	33.51
1	2441.00	88.57	AV	--	--	55.06	28.85	4.66	0.00	33.51
2	3915.75	47.38	PK	74	26.62	42.67	33.26	6.31	34.86	4.71
2	3915.75	--	AV	54	--	--	--	--	--	--
3	4882.00	52.55	PK	74	21.45	46.19	33.60	6.95	34.19	6.36
3	4882.00	--	AV	54	--	--	--	--	--	--
4	5015.50	43.83	PK	74	30.17	36.98	34.03	7.04	34.22	6.85
4	5015.50	--	AV	54	--	--	--	--	--	--
5	7323.00	49.39	PK	74	24.61	37.69	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	96.97	PK	--	--	63.46	28.85	4.66	0.00	33.51
1	2441.00	88.54	AV	--	--	55.03	28.85	4.66	0.00	33.51
2	4015.50	47.25	PK	74	26.75	42.57	33.07	6.40	34.79	4.68
2	4015.50	--	AV	54	--	--	--	--	--	--
3	4882.00	52.66	PK	74	21.34	46.40	33.60	6.95	34.30	6.26
3	4882.00	--	AV	54	--	--	--	--	--	--
4	5211.50	43.75	PK	74	30.25	36.16	34.55	7.15	34.11	7.59
4	5211.50	--	AV	54	--	--	--	--	--	--
5	7323.00	50.25	PK	74	23.75	38.55	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	97.12	PK	--	--	63.50	28.92	4.70	0.00	33.62
1	2480.00	88.36	AV	--	--	54.74	28.92	4.70	0.00	33.62
2	2483.50	48.04	PK	74	25.96	14.41	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	46.13	PK	74	27.87	12.45	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	54.43	PK	74	19.57	49.51	33.84	7.00	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5215.75	48.46	PK	74	25.54	41.06	34.56	7.15	34.31	7.40
5	5215.75	--	AV	54	--	--	--	--	--	--
6	7440.00	49.11	PK	74	24.89	37.16	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	98.32	PK	--	--	64.70	28.92	4.70	0.00	33.62
1	2480.00	88.56	AV	--	--	54.94	28.92	4.70	0.00	33.62
2	2483.50	47.61	PK	74	26.39	13.98	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	44.88	PK	74	29.12	11.20	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	54.06	PK	74	19.94	49.14	33.84	7.00	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5025.25	47.91	PK	74	26.09	41.04	34.07	7.05	34.24	6.87
5	5025.25	--	AV	54	--	--	--	--	--	--
6	7440.00	49.21	PK	74	24.79	37.26	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

### 4.3 Duty Cycle

#### TEST CONFIGURATION



#### LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).

#### TEST PROCEDURE


- a. A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal.
- b. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### TEST RESULTS

The Manufacturer provide specific software to control BT work at 100% continuous transmit;

## 4.4 Maximum Peak Output Power

### TEST CONFIGURATION



### TEST PROCEDURE

According to ANSI C63.10:2013 7.8.5 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices; this is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW  $\geq$  RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### TEST RESULTS


Test Mode	Channel	Frequency (MHz)	Measured Maximum Peak Power (dBm)	Limits (dBm)	Verdict
GFSK	00	2402	9.821	30	PASS
	39	2441	7.904		
	78	2480	6.891		
$\pi/4$ DQPSK	00	2402	8.372	21	PASS
	39	2441	5.016		
	78	2480	3.820		
8DPSK	00	2402	8.381	21	PASS
	39	2441	5.060		
	78	2480	3.835		

Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK,  $\pi/4$ DQPSK, 8DPSK modulation type;



### Maximum Peak Output Power

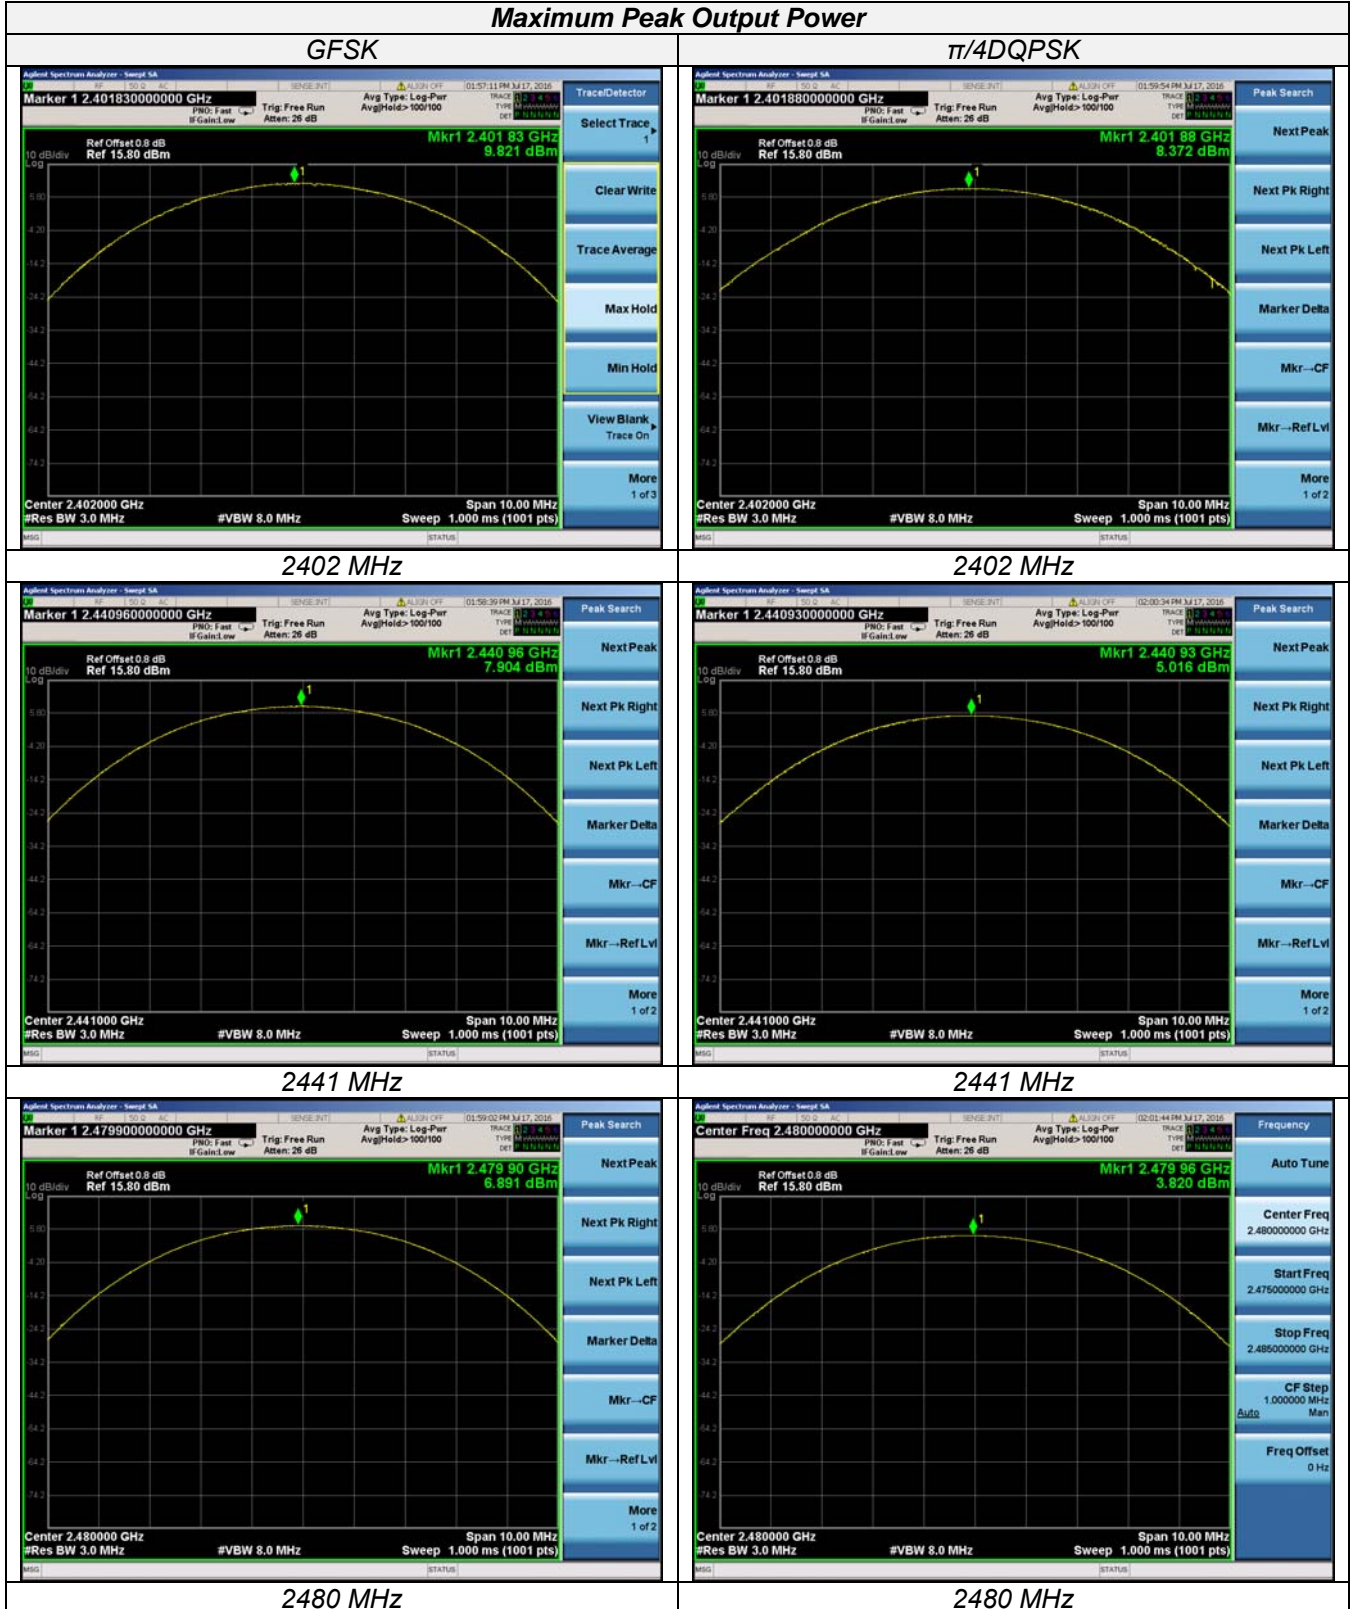

Maximum Peak Output Power

8DPSK



2402 MHz




2441 MHz



2480 MHz

## 4.5 20dB Bandwidth

### TEST CONFIGURATION

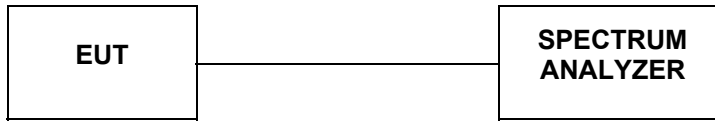

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### TEST RESULTS

Channel	Frequency (MHz)	20dB Bandwidth (KHz)		Limits (KHz)	Verdict
		GFSK	8DPSK		
00	2402	950.20	1139.00	/	PASS
39	2441	943.90	1144.00	/	PASS
78	2480	943.60	1143.00	/	PASS

#### *Remark:*

1. *Test results including cable loss;*
2. *please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded woest case for each mode.*
4. *Worst case data at DH5 for GFSK, 8DPSK modulation type;*

20dB Bandwidth

GFSK



8DPSK



2402 MHz



2402 MHz



2441 MHz



2441 MHz



2480 MHz




2480 MHz



## 4.6 Frequency Separation

### TEST CONFIGURATION

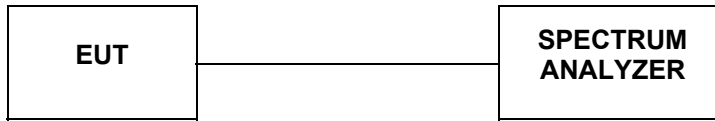

### TEST PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.


### TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Frequency Separation (MHz)	Limits (MHz)	Verdict
GFSK	39	2441	1.000	0.5479	PASS
	40	2442			
8DPSK	39	2441	1.000	0.7720	PASS
	40	2442			

Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded woest case for each mode.
4. Worst case data at DH5 for GFSK, 8DPSK modulation type;

Frequency Separation

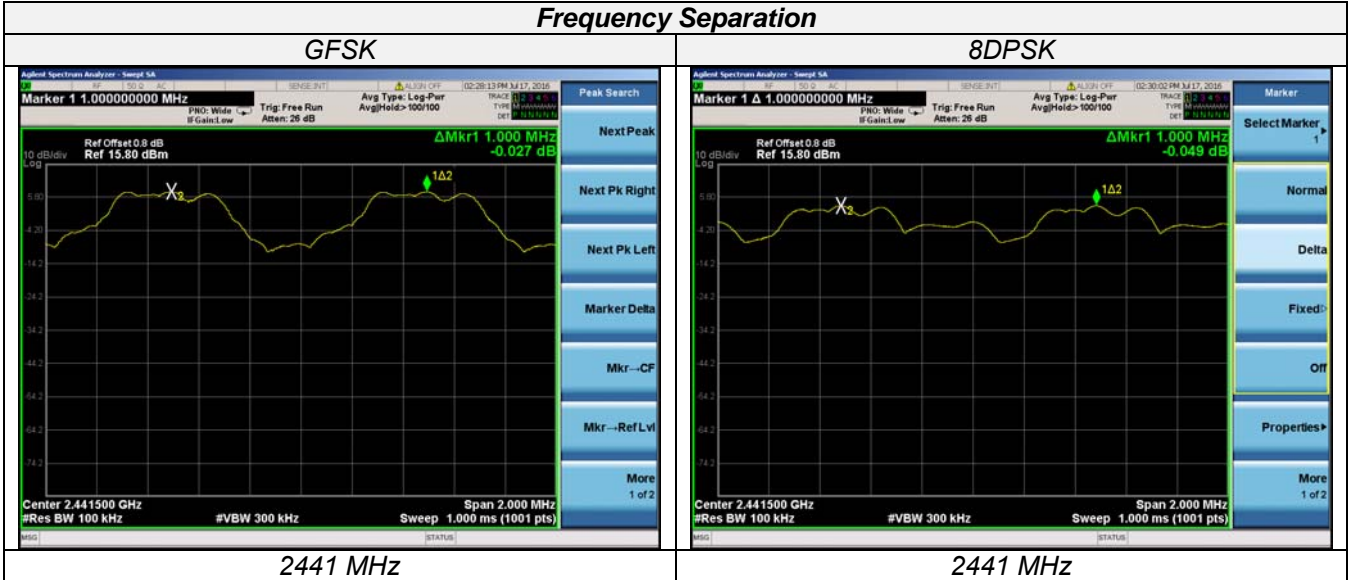

2441 MHz


2441 MHz

## 4.7 Band-edge measurements for RF conducted emissions

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### TEST CONFIGURATION

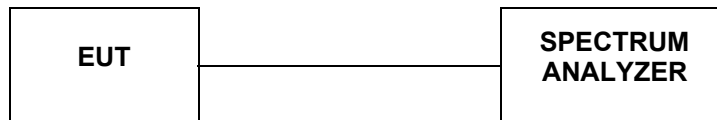

### TEST PROCEDURE

According to ANSI C63.10:2013 for Antenna-port conducted measurement.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge,
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency.

### TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Conductd Band-edge Emission (dBc)	Limits (dBc)	Verdict
GFSK	00	2402	<-20dBc	-20	PASS
	78	2480	<-20dBc	-20	
	Hopping	Full	<-20dBc	-20	
8DPSK	00	2402	<-20dBc	-20	PASS
	78	2480	<-20dBc	-20	
	Hopping	Full	<-20dBc	-20	



*Remark:*

1. *Test results including cable loss;*
2. *please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded woest case for each mode.*
4. *Worst case data at DH5 for GFSK, 8DPSK modulation type;*

### Band-edge Measurements for RF Conducted Emissions



GFSK

8DPSK

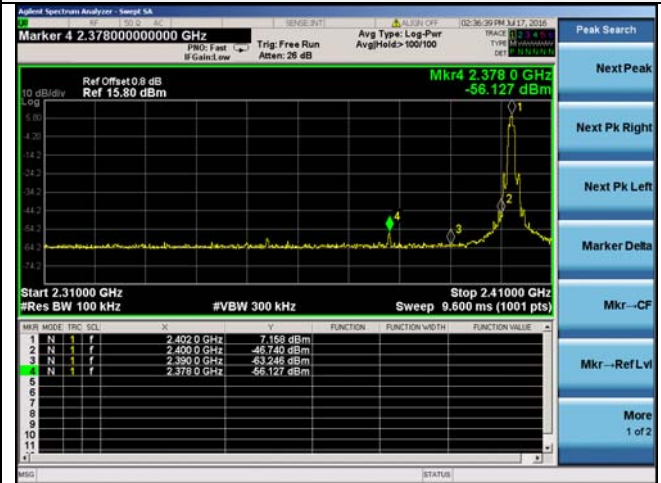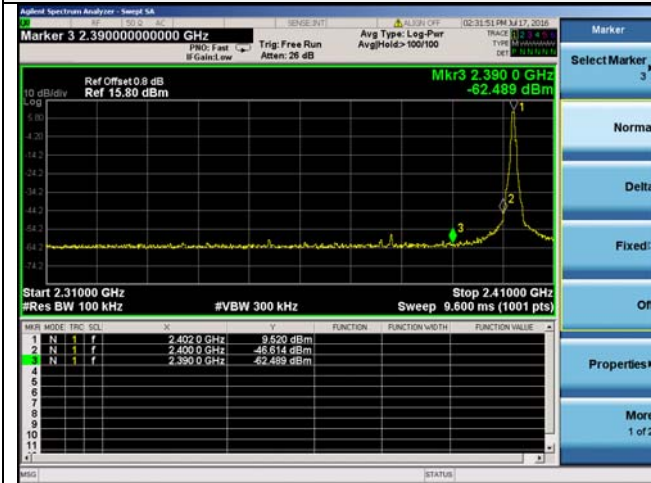

2402 MHz

2402 MHz

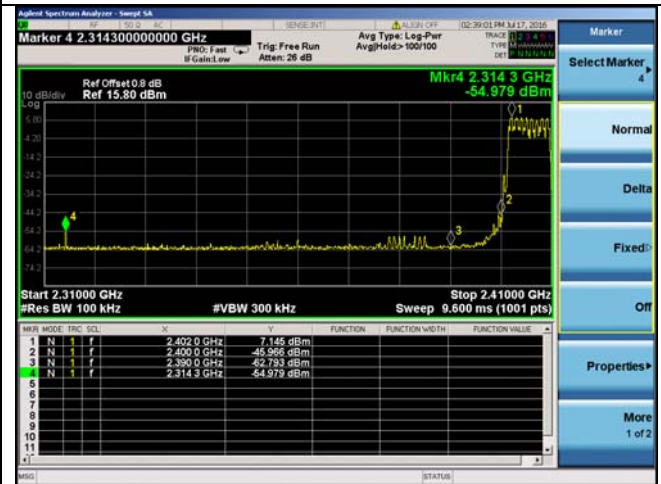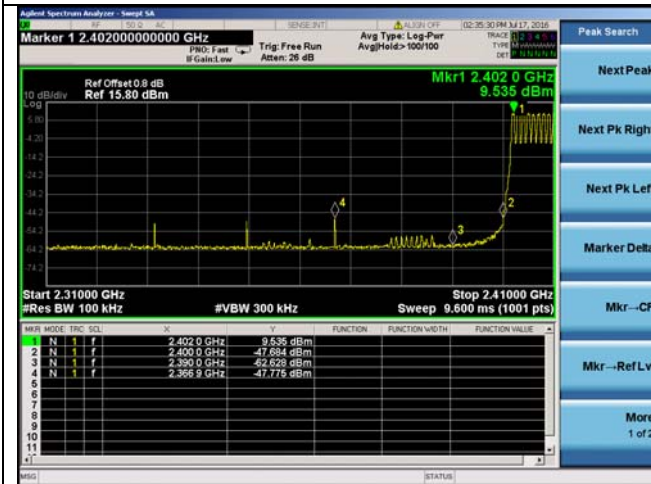

2402 MHz - Hopping


2402 MHz - Hopping



**Band-edge Measurements for RF Conducted Emissions**



**GFSK**

**8DPSK**

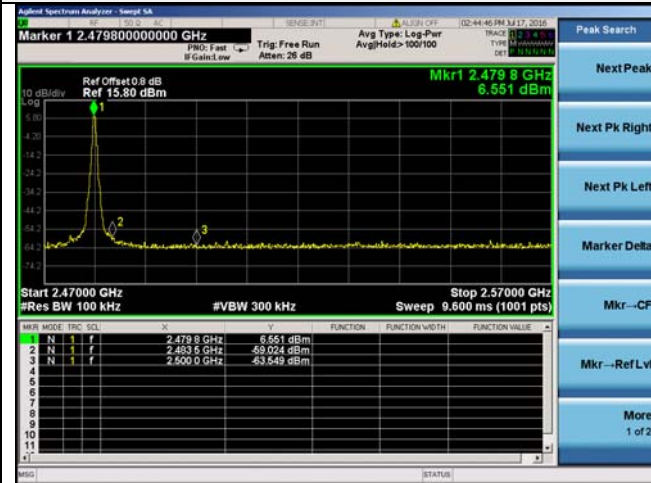

**2480 MHz**

**2480 MHz**

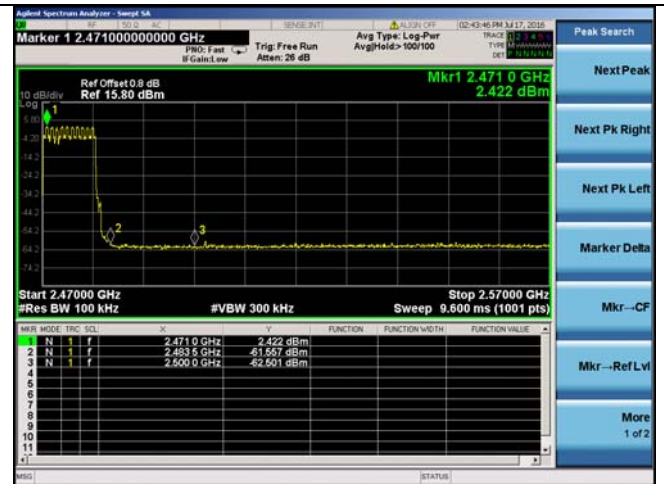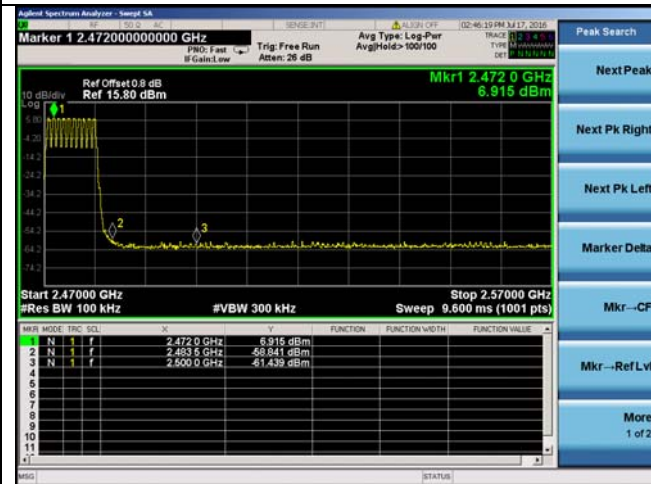


**2480 MHz - Hopping**

**2480 MHz - Hopping**

## 4.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.


### TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
GFSK	0	2402	<-20dBc	-20	PASS
	39	2441	<-20dBc	-20	
	78	2480	<-20dBc	-20	
8DPSK	0	2402	<-20dBc	-20	PASS
	39	2441	<-20dBc	-20	
	78	2480	<-20dBc	-20	

#### Remark:

1. Test results including cable loss;
2. please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded woest case for each mode.
4. Worst case data at DH5 for GFSK, 8DPSK modulation type;

### Spurious RF Conducted Emissions 2402 MHz(GFSK)

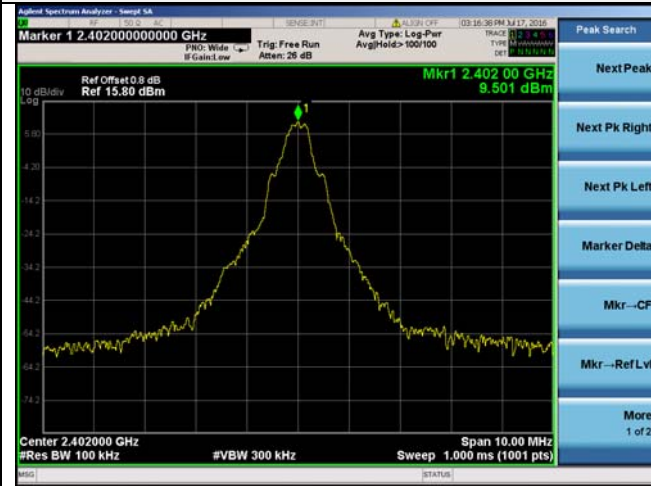


2402MHz



9kHz - 150kHz



150 KHz - 30MHz

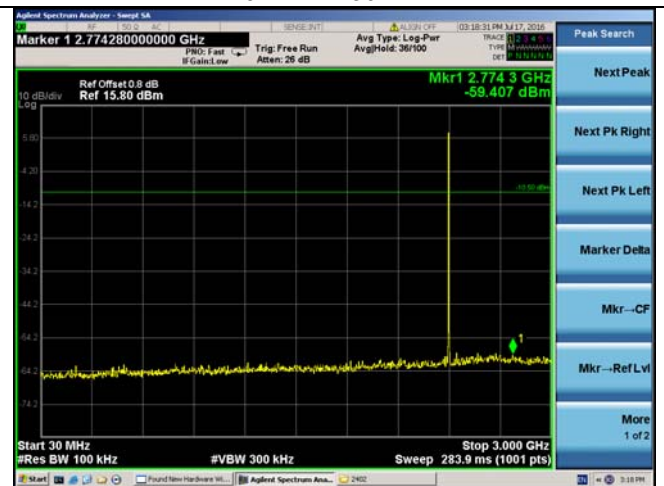


30MHz - 3GHz



3GHz - 25GHz

### Spurious RF Conducted Emissions 2441 MHz(GFSK)

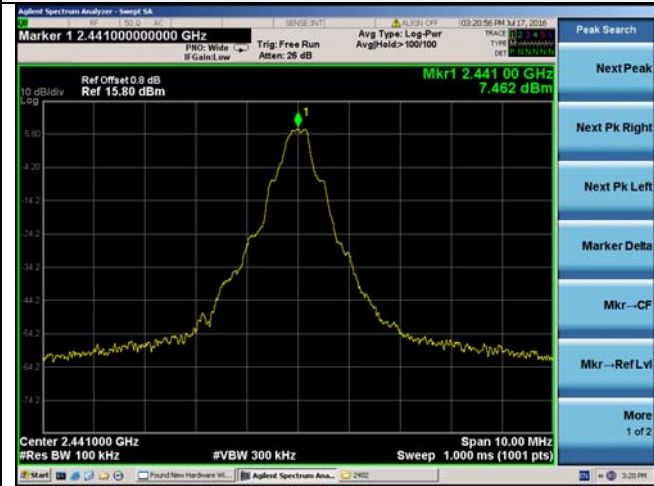

2402MHz

9kHz – 150kHz




150 KHz – 30MHz

30MHz – 3GHz



3GHz – 25GHz

### Spurious RF Conducted Emissions 2480MHz(GFSK)

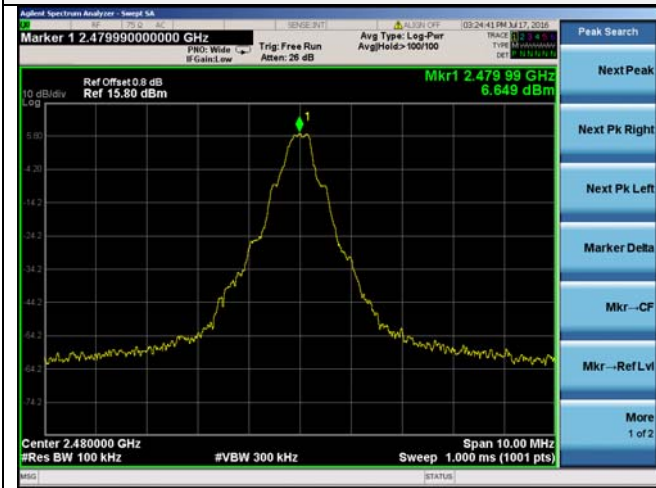


2402MHz




9kHz - 150kHz



150 KHz - 30MHz

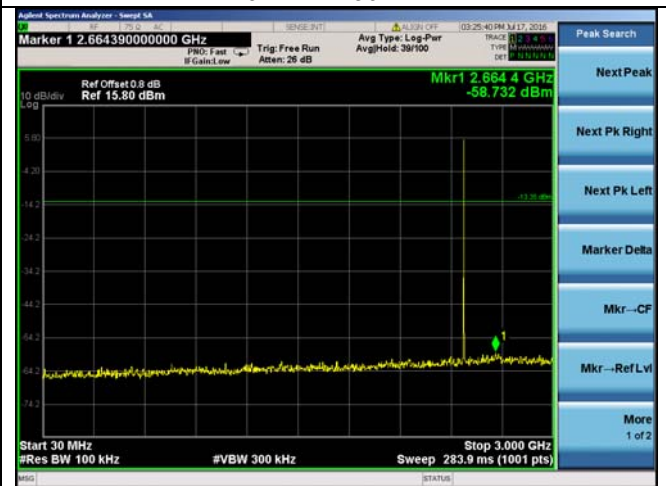

30MHz - 3GHz

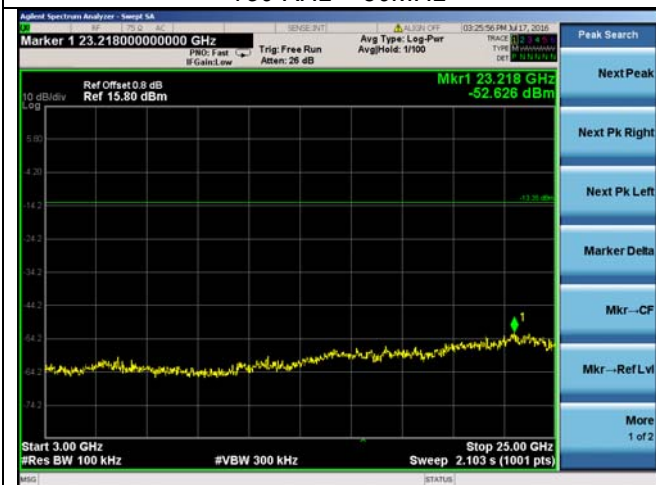


3GHz - 25GHz

### Spurious RF Conducted Emissions 2402MHz(8DPSK)



2402MHz

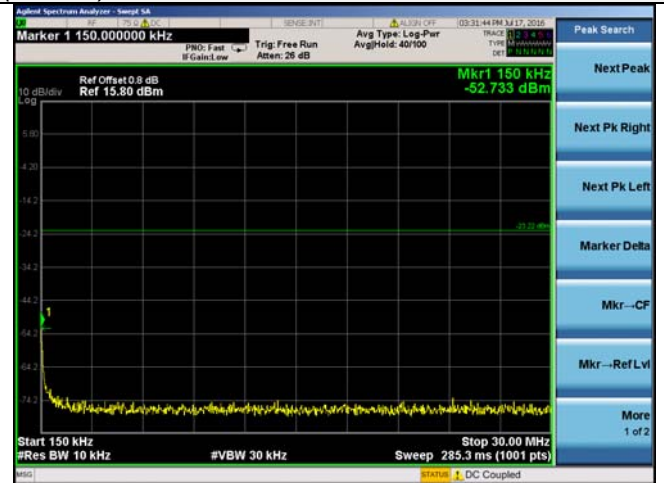

9kHz – 150kHz



150 KHz – 30MHz




30MHz – 3GHz




3GHz – 25GHz

### Spurious RF Conducted Emissions 2441MHz(8DPSK)

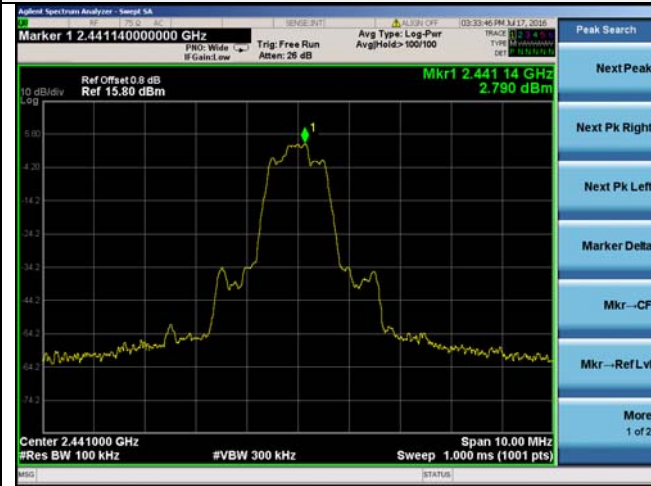


2402MHz

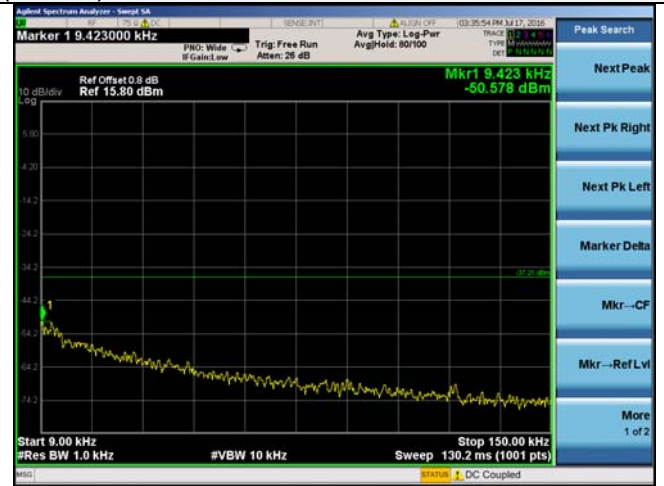

9kHz – 150kHz



150 KHz – 30MHz

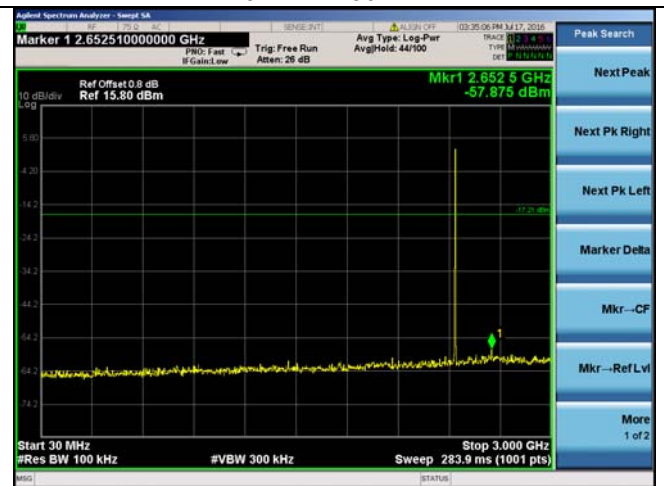


30MHz – 3GHz



3GHz – 25GHz

### Spurious RF Conducted Emissions 2480MHz(8DPSK)

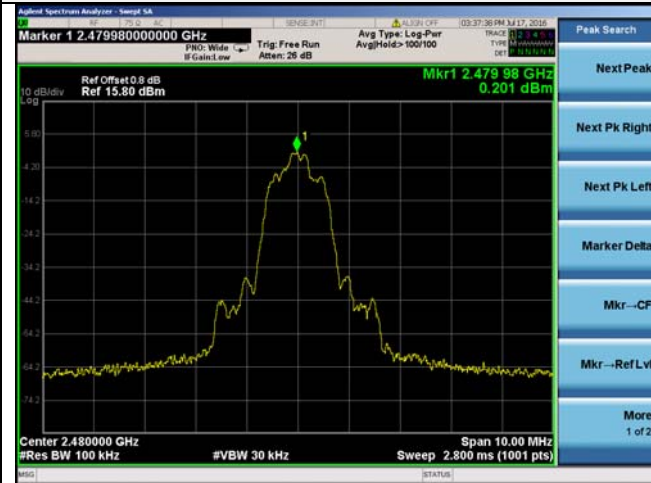


2402MHz



9kHz – 150kHz



150 KHz – 30MHz

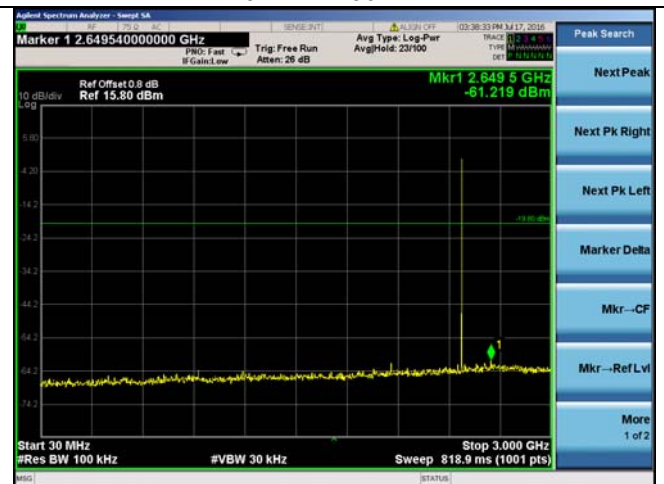

30MHz – 3GHz




3GHz – 25GHz



### 4.9 Number of hopping frequency

#### TEST CONFIGURATION



#### TEST PROCEDURE

- The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:
- Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
  - RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth;
  - VBW  $\geq$  RBW.
  - Sweep: Auto.
  - Detector function: Peak.
  - Trace: Max hold.
  - Allow the trace to stabilize.

#### LIMIT


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Numbers of Channel	Limits	Verdict
<b>GFSK</b>	Full (hopping)	2402-2480	79	15	PASS
<b>8DPSK</b>	Full (hopping)	2402-2480	79	15	PASS


Remark:

- Test results including cable loss;
- please refer to following plots;
- Measured at difference Packet Type for each mode and recorded woest case for each mode.
- Worst case data at DH5 for GFSK, 8DPSK modulation type;

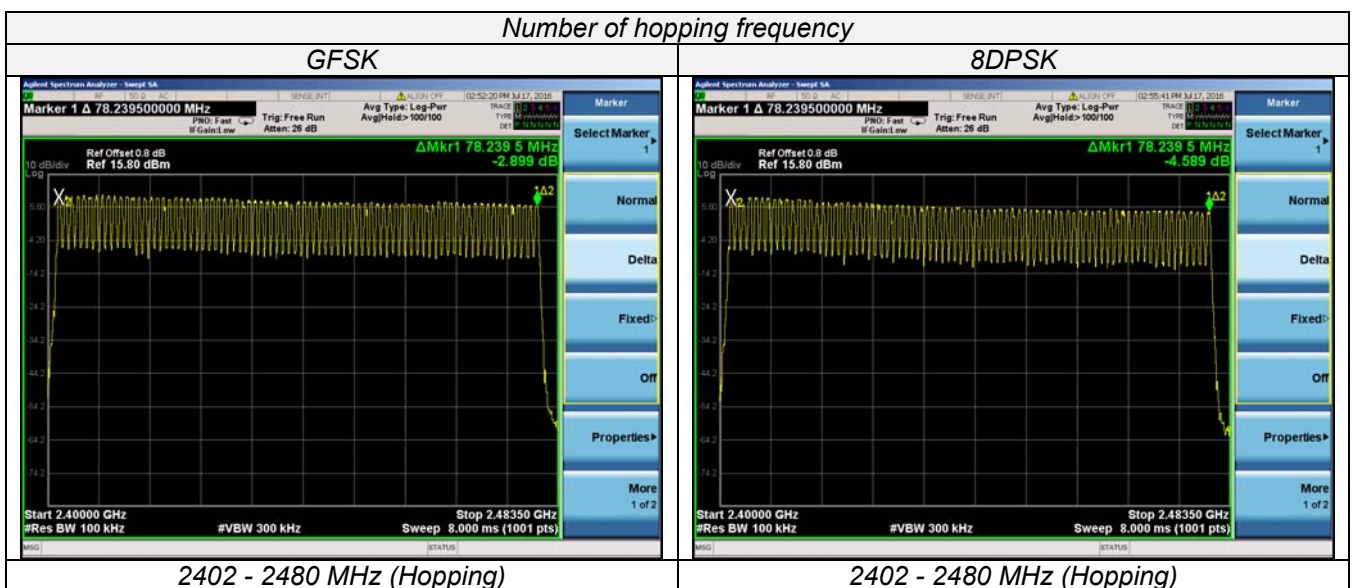

## 4.10 Time of Occupancy (Dwell Time)

### TEST CONFIGURATION

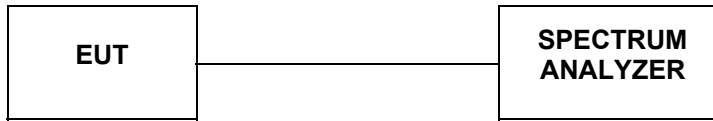

### TEST PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Zero span, centered on a hopping channel.
- RBW shall be  $\geq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.

### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST RESULTS

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \cdot \text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67$  [ch\*hop/s]

The hops per second on one channel:  $266.67$  [ch\*hops/s]/ $79$  [ch]= $3.38$  [hop/s];

The total hops for all channels within the dwell time calculation duration:  $3.38$  [hop/s]\* $31.6[s \cdot \text{ch}] = 106.67$  [hop\*ch];


The dwell time for all channels hopping:  $106.67$  [hop\*ch]\*Burst Width [ms/hop/ch].

Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Verdict
GFSK	2441	DH1	0.1976	0.0632	0.4	PASS
		DH3	0.2609	0.0417	0.4	PASS
		DH5	0.2913	0.0311	0.4	PASS
8DPSK	2441	DH1	0.1925	0.0616	0.4	PASS
		DH3	0.1955	0.0313	0.4	PASS
		DH5	0.2077	0.0222	0.4	PASS

Remark:

- Test results including cable loss;
- please refer to following plots;
- Measured at difference Packet Type for each mode and recorded worst case for each mode.
- Worst case data at DH5 for GFSK, 8DPSK modulation type;
- Dwell Time Calculate formula:  
 DH1: Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$  31.6 Second  
 DH3: Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$  31.6 Second  
 DH5: Dwell time=Pulse Time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$  31.6 Second
- Measured at low, middle and high channel, recorded worst at middle channel;

Time Of Occupancy (Dwell Time)

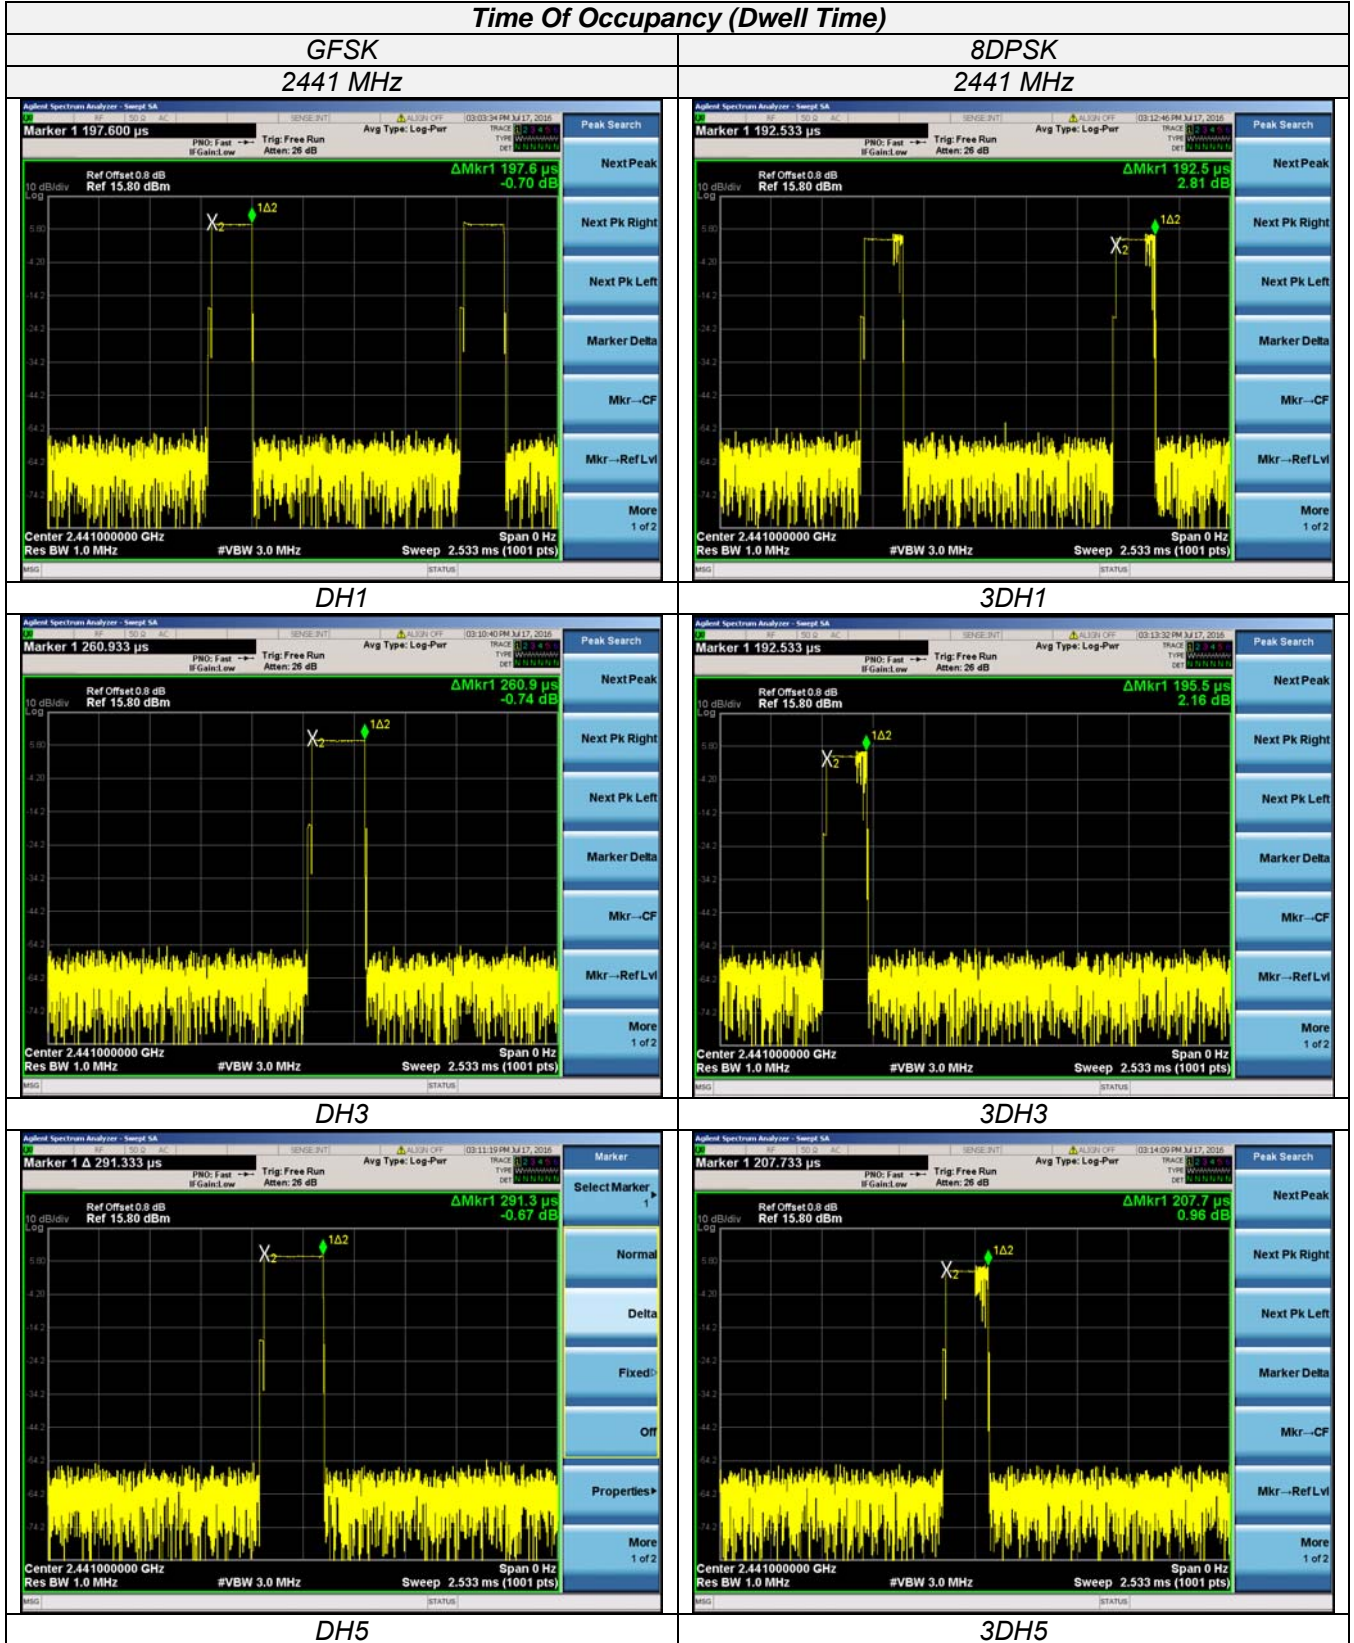

### 4.11 Pseudorandom Frequency Hopping Sequence

**TEST APPLICABLE**


**For 47 CFR Part 15C section 15.247 (a)(1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

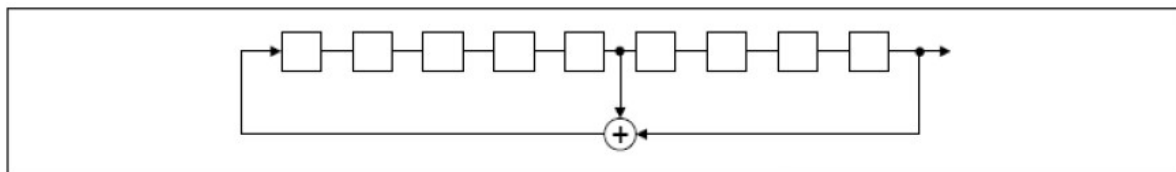

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

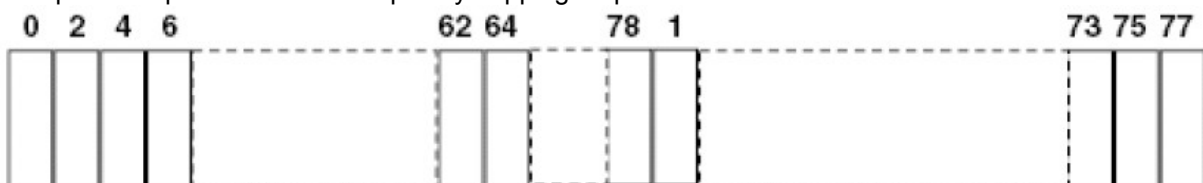

Each frequency used equally one the average by each transmitter.  
The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 4.12 Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

Conducted power refer ANSI C63.10 :2013 Section 7.8.5 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

Radiated power refer to ANSI C63.10 :2013 Section 6.6.4 Radiated emissions tests.

### Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

### Limits

FCC	IC
Antenna Gain	
6 dBi	

### Results

T <sub>nom</sub>	V <sub>nom</sub>	Lowest Channel 2402 MHz	Middle Channel 2441 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		9.821	7.904	6.891
Radiated power [dBm] Measured with GFSK modulation		10.112	10.21	7.985
Gain [dBi] Calculated		0.291	2.306	1.094
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		

**5 Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

**6 External Photos of the EUT**

Please refer to separated files for External Photos of the EUT.

**7 Internal Photos of the EUT**

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....