



FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: CTA-01-160700203

FCC ID.....: H79Q3PLUS

Compiled by

(position+printed name+signature)..: File administrators Kevin Liu

Kevin Liu

Supervised by

(position+printed name+signature)..: Project Engineer Kevin Liu

Kevin Liu

Approved by

(position+printed name+signature)..: RF Manager Eric Wang

Eric Wang

Date of issue.....: July 20, 2016

Representative Laboratory Name ..: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 520,5th Floor, No.1053 Xixiang Baoyuan Road, Baoan District,Shenzhen,China

Testing Laboratory Name ..: Dongguan Yaxu (AIT) Technology Limited

Address: No. 22,JinQianLing Street 3, JiTiGang Village, Huang-Jiang Town, DongGuan, Guangdong, 523757 China

Applicant's name.....: Delta Electronics Incorporated

Address: 3, Tungyuan Road Chungli Industrial Zone Taoyuan County 32063, Taiwan

Test specification ..:

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen CTA Testing Technology Co., Ltd.

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ..: HD Pocket Projector

Trade Mark: VIVITEK

Manufacturer.....: Delta Electronics Incorporated

Model/Type reference.....: Q3PLUS

Listed Models: Q3PLUS-WH, Q3PLUS-BK, Q3PLUS-RD, Q3PLUS-GD, Q3-BK, Q3-WH, Q3HP2704A, Q3HP2702A, Q3HP2706A, Q3HP2708

Modulation Type: DSSS(CCK,DQPSK,DBPSK),OFDM(64QAM,16QAM,QPSK, BPSK)

Operation Frequency.....: From 2412MHz to 2462MHz

Rating: DC 7.40V / DC 12V adapter from AC 120V/60Hz

Hardware version: 2800-AV69S8-06 2016-06-08 V69+S805

Software version: V1.0-2016.07.18

Result.....: **PASS**

TEST REPORT

Test Report No. :	CTA-01-160700203	July 20, 2016
		Date of issue

Equipment under Test : HD Pocket Projector

Model /Type : Q3PLUS

Listed Models : Q3PLUS-WH, Q3PLUS-BK, Q3PLUS-RD, Q3PLUS-GD,
Q3-BK, Q3-WH, Q3HP2704A, Q3HP2702A, Q3HP2706A,
Q3HP2708

Applicant : **Delta Electronics Incorporated**

Address : 3, Tungyuan Road Chungli Industrial Zone Taoyuan
County 32063, Taiwan

Manufacturer : **Delta Electronics Incorporated**

Address : 3, Tungyuan Road Chungli Industrial Zone Taoyuan
County 32063, Taiwan

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	2016-07-20	Initial Issue	Eric Wang

Contents

<u>1</u>	<u>TEST STANDARDS.....</u>	<u>5</u>
<u>2</u>	<u>SUMMARY</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	Description of the test mode	6
2.5	Short description of the Equipment under Test (EUT)	7
2.6	EUT operation mode	8
2.7	EUT configuration	8
2.8	Internal Identification of AE used during the test	8
2.9	Related Submittal(s) / Grant (s)	8
2.10	Modifications	8
2.11	Test Environments	8
<u>3</u>	<u>TEST ENVIRONMENT.....</u>	<u>9</u>
3.1	Address of the test laboratory	9
3.2	Test Facility	9
3.3	Environmental conditions	9
3.4	Test Description	9
3.5	Summary of measurement results	10
3.6	Equipments Used during the Test	11
<u>4</u>	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>12</u>
4.1	AC Power Conducted Emission	12
4.2	Radiated Emission	15
4.3	Duty Cycle	23
4.4	Maximum Output Power	24
4.5	Power Spectral Density	25
4.6	Spurious RF Conducted Emission	28
4.7	6dB Bandwidth	38
4.8	Band-edge Measurements for Radiated Emissions	41
4.9	Band-edge Measurements for RF Conducted Emissions	46
4.10	Antenna Requirement	49
<u>5</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>50</u>
<u>6</u>	<u>EXTERNAL PHOTOS OF THE EUT</u>	<u>50</u>
<u>7</u>	<u>INTERNAL PHOTOS OF THE EUT.....</u>	<u>50</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	June. 30, 2016
Testing commenced on	:	July. 01, 2016
Testing concluded on	:	July. 20, 2016

2.2 Product Description

The **Delta Electronics Incorporated** 's Model: Q3PLUS or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	HD Pocket Projector and Car Charger
Model Number	Q3PLUS
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna information	Internal and maximum gain is 2.541dBi
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	6.00VDC to 8.40VDC (nominal: 7.40VDC)
Adapter information	Mode:ADP-36PH A Input:AC 100-240V 50/60Hz 1A Output:DC12V 3A

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 7.40V / DC 12V adapter from AC 120V/60Hz

2.4 Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.5 Short description of the Equipment under Test (EUT)

2.5.1 Test Modes

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §8.2 Option 2
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H
Maximum Peak Conducted Output Power	Measurement Method	FCC KDB 558074§9.1.2
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §10.2 (peak PSD).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074§11.0.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H
Unwanted Emissions into Restricted Frequency Bands (Conducted)	Measurement Method	FCC KDB 558074§12.2, Conducted (antenna-port).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H
Unwanted Emissions into Restricted	Measurement Method	FCC KDB 558074§12.1,Radiated(cabinet/case emissions with Impedance matching for antenna-port).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	11g_M (Worst Conf.).

Note:

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. Typical working modes for each IEEE 802.11 mode are selected to perform tests. The manufacturer provide special test software to control TX duty cycle >98% for TX test; recorded worst case at difference data rate as follows:

Test Mode	Test Modes Description
11b	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11g	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11n HT20	IEEE 802.11n with data date of MCS0 and bandwidth of 20MHz using SISO mode.

2.6 EUT operation mode

Test Mode	RF Ch.	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]
11b	L	Ch No. 1 / 2412MHz	---	20
	M	Ch No. 6 / 2437 MHz	---	20
	H	Ch No. 11/ 2462MHz	---	20
11g	L	Ch No. 1 / 2412MHz	---	20
	M	Ch No. 6 / 2437 MHz	---	20
	H	Ch No. 11/ 2462MHz	---	20
11n HT20	L	Ch No. 1 / 2412MHz	---	20
	M	Ch No. 6 / 2437 MHz	---	20
	H	Ch No. 11/ 2462MHz	---	20

2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.8 Internal Identification of AE used during the test

AE ID*	Description
AE1	Notebook

Mode:R510V
Trade: ASUS

*AE ID: is used to identify the test sample in the lab internally.

2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: H79Q3PLUS** filing to comply with FCC Part 15.247 Rules

2.10 Modifications

No modifications were implemented to meet testing criteria.

2.11 Test Environments

NOTE: The values used in the test report maybe stringent than the declared.

Environment Parameter	Selected Values During Tests		
	NTNV	Temperature	Voltage
Ambient		7.40VDC	Ambient

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Dongguan Yaxu (AiT) Technology Limited

No. 22, JinQianLing Street 3, JiTiGang Village, Huang-Jiang Town, DongGuan, Guangdong, 523757 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4, CISPR 22/EN 55022 and CISPR16-1-4:2010 SVSWR requirements.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

Industry Canada(IC)-Registration No: IC6819A

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dngguan Yaxu (AiT) technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Asia Institute Technology (Dongguan) Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4 Test Description

Test Item	FCC Part No.	Requirements	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	PASS
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain:< 30dBm – (G[dBi] –6 [dB]),peak; Otherwise :< 30dBm, peak.	PASS
Maximum Power Spectral Density Level	15.247(e)	For directional gain :< 8dBm/3 kHz – (G[dBi] –6[dB]), peak. Otherwise :< 8dBm/3 kHz, peak.	PASS
Band Edges Compliance	15.247(d)	< -20dBr/100 kHz if total peak power ≤power limit.	PASS
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	< -20dBr/100 kHz if total peak power ≤power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Conducted)	15.247(d) 15.209	< -20dBr/100 kHz if total peak power ≤power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209	FCC Part 15.209 field strength limit;	PASS

AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	PASS
-----------------------------------	--------	----------------------------------	------

Remark:

- The measurement uncertainty is not included in the test result.
- We pre-test both AC 120V/60Hz and AC 240V/50Hz for AC conducted emission, recorded worst case at AC 120V/60Hz;

3.5 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	802.11b	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth – 6 dB bandwidth	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	Band edge compliance conducted	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205	Band edge compliance radiated	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	802.11b 802.11g 802.11n HT20	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	802.11b	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11b	-/-	802.11b	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11b	-/-	802.11b	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Remark:

- The measurement uncertainty is not included in the test result.
- NA = Not Applicable; NP = Not Performed


3.6 Equipments Used during the Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2016/06/29	2017/06/28
2	EMI Measuring Receiver	R&S	ESR	101660	2016/06/29	2017/06/28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2016/06/29	2017/06/28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2016/06/29	2017/06/28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2016/06/29	2017/06/28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2016/06/29	2017/06/28
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2016/06/29	2017/06/28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016/06/29	2017/06/28
9	EMI Test Receiver	R&S	ESCI	100124	2016/06/29	2017/06/28
10	LISN	Kyoritsu	KNW-242	8-837-4	2016/06/29	2017/06/28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2016/06/29	2017/06/28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016/06/29	2017/06/28
13	Loop Antenna	ARA	PLA-1030/B	1029	2016/06/29	2017/06/28
14	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2016/06/29	2017/06/28
15	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2016/06/29	2017/06/28
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2016/06/29	2017/06/28
17	Power Meter	Anritsu	ML2495A	N/A	2016/06/29	2017/06/28
18	Power sensor	Anritsu	MA2411B	N/A	2016/06/29	2017/06/28
19	Signal Analyzer	Agilent	N9020A	MY49430428	2016/06/07	2017/06/06

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

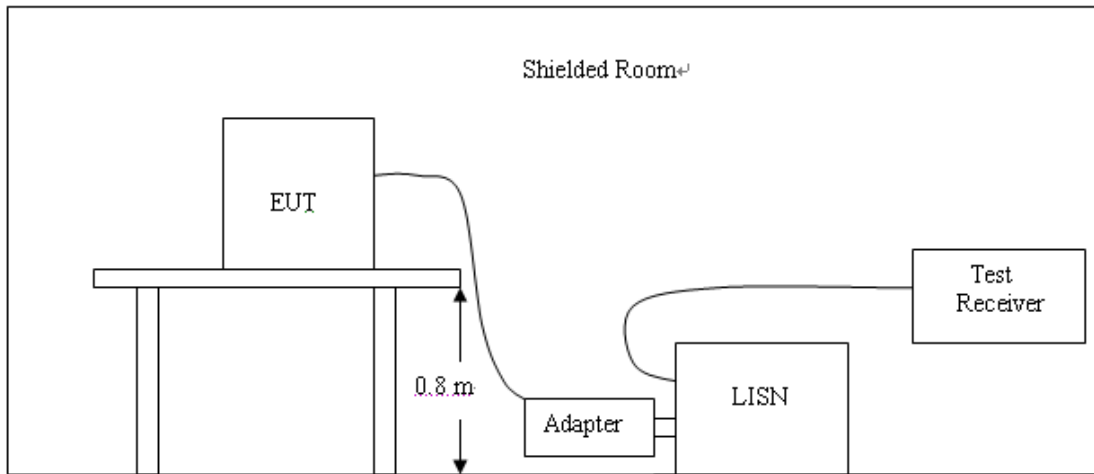

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. The EUT received DC12V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The AC Power Conducted Emission measurement is performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test modes and channels.

L:


100.0 dBuV

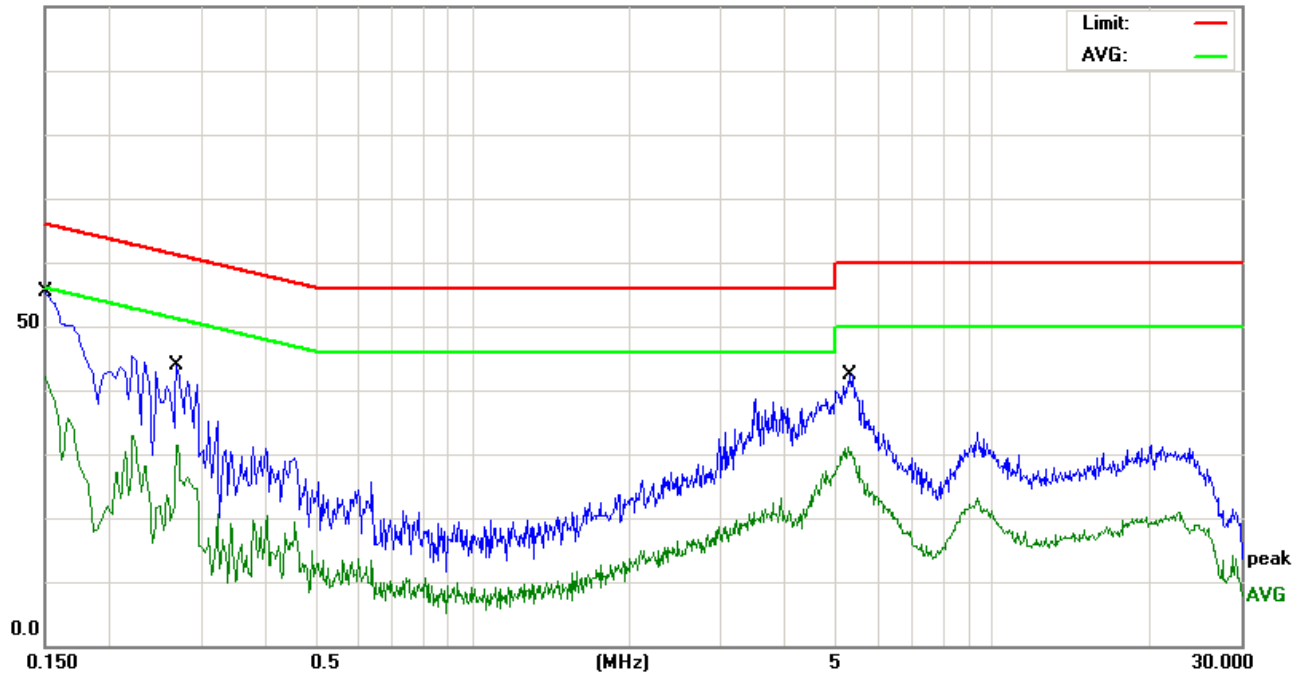

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1500	43.41	11.94	55.35	65.99	-10.64	QP
2		0.1500	30.29	11.94	42.23	55.99	-13.76	AVG
3		0.2700	33.05	10.83	43.88	61.12	-17.24	QP
4		0.2700	20.63	10.83	31.46	51.12	-19.66	AVG
5		5.2700	20.99	10.12	31.11	50.00	-18.89	AVG
6		5.2940	32.37	10.12	42.49	60.00	-17.51	QP

N:




100.0 dBuV

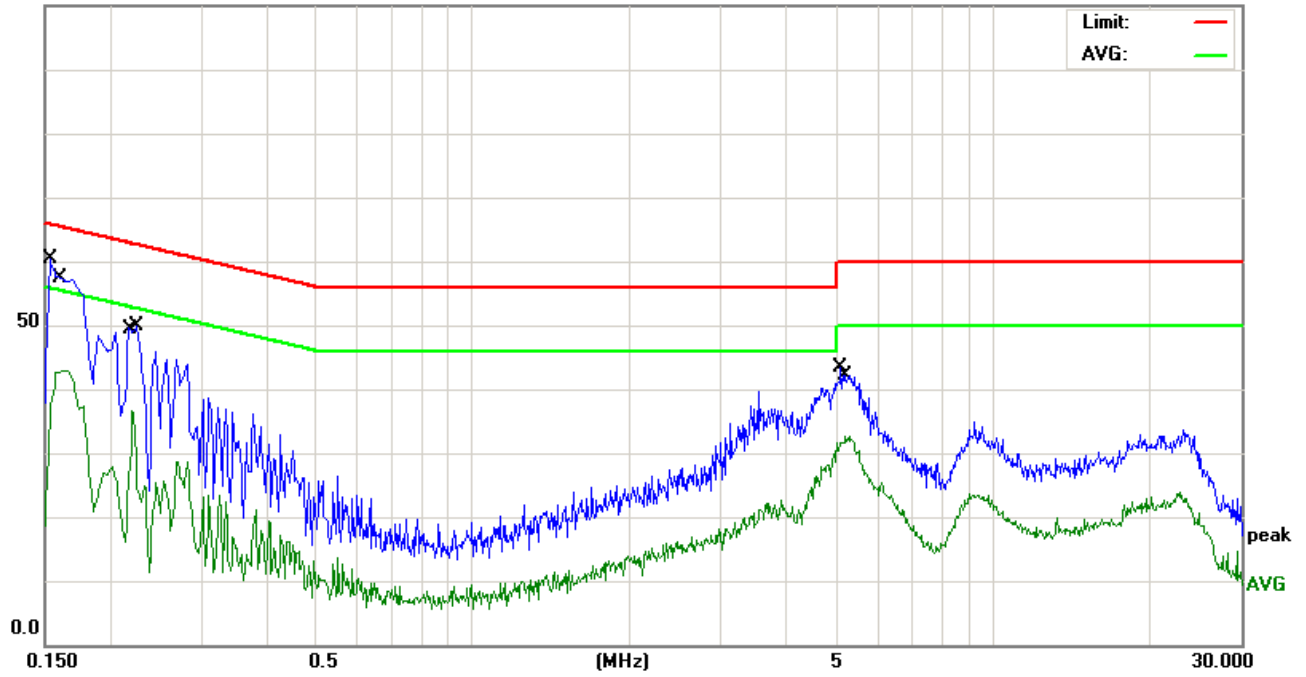

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	48.61	11.84	60.45	65.78	-5.33	QP
2		0.1620	31.12	11.68	42.80	55.36	-12.56	AVG
3		0.2220	25.54	10.98	36.52	52.74	-16.22	AVG
4		0.2260	38.95	10.96	49.91	62.59	-12.68	QP
5		5.0939	33.27	10.11	43.38	60.00	-16.62	QP
6		5.2100	22.63	10.11	32.74	50.00	-17.26	AVG

4.2 Radiated Emission

TEST CONFIGURATION

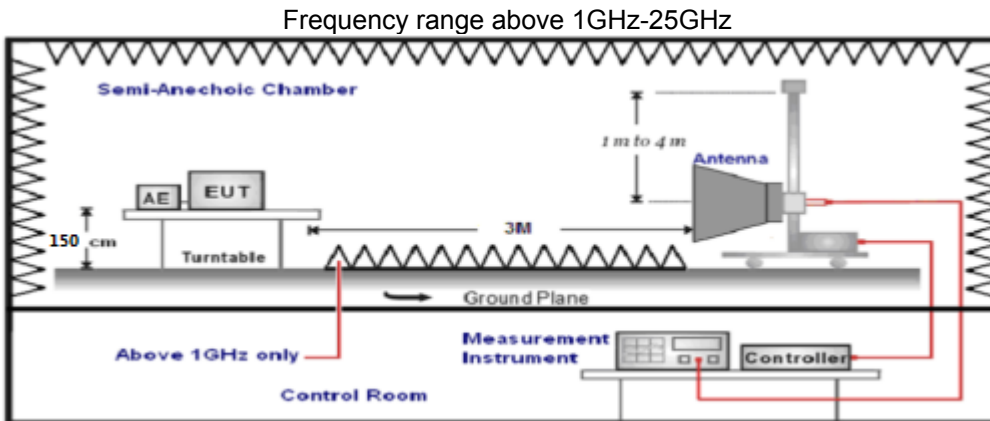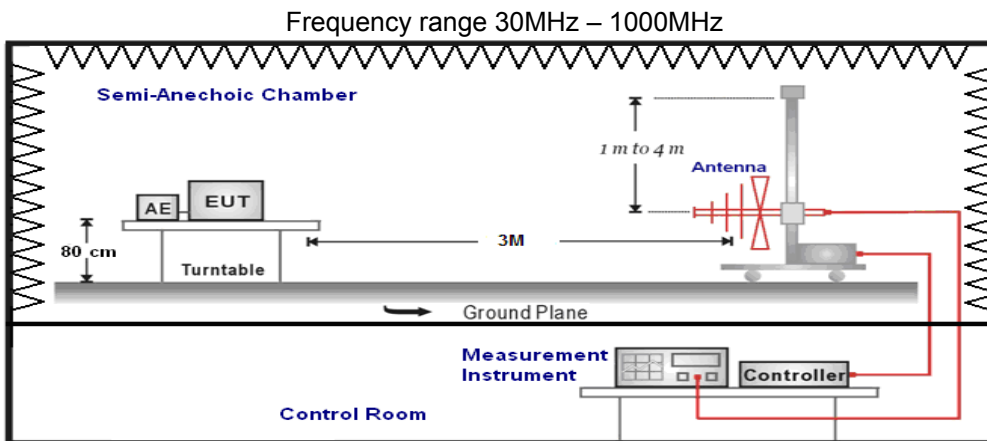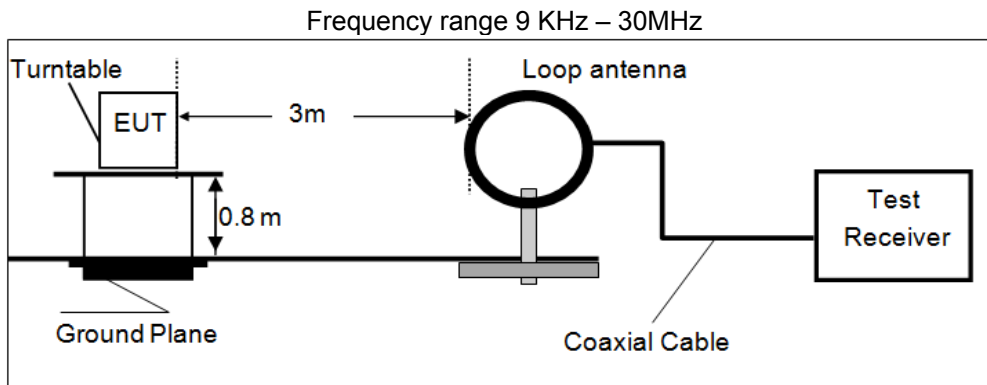

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz and 1.50m above ground plane for above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak
	Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

More procedre as follows;

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45°) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	300	$20\log(2400/F(\text{KHz}))+80$	$2400/F(\text{KHz})$
0.49-1.705	30	$20\log(24000/F(\text{KHz}))+40$	$24000/F(\text{KHz})$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ons, recorded worst case at powered by adapter charging mode.
5. "---" means not recorded as emission levels lower than limit.
6. Margin= Limit - Level


For 9KHz to 30MHz

Frequency (MHz)	Corrected Reading (dB μ V/m)@3m	FCC Limit (dB μ V/m) @3m	Margin (dB)	Detector	Result
15.85	48.97	69.54	20.57	QP	PASS
25.79	46.46	69.54	23.08	QP	PASS

For 30MHz to 1000MHz

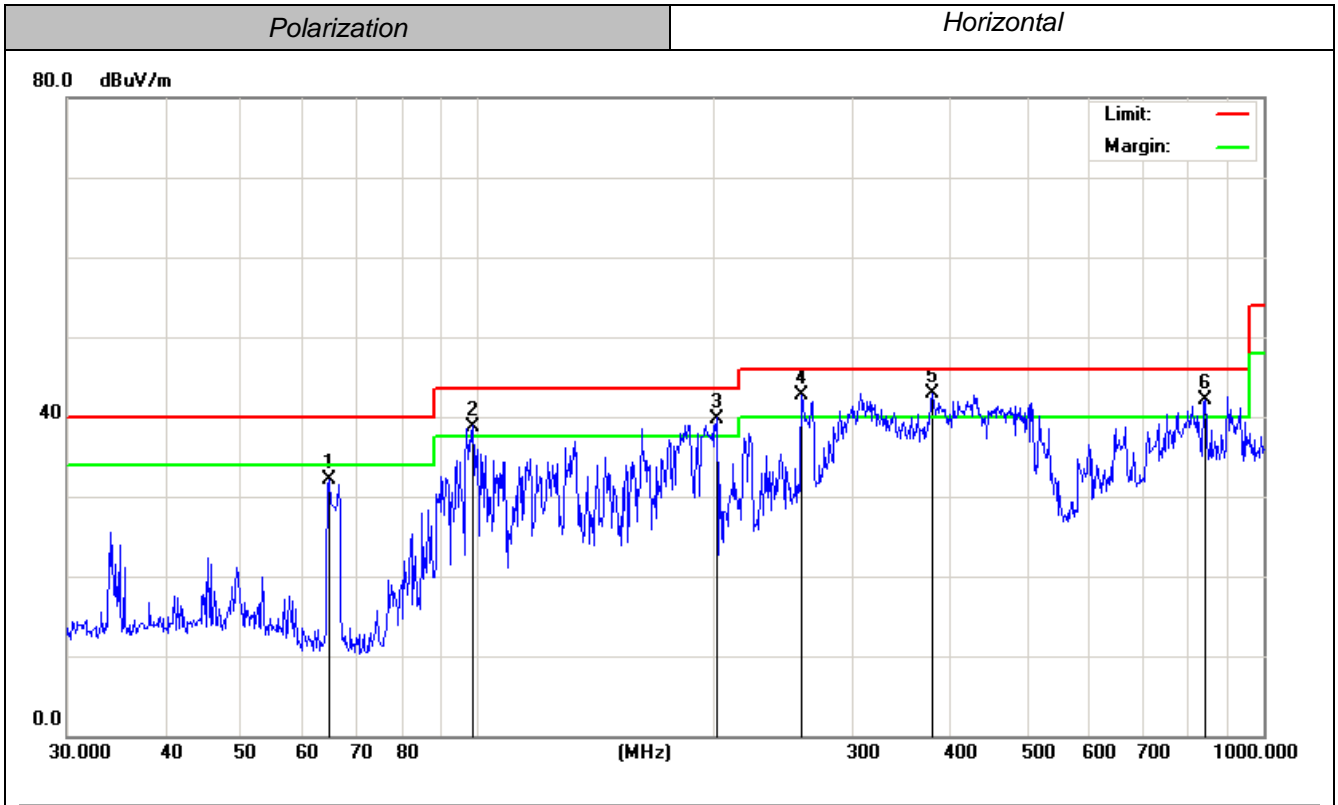

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		64.6594	49.51	-17.50	32.01	40.00	-7.99	peak
2	!	98.4865	54.97	-16.17	38.80	43.50	-4.70	peak
3	!	201.3930	56.71	-16.91	39.80	43.50	-3.70	peak
4	!	258.3264	55.73	-12.95	42.78	46.00	-3.22	peak
5	*	378.5842	50.44	-7.54	42.90	46.00	-3.10	peak
6	!	842.1295	41.07	1.10	42.17	46.00	-3.83	peak

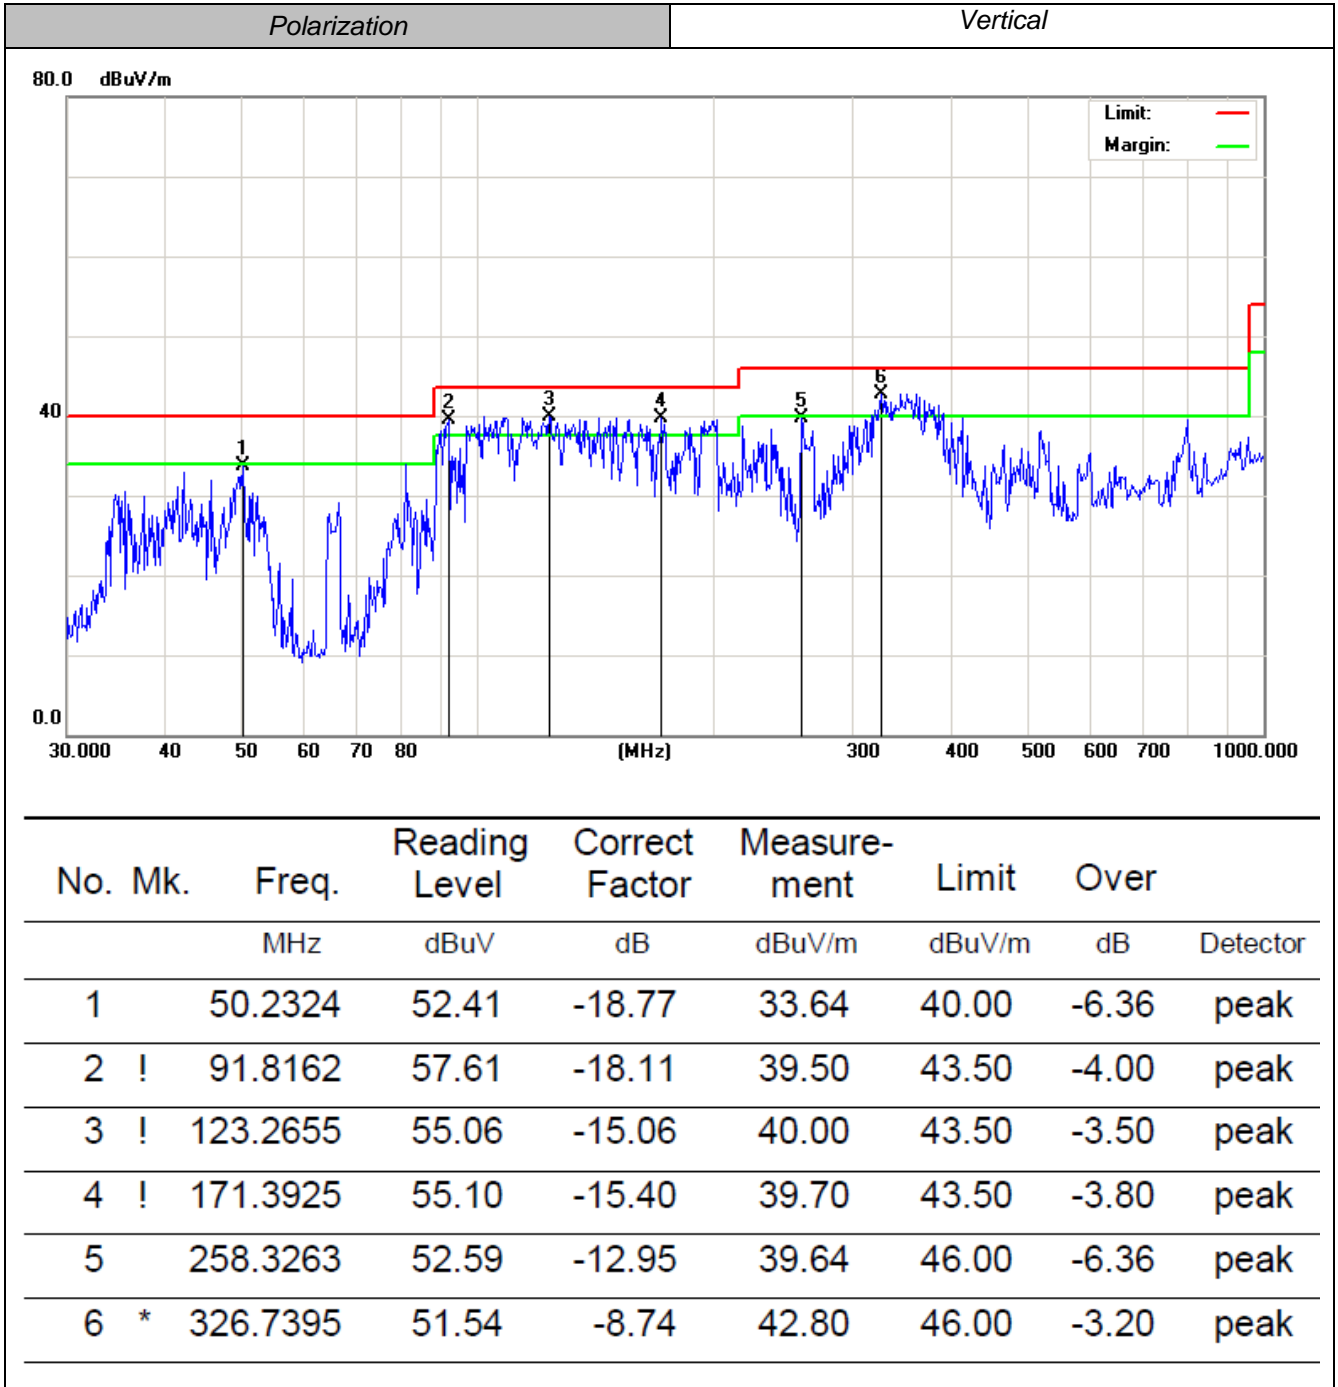

For 1GHz to 25GHz

Note: We tested IEEE 802.11b, IEEE 802.11g and IEEE 802.11n HT20 and recorded the worst case at the 11b Mode.

802.11b Mode (above 1GHz)

Frequency(MHz):				2412		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824.00	50.02	PK	74	23.98	45.47	33.52	6.92	35.89	4.55
1	4824.00	42.66	AV	54	11.34	38.11	33.52	6.92	35.89	4.55
2	5215.50	52.54	PK	74	21.46	45.14	34.56	7.15	34.31	7.40
2	5215.50	--	AV	54	--	--	--	--	--	--
3	7236.00	49.88	PK	74	24.12	38.61	37.10	9.19	35.02	11.27
3	7236.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2412		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4824.00	50.06	PK	74	23.94	45.51	33.52	6.92	35.89	4.55
1	4824.00	40.93	AV	54	13.07	36.38	33.52	6.92	35.89	4.55
2	5365.75	52.43	PK	74	21.57	44.85	34.71	7.24	34.36	7.58
2	5365.75	--	AV	54	--	--	--	--	--	--
3	7236.00	48.98	PK	74	25.02	37.71	37.10	9.19	35.02	11.27
3	7236.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW =1MHz VBW=10Hz Peak detector is for AV value.

Frequency(MHz):				2437		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	47.74	PK	74	26.26	41.50	33.59	6.95	34.30	6.24
1	4874.00	39.54	AV	54	14.46	33.30	33.59	6.95	34.30	6.24
2	5375.75	45.55	PK	74	28.45	37.60	34.72	7.25	34.02	7.95
2	5375.75	--	AV	54	--	--	--	--	--	--
3	7311.00	52.93	PK	74	21.07	41.27	37.44	9.22	35.00	11.66
3	7311.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2437		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4874.00	50.59	PK	74	23.41	44.35	33.59	6.95	34.30	6.24
1	4874.00	40.83	AV	54	13.17	34.59	33.59	6.95	34.30	6.24
2	5215.75	45.82	PK	74	28.18	38.22	34.56	7.15	34.11	7.60
2	5215.75	--	AV	54	--	--	--	--	--	--
3	7311.00	53.91	PK	74	20.09	42.25	37.44	9.22	35.00	11.66
3	7311.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW =1MHz VBW=10Hz Peak detector is for AV value.

Frequency(MHz):				2462		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	50.04	PK	74	23.96	45.26	33.71	6.98	35.91	4.78
1	4924.00	42.53	AV	54	11.47	37.75	33.71	6.98	35.91	4.78
2	5175.75	51.01	PK	74	22.99	43.69	34.49	7.13	34.29	7.32
2	5175.75	--	AV	54	--	--	--	--	--	--
3	7386.00	51.21	PK	74	22.79	39.33	37.61	9.25	34.98	11.88
3	7386.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):				2462		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	4924.00	49.77	PK	74	24.23	44.99	33.71	6.98	35.91	4.78
1	4924.00	41.52	AV	54	12.48	36.74	33.71	6.98	35.91	4.78
2	5211.50	48.89	PK	74	25.11	41.50	34.55	7.15	34.31	7.39
2	5211.50	--	AV	54	--	--	--	--	--	--
3	7386.00	50.95	PK	74	23.05	39.07	37.61	9.25	34.98	11.88
3	7386.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW=1MHz VBW=3MHz Peak detector is for PK value; RBW=1MHz VBW=10Hz Peak detector is for AV value.

4.3 Duty Cycle

TEST CONFIGURATION



LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).

TEST PROCEDURE


- a. A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal.
- b. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST RESULTS

The Manufacturer provide specific software to control WLAN work at 100% continuous transmit;

4.4 Maximum Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Meas Guidance v03:

PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power: As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

1. The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
2. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS


Test Mode	Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
IEEE 802.11 b	1	2412	18.32	30	PASS
	6	2437	18.55		
	11	2462	18.68		
IEEE 802.11 g	1	2412	20.05	30	PASS
	6	2437	20.18		
	11	2462	20.10		
IEEE 802.11 n HT20	1	2412	19.71	30	PASS
	6	2437	20.02		
	11	2462	20.19		

Remark:

1. Measured output power at difference data rate for each mode and recorded woest case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;

4.5 Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) this procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3KHz)	Limits (dBm/3KHz)	Verdict
IEEE 802.11 b	1	2412	-7.110	8	PASS
	6	2437	-7.697		
	11	2462	-6.300		
IEEE 802.11 g	1	2412	-11.202	8	PASS
	6	2437	-12.089		
	11	2462	-12.314		
IEEE 802.11 n HT20	1	2412	-13.305	8	PASS
	6	2437	-12.052		
	11	2462	-13.477		

Remark:


1. Measured output power at difference data rate for each mode and recorded woest case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;;
4. please refer to following plots;

Peak Power Spectral Density

IEEE 802.11 b



IEEE 802.11 g

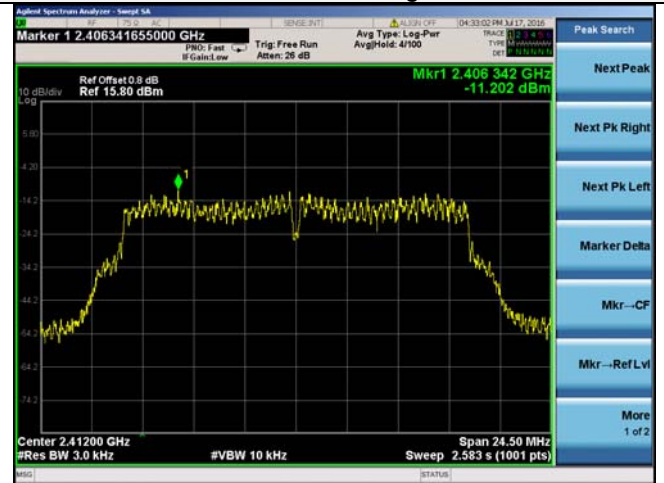

2412 MHz



2412 MHz



2437 MHz




2437 MHz




2462 MHz

2462 MHz


Peak Power Spectral Density
IEEE 802.11 n HT20

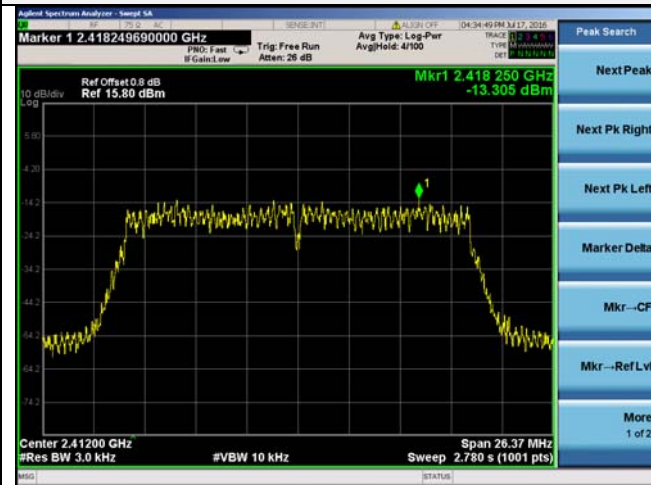

2412 MHz

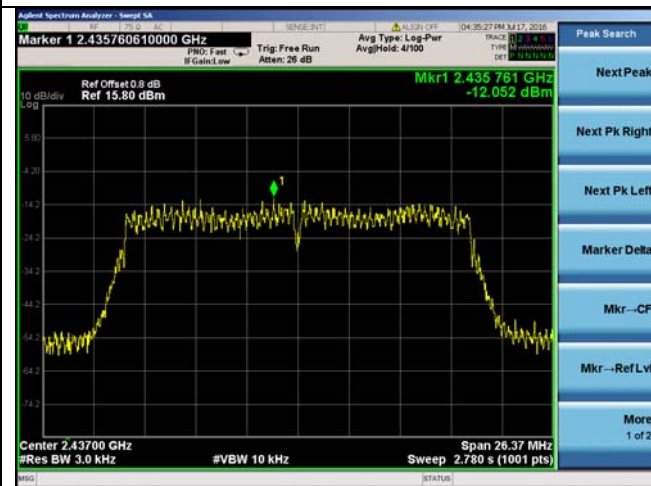


2437 MHz

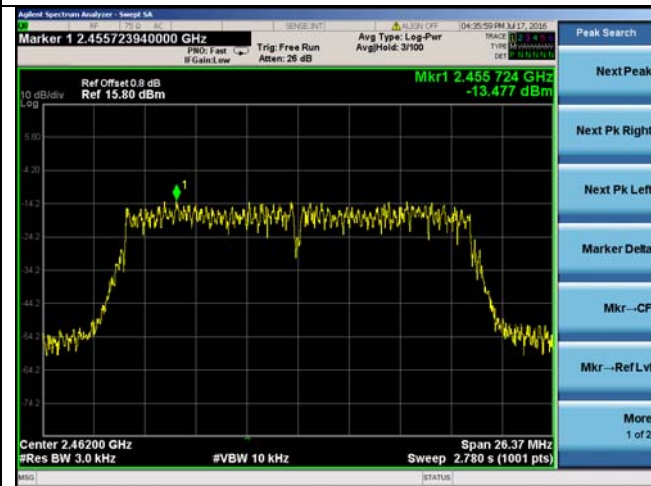

2462 MHz

4.6 Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBW= 300 KHz to measure the peak field strength, and measure frequency range from 9 KHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
IEEE 802.11 b	1	2412	<-20dBc	-20	PASS
	6	2437	<-20dBc	-20	
	11	2462	<-20dBc	-20	
IEEE 802.11 g	1	2412	<-20dBc	-20	PASS
	6	2437	<-20dBc	-20	
	11	2462	<-20dBc	-20	
IEEE 802.11 n HT20	1	2412	<-20dBc	-20	PASS
	6	2437	<-20dBc	-20	
	11	2462	<-20dBc	-20	

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;
4. "----" means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;


Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 b

2412 MHz




2412 MHz

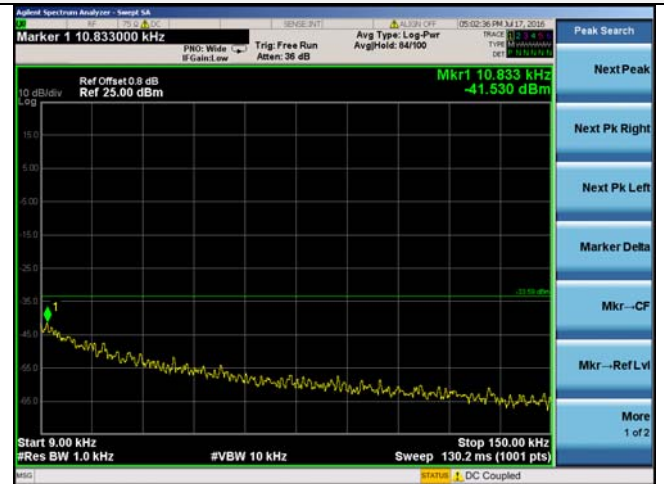

9 KHz - 150 KHz



150 KHz - 30 MHz

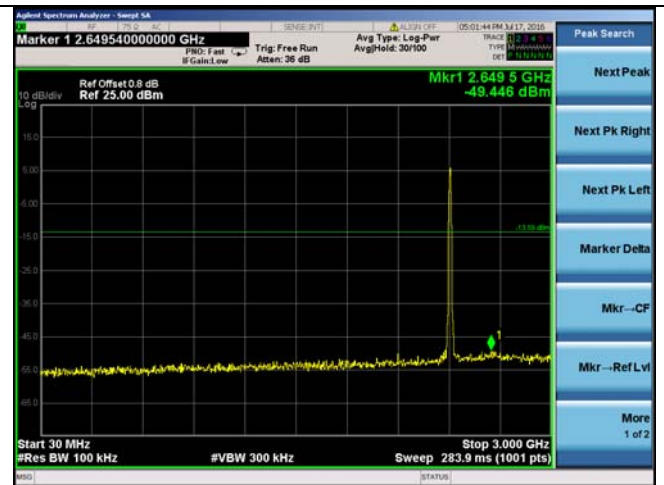

30MHz - 1GHz



1GHz - 25GHz

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 b

2437 MHz




2437 MHz



9 KHz – 150 KHz



150 KHz – 30 MHz

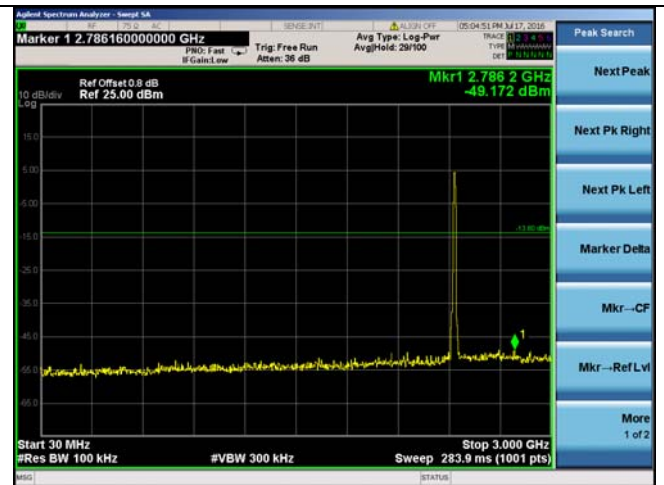

30MHz – 1GHz



1GHz – 25GHz

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 b

2462 MHz




2462 MHz



9 KHz – 150 KHz



150 KHz – 30 MHz

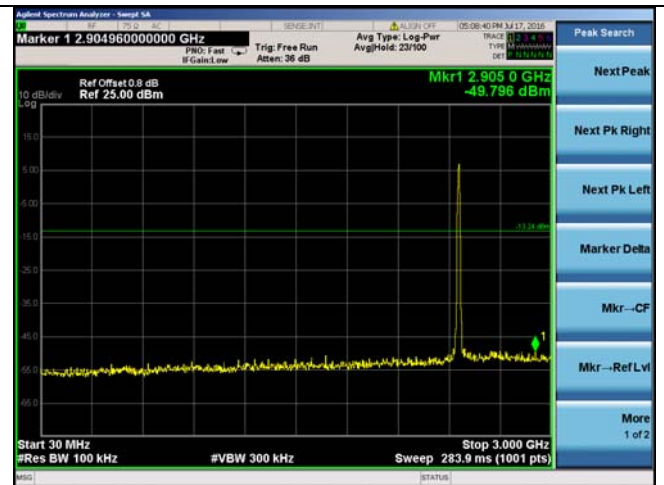

30MHz – 1GHz



1GHz – 25GHz



Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 g

2412 MHz




2412 MHz



9 KHz - 150 KHz



150 KHz - 30 MHz

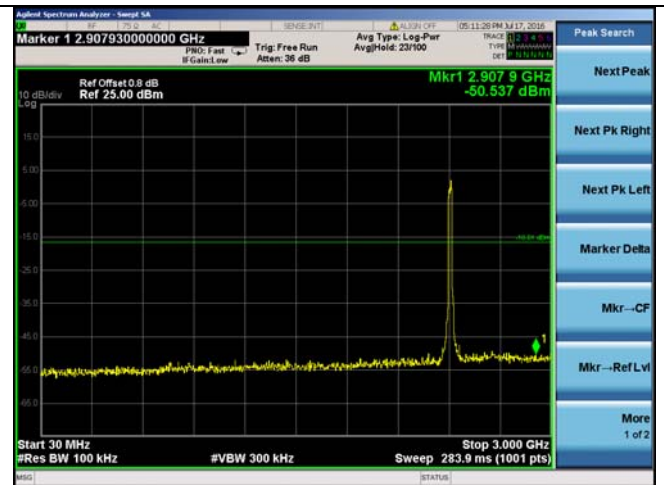

30MHz - 1GHz



1GHz - 25GHz

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 g


2437 MHz




2437 MHz



9 KHz – 150 KHz

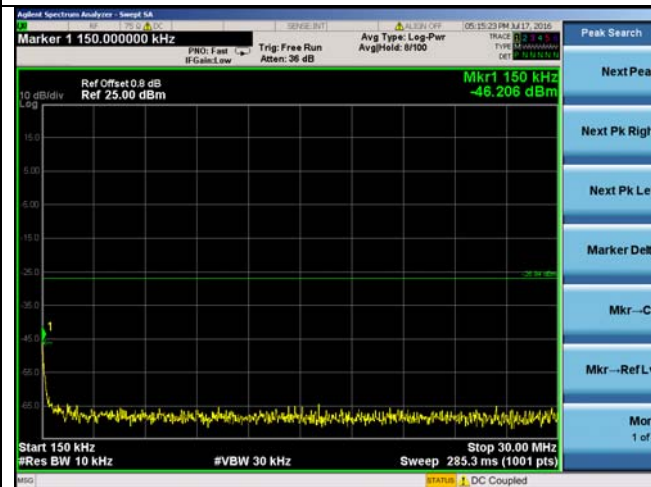

150 KHz – 30 MHz

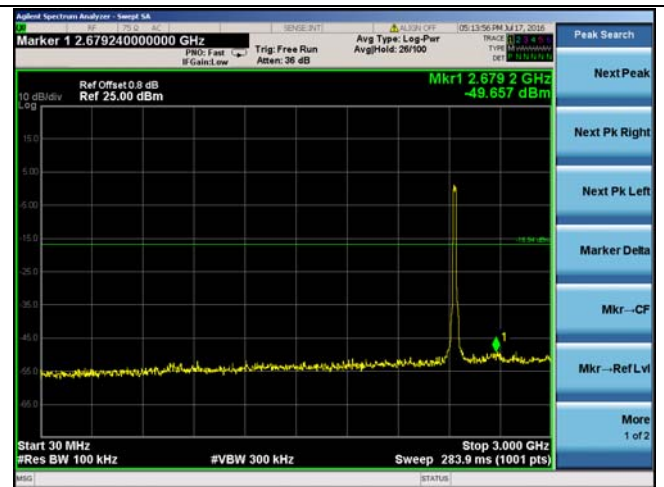

30MHz – 1GHz



1GHz – 25GHz


Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 g

2462 MHz




2462 MHz

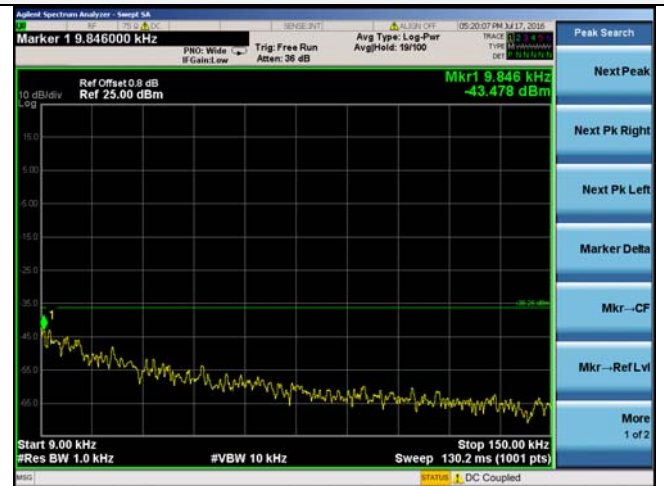

9 KHz - 150 KHz




150 KHz - 30 MHz

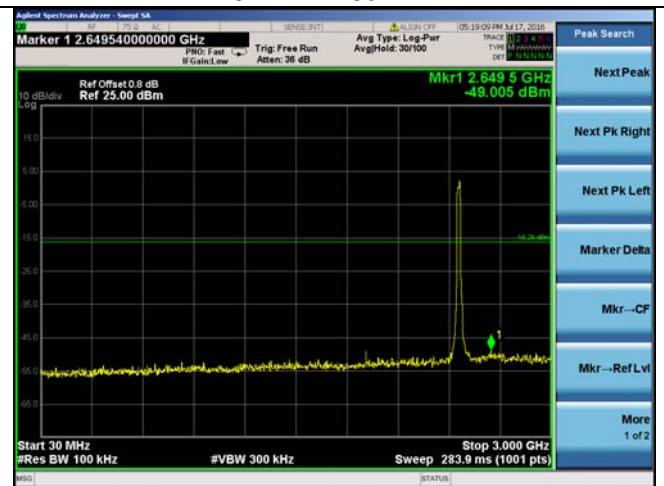

30MHz - 1GHz




1GHz - 25GHz



Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 n HT20

2412 MHz

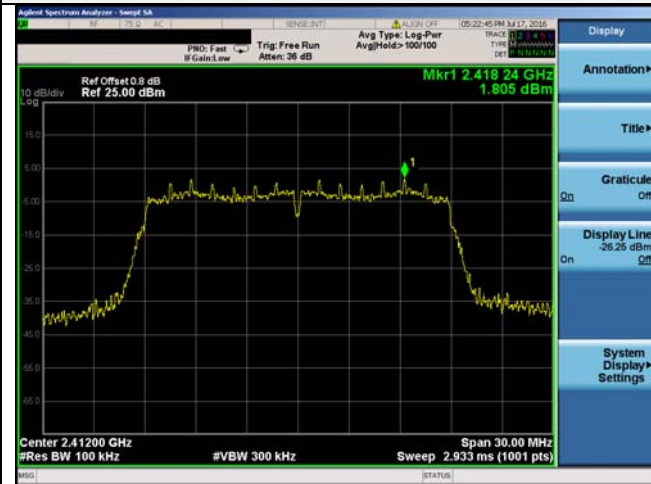


2412 MHz



9 KHz – 150 KHz



150 KHz – 30 MHz

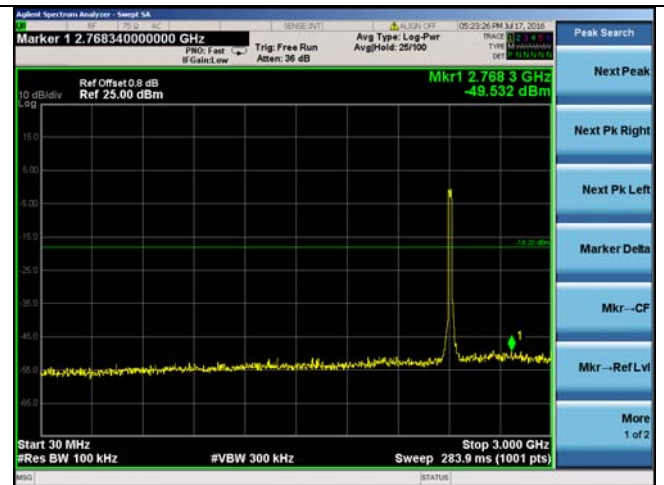

30MHz – 1GHz



1GHz – 25GHz


Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 n HT20

2437 MHz




2412 MHz

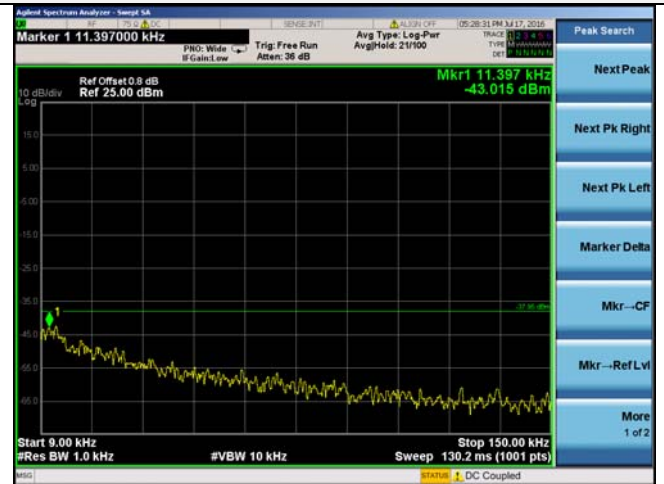

9 KHz – 150 KHz



150 KHz – 30 MHz

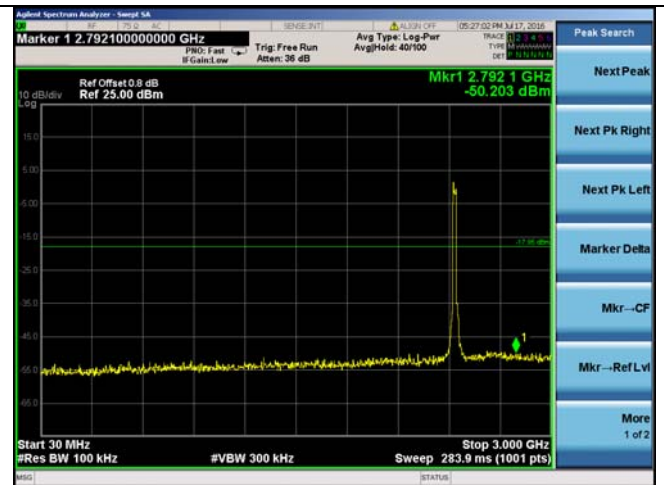

30MHz – 1GHz



1GHz – 25GHz

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 n HT20


2462 MHz




2412 MHz



9 KHz – 150 KHz

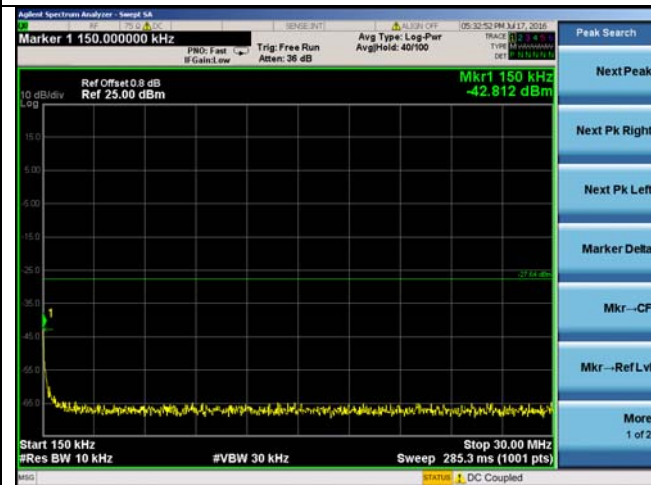

150 KHz – 30 MHz

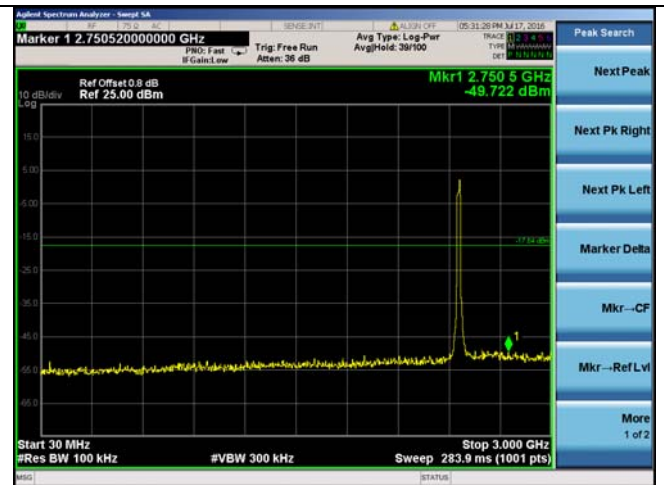


30MHz – 1GHz



1GHz – 25GHz

4.7 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Limits (MHz)	Verdict
IEEE 802.11 b	1	2412	8.547	≥ 0.5000	PASS
	6	2437	8.058		
	11	2462	9.008		
IEEE 802.11 g	1	2412	16.33	≥ 0.5000	PASS
	6	2437	16.33		
	11	2462	16.28		
IEEE 802.11 n HT20	1	2412	17.58	≥ 0.5000	PASS
	6	2437	17.52		
	11	2462	17.56		


Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;
4. please refer to following plots;

6 dB Bandwidth

IEEE 802.11 b

IEEE 802.11 g

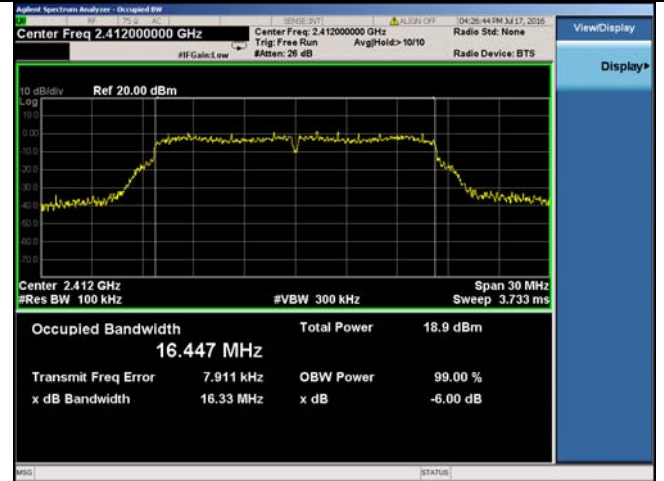

2412 MHz

2412 MHz



2437 MHz

2437 MHz




2462 MHz

2462 MHz

6 dB Bandwidth
IEEE 802.11 n HT20



2412 MHz

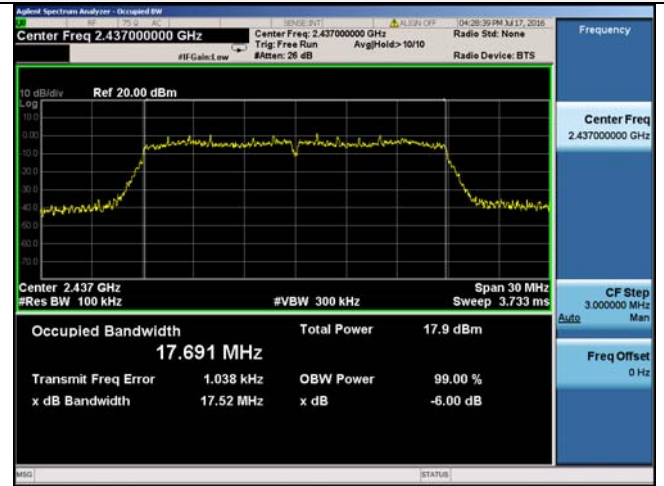

2437 MHz



2462 MHz




4.8 Band-edge Measurements for Radiated Emissions

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies \leq 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

IEEE 802.11 b							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2390.000	-41.847	2.541	0.00	55.952	Peak	74.00	PASS
2390.000	-53.399	2.541	0.00	44.400	AV	54.00	PASS
2483.500	-41.316	2.541	0.00	56.483	Peak	74.00	PASS
2483.500	-52.773	2.541	0.00	45.026	AV	54.00	PASS
IEEE 802.11 g							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2390.000	-27.296	2.541	0.00	70.503	Peak	74.00	PASS
2390.000	-46.441	2.541	0.00	51.358	AV	54.00	PASS
2483.500	-26.128	2.541	0.00	71.671	Peak	74.00	PASS
2483.500	-43.332	2.541	0.00	54.467	AV	54.00	PASS
IEEE 802.11 n HT20							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2390.000	-31.723	2.541	0.00	66.076	Peak	74.00	PASS
2390.000	-48.272	2.541	0.00	49.527	AV	54.00	PASS
2483.500	-26.828	2.541	0.00	70.971	Peak	74.00	PASS
2483.500	-44.749	2.541	0.00	53.050	AV	54.00	PASS



Remark:

1. Measured output power at difference data rate for each mode and recorded woest case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;
4. "---" means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;

Band-edge Measurements for Radiated Emissions

IEEE 802.11 b

IEEE 802.11 g

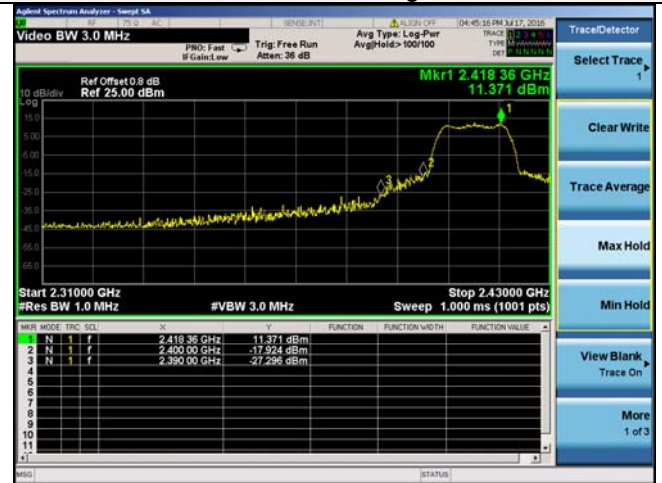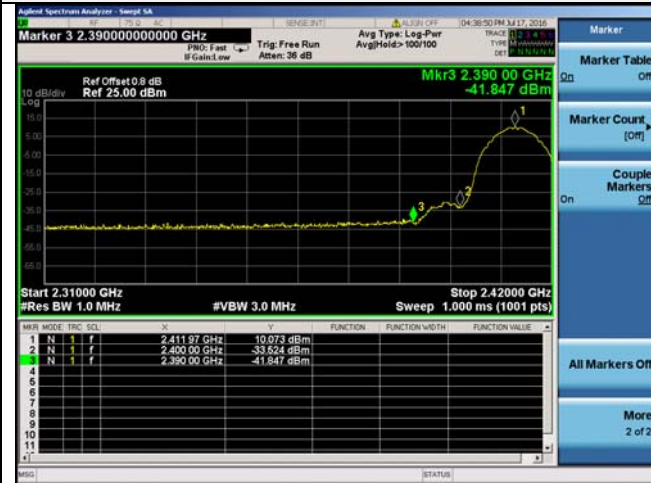

2412 MHz – Peak

2412 MHz – Peak



2412 MHz – Average

2412 MHz – Average

Band-edge Measurements for Radiated Emissions

IEEE 802.11 b

IEEE 802.11 g



2462 MHz – Peak

2462 MHz – Peak




2462 MHz – Average

2462 MHz – Average

Band-edge Measurements for Radiated Emissions

IEEE 802.11 n HT20

IEEE 802.11 n HT20

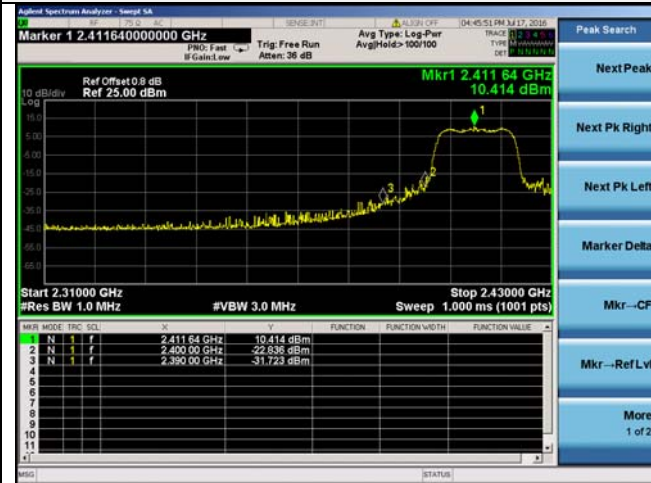

2412 MHz – Peak

2462 MHz – Peak



2412 MHz – Average


2462 MHz – Average

4.9 Band-edge Measurements for RF Conducted Emissions

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge,
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

TEST RESULTS

Test Mode	Channel	Frequency (MHz)	Conductd Band-edge Emission (dBc)	Limits (dBc)	Verdict
IEEE 802.11 b	1	2412	<-20dBc	-20	PASS
	11	2462	<-20dBc	-20	
IEEE 802.11 g	1	2412	<-20dBc	-20	PASS
	11	2462	<-20dBc	-20	
IEEE 802.11 n HT20	1	2412	<-20dBc	-20	PASS
	11	2462	<-20dBc	-20	


Remark:

1. Measured output power at difference data rate for each mode and recorded woest case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11 b; 6Mbps at IEEE 802.11 g; 6.5Mbps at IEEE 802.11 n HT20;
4. “---“ means that the fundamental frequency not for 15.209 limits requirement.
5. please refer to following plots;

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 b

IEEE 802.11 g

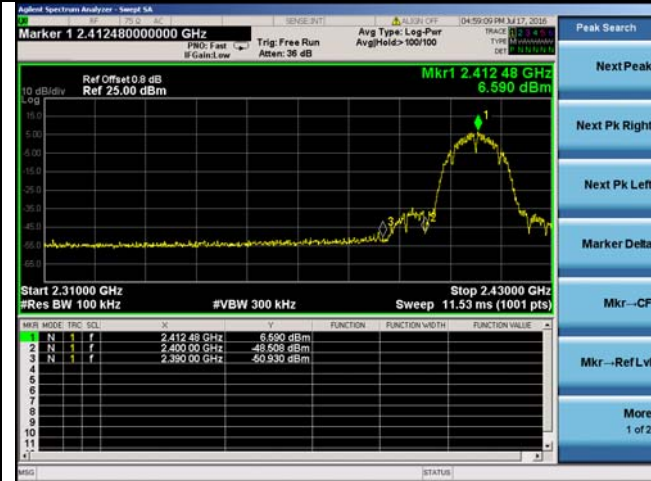

2412 MHz

2412 MHz



2462 MHz


2462 MHz

Band-edge Measurements for RF Conducted Emissions

IEEE 802.11 n HT20



2412 MHz

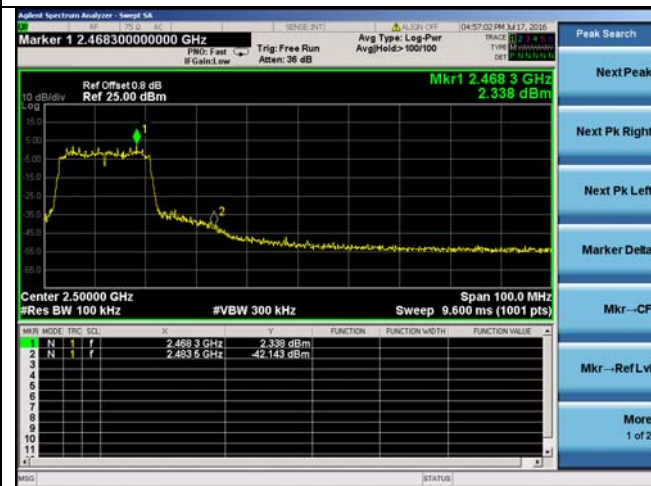

2462 MHz

4.10 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Conducted power refer ANSI C63.10 :2013 Section 11.9 Output power test procedure for DTS devices

Radiated power refer to ANSI C63.10 :2013 Section 6.6.4 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Results

T _{nom}	V _{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		10.321	10.559	10.685
Radiated power [dBm] Measured with DSSS modulation		10.748	12.771	11.925
Gain [dBi] Calculated		0.427	2.212	1.240
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....