



Neutron Engineering Inc.

# Radio Test Report

**FCC ID: H8GG11570HX1**

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

**Issued Date** : May 21, 2013  
**Project No.** : 1204123B  
**Equipment** : 2.4G RF Mouse  
**Model Name** : G11-570HX; G11-570HX-1; G11-570HX-2;  
G11-570HX-3; G11-570HX-4  
**Applicant** : A-FOUR TECH CO., LTD.  
**Address** : 6F, No. 108, Min-Chuan Rd., Xindian Dist.,  
New Taipei City, Taiwan R.O.C.

**Tested by:** Neutron Engineering Inc. EMC Laboratory  
**Date of Receipt:** Apr. 25, 2013  
**Date of Test:** Apr. 25, 2013 ~ May 06, 2013

**Testing Engineer:**

Josh Lin  
(Josh Lin)

**Technical Manager:**

Jeff Yang  
(Jeff Yang)

**Authorized Signatory:**

Andy Chiu  
(Andy Chiu)

**Neutron Engineering Inc.**  
B1, No. 37, Lane 365, YangGuang St.,  
NeiHu District 114, Taipei, Taiwan.  
TEL: +886-2-2657-3299  
FAX: +886-2-2657-3331





### **Declaration**

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

**Neutron's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



## **Table of Contents**

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	10
3 GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 DESCRIPTION OF TEST MODES	12
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.4 DESCRIPTION OF SUPPORT UNITS	14
4 CONDUCTED EMISSION	15
4.1 LIMIT	15
4.2 MEASUREMENT INSTRUMENTS LIST	15
4.3 TEST PROCEDURES	16
4.4 TEST SETUP LAYOUT	16
4.5 DEVIATION FROM TEST STANDARD	16
4.6 EUT OPERATING CONDITIONS	17
4.7 TEST RESULTS	18
5 ANTENNA CONDUCTED SPURIOUS EMISSION	20
5.1 LIMIT	20
5.2 MEASUREMENT INSTRUMENTS LIST	20
5.3 TEST PROCEDURES	20
5.4 TEST SETUP LAYOUT	20
5.5 DEVIATION FROM TEST STANDARD	20
5.6 EUT OPERATING CONDITIONS	20
5.7 TEST RESULTS	21
6 6 DB BANDWIDTH	25
6.1 LIMIT	25
6.2 MEASUREMENT INSTRUMENTS LIST	25
6.3 TEST PROCEDURES	25
6.4 TEST SETUP LAYOUT	25
6.5 DEVIATION FROM TEST STANDARD	25
6.6 EUT OPERATING CONDITIONS	25
6.7 TEST RESULTS	26
7 MAXIMUM PEAK CONDUCTED OUTPUT POWER	28
7.1 LIMIT	28
7.2 MEASUREMENT INSTRUMENTS LIST	28
7.3 TEST PROCEDURES	28



## **Table of Contents**

7.4	TEST SETUP LAYOUT	28
7.5	DEVIATION FROM TEST STANDARD	28
7.6	EUT OPERATING CONDITIONS	28
7.7	TEST RESULTS	29
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	30
8.1	LIMIT	30
8.2	MEASUREMENT INSTRUMENTS LIST	31
8.3	MEASURING INSTRUMENTS SETTING	31
8.4	TEST PROCEDURES	32
8.5	DEVIATION FROM TEST STANDARD	32
8.6	TEST SETUP LAYOUT	32
8.7	EUT OPERATING CONDITIONS	33
8.8	TEST RESULTS	34
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	36
9.1	LIMIT	36
9.2	MEASUREMENT INSTRUMENTS LIST	37
9.3	MEASURING INSTRUMENTS SETTING	37
9.4	TEST PROCEDURES	38
9.5	DEVIATION FROM TEST STANDARD	38
9.6	TEST SETUP LAYOUT	38
9.7	EUT OPERATING CONDITIONS	39
9.8	TEST RESULTS	40
9.9	TEST RESULTS (RESTRICTED BANDS)	52
10	POWER SPECTRAL DENSITY	56
10.1	LIMIT	56
10.2	MEASUREMENT INSTRUMENTS LIST	56
10.3	TEST PROCEDURES	56
10.4	TEST SETUP LAYOUT	56
10.5	DEVIATION FROM TEST STANDARD	56
10.6	EUT OPERATING CONDITIONS	56
10.7	TEST RESULTS	57
11	RF EXPOSURE COMPLIANCE	59
11.1	LIMIT	59
11.2	MEASUREMENT INSTRUMENTS LIST	59
11.3	MPE CALCULATION METHOD	59
11.4	TEST SETUP LAYOUT	60
11.5	DEVIATION FROM TEST STANDARD	60
11.6	EUT OPERATING CONDITIONS	60



## Table of Contents

11.7	TEST RESULTS	61
12	EUT TEST PHOTO	62



**REPORT ISSUED HISTORY**

Revised Version No.	Description	Issued Date
-	Initial Issue.	May 21, 2013



## **1 CERTIFICATION**

Equipment : 2.4G RF Mouse

Brand Name : A4TECH

Model Name : G11-570HX; G11-570HX-1; G11-570HX-2; G11-570HX-3; G11-570HX-4

Applicant : A-FOUR TECH CO., LTD.

Date of Test : Apr. 25, 2013 ~ May 06, 2013

Standards : RSS-210, Issue 8, 2010

FCC Part 15, Subpart C: 2012

ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1204123B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

<b>FCC Part 15, Subpart C: 2012</b>		
<b>Standard Clause</b>	<b>Test Item</b>	<b>Result</b>
15.207	Conducted Emission	<b>PASS</b>
15.247 (c)	Antenna conducted Spurious Emission	<b>PASS</b>
15.247 (a)(2)	6 dB Bandwidth	<b>PASS</b>
15.247 (b)	Maximum Peak Conducted Output Power	<b>PASS</b>
15.247 (c)	Radiated Spurious Emission	<b>PASS</b>
15.247 (d)(e)	Power Spectral Density	<b>PASS</b>
15.205	Restricted Bands	<b>PASS</b>
15.203	Antenna Requirement	<b>PASS</b>
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	<b>PASS</b>

**NOTE:**

- (1) N/A: denotes test is not applicable in this Test Report
- (2) Portable device; SAR report is required.





## **2.1 TEST FACILITY**

The test facilities used to collect the test data in this report:

### **Conducted emission Test:**

**C02:** (VCCI RN: C-3477; FCC RN: 614388; FCC DN: TW1054)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### **Radiated emission Test (Below 1 GHz):**

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### **Radiated emission Test (Above 1 GHz):**

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)



## 2.2 MEASUREMENT UNCERTAINTY

**The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.**

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

### A. Conducted emission test:

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

### B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
	Vertical Polarization		30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .

If  $U_{lab}$  is less than or equal to  $U_{CISPR}$ , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{CISPR}$ , then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{CISPR})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{CISPR})$ , exceeds the disturbance limit.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G RF Mouse	
Brand Name	A4TECH	
Model Name	G11-570HX; G11-570HX-1; G11-570HX-2; G11-570HX-3; G11-570HX-4	
OEM Brand/Model Name	N/A	
Model Difference	Models' differences between each other only the changes of model name which do not affect the EMI performance. Model G11-570HX was used for final testing and collecting test data included in this report.	
Product Description	The EUT is a 2.4G RF Mouse.	
	Operation Frequency	2407 MHz ~2473 MHz
	Modulation Type	GFSK
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
	Maximum Peak Conducted Output Power:	-3.27 dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	1. Supplied from USB DC Source. 2. Battery supplied.	
Power Rating	1. I/P: DC 5V 2. I/P: DC 3.7V, 300mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2407	06	2430	11	2456
02	2411	07	2434	12	2460
03	2415	08	2437	13	2468
04	2422	09	2445	14	2473
05	2426	10	2451		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Ant. On PCB	N/A	1.93



### 3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel	Note
Conducted Emission	GFSK	2 Mbps	08	
Antenna conducted Spurious Emission	GFSK	2 Mbps	01/08/14	
6 dB Bandwidth	GFSK	2 Mbps	01/08/14	
Maximum Peak Conducted Output Power	GFSK	2 Mbps	01/08/14	
Radiated Spurious Emission (30 MHz to 1 GHz)	GFSK	2 Mbps	08	
Radiated Spurious Emission (above 1 GHz)	GFSK	2 Mbps	01/08/14	
Restricted Bands	GFSK	2 Mbps	01/08/14	
Antenna Requirement	-----	-----	-----	
RF Exposure Compliance	-----	-----	-----	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

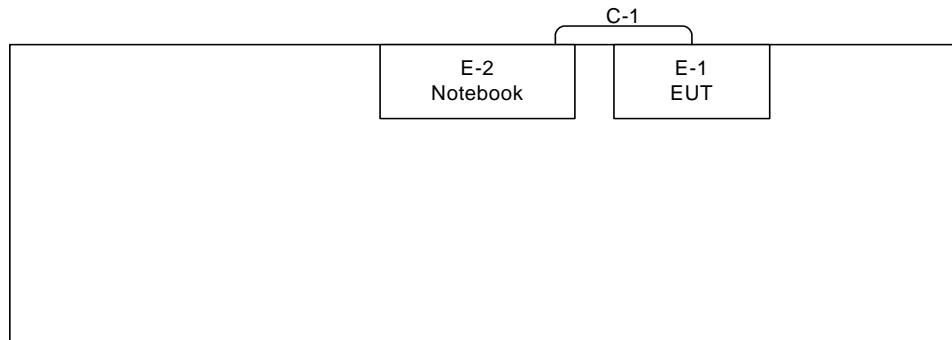

C-1 USB Cable



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	2.4G RF Mouse	A4TECH	G11-570HX	H8GG11570HX1	N/A	EUT
E-2	Notebook PC	DELL	D620	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5m	

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



## 4 CONDUCTED EMISSION

### 4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

**NOTE:**

1. The tighter limit applies at the band edges.
2. The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value

### 4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101084	Oct. 05, 2013
2	Test Cable	TIMES	CFD300-NL	130	Jun. 14, 2013
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Feb. 24, 2014
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

**NOTE:** **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.




#### 4.3 TEST PROCEDURES

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

**NOTE:**

- Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

#### 4.4 TEST SETUP LAYOUT

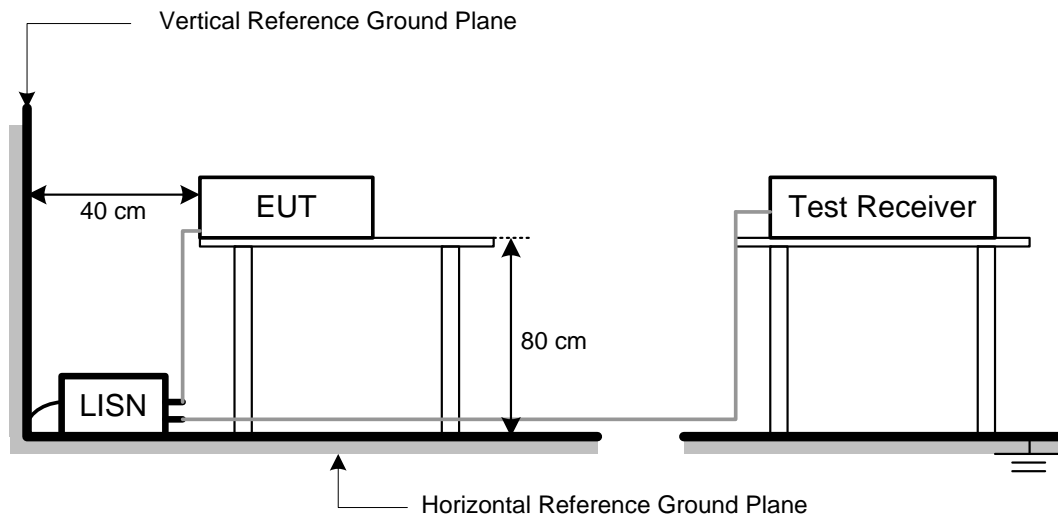

#### 4.5 DEVIATION FROM TEST STANDARD

No deviation






#### **4.6 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



#### 4.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

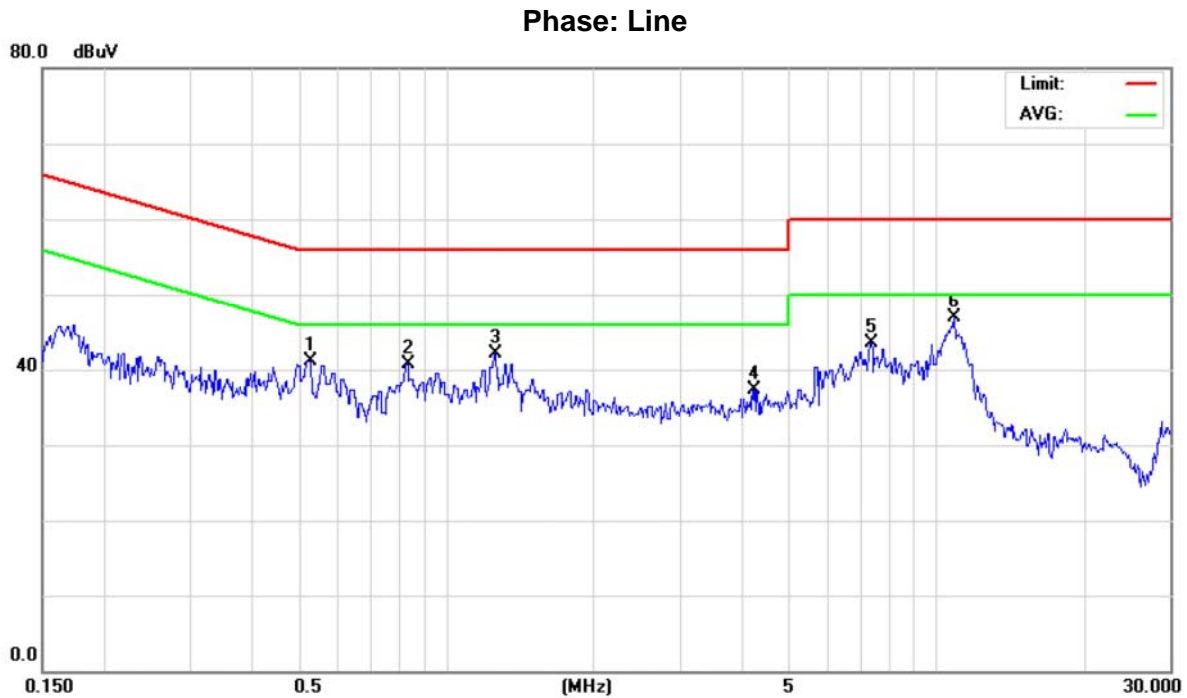


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.5270	31.56	9.62	41.18	56.00	-14.82	peak	
2		0.8330	31.07	9.61	40.68	56.00	-15.32	peak	
3		1.2559	32.46	9.62	42.08	56.00	-13.92	peak	
4		4.2260	27.71	9.68	37.39	56.00	-18.61	peak	
5		7.3500	33.73	9.75	43.48	60.00	-16.52	peak	
6	*	10.8500	37.03	9.81	46.84	60.00	-13.16	peak	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Phase: Neutral**

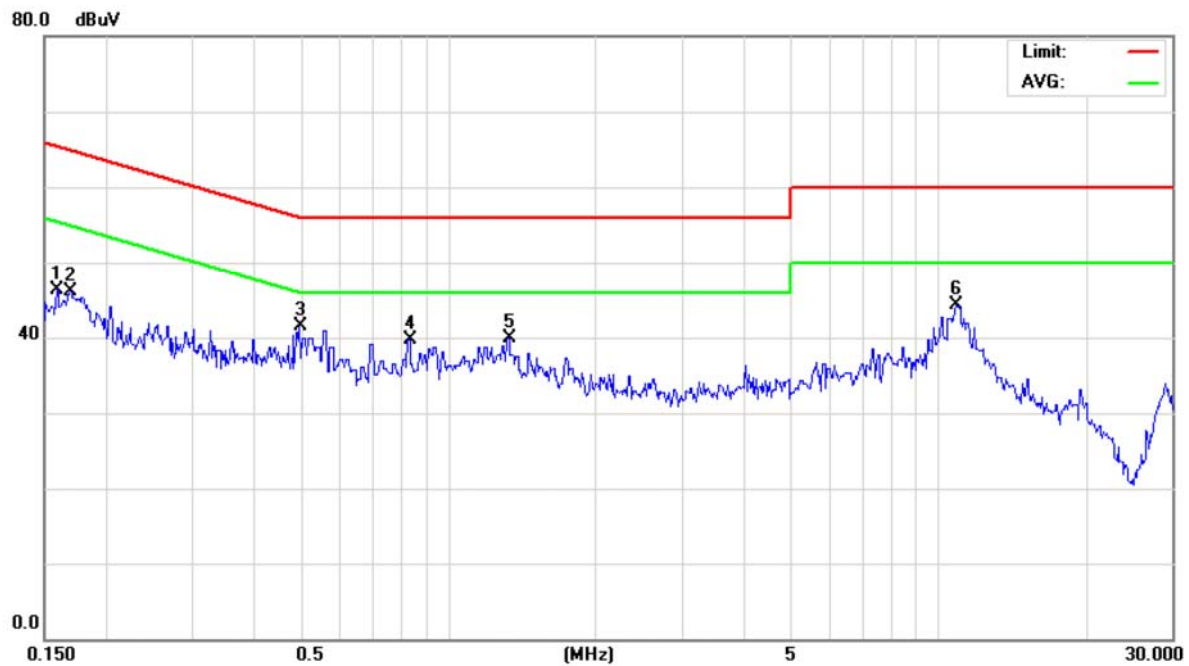

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1589	36.62	9.59	46.21	65.52	-19.31	peak	
2		0.1694	36.42	9.59	46.01	64.99	-18.98	peak	
3	*	0.4970	31.90	9.61	41.51	56.05	-14.54	peak	
4		0.8330	30.05	9.60	39.65	56.00	-16.35	peak	
5		1.3278	30.32	9.61	39.93	56.00	-16.07	peak	
6		10.8500	34.51	9.81	44.32	60.00	-15.68	peak	



## 5 ANTENNA CONDUCTED SPURIOUS EMISSION

### 5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

### 5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Mar. 21, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

### 5.4 TEST SETUP LAYOUT



### 5.5 DEVIATION FROM TEST STANDARD

No deviation

### 5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.7 TEST RESULTS**

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz/2473 MHz		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2391.00	-47.49	2489.00	-48.42
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



The max. radio frequency power in any 100kHz bandwidth outside the frequency band

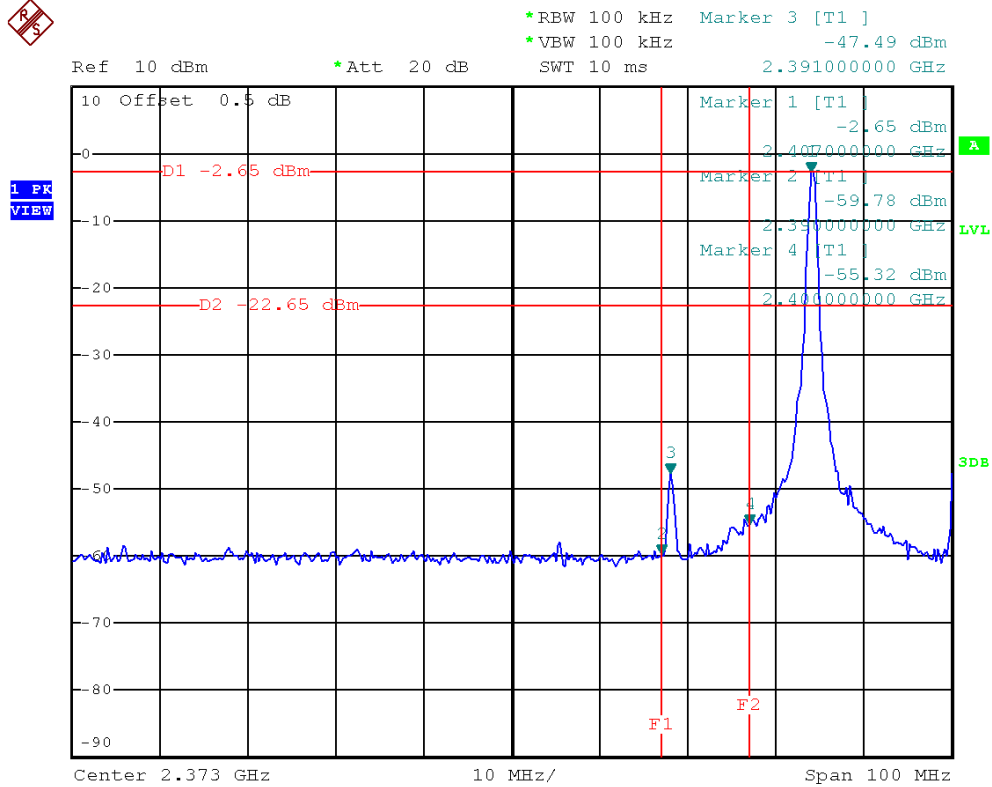


The max. radio frequency power in any 100 kHz bandwidth within the frequency band

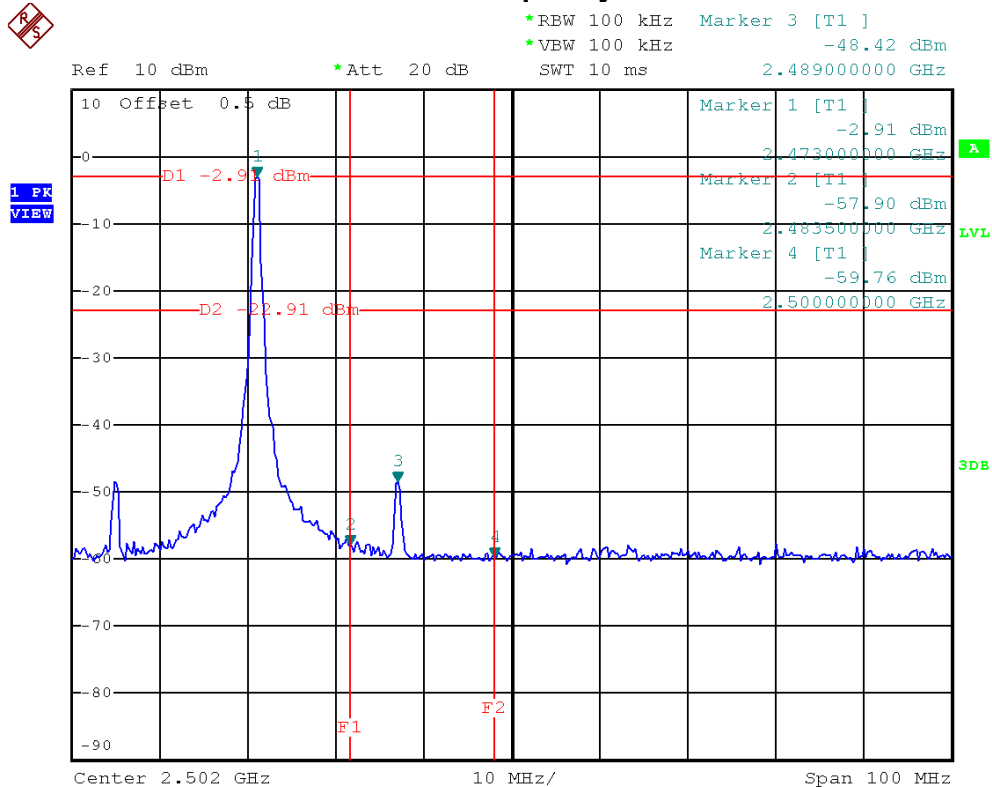




### 2407 MHz/10 Harmonic of the frequency

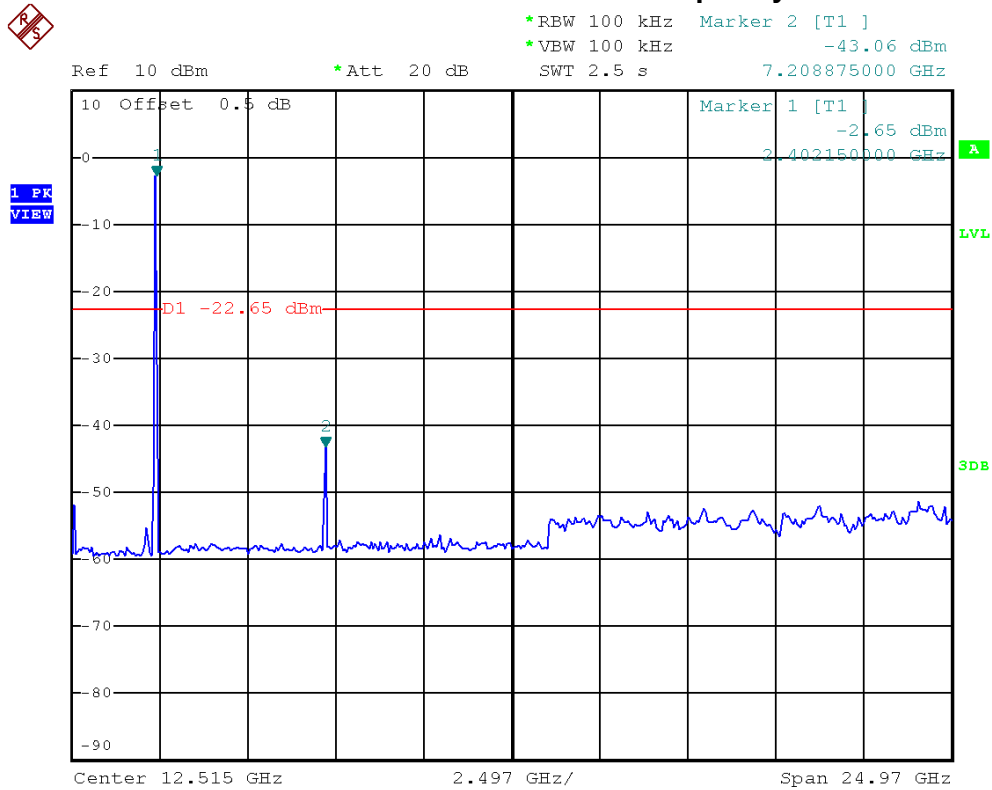


### 2437 MHz/10 Harmonic of the frequency

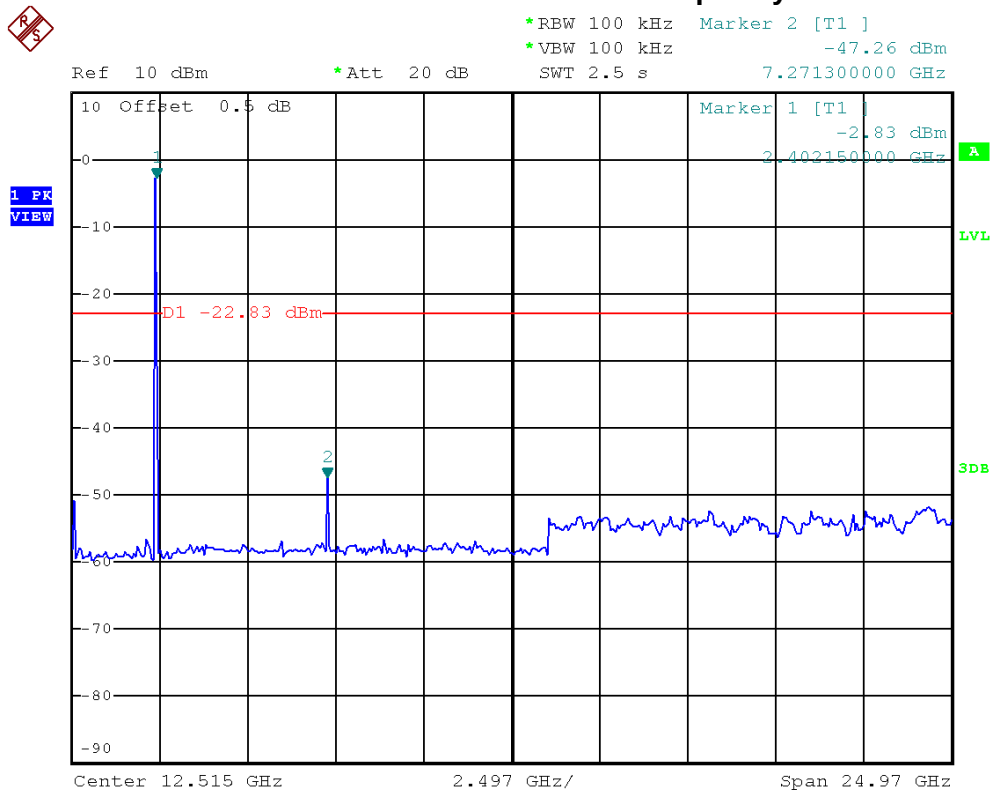



### 2473 MHz/10 Harmonic of the frequency

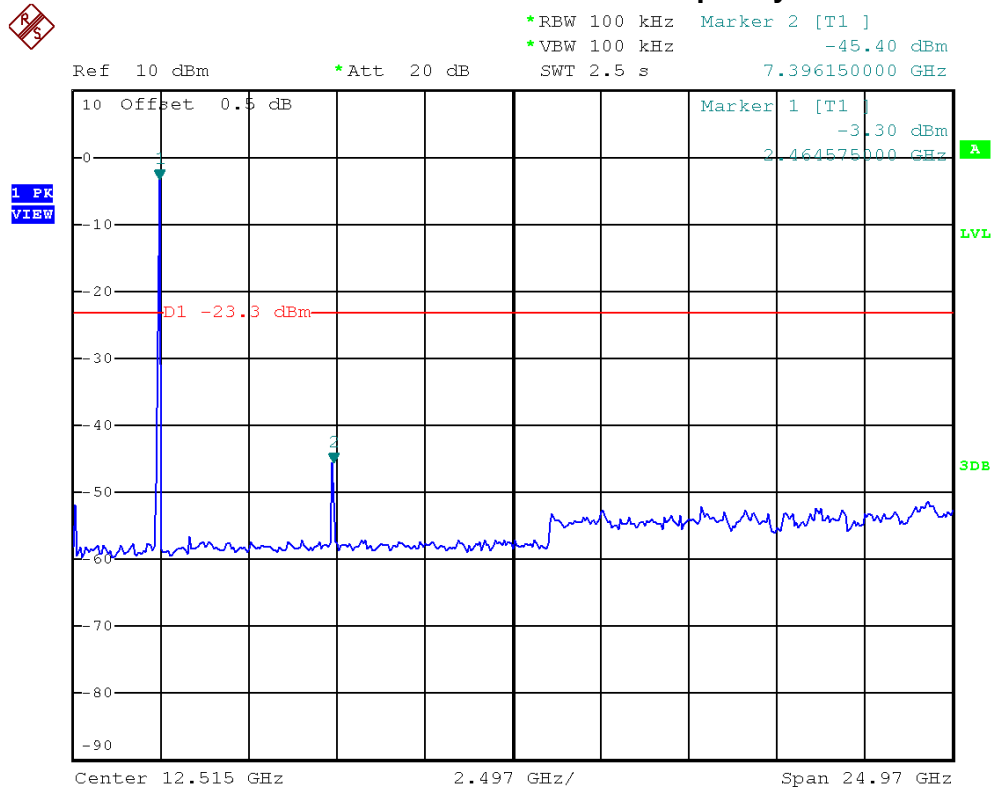





## 6.6 DB BANDWIDTH

### 6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Bandwidth	2400-2483.5	$\geq 500\text{KHz}$ (6 dB bandwidth)

### 6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Mar. 21, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 6.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

### 6.4 TEST SETUP LAYOUT



### 6.5 DEVIATION FROM TEST STANDARD

No deviation

### 6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




## 6.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2407 MHz	0.56	1.17	$\geq 500$ kHz	PASS
2437 MHz	0.57	1.13	$\geq 500$ kHz	PASS
2473 MHz	0.56	1.09	$\geq 500$ kHz	PASS

### 2407 MHz/6 dB and 99% Occupied Bandwidth

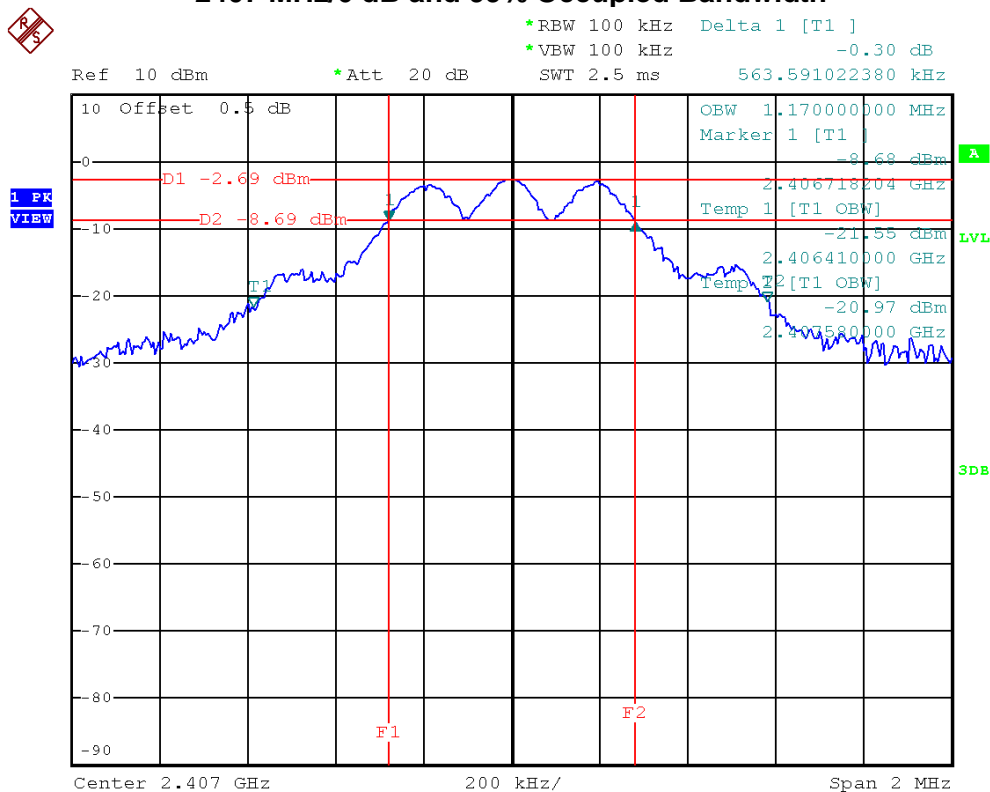




### 2437 MHz/6 dB and 99% Occupied Bandwidth

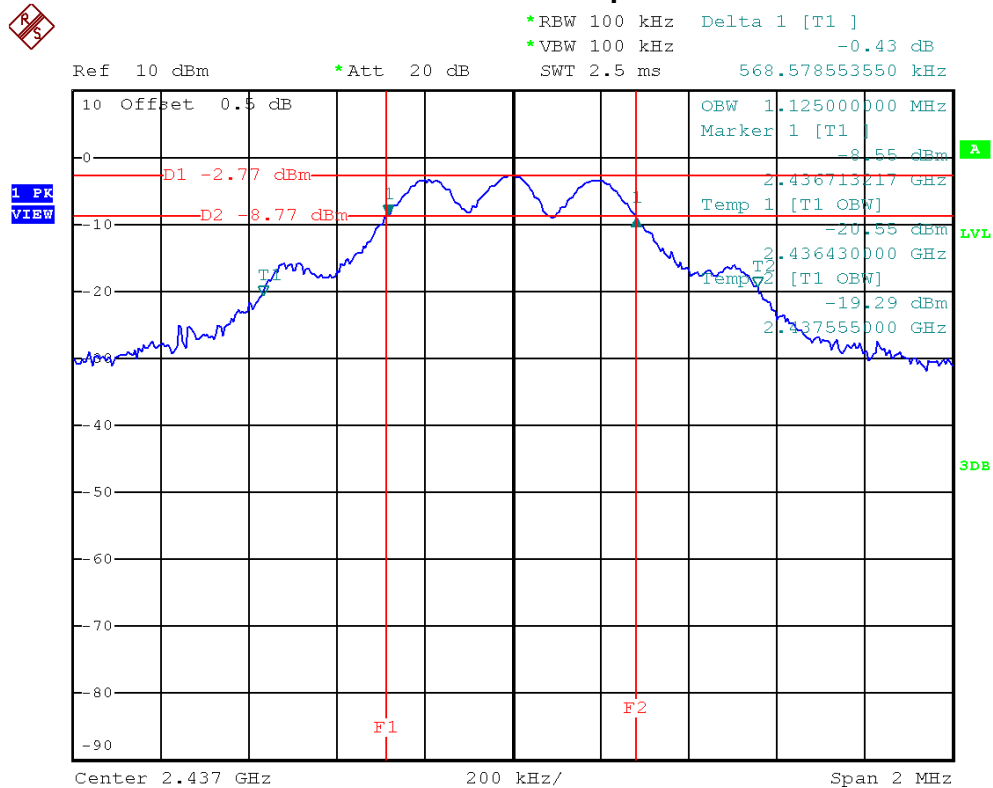

### 2473 MHz/6 dB and 99% Occupied Bandwidth

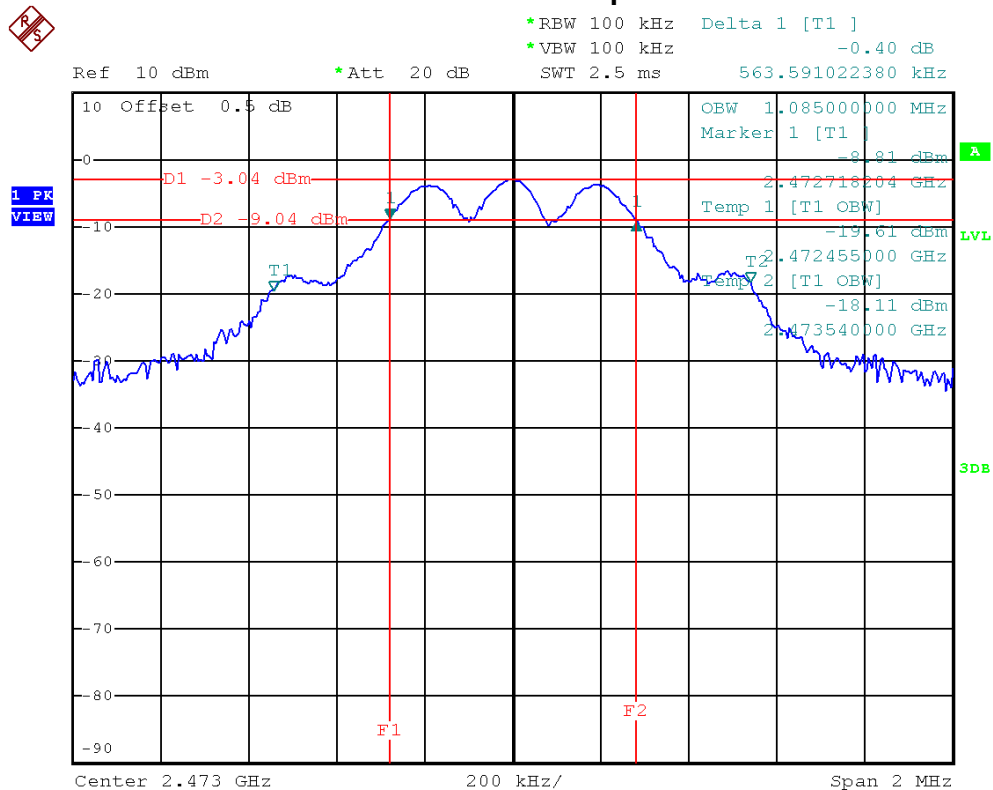



## 7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

### 7.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb. 26, 2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb. 26, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 7.3 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

### 7.4 TEST SETUP LAYOUT



### 7.5 DEVIATION FROM TEST STANDARD

No deviation

### 7.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2407 MHz	-3.66	30	PASS
2437 MHz	-3.27	30	PASS
2473 MHz	-6.44	30	PASS



## 8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

### 8.1 LIMIT

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

1. The limit for radiated test was performed according to FCC PART 15B.
2. The tighter limit applies at the band edges.
3. Emission level (dBuV/m)=20log Emission level (uV/m).
4. The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)  
 Margin Level = Measurement Value – Limit Value



## 8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Mar. 21, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	N/A	1m	May. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	May. 14, 2013
6	Microflex Cable	N/A	N/A	3m	May. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980088	Jul. 07, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

## 8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



## 8.4 TEST PROCEDURES

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


### NOTE:

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

## 8.5 DEVIATION FROM TEST STANDARD

No deviation

## 8.6 TEST SETUP LAYOUT

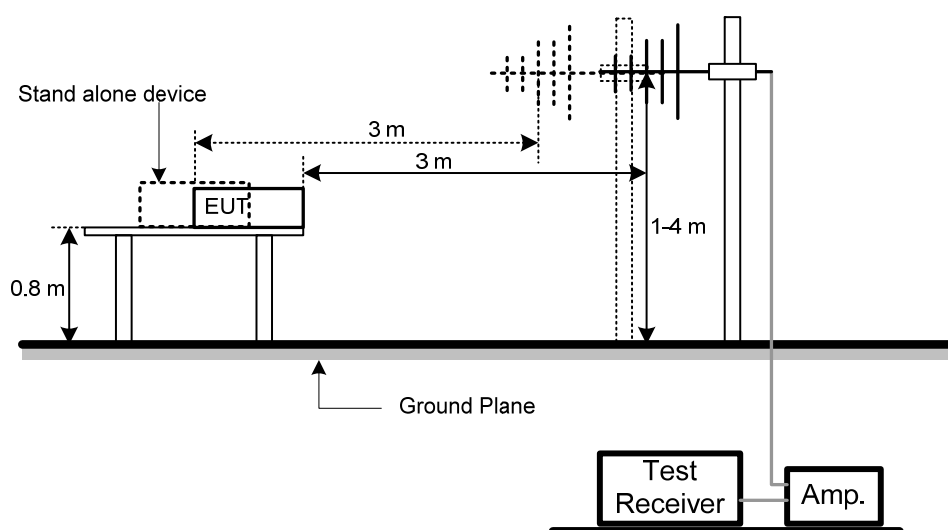





## **8.7 EUT OPERATING CONDITIONS**


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 8.8 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

### Polarization: Vertical

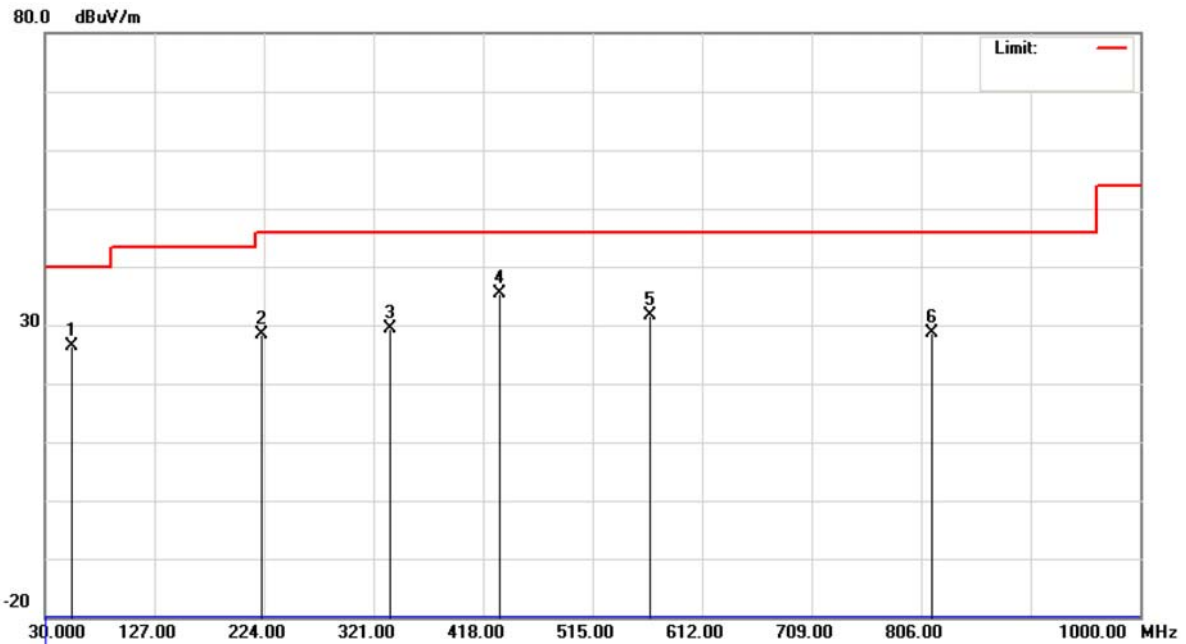


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		54.2500	45.17	-18.80	26.37	40.00	-13.63	peak	
2		221.5749	49.70	-21.36	28.34	46.00	-17.66	peak	
3		335.5499	46.67	-17.40	29.27	46.00	-16.73	peak	
4	*	432.5499	50.22	-14.95	35.27	46.00	-10.73	peak	
5		565.9249	43.69	-12.14	31.55	46.00	-14.45	peak	
6		815.7000	36.81	-8.09	28.72	46.00	-17.28	peak	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Polarization: Horizontal**

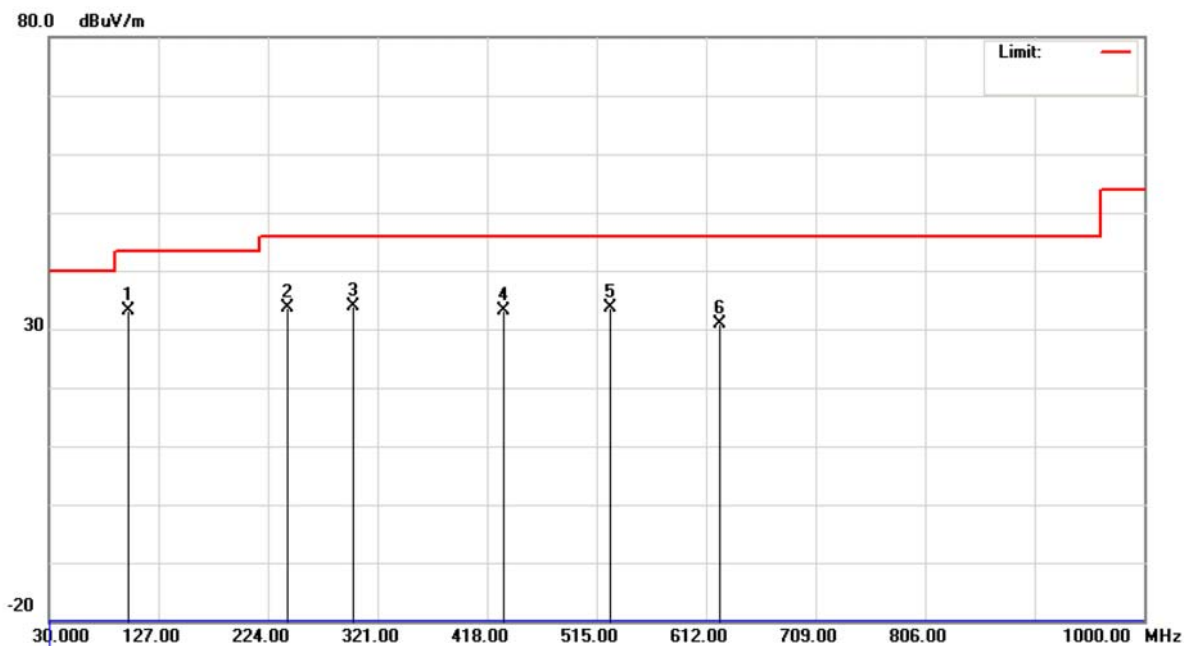

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	100.3249	57.38	-24.27	33.11	43.50	-10.39	peak	
2		240.9750	53.95	-20.42	33.53	46.00	-12.47	peak	
3		299.1749	51.96	-18.08	33.88	46.00	-12.12	peak	
4		432.5499	48.12	-14.95	33.17	46.00	-12.83	peak	
5		527.1250	46.63	-13.08	33.55	46.00	-12.45	peak	
6		624.1250	41.45	-10.62	30.83	46.00	-15.17	peak	



## 9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)

### 9.1 LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)  
 Margin Level = Measurement Value – Limit Value



## 9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Mar. 21, 2014
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	N/A	1m	May. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	May. 14, 2013
6	Microflex Cable	N/A	N/A	3m	May. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980088	Jul. 7, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

## 9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average



## 9.4 TEST PROCEDURES

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


### NOTE:

- Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

## 9.5 DEVIATION FROM TEST STANDARD

No deviation

## 9.6 TEST SETUP LAYOUT

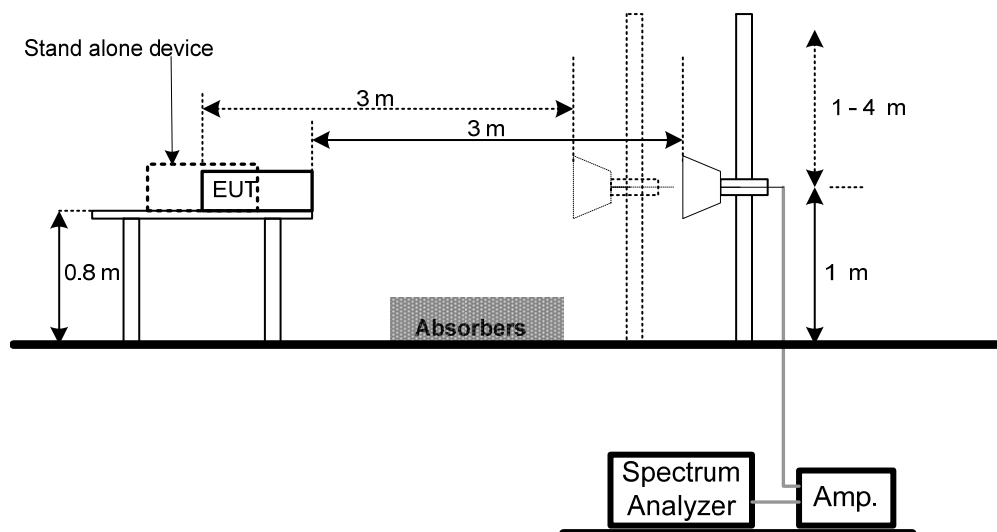



## **9.7 EUT OPERATING CONDITIONS**


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 9.8 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		

### Polarization: Vertical

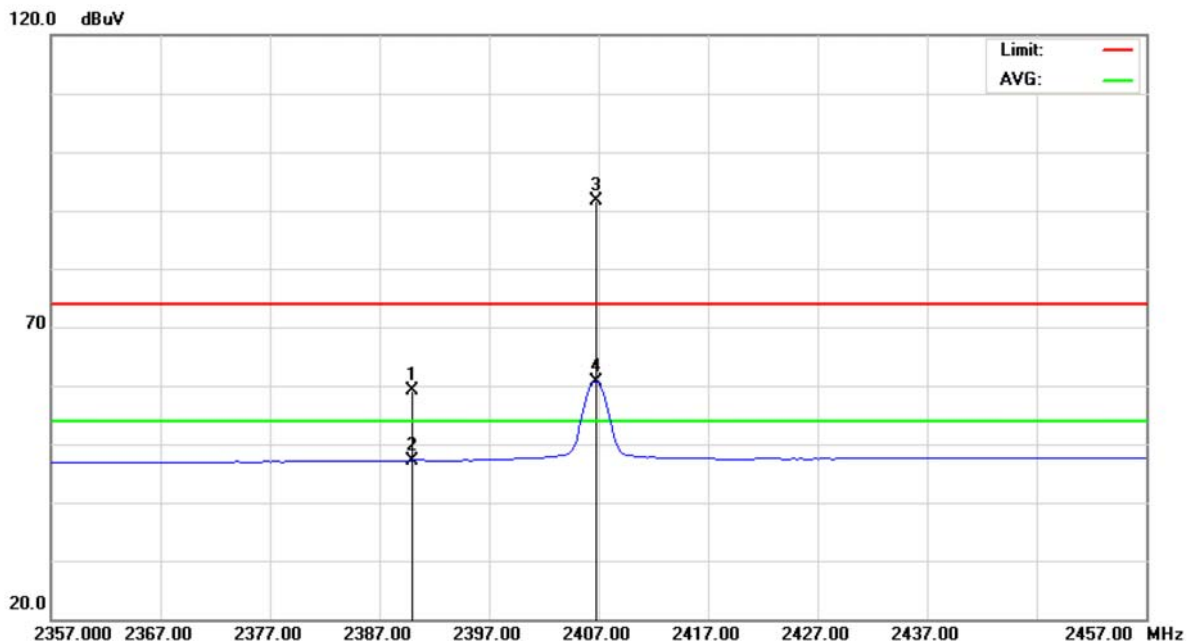


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2390.000	25.32	33.90	59.22	74.00	-14.78	peak	
2		2390.000	13.34	33.90	47.24	54.00	-6.76	AVG	
3	*	2406.750	57.64	33.98	91.62	74.00	17.62	peak	
4	X	2406.750	26.66	33.98	60.64	54.00	6.64	AVG	





E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		

**Polarization: Vertical**

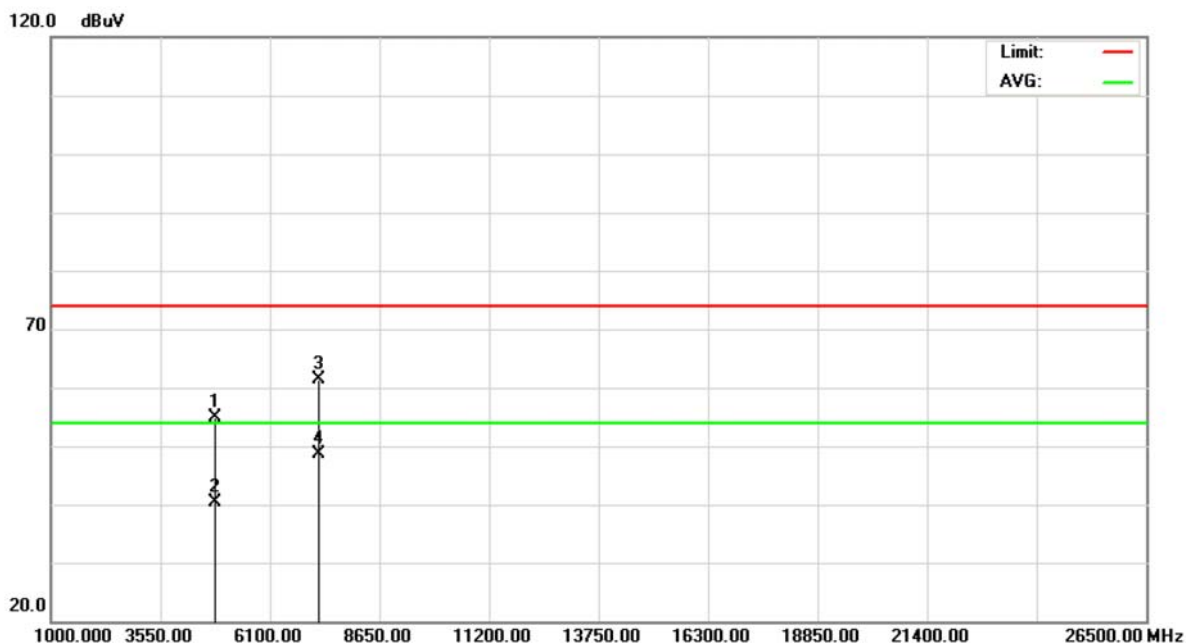


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4813.125	46.56	8.34	54.90	74.00	-19.10	peak	
2		4813.125	31.95	8.34	40.29	54.00	-13.71	AVG	
3		7219.500	45.24	16.14	61.38	74.00	-12.62	peak	
4	*	7219.500	32.46	16.14	48.60	54.00	-5.40	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		

**Polarization: Horizontal**

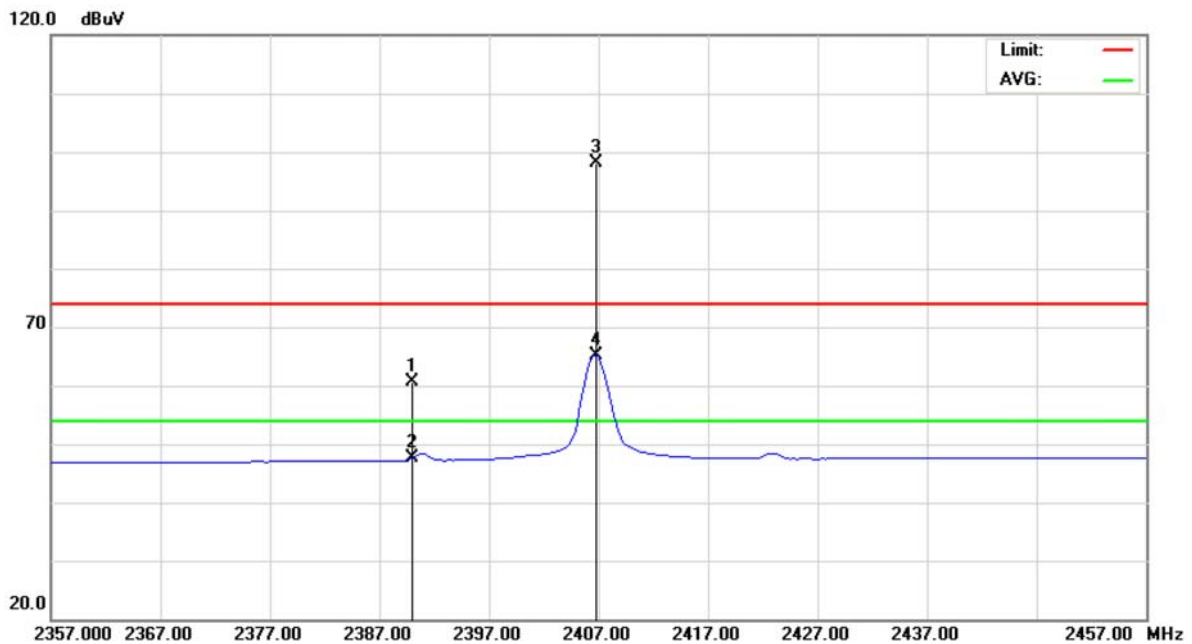


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2390.000	26.70	33.90	60.60	74.00	-13.40	peak	
2		2390.000	13.62	33.90	47.52	54.00	-6.48	AVG	
3	*	2406.750	64.12	33.98	98.10	74.00	24.10	peak	
4	X	2406.750	31.12	33.98	65.10	54.00	11.10	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		

**Polarization: Horizontal**

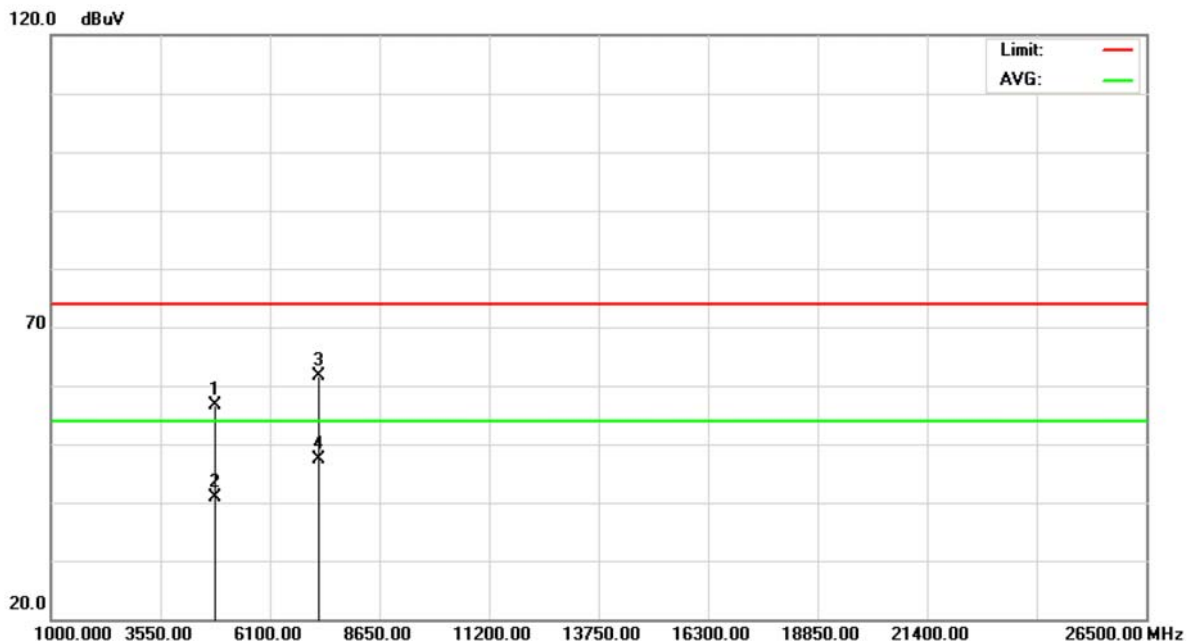


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4812.925	48.24	8.34	56.58	74.00	-17.42	peak	
2		4812.925	32.49	8.34	40.83	54.00	-13.17	AVG	
3		7220.000	45.60	16.14	61.74	74.00	-12.26	peak	
4	*	7220.000	31.28	16.14	47.42	54.00	-6.58	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Polarization: Vertical**

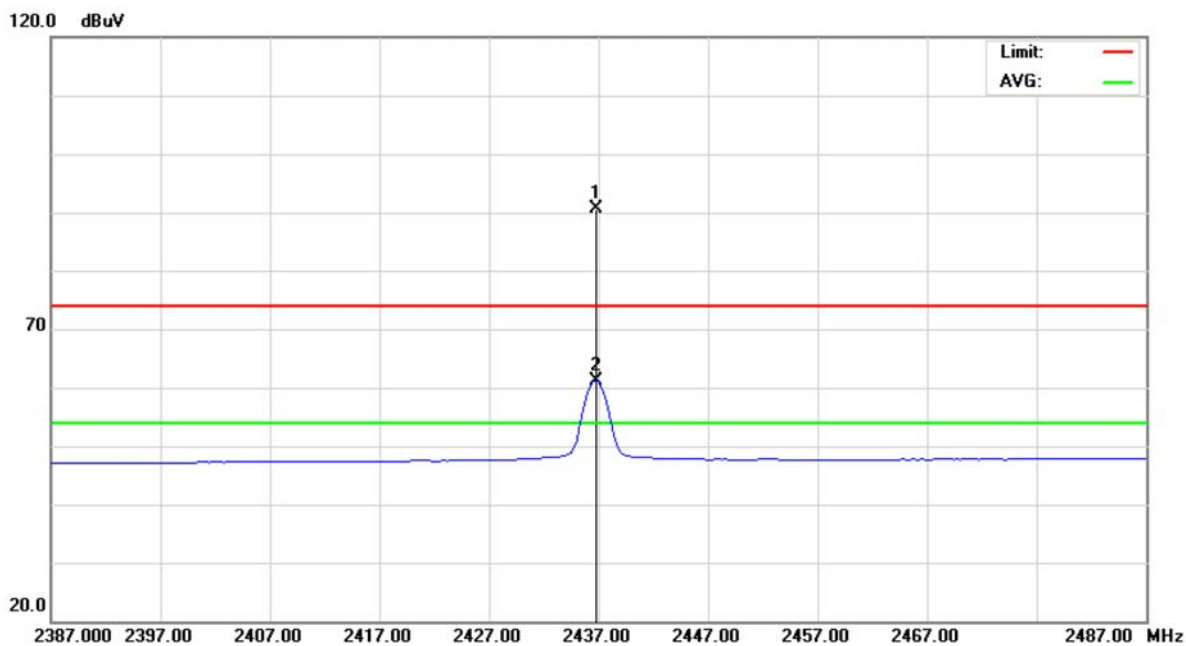


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2436.750	56.61	34.11	90.72	74.00	16.72	peak	
2	X	2436.750	27.12	34.11	61.23	54.00	7.23	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Polarization: Vertical**

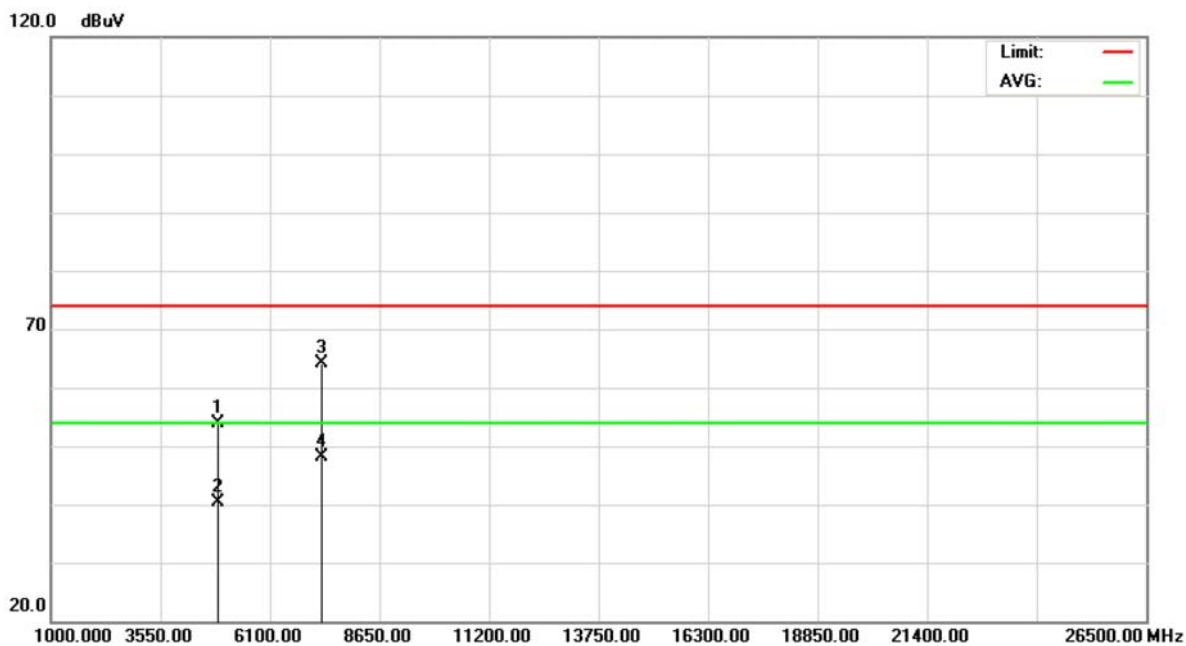


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4873.075	45.45	8.48	53.93	74.00	-20.07	peak	
2		4873.075	31.84	8.48	40.32	54.00	-13.68	AVG	
3		7309.600	47.60	16.50	64.10	74.00	-9.90	peak	
4	*	7309.600	31.68	16.50	48.18	54.00	-5.82	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Polarization: Horizontal**

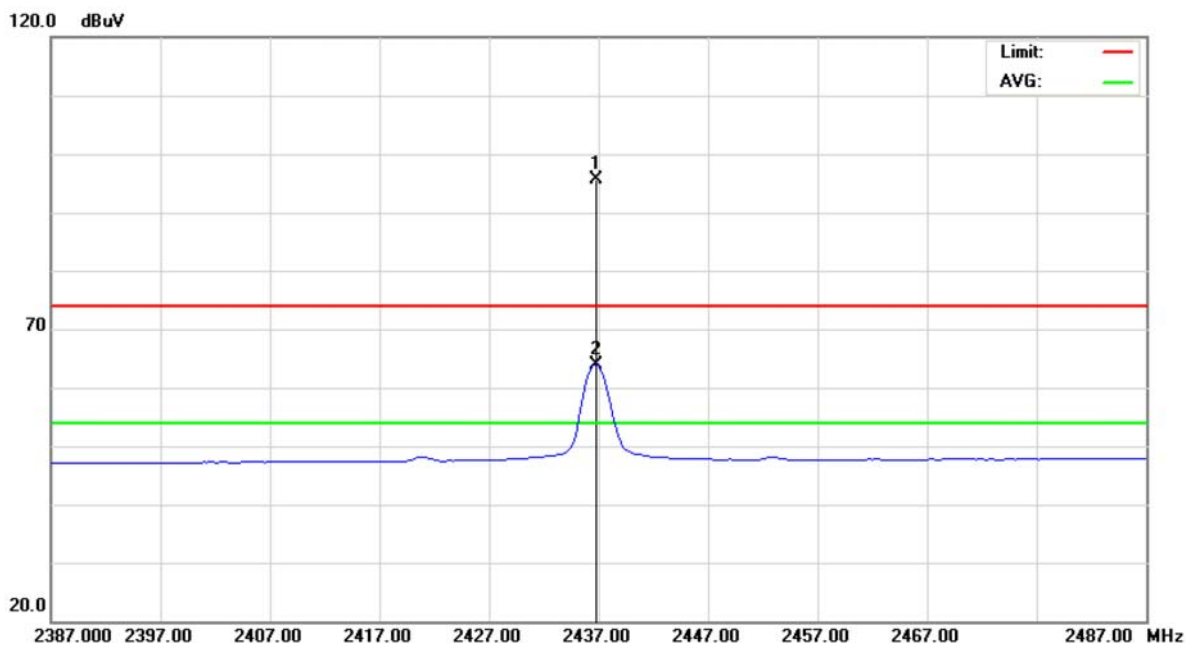


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2436.750	61.61	34.11	95.72	74.00	21.72	peak	
2	X	2436.750	29.86	34.11	63.97	54.00	9.97	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2437 MHz		

**Polarization: Horizontal**

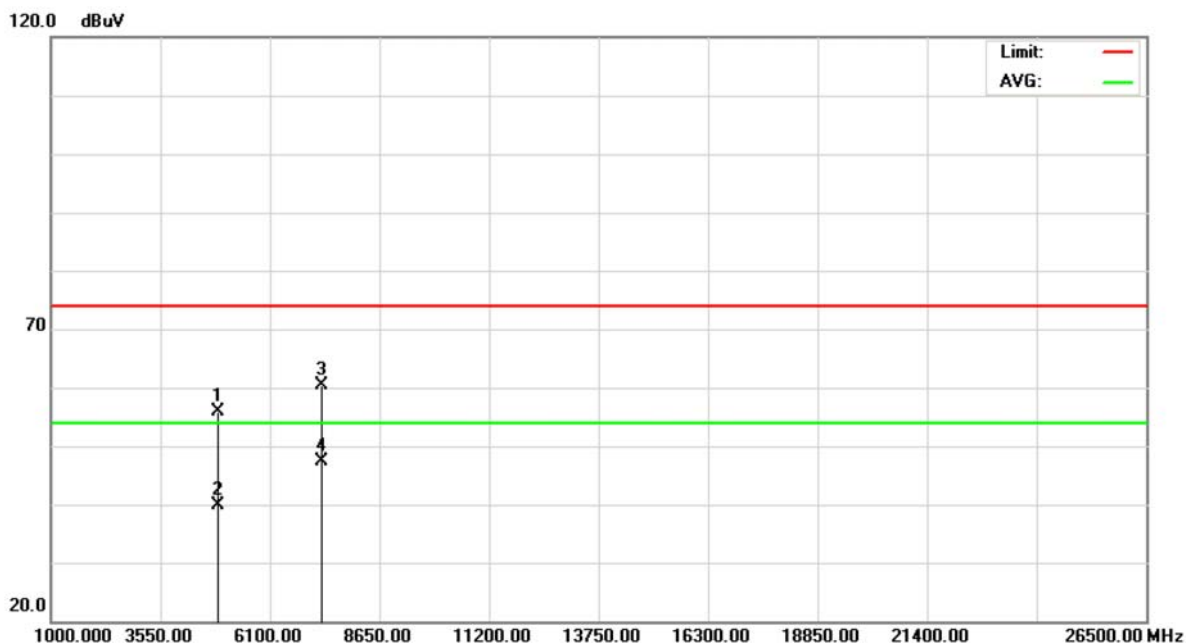


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4873.075	47.34	8.48	55.82	74.00	-18.18	peak	
2		4873.075	31.52	8.48	40.00	54.00	-14.00	AVG	
3		7310.200	44.00	16.50	60.50	74.00	-13.50	peak	
4	*	7310.200	30.85	16.50	47.35	54.00	-6.65	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

**Polarization: Vertical**

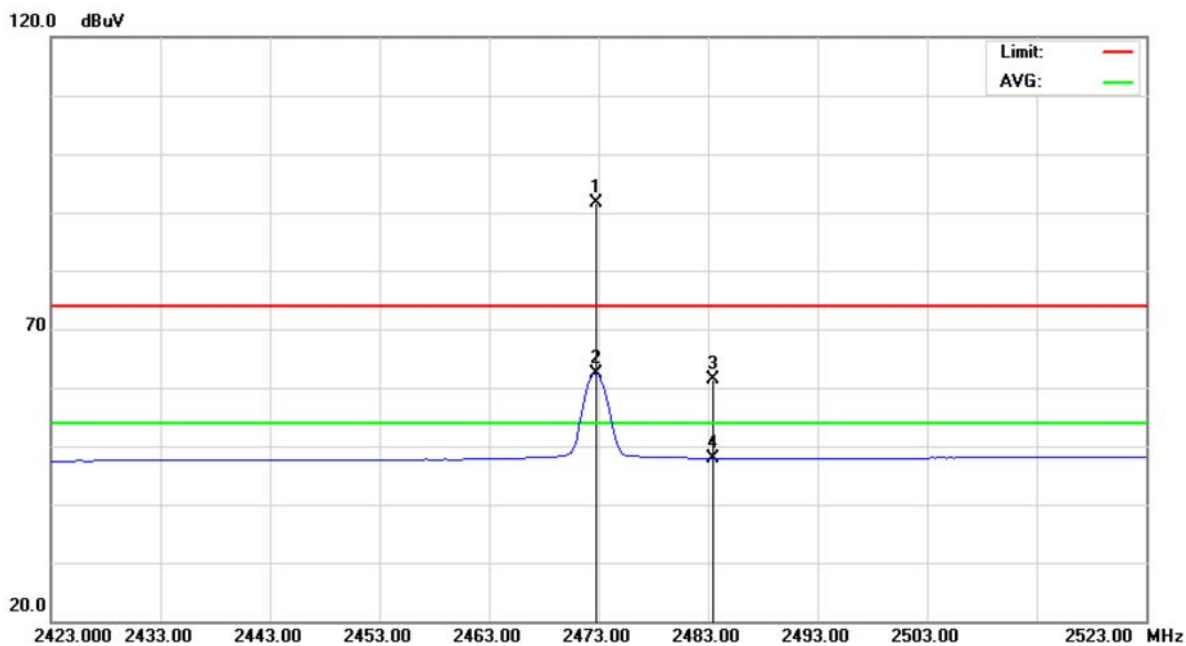


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2472.750	57.44	34.27	91.71	74.00	17.71	peak	
2	X	2472.750	28.22	34.27	62.49	54.00	8.49	AVG	
3		2483.500	26.96	34.32	61.28	74.00	-12.72	peak	
4		2483.500	13.59	34.32	47.91	54.00	-6.09	AVG	





E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

**Polarization: Vertical**

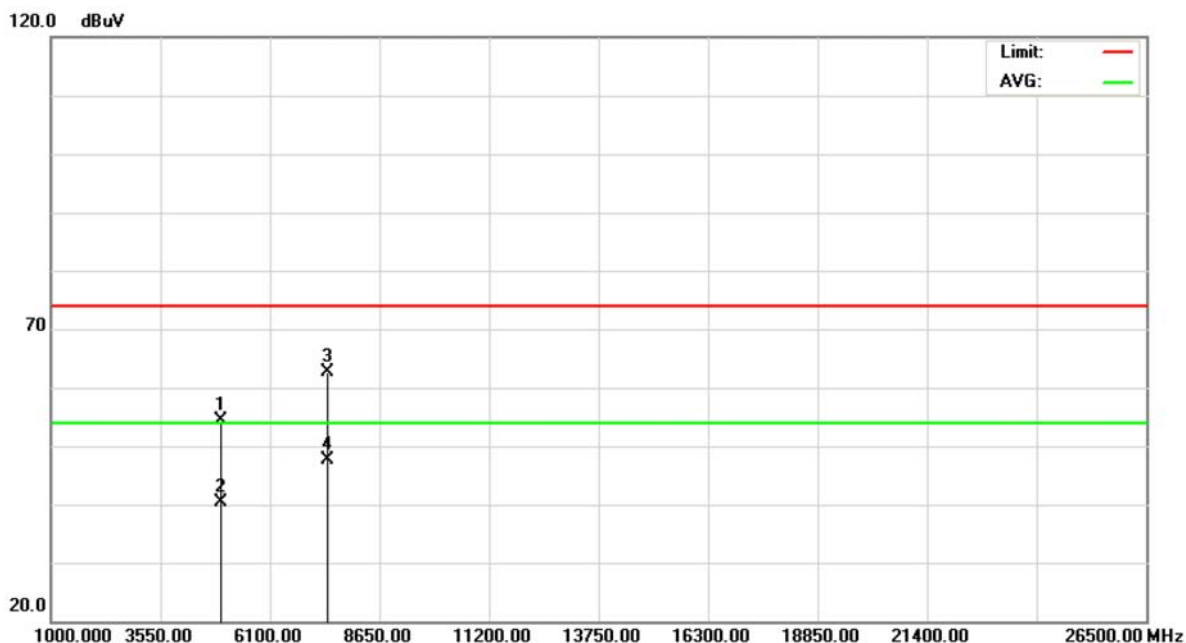


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4945.025	45.83	8.64	54.47	74.00	-19.53	peak	
2		4945.025	31.72	8.64	40.36	54.00	-13.64	AVG	
3		7419.350	45.77	16.94	62.71	74.00	-11.29	peak	
4	*	7419.350	30.64	16.94	47.58	54.00	-6.42	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

**Polarization: Horizontal**

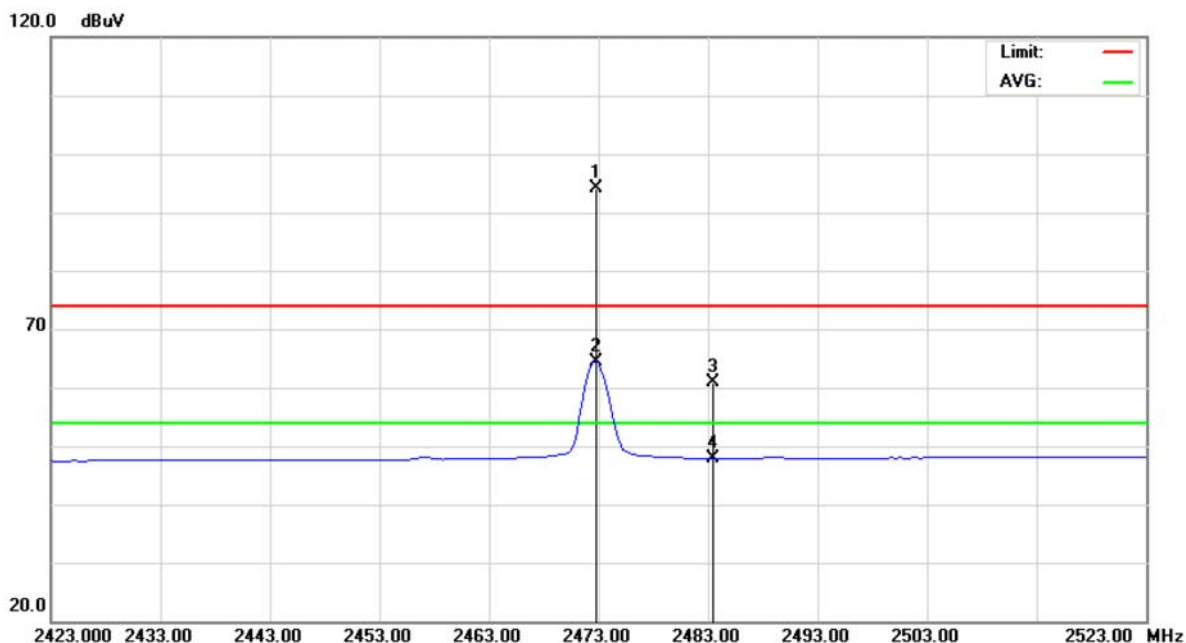

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	2472.750	59.94	34.27	94.21	74.00	20.21	peak	
2	X	2472.750	30.04	34.27	64.31	54.00	10.31	AVG	
3		2483.500	26.62	34.32	60.94	74.00	-13.06	peak	
4		2483.500	13.59	34.32	47.91	54.00	-6.09	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		

**Polarization: Horizontal**




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		4944.975	46.31	8.64	54.95	74.00	-19.05	peak	
2		4944.975	31.62	8.64	40.26	54.00	-13.74	AVG	
3		7419.050	44.00	16.94	60.94	74.00	-13.06	peak	
4	*	7419.050	31.20	16.94	48.14	54.00	-5.86	AVG	



## 9.9 TEST RESULTS (RESTRICTED BANDS)

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

### Polarization: Vertical

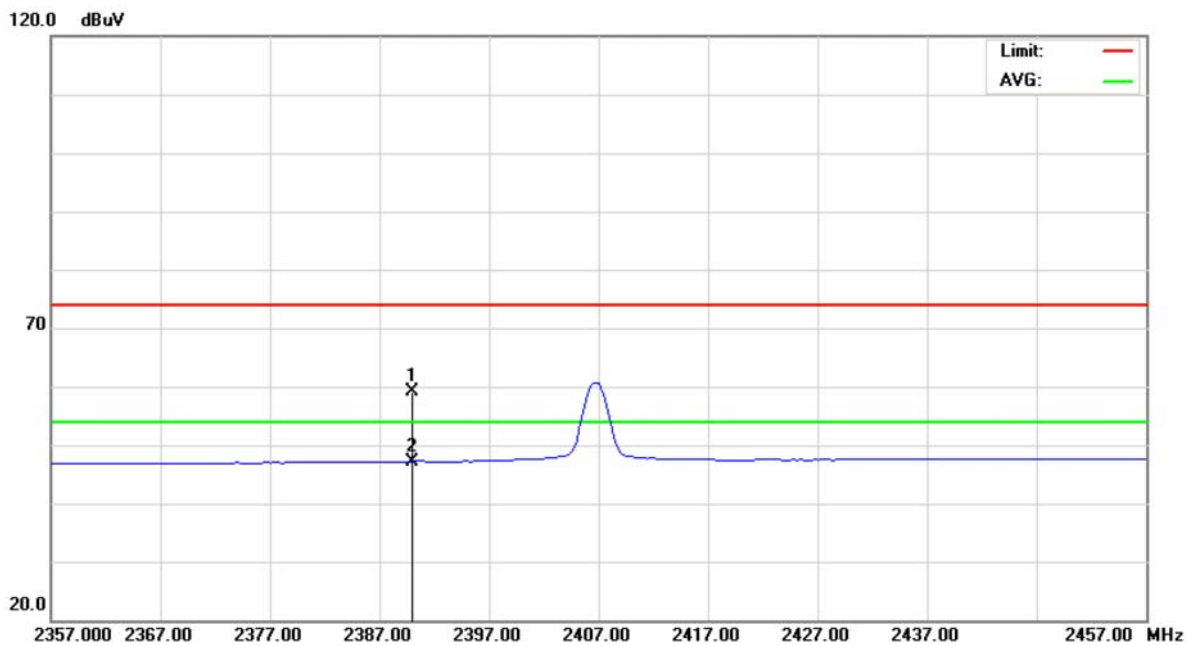


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2390.000	25.32	33.90	59.22	74.00	-14.78	peak	
2	*	2390.000	13.34	33.90	47.24	54.00	-6.76	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Horizontal**

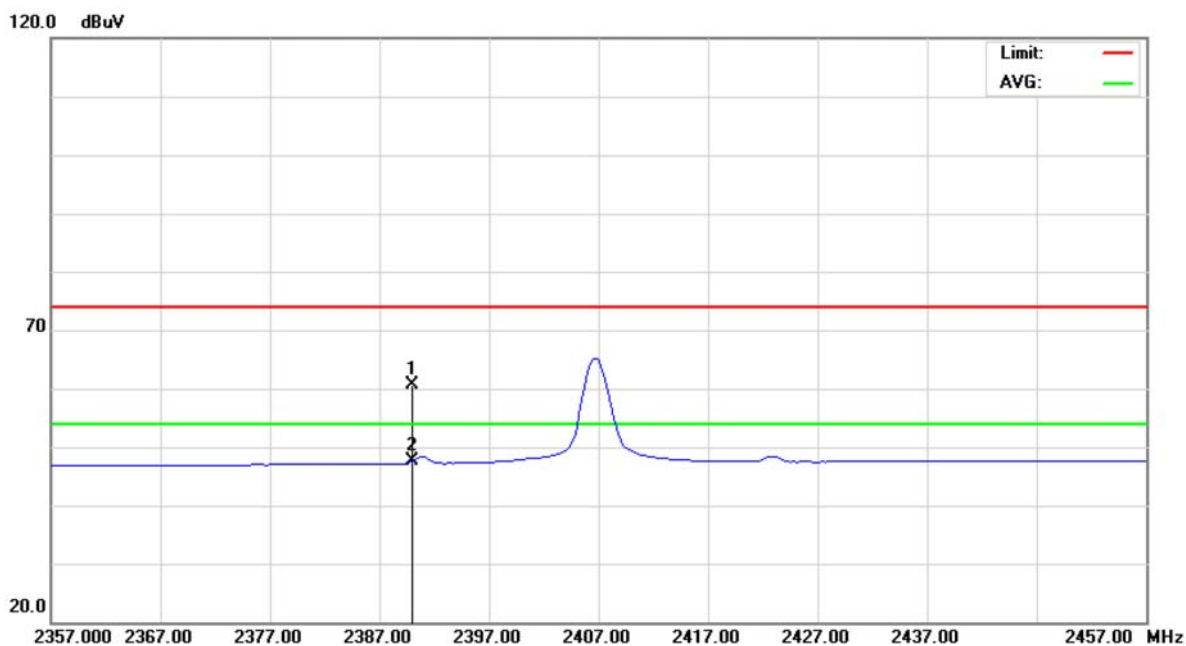


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2390.000	26.70	33.90	60.60	74.00	-13.40	peak	
2	*	2390.000	13.62	33.90	47.52	54.00	-6.48	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Vertical**

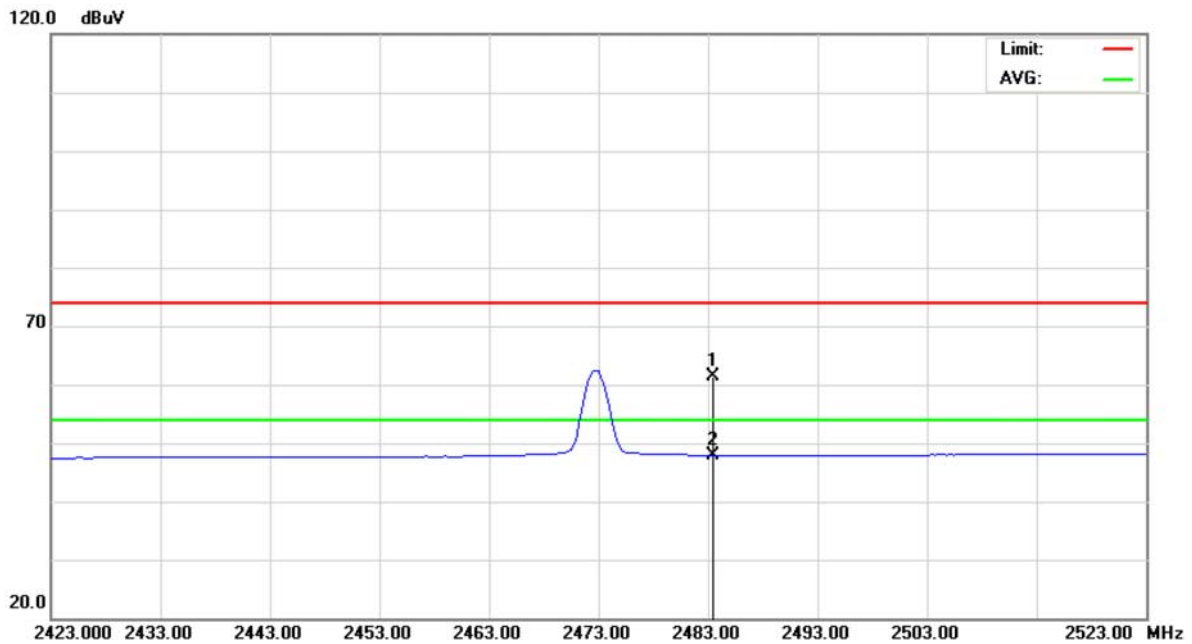


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2483.500	26.96	34.32	61.28	74.00	-12.72	peak	
2	*	2483.500	13.59	34.32	47.91	54.00	-6.09	AVG	



E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	24°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Horizontal**

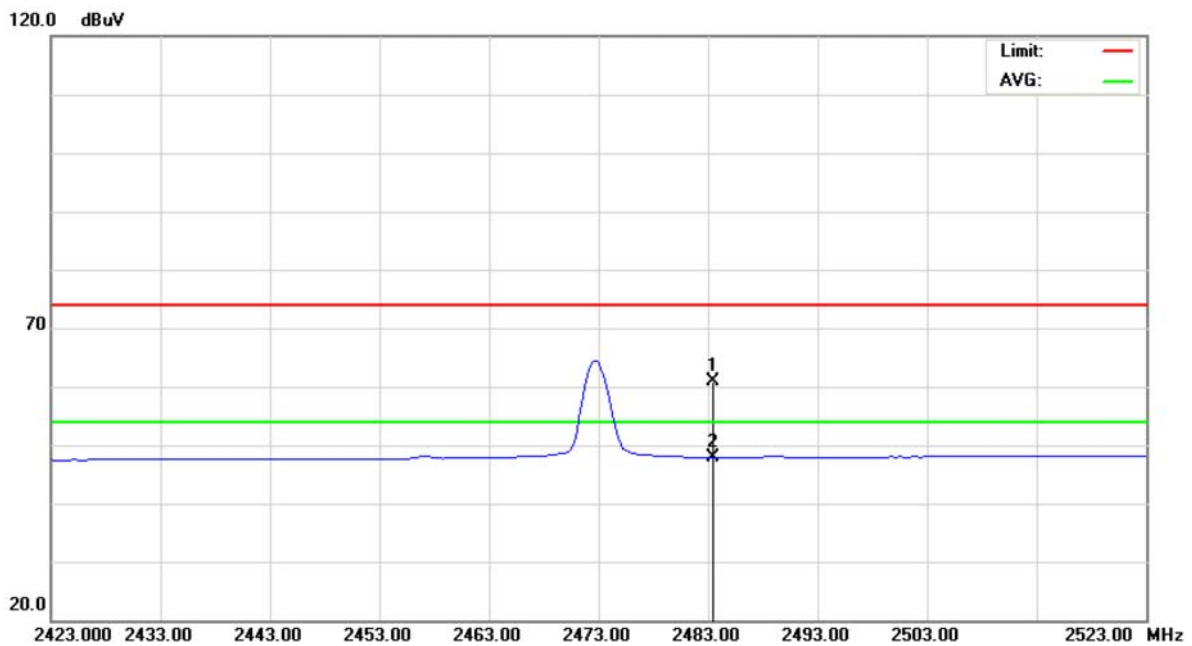

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2483.500	26.62	34.32	60.94	74.00	-13.06	peak	
2	*	2483.500	13.59	34.32	47.91	54.00	-6.09	AVG	



## 10 POWER SPECTRAL DENSITY

### 10.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	2400-2483.5	8 dBm (in any 3 kHz)

### 10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Mar. 21, 2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 10.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=30 kHz, Sweep time = 500s.

### 10.4 TEST SETUP LAYOUT



### 10.5 DEVIATION FROM TEST STANDARD

No deviation

### 10.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.






## 10.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G11-570HX
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2407 MHz	-10.70	8	PASS
2437 MHz	-10.66	8	PASS
2473 MHz	-10.78	8	PASS

### 2407 MHz/Power Sepctral Density

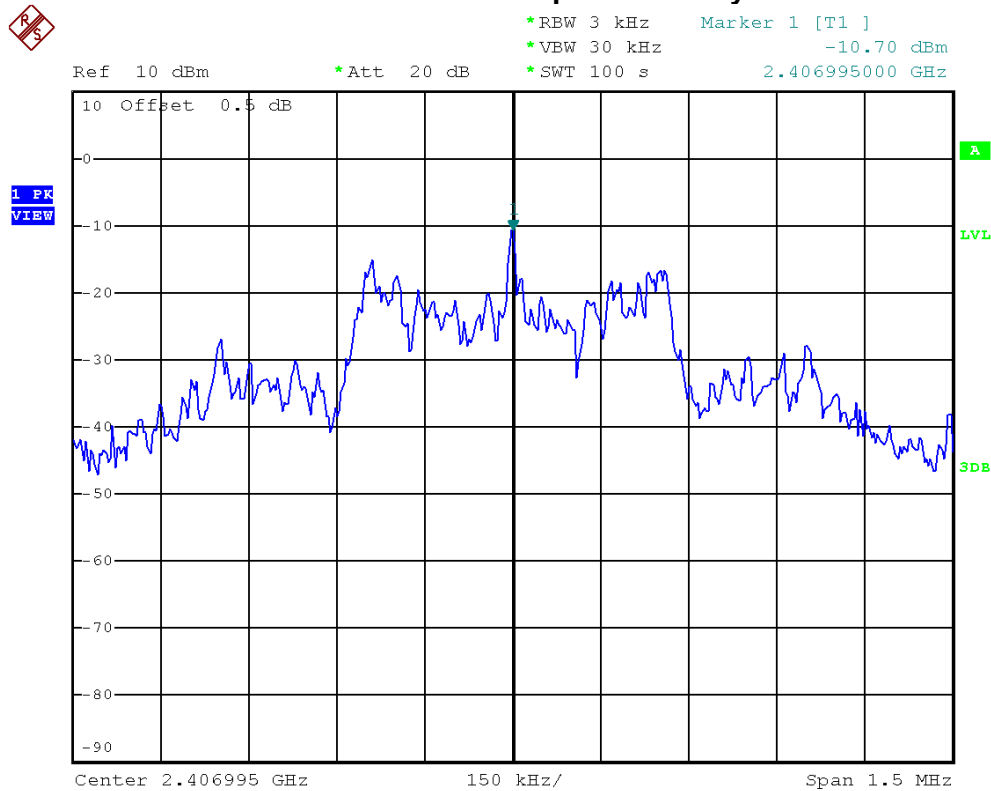



### 2437 MHz/Power Sepctral Density

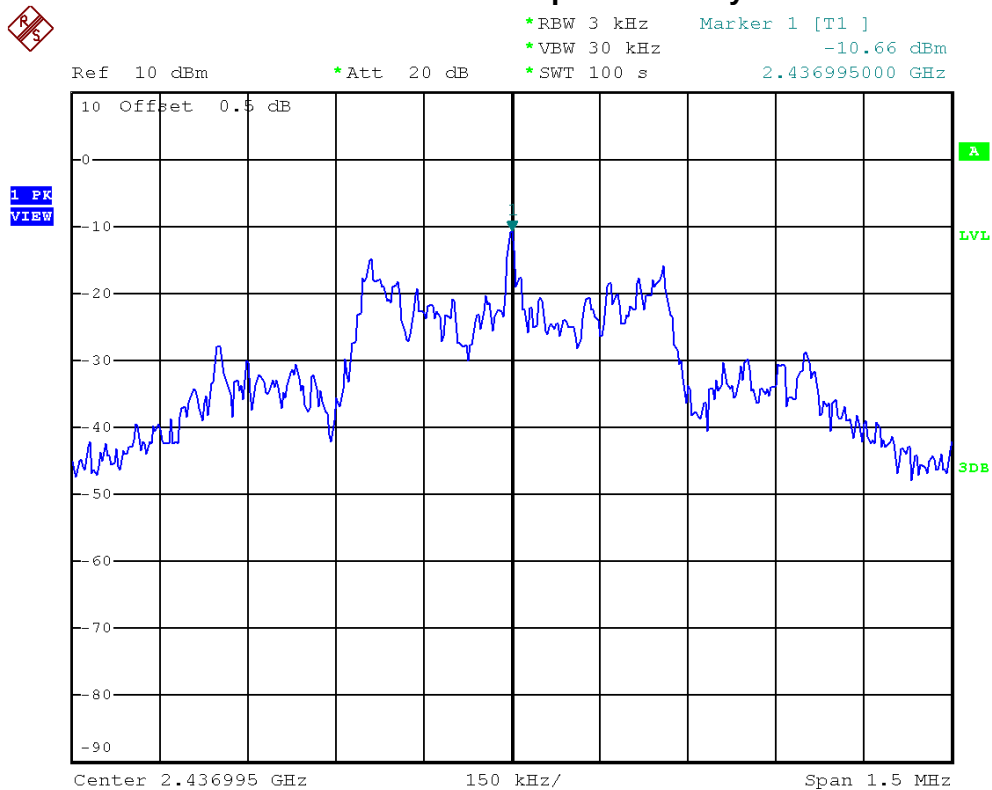

### 2473 MHz/Power Sepctral Density

