



Neutron Engineering Inc.

Radio Test Report

FCC ID: H8GG3300N

This report concerns (check one) : ☒ Original Grant ☐ Class II Change

Issued Date : Aug. 28, 2013
Project No. : 1201122D
Equipment : 2.4G RF Mouse
Model Name : G3-300N; G9-330H; G9-330F; G7-330D;
G7-330N; 7600N

Applicant : A-FOUR TECH CO., LTD.
Address : 6F., No.108, Min-Chuan Rd., Xindian
Dist., New Taipei City, Taiwan R.O.C.

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Aug. 16, 2013
Date of Test: Aug. 16, 2013 ~ Aug. 27, 2013

Testing Engineer: Josh Lin
(Josh Lin)

Technical Manager: Jeff Yang
(Jeff Yang)

Authorized Signatory: Andy Chiu
(Andy Chiu)

Neutron Engineering Inc.
B1, No. 37, Lane 365, YangGuang St.,
NeiHu District 114, Taipei, Taiwan.
TEL: +886-2-2657-3299
FAX: +886-2-2657-3331





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	5
1 CERTIFICATION	6
2 SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 ANTENNA CONDUCTED SPURIOUS EMISSION	13
4.1 LIMIT	13
4.2 MEASUREMENT INSTRUMENTS LIST	13
4.3 TEST PROCEDURES	13
4.4 TEST SETUP LAYOUT	13
4.5 DEVIATION FROM TEST STANDARD	13
4.6 EUT OPERATING CONDITIONS	13
4.7 TEST RESULTS	14
5 6 DB BANDWIDTH	18
5.1 LIMIT	18
5.2 MEASUREMENT INSTRUMENTS LIST	18
5.3 TEST PROCEDURES	18
5.4 TEST SETUP LAYOUT	18
5.5 DEVIATION FROM TEST STANDARD	18
5.6 EUT OPERATING CONDITIONS	18
5.7 TEST RESULTS	19
6 MAXIMUM PEAK CONDUCTED OUTPUT POWER	21
6.1 LIMIT	21
6.2 MEASUREMENT INSTRUMENTS LIST	21
6.3 TEST PROCEDURES	21
6.4 TEST SETUP LAYOUT	21
6.5 DEVIATION FROM TEST STANDARD	21
6.6 EUT OPERATING CONDITIONS	21
6.7 TEST RESULTS	22
7 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	23
7.1 LIMIT	23
7.2 MEASUREMENT INSTRUMENTS LIST	24
7.3 MEASURING INSTRUMENTS SETTING	24



Table of Contents

7.4	TEST PROCEDURES	25
7.5	DEVIATION FROM TEST STANDARD	25
7.6	TEST SETUP LAYOUT	25
7.7	EUT OPERATING CONDITIONS	26
7.8	TEST RESULTS	27
8	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	29
8.1	LIMIT	29
8.2	MEASUREMENT INSTRUMENTS LIST	30
8.3	MEASURING INSTRUMENTS SETTING	30
8.4	TEST PROCEDURES	31
8.5	DEVIATION FROM TEST STANDARD	31
8.6	TEST SETUP LAYOUT	31
8.7	EUT OPERATING CONDITIONS	32
8.8	TEST RESULTS	33
8.9	TEST RESULTS (RESTRICTED BANDS)	45
9	POWER SPECTRAL DENSITY	49
9.1	LIMIT	49
9.2	MEASUREMENT INSTRUMENTS LIST	49
9.3	TEST PROCEDURES	49
9.4	TEST SETUP LAYOUT	49
9.5	DEVIATION FROM TEST STANDARD	49
9.6	EUT OPERATING CONDITIONS	49
9.7	TEST RESULTS	50
10	RF EXPOSURE COMPLIANCE	52
10.1	LIMIT	52
10.2	MEASUREMENT INSTRUMENTS LIST	52
10.3	MPE CALCULATION METHOD	52
10.4	TEST SETUP LAYOUT	53
10.5	DEVIATION FROM TEST STANDARD	53
10.6	EUT OPERATING CONDITIONS	53
10.7	TEST RESULTS	54
11	EUT TEST PHOTO	55



REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Aug. 28, 2013



1 CERTIFICATION

Equipment : 2.4G RF Mouse
Brand Name : A4TECH
Model Name : G3-300N; G9-330H; G9-330F; G7-330D; G7-330N; 7600N
Applicant : A-FOUR TECH CO., LTD.
Date of Test : Aug. 16, 2013 ~ Aug. 27, 2013
Standards : FCC Part 15, Subpart C: 2012
ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1201122D) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

FCC Part 15, Subpart C: 2012		
Standard Clause	Test Item	Result
15.207	Conducted Emission	N/A
15.247 (c)	Antenna conducted Spurious Emission	PASS
15.247 (a)(2)	6 dB Bandwidth	PASS
15.247 (b)	Maximum Peak Conducted Output Power	PASS
15.247 (c)	Radiated Spurious Emission	PASS
15.247 (d)(e)	Power Spectral Density	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

(1) N/A: denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB
			200 - 1000MHz	3.11 dB
			1 - 18GHz	3.97 dB
			18 - 40GHz	4.01 dB
		Vertical Polarization	30 - 200MHz	3.22 dB
			200 - 1000MHz	3.24 dB
			1 - 18GHz	4.05 dB
			18 - 40GHz	4.04 dB

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

If U_{lab} is less than or equal to U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{CISPR} , then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	2.4G RF Mouse	
Brand Name	A4TECH	
Model Name	G3-300N; G9-330H; G9-330F; G7-330D; G7-330N	
OEM Brand/Model Name	G-Cube/G7V-330BG; G7V-330G; G7V-330RB; G7V-330W Zydio/WA-330	
Model Difference	All models are based on similar electrical circuit except the difference of list below:	
	Model Name	Lens Type
	G9-330H; G7-330D	Holeless (Sealed lens, completely closed bottom, without any sensor opening)
	G3-300N; G9-330F; G7-330N; G7V-330BG; G7V-330G; G7V-330RB; G7V-330W; WA-330	V-Track (Vertical reinforced light, tiny lens hole)
All the above models were tested, and the model: G3-300N was found to be the worst case during the pre-scanning test. This model of the worst case was used for final testing and collecting test data included in this report.		
Product Description	The EUT is a 2.4G RF Mouse.	
	Operation Frequency	2407 MHz ~2473 MHz
	Modulation Type	GFSK
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
	Maximum Peak Conducted Output Power:	-0.39 dBm
More details of EUT technical specification, please refer to the User's Manual.		
Power Source	Battery supplied.	
Power Rating	I/P: DC 1.5V	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2407	06	2430	11	2456
02	2411	07	2434	12	2460
03	2415	08	2437	13	2468
04	2422	09	2445	14	2473
05	2426	10	2451		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-3.24



3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Channel	Note
Conducted Emission	N/A	N/A	N/A	
Antenna conducted Spurious Emission	GFSK	2 Mbps	01/08/14	
6 dB Bandwidth	GFSK	2 Mbps	01/08/14	
Maximum Peak Conducted Output Power	GFSK	2 Mbps	01/08/14	
Radiated Spurious Emission (30 MHz to 1 GHz)	GFSK	2 Mbps	06	
Radiated Spurious Emission (above 1 GHz)	GFSK	2 Mbps	01/08/14	
Restricted Bands	GFSK	2 Mbps	01/08/14	
Antenna Requirement	-----	-----	-----	
RF Exposure Compliance	-----	-----	-----	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

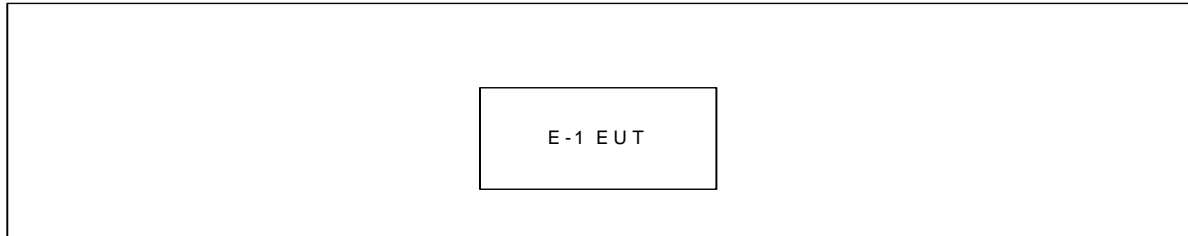



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC ID	Series No.	Note
E-1	2.4G RF Mouse	A4TECH	G3-300N	H8GG3300N	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
N/A	-	-	-	-

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 ANTENNA CONDUCTED SPURIOUS EMISSION

4.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

4.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

4.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

4.4 TEST SETUP LAYOUT

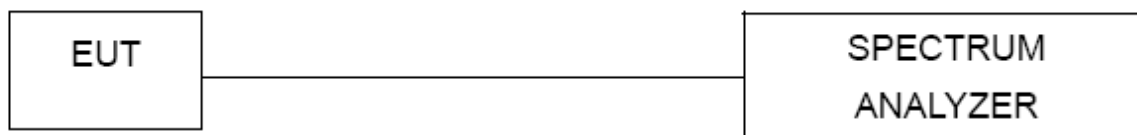

4.5 DEVIATION FROM TEST STANDARD

No deviation

4.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operation condition was tested and used to collect the included data.




4.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz/2473 MHz		


Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2391.00	-48.61	2489.00	-45.97
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.			



The max. radio frequency power in any 100kHz bandwidth outside the frequency band

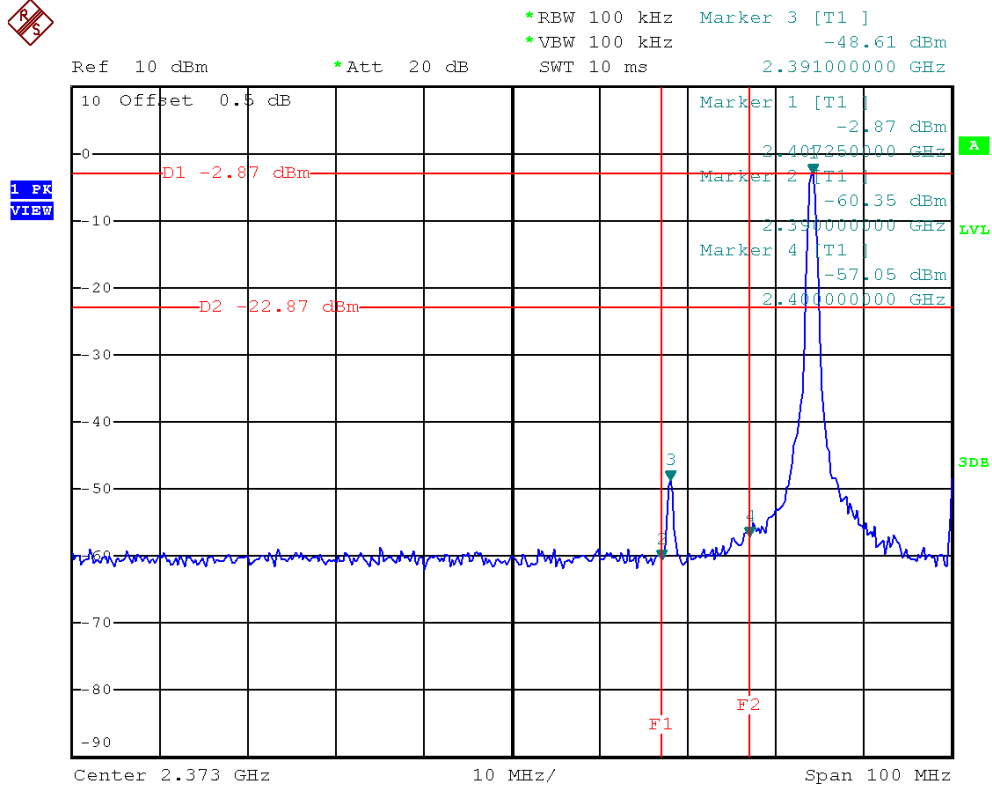


The max. radio frequency power in any 100 kHz bandwidth within the frequency band

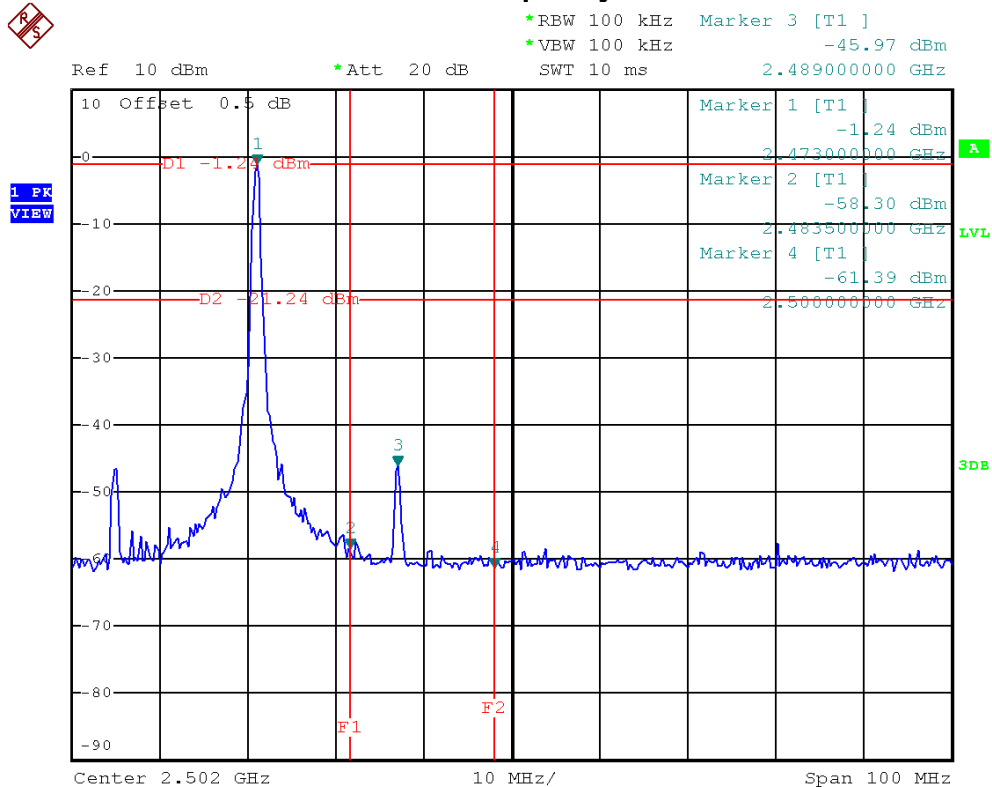




2407 MHz/10 Harmonic of the frequency

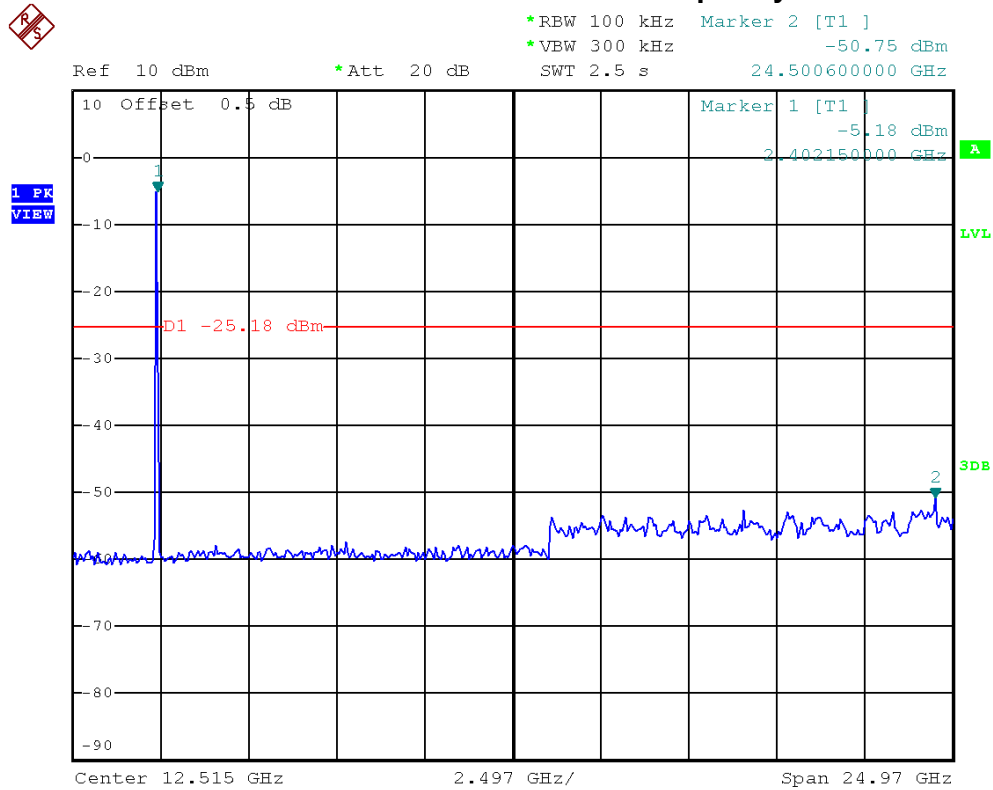


2437 MHz/10 Harmonic of the frequency

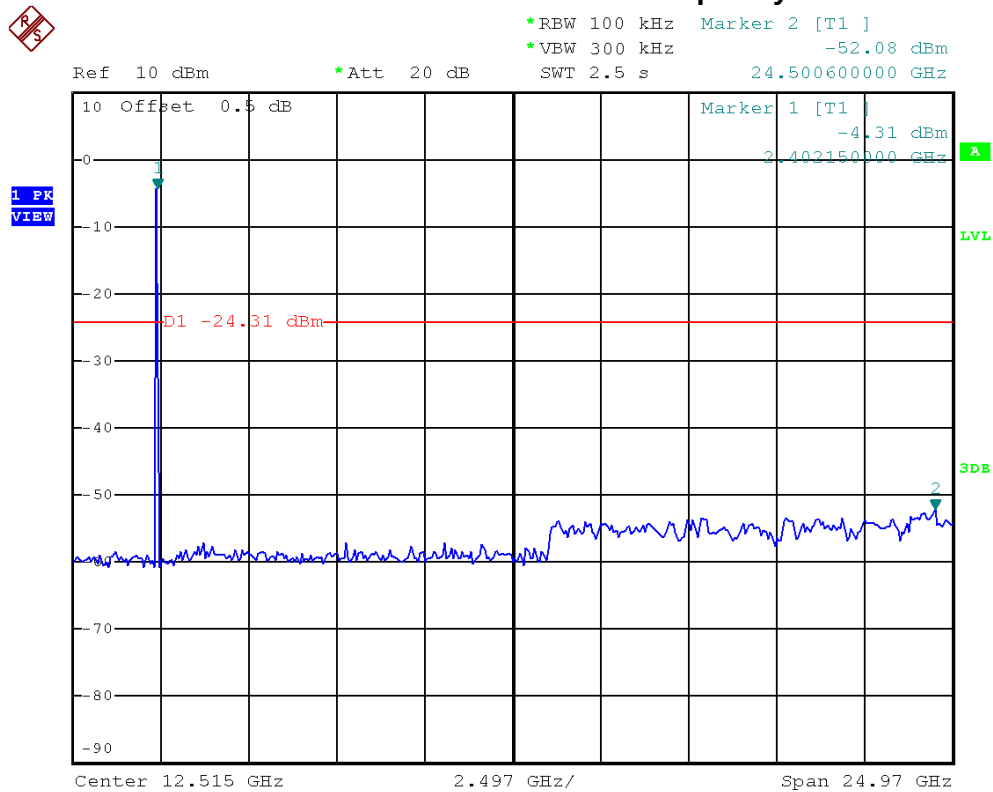



2473 MHz/10 Harmonic of the frequency

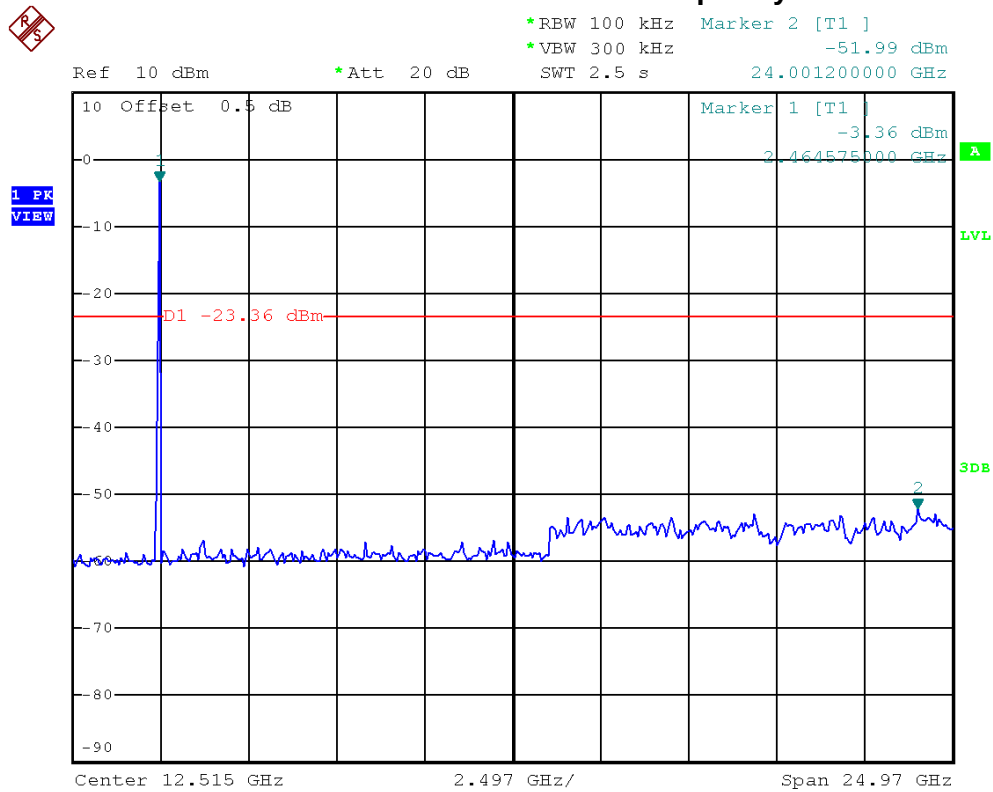



5.6 DB BANDWIDTH

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Bandwidth	2400-2483.5	$\geq 500\text{KHz}$ (6 dB bandwidth)

5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

5.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT



5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




5.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		


Frequency	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
2407 MHz	0.57	1.05	≥ 500 kHz	PASS
2437 MHz	0.57	1.04	≥ 500 kHz	PASS
2473 MHz	0.56	1.04	≥ 500 kHz	PASS

2407 MHz/6 dB and 99% Occupied Bandwidth

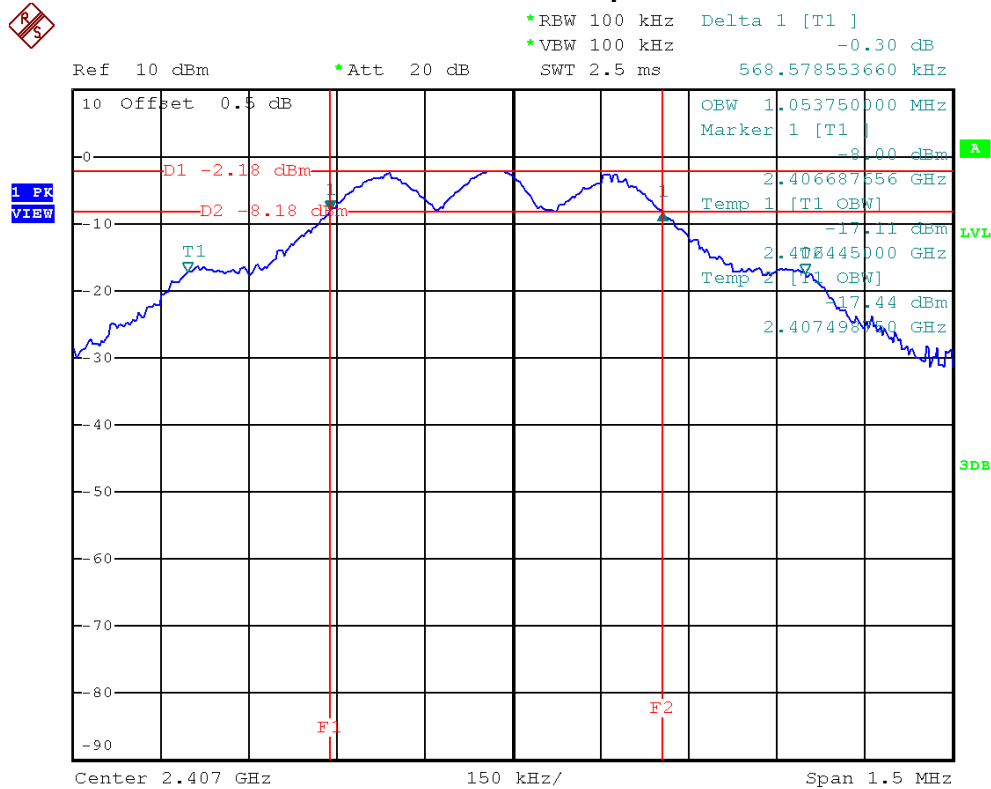




2437 MHz/6 dB and 99% Occupied Bandwidth

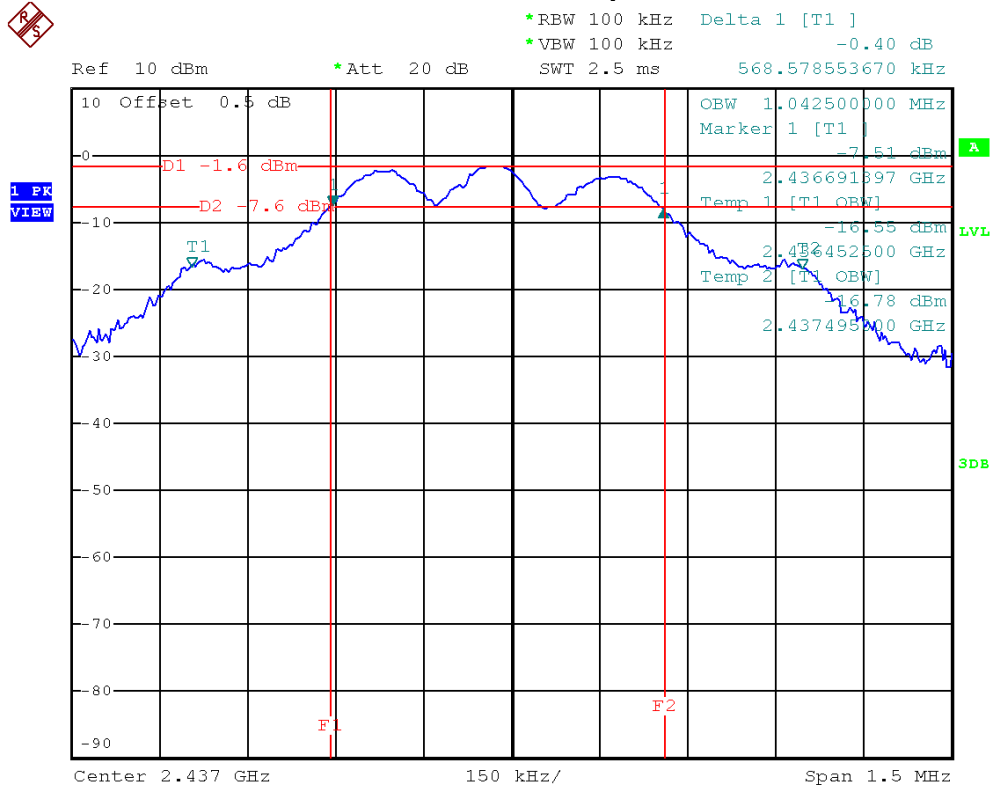

2473 MHz/6 dB and 99% Occupied Bandwidth

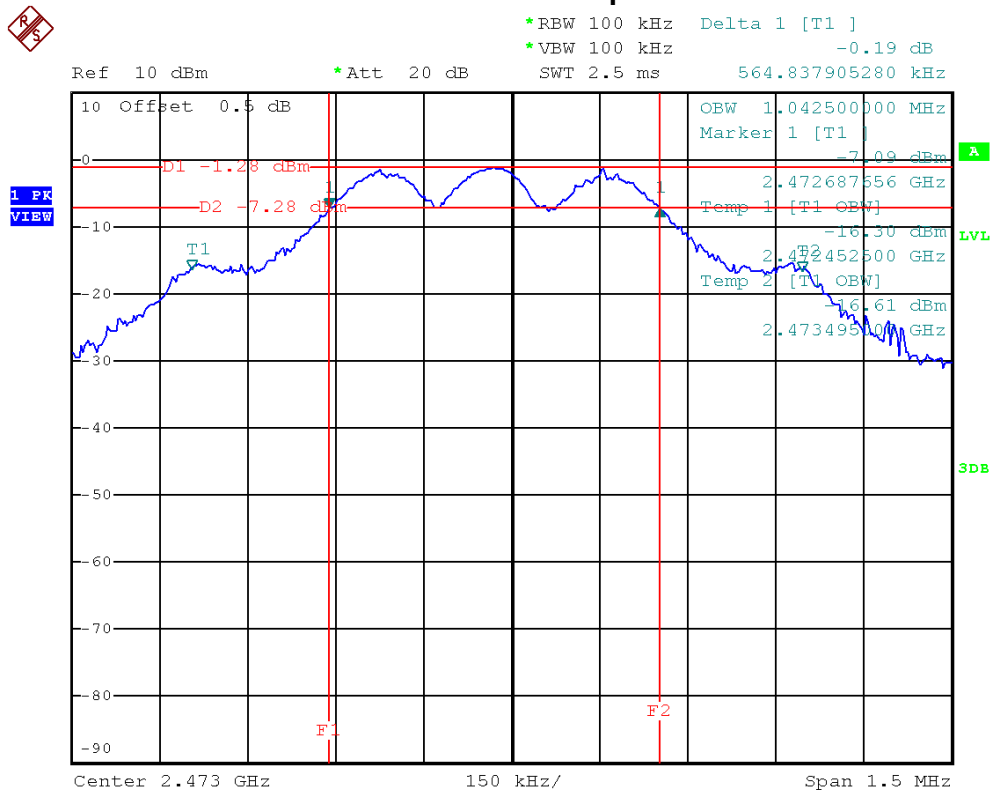



6 MAXIMUM PEAK CONDUCTED OUTPUT POWER

6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

6.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

6.3 TEST PROCEDURES

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

6.4 TEST SETUP LAYOUT



6.5 DEVIATION FROM TEST STANDARD

No deviation

6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2407 MHz	-0.69	30	PASS
2437 MHz	-0.56	30	PASS
2473 MHz	-0.39	30	PASS



7 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

7.1 LIMIT

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

1. The limit for radiated test was performed according to FCC PART 15B.
2. The tighter limit applies at the band edges.
3. Emission level (dBuV/m)=20log Emission level (uV/m).
4. The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	EMC	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 18, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

7.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



7.4 TEST PROCEDURES

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

7.5 DEVIATION FROM TEST STANDARD

No deviation

7.6 TEST SETUP LAYOUT

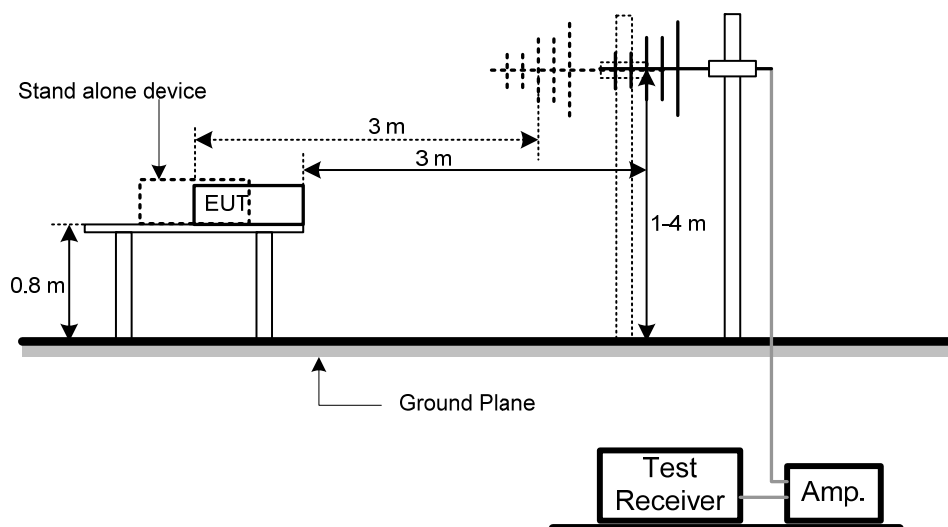



7.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



7.8 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Vertical

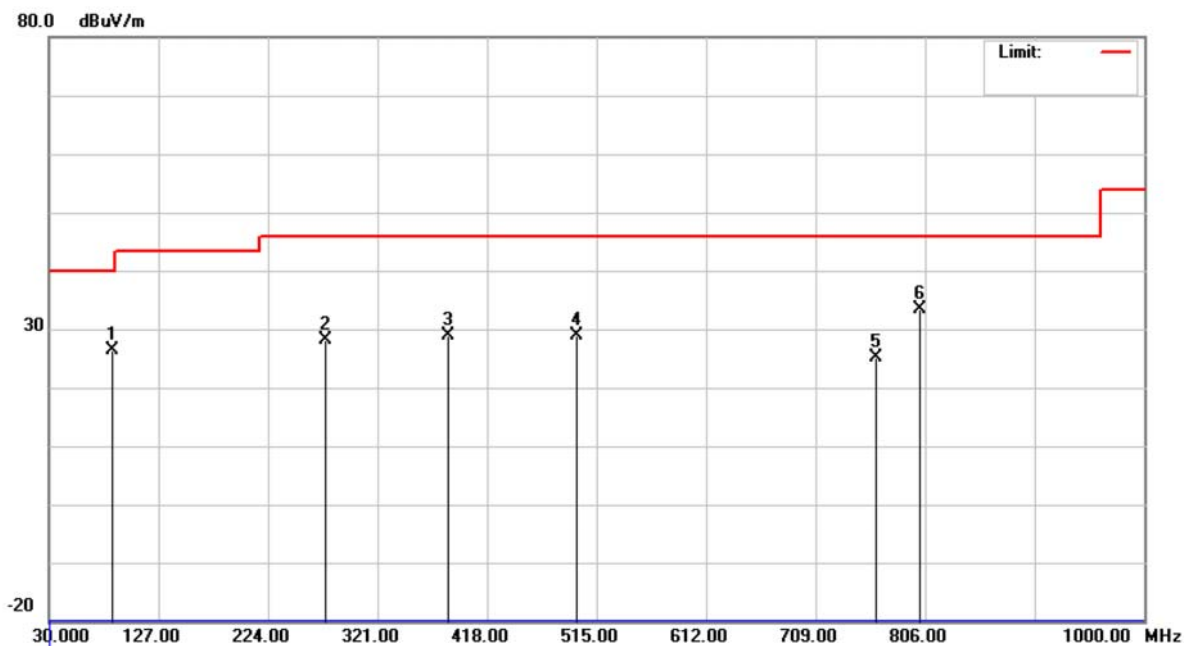


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		85.7750	46.12	-19.62	26.50	40.00	-13.50	peak	
2		274.9249	42.62	-14.40	28.22	46.00	-17.78	peak	
3		384.0499	40.60	-11.75	28.85	46.00	-17.15	peak	
4		498.0249	38.40	-9.50	28.90	46.00	-17.10	peak	
5		762.3499	30.26	-5.22	25.04	46.00	-20.96	peak	
6	*	801.1500	38.15	-4.82	33.33	46.00	-12.67	peak	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Horizontal

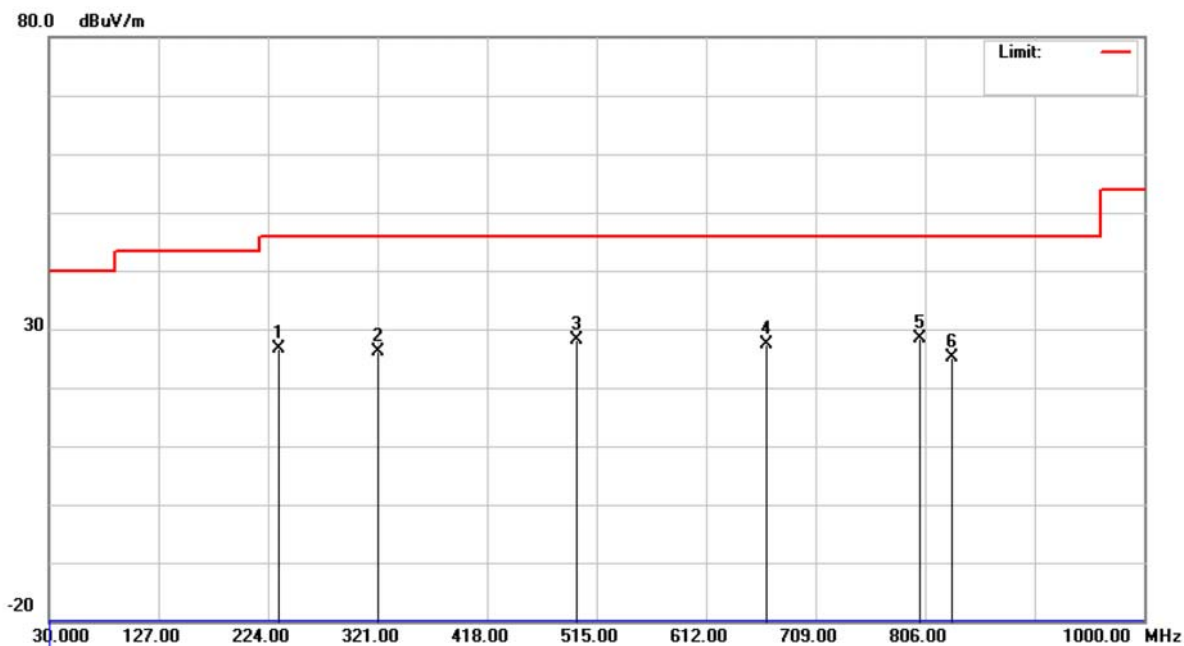

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		233.7000	42.63	-15.99	26.64	46.00	-19.36	peak	
2		321.0000	39.27	-13.08	26.19	46.00	-19.81	peak	
3		498.0250	37.53	-9.50	28.03	46.00	-17.97	peak	
4		665.3500	34.20	-6.76	27.44	46.00	-18.56	peak	
5	*	801.1500	33.21	-4.82	28.39	46.00	-17.61	peak	
6		830.2500	29.55	-4.35	25.20	46.00	-20.80	peak	



8 RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

8.1 LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	N/A	27478LL142	1m	May. 14, 2014
5	Microflex Cable	AISI	S104-SMAP-1	8m	May. 14, 2014
6	Microflex Cable	N/A	27478LL142	3m	May. 14, 2014
7	Test Cable	N/A	LMR-400	966_12m	May. 14, 2014
8	Test Cable	N/A	LMR-400	966_3m	May. 14, 2014
9	Pre-Amplifier	EMC	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 18, 2014

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average



8.4 TEST PROCEDURES

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

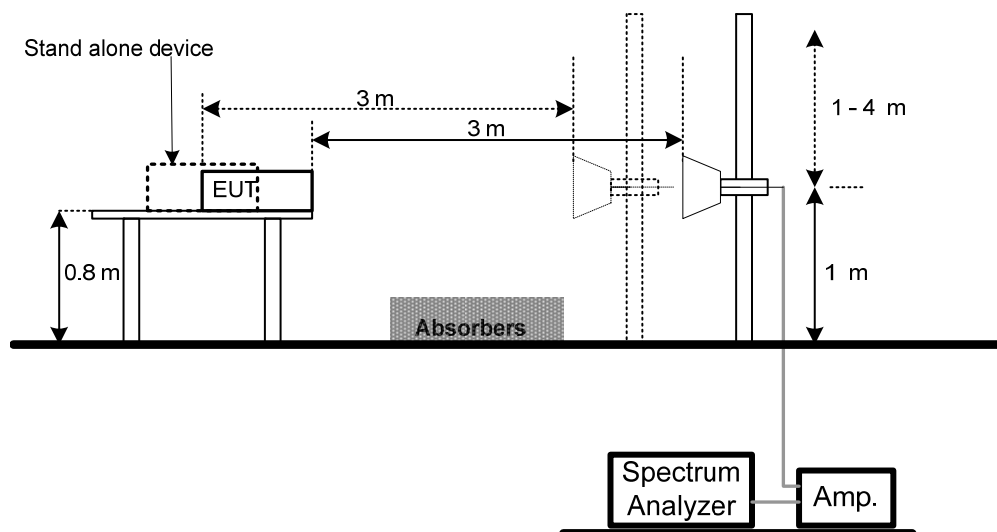



8.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		

Polarization: Vertical

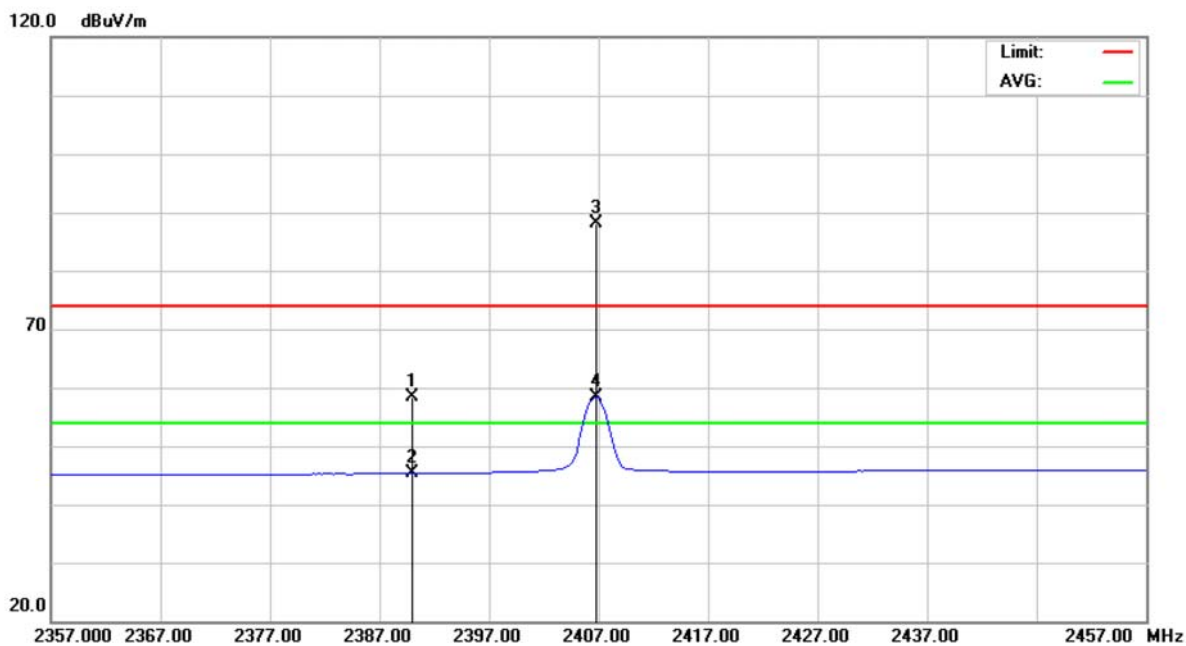


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	26.74	31.67	58.41	74.00	-15.59	peak	
2		2390.000	13.68	31.67	45.35	54.00	-8.65	AVG	
3	*	2406.750	56.50	31.74	88.24	74.00	14.24	peak	
4	X	2406.750	26.57	31.74	58.31	54.00	4.31	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		

Polarization: Vertical

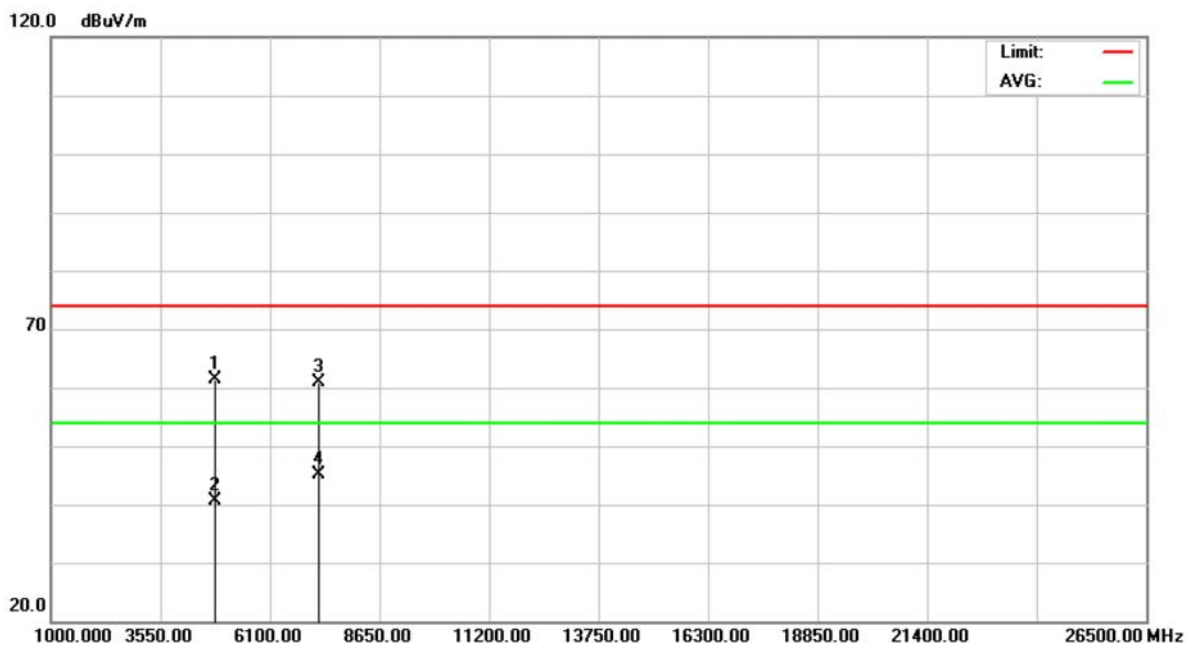


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4813.313	55.79	5.70	61.49	74.00	-12.51	peak	
2		4813.313	34.85	5.70	40.55	54.00	-13.45	AVG	
3		7220.950	48.71	12.23	60.94	74.00	-13.06	peak	
4	*	7220.950	32.86	12.23	45.09	54.00	-8.91	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		

Polarization: Horizontal

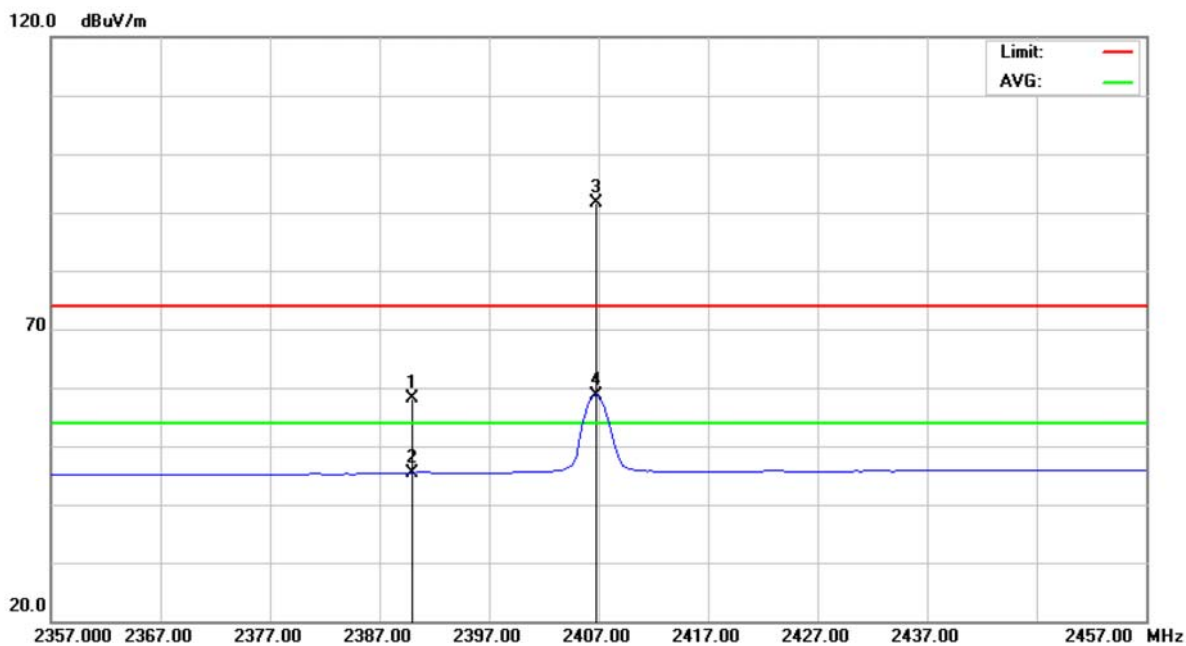


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	26.44	31.67	58.11	74.00	-15.89	peak	
2		2390.000	13.71	31.67	45.38	54.00	-8.62	AVG	
3	*	2406.750	59.98	31.74	91.72	74.00	17.72	peak	
4	X	2406.750	26.87	31.74	58.61	54.00	4.61	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		

Polarization: Horizontal

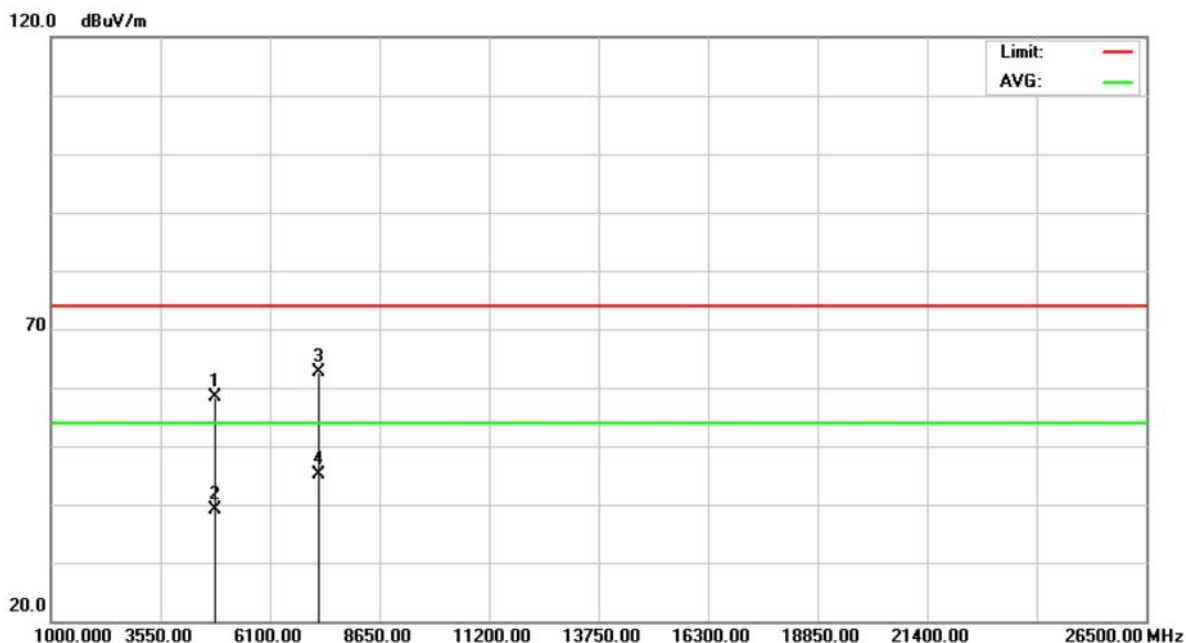


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4812.987	52.70	5.70	58.40	74.00	-15.60	peak	
2		4812.987	33.51	5.70	39.21	54.00	-14.79	AVG	
3		7220.888	50.35	12.23	62.58	74.00	-11.42	peak	
4	*	7220.888	32.89	12.23	45.12	54.00	-8.88	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Vertical

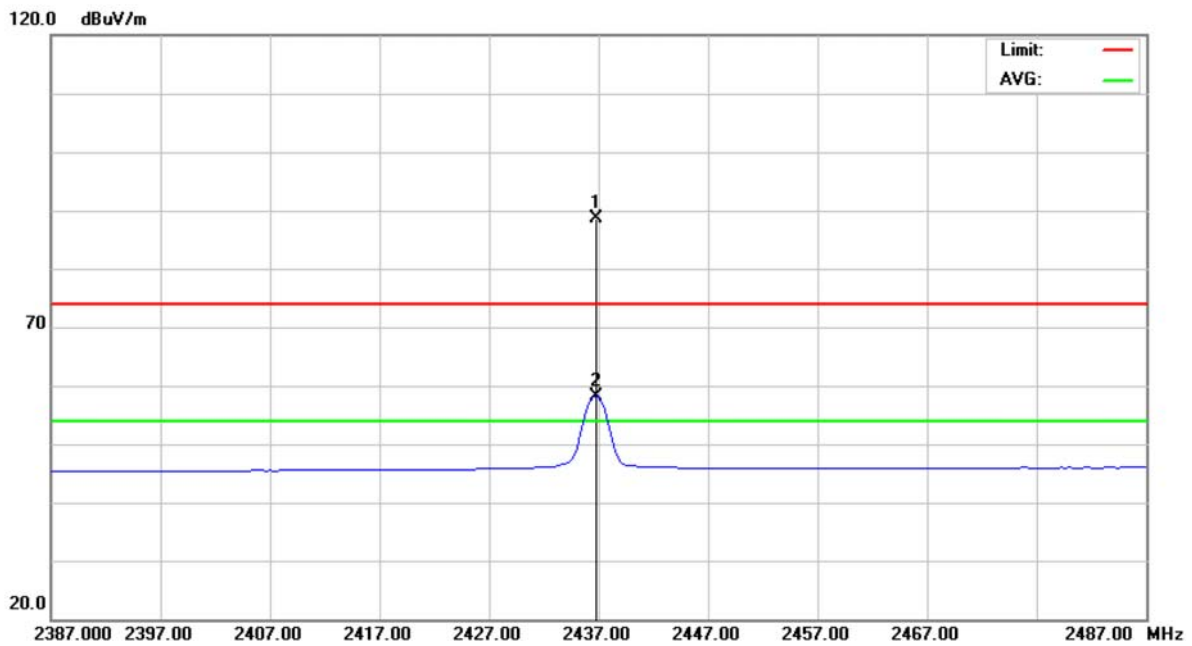


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2436.750	56.76	31.88	88.64	74.00	14.64	peak	
2	X	2436.750	26.36	31.88	58.24	54.00	4.24	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Vertical

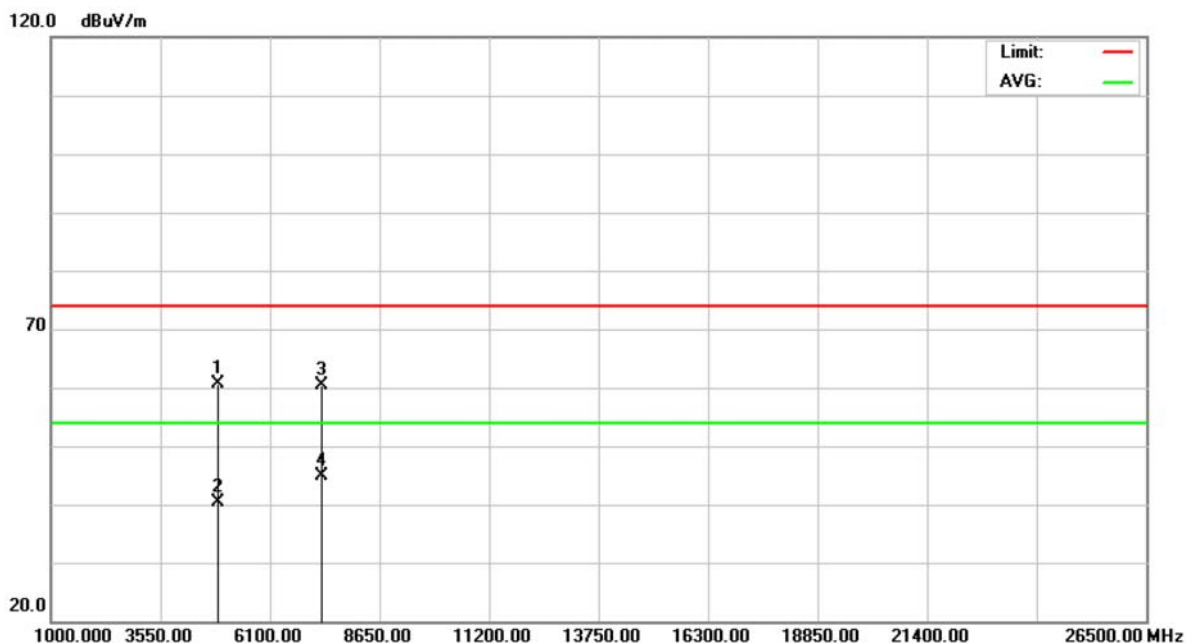


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4873.250	54.93	5.78	60.71	74.00	-13.29	peak	
2		4873.250	34.53	5.78	40.31	54.00	-13.69	AVG	
3		7310.987	47.71	12.57	60.28	74.00	-13.72	peak	
4	*	7310.987	32.22	12.57	44.79	54.00	-9.21	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Horizontal

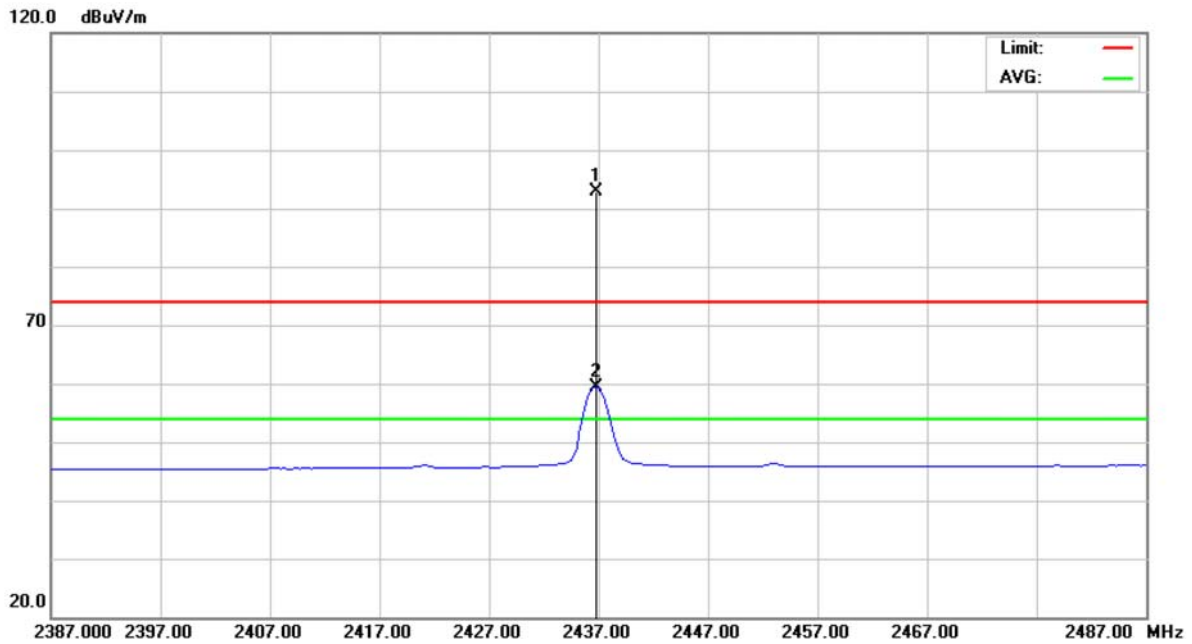


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2436.750	61.01	31.88	92.89	74.00	18.89	peak	
2	X	2436.750	27.55	31.88	59.43	54.00	5.43	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2437 MHz		

Polarization: Horizontal

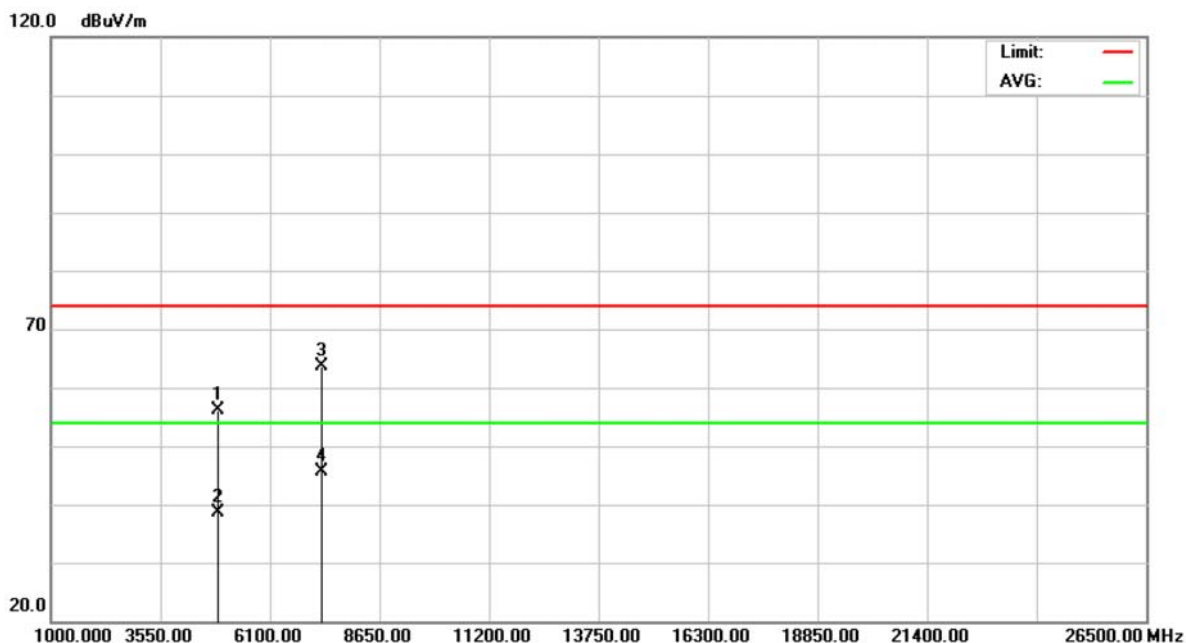


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4872.962	50.28	5.78	56.06	74.00	-17.94	peak	
2		4872.962	32.82	5.78	38.60	54.00	-15.40	AVG	
3		7310.900	51.15	12.57	63.72	74.00	-10.28	peak	
4	*	7310.900	33.01	12.57	45.58	54.00	-8.42	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		

Polarization: Vertical

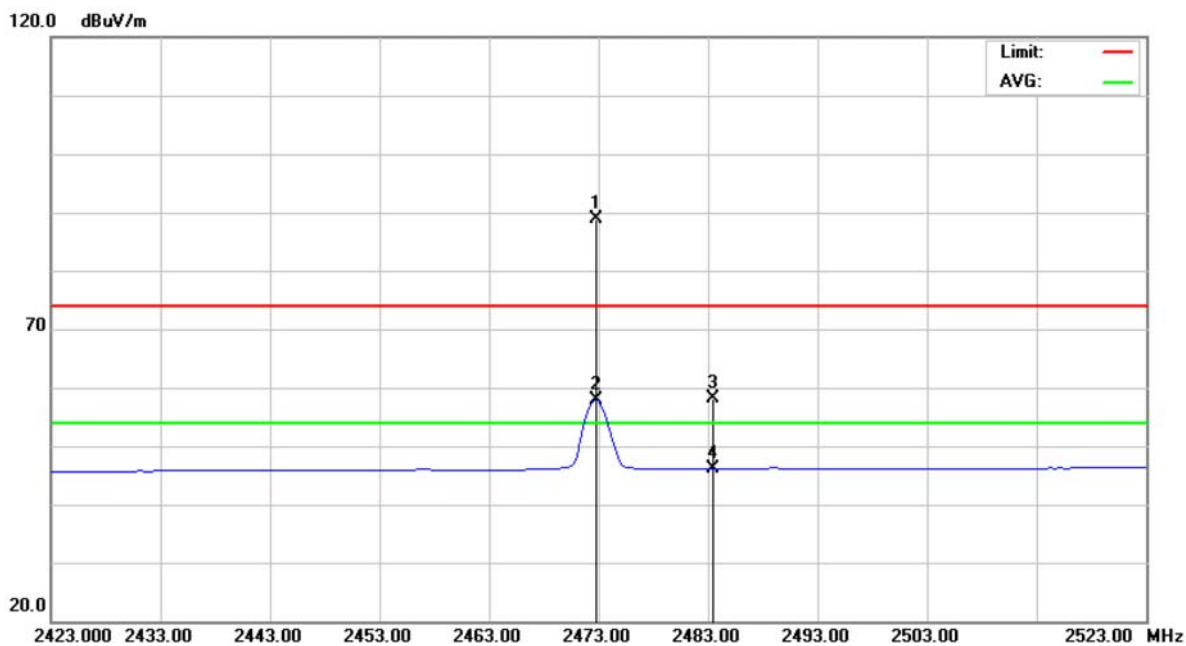


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2472.750	56.81	32.04	88.85	74.00	14.85	peak	
2	X	2472.750	25.73	32.04	57.77	54.00	3.77	AVG	
3		2483.500	26.14	32.09	58.23	74.00	-15.77	peak	
4		2483.500	13.94	32.09	46.03	54.00	-7.97	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		

Polarization: Vertical

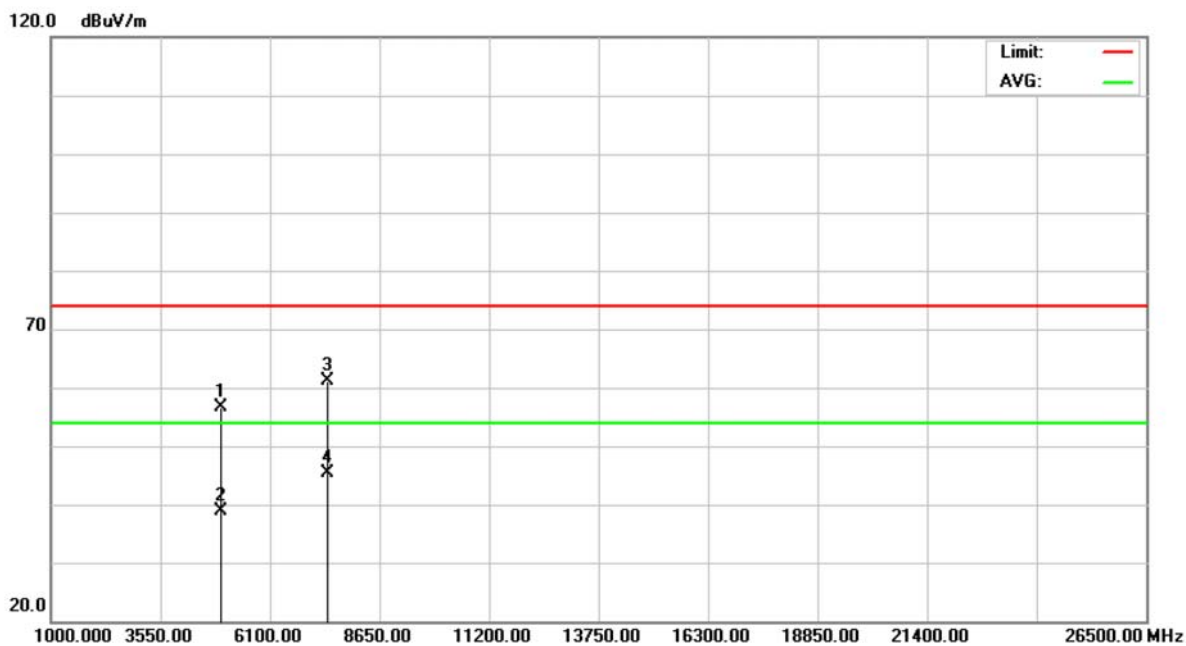


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4945.038	50.69	5.87	56.56	74.00	-17.44	peak	
2		4945.038	32.96	5.87	38.83	54.00	-15.17	AVG	
3		7418.950	48.22	12.97	61.19	74.00	-12.81	peak	
4	*	7418.950	32.46	12.97	45.43	54.00	-8.57	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		

Polarization: Horizontal

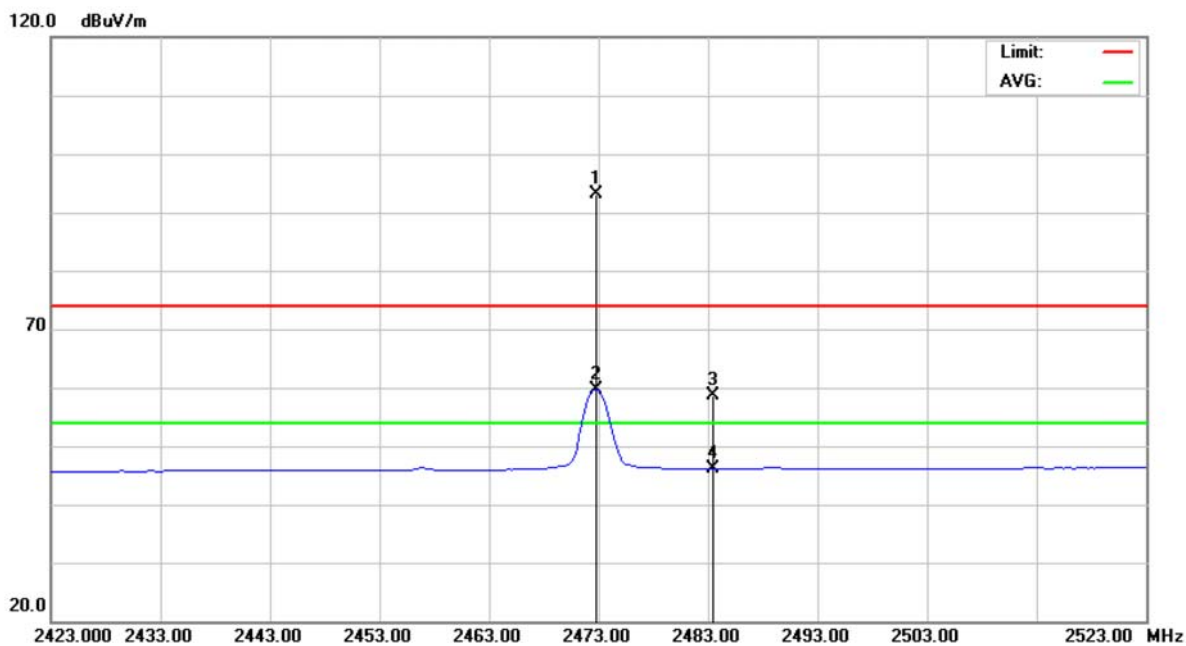


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2472.750	60.99	32.04	93.03	74.00	19.03	peak	
2	X	2472.750	27.65	32.04	59.69	54.00	5.69	AVG	
3		2483.500	26.47	32.09	58.56	74.00	-15.44	peak	
4		2483.500	13.93	32.09	46.02	54.00	-7.98	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		

Polarization: Horizontal

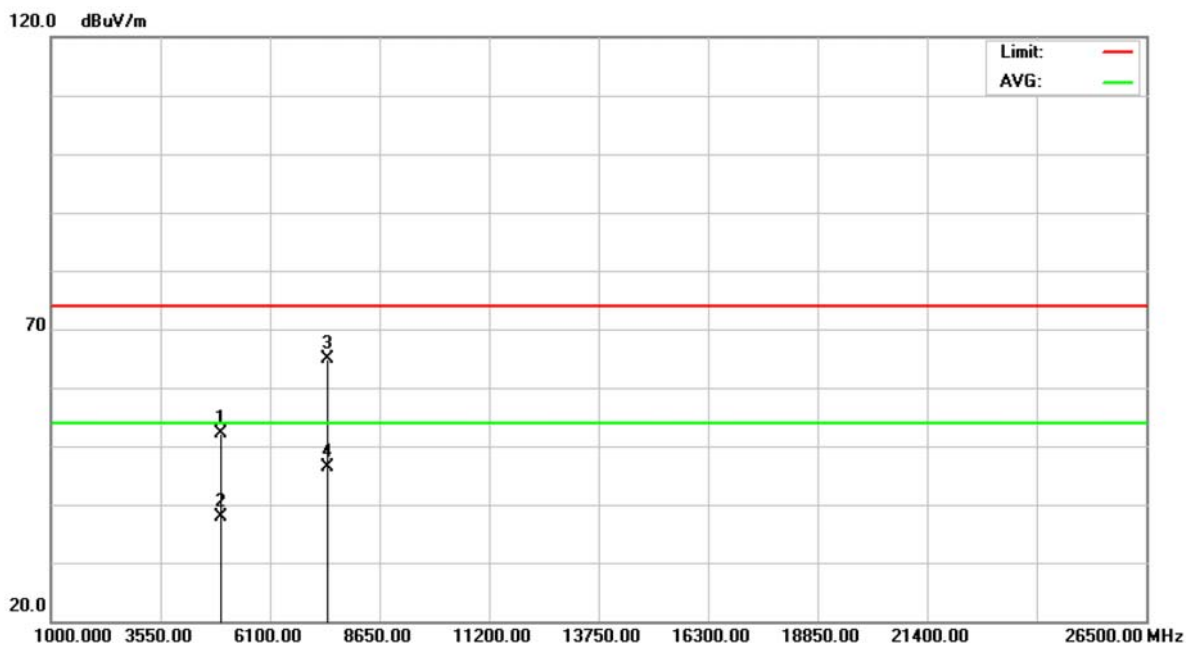


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4945.425	46.26	5.87	52.13	74.00	-21.87	peak	
2		4945.425	31.90	5.87	37.77	54.00	-16.23	AVG	
3		7418.813	51.88	12.97	64.85	74.00	-9.15	peak	
4	*	7418.813	33.50	12.97	46.47	54.00	-7.53	AVG	



8.9 TEST RESULTS (RESTRICTED BANDS)

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Vertical

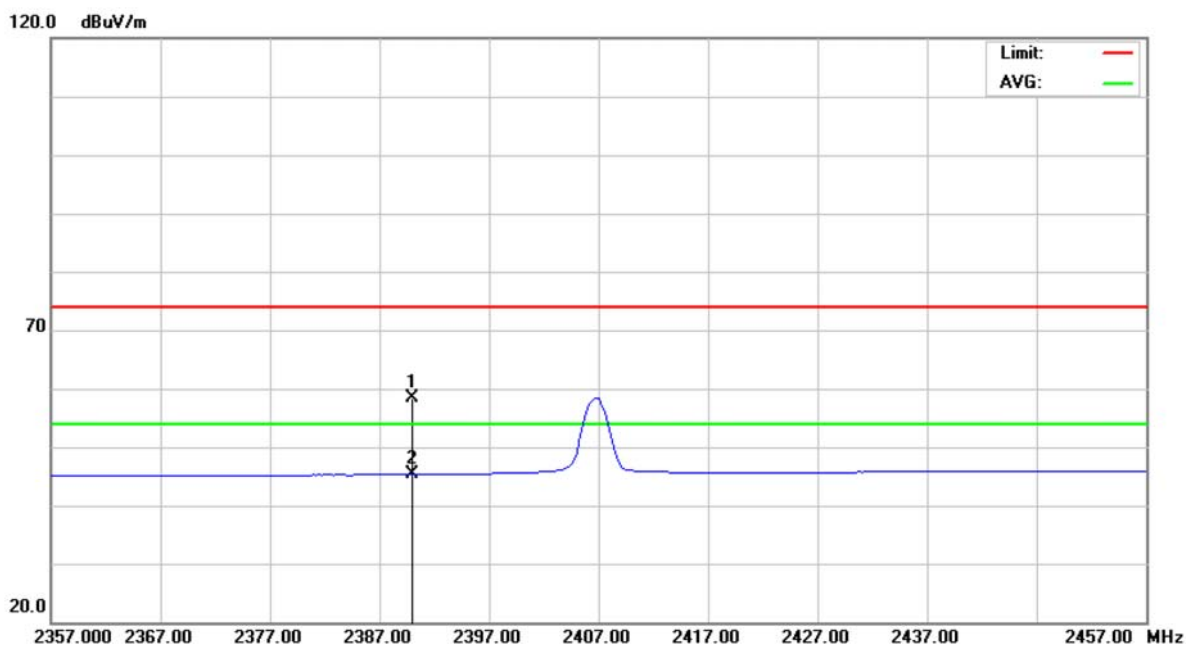


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	26.74	31.67	58.41	74.00	-15.59	peak	
2	*	2390.000	13.68	31.67	45.35	54.00	-8.65	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

Polarization: Horizontal

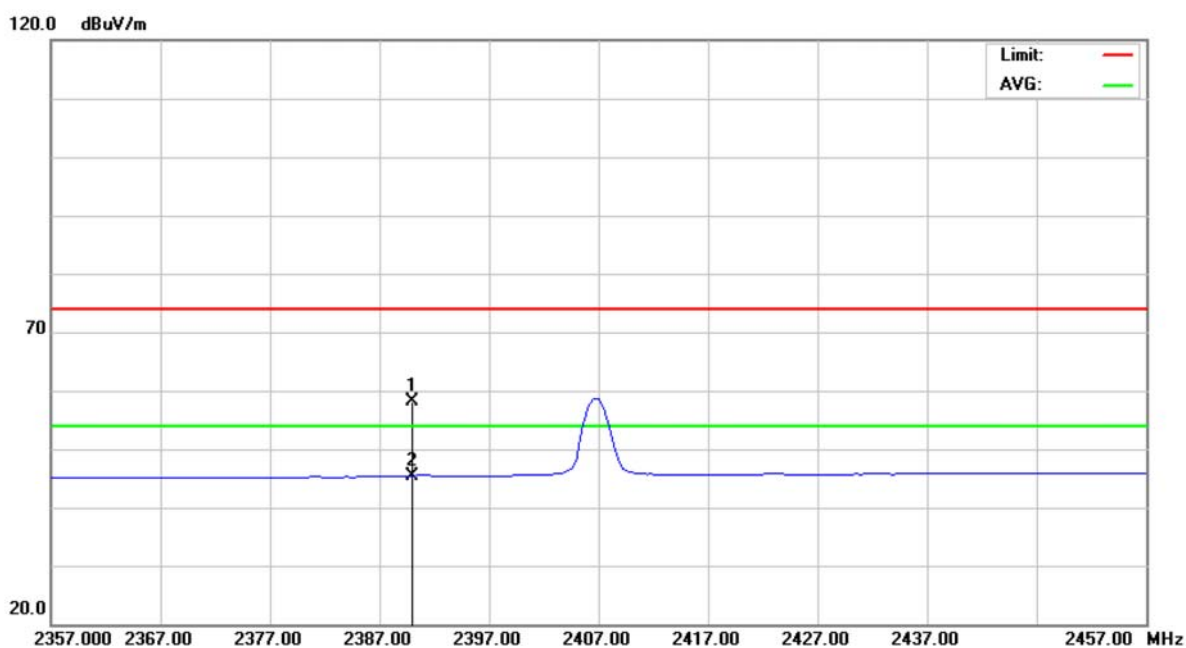


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	26.44	31.67	58.11	74.00	-15.89	peak	
2	*	2390.000	13.71	31.67	45.38	54.00	-8.62	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Vertical

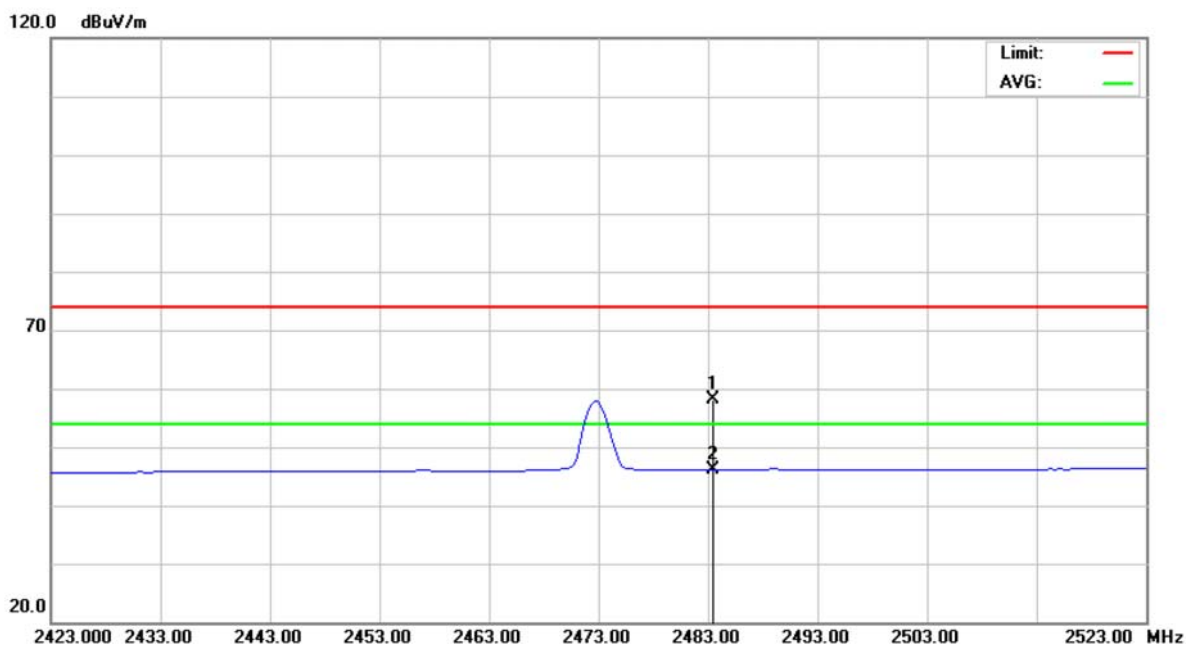


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	26.14	32.09	58.23	74.00	-15.77	peak	
2	*	2483.500	13.94	32.09	46.03	54.00	-7.97	AVG	



E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 1.5V		
Test Mode	2473 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

Polarization: Horizontal

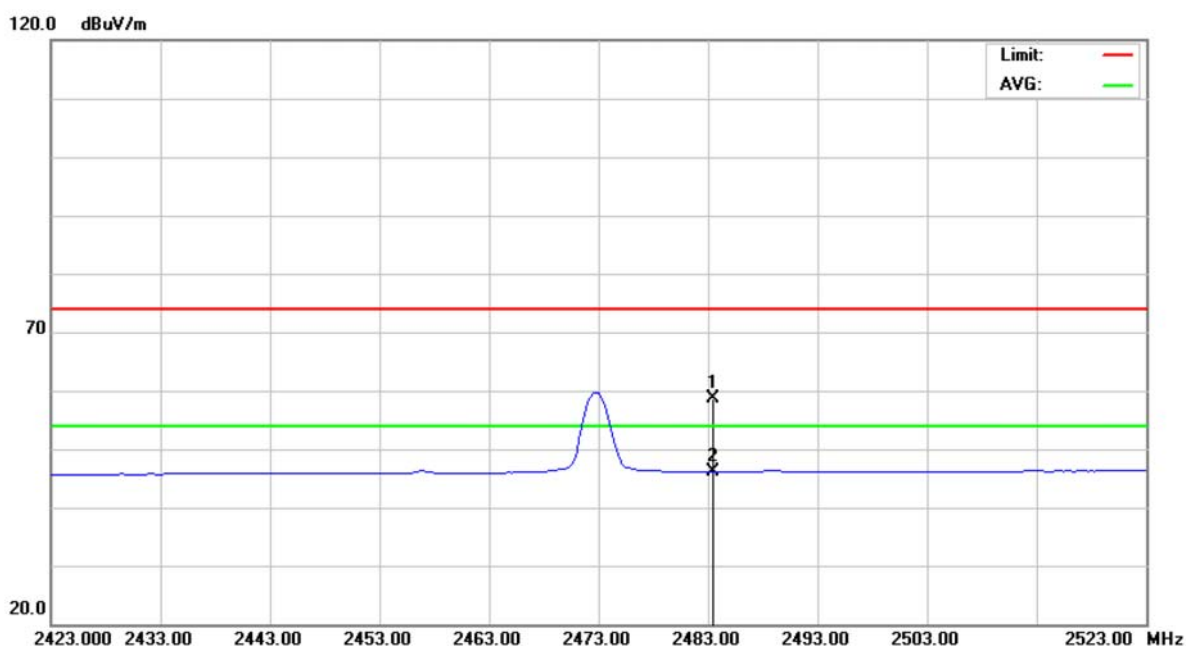

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	26.47	32.09	58.56	74.00	-15.44	peak	
2	*	2483.500	13.93	32.09	46.02	54.00	-7.98	AVG	



9 POWER SPECTRAL DENSITY

9.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Power Spectral Density	2400-2483.5	8 dBm (in any 3 kHz)

9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

9.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=30 kHz, Sweep time = 500s.

9.4 TEST SETUP LAYOUT



9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.




9.7 TEST RESULTS

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2407 MHz	-9.97	8	PASS
2437 MHz	-9.36	8	PASS
2473 MHz	-9.10	8	PASS

2407 MHz/Power Sepctral Density

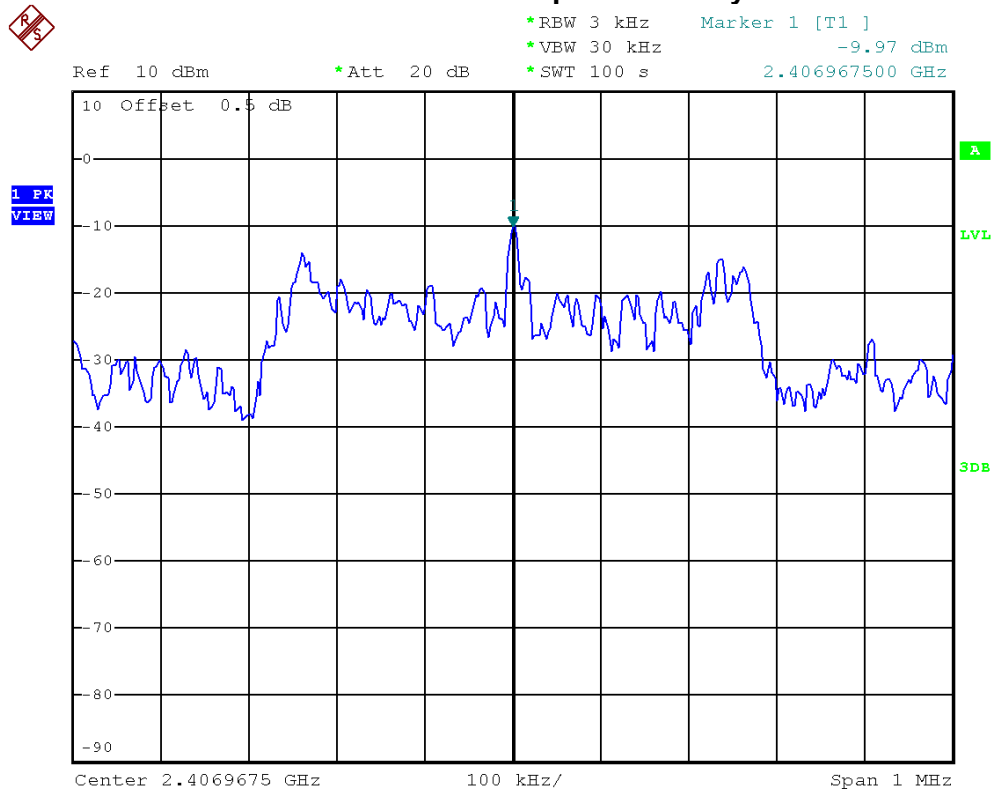




2437 MHz/Power Sepctral Density

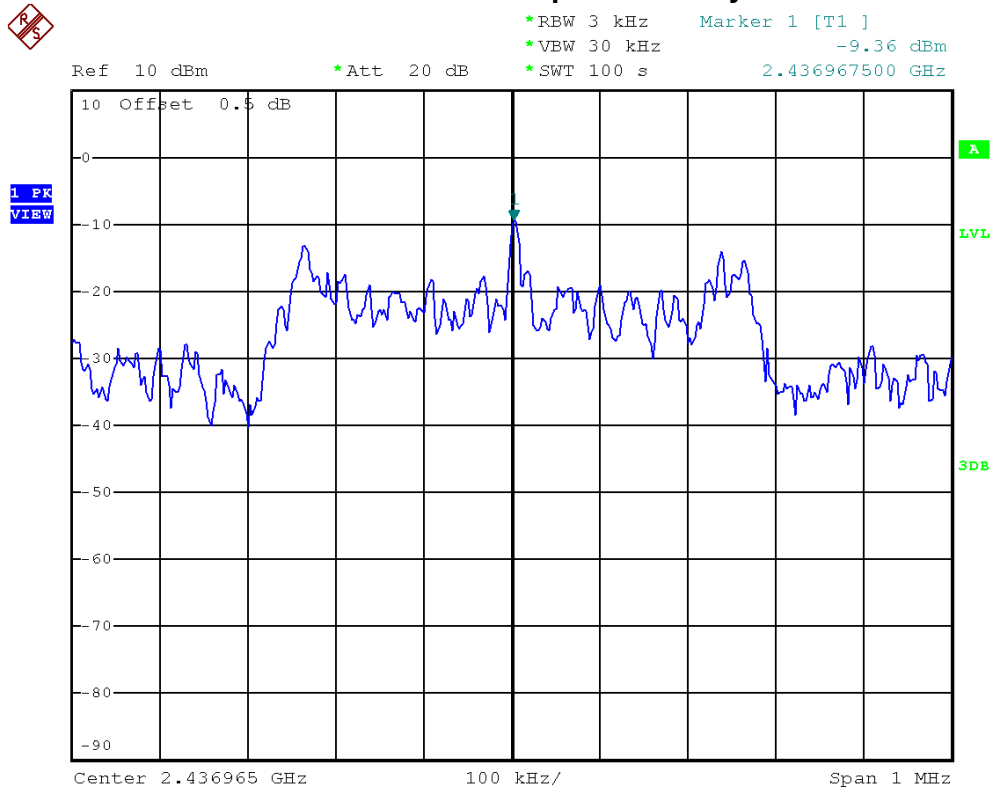

2473 MHz/Power Sepctral Density

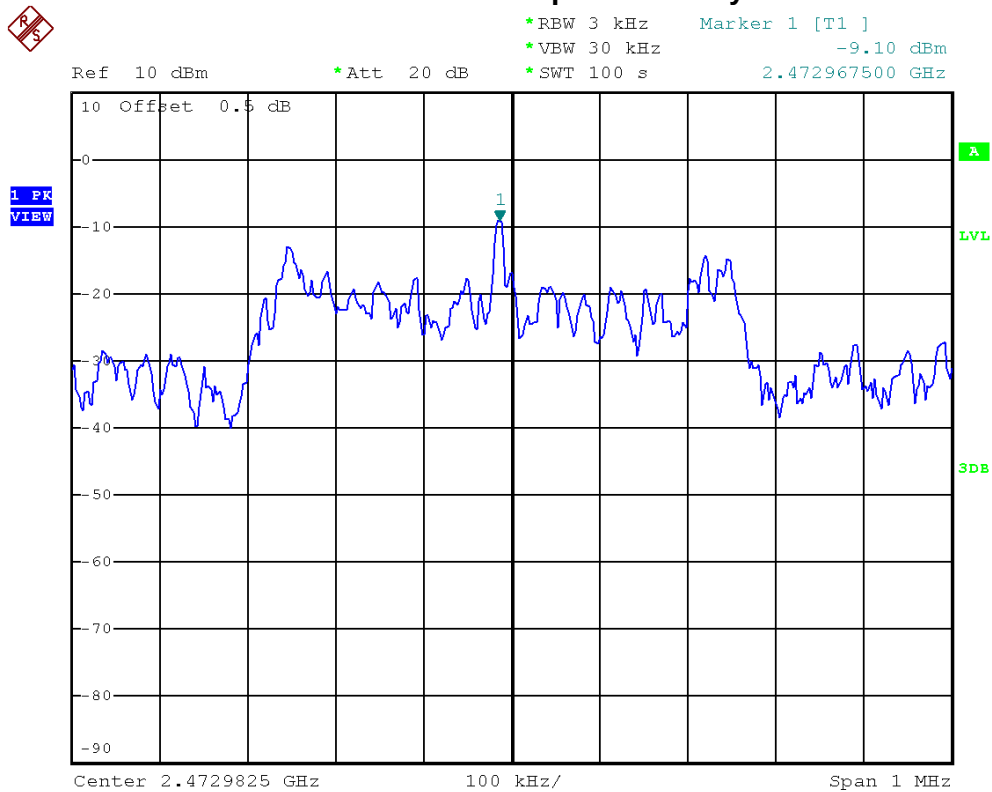



10 RF EXPOSURE COMPLIANCE

10.1 LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

NOTE: f = frequency in MHz ; *Plane-wave equivalent power density.

10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,26,2014
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,26,2014

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

10.3 MPE CALCULATION METHOD

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)


The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained



10.4 TEST SETUP LAYOUT



10.5 DEVIATION FROM TEST STANDARD

No deviation

10.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



10.7 TEST RESULTS

The power is too low, so no RF calculations are needed.

E.U.T	2.4G RF Mouse	Model Name	G3-300N
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 1.5V		
Test Mode	2407 MHz, 2437 MHz, 2473 MHz		

Frequency	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Result
2407 MHz	-3.24	0.4742	-0.6900	0.8531	0.000081	1	PASS
2437 MHz	-3.24	0.4742	-0.5600	0.8790	0.000083	1	PASS
2473 MHz	-3.24	0.4742	-0.3900	0.9141	0.000086	1	PASS