

FCC Radio Test Report

FCC ID: H8GRT62A

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1705011
Equipment : 2.4G RF Gaming Mouse
Test Model : RT62
Serial Model : RT62-1, RT62a, RT62ma
Applicant : A-FOUR TECH CO.,LTD.
Address : 6F., No.108, Min-Chuan Rd., Xindian Dist., New Taipei City, Taiwan R.O.C.

Date of Receipt : May 05, 2017
Date of Test : May 05, 2017 ~ Jun. 03, 2017
Issued Date : Jun. 06, 2017
Tested by : BTL Inc.

Testing Engineer :

Rush Kao

(Rush Kao)

Technical Manager :

James Chiu

(James Chiu)

Authorized Signatory :

Andy Chiu

(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	20
5 . BANDWIDTH TEST	21
5.1 TEST PROCEDURE	21
5.2 DEVIATION FROM STANDARD	21
5.3 TEST SETUP	21
5.4 EUT OPERATION CONDITIONS	21
5.5 EUT TEST CONDITIONS	21
5.6 TEST RESULTS	21
6 . MEASUREMENT INSTRUMENTS LIST	22
7 . EUT TEST PHOTO	23

Table of Contents	Page
ATTACHMENT A - CONDUCTED EMISSION	27
ATTACHMENT B -RADIATED EMISSION (9KHZ TO 30MHZ)	30
ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)	35
ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)	38
ATTACHMENT E - BANDWIDTH	51

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1705011	Original Issue.	Jun. 06, 2017

1. CERTIFICATION

Equipment : 2.4G RF Gaming Mouse
Brand Name :  
Test Model : RT62
Serial Model : RT62-1, RT62a, RT62ma
Applicant : A-FOUR TECH CO.,LTD.
Date of Test : May 05, 2017 ~ Jun. 03, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.249) / ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1705011) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.249)			
Standard(s) Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.205	Restricted Band of Operation	PASS	
15.209 15.249(a)	Radiated Emissions	PASS	
15.215(c)	20dB Bandwidth Test	PASS	

NOTE:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:355421; FCC DN:TW1099)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U, (dB)
C05	CISPR	150 kHz ~ 30MHz	3.06

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.76
		30MHz ~ 200MHz	H	4.28
		200MHz ~ 1,000MHz	V	5.08
		200MHz ~ 1,000MHz	H	4.50

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.48
		1GHz ~ 6GHz	H	4.50
		6GHz ~ 18GHz	V	4.30
		6GHz ~ 18GHz	H	4.14

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.72
		26.5 ~ 40 GHz	5.20

Note: unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz: 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .

3. GENERAL INFORMATION

3.1 DESCRIPTION OF EUT

Product Name	2.4G RF Gaming Mouse		
Brand	bloodY,  ,  , A4Tech		
Test Model	RT62		
Series Model	RT62-1, RT62a, RT62ma		
Model Difference	Different model distribute to different area.		
Product Description	Operation Frequency	2404.5-2477.5 MHz	
	Modulation Technology	GFSK	
	Bit Rate of Transmitter	1 Mbps	
	Field Strength	90.25 dBuV/m (AVG Max) 100.13 dBuV/m (Peak Max)	
Power Source	#1 Supplied from battery. #2 Supplied from USB DC Source.		
EUT Power Rating	#1 DC 3.7V/15mA(Capacity:600mAh) #2 DC 5V/300mA		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2404.5	13	2440
02	2406.5	14	2442.5
03	2409	15	2444.5
04	2411	16	2450.5
05	2413	17	2453
06	2419	18	2455
07	2421.5	19	2457.5
08	2423.5	20	2467.5
09	2426	21	2472.5
10	2428	22	2475.5
11	2436	23	2477.5
12	2438		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	1.31

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:



For Conducted Test	
Final Test Mode	Description

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

(1) The measurements are performed at the high, middle, low available channels.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

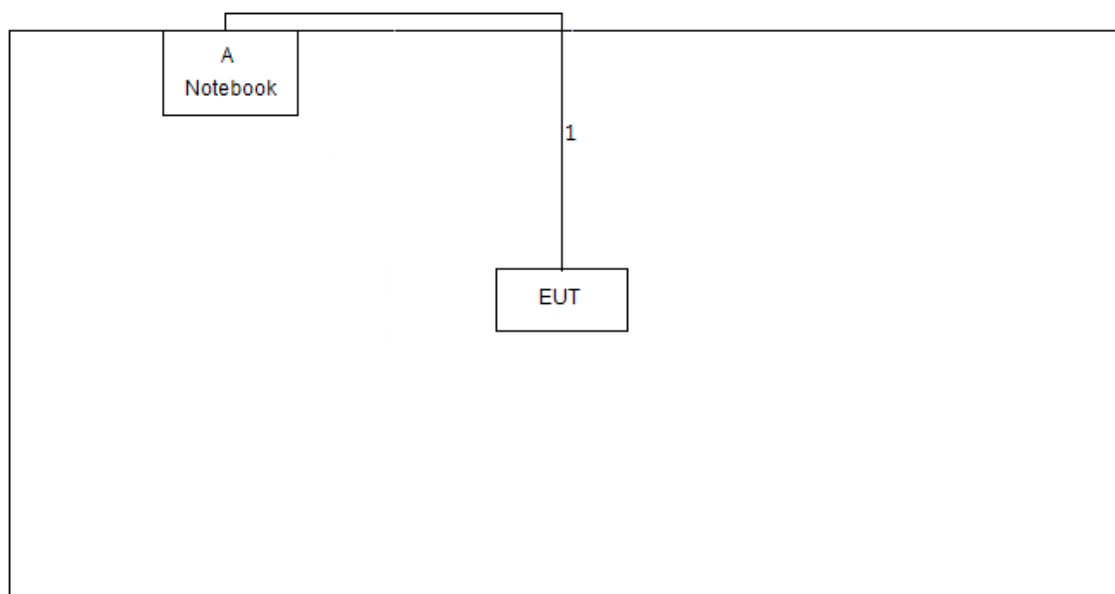

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook PC	LENOVO	TP00052A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	2m	USB Cable

Note:

(1) The support equipment was authorized by Declaration of Conformity (DOC).

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

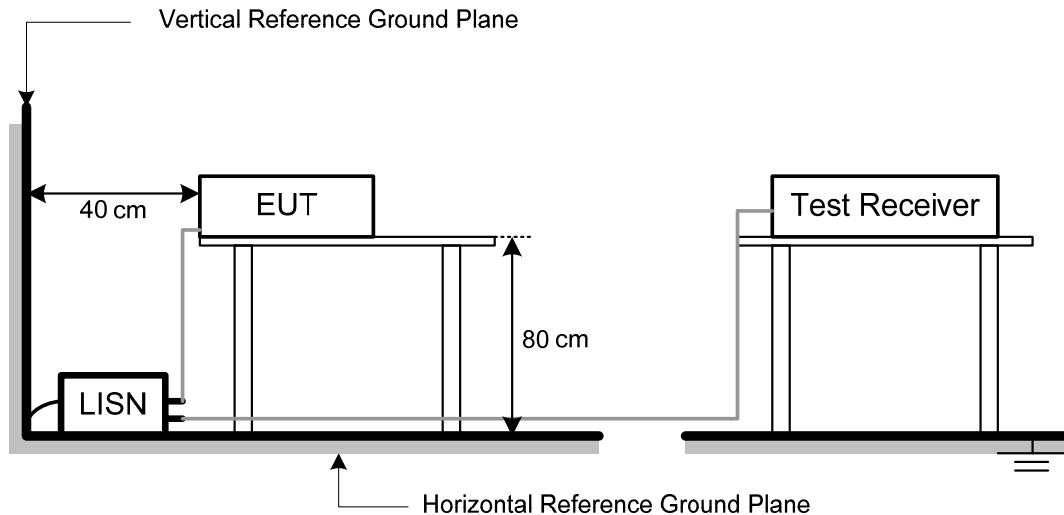

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “ N/A ” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.209)

FREQUENCY (MHz)	(dBuV/m) (at 3m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC Part 15.249)

FCC Part15 (15.249) , Subpart C	
Limit	Frequency Range(MHz)
Field strength of fundamental 50000 μ V/m (94 dB μ V/m) @ 3 m	2400-2483.5
Field strength of harmonics 500 μ V/m (54 dB μ V/m) @ 3 m	Above 2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

DUTY CYCLE: TX 2405.5 MHz (1 Mbps)

Duty Cycle = ON/(ON+OFF)

ON: = 0 msec


ON+OFF (total time): 0 msec

Duty Cycle: 100 %

AV = PK + 20 log(Duty Factor)

AV = PK + 0

Total time (ON+OFF) = 0 msec, ON = 0 msec

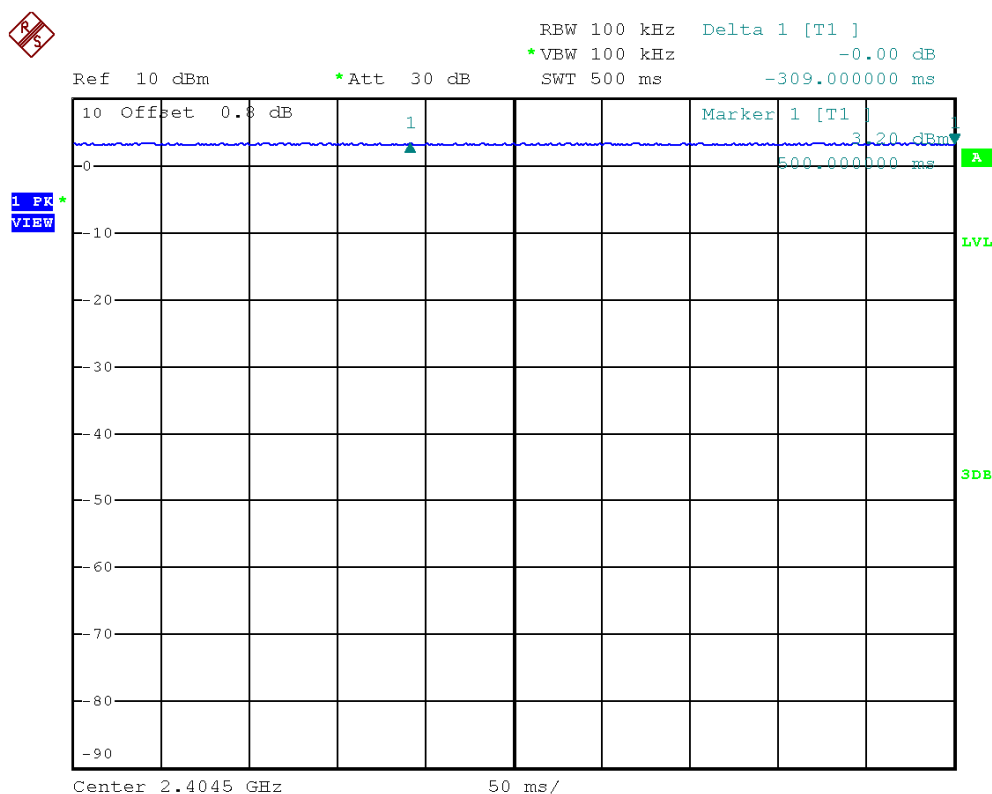

Date: 3.JUN.2017 16:10:47

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

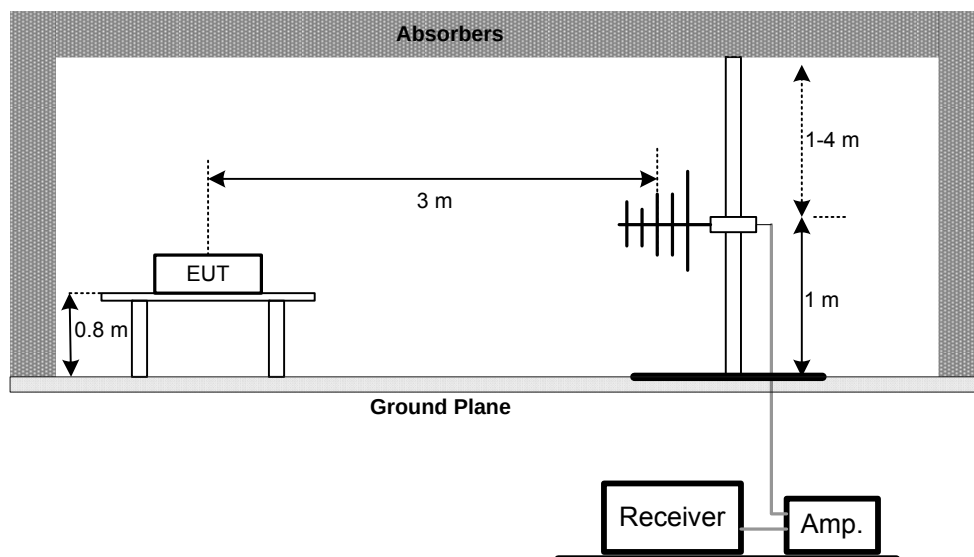

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

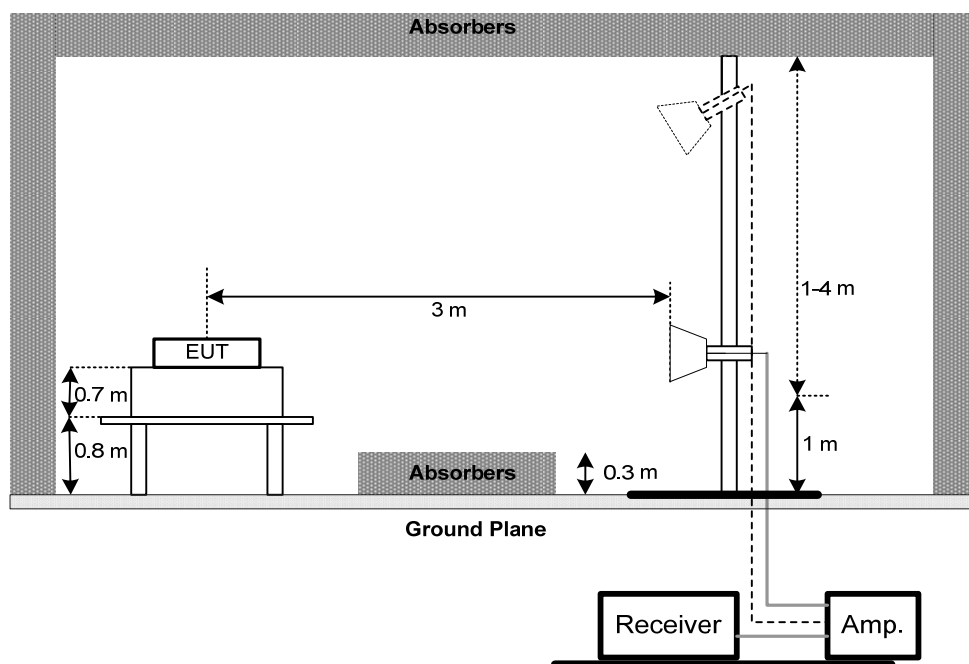

(C) For radiated emissions below 30MHz

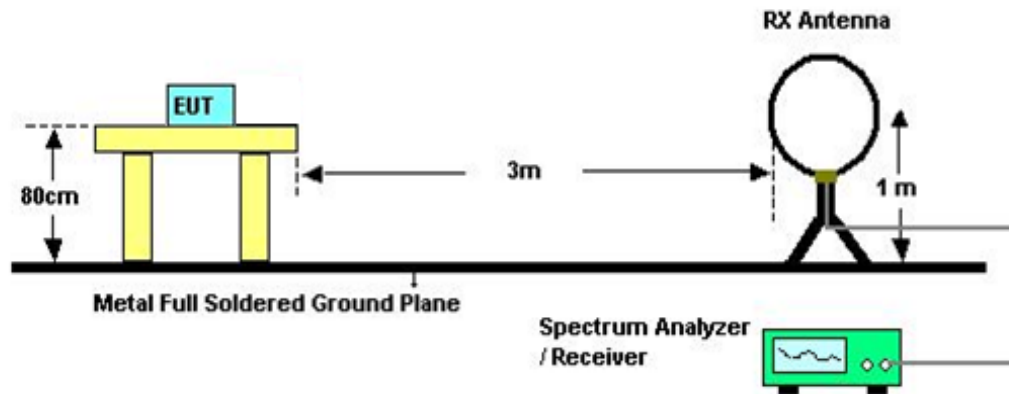

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 23°C

Relative Humidity: 70%

Test Voltage: DC 3.7V

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Attachment C.

Remark:

- (1) Measuring frequency range from 30MHz to 1000MHz.
- (2) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:
"X" - denotes Laid on Table, "Y" - denotes Vertical Stand, "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.2 DEVIATION FROM STANDARD

No deviation.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.7V

5.6 TEST RESULTS

Please refer to the Attachment E.

6. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2018
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 15, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2017
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 29, 2017
3	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 04, 2018
4	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 04, 2018
5	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 04, 2018
6	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 09, 2018
7	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
8	Loop Ant	EMCO	6502	42960	Nov. 24, 2017
9	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
10	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 16, 2018
11	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 16, 2018

Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

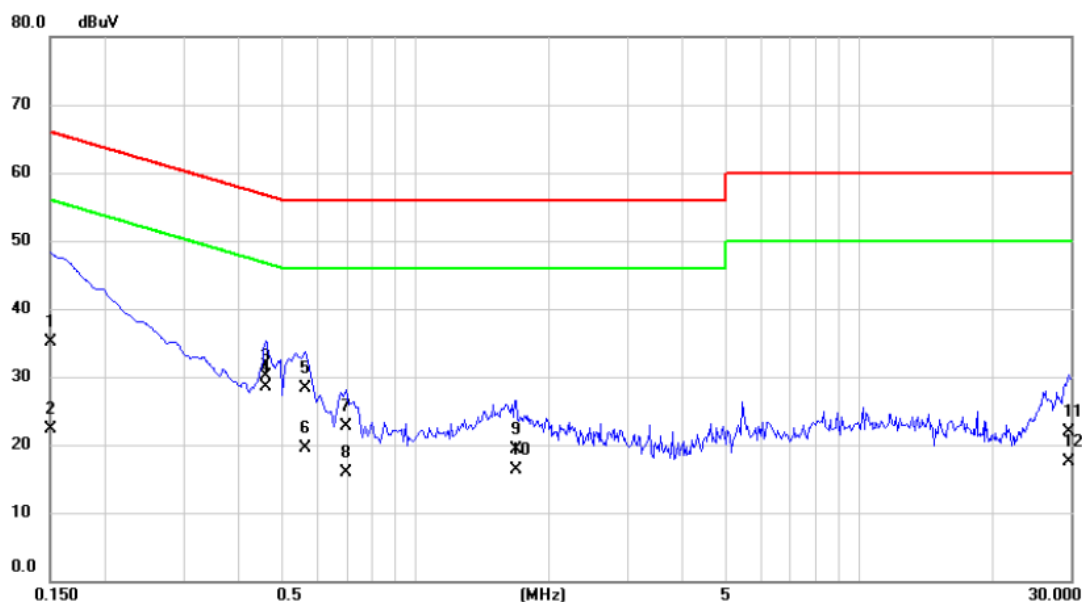

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	25.40	9.76	35.16	66.00	-30.84	QP	
2		0.1500	12.60	9.76	22.36	56.00	-33.64	AVG	
3		0.4594	20.30	9.76	30.06	56.70	-26.64	QP	
4	*	0.4594	18.80	9.76	28.56	46.70	-18.14	AVG	
5		0.5630	18.50	9.77	28.27	56.00	-27.73	QP	
6		0.5630	9.80	9.77	19.57	46.00	-26.43	AVG	
7		0.6980	12.90	9.78	22.68	56.00	-33.32	QP	
8		0.6980	6.10	9.78	15.88	46.00	-30.12	AVG	
9		1.6880	9.50	9.82	19.32	56.00	-36.68	QP	
10		1.6880	6.50	9.82	16.32	46.00	-29.68	AVG	
11		29.7500	12.00	9.87	21.87	60.00	-38.13	QP	
12		29.7500	7.60	9.87	17.47	50.00	-32.53	AVG	

Test Mode: TX Mode

Neutral

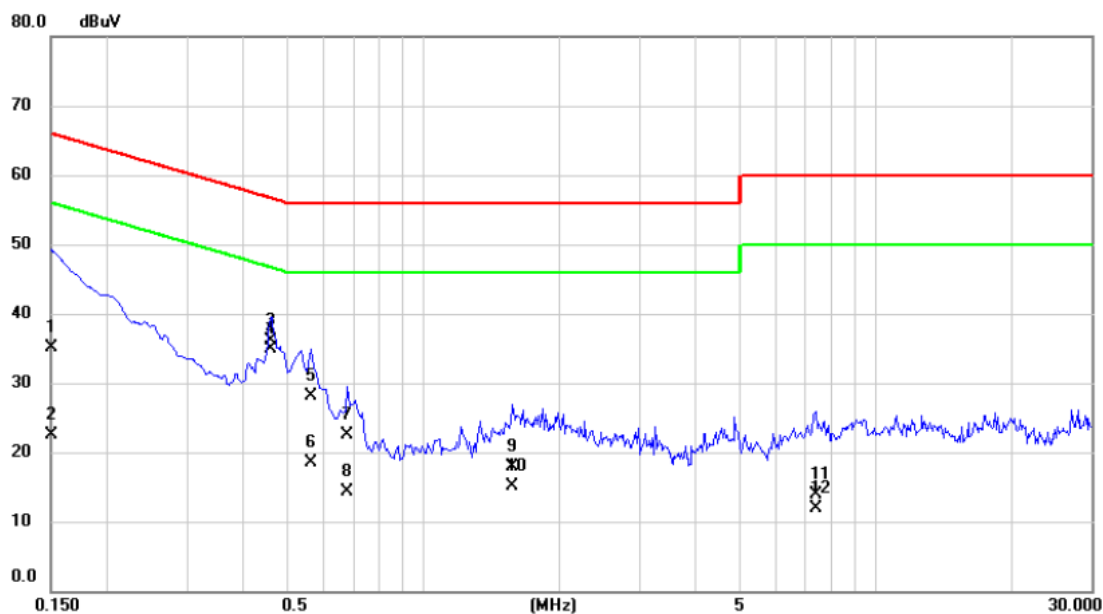


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	25.40	9.68	35.08	66.00	-30.92	QP	
2		0.1500	12.90	9.68	22.58	56.00	-33.42	AVG	
3		0.4608	26.40	9.70	36.10	56.68	-20.58	QP	
4	*	0.4608	25.20	9.70	34.90	46.68	-11.78	AVG	
5		0.5630	18.40	9.71	28.11	56.00	-27.89	QP	
6		0.5630	8.80	9.71	18.51	46.00	-27.49	AVG	
7		0.6800	12.80	9.71	22.51	56.00	-33.49	QP	
8		0.6800	4.50	9.71	14.21	46.00	-31.79	AVG	
9		1.5710	8.20	9.77	17.97	56.00	-38.03	QP	
10		1.5710	5.30	9.77	15.07	46.00	-30.93	AVG	
11		7.4000	4.00	9.91	13.91	60.00	-46.09	QP	
12		7.4000	1.90	9.91	11.81	50.00	-38.19	AVG	

ATTACHMENT B -RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode	TX Mode_2405 MHz
-----------	------------------


Open

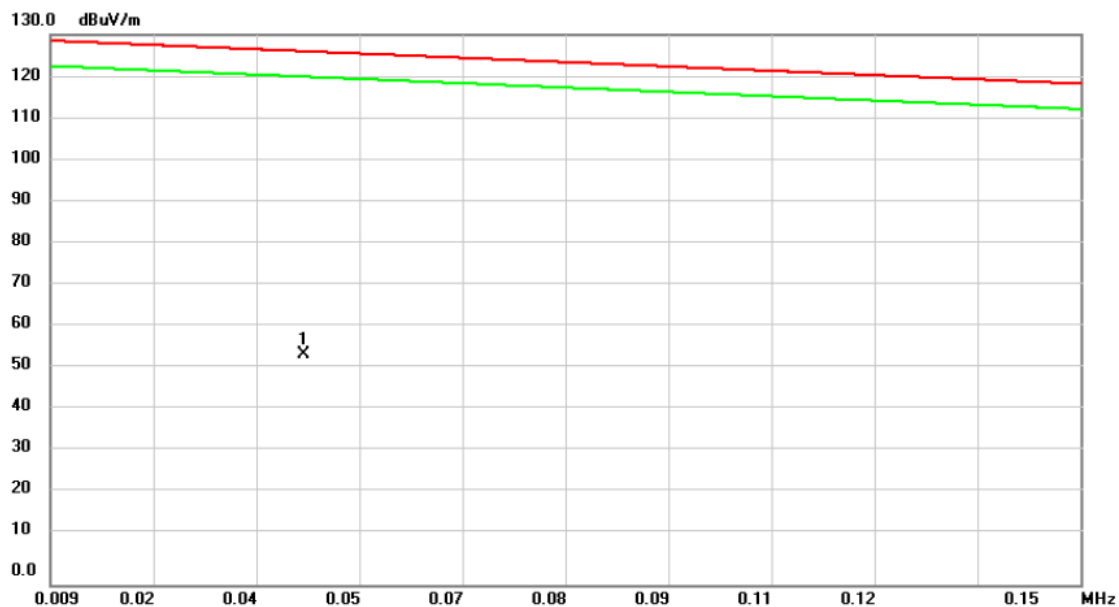

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0437	40.68	13.63	54.31	126.02	-71.71	peak	

Test Mode	TX Mode_2405 MHz
-----------	------------------


Open

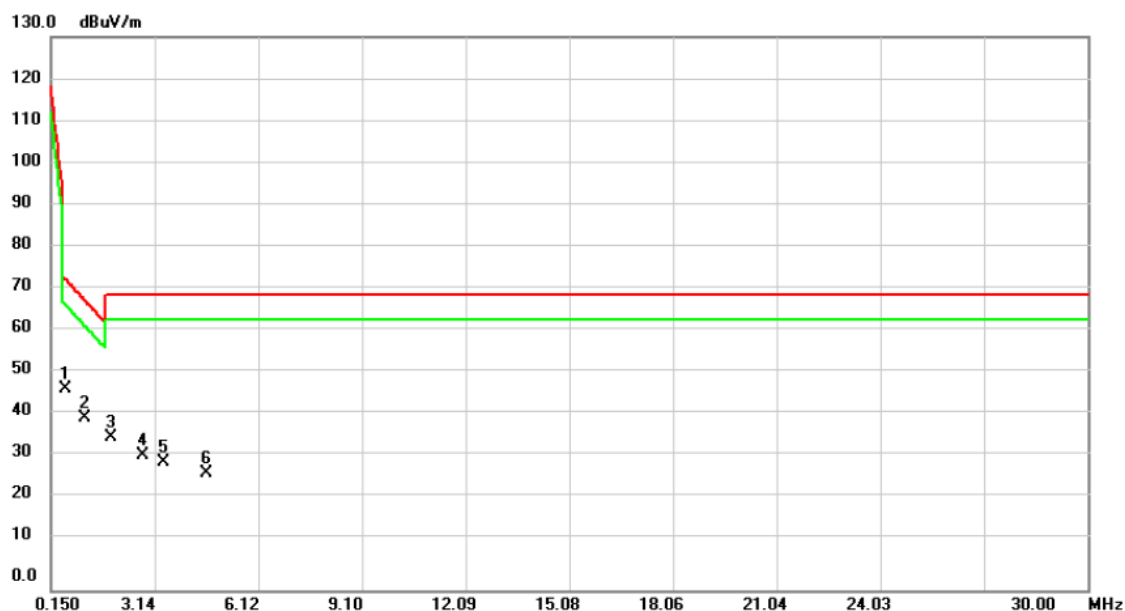

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.5675	35.40	11.83	47.23	73.11	-25.88	peak	
2		1.1350	28.52	11.94	40.46	68.05	-27.59	peak	
3		1.8810	24.44	11.60	36.04	69.54	-33.50	peak	
4		2.8065	20.46	11.19	31.65	69.54	-37.89	peak	
5		3.3738	18.86	11.16	30.02	69.54	-39.52	peak	
6		4.6275	16.21	11.34	27.55	69.54	-41.99	peak	

Test Mode	TX Mode_2405 MHz
-----------	------------------


Close

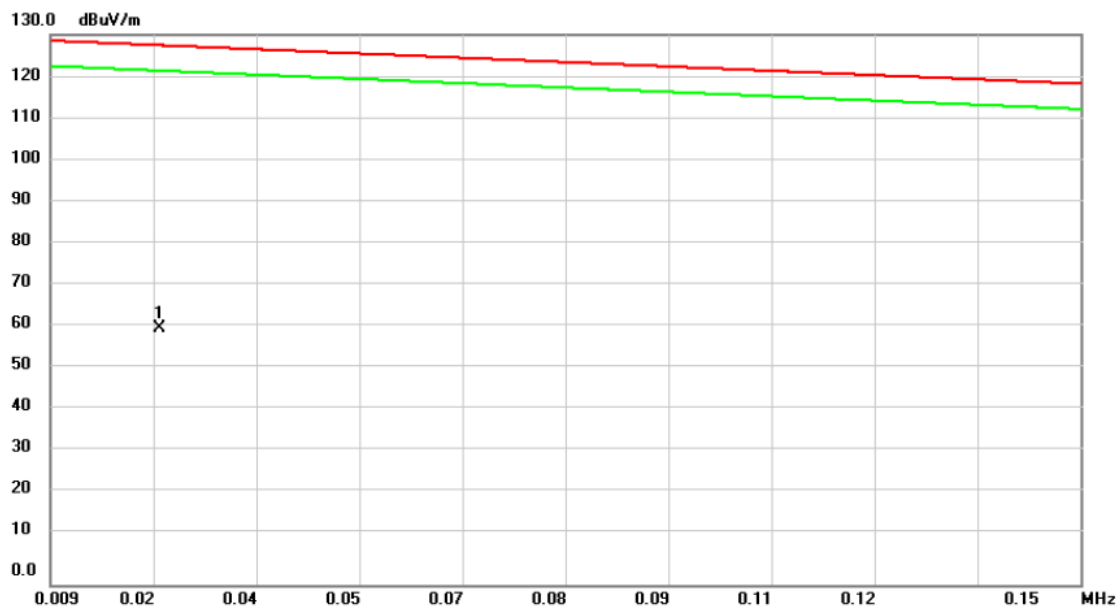

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0240	43.95	16.65	60.60	127.44	-66.84	peak	

Test Mode TX Mode_2405 MHz

Close

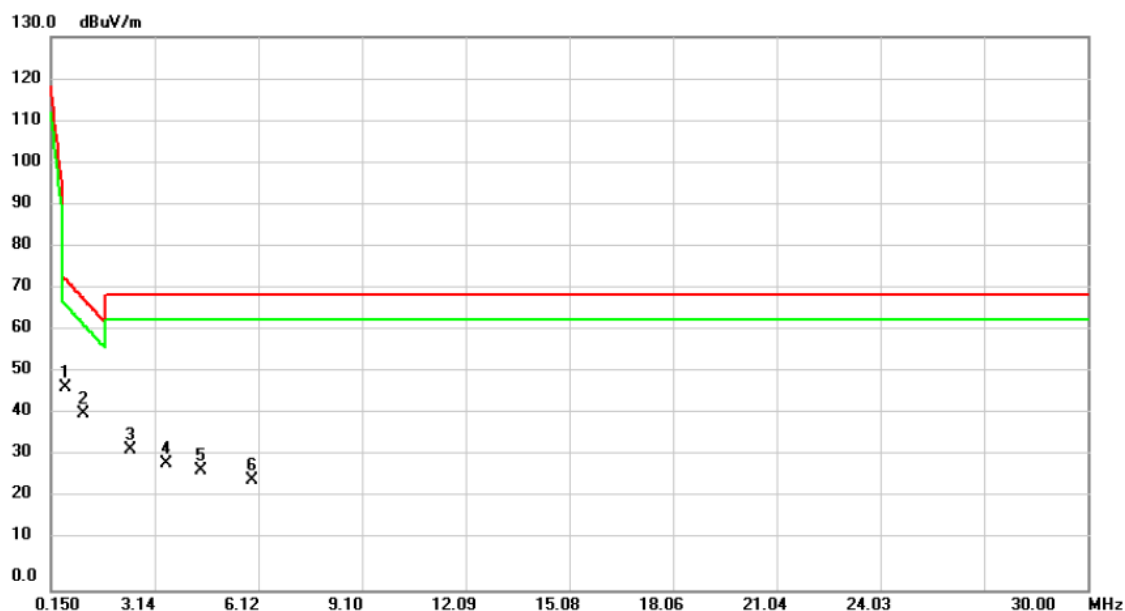


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.5675	35.78	11.83	47.61	73.11	-25.50	peak	
2		1.1050	29.36	11.95	41.31	68.32	-27.01	peak	
3		2.4483	21.67	11.35	33.02	69.54	-36.52	peak	
4		3.4931	18.73	11.17	29.90	69.54	-39.64	peak	
5		4.4484	16.93	11.32	28.25	69.54	-41.29	peak	
6		5.9410	14.33	11.38	25.71	69.54	-43.83	peak	

ATTACHMENT C -RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode	TX Mode_2404.5MHz
-----------	-------------------


Vertical

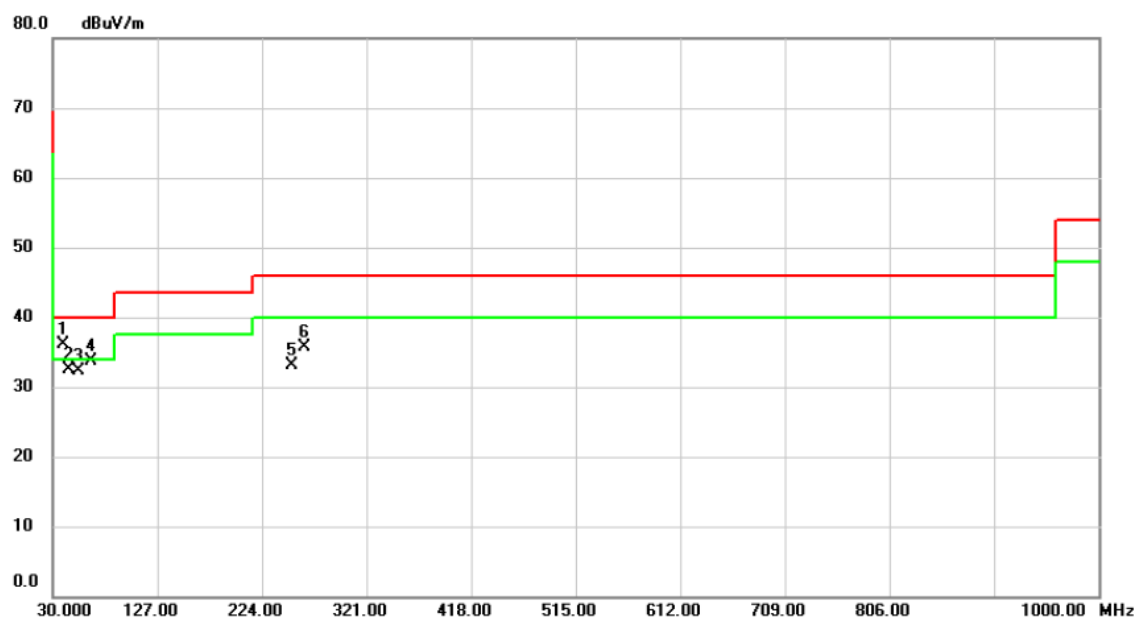

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	44.71	-8.52	36.19	40.00	-3.81	peak	
2		44.5500	41.14	-8.58	32.56	40.00	-7.44	peak	
3		54.2500	40.73	-8.44	32.29	40.00	-7.71	peak	
4		64.9200	43.07	-9.37	33.70	40.00	-6.30	peak	
5		252.1300	42.04	-9.01	33.03	46.00	-12.97	peak	
6		263.7700	44.41	-8.64	35.77	46.00	-10.23	peak	

Test Mode	TX Mode_2404.5 MHz
-----------	--------------------

Horizontal

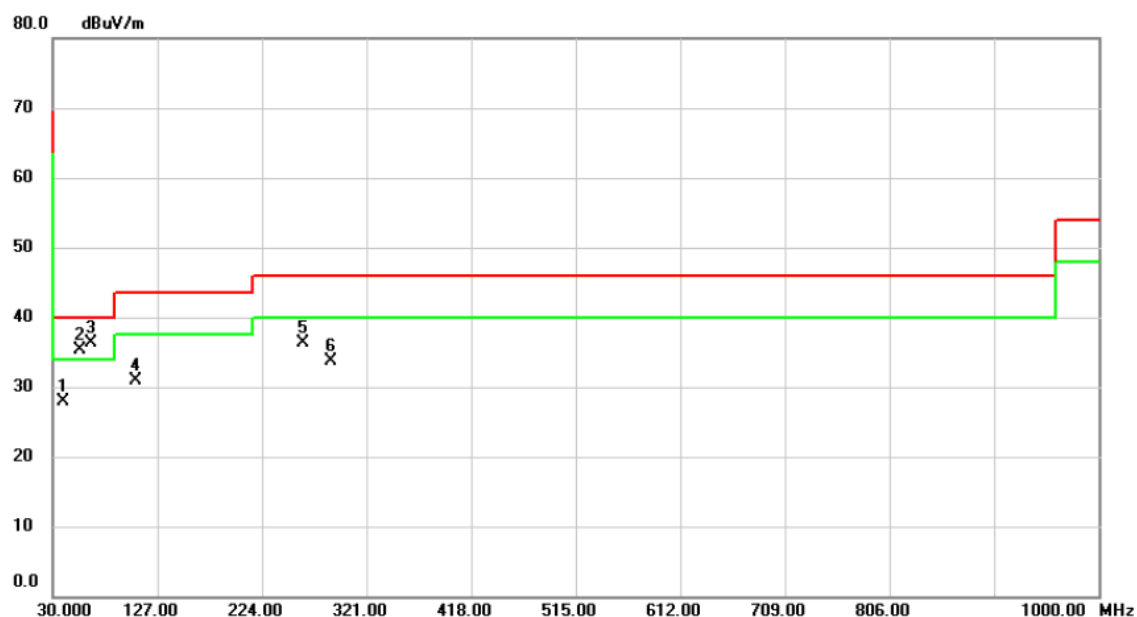


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	36.48	-8.52	27.96	40.00	-12.04	peak	
2	!	55.2200	43.85	-8.45	35.40	40.00	-4.60	peak	
3	*	64.9200	45.64	-9.37	36.27	40.00	-3.73	peak	
4		106.6300	42.26	-11.32	30.94	43.50	-12.56	peak	
5		261.8300	44.92	-8.71	36.21	46.00	-9.79	peak	
6		288.0200	41.57	-7.77	33.80	46.00	-12.20	peak	

ATTACHMENT D -RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode TX Mode_2404.5 MHz


Vertical

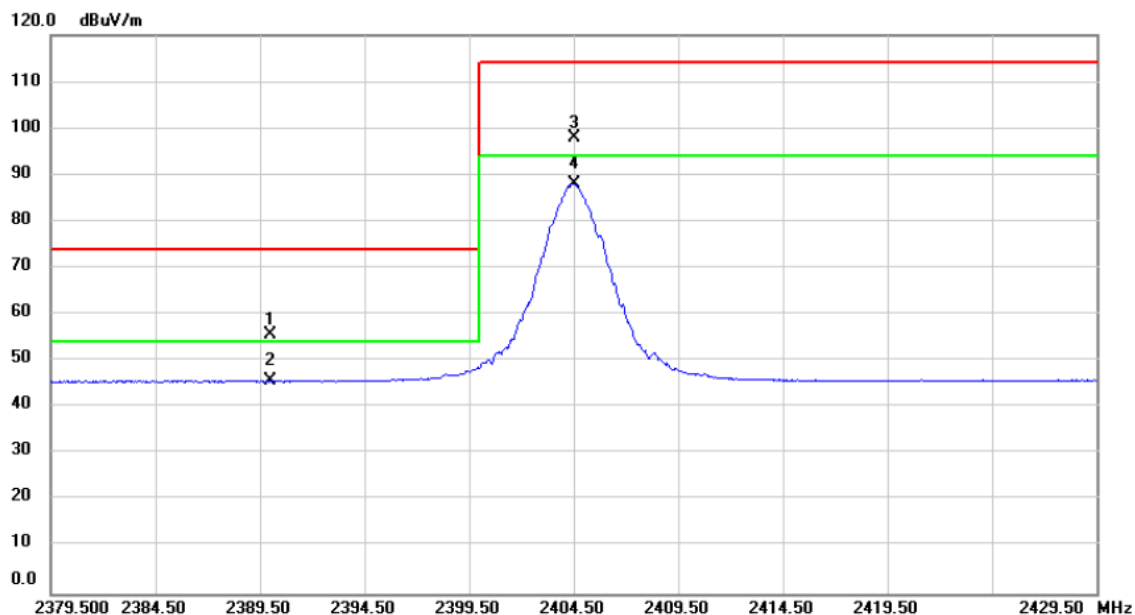

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.46	31.06	55.52	74.00	-18.48	peak	
2		2390.000	14.58	31.06	45.64	54.00	-8.36	AVG	
3		2404.500	66.93	31.12	98.05	114.00	-15.95	peak	
4	*	2404.500	57.05	31.12	88.17	94.00	-5.83	AVG	

Test Mode	TX Mode_2404.5 MHz
-----------	--------------------


Vertical

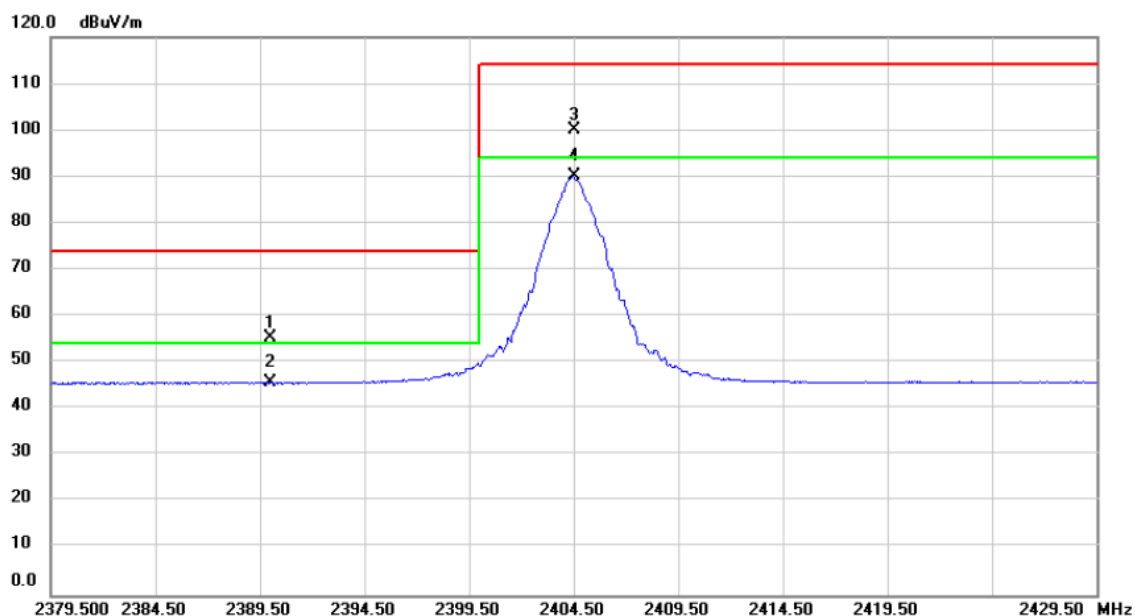

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	24.43	31.06	55.49	74.00	-18.51	peak	
2		2390.000	14.55	31.06	45.61	54.00	-8.39	AVG	
3		2404.500	69.01	31.12	100.13	114.00	-13.87	peak	
4	*	2404.500	59.13	31.12	90.25	94.00	-3.75	AVG	

Test Mode	TX Mode_2404.5 MHz
-----------	--------------------


Horizontal

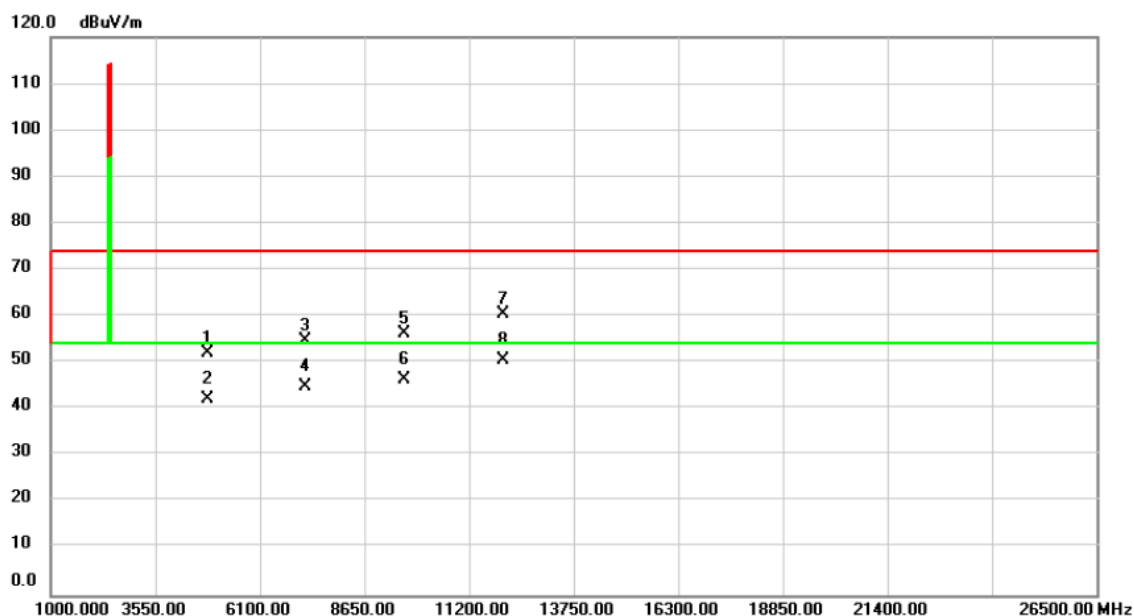

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4809.000	63.38	-11.39	51.99	74.00	-22.01	peak	
2		4809.000	53.50	-11.39	42.11	54.00	-11.89	AVG	
3		7213.500	60.13	-5.49	54.64	74.00	-19.36	peak	
4		7213.500	50.25	-5.49	44.76	54.00	-9.24	AVG	
5		9618.000	55.95	0.42	56.37	74.00	-17.63	peak	
6		9618.000	46.07	0.42	46.49	54.00	-7.51	AVG	
7		12022.50	58.15	2.41	60.56	74.00	-13.44	peak	
8	*	12022.50	48.27	2.41	50.68	54.00	-3.32	AVG	

Test Mode	TX Mode_2404.5 MHz
-----------	--------------------


Horizontal

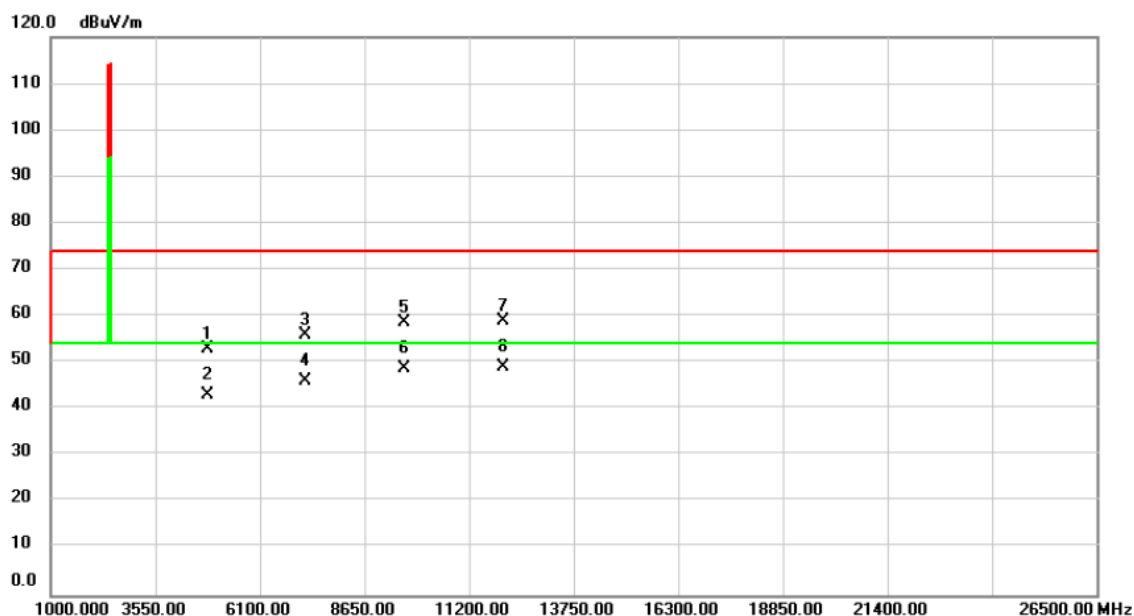

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4809.000	64.45	-11.39	53.06	74.00	-20.94	peak	
2		4809.000	54.57	-11.39	43.18	54.00	-10.82	AVG	
3		7213.500	61.35	-5.49	55.86	74.00	-18.14	peak	
4		7213.500	51.47	-5.49	45.98	54.00	-8.02	AVG	
5		9618.000	58.18	0.42	58.60	74.00	-15.40	peak	
6		9618.000	48.30	0.42	48.72	54.00	-5.28	AVG	
7		12022.50	56.47	2.41	58.88	74.00	-15.12	peak	
8	*	12022.50	46.59	2.41	49.00	54.00	-5.00	AVG	

Test Mode	TX Mode_2438 MHz
-----------	------------------


Vertical

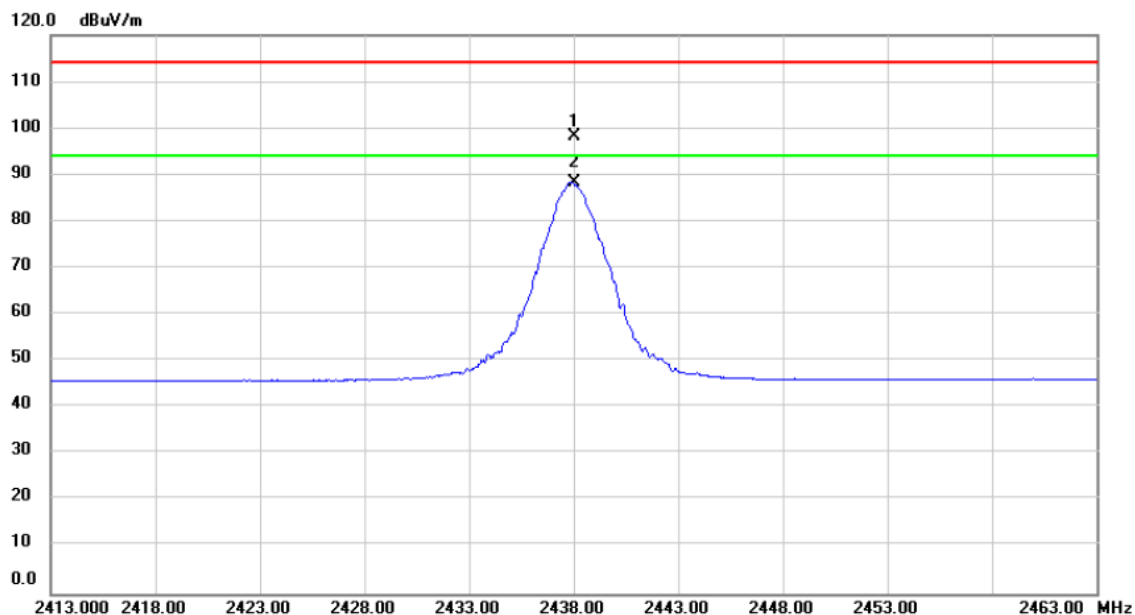

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2438.000	67.08	31.25	98.33	114.00	-15.67	peak	
2	*	2438.000	57.20	31.25	88.45	94.00	-5.55	AVG	

Test Mode	TX Mode_2438 MHz
-----------	------------------


Vertical

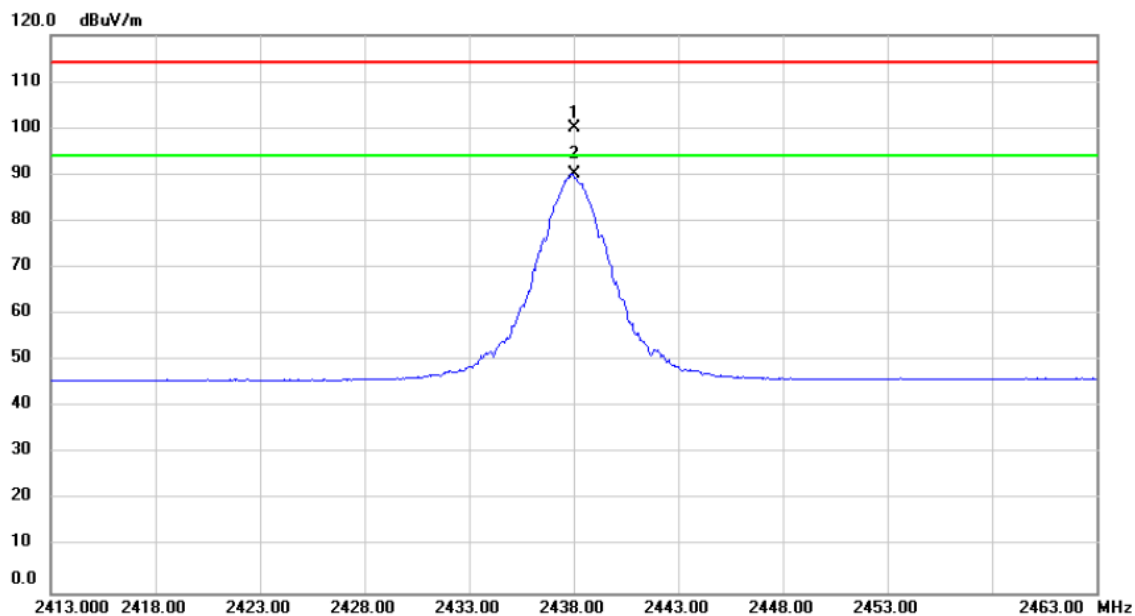

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2438.000	68.77	31.25	100.02	114.00	-13.98	peak	
2	*	2438.000	58.89	31.25	90.14	94.00	-3.86	AVG	

Test Mode	TX Mode_2438 MHz
-----------	------------------


Horizontal

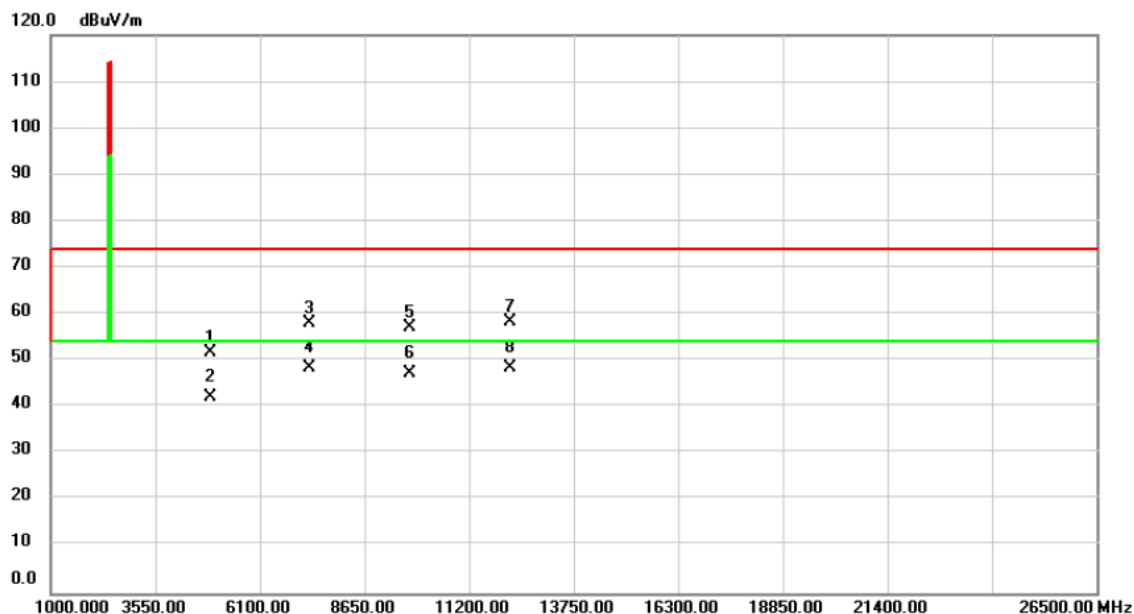

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4876.000	63.19	-11.30	51.89	74.00	-22.11	peak	
2		4876.000	53.31	-11.30	42.01	54.00	-11.99	AVG	
3		7314.000	63.32	-5.13	58.19	74.00	-15.81	peak	
4		7314.000	53.44	-5.13	48.31	54.00	-5.69	AVG	
5		9752.000	56.14	0.91	57.05	74.00	-16.95	peak	
6		9752.000	46.26	0.91	47.17	54.00	-6.83	AVG	
7		12190.00	56.15	2.22	58.37	74.00	-15.63	peak	
8	*	12190.00	46.27	2.22	48.49	54.00	-5.51	AVG	

Test Mode	TX Mode_2438 MHz
-----------	------------------


Horizontal

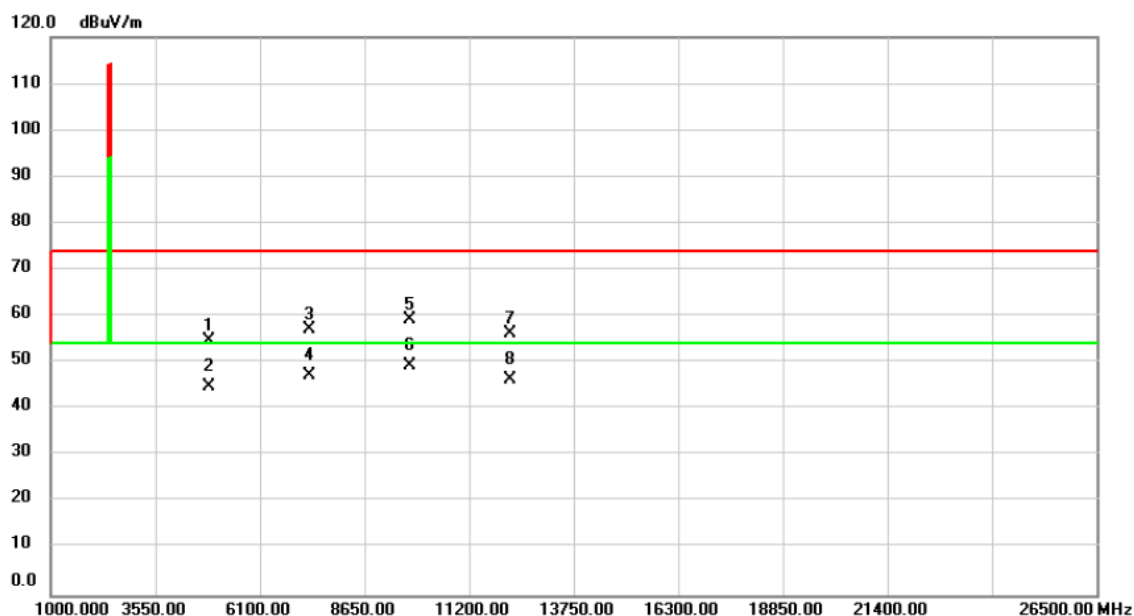

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4875.870	66.11	-11.30	54.81	74.00	-19.19	peak	
2		4875.870	56.23	-11.30	44.93	54.00	-9.07	AVG	
3		7314.000	62.16	-5.13	57.03	74.00	-16.97	peak	
4		7314.000	52.28	-5.13	47.15	54.00	-6.85	AVG	
5		9752.000	58.33	0.91	59.24	74.00	-14.76	peak	
6	*	9752.000	48.45	0.91	49.36	54.00	-4.64	AVG	
7		12190.00	54.16	2.22	56.38	74.00	-17.62	peak	
8		12190.00	44.28	2.22	46.50	54.00	-7.50	AVG	

Test Mode TX Mode_2477.5 MHz


Vertical

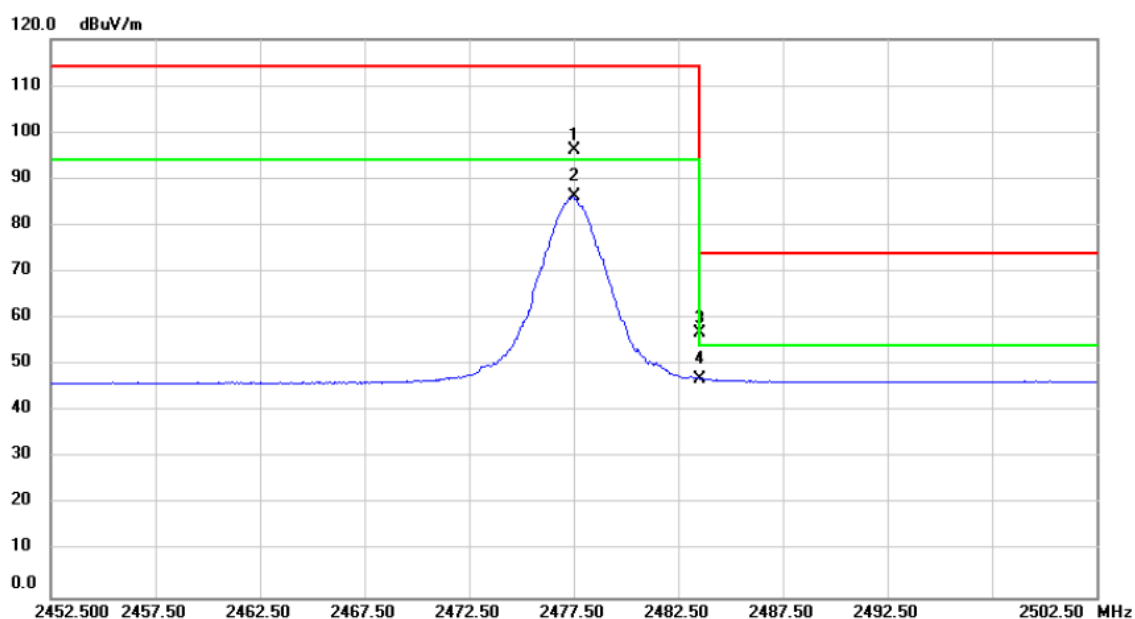

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2477.500	64.71	31.39	96.10	114.00	-17.90	peak	
2		2477.500	54.83	31.39	86.22	94.00	-7.78	AVG	
3		2483.500	25.55	31.41	56.96	74.00	-17.04	peak	
4	*	2483.500	15.67	31.41	47.08	54.00	-6.92	AVG	

Test Mode	TX Mode_2477.5 MHz
-----------	--------------------


Vertical

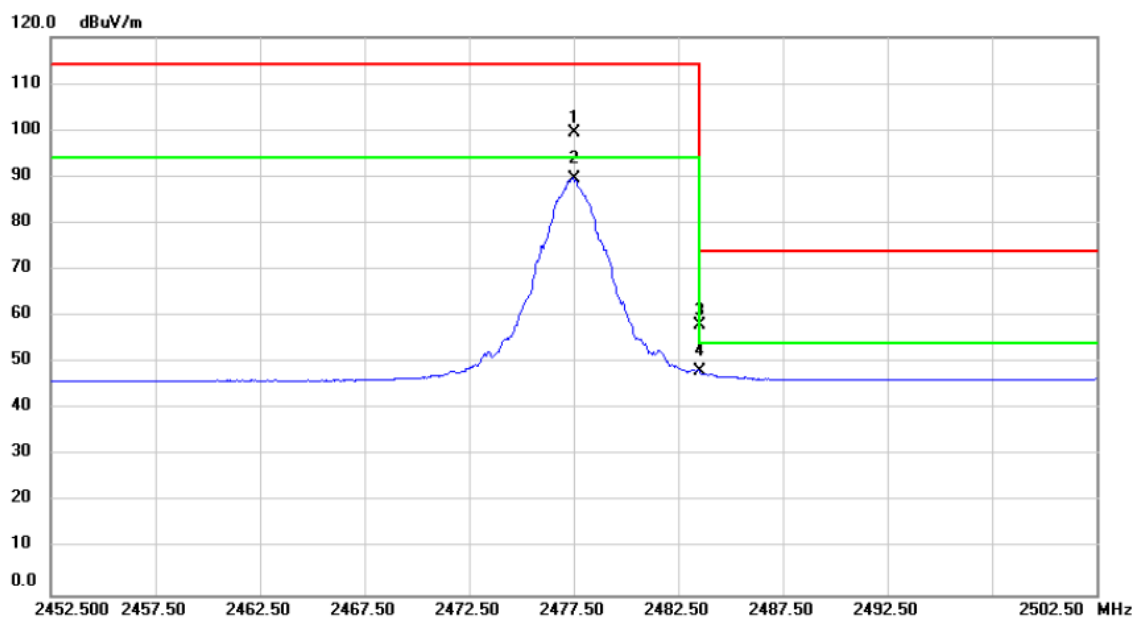

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2477.500	68.19	31.39	99.58	114.00	-14.42	peak	
2	*	2477.500	58.31	31.39	89.70	94.00	-4.30	AVG	
3		2483.500	26.64	31.41	58.05	74.00	-15.95	peak	
4		2483.500	16.76	31.41	48.17	54.00	-5.83	AVG	

Test Mode	TX Mode_2477.5 MHz
-----------	--------------------


Horizontal

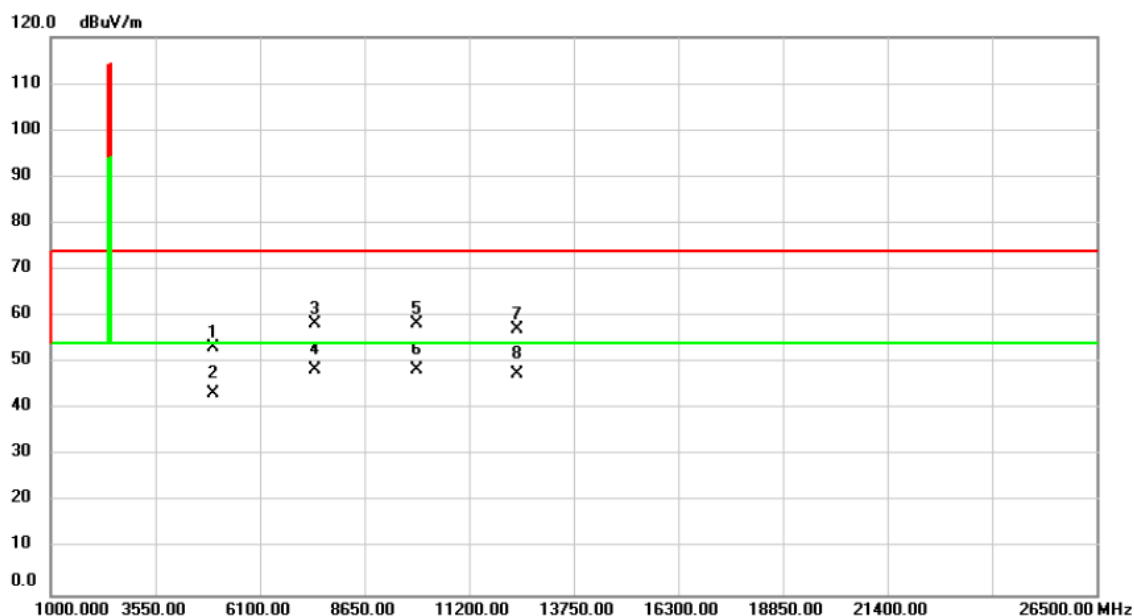

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4955.000	64.50	-11.17	53.33	74.00	-20.67	peak	
2		4955.000	54.62	-11.17	43.45	54.00	-10.55	AVG	
3		7432.500	63.10	-4.70	58.40	74.00	-15.60	peak	
4	*	7432.500	53.22	-4.70	48.52	54.00	-5.48	AVG	
5		9910.000	56.88	1.50	58.38	74.00	-15.62	peak	
6		9910.000	47.00	1.50	48.50	54.00	-5.50	AVG	
7		12387.50	55.30	2.00	57.30	74.00	-16.70	peak	
8		12387.50	45.42	2.00	47.42	54.00	-6.58	AVG	

Test Mode TX Mode_2477.5 MHz

Horizontal

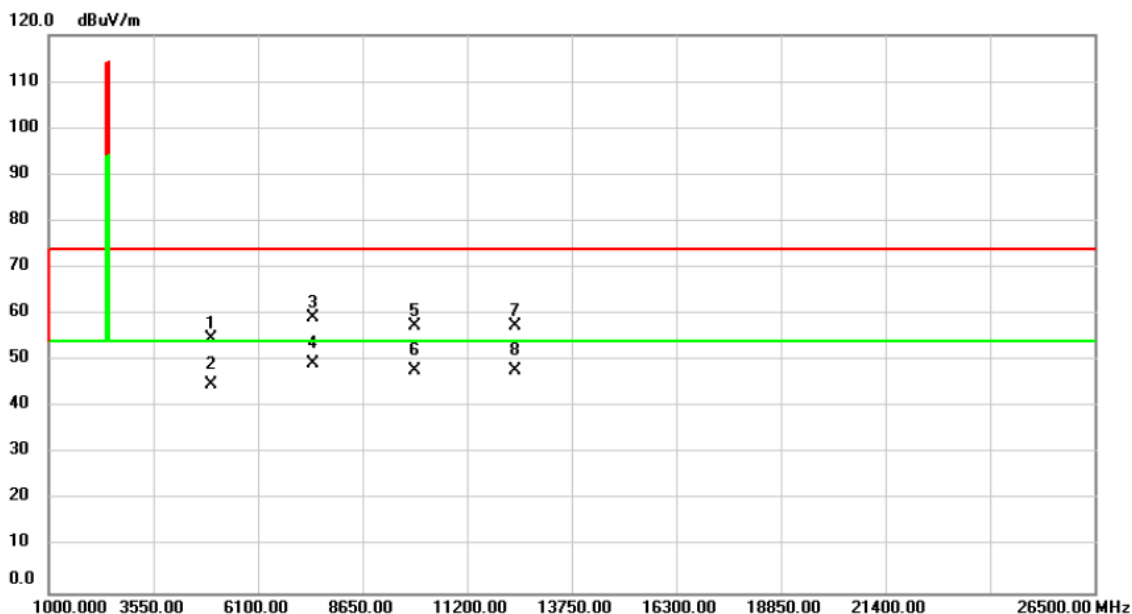


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4955.000	66.00	-11.17	54.83	74.00	-19.17	peak	
2		4955.000	56.12	-11.17	44.95	54.00	-9.05	AVG	
3		7432.500	64.05	-4.70	59.35	74.00	-14.65	peak	
4	*	7432.500	54.17	-4.70	49.47	54.00	-4.53	AVG	
5		9910.000	56.10	1.50	57.60	74.00	-16.40	peak	
6		9910.000	46.22	1.50	47.72	54.00	-6.28	AVG	
7		12387.50	55.58	2.00	57.58	74.00	-16.42	peak	
8		12387.50	45.70	2.00	47.70	54.00	-6.30	AVG	

ATTACHMENT E - BANDWIDTH

Test Mode:	TX Mode_2404.5 MHz/2438 MHz/2477.5 MHz
------------	--


Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)
2404.5	2.42	2.36
2438	2.42	2.37
2477.5	2.45	2.40

TX Mode_2404.5 MHz

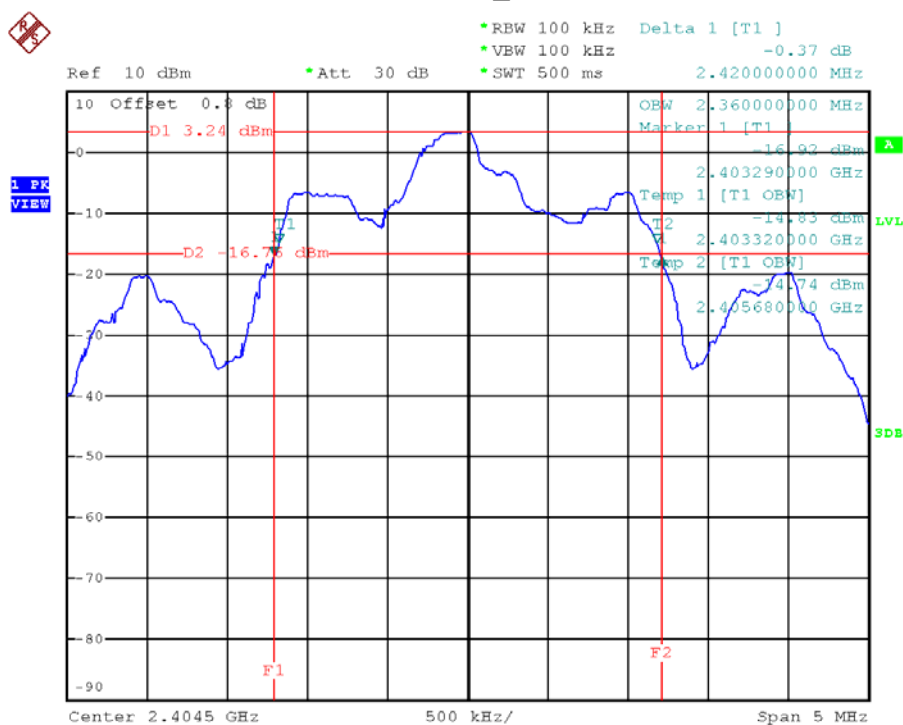


Date: 3.JUN.2017 16:02:06

TX Mode_2438 MHz

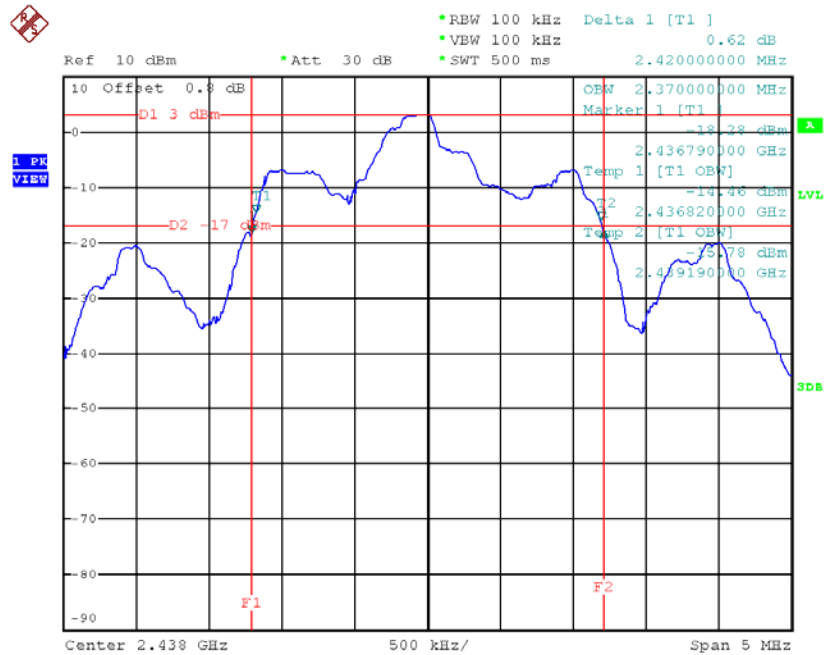

Date: 3.JUN.2017 16:06:16

TX Mode_2477.5 MHz

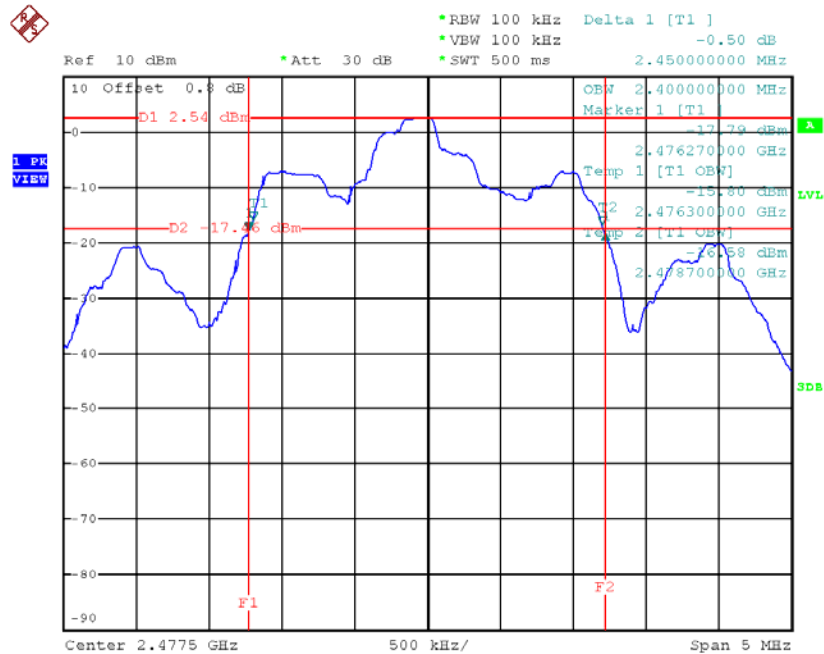

Date: 3.JUN.2017 16:08:54