


Site: WZ-AC2	Time: 2021/02/06 - 03:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

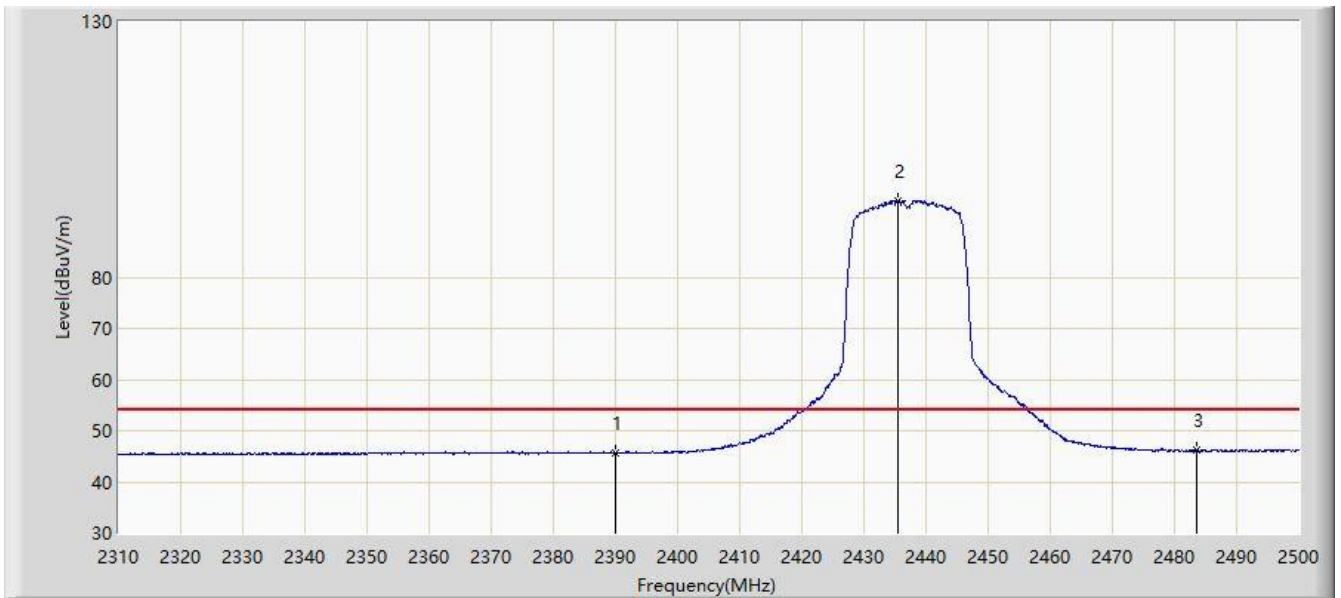


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.720	13.369	-8.280	54.000	32.351	AV
2		*	2435.495	95.042	62.713	N/A	N/A	32.329	AV
3			2483.500	46.212	13.905	-7.788	54.000	32.307	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at Channel 2457MHz	

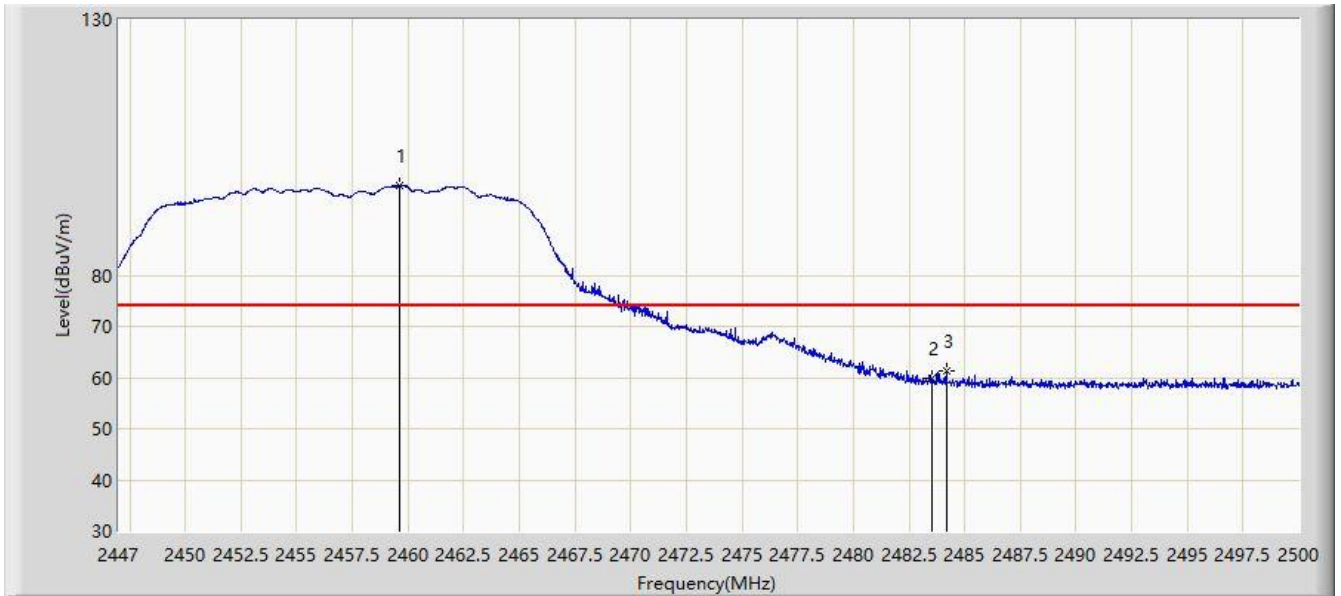


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2459.614	97.572	65.090	N/A	N/A	32.481	PK
2			2483.500	59.724	27.295	-14.276	74.000	32.429	PK
3			2484.179	61.280	28.856	-12.720	74.000	32.425	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at Channel 2457MHz	

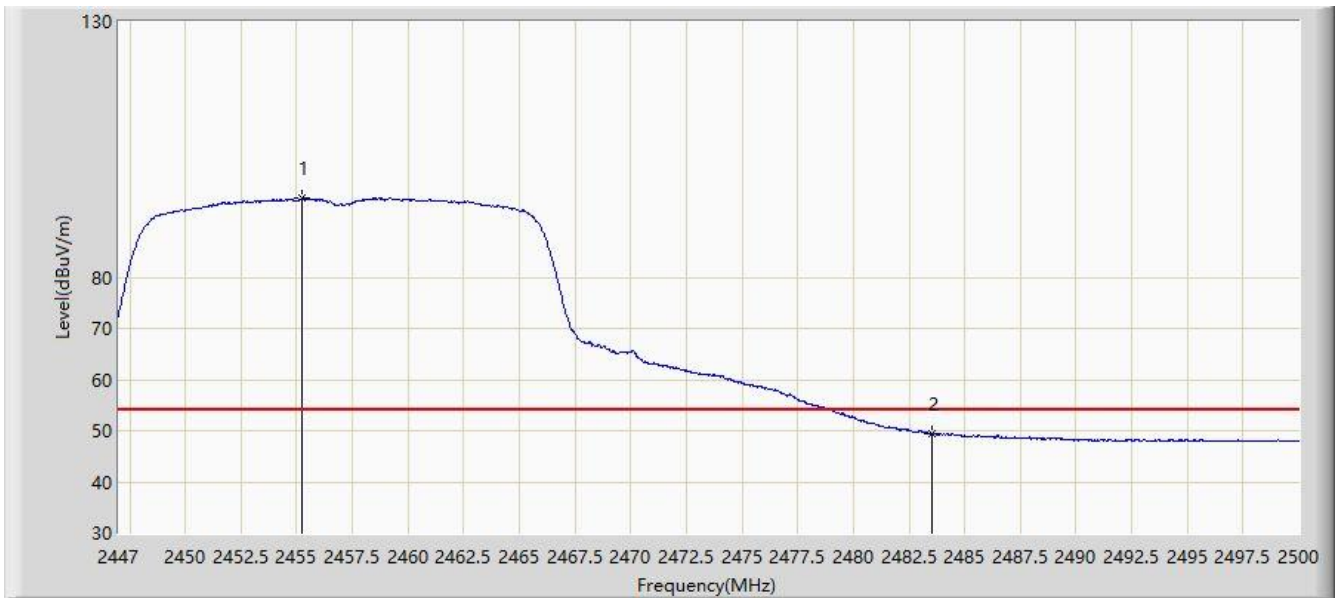


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2455.268	95.390	62.923	N/A	N/A	32.467	AV
2			2483.500	49.558	17.129	-4.442	54.000	32.429	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at Channel 2457MHz	

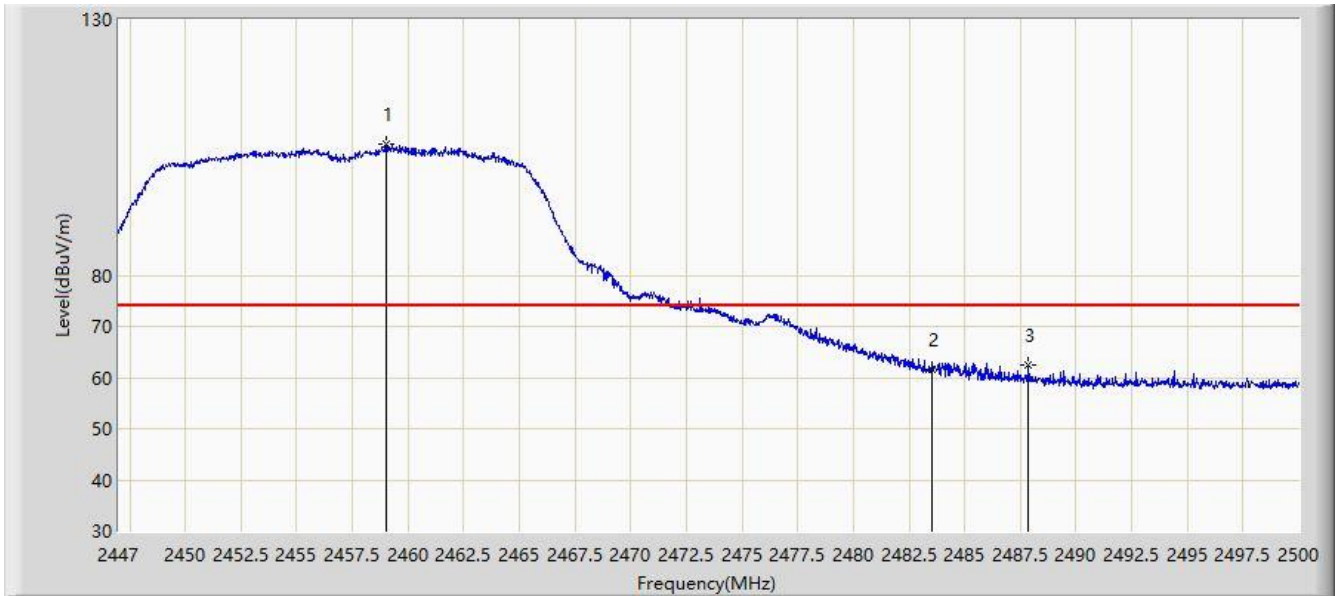


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2459.004	105.527	73.047	N/A	N/A	32.480	PK
2			2483.500	61.504	29.075	-12.496	74.000	32.429	PK
3			2487.863	62.526	30.121	-11.474	74.000	32.405	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at Channel 2457MHz	

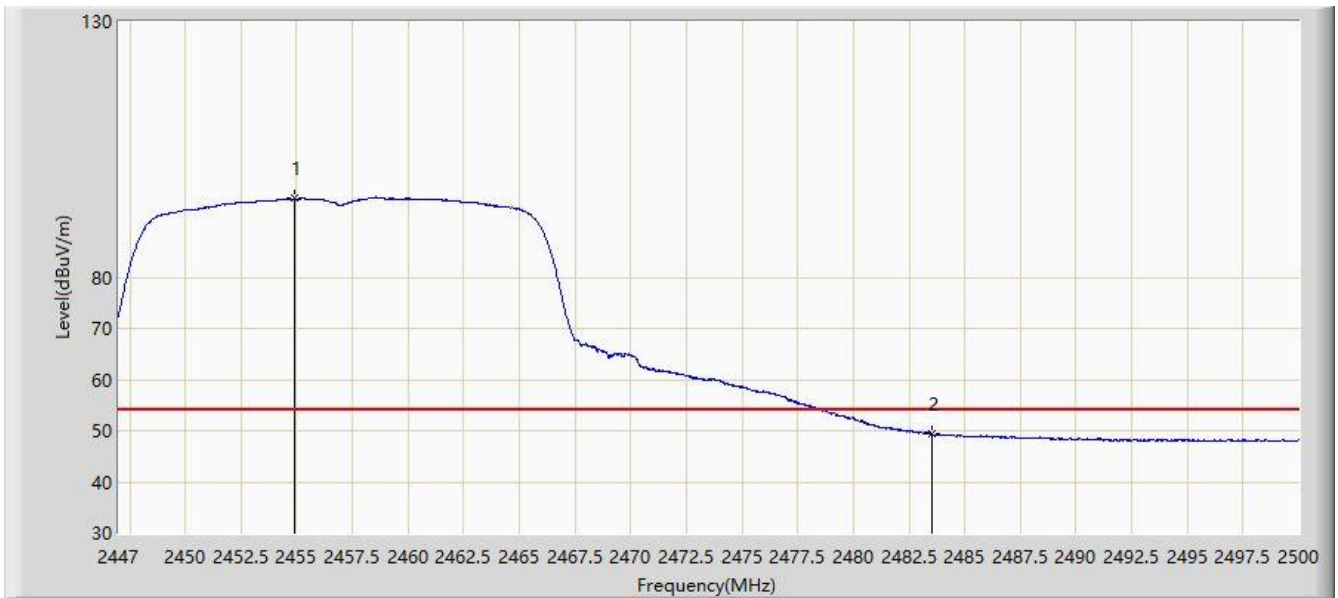


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2454.924	95.374	62.908	N/A	N/A	32.465	AV
2			2483.500	49.391	16.962	-4.609	54.000	32.429	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

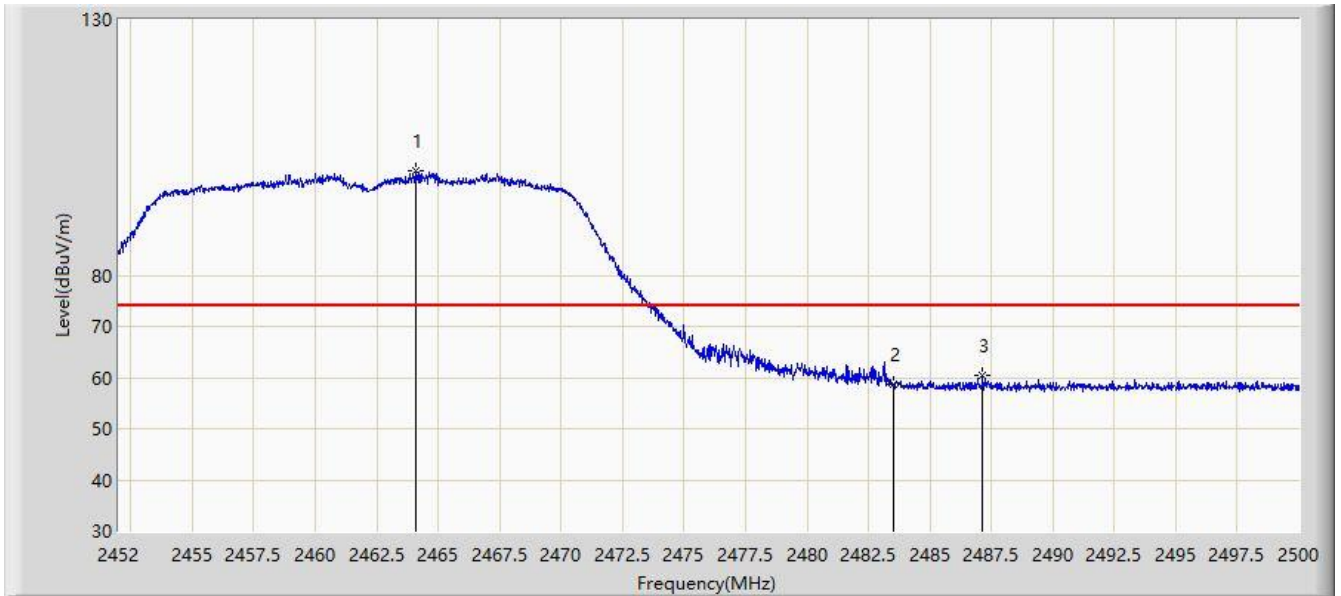


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2464.120	100.567	68.246	N/A	N/A	32.321	PK
2			2483.500	58.638	26.331	-15.362	74.000	32.307	PK
3			2487.136	60.411	28.111	-13.589	74.000	32.300	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

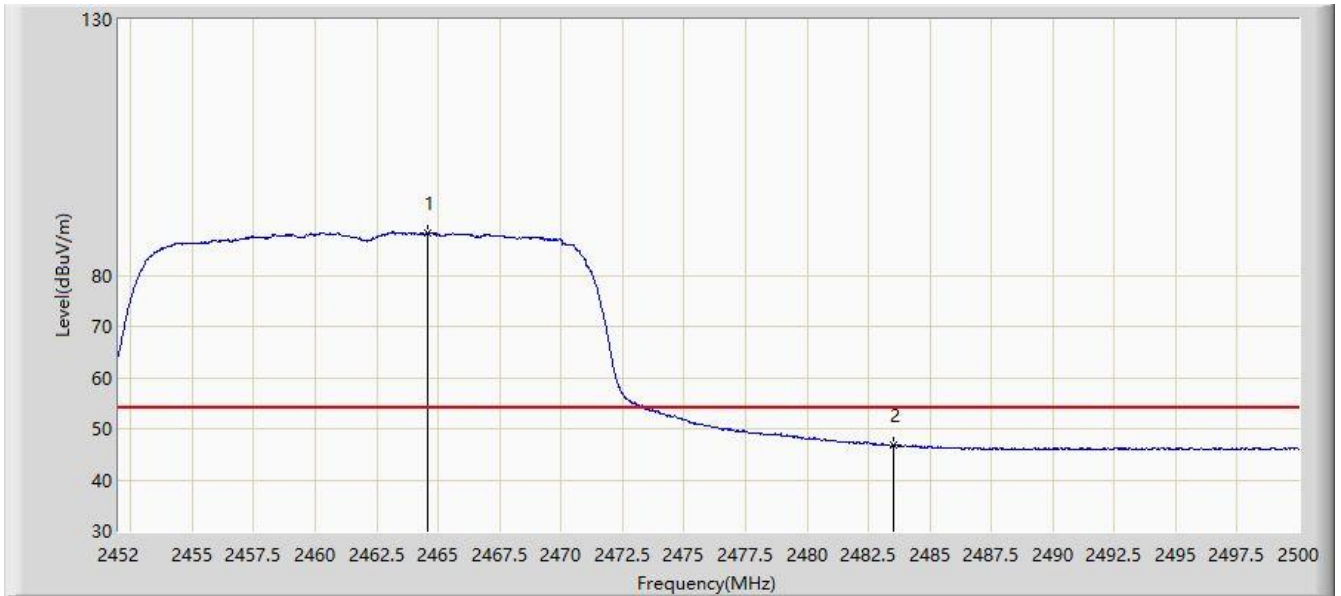


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2464.600	88.235	55.913	N/A	N/A	32.322	AV
2			2483.500	46.826	14.519	-7.174	54.000	32.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

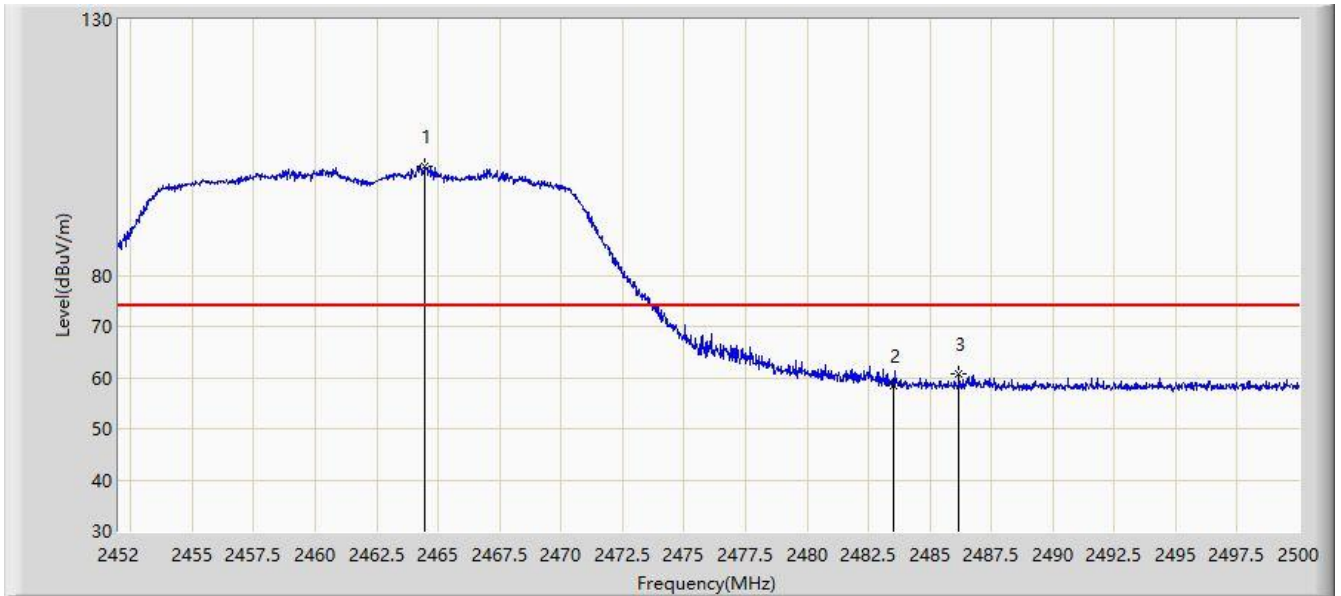


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2464.456	101.353	69.032	N/A	N/A	32.322	PK
2			2483.500	58.441	26.134	-15.559	74.000	32.307	PK
3			2486.176	60.684	28.382	-13.316	74.000	32.302	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC2	Time: 2021/02/06 - 02:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

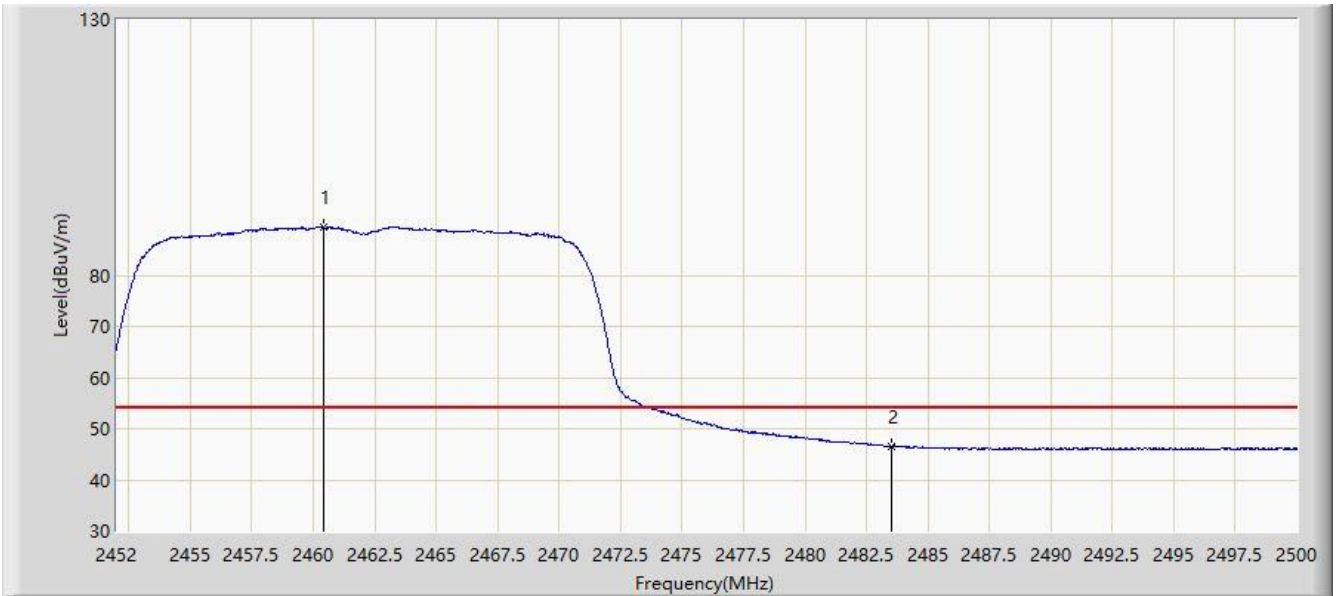


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2460.400	89.478	57.159	N/A	N/A	32.319	AV
2			2483.500	46.622	14.315	-7.378	54.000	32.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

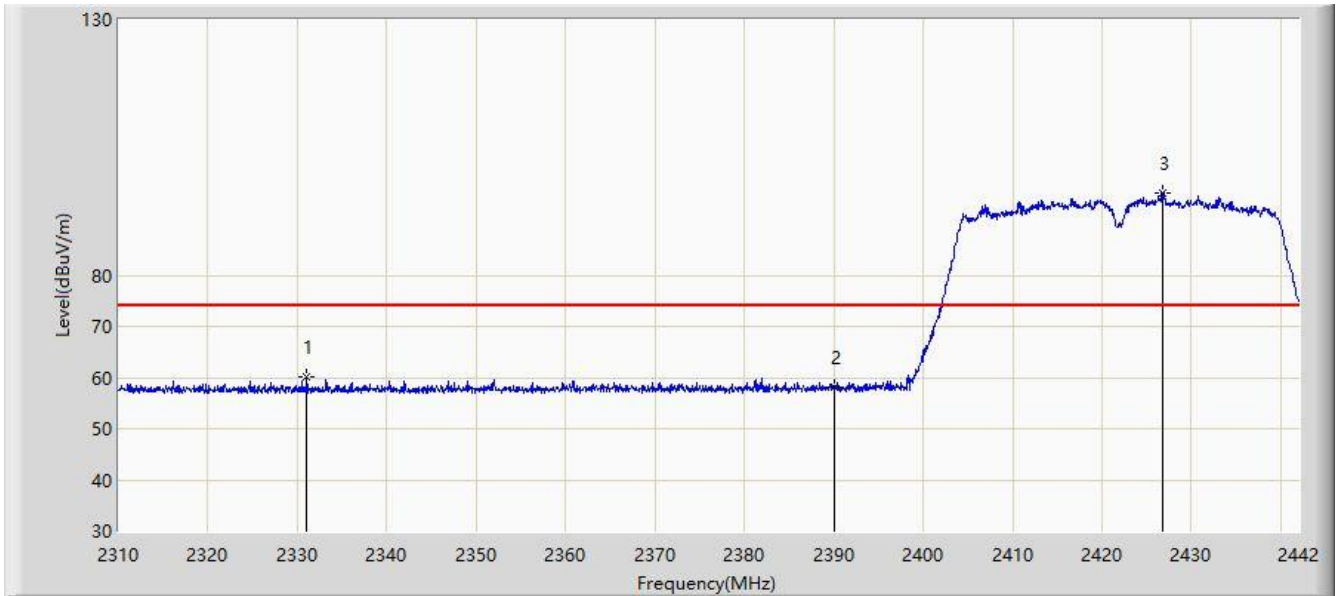


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2331.054	60.021	27.547	-13.979	74.000	32.474	PK
2			2390.000	58.067	25.716	-15.933	74.000	32.351	PK
3		*	2426.754	96.156	63.818	N/A	N/A	32.338	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

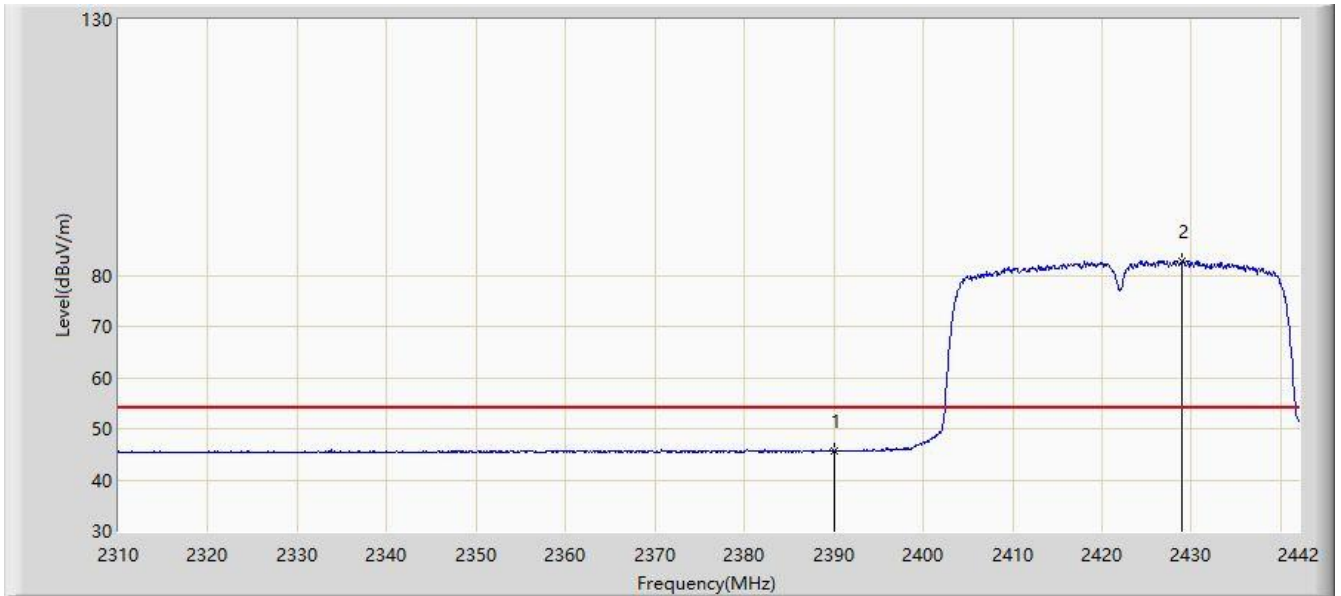


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2390.000	45.632	13.281	-8.368	54.000	32.351	AV
2		*	2428.932	82.699	50.363	N/A	N/A	32.336	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

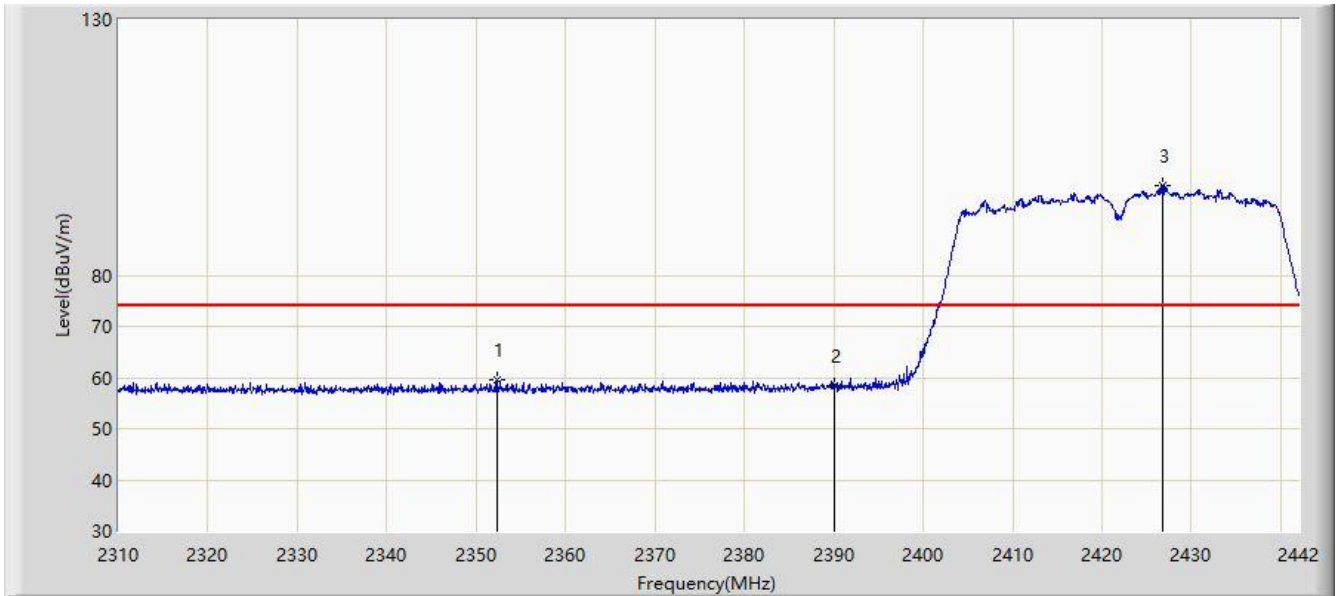


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2352.372	59.530	27.105	-14.470	74.000	32.425	PK
2			2390.000	58.491	26.140	-15.509	74.000	32.351	PK
3		*	2426.820	97.549	65.211	N/A	N/A	32.338	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

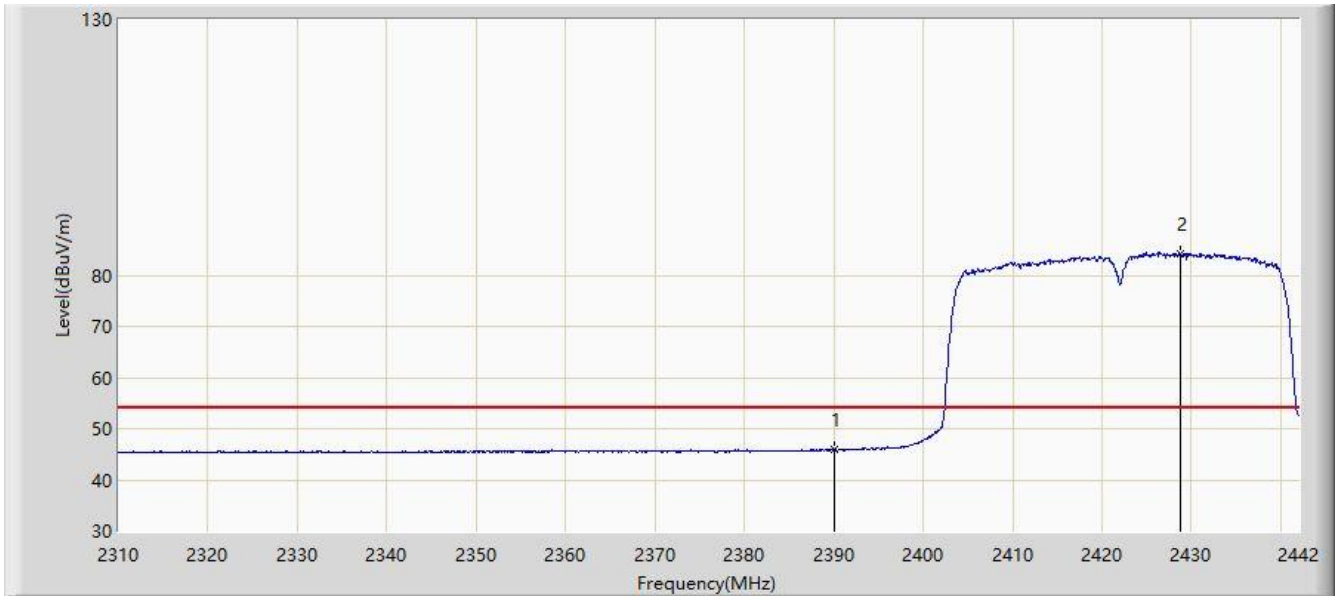


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2390.000	45.852	13.501	-8.148	54.000	32.351	AV
2		*	2428.800	84.272	51.936	N/A	N/A	32.336	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2427MHz	

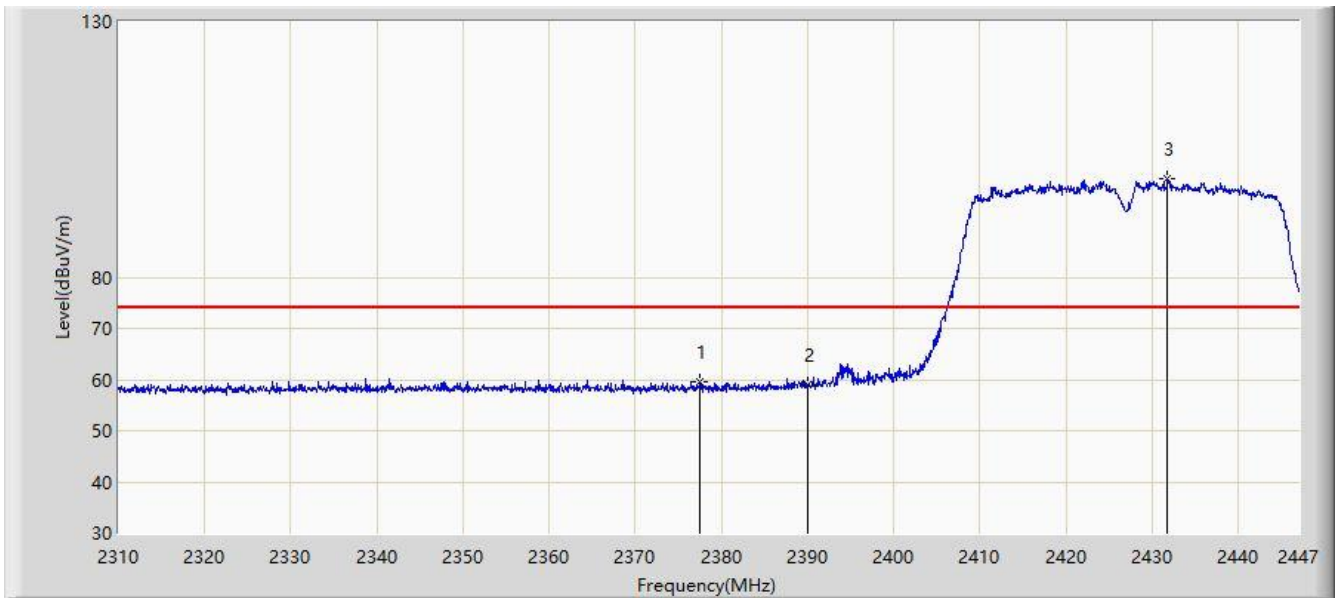


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2377.472	59.705	27.203	-14.295	74.000	32.503	PK
2			2390.000	58.883	26.350	-15.117	74.000	32.533	PK
3		*	2431.725	99.147	66.668	N/A	N/A	32.479	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2427MHz	

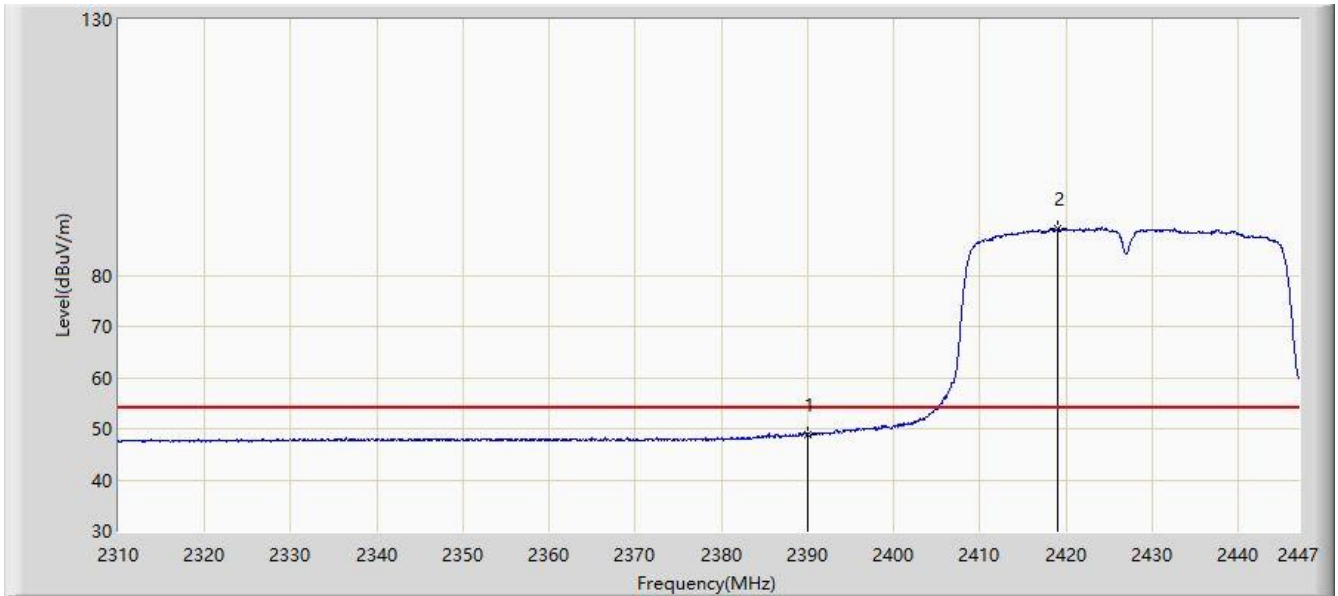


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.915	16.382	-5.085	54.000	32.533	AV
2		*	2419.052	89.202	56.722	N/A	N/A	32.480	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2427MHz	

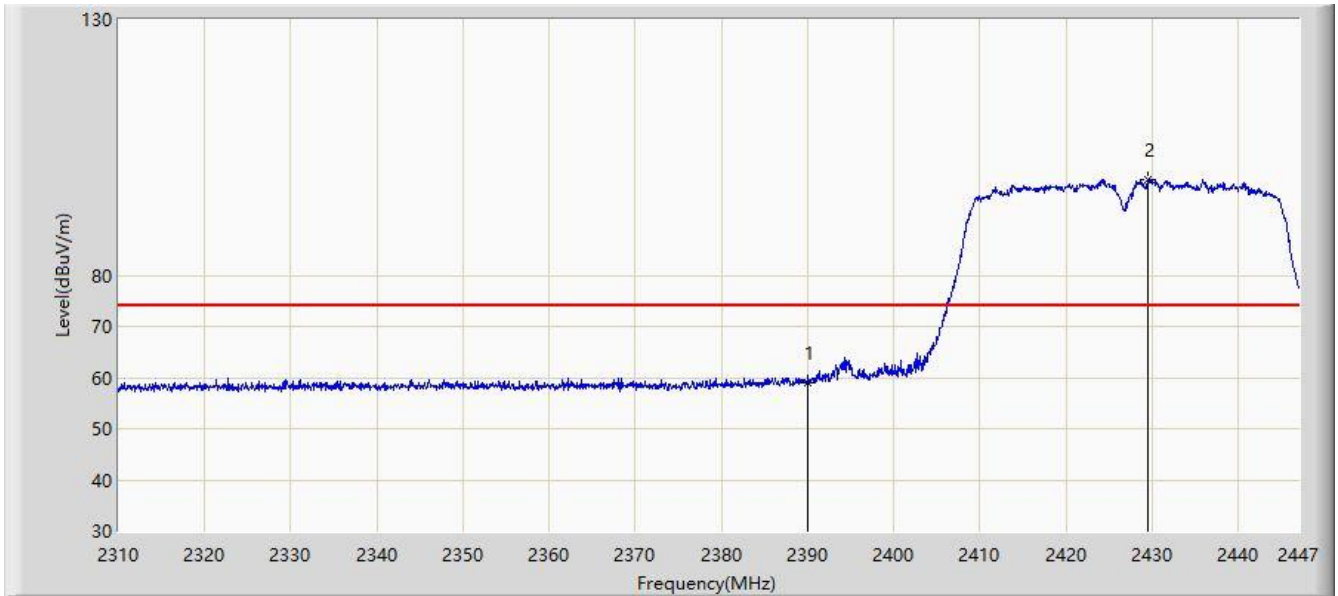


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	59.130	26.597	-14.870	74.000	32.533	PK
2		*	2429.532	98.833	66.359	N/A	N/A	32.474	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Time: 2021/03/09 - 17:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2427MHz	

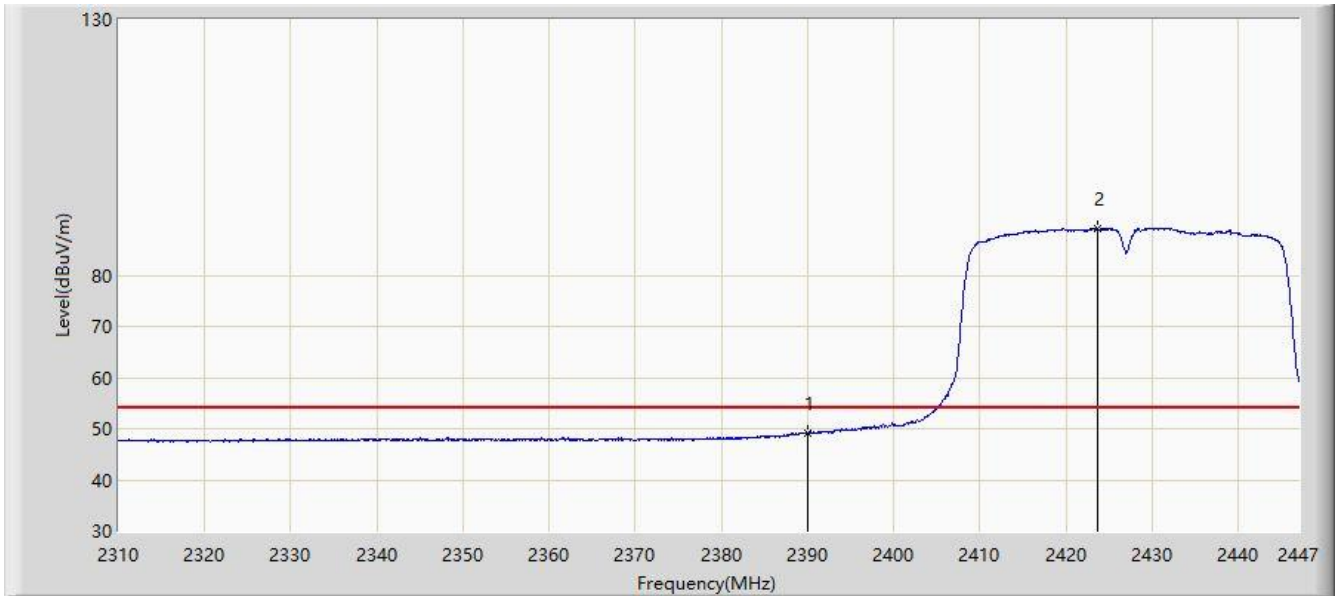


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	49.102	16.569	-4.898	54.000	32.533	AV
2		*	2423.710	89.205	56.730	N/A	N/A	32.475	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

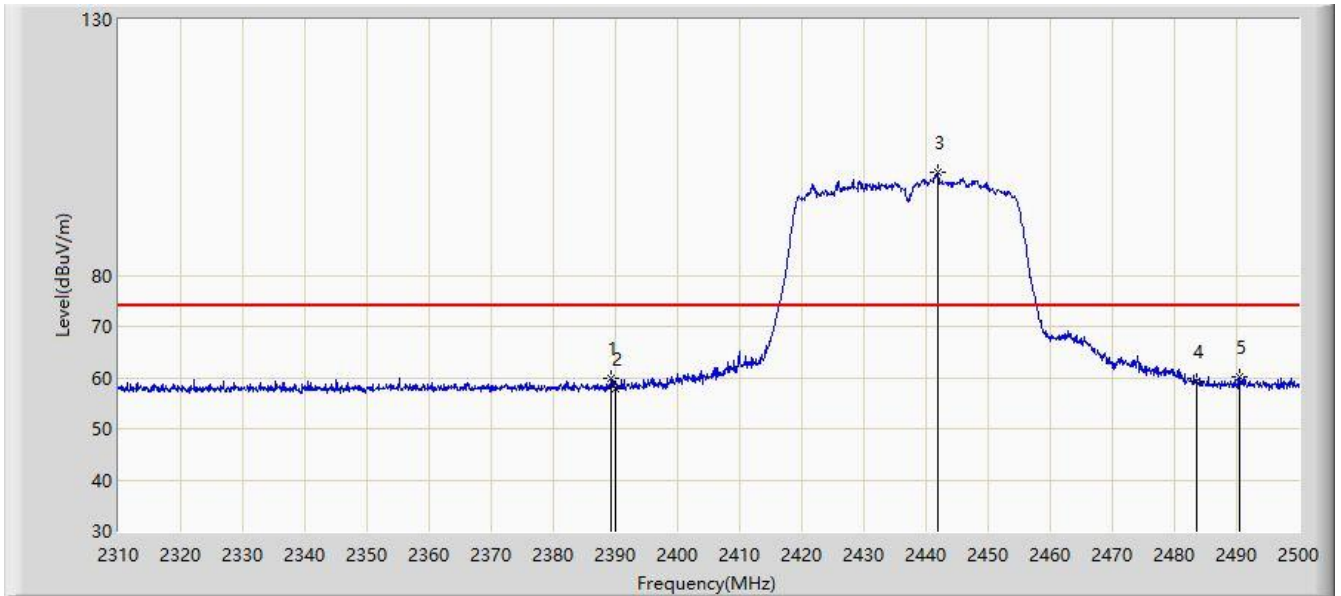


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	59.749	27.396	-14.251	74.000	32.353	PK
2			2390.000	57.880	25.529	-16.120	74.000	32.351	PK
3		*	2441.860	100.187	67.860	N/A	N/A	32.327	PK
4			2483.500	59.253	26.946	-14.747	74.000	32.307	PK
5			2490.405	60.058	27.753	-13.942	74.000	32.305	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 03:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

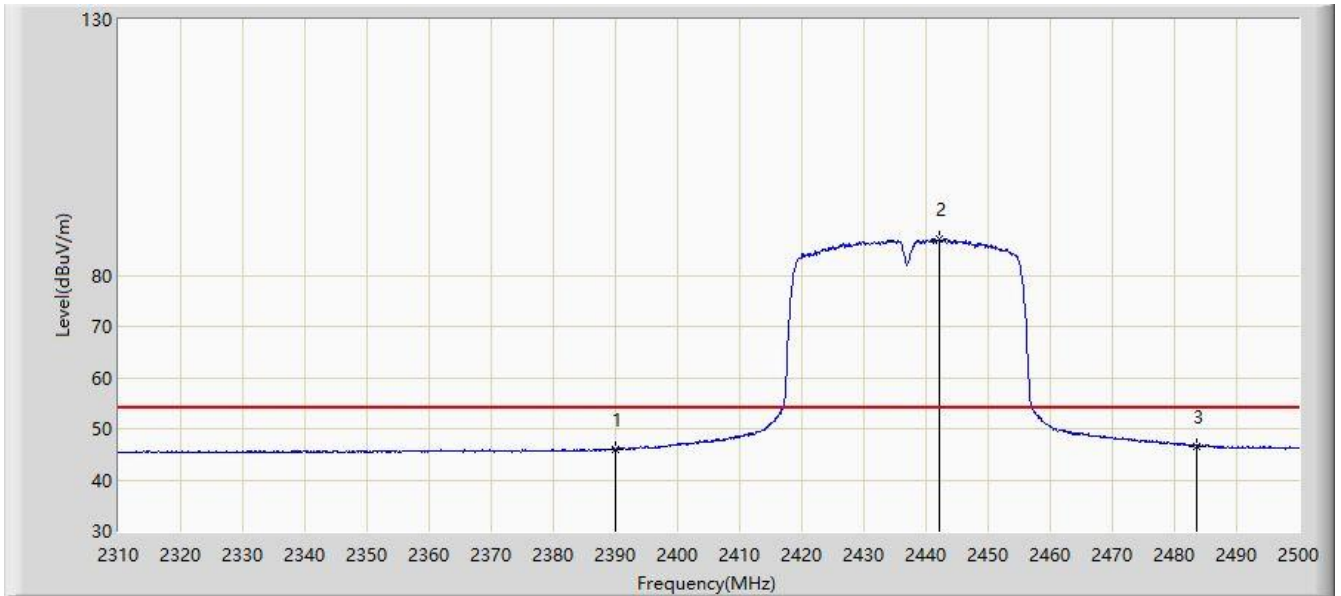


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2390.000	45.925	13.574	-8.075	54.000	32.351	AV
2		*	2442.050	87.170	54.843	N/A	N/A	32.327	AV
3			2483.500	46.652	14.345	-7.348	54.000	32.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 03:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

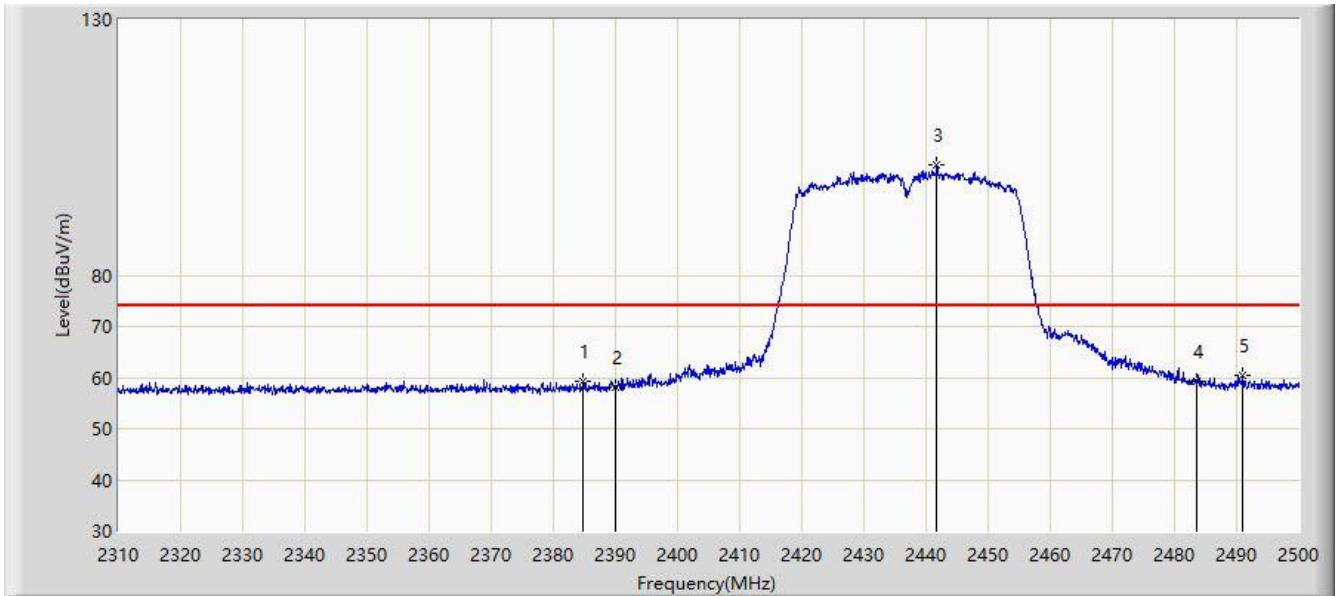


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.765	59.379	27.014	-14.621	74.000	32.365	PK
2			2390.000	58.230	25.879	-15.770	74.000	32.351	PK
3		*	2441.765	101.721	69.394	N/A	N/A	32.327	PK
4			2483.500	59.315	27.008	-14.685	74.000	32.307	PK
5			2491.070	60.305	27.999	-13.695	74.000	32.306	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 04:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

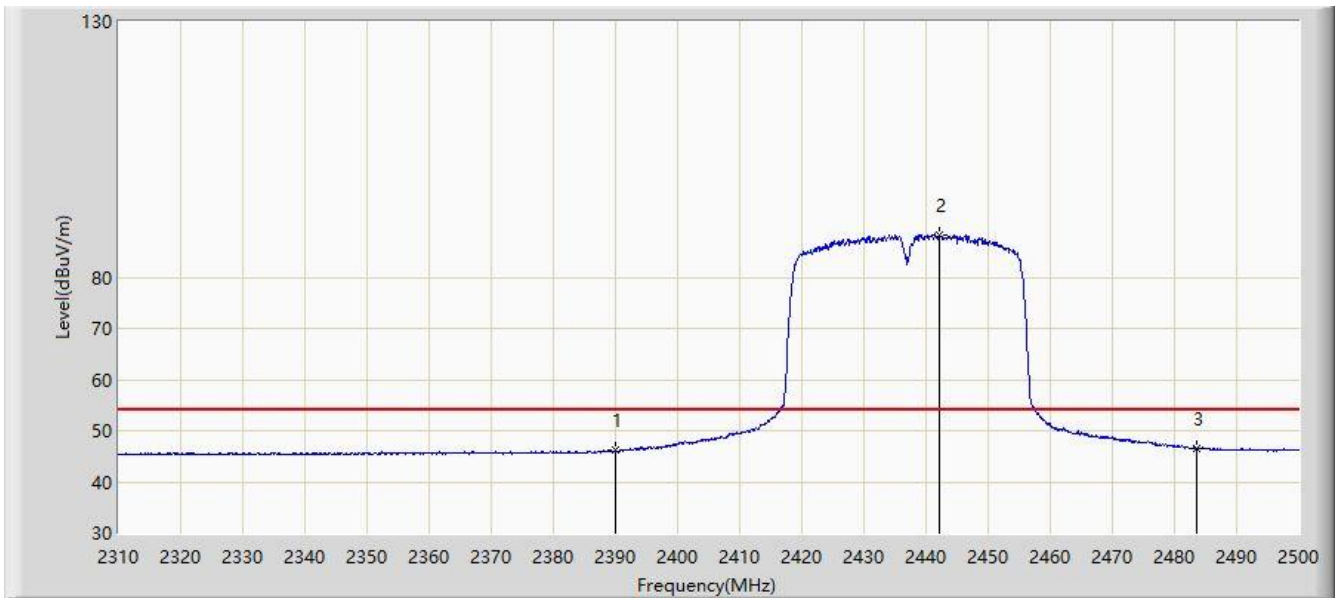


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2390.000	46.223	13.872	-7.777	54.000	32.351	AV
2		*	2442.240	88.396	56.069	N/A	N/A	32.327	AV
3			2483.500	46.530	14.223	-7.470	54.000	32.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2447MHz	

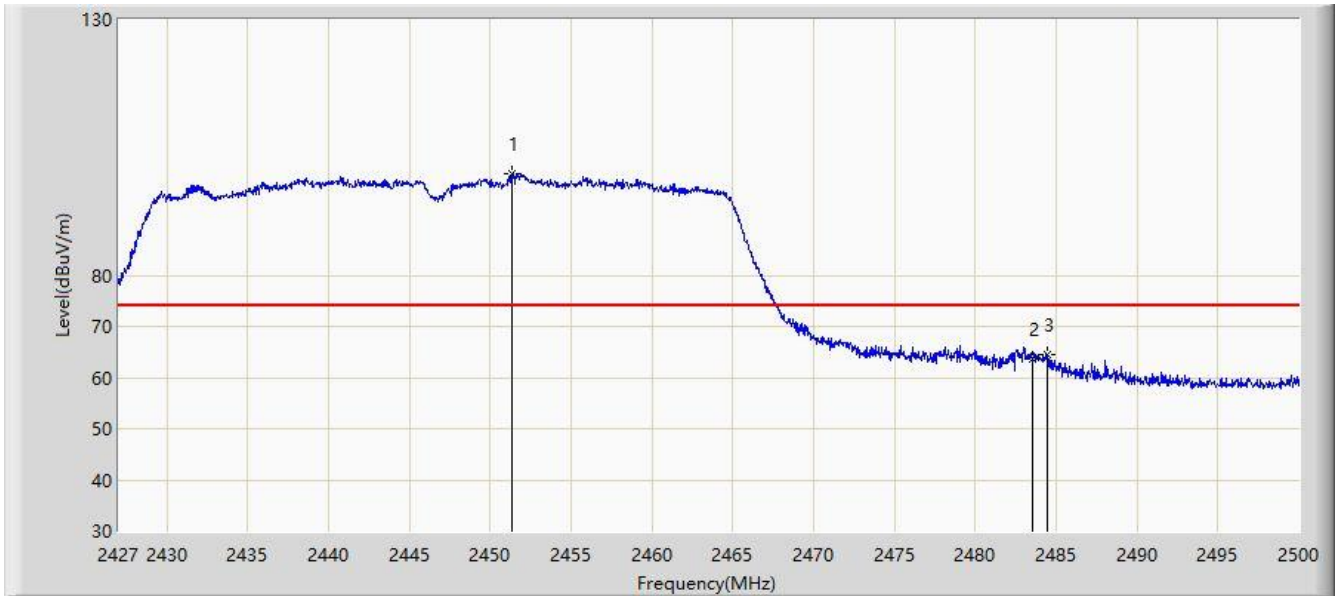


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2451.309	99.778	67.323	N/A	N/A	32.455	PK
2			2483.500	63.767	31.338	-10.233	74.000	32.429	PK
3			2484.415	64.486	32.063	-9.514	74.000	32.423	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2447MHz	

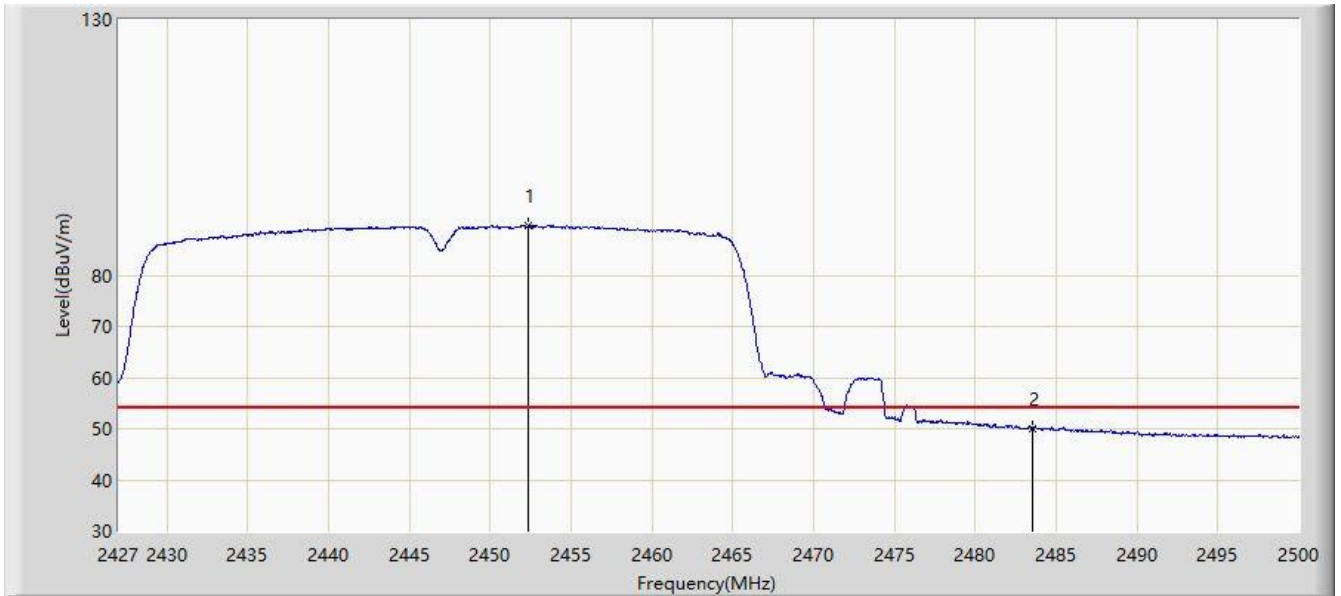


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2452.331	89.835	57.378	N/A	N/A	32.457	AV
2			2483.500	49.978	17.549	-4.022	54.000	32.429	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Time: 2021/03/09 - 17:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2447MHz	

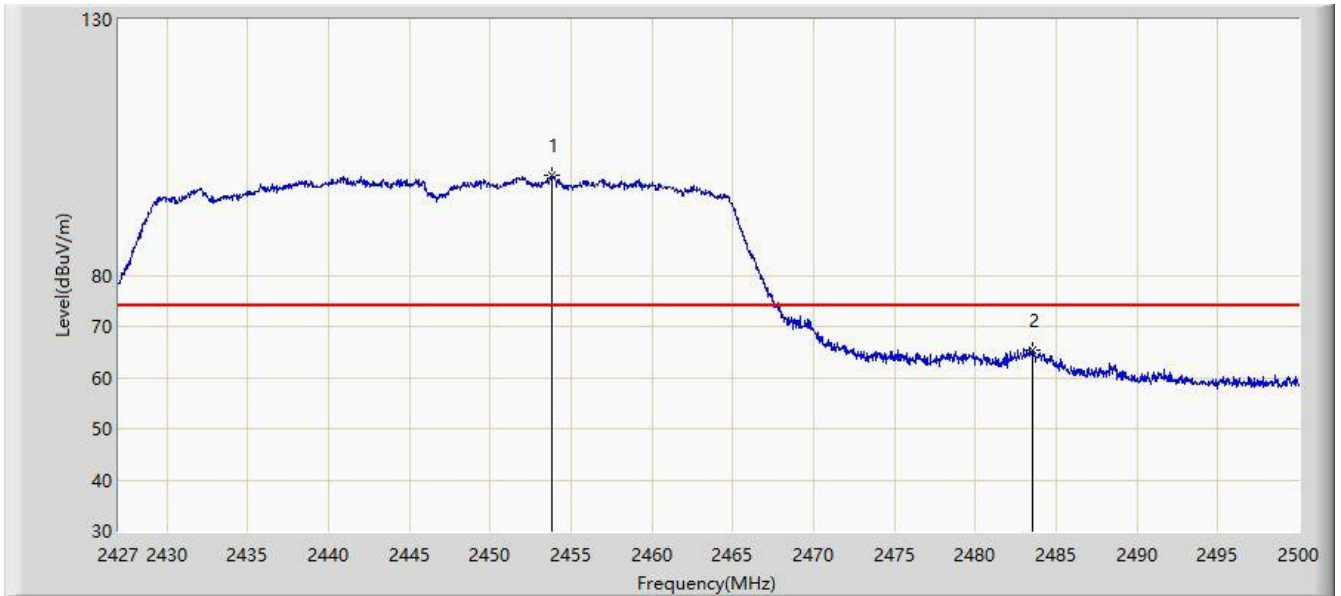


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2453.791	99.444	66.982	N/A	N/A	32.462	PK
2			2483.500	65.222	32.793	-8.778	74.000	32.429	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Time: 2021/03/09 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at Channel 2447MHz	

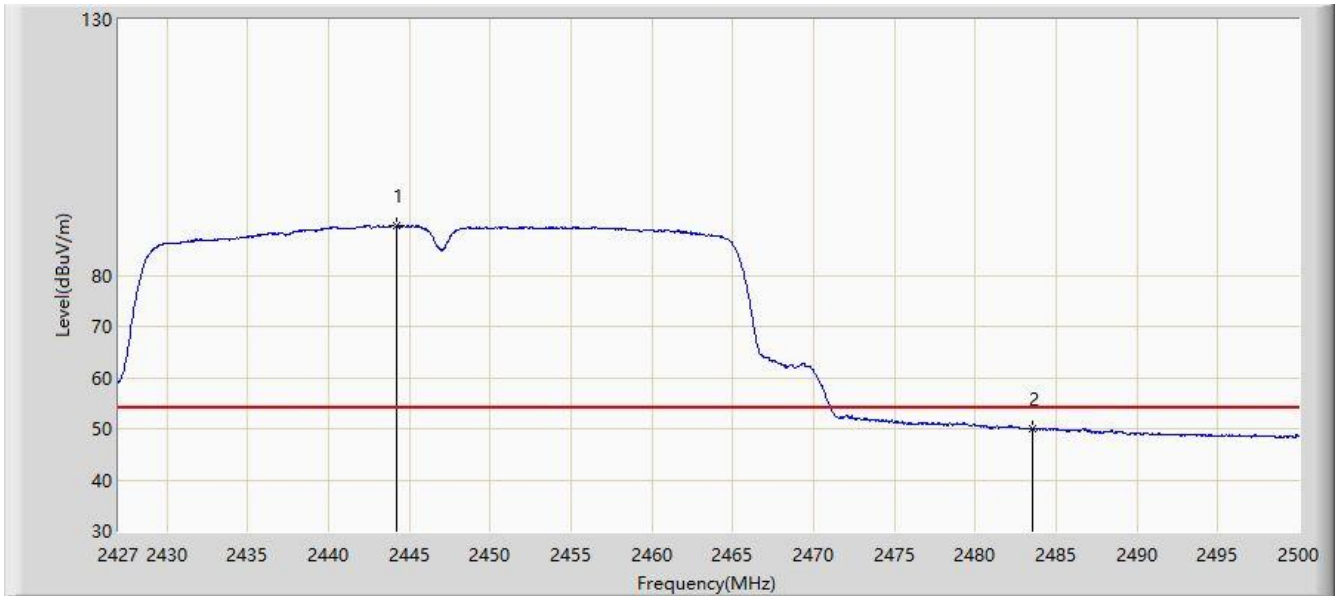


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1		*	2444.228	89.790	57.317	N/A	N/A	32.473	AV
2			2483.500	49.924	17.495	-4.076	54.000	32.429	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

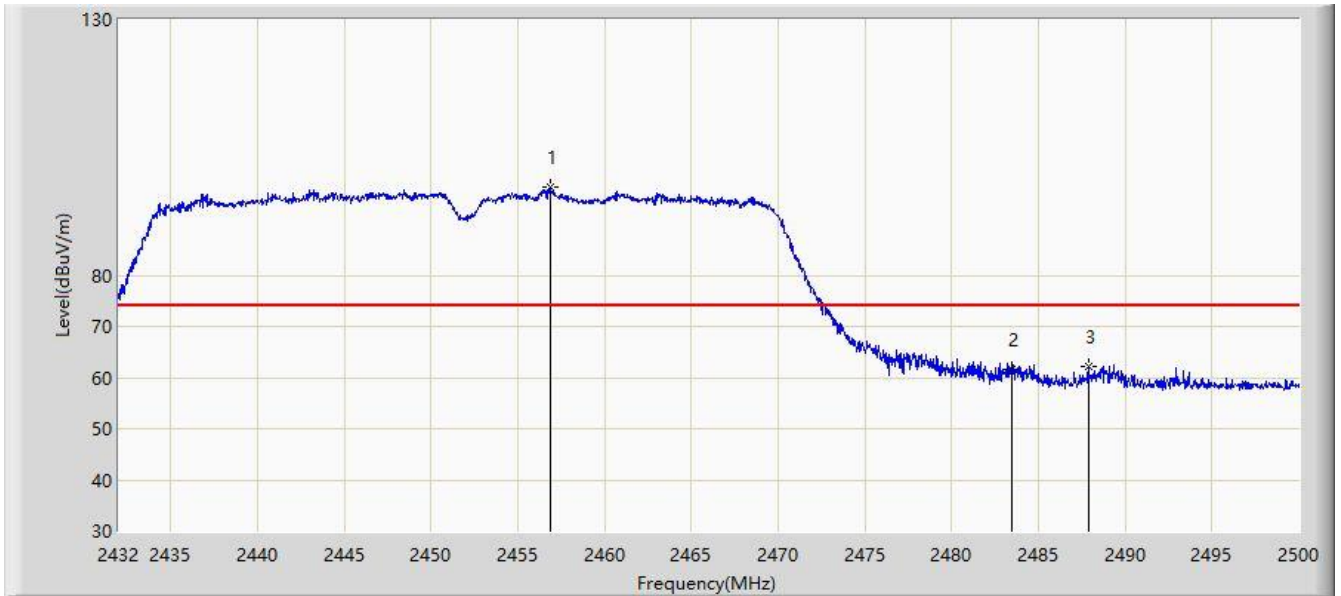


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2456.854	97.168	64.848	N/A	N/A	32.319	PK
2			2483.500	61.665	29.358	-12.335	74.000	32.307	PK
3			2487.862	62.151	29.851	-11.849	74.000	32.300	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

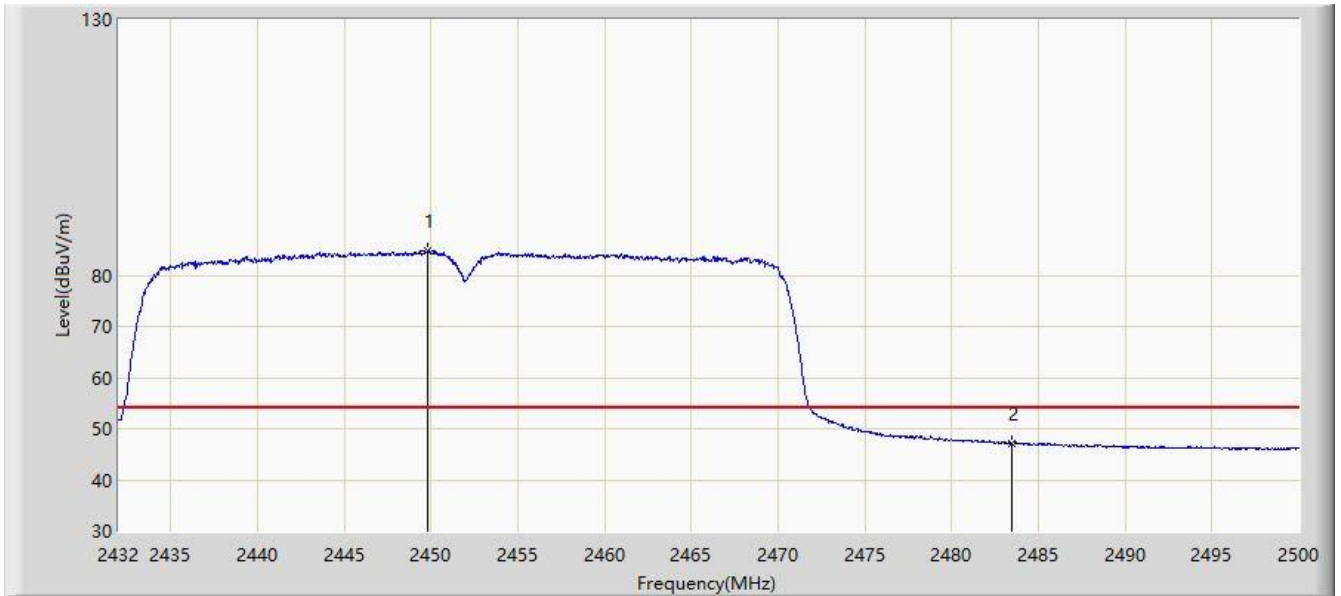


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2449.850	84.836	52.514	N/A	N/A	32.321	AV
2			2483.500	47.076	14.769	-6.924	54.000	32.307	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

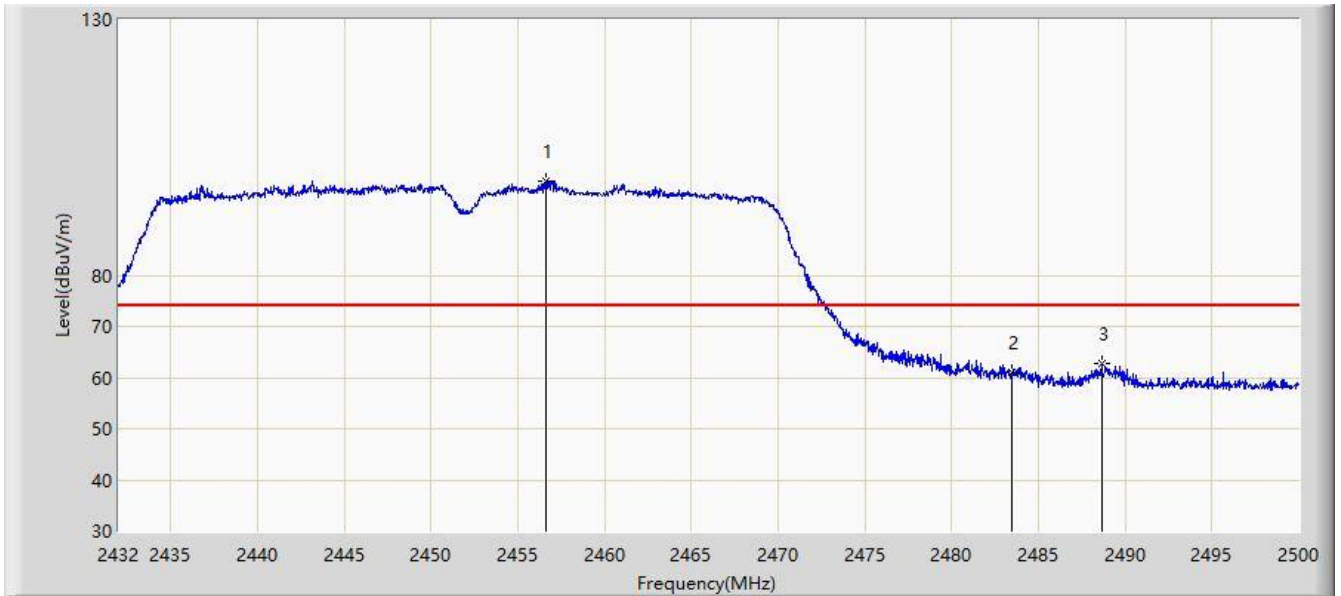


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2456.616	98.530	66.210	N/A	N/A	32.320	PK
2			2483.500	61.086	28.779	-12.914	74.000	32.307	PK
3			2488.644	62.842	30.540	-11.158	74.000	32.301	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2021/02/06 - 02:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Carl Chen
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: By USB
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

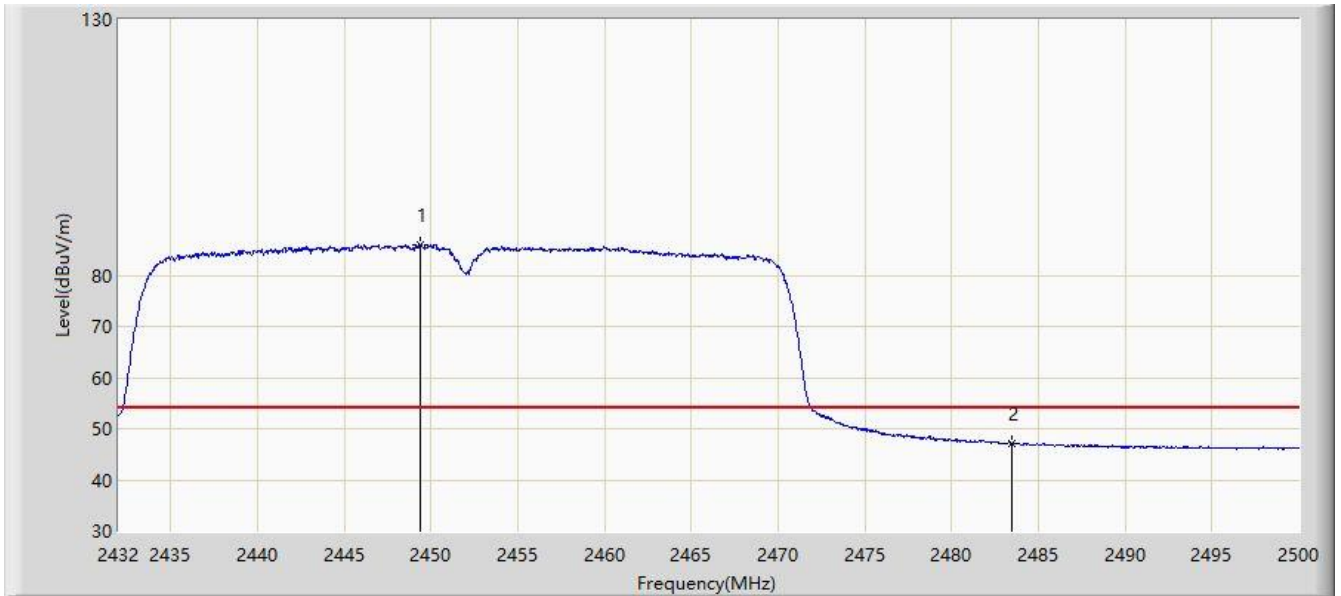

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2449.408	85.812	53.490	N/A	N/A	32.322	AV
2			2483.500	47.149	14.842	-6.851	54.000	32.307	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 6.8. AC Conducted Emissions Measurement


### 6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

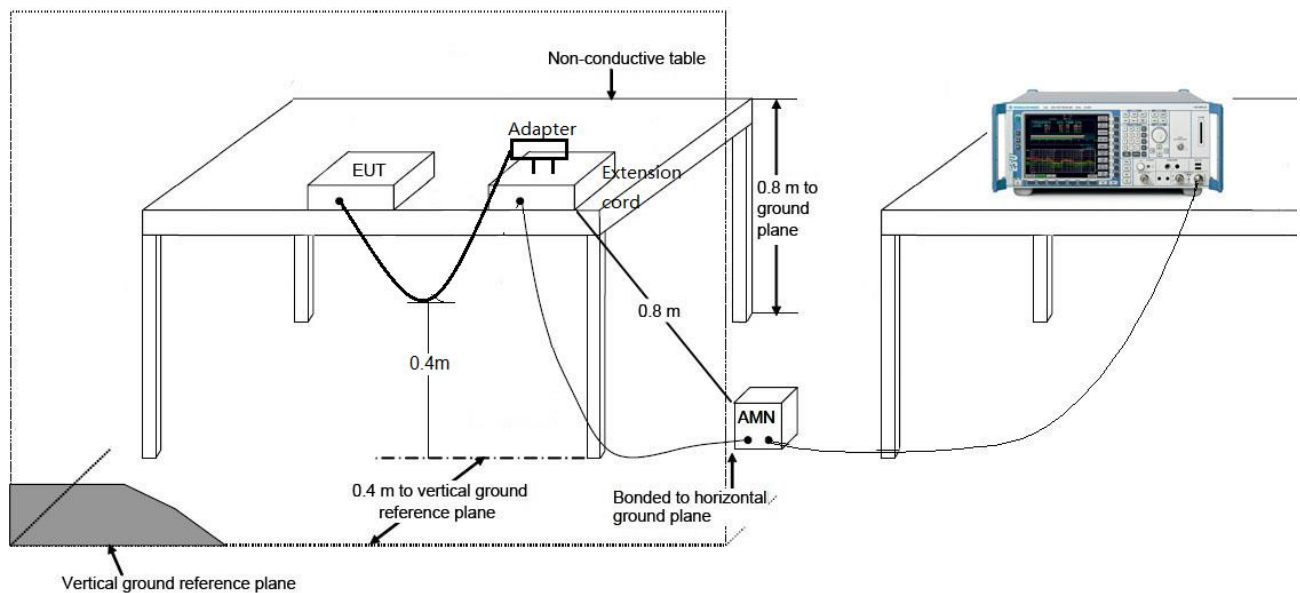

### 6.8.3. Test Result

Site: WZ-SR2	Time: 2021/02/01
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter Off_With Adapter	Polarity: Line
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

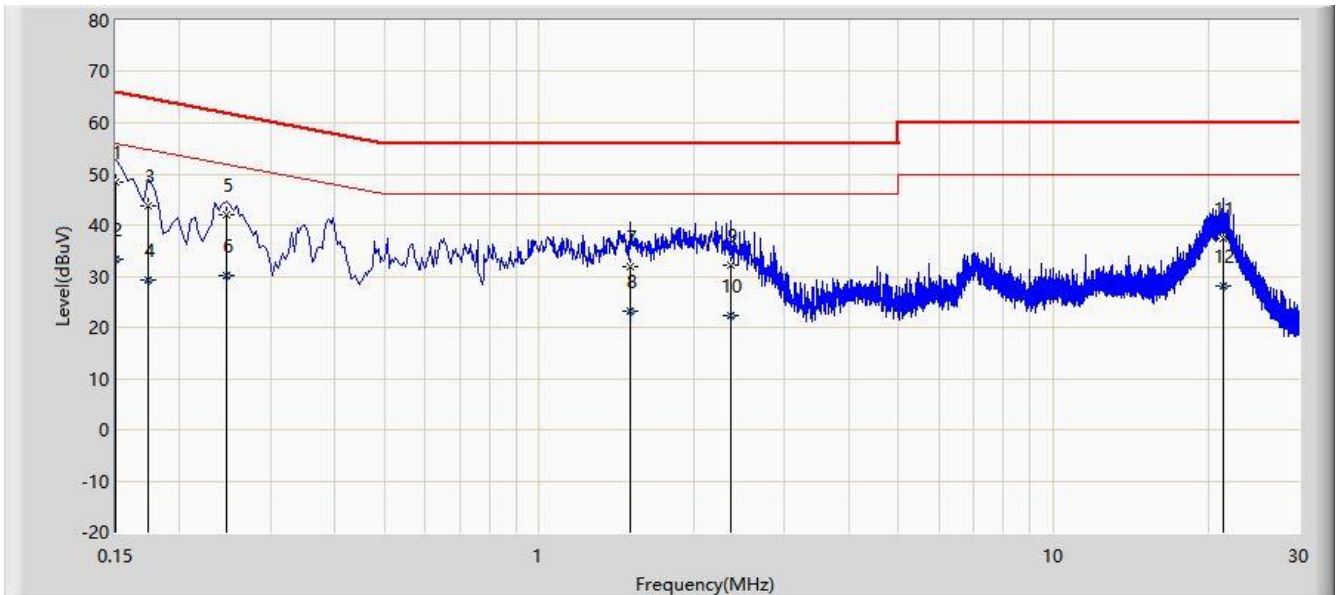


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.150	48.461	39.019	-17.539	66.000	9.441	QP
2			0.150	33.286	23.845	-22.714	56.000	9.441	AV
3			0.174	43.878	34.428	-20.889	64.767	9.450	QP
4			0.174	29.277	19.827	-25.490	54.767	9.450	AV
5			0.246	42.018	32.556	-19.873	61.891	9.462	QP
6			0.246	30.185	20.723	-21.706	51.891	9.462	AV
7			1.502	31.775	22.210	-24.225	56.000	9.565	QP
8			1.502	23.295	13.730	-22.705	46.000	9.565	AV
9			2.362	32.203	22.613	-23.797	56.000	9.589	QP
10			2.362	22.445	12.856	-23.555	46.000	9.589	AV
11			21.402	37.367	27.086	-22.633	60.000	10.281	QP
12			21.402	28.076	17.795	-21.924	50.000	10.281	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2021/02/01
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter Off_With Adapter	Polarity: Neutral
EUT: WIFI+BT Combo Module	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

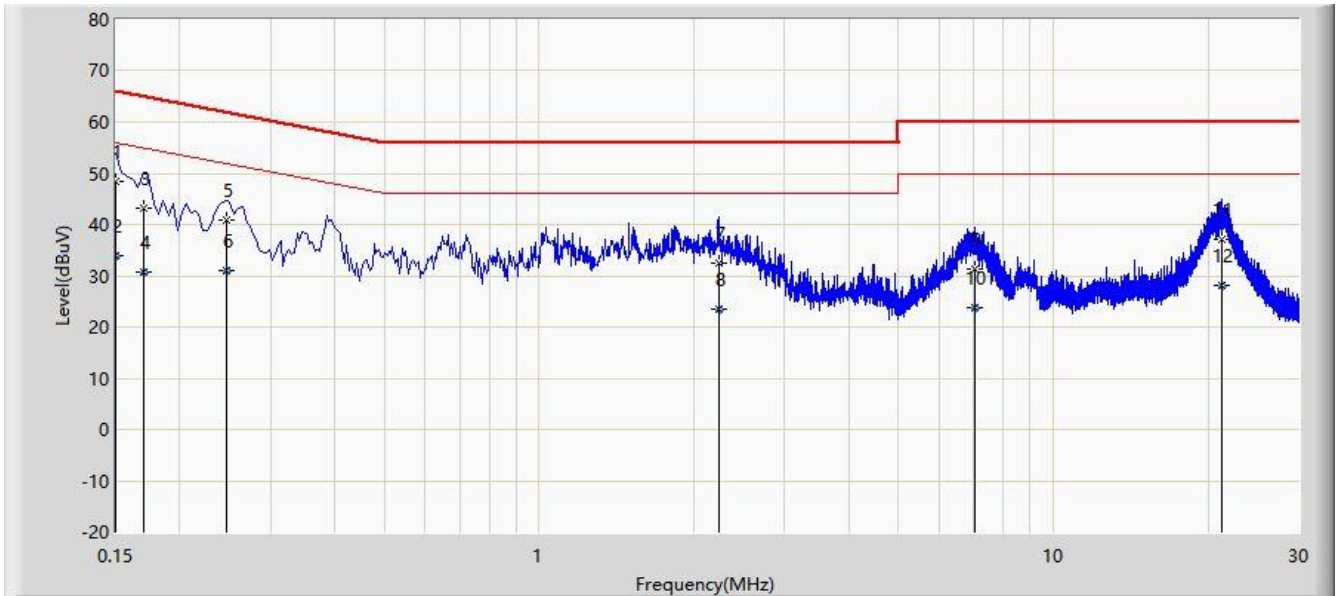

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		*	0.150	48.375	38.933	-17.625	66.000	9.441	QP
2			0.150	34.009	24.568	-21.991	56.000	9.441	AV
3			0.170	43.164	33.717	-21.796	64.960	9.448	QP
4			0.170	30.853	21.405	-24.107	54.960	9.448	AV
5			0.246	41.007	31.544	-20.885	61.891	9.463	QP
6			0.246	31.046	21.583	-20.845	51.891	9.463	AV
7			2.230	32.467	22.890	-23.533	56.000	9.577	QP
8			2.230	23.508	13.931	-22.492	46.000	9.577	AV
9			7.038	31.180	21.379	-28.820	60.000	9.801	QP
10			7.038	23.776	13.974	-26.224	50.000	9.801	AV
11			21.302	37.140	26.824	-22.860	60.000	10.316	QP
12			21.302	28.188	17.872	-21.812	50.000	10.316	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).



## 7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC rules and ISED rules.

————— The End —————

## **Appendix A - Test Setup Photograph**

Refer to "2101RSU052-UT" file.

## **Appendix B - EUT Photograph**

Refer to " 2101RSU052-UE" file.