

## FCC Test Report

**Report No.:** FCBELJ-WTW-P20090374

**FCC ID:** H8N-ASK-MAE340

**Test Model:** ASK-MAE340

**Received Date:** Sep. 22, 2020

**Test Date:** Sep. 23 to 25, 2020

**Issued Date:** Oct. 08, 2020

**Applicant:** ASKEY COMPUTER CORP.

**Address:** 10F, No. 119, JIANKANG RD. ZHONGHE DIST., NEW TAIPEI CITY, 235  
85, TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location (1):** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin  
Chu Hsien 307, Taiwan.

**FCC Registration /** 810758 / TW1085 for Test Location (1)

**Designation Number:** 960022 / TW1058 for Test Location (2)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 Description of EUT .....	6
3.2 Features of EUT .....	6
3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode .....	7
3.4 Test Program Used and Operation Descriptions .....	8
3.5 Primary Clock Frequencies of Internal Source .....	8
<b>4 Configuration and Connections with EUT</b> .....	<b>9</b>
4.1 Connection Diagram of EUT and Peripheral Devices .....	9
4.2 Configuration of Peripheral Devices and Cable Connections .....	10
<b>5 Conducted Emissions at Mains Ports</b> .....	<b>11</b>
5.1 Limits .....	11
5.2 Test Instruments .....	11
5.3 Test Arrangement .....	12
5.4 Supplementary Information .....	12
5.5 Test Results (Mode 1) .....	13
5.6 Test Results (Mode 2) .....	15
<b>6 Radiated Emissions up to 1 GHz</b> .....	<b>17</b>
6.1 Limits .....	17
6.2 Test Instruments .....	18
6.3 Test Arrangement .....	19
6.4 Supplementary Information .....	19
6.5 Test Results .....	20
<b>7 Radiated Emissions above 1 GHz</b> .....	<b>22</b>
7.1 Limits .....	22
7.2 Test Instruments .....	23
7.3 Test Arrangement .....	24
7.4 Supplementary Information .....	24
7.5 Test Results .....	25
<b>8 Pictures of Test Arrangements</b> .....	<b>27</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>28</b>



### Release Control Record

Issue No.	Description	Date Issued
FCBELJ-WTW-P20090374	Original release.	Oct. 08, 2020

## 1 Certificate of Conformity

**Product:** Network Adapter SKU2

**Brand:** Verizon

**Test Model:** ASK-MAE340

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** ASKEY COMPUTER CORP.

**Test Date:** Sep. 23 to 25, 2020

**Standards:** 47 CFR FCC Part 15, Subpart B, Class B  
ICES-003:2016 Issue 6, updated Apr. 2019, Class B  
ANSI C63.4:2014

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Cherry Chuo , **Date:** Oct. 08, 2020  
Cherry Chuo / Specialist

**Approved by :** Ken Lu , **Date:** Oct. 08, 2020  
Ken Lu / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart B / ICES-003:2016 Issue 6, updated Apr. 2019, Class B

ANSI C63.4:2014

FCC Clause	ICES-003 Clause	Test Item	Result/Remarks	Verdict
15.107	6.1	AC Power Line Conducted Emissions	Minimum passing Class B margin is -6.13 dB at 0.46641 MHz.	Pass
15.109	6.2.1	Radiated Emissions up to 1 GHz	Minimum passing Class B margin is -5.22 dB at 104.42 MHz.	Pass
	6.2.2	Radiated Emissions above 1 GHz	Minimum passing Class B margin is -4.47 dB at 1012.75 MHz.	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1GHz	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz~6GHz	5.0 dB
	6GHz~18GHz	4.1 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 Description of EUT

Product	Network Adapter SKU2
Brand	Verizon
Test Model	ASK-MAE340
Sample Status	ENGINEERING SAMPLE
Operating Software	NA
Power Supply rating	Refer to Note
Accessory Device	Adapter x1 Wall Mount Screw x1 Splitter x1
Data Cable Supplied	Coaxial Cable x2 (Shielded, 1m) Ethernet Cable x1 (Unshielded, 1.5m)

Note:

1. The EUT must be supplied with a power adapter and the following different models could be chosen:

Adapter			
No	Brand	Model No.	Spec.
1	FLYPOWER	PS12T120K1000UD	Input: 100-240Vac, 0.35A, 50/60Hz Output: 12Vdc, 1A DC output cable (Unshielded, 1.5 m)
2	LEI	MU12B1120100-A1	Input: 100-240Vac, 0.5A, 50/60Hz Output: 12Vdc, 1A DC output cable (Unshielded, 1.5 m)

#### 3.2 Features of EUT

The tests reported herein were performed according to the method specified by ASKEY COMPUTER CORP., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

### 3.3 Operating Modes of EUT and Determination of Worst Case Operating Mode

For radiated emission test, the EUT has been pre-tested under following test modes, and Mode A was the worst cases for final test.

Mode	Test Condition				
	Radiated emission test				
	Power Supply	Adapter Model	LAN Speed	WAN Speed	Arrangement
<b>A</b>	<b>AC120V / 60HZ</b>	<b>PS12T120K1000UD</b>	<b>1000Mbps</b>	<b>2500Mbps</b>	<b>Wall Mount</b>
B	AC120V / 60HZ	PS12T120K1000UD	100Mbps	2500Mbps	Wall Mount
C	AC120V / 60HZ	PS12T120K1000UD	10Mbps	2500Mbps	Wall Mount
D	AC120V / 60HZ	PS12T120K1000UD	1000Mbps	1000Mbps	Wall Mount
E	AC120V / 60HZ	MU12B1120100-A1	1000Mbps	2500Mbps	Wall Mount
F	AC120V / 60HZ	PS12T120K1000UD	1000Mbps	2500Mbps	Horizontal Placement

NOTE: The test configurations are defined by the applicant requirement.

Test modes are presented in the report as below.

Mode	Test Condition				
	Conducted emission test				
	Power Supply	Adapter Model	LAN Speed	WAN Speed	Arrangement
1	AC120V / 60HZ	PS12T120K1000UD	1000Mbps	2500Mbps	Wall Mount
2	AC120V / 60HZ	MU12B1120100-A1	1000Mbps	2500Mbps	Wall Mount
Mode	Radiated emission test				
	Power Supply	Adapter Model	LAN Speed	WAN Speed	Arrangement
	1	AC120V / 60HZ	PS12T120K1000UD	1000Mbps	2500Mbps

### **3.4 Test Program Used and Operation Descriptions**

1. Turn on the power of all equipment.
2. Support unit A (Laptop) & Support unit B (PC) runs “Ping.exe” program to communicate with Support unit C (AP Router).


### **3.5 Primary Clock Frequencies of Internal Source**

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 1675 MHz, provided by ASKEY COMPUTER CORP., for detailed internal source, please refer to the manufacturer's specifications.



#### 4 Configuration and Connections with EUT

##### 4.1 Connection Diagram of EUT and Peripheral Devices

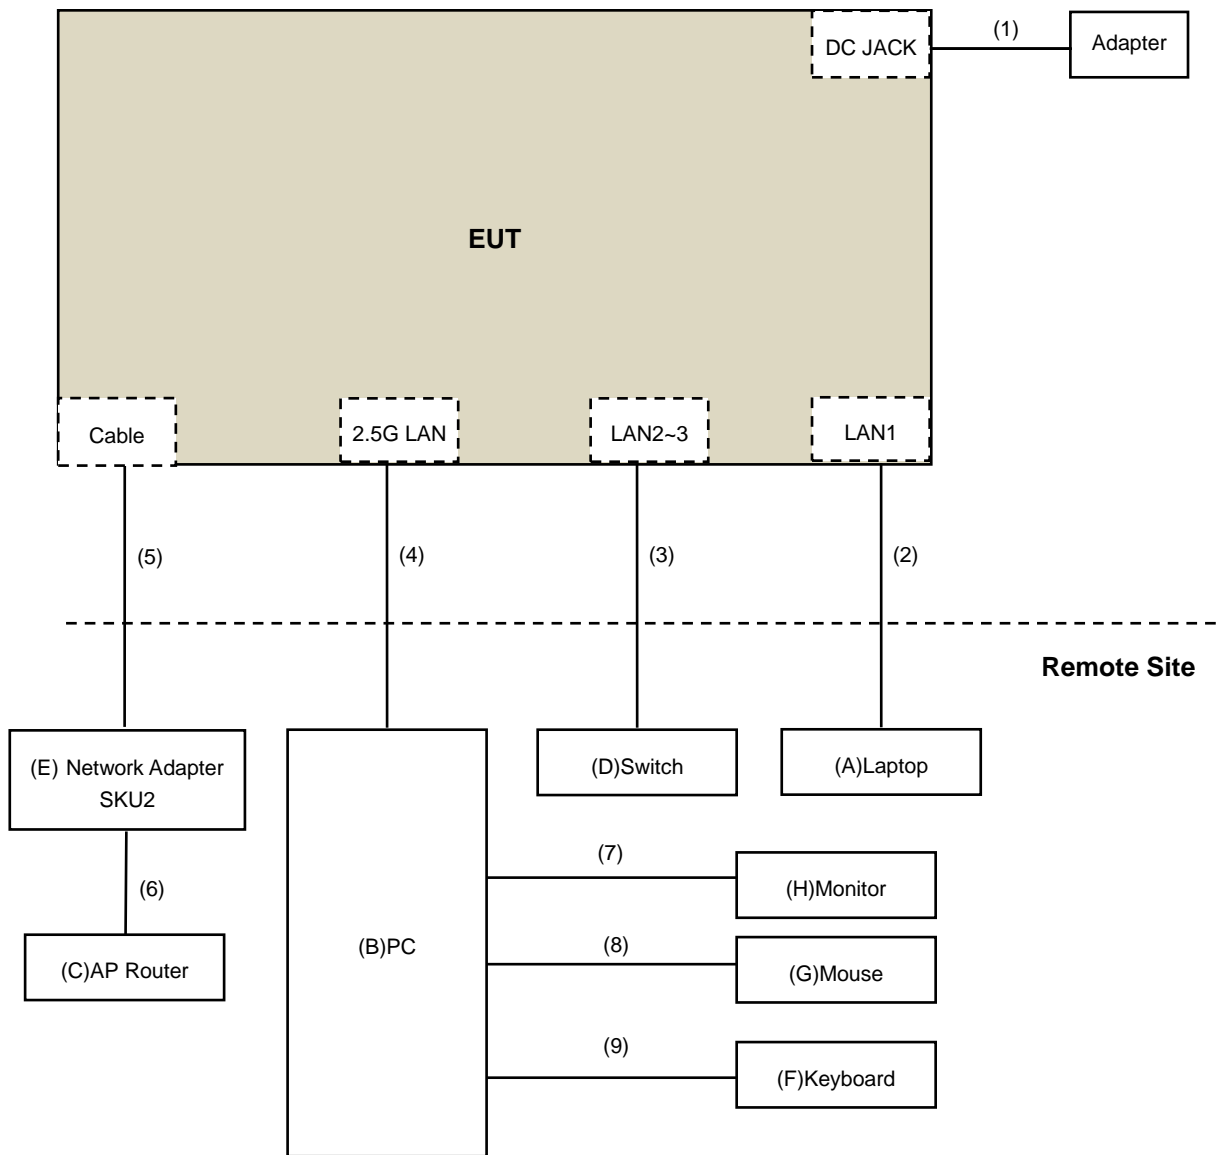

#### 4.2 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	P70F	JJY07L2	FCC DoC	Provided by Lab
B.	PC	Dell	3010	8VN85W1	NA	Provided by Lab
C.	AP Router	ASUS	RT-AX88U	NA	NA	Provided by Lab
D.	Switch	NA	NA	NA	NA	Provided by Lab
E.	Network Adapter SKU2	Verizon	ASK-MAE340	NA	NA	Supplied by applicant
F.	Keyborad	logitech	YU0036	NA	FCC DoC	Provided by Lab
G.	Mouse	logitech	M-U0026	NA	FCC DoC	Provided by Lab
H.	Monitor	LG	24UD58	804NTBK75997	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Power Cable	1	1.5	No	0	Supplied by applicant
2.	Cat 5e Cable	1	10	No	0	Provided by Lab
3.	Cat 5e Cable	2	10	No	0	Provided by Lab
4.	Cat 5e Cable	1	10	No	0	Provided by Lab
5.	Coaxial Cable	1	10	Yes	0	Provided by Lab
6.	Cat 5e Cable	1	3	No	0	Provided by Lab
7.	HDMI Cable	1	1.8	No	0	Provided by Lab
8.	USB Cable	1	1.8	No	0	Provided by Lab
9.	USB Cable	1	1.8	No	0	Provided by Lab

## 5 Conducted Emissions at Mains Ports

### 5.1 Limits

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Notes: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases linearly with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100287	Apr. 16, 2020	Apr. 15, 2021
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100071	Oct. 30, 2019	Oct. 29, 2020
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 08, 2020	Sep. 07, 2021
RF Cable	5D-FB	COACAB-001	Mar. 13, 2020	Mar. 12, 2021
10 dB PAD EMEC	STI02-2200-10	006	Aug. 28, 2020	Aug. 27, 2021
50 ohms Terminator	N/A	EMC-03	Sep. 25, 2019	Sep. 24, 2020
50 ohms Terminator	N/A	EMC-02	Sep. 16, 2020	Sep. 15, 2021
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA


**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conducted Room C
3. The VCCI Con C Registration No. is C-13611.
4. Tested Date: Sep. 23, 2020

### 5.3 Test Arrangement

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

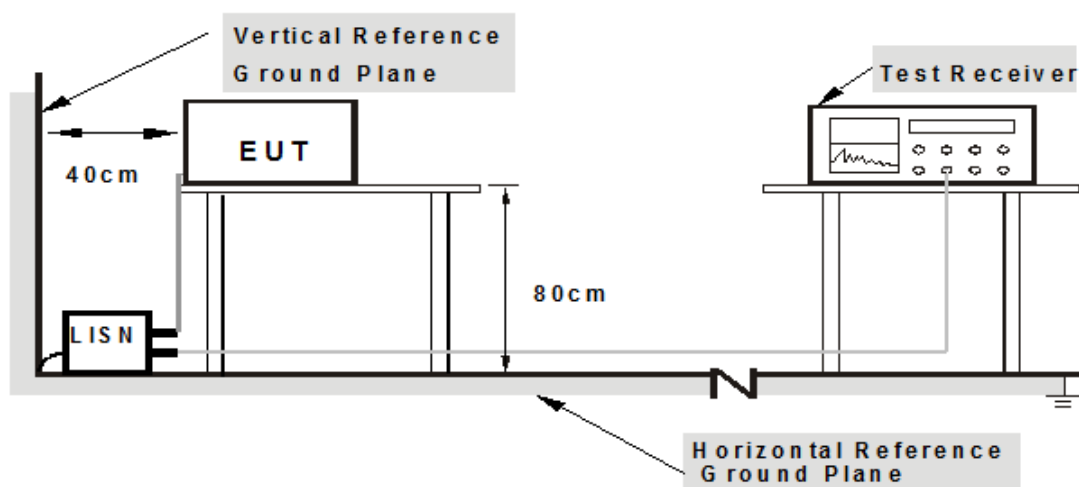

Note: 1. Support units were connected to second LISN.

### 5.4 Supplementary Information

There is not any deviation from the test standards for the test method.


### 5.5 Test Results (Mode 1)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	26°C, 63%RH
<b>Test Mode</b>	Mode 1	<b>Tested by</b>	Eagle Chen

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.94	38.83	24.36	48.77	34.30	65.58	55.58	-16.81	-21.28
2	0.17734	9.95	36.86	22.65	46.81	32.60	64.61	54.61	-17.80	-22.01
3	0.20078	9.95	34.10	20.20	44.05	30.15	63.58	53.58	-19.53	-23.43
4	0.22031	9.95	31.53	17.62	41.48	27.57	62.81	52.81	-21.33	-25.24
5	0.47813	9.97	28.69	19.03	38.66	29.00	56.37	46.37	-17.71	-17.37
6	19.73828	10.55	21.63	13.46	32.18	24.01	60.00	50.00	-27.82	-25.99

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

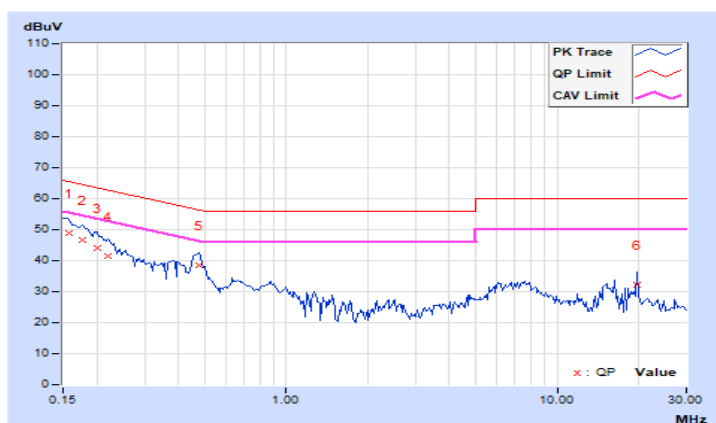


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	26°C, 63%RH
<b>Test Mode</b>	Mode 1	<b>Tested by</b>	Eagle Chen

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	40.02	27.54	49.97	37.49	65.79	55.79	-15.82	-18.30
2	0.17734	9.96	36.79	23.45	46.75	33.41	64.61	54.61	-17.86	-21.20
3	0.20078	9.96	34.23	21.46	44.19	31.42	63.58	53.58	-19.39	-22.16
4	0.27500	9.97	27.64	16.16	37.61	26.13	60.97	50.97	-23.36	-24.84
<b>5</b>	<b>0.46641</b>	<b>9.98</b>	<b>33.31</b>	<b>30.47</b>	<b>43.29</b>	<b>40.45</b>	<b>56.58</b>	<b>46.58</b>	<b>-13.29</b>	<b>-6.13</b>
6	0.58359	9.99	20.53	15.40	30.52	25.39	56.00	46.00	-25.48	-20.61

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

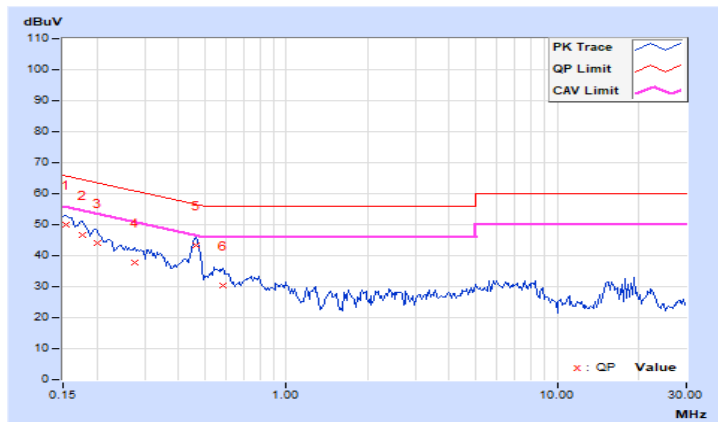


### 5.6 Test Results (Mode 2)

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	26°C, 63%RH
<b>Test Mode</b>	Mode 2	<b>Tested by</b>	Eagle Chen

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15009	9.94	46.36	23.83	56.30	33.77	66.00	56.00	-9.70	-22.23
2	0.17734	9.95	45.54	32.74	55.49	42.69	64.61	54.61	-9.12	-11.92
3	0.18516	9.95	41.24	21.68	51.19	31.63	64.25	54.25	-13.06	-22.62
4	0.21250	9.95	42.32	29.51	52.27	39.46	63.11	53.11	-10.84	-13.65
5	0.22422	9.95	38.25	19.97	48.20	29.92	62.66	52.66	-14.46	-22.74
6	0.24375	9.95	37.77	25.19	47.72	35.14	61.97	51.97	-14.25	-16.83
7	0.45859	9.97	33.82	23.40	43.79	33.37	56.72	46.72	-12.93	-13.35

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

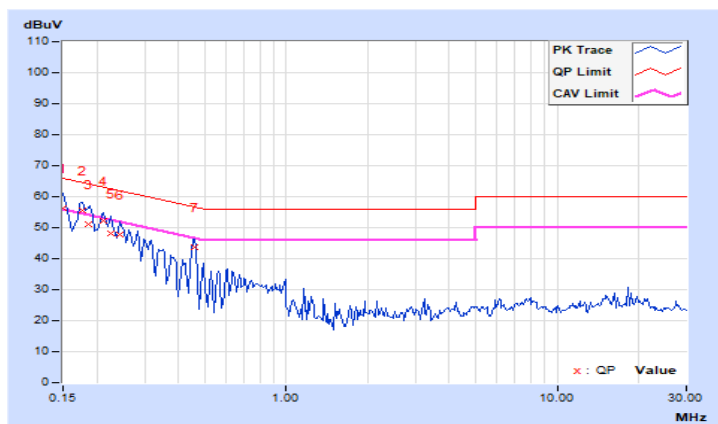


<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	26°C, 63%RH
<b>Test Mode</b>	Mode 2	<b>Tested by</b>	Eagle Chen

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15022	9.95	48.24	27.00	58.19	36.95	65.99	55.99	-7.80	-19.04
2	0.17734	9.96	47.96	37.70	57.92	47.66	64.61	54.61	-6.69	-6.95
3	0.21250	9.96	44.45	33.22	54.41	43.18	63.11	53.11	-8.70	-9.93
4	0.22422	9.96	37.80	22.74	47.76	32.70	62.66	52.66	-14.90	-19.96
5	0.24766	9.96	39.88	28.24	49.84	38.20	61.84	51.84	-12.00	-13.64
6	0.28281	9.97	37.10	26.87	47.07	36.84	60.73	50.73	-13.66	-13.89
7	0.45859	9.98	34.89	29.46	44.87	39.44	56.72	46.72	-11.85	-7.28

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

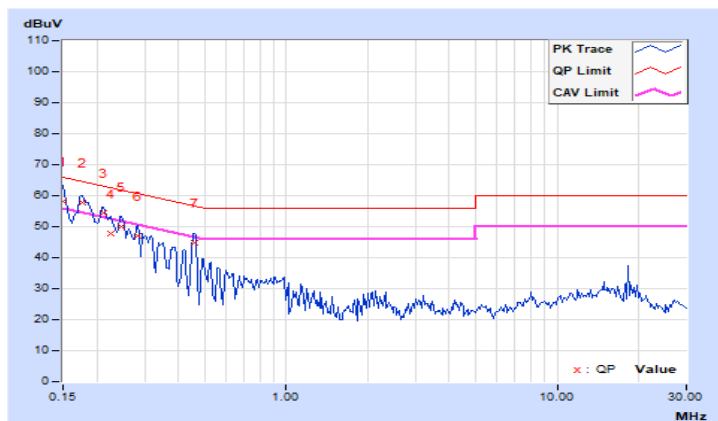



## 6 Radiated Emissions up to 1 GHz

### 6.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960		47	37	
960-1000	49.5	43.5		

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960		57.5	47.5	
960-1000	60	54		

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
  3. QP detector shall be applied if not specified.

## 6.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 24, 2020	July 23, 2021
Horn Antenna FT-RF	HA-07M18G-NF	0000320091110	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier Agilent	8449B	3008A02578	June 09, 2020	June 08, 2021
RF Cable EMCI	EMC104-SM-SM-2000	181208	Aug. 25, 2020	Aug. 24, 2021
RF Cable EMCI	EMC104-SM-SM-6000	181209	Aug. 25, 2020	Aug. 24, 2021
RF Cable EMCI	EMC104-SM-SM-8500	181211	Aug. 25, 2020	Aug. 24, 2021
Software BVADT	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Fix tool for Boresight antenna tower	BAF-01	5	NA	NA


### Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Chamber G room
3. Tested Date: Sep. 25, 2020

### 6.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

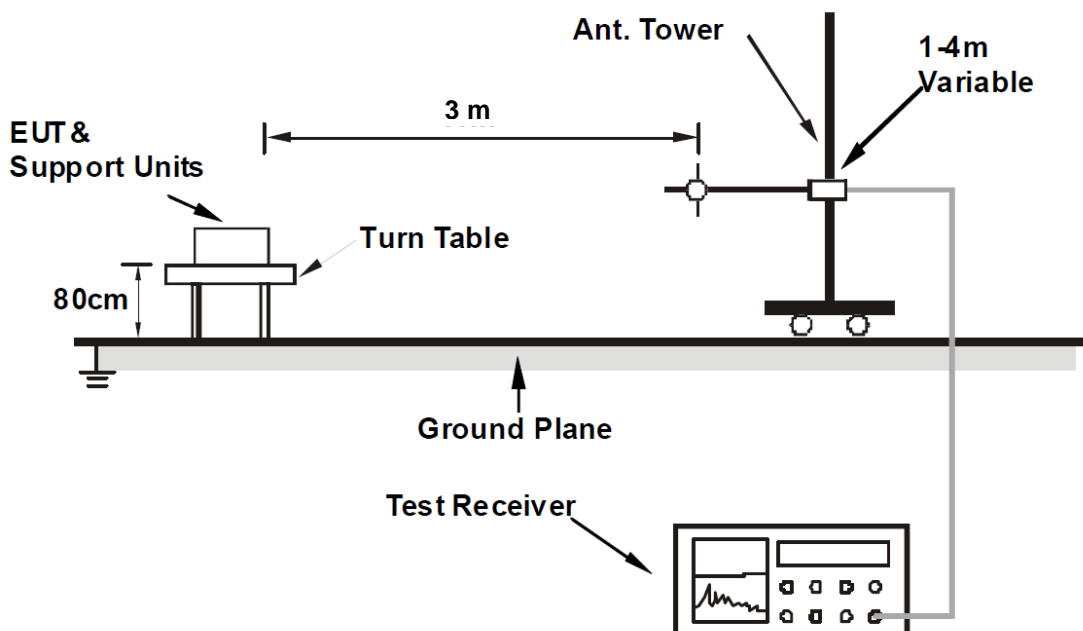

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 6.4 Supplementary Information

There is not any deviation from the test standards for the test method.


### 6.5 Test Results

<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	22°C, 66%RH
<b>Test Mode</b>	Mode 1	<b>Tested By</b>	Abner Chang

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.56	29.70 QP	43.50	-13.80	2.00 H	360	39.18	-9.48
2	135.25	30.61 QP	43.50	-12.89	2.00 H	360	39.36	-8.75
3	189.83	30.79 QP	43.50	-12.71	2.00 H	346	41.31	-10.52
4	253.15	31.79 QP	46.00	-14.21	2.00 H	360	40.63	-8.84
5	759.37	34.50 QP	46.00	-11.50	1.00 H	197	30.57	3.93
6	887.50	36.08 QP	46.00	-9.92	1.00 H	160	30.45	5.63

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

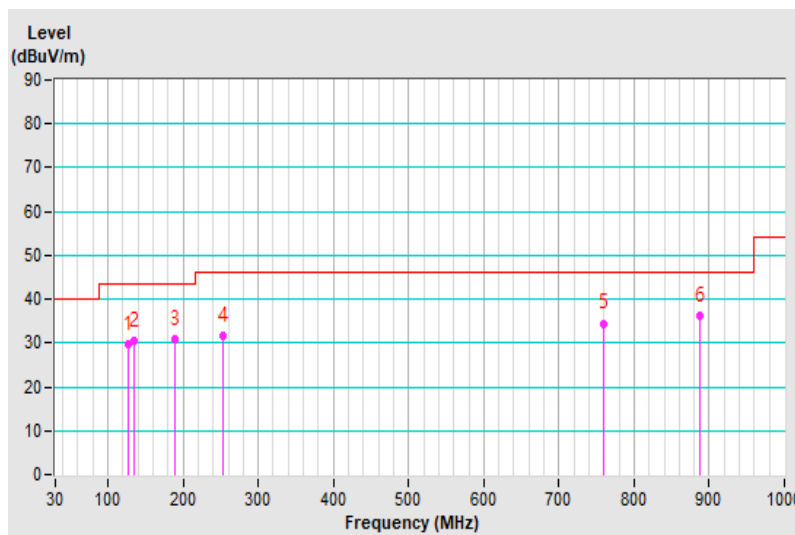


<b>Frequency Range</b>	30MHz ~ 1GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP), 120kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	22°C, 66%RH
<b>Test Mode</b>	Mode 1	<b>Tested By</b>	Abner Chang

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	52.99	33.84 QP	40.00	-6.16	3.00 V	2	42.18	-8.34
2	<b>104.42</b>	<b>38.28 QP</b>	<b>43.50</b>	<b>-5.22</b>	<b>1.00 V</b>	<b>248</b>	<b>50.00</b>	<b>-11.72</b>
3	126.59	37.76 QP	43.50	-5.74	2.00 V	0	47.24	-9.48
4	258.29	31.91 QP	46.00	-14.09	1.00 V	56	40.57	-8.66
5	499.96	39.85 QP	46.00	-6.15	1.00 V	329	41.70	-1.85
6	887.50	36.49 QP	46.00	-9.51	2.00 V	0	30.86	5.63

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

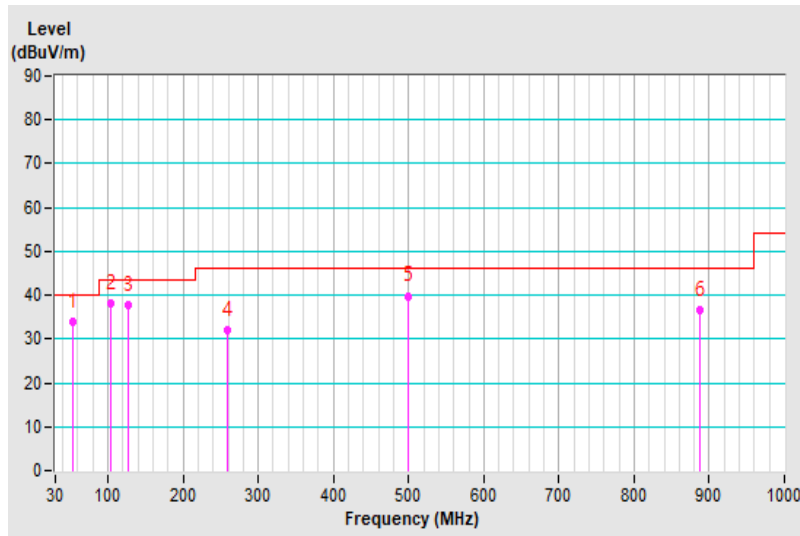

## 7 Radiated Emissions above 1 GHz

### 7.1 Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 49.5	Avg: 43.5	Not defined	Not defined
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB $\mu$ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
1000-3000	Avg: 60	Avg: 54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74

- Notes:
1. The lower limit shall apply at the transition frequencies.
  2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
  3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

## 7.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 24, 2020	July 23, 2021
Horn Antenna FT-RF	HA-07M18G-NF	0000320091110	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier Agilent	8449B	3008A02578	June 09, 2020	June 08, 2021
RF Cable EMCI	EMC104-SM-SM-2000	181208	Aug. 25, 2020	Aug. 24, 2021
RF Cable EMCI	EMC104-SM-SM-6000	181209	Aug. 25, 2020	Aug. 24, 2021
RF Cable EMCI	EMC104-SM-SM-8500	181211	Aug. 25, 2020	Aug. 24, 2021
Software BVADT	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA
Fix tool for Boresight antenna tower	BAF-01	5	NA	NA


**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Chamber G room
3. Tested Date: Sep. 23, 2020

### 7.3 Test Arrangement

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.

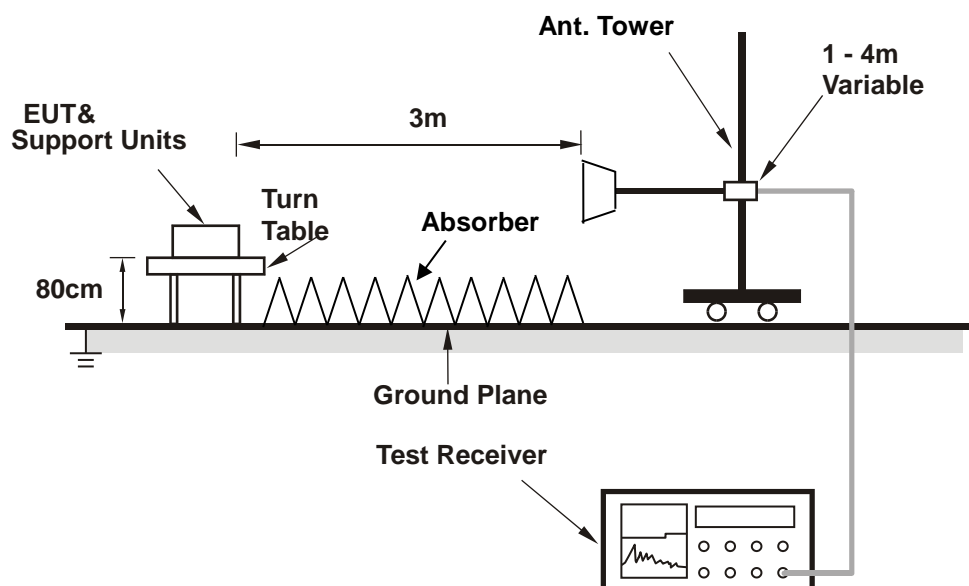

The test arrangement is in accordance with ANSI 63.4:2014. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.4 Supplementary Information

There is not any deviation from the test standards for the test method.




### 7.5 Test Results

<b>Frequency Range</b>	1GHz ~ 8.375GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	22°C, 68%RH
<b>Test Mode</b>	Mode 1	<b>Tested By</b>	Abner Chang

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1012.75	52.92 PK	74.00	-21.08	2.00 H	260	61.10	-8.18
2	1012.75	49.53 AV	54.00	-4.47	2.24 H	323	57.71	-8.18
3	1154.70	47.62 PK	74.00	-26.38	1.00 H	262	54.42	-6.80
4	1154.70	23.62 AV	54.00	-30.38	1.00 H	256	30.42	-6.80
5	2660.05	49.93 PK	74.00	-24.07	1.00 H	360	49.17	0.76
6	2660.05	28.66 AV	54.00	-25.34	1.00 H	360	27.90	0.76
7	5193.90	45.68 PK	74.00	-28.32	1.00 H	276	36.45	9.23
8	5193.90	33.23 AV	54.00	-20.77	1.00 H	360	24.00	9.23
9	6880.30	54.18 PK	74.00	-19.82	1.00 H	360	36.93	17.25
10	6880.30	40.52 AV	54.00	-13.48	1.00 H	349	23.27	17.25
11	8031.20	53.49 PK	74.00	-20.51	1.00 H	255	36.80	16.69
12	8031.20	39.93 AV	54.00	-14.07	1.00 H	360	23.24	16.69

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

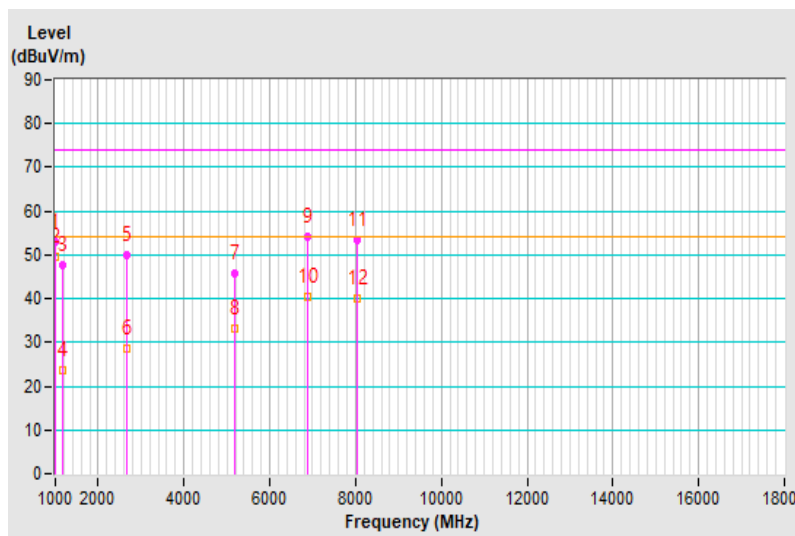


<b>Frequency Range</b>	1GHz ~ 8.375GHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Peak (PK) / Average (AV), 1MHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	22°C, 68%RH
<b>Test Mode</b>	Mode 1	<b>Tested By</b>	Abner Chang

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1012.75	45.81 PK	74.00	-28.19	1.00 V	307	54.34	-8.53
2	1012.75	42.26 AV	54.00	-11.74	1.34 V	302	50.79	-8.53
3	1997.05	46.31 PK	74.00	-27.69	1.00 V	120	48.51	-2.20
4	1997.05	32.41 AV	54.00	-21.59	1.00 V	104	34.61	-2.20
5	2999.20	46.48 PK	74.00	-27.52	2.00 V	18	45.39	1.09
6	2999.20	32.85 AV	54.00	-21.15	2.00 V	151	31.76	1.09
7	4218.10	44.90 PK	74.00	-29.10	1.00 V	91	37.80	7.10
8	4218.10	32.40 AV	54.00	-21.60	1.00 V	161	25.30	7.10
9	6266.60	50.38 PK	74.00	-23.62	1.00 V	244	37.03	13.35
10	6266.60	37.29 AV	54.00	-16.71	1.00 V	152	23.94	13.35
11	6883.70	52.84 PK	74.00	-21.16	1.00 V	113	36.01	16.83
12	6883.70	40.46 AV	54.00	-13.54	1.00 V	161	23.63	16.83

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

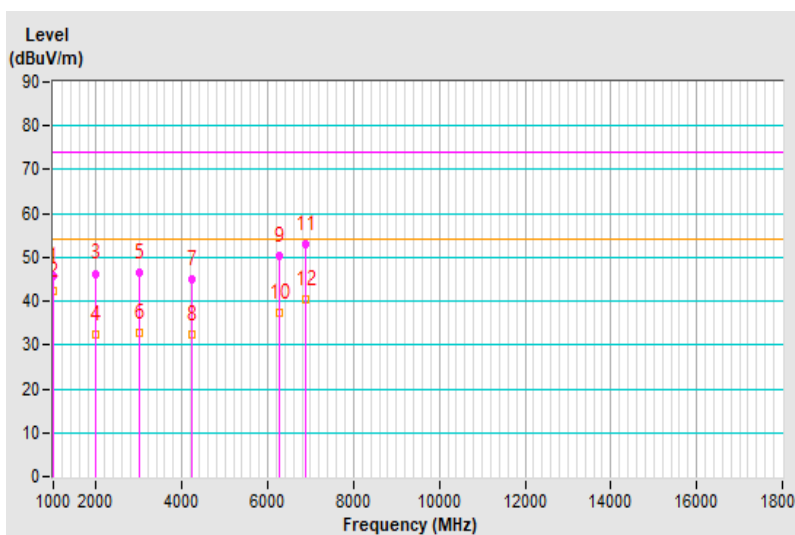

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---