



FCC RADIO TEST REPORT

FCC ID : H8N-RTL0055VW **Equipment** : EQUIPO 4G VOLTE

Brand Name : Movistar

Model Name : RTL0055VW-D112

Applicant : ASKEY COMPUTER CORPORATION

10F, No. 119, Jiankang Road, Zhonghe

Dist., New Taipei City, Taiwan

Manufacturer: ASKEY COMPUTER CORPORATION

10F, No. 119, Jiankang Road, Zhonghe

Dist., New Taipei City, Taiwan

Standard : 47 CFR Part 2, 24(E), 27

The product was received on Sep. 18, 2018 and testing was started from Oct. 04, 2018 and completed on Oct. 07, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Joseph Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 : 1 of 19 Page Number FAX: 886-3-328-4978 : Oct. 22, 2018 Issued Date : 01

Table of Contents

Report No. : FG891815B

His	tory o	f this test reportf	3
Sur	nmary	of Test Result	4
1	Gene	ral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	5
	1.4	Applicable Standards	5
2	Test	Configuration of Equipment Under Test	6
	2.1	Test Mode	6
	2.2	Connection Diagram of Test System	7
	2.3	Support Unit used in test configuration and system	7
	2.4	Measurement Results Explanation Example	7
	2.5	Frequency List of Low/Middle/High Channels	8
3	Cond	ucted Test Items	9
	3.1	Measuring Instruments	9
	3.2	Conducted Output Power and ERP/EIRP	.10
	3.3	Peak-to-Average Ratio	.11
	3.4	Occupied Bandwidth	.12
	3.5	Conducted Band Edge	.13
	3.6	Conducted Spurious Emission	.14
	3.7	Frequency Stability	.15
4	Radia	ted Test Items	.16
	4.1	Measuring Instruments	.16
	4.2	Radiated Spurious Emission	.17
5	List o	f Measuring Equipment	.18
6	Unce	rtainty of Evaluation	.19
App	endi	A. Test Results of Conducted Test	
App	endi	B. Test Results of ERP/EIRP and Radiated Test	
App	pendi	c C. Test Setup Photographs	

TEL: 886-3-327-3456 Page Number : 2 of 19 FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018 Report Version : 01

Report Template No.: BU5-FGLTE Version 2.1

History of this test report

Report No. : FG891815B

Report No.	Version	Description	Issued Date
FG891815B	01	Initial issue of report	Oct. 22, 2018

TEL: 886-3-327-3456 Page Number : 3 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

Summary of Test Result

Report No.: FG891815B

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark	
	§2.1046	Conducted Output Power	Reporting only		
3.1	§24.232 (c)	Equivalent Isotropic Radiated Power (Band 2)	Pass	-	
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)	1 400		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-	
3.4	§2.1049	Occupied Bandwidth	Reporting only	-	
3.5	§2.1051 §24.238 (a) §27.53 (h)	Conducted Band Edge Measurement (Band 2) (Band 4)	Pass	-	
3.6	§2.1051§22.917 (a) §24.238 (a) §27.53 (h)	Conducted Spurious Emission (Band 2) (Band 4)	Pass	-	
3.7	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-	
4.2	§2.1053 §27.53 (h)	Radiated Spurious Emission (Band 2) (Band 4)	Pass	Under limit 20.81 dB at 5160.000 MHz	

Reviewed by: Wii Chang

Report Producer: Maggie Chiang

TEL: 886-3-327-3456 Page Number : 4 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE and Wi-Fi 2.4GHz 802.11b/g/n

Product Specification subjective to this standard						
Antenna Type	WWAN: PIFA Antenna					
Antenna Type	WLAN: PIFA Antenna					

Report No.: FG891815B

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.					
	No.52, Huaya 1st Rd., Guishan Dist.,					
Test Site Location	Taoyuan City, Taiwan (R.O.C.)					
rest Site Location	TEL: +886-3-327-3456					
	FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
Test site NO.	TH05-HY	03CH07-HY				

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- + ANSI C63.26-2015
- ANSI / TIA-603-E
- 47 CFR Part 2, 24(E), 27
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 5 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Report No.: FG891815B

											-				
Test Items	Dand		В	andwid	th (MH	z)		Modu	ılation		RB#		Tes	st Chan	nel
rest items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	Н
Max. Output	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Power	4	v	v	v	v	v	v	v	v	>	v	v	v	v	v
Peak-to-Ave	2						v	v	v	٧		v	v	v	v
rage Ratio	4						v	v	v	V		v	v	v	v
26dB and	2	v	v	v	v	v	v	v	v			v	v	v	v
99% Bandwidth	4	v	v	v	v	v	v	v	v			v	v	v	v
Conducted	2	v	v	v	v	v	v	v	v	٧		v	v		v
Band Edge	4	v	v	v	v	v	v	v	v	٧		v	v		v
Conducted	2	v	v	v	v	v	v	v	v	٧			v	v	v
Spurious Emission	4	v	v	v	v	v	v	v	v	v			v	v	v
Frequency	2				v			v				v		v	
Stability	4				v			v				v		v	
E.R.P/	2	v	v	v	v	v	v	v	v	v	v		v	v	v
E.I.R.P	4	v	v	v	v	v	v	v	v	٧	v		v	v	v
Radiated	2						Wors	t Case					v	v	v
Spurious Emission	4	Worst Case										v	v	v	
Remark	The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported.														

[.] All the radiated test cases were performed with Adapter 2 (US Plug).

TEL: 886-3-327-3456 Page Number : 6 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

2.2 Connection Diagram of Test System

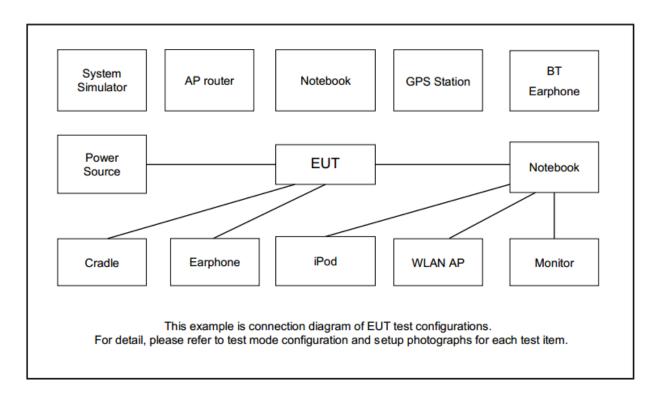

Report No.: FG891815B

2.3 Support Unit used in test configuration and system

I	ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
	1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number: 7 of 19
FAX: 886-3-328-4978 Issued Date: 0ct. 22, 2018

2.5 Frequency List of Low/Middle/High Channels

	LTE Band 2 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	18700	18900	19100					
20	Frequency	1860	1880	1900					
15	Channel	18675	18900	19125					
15	Frequency	1857.5	1880	1902.5					
10	Channel	18650	18900	19150					
10	Frequency	1855	1880	1905					
5	Channel	18625	18900	19175					
5	Frequency	1852.5	1880	1907.5					
3	Channel	18615	18900	19185					
3	Frequency	1851.5	1880	1908.5					
1.4	Channel	18607	18900	19193					
1.4	Frequency	1850.7	1880	1909.3					

Report No.: FG891815B

	LTE Band 4 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	20050	20175	20300					
20	Frequency	1720	1732.5	1745					
15	Channel	20025	20175	20325					
15	Frequency	1717.5	1732.5	1747.5					
10	Channel	20000	20175	20350					
10	Frequency	1715	1732.5	1750					
5	Channel	19975	20175	20375					
5	Frequency	1712.5	1732.5	1752.5					
3	Channel	19965	20175	20385					
3	Frequency	1711.5	1732.5	1753.5					
1.4	Channel	19957	20175	20393					
1.4	Frequency	1710.7	1732.5	1754.3					

TEL: 886-3-327-3456 Page Number : 8 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.


3.1.1 Test Setup

3.1.2 Conducted Output Power




Report No.: FG891815B

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

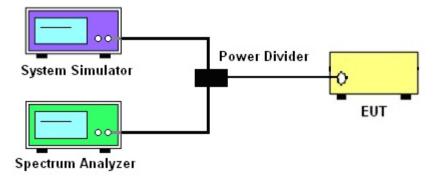

3.1.4 Frequency Stability

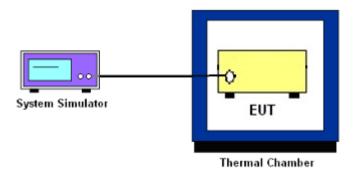

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 9 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG891815B

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 10 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Report No.: FG891815B

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 11 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG891815B

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
 (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEL: 886-3-327-3456 Page Number : 12 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + 10log₁₀(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

Report No.: FG891815B

27.53 (h)

For operations in the 1710 - 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[Watts])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 5. Set spectrum analyzer with RMS detector.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. Checked that all the results comply with the emission limit line.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 13 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG891815B

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 14 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Report No.: FG891815B

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 15 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018


4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.


4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

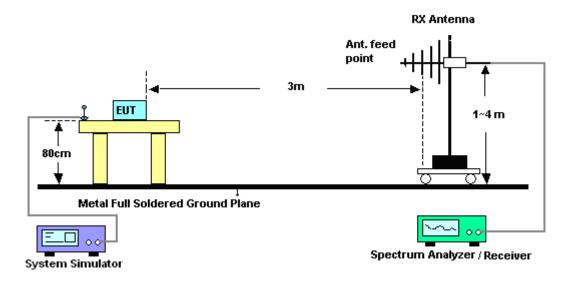

Report No.: FG891815B

For radiated test above 1GHz

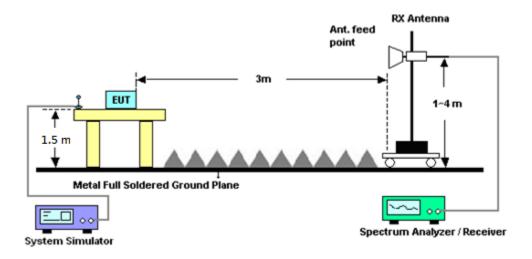

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 16 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

4.2 Radiated Spurious Emission

4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

Report No.: FG891815B

The power of any emission outside of the authorized operating frequency ranges must be attenuated

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 13, 2017	Oct. 05, 2018~ Oct. 07, 2018	Oct. 12, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 07, 2017	Oct. 05, 2018~ Oct. 07, 2018	Nov. 06, 2018	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Aug. 29, 2018	Oct. 05, 2018~ Oct. 07, 2018	Aug. 28, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890089	1V~20V 0.5A~5A	Jan. 12, 2018	Oct. 05, 2018~ Oct. 07, 2018	Jan. 11, 2019	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20dB 25WSMA Directional Coupler	#B	1G~18GHz	Dec. 04, 2017	Oct. 05, 2018~ Oct. 07, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800N 1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Oct. 04, 2018~ Oct. 05, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00211469	1GHz ~ 18GHz	Aug. 06, 2018	Oct. 04, 2018~ Oct. 05, 2018	Aug. 05, 2019	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00066583	1GHz ~ 18GHz	Aug. 06, 2018	Oct. 04, 2018~ Oct. 05, 2018	Aug. 05, 2019	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Oct. 04, 2018~ Oct. 05, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Oct. 04, 2018~ Oct. 05, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 27, 2018	Oct. 04, 2018~ Oct. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 27, 2018	Oct. 04, 2018~ Oct. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 27, 2018	Oct. 04, 2018~ Oct. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Oct. 04, 2018~ Oct. 05, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Oct. 04, 2018~ Oct. 05, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz,V SWR: 2.5:1 max	Jul. 16, 2018	Oct. 04, 2018~ Oct. 05, 2018	Jul. 15, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 10, 2017	Oct. 04, 2018~ Oct. 05, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Oct. 04, 2018~ Oct. 05, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Oct. 04, 2018~ Oct. 05, 2018	May 21, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	80504004656 H	N/A	N/A	Oct. 04, 2018~ Oct. 05, 2018	N/A	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Oct. 04, 2018~ Oct. 05, 2018	Dec. 06, 2018	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 21, 2017	Oct. 04, 2018~ Oct. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)

Report No.: FG891815B

TEL: 886-3-327-3456 Page Number : 18 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.05
Confidence of 95% (U = 2Uc(y))	3.05

Report No.: FG891815B

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	2.44
Confidence of 95% (U = 2Uc(y))	3.44

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	3.95
Confidence of 95% (U = 2Uc(y))	3.95

TEL: 886-3-327-3456 Page Number : 19 of 19
FAX: 886-3-328-4978 Issued Date : Oct. 22, 2018



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
20	1	0		22.68	22.42	22.60			
20	1	49		23.17	22.92	22.80			
20	1	99		22.27	22.88	22.36			
20	50	0	QPSK	21.97	21.68	21.82			
20	50	24		21.90	21.66	21.75			
20	50	50		21.68	21.70	21.68			
20	100	0		21.87	21.67	21.80			
20	1	0		21.71	21.42	21.53			
20	1	49		21.68	21.40	21.59			
20	1	99		21.37	21.59	21.46			
20	50	0	16-QAM	21.05	20.66	20.81			
20	50	24		20.88	20.60	20.77			
20	50	50		20.67	20.77	20.80			
20	100	0		20.81	20.53	20.79			
15	1	0		22.93	22.34	22.65			
15	1	37		23.13	22.95	22.96			
15	1	74		22.65	22.74	22.79			
15	36	0	QPSK	22.01	21.66	21.83			
15	36	20		21.99	21.63	21.91			
15	36	39		21.89	21.71	21.81			
15	75	0		21.97	21.68	21.87			
15	1	0		21.82	21.48	21.66			
15	1	37		21.86	21.56	21.67			
15	1	74		21.37	21.58	21.47			
15	36	0	16-QAM	21.01	20.65	20.86			
15	36	20		20.92	20.58	20.86			
15	36	39		20.89	20.61	20.82			
15	75	0		20.97	20.67	20.98			



5

25

0

FCC RADIO TEST REPORT

LTE Band 2 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle Highest 22.70 22.35 10 22.54 1 0 10 1 25 23.11 22.78 22.99 10 49 1 22.72 22.64 22.86 10 **QPSK** 25 0 21.94 21.73 21.82 21.96 10 25 12 21.75 21.87 10 25 25 21.90 21.71 21.80 10 50 0 21.97 21.70 21.85 10 0 1 21.87 21.42 21.54 10 25 1 21.84 21.53 21.59 10 49 1 21.73 21.46 21.52 10 25 0 16-QAM 21.03 20.82 21.13 10 25 12 21.15 20.65 20.97 10 25 25 21.08 20.56 20.81 10 50 0 21.05 20.68 20.90 5 1 0 22.78 22.47 22.60 1 5 12 23.01 22.67 22.87 5 1 24 22.71 22.62 22.80 5 12 QPSK 21.96 0 21.60 21.84 12 21.94 5 21.67 21.83 12 5 13 21.96 21.59 21.72 25 0 5 21.97 21.61 21.81 5 1 0 21.69 21.36 21.51 5 1 12 21.65 21.41 21.54 5 1 24 21.79 21.42 21.34 5 12 0 16-QAM 20.84 20.47 20.86 5 12 7 21.13 20.77 20.90 5 12 13 21.06 20.67 20.82

20.75

20.57

20.75



FCC RADIO TEST REPORT

		LTE	Band 2 Max	ximum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		22.64	22.56	22.52
3	1	8		22.78	22.56	22.52
3	1	14		22.80	22.56	22.82
3	8	0	QPSK	21.94	21.59	21.84
3	8	4		21.98	21.68	21.77
3	8	7		21.95	21.70	21.82
3	15	0		21.81	21.65	21.84
3	1	0		21.80	21.16	21.53
3	1	8		21.77	21.36	21.42
3	1	14	46 OAM	21.57	21.27	21.52
3	8	0	16-QAM	20.63	20.58	20.81
3	8	4		20.87	20.68	20.73
3	8	7		20.95	20.70	20.75
3	15	0		20.62	20.61	20.83
1.4	1	0		22.69	22.47	22.66
1.4	1	3		22.80	22.59	22.79
1.4	1	5		22.99	22.54	22.68
1.4	3	0	QPSK	23.06	22.72	22.81
1.4	3	1		23.02	22.76	22.90
1.4	3	3		23.00	22.67	22.91
1.4	6	0		21.81	21.54	21.67
1.4	1	0		21.71	21.39	21.82
1.4	1	3		21.87	21.54	22.00
1.4	1	5		21.89	21.42	21.95
1.4	3	0	16-QAM	21.79	21.72	21.61
1.4	3	1		21.94	21.78	21.69
1.4	3	3		22.09	21.86	21.74
1.4	6	0		20.70	20.64	20.62



FCC RADIO TEST REPORT

	LTE Band 4 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
20	1	0		22.77	22.68	22.73					
20	1	49		23.32	23.41	22.74					
20	1	99		23.04	22.32	22.30					
20	50	0	QPSK	22.14	21.94	21.81					
20	50	24		22.05	21.89	21.48					
20	50	50		22.05	21.72	21.41					
20	100	0		22.06	21.98	21.59					
20	1	0		21.75	21.66	21.75					
20	1	49		21.87	21.76	21.22					
20	1	99	16-QAM	21.76	21.47	21.15					
20	50	0	16-QAM	21.23	21.00	20.79					
20	50	24		21.02	20.96	20.60					
20	50	50		21.05	20.80	20.40					
20	100	0		21.06	20.86	20.60					
15	1	0		22.94	22.77	22.70					
15	1	37		23.12	23.12	22.66					
15	1	74		23.12	22.59	22.48					
15	36	0	QPSK	22.21	21.91	21.66					
15	36	20		22.13	21.96	21.43					
15	36	39		22.11	21.73	21.37					
15	75	0		22.13	21.96	21.42					
15	1	0		21.83	21.84	21.60					
15	1	37		21.79	21.75	21.13					
15	1	74		21.75	21.43	21.22					
15	36	0	16-QAM	21.11	20.95	20.68					
15	36	20		21.14	20.93	20.53					
15	36	39		21.08	20.72	20.40					
15	75	0		21.19	20.93	20.61					



FCC RADIO TEST REPORT

LTE Band 4 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle Highest 22.77 22.71 10 22.26 1 0 22.55 10 1 25 22.83 22.88 10 49 1 22.87 22.50 22.63 10 **QPSK** 25 0 22.23 21.91 21.42 10 25 12 22.16 21.96 21.37 10 25 25 22.15 21.73 21.38 10 50 0 22.12 21.87 21.50 10 0 1 21.78 21.80 21.32 25 10 1 21.93 21.58 21.23 10 49 1 21.89 21.46 21.34 10 25 0 16-QAM 21.44 21.08 20.53 10 25 12 21.18 20.97 20.49 10 25 25 21.08 20.79 20.48 10 50 0 21.22 20.95 20.61 5 1 0 23.01 22.82 22.01 1 5 12 23.18 22.81 22.39 24 5 1 22.96 22.69 22.45 5 12 QPSK 22.14 21.33 0 21.94 12 22.19 5 22.01 21.41 12 5 13 22.21 21.81 21.54 25 0 22.17 5 21.94 21.30 5 1 0 21.86 21.63 21.04 5 1 12 21.80 21.87 21.40 5 1 24 21.62 21.30 21.10 5 12 0 16-QAM 20.98 20.71 20.16 5 12 7 20.22 20.94 20.91 5 12 13 21.14 20.74 20.42 5 25 0 21.22 20.83 20.39



SPORTON LAB. FCC RADIO TEST REPORT

			Band 4 Max	kimum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		22.84	22.66	22.08
3	1	8		22.97	22.49	22.17
3	1	14		22.95	22.37	22.33
3	8	0	QPSK	22.06	22.02	21.39
3	8	4		22.17	21.95	21.38
3	8	7		22.16	21.84	21.42
3	15	0		22.16	21.89	21.26
3	1	0		21.86	21.67	21.05
3	1	8		21.95	21.58	21.17
3	1	14		21.98	21.40	21.18
3	8	0	16-QAM	20.83	20.88	20.36
3	8	4		21.25	20.62	20.44
3	8	7		21.23	20.81	20.35
3	15	0		21.17	20.87	20.37
1.4	1	0	_	23.00	22.69	22.05
1.4	1	3		22.98	22.68	22.19
1.4	1	5		22.95	22.48	22.36
1.4	3	0	QPSK	22.98	22.81	22.28
1.4	3	1		23.09	22.87	22.45
1.4	3	3		23.08	22.78	22.56
1.4	6	0		22.11	21.91	21.35
1.4	1	0		22.22	21.78	21.11
1.4	1	3		22.33	21.76	21.36
1.4	1	5		21.80	21.69	21.26
1.4	3	0	16-QAM	21.97	21.85	21.30
1.4	3	1		22.03	21.90	21.40
1.4	3	3		22.19	21.74	21.43
1.4	6	0		21.09	20.73	20.38

LTE Band 2

Peak-to-Average Ratio

Mode						
Mod.	QP	SK	16C	Limit: 13dB		
RB Size	1RB	Full RB	1RB	Full RB	Result	
Lowest CH	4.03	4.67	4.87	5.68		
Middle CH	5.13	5.07	5.88	6.09	PASS	
Highest CH	4.49	4.75	5.25	5.80		


Report No.: FG891815B

TEL: 886-3-327-3456 Page Number : A2-1 of 41

LTE Band 2 / 20MHz / QPSK Lowest Channel / 1RB Lowest Channel / Full RB Ref Level 30.00 dBm Att 30 dB CF 1.86 GH Samples: 13000 0.1% 0.01% Date: 5.OCT.2018 08:34:39 Date: 5.OCT.2018 08:34:50 Middle Channel / 1RB Middle Channel / Full RB Date: 5.OCT.2018 08:35:00 Date: 5.OCT.2018 08:35:11 **Highest Channel / 1RB Highest Channel / Full RB** Samples: 130000 0.1% 0.01% 4.75 dB 5.22 dB | Samples: 130000 | 0.1% | 0.01% | | 4.49 dB | 4.58 dB |

Report No.: FG891815B

TEL: 886-3-327-3456 Page Number : A2-2 of 41

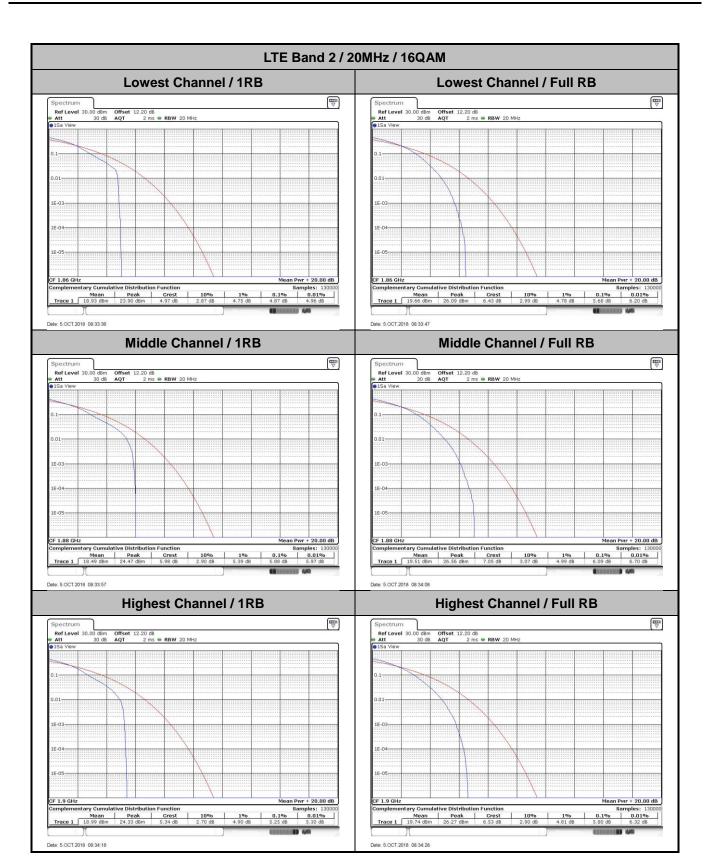


TEL: 886-3-327-3456 Page Number: A2-3 of 41

26dB Bandwidth


Mode		LTE Band 2 : 26dB BW(MHz)										
BW	1.4MHz		3MHz 5N		5MHz 10MHz		15MHz		20MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.29	1.27	3.02	3.03	5.00	4.93	9.89	9.71	14.24	14.51	20.14	20.10
Middle CH	1.30	1.24	2.97	3.03	4.99	4.94	9.73	9.73	14.30	14.33	20.18	20.22
Highest CH	1.29	1.24	3.01	3.00	4.92	4.85	9.71	9.83	14.57	14.18	20.10	20.06

Report No. : FG891815B


TEL: 886-3-327-3456 Page Number : A2-4 of 41

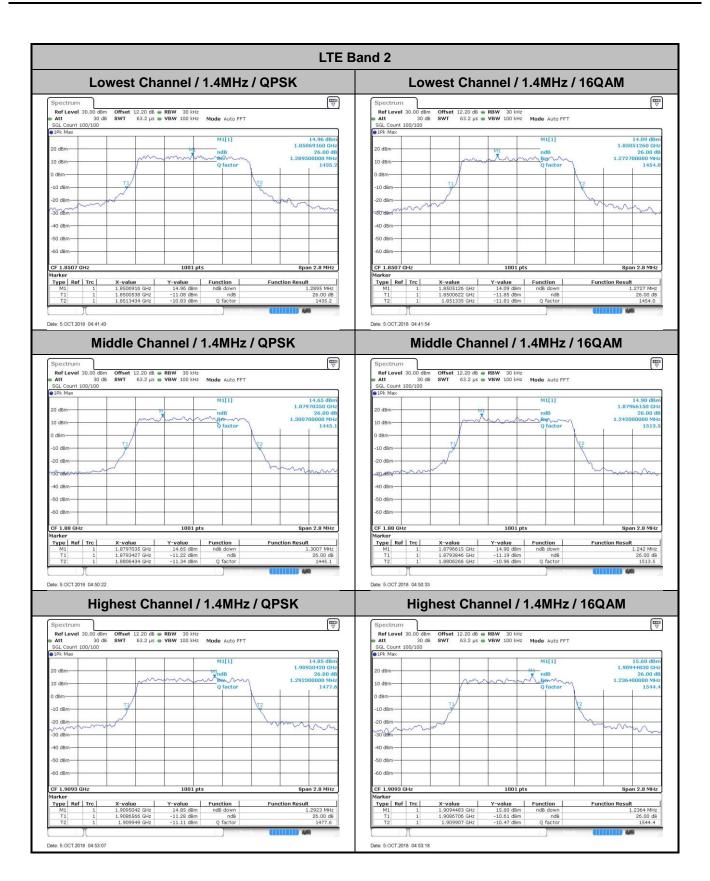


TEL: 886-3-327-3456 Page Number : A2-5 of 41

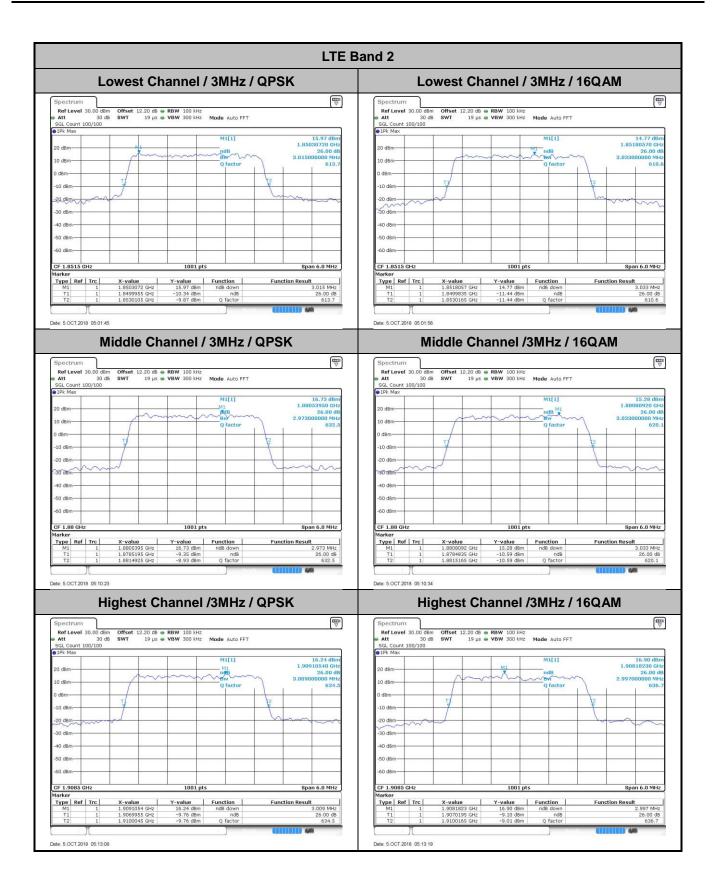


TEL: 886-3-327-3456 Page Number: A2-6 of 41

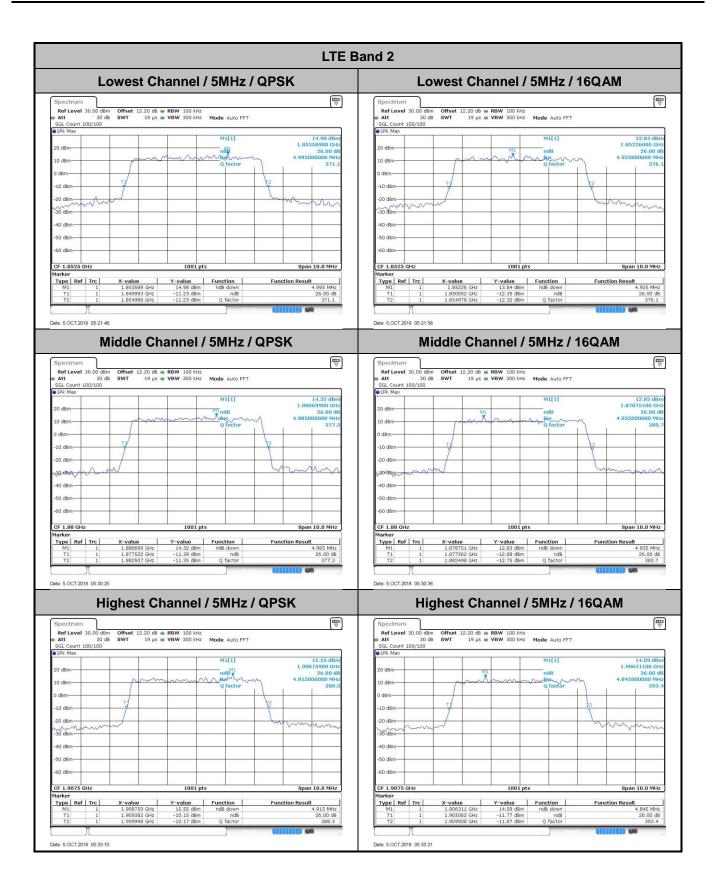


TEL: 886-3-327-3456 Page Number : A2-7 of 41

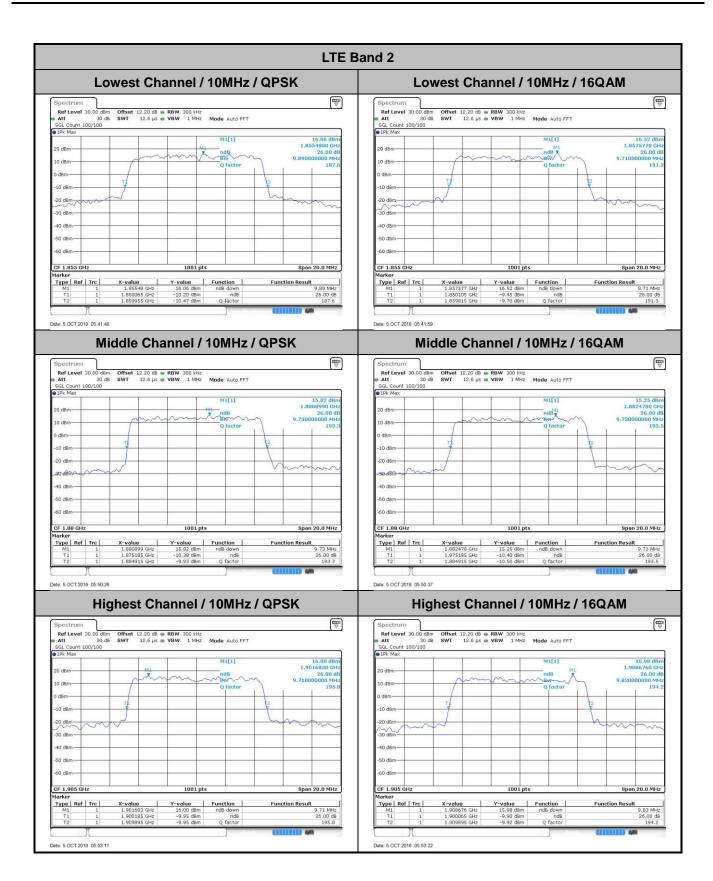

TEL: 886-3-327-3456 Page Number: A2-8 of 41

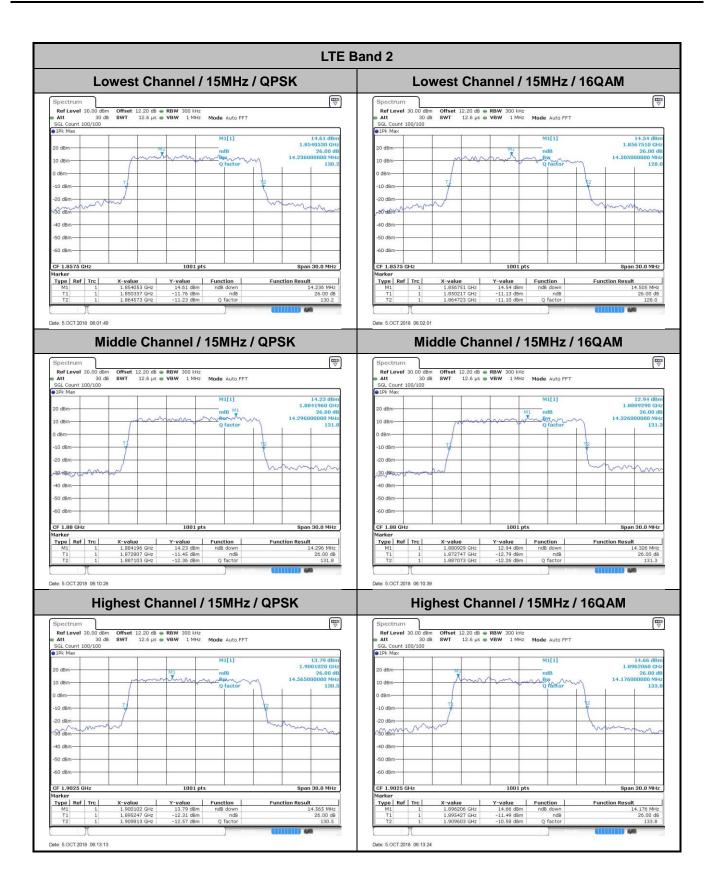

TEL: 886-3-327-3456 Page Number : A2-9 of 41

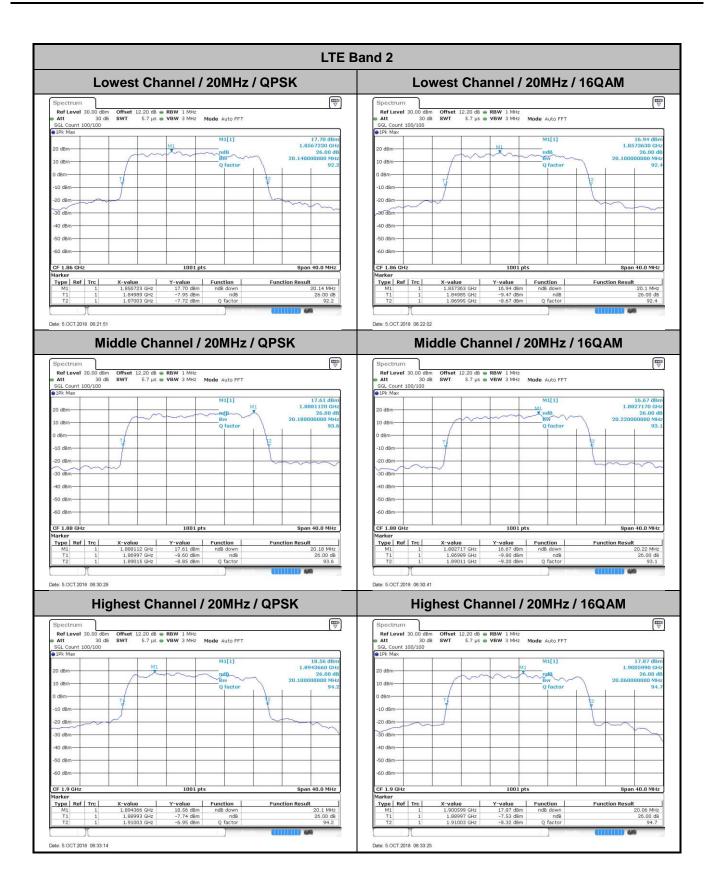


TEL: 886-3-327-3456 Page Number : A2-10 of 41

Occupied Bandwidth


Mode		LTE Band 2 : 99%OBW(MHz)										
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.74	2.73	4.48	4.51	9.03	8.99	13.37	13.40	18.22	18.30
Middle CH	1.09	1.10	2.72	2.73	4.50	4.50	9.03	9.03	13.43	13.37	18.30	18.18
Highest CH	1.09	1.09	2.70	2.73	4.51	4.49	9.05	9.03	13.43	13.43	18.22	18.30

Report No. : FG891815B


TEL: 886-3-327-3456 Page Number : A2-11 of 41

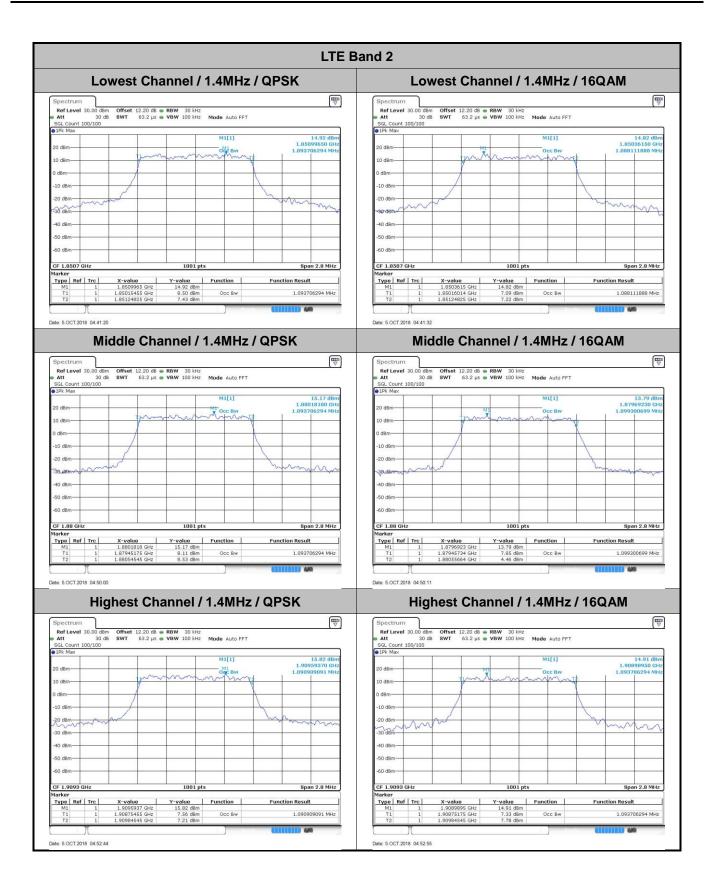

TEL: 886-3-327-3456 Page Number : A2-12 of 41

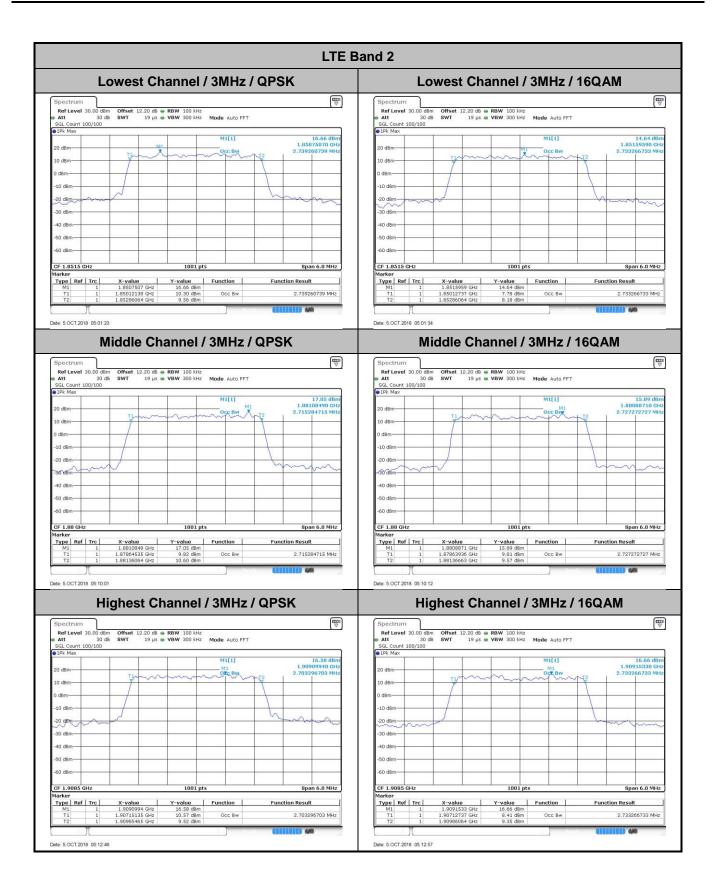

TEL: 886-3-327-3456 Page Number : A2-13 of 41

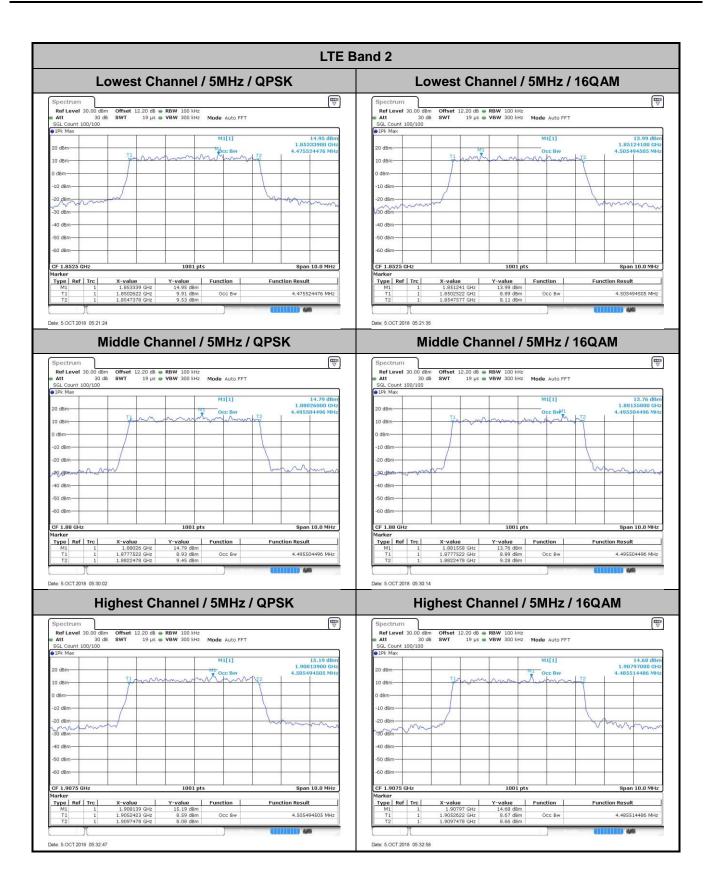

TEL: 886-3-327-3456 Page Number : A2-14 of 41 FAX: 886-3-328-4978

LTE Band 2 Lowest Channel / 10MHz / QPSK Lowest Channel / 10MHz / 16QAM
 Ref Level
 30.00 dBm
 Offset
 12.20 dB → RBW
 300 kHz

 Att
 30 dB
 SWT
 12.6 μs → VBW
 1 MHz
 Mode
 Auto FFT

 SGL Count 100/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 < 15.93 dBr 1.8516830 GH 9.030969031 MH 16.86 dBn 1.8577570 GH: 8.991008991 MH: M1[1] 10 dBm--10 dBm--10 dBm -30 dBm 40 dBm -50 d8m-50 dBm -60 dBm -60 dBm-
 Marker
 Trc
 X-value
 Y-value
 Function

 M1
 1
 1.857757 GHz
 16.86 dBm
 1.68 d Bm

 T1
 1
 1.8594645 GHz
 10.18 dBm
 Occ Bw

 T2
 1
 1.8594755 GHz
 8.02 dBm
 Occ Bw

 X-value
 Y-value
 Function
 Function Result

 1.851689 GHz
 15.93 dBm
 15.93 dPm
 9.03096

 1.8594945 GHz
 9.40 dBm
 Occ Bw
 9.03096

 1.8595155 GHz
 9.02 dBm
 9.02 dBm
 Type | Ref | Trc | Middle Channel / 10MHz / QPSK Middle Channel / 10MHz / 16QAM
 Ref Level
 30.00 dBm
 Offset
 12.20 dB ● RBW
 300 kHz

 Att
 30 dB
 SWT
 12.6 µs ● VBW
 1 MHz
 Mode
 Auto FFT
 -20 dBm -20 dBm-30/dBm= 40 dBm -40 dBm -50 dBm 50 dBm CF 1.88 GH: CF 1.88 GHz 1001 pts Span 20.0 MHz Span 20.0 MHz 1001 pts
 X-value
 Y-value
 Function

 1.881399 GHz
 15.31 dBm
 1.8755045 GHz

 1.8755045 GHz
 9.00 dBm
 Occ Bw

 1.8845355 GHz
 8.90 dBm

 X-value
 Y-value
 Function

 1.881658 GHz
 16.07 dBm
 0.00 dBm

 1.8755045 GHz
 9.94 dBm
 Occ Bw

 1.8945355 GHz
 10.66 dBm
 Type Ref Trc Type | Ref | Trc | **Function Result Function Result** 9.030969031 MHz 9.030969031 MHz Date: 5.OCT.2018 05:50:04 Date: 5.OCT 2018 05:50:15 Highest Channel / 10MHz / QPSK Highest Channel / 10MHz / 16QAM SGL Count 100/100 15.53 dBm 1.9029420 GHz 9.030969031 MHz 15.11 dBn 1.9027620 GH 9.050949051 MH 20 dBm dBm--10 dBm--50 dBm-50 dBm CF 1.905 GHz Span 20.0 MHz
 Marker
 Trope
 Ref
 Trc
 X-value
 Y-value
 Function
 Function Result

 M1
 1
 1.002762 GHz
 15.11 dbm
 Punction
 Punction Result

 T1
 1
 1.9004945 GHz
 9.92 dbm
 Occ Bw
 9.050946

 T2
 1
 1.9095355 GHz
 9.90 dbm
 Occ Bw
 9.050946

 Marker
 Type
 Ref
 Trc
 X-value
 Y-value
 Function
 Function Result

 M1
 1
 1.902942 GHz
 15.53 dbm
 Punction
 9.83 dbm
 Occ 8w
 9.030965

 T2
 1
 1.9094955 GHz
 8.44 dbm
 Occ 8w
 9.030965
 9.050949051 MHz 9.030969031 MHz

Report No.: FG891815B

TEL: 886-3-327-3456 Page Number : A2-15 of 41 FAX: 886-3-328-4978

LTE Band 2 Lowest Channel / 15MHz / QPSK Lowest Channel / 15MHz / 16QAM
 Ref Level
 30.00 dBm
 Offset
 12.20 dB → RBW
 300 kHz

 Att
 30 dB
 SWT
 12.6 μs → VBW
 1 MHz
 Mode
 Auto FFT

 SGL Count 100/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 300/100
 < 13.98 dBn 1.8548030 GH: 13.396603397 MH: M1[1] M1[1] 10 dBm--10 dBm--10 dBm -20 dBm--30 dBm 40 dBm 50 d8m -50 d8m--60 dBm -60 dBm-
 Marker
 Trc
 X-value
 Y-value
 Function

 M1
 1
 1.854903 GHz
 13.99 dbm
 13.99 dbm

 T1
 1
 1.8589167 GHz
 8.99 dbm
 Occ Bw

 T2
 1
 1.8642133 GHz
 8.76 dbm
 Occ Bw

 X-value
 Y-value
 Function
 Function Result

 1.855721 GHz
 14.68 dBm
 14.68 dBm
 18.587867 GHz
 8.71 dBm
 Occ Bw
 13.36663

 1.8641533 GHz
 8.92 dBm
 18.78 dB Type | Ref | Trc | Middle Channel / 15MHz / QPSK Middle Channel / 15MHz / 16QAM Ref Level 30.00 dBm Offset 12.20 dB RBW 300 kHz
Att 30 db SWT 12.6 µs VBW 1 MHz Mode Auto FFT

5GL Count 100/100

1Pk Max
 Ref Level
 30.00 dBm
 Offset
 12.20 dB ● RBW
 300 kHz

 Att
 30 dB
 SWT
 12.6 µs ● VBW
 1 MHz
 Mode
 Auto FFT
 SGL Count 100/100 1Pk Max 15.08 dBi 1.8865030 GF 13.426573427 MF 14.02 dBm 1.8831170 GHz 13.366633367 MHz -20 dBm--20 dBm--40 dBm 40 dBm--50 dBm -50 d8m CF 1.88 GH: CF 1.88 GHz 1001 pts Span 30.0 MHz
 X-value
 Y-value
 Function

 1.883117 GHz
 14.02 dBm
 Occ Bw

 1.8733167 GHz
 8.14 dBm
 Occ Bw

 1.8866833 GHz
 8.05 dBm

 X-value
 Y-value
 Function

 1.866503 GHz
 15.08 dBm
 0cc 8w

 1.8733167 GHz
 9.53 dBm
 0cc 8w

 1.8967433 GHz
 10.50 dBm
 0cc 8w
 Type | Ref | Trc | **Function Result Function Result** 13.426573427 MHz 13.366633367 MHz Date: 5.OCT.2018 06:10:05 Date: 5.OCT 2018 06:10:17 Highest Channel / 15MHz / QPSK Highest Channel / 15MHz / 16QAM SGL Count 100/100 M1[1] 15.11 dBn 1.8967160 GH 13.426573427 MH M1[1] 1.9004620 GH 13.426573427 MH 20 dBm dBm--10 dBm--20 dBm -20 dBr 30°88%--50 dBm-50 dBm-CF 1.9025 GHz Span 30.0 MHz
 Marker
 Type Ref
 Trc
 X-value
 Y-value
 Function
 Function Result

 M1
 1
 1.896716 GHz
 15.11 dbm

 11
 1
 1.895756 GHz
 10.23 dbm
 Occ Bw
 13.42657

 T2
 1
 1.9091833 GHz
 8.61 dbm
 Occ Bw
 13.42657

 Marker
 Trc
 X-value
 Y-value
 Function


 M1
 1
 1,900462 GHz
 13.44 dBm
 Bmm
 Occ Bw

 T1
 1
 1,9879867 GHz
 8.55 dBm
 Occ Bw

 T2
 1
 1,9092133 GHz
 7,99 dBm
 Occ Bw
 Function Result 13.426573427 MHz 13.426573427 MHz

Report No.: FG891815B

TEL: 886-3-327-3456 Page Number : A2-16 of 41

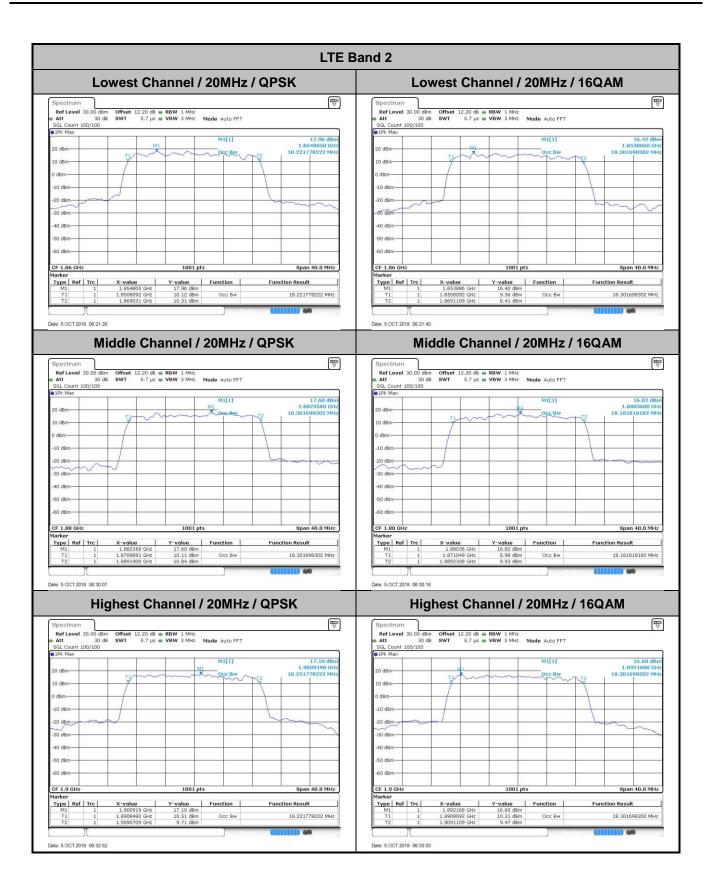

TEL: 886-3-327-3456 Page Number : A2-17 of 41 FAX: 886-3-328-4978