

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Dual Band WLAN Adapter
Model No. : WLU5022(RoHS)
Filing Type : New Application
Applicant : **Askey Computer Corp.**
10F, No.119, ChienKang RD., Chung-Ho, Taipei, Taiwan,
23585, R.O.C.
FCC ID : H8N-WLU5022
Manufacturer : **Askey Computer Corp.**
10F, No.119, ChienKang RD., Chung-Ho, Taipei, Taiwan,
23585, R.O.C.
Askey Technology (Jing Su) Ltd.
No.1388, Jiao Tong Road, Wujiang Economic-Technological
Development Area, Jiangsu Province, P.R.China
Received Date : Oct. 06, 2009
Final Test Date : Oct. 26, 2009

Statement

Test result included is only for the 802.11n 5G (5725 ~ 5850MHz)/ 2.4G of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT 2

2 GENERAL INFORMATION..... 3

2.1 Product Details 3

2.2 Table for Filed Antenna 3

2.3 Table for Carrier Frequencies 5

2.4 Table for Test Modes 6

2.5 Table for Testing Locations 6

2.6 Table for Supporting Units..... 6

2.7 Table for Parameters of Test Software Setting 7

2.8 EUT Operation during Test 8

2.9 Test Configuration 8

3 TEST RESULT 10

3.1 AC Power Line Conducted Emissions Measurement..... 10

3.2 Maximum Conducted Output Power Measurement 14

3.3 Power Spectral Density Measurement 20

3.4 6dB Spectrum Bandwidth Measurement..... 37

3.5 Radiated Emissions Measurement..... 54

3.6 Band Edge and Fundamental Emissions Measurement 106

3.7 Antenna Requirements..... 123

4 LIST OF MEASURING EQUIPMENTS 124

5 TEST LOCATION..... 126

6 TAF CERTIFICATE OF ACCREDITATION 127

APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3

APPENDIX B. TEST PHOTOS B1 ~ B7

APPENDIX C. PHOTOGRAPHS OF EUT C1 ~ C4

History of This Test Report

Original Issue Date: Nov. 05, 2009

Report No.: FR9O0702AI

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Dual Band WLAN Adapter
Model No. : WLU5022(RoHS)
Applicant : Askey Computer Corp.
10F, No.119, ChienKang RD., Chung-Ho, Taipei,
Taiwan, 23585, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 06, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	14.61 dB
3.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	12.38 dB
3.3	15.247(e)	Power Spectral Density	Complies	17.21 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	3.04 dB
3.6	15.247(d)	Band Edge Emissions	Complies	0.57 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11n is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Modulation	See the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	See the below table for IEEE 802.11n
Frequency Range	5725 ~ 5850MHz / 2400 ~ 2483.5MHz
Channel Number	5G- 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth 2.4G- 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	5G- 1TX- MCS 0 (20MHz) : 17.50 MHz ; MCS 0 (40MHz) : 35.90 MHz 2.4G- 1TX- MCS 0 (20MHz) : 17.50 MHz ; MCS 0 (40MHz) : 35.90 MHz 5G- 2TX- MCS 8 (20MHz) : 17.47 MHz ; MCS 8 (40MHz) : 35.96 MHz 2.4G- 2TX- MCS 8 (20MHz) : 17.53 MHz ; MCS 8 (40MHz) : 35.96 MHz
Conducted Output Power	5G- 1TX- MCS 0 (20MHz) : 14.01 dBm ; MCS 0 (40MHz) : 13.88 dBm 2.4G- 1TX- MCS 0 (20MHz) : 14.45 dBm ; MCS 0 (40MHz) : 14.64 dBm 5G- 2TX- MCS 8 (20MHz) : 15.96 dBm ; MCS 8 (40MHz) : 15.57 dBm 2.4G- 2TX- MCS 8 (20MHz) : 17.62 dBm ; MCS 8 (40MHz) : 15.96 dBm

2.2 Table for Filed Antenna

Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
Bandwidth Mode				
802.11b	V	X	X	X
802.11g	V	X	X	X
802.11n(2.4GHz)	V	V	V	V
802.11a (5150~5250MHz)	V	X	X	X
802.11a (5250~5350MHz)	V	X	X	X
802.11a (5470~5725MHz)	V	X	X	X
802.11a (5725~5850MHzMHz)	V	X	X	X
802.11n (5150~5250MHz)	V	V	V	V
802.11n (5250~5350MHz)	V	V	V	V
802.11n (5470~5725MHz)	V	V	V	V
802.11n (5725~5850MHzMHz)	V	V	V	V

Ant.	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	Printed Antenna	Fixed on Board	3.44	4.06	TX / RX
B	Printed Antenna	Fixed on Board	3.44	4.06	TX / RX

Antenna: 2T2R Spatial Multiplexing MIMO configuration. IEEE 802.11n used two antennas are for signal transmitting and receiving.

IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)			
					800nsGI		20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
					20MHz	40MHz						
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5		
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0		
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5		
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0		
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0		
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0		
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5		
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0		
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0		
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0		
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0		
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0		
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0		
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0		
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0		
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0		

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.3 Table for Carrier Frequencies

Frequency Allocation

For 802.11n (20MHz): Use Channel 149, 153, 157, 161, and 165.

For 802.11n (40MHz): Use Channel 151, 159.

Frequency Band	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz
	151	5755 MHz
	153	5765 MHz
	157	5785 MHz
	159	5795 MHz
	161	5805 MHz
	165	5825 MHz

Frequency Allocation

For 802.11n (20MHz): Use Channel 1~Channel 11.

For 802.11n (40MHz): Use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Mode	Auto	-	-
Maximum Conducted Output Power	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	1
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159 2.4G-3/6/9	1
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	1/2 / 1+2
	MCS 8 (40MHz)	27 Mbps	5G-151/159 2.4G-3/6/9	1/2 / 1+2
Power Spectral Density 6dB Spectrum Bandwidth	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	1
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159 2.4G-3/6/9	1
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	1+2
	MCS 8 (40MHz)	27 Mbps	5G-151/159 2.4G-3/6/9	1+2
Radiated Emissions Below 1GHz	Normal Mode	Auto	-	-
Radiated Emissions Above 1GHz Band Edge Emissions	MCS 0 (20MHz)	6.5 Mbps	5G-149/157/165 2.4G-1/6/11	1
	MCS 0 (40MHz)	13.5 Mbps	5G-151/159 2.4G-3/6/9	1
	MCS 8 (20MHz)	13 Mbps	5G-149/157/165 2.4G-1/6/11	1+2
	MCS 8 (40MHz)	27 Mbps	5G-151/159 2.4G-3/6/9	1+2

2.5 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
CO04-HY	Conduction	Hwa Ya	643075	IC 4086B
TH01-HY	OVEN Room	Hwa Ya	-	-
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B

Semi Anechoic Chamber (SAC).

2.6 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	DoC

2.7 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11n-5G

Test Software Version	RT3x7x		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	0A	0A	0A
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	0A	0A	-

Power Parameters of IEEE 802.11n-2.4G

Test Software Version	RT3x7x		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	0B	0D	0D
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n(40MHz)	0C	0D	0D

For Two Chain:

Power Parameters of IEEE 802.11n-5G Ant. 1+Ant. 2

Test Software Version	RT3x7x		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	0A06	0A06	0A06
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	0A06	0A06	-

Power Parameters of IEEE 802.11n-2.4G Ant. 1+Ant. 2

Test Software Version	RT3x7x		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	0B0A	0D0D	0D0D
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n(40MHz)	0C0B	0D0D	0C0D

2.8 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.


-Executed " ping.exe " to link with the remote workstation to receive and transmit data by WLAN.

-Executed "RT3x7x" to keep transmitting signals at fixed frequency.


2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

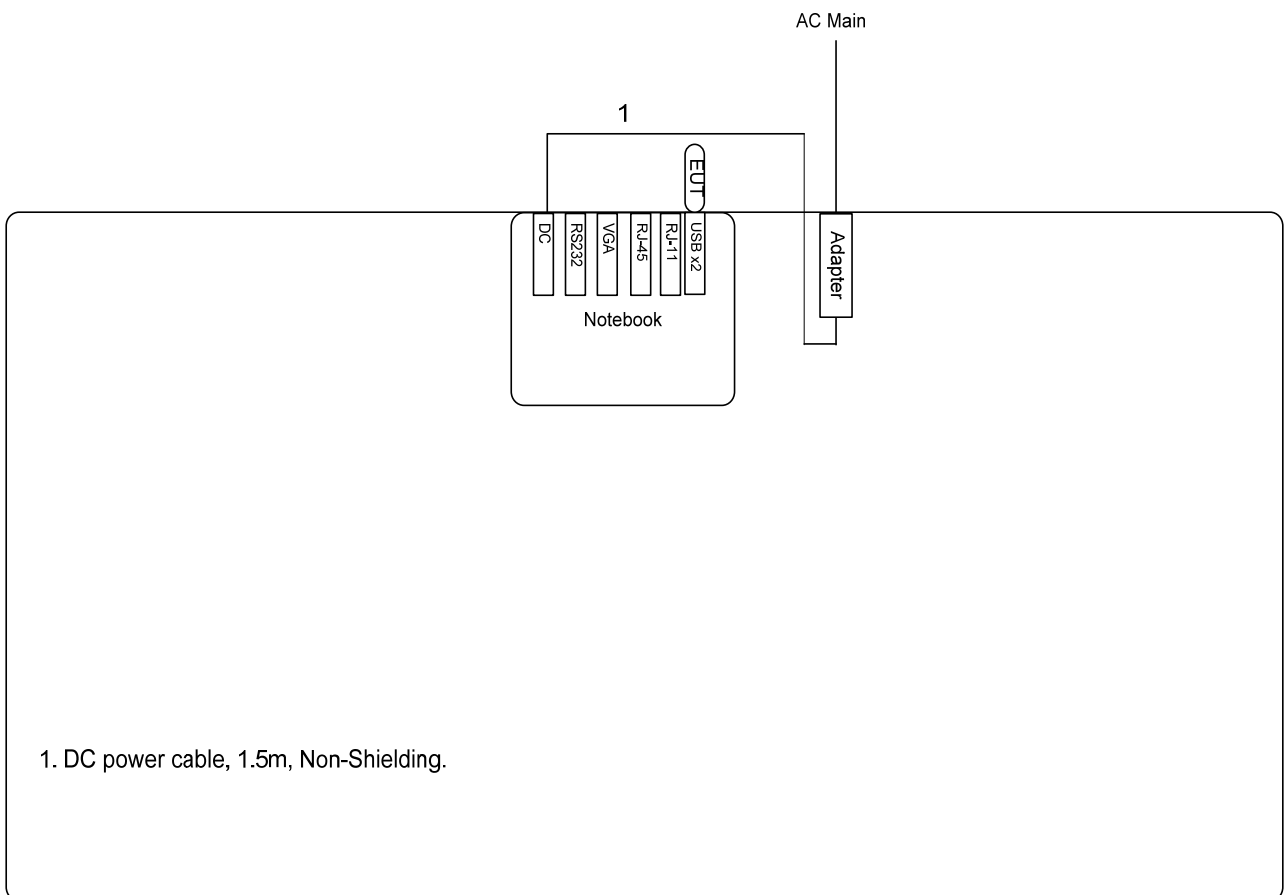

For radiated emissions above 1GHz

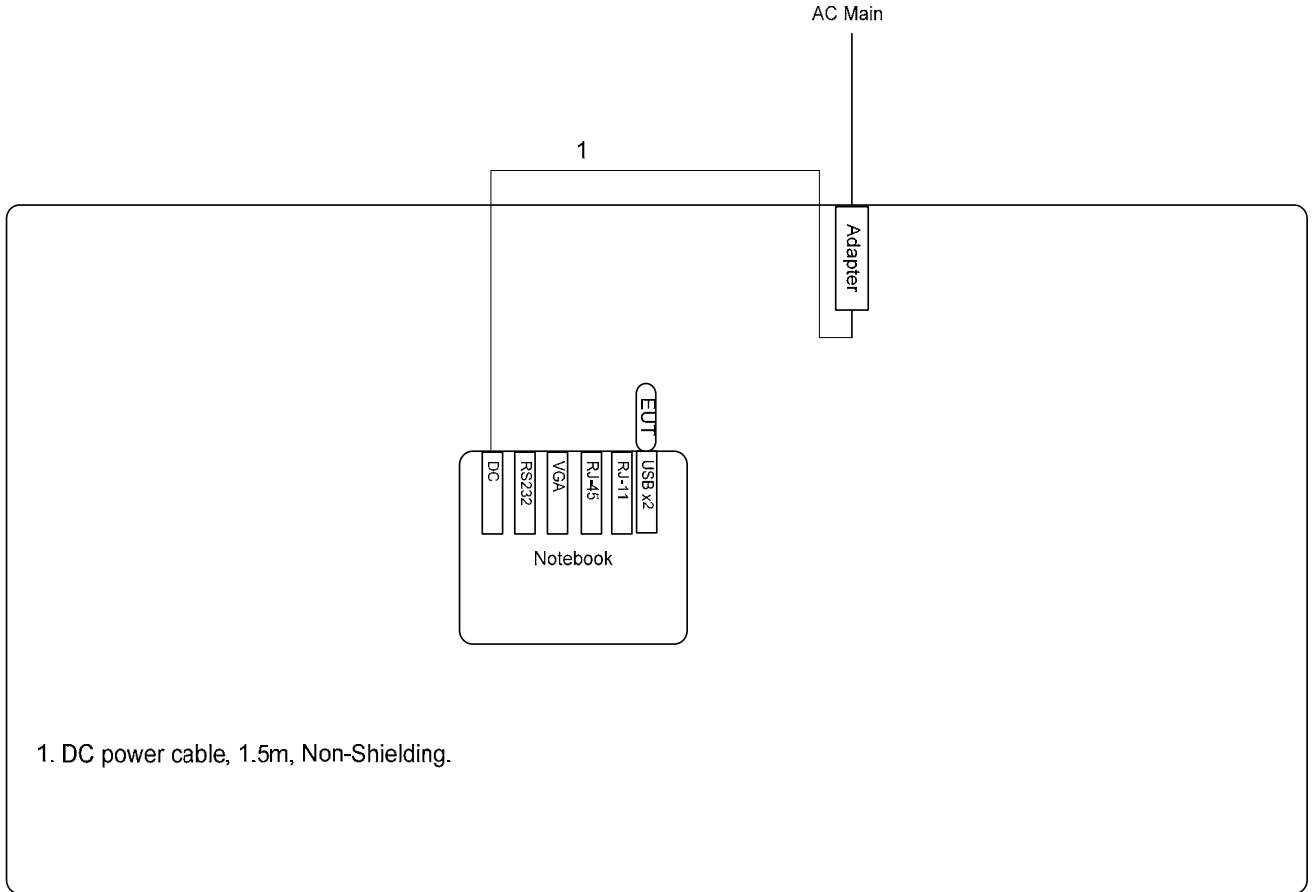

1. DC power cable, 1.5m, Non-Shielding.

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

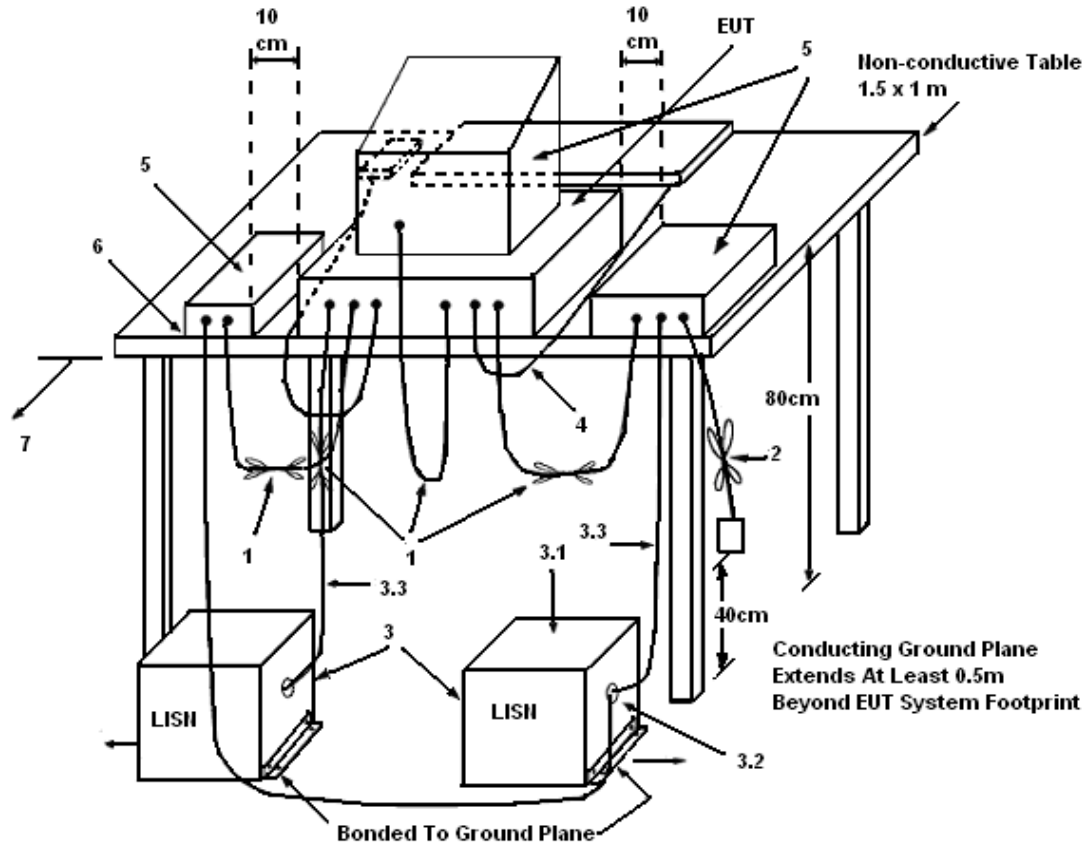

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Oct. 16, 2009	Test Site No.	CO04-HY
Temperature	25	Humidity	55%
Test Engineer	Chris	Configuration	Normal Mode

Line

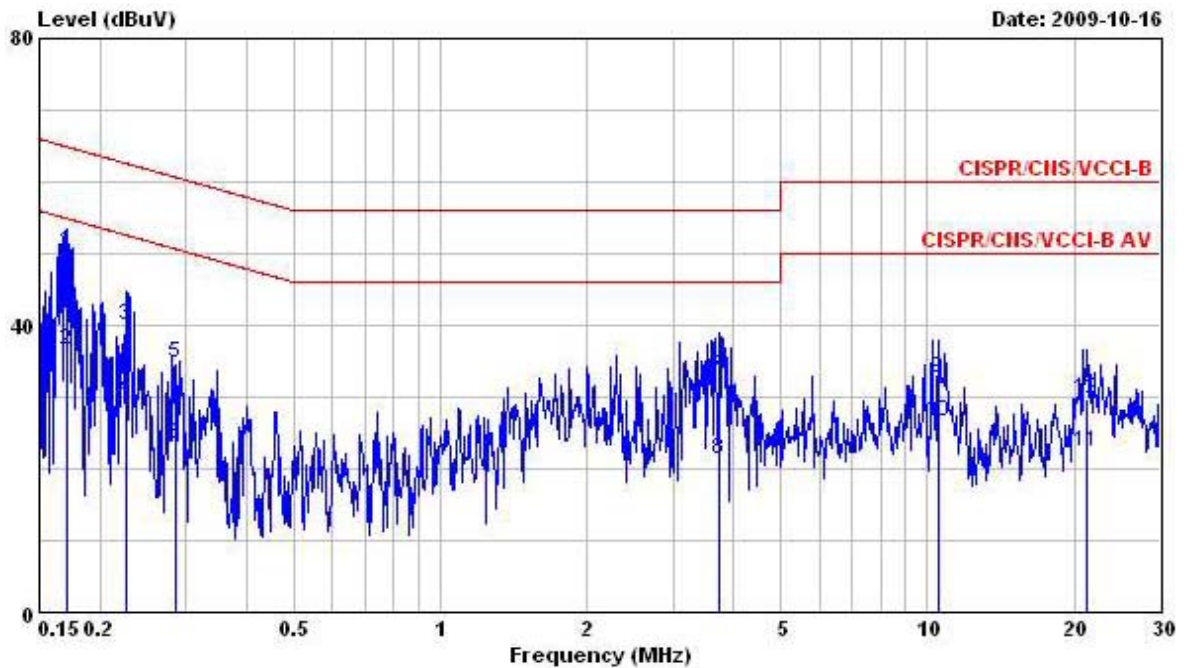

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1712450	50.29	-14.61	64.90	50.14	0.08	0.07	QP
2	0.1712450	36.46	-18.44	54.90	36.31	0.08	0.07	Average
3	0.2267630	40.10	-22.47	62.57	39.95	0.08	0.07	QP
4	0.2267630	29.85	-22.72	52.57	29.70	0.08	0.07	Average
5	0.2846130	34.72	-25.96	60.68	34.55	0.09	0.08	QP
6	0.2846130	23.46	-27.22	50.68	23.29	0.09	0.08	Average
7	3.740	32.77	-23.23	56.00	32.38	0.16	0.23	QP
8	3.740	21.25	-24.75	46.00	20.86	0.16	0.23	Average
9	10.560	32.64	-27.36	60.00	32.03	0.28	0.33	QP
10	10.560	26.47	-23.53	50.00	25.86	0.28	0.33	Average
11	21.260	22.39	-27.61	50.00	21.54	0.42	0.43	Average
12	21.260	29.61	-30.39	60.00	28.76	0.42	0.43	QP

Neutral

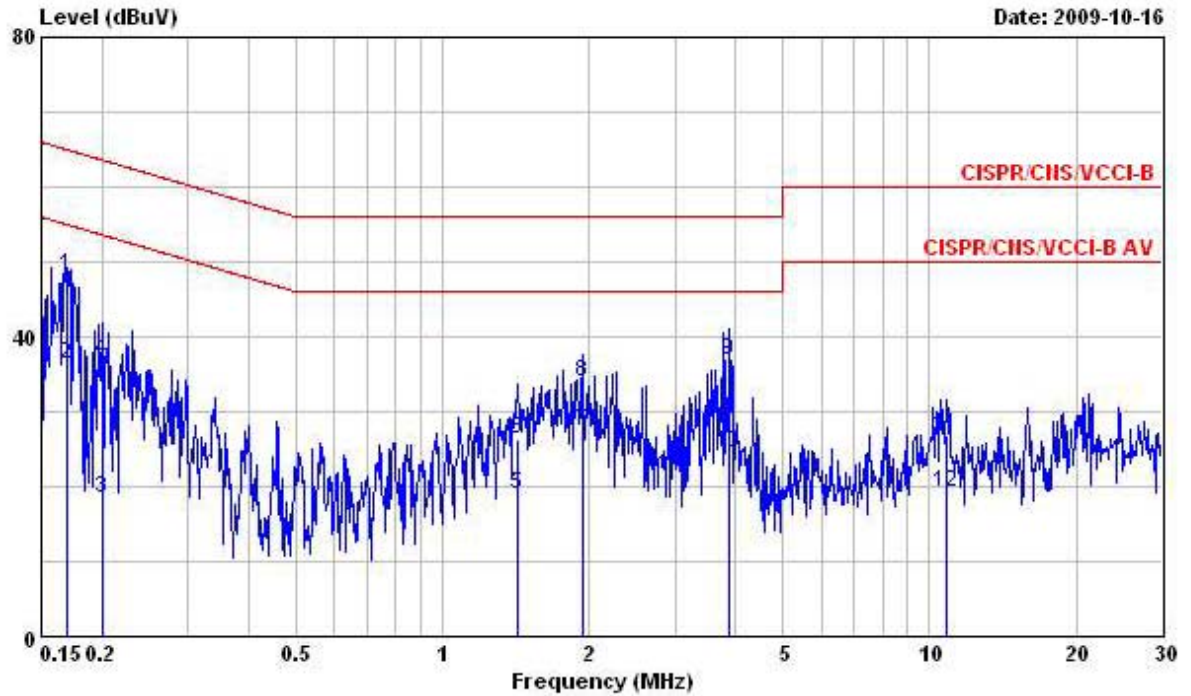

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1694400	48.15	-16.84	64.99	48.00	0.08	0.07	QP
2	0.1694400	36.42	-18.57	54.99	36.27	0.08	0.07	Average
3	0.1996860	18.34	-35.28	53.62	18.20	0.08	0.06	Average
4	0.1996860	36.86	-26.76	63.62	36.72	0.08	0.06	QP
5	1.430	18.94	-27.06	46.00	18.69	0.11	0.14	Average
6	1.430	26.21	-29.79	56.00	25.96	0.11	0.14	QP
7	1.940	27.49	-18.51	46.00	27.22	0.11	0.16	Average
8	1.940	33.95	-22.05	56.00	33.68	0.11	0.16	QP
9	3.880	36.77	-19.23	56.00	36.38	0.15	0.24	QP
10	3.880	24.52	-21.48	46.00	24.13	0.15	0.24	Average
11	10.786	26.85	-33.15	60.00	26.27	0.27	0.31	QP
12	10.786	19.15	-30.85	50.00	18.57	0.27	0.31	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-multipoint antenna reduction operation, the limit has to be reduced by 1dB for every dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
Attenuation	Auto
Span Frequency	0.135 s ~ 26 s
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

3.2.4 Test Setup Layout

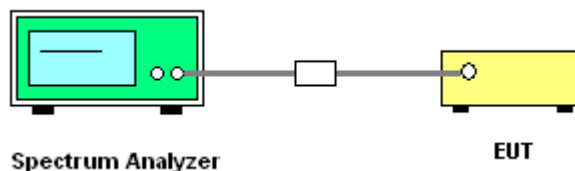

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Conducted Output Power

Final Test Date	Oct. 21, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	13.66	30.00	Complies
157	5785 MHz	13.85	30.00	Complies
165	5825 MHz	14.01	30.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	13.82	30.00	Complies
159	5795 MHz	13.88	30.00	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.55	30.00	Complies
6	2437 MHz	14.45	30.00	Complies
11	2462 MHz	14.01	30.00	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.60	30.00	Complies
6	2437 MHz	14.64	30.00	Complies
9	2452 MHz	14.43	30.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. 1 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	13.92	30.00	Complies
157	5785 MHz	13.23	30.00	Complies
165	5825 MHz	13.50	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. 2 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	11.71	30.00	Complies
157	5785 MHz	12.02	30.00	Complies
165	5825 MHz	12.30	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.96	30.00	Complies
157	5785 MHz	15.68	30.00	Complies
165	5825 MHz	15.95	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. 1 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.88	30.00	Complies
159	5795 MHz	13.22	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. 2 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.08	30.00	Complies
159	5795 MHz	11.79	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.51	30.00	Complies
159	5795 MHz	15.57	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	13.53	30.00	Complies
6	2437 MHz	14.21	30.00	Complies
11	2462 MHz	13.19	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 2 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.23	30.00	Complies
6	2437 MHz	14.93	30.00	Complies
11	2462 MHz	13.37	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.27	30.00	Complies
6	2437 MHz	17.62	30.00	Complies
11	2462 MHz	16.72	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.27	30.00	Complies
6	2437 MHz	14.10	30.00	Complies
9	2452 MHz	13.30	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 2 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	14.25	30.00	Complies
6	2437 MHz	15.07	30.00	Complies
9	2452 MHz	14.09	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.96	30.00	Complies
6	2437 MHz	15.68	30.00	Complies
9	2452 MHz	15.95	30.00	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.3.4 Test Setup Layout

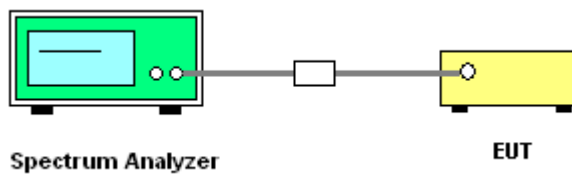

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Final Test Date	Oct. 21, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-13.21	8.00	Complies
157	5785 MHz	-13.42	8.00	Complies
165	5825 MHz	-14.12	8.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-15.82	8.00	Complies
159	5795 MHz	-15.95	8.00	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-13.81	8.00	Complies
6	2437 MHz	-13.39	8.00	Complies
11	2462 MHz	-13.89	8.00	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-14.50	8.00	Complies
6	2437 MHz	-14.93	8.00	Complies
9	2452 MHz	-15.94	8.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-10.53	8.00	Complies
157	5785 MHz	-12.08	8.00	Complies
165	5825 MHz	-10.63	8.00	Complies

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-13.48	8.00	Complies
159	5795 MHz	-13.39	8.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz)


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-10.17	8.00	Complies
6	2437 MHz	-9.21	8.00	Complies
11	2462 MHz	-10.03	8.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-11.87	8.00	Complies
6	2437 MHz	-11.07	8.00	Complies
9	2452 MHz	-12.32	8.00	Complies


For Single Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

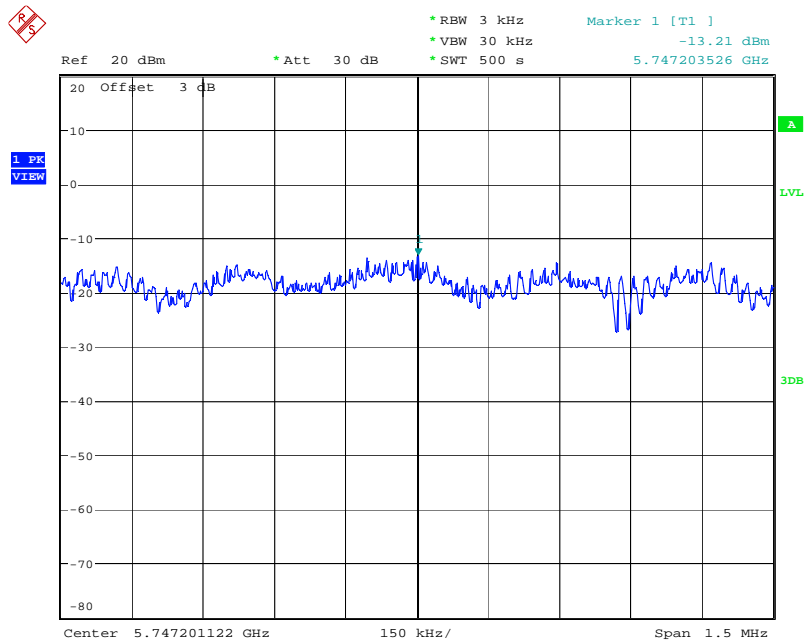


Date: 21.OCT.2009 15:30:49

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

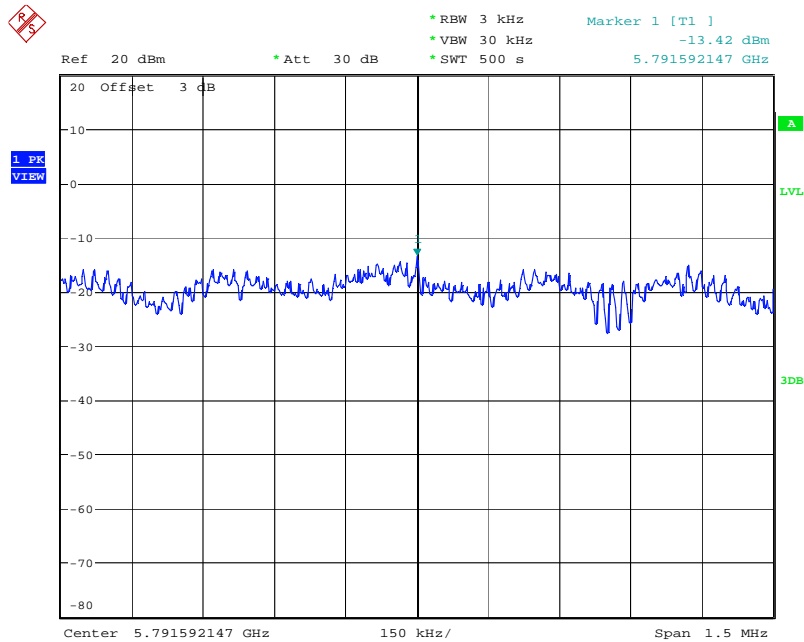


Date: 21.OCT.2009 15:32:13

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

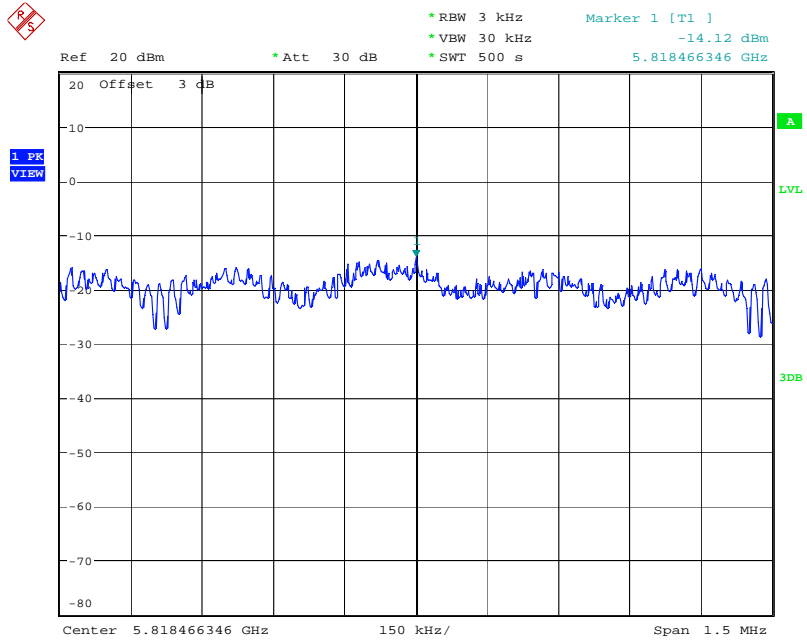


Date: 21.OCT.2009 15:33:18

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

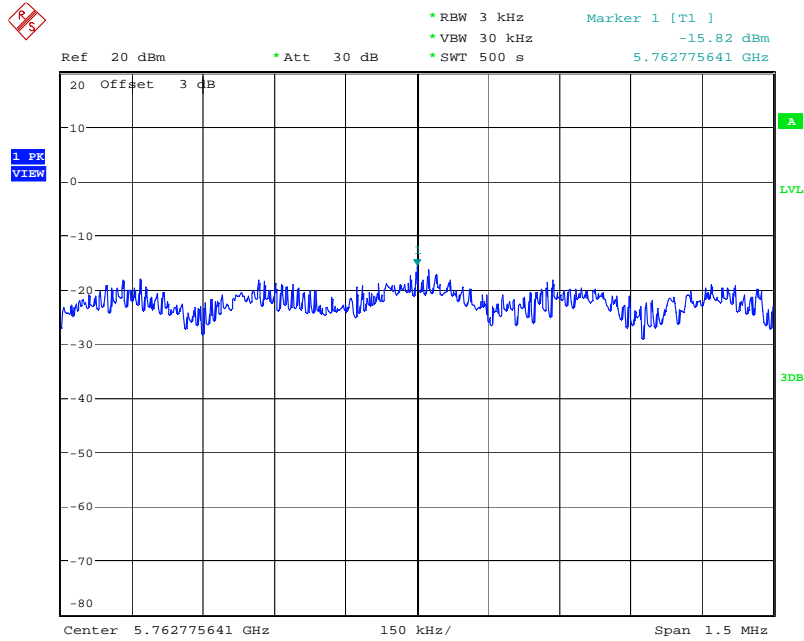


Date: 21.OCT.2009 15:37:03

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

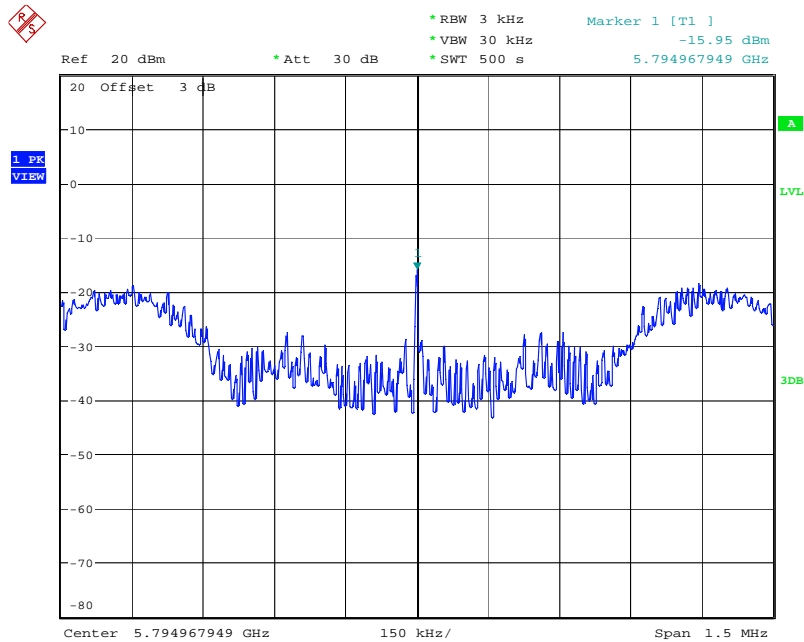


Date: 21.OCT.2009 15:35:55

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

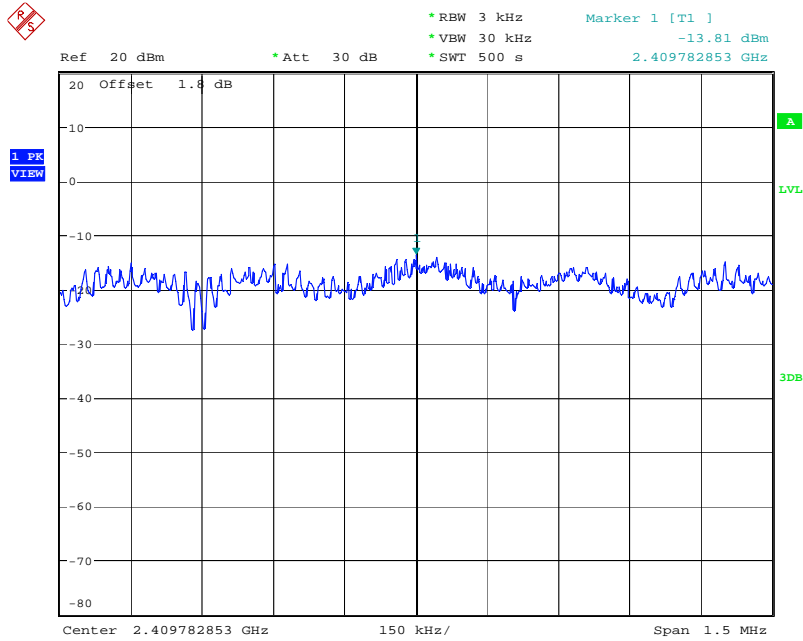


Date: 21.OCT.2009 15:04:04

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

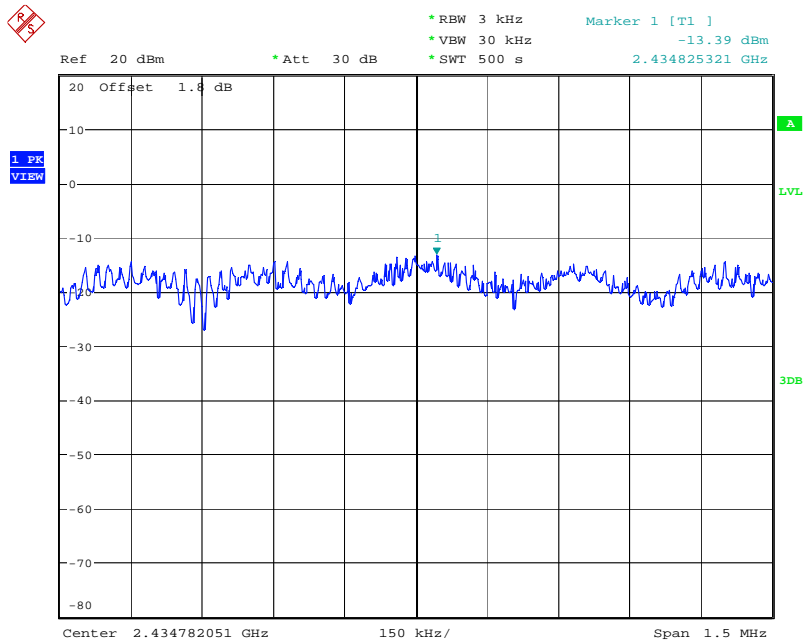


Date: 21.OCT.2009 15:05:09

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

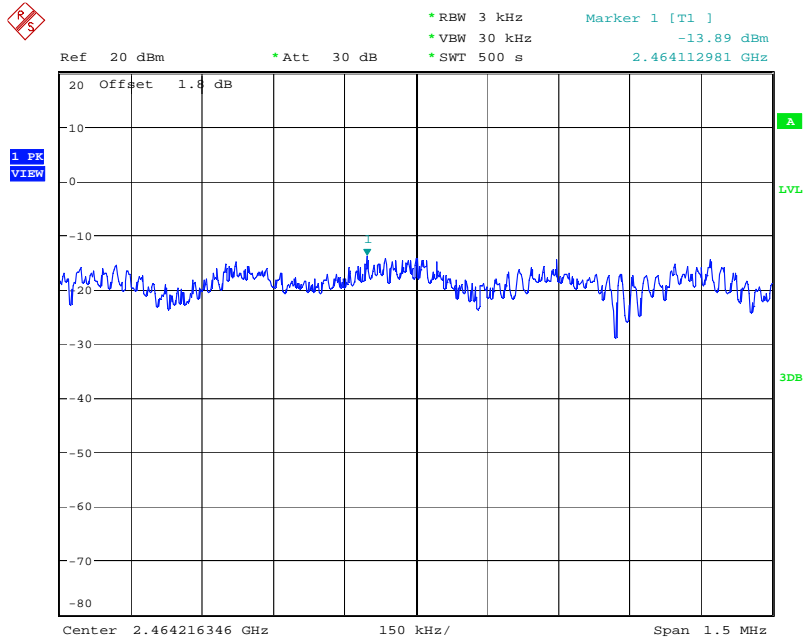


Date: 21.OCT.2009 15:06:17

Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2422 MHz

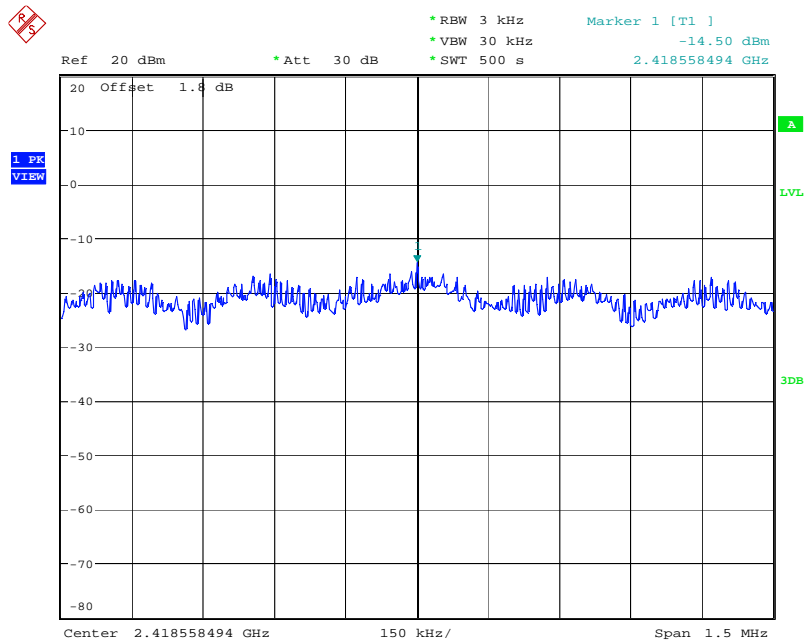


Date: 21.OCT.2009 15:17:28

Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2437 MHz

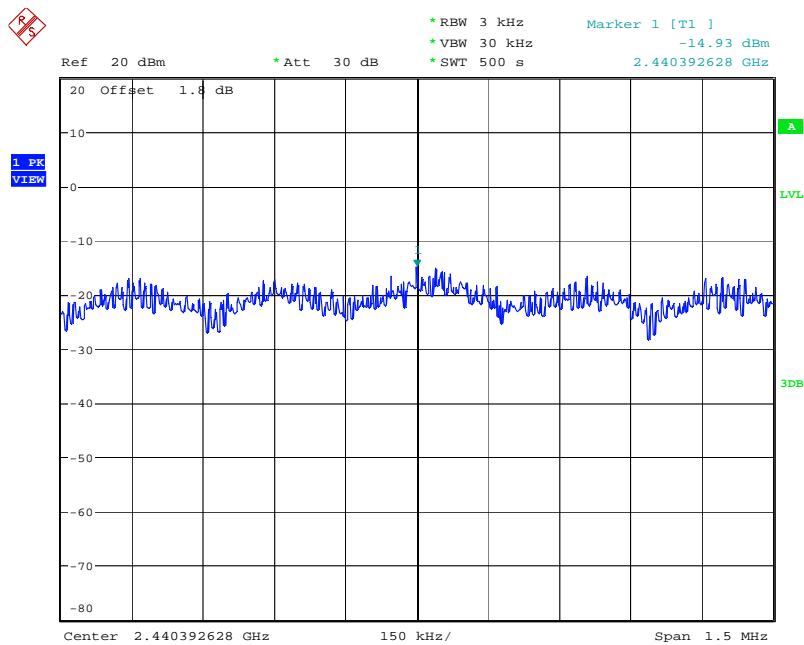

Date: 21.OCT.2009 15:16:30


Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2452 MHz

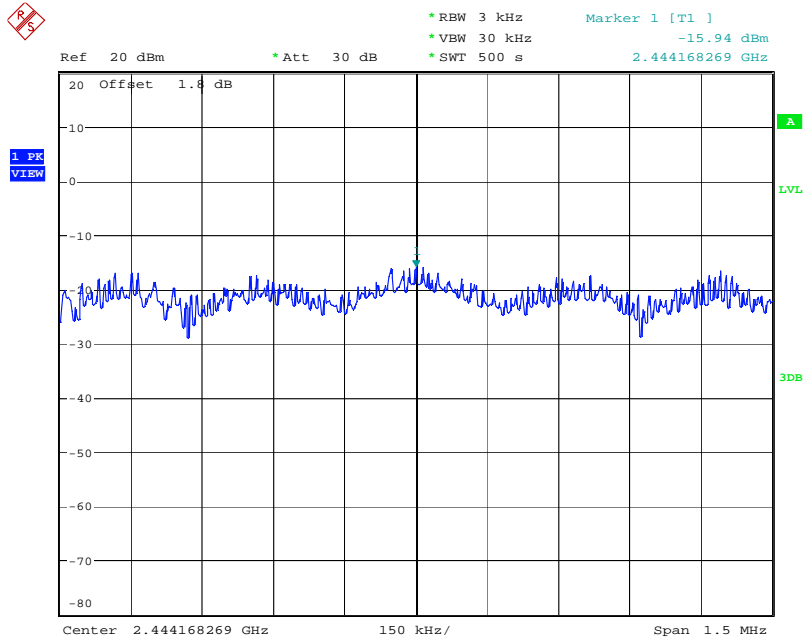

Date: 21.OCT.2009 15:15:28


For Two Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5745 MHz

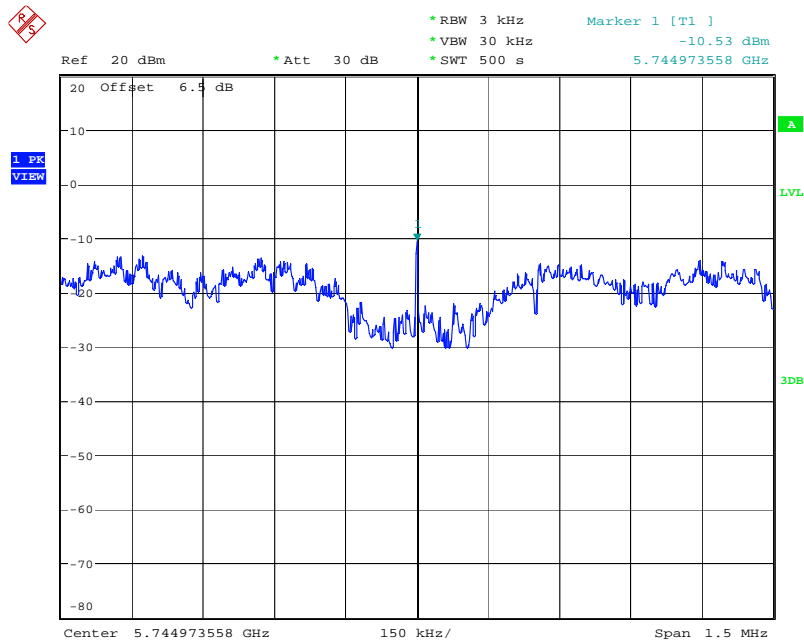


Date: 12.OCT.2009 10:41:10

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5785 MHz

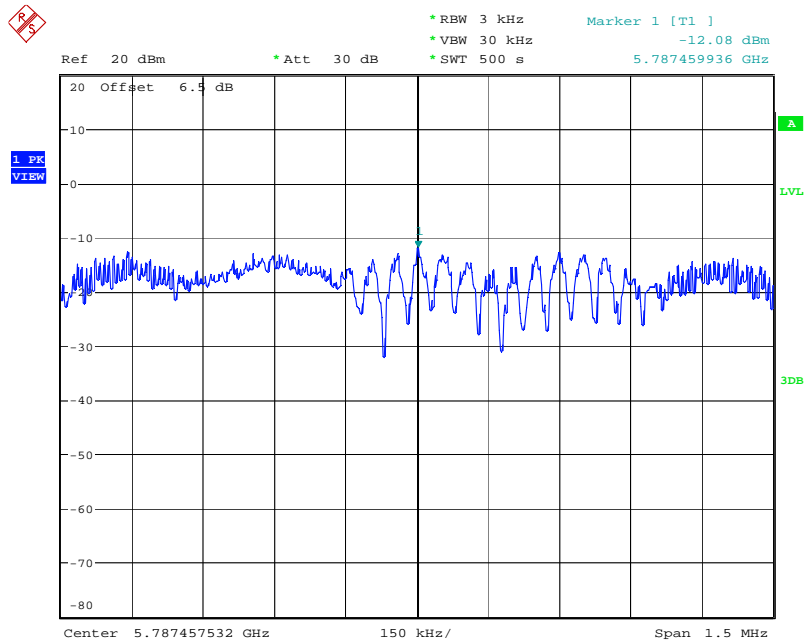


Date: 12.OCT.2009 10:42:29

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5825 MHz

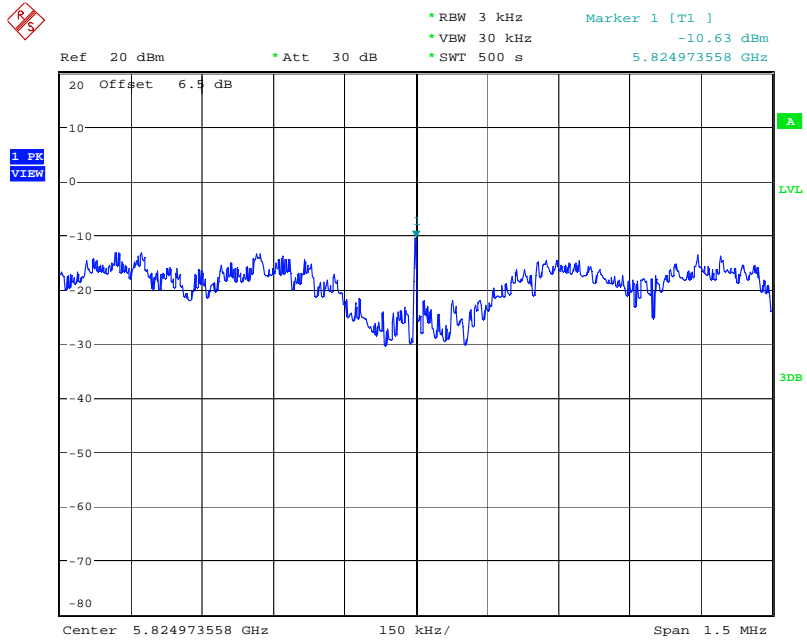


Date: 12.OCT.2009 10:43:46

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz) / 5755 MHz

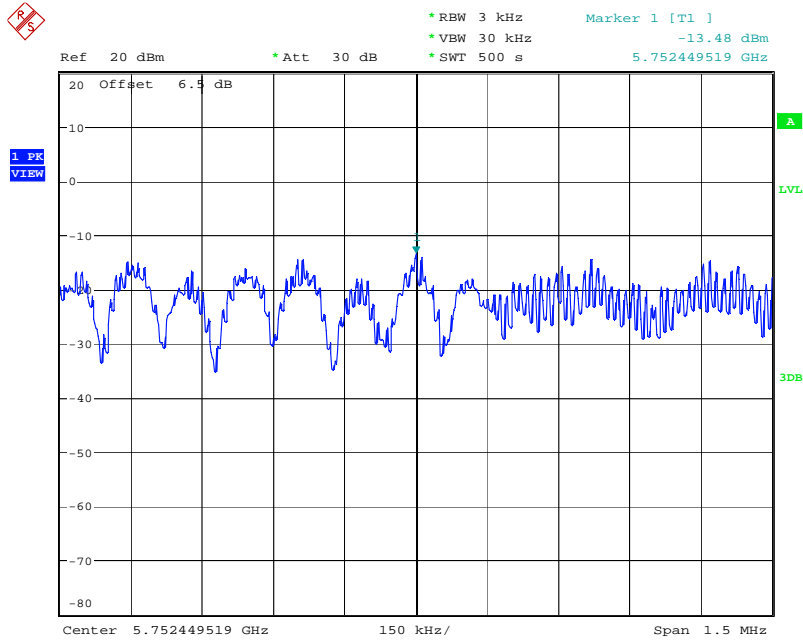


Date: 12.OCT.2009 10:45:14

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz) / 5795 MHz

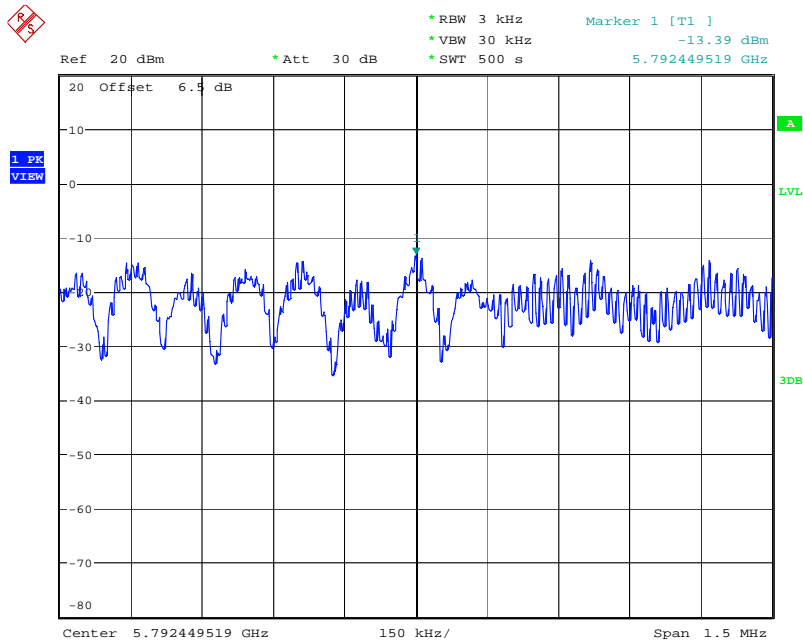


Date: 12.OCT.2009 10:46:39

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2412 MHz

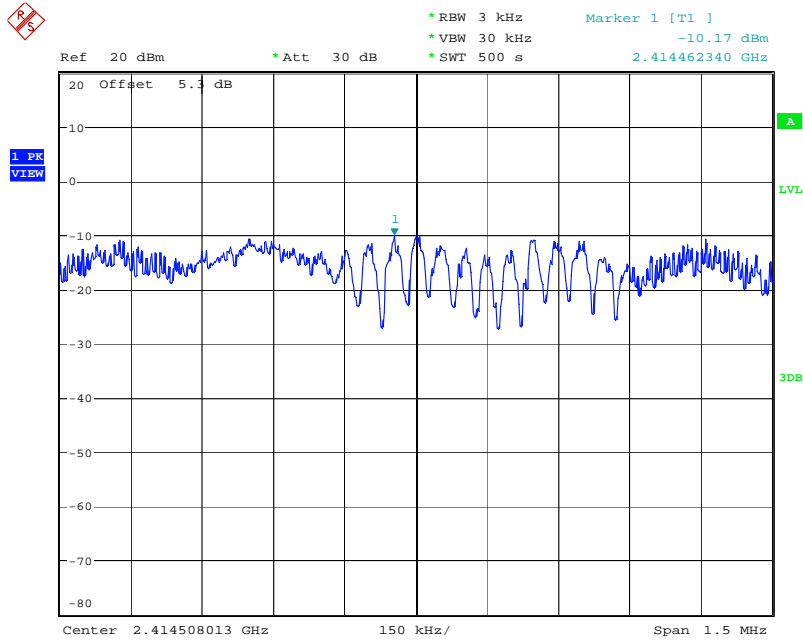


Date: 9.OCT.2009 15:12:41

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2437 MHz

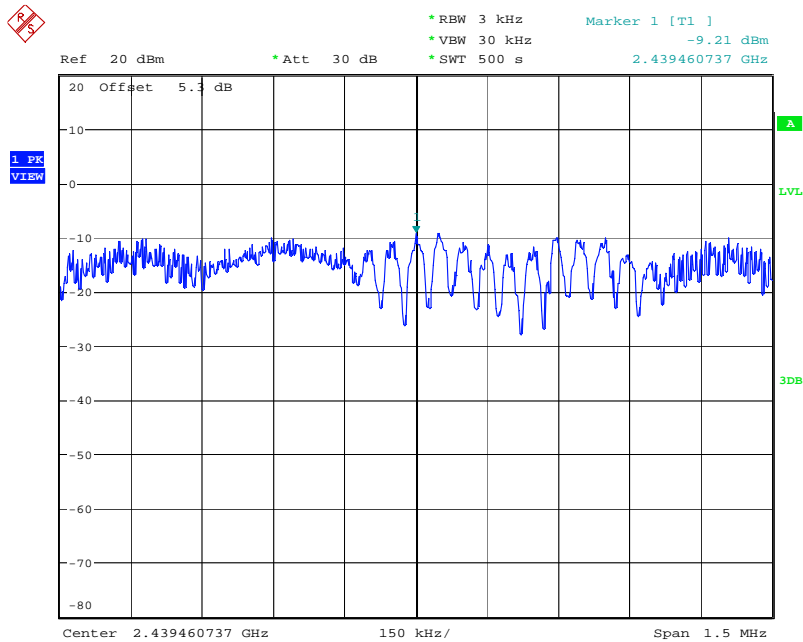


Date: 9.OCT.2009 15:14:03

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2462 MHz

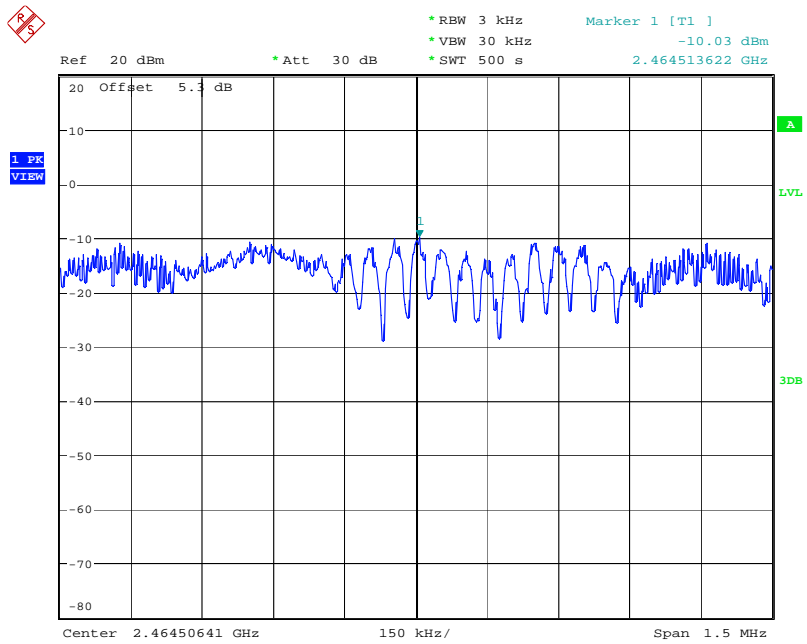


Date: 9.OCT.2009 15:15:16

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2422 MHz

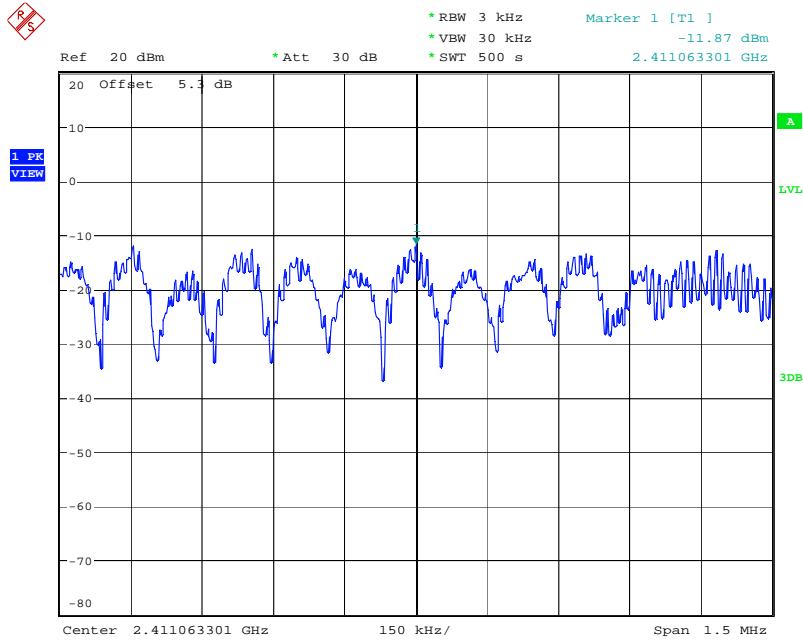


Date: 9.OCT.2009 15:17:48

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2437 MHz

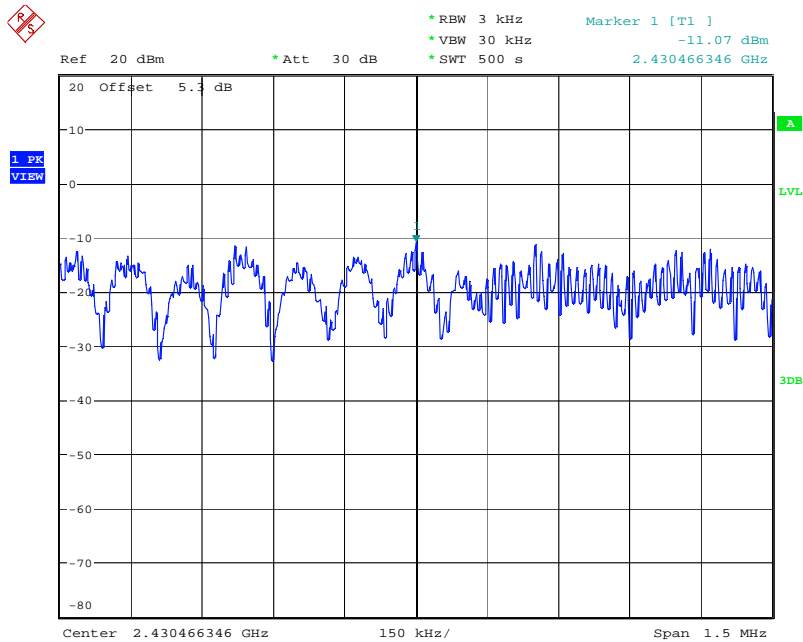

Date: 9.OCT.2009 15:18:53

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2452 MHz

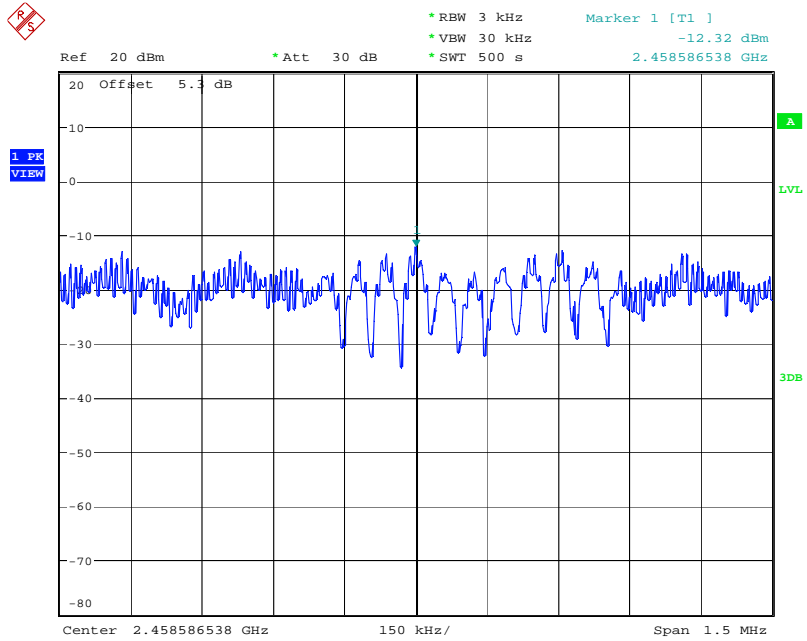

Date: 9.OCT.2009 15:19:55

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.4.4 Test Setup Layout

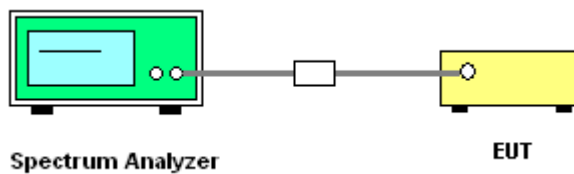

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	Oct. 21, 2009	Test Site No.	TH01-HY
Temperature	26	Humidity	56%
Test Engineer	Duncan	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.56	17.50	500	Complies
157	5785 MHz	17.56	17.50	500	Complies
165	5825 MHz	17.56	17.50	500	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.35	35.83	500	Complies
159	5795 MHz	36.35	35.90	500	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.56	17.50	500	Complies
6	2437 MHz	17.60	17.47	500	Complies
11	2462 MHz	17.56	17.47	500	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.41	35.90	500	Complies
6	2437 MHz	36.41	35.90	500	Complies
9	2452 MHz	36.41	35.90	500	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.31	17.47	500	Complies
157	5785 MHz	17.34	17.44	500	Complies
165	5825 MHz	17.31	17.47	500	Complies

Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.28	35.96	500	Complies
159	5795 MHz	36.35	35.90	500	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz)


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.50	500	Complies
6	2437 MHz	17.63	17.50	500	Complies
11	2462 MHz	17.63	17.53	500	Complies

Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.28	35.90	500	Complies
6	2437 MHz	36.41	35.96	500	Complies
9	2452 MHz	36.41	35.96	500	Complies


For Single Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

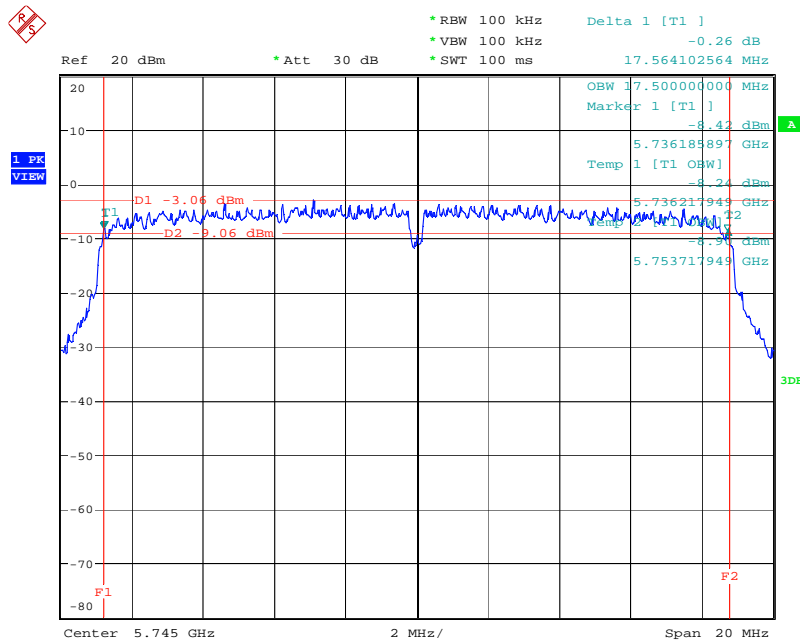


Date: 21.OCT.2009 15:30:59

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

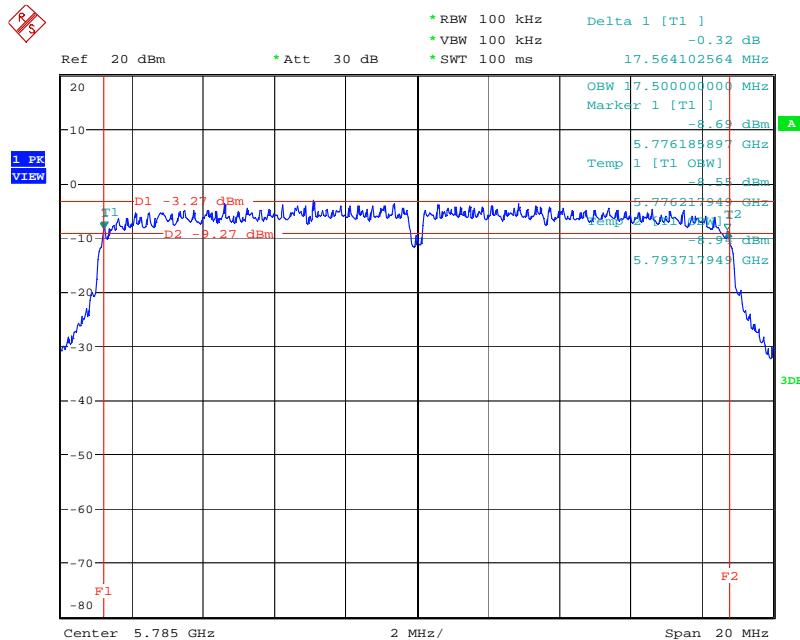


Date: 21.OCT.2009 15:32:23

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

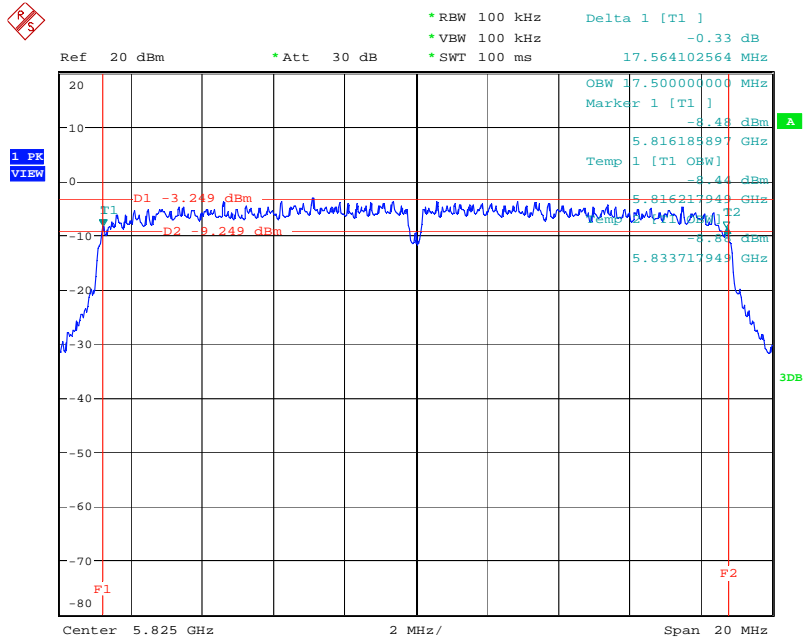


Date: 21.OCT.2009 15:33:28

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

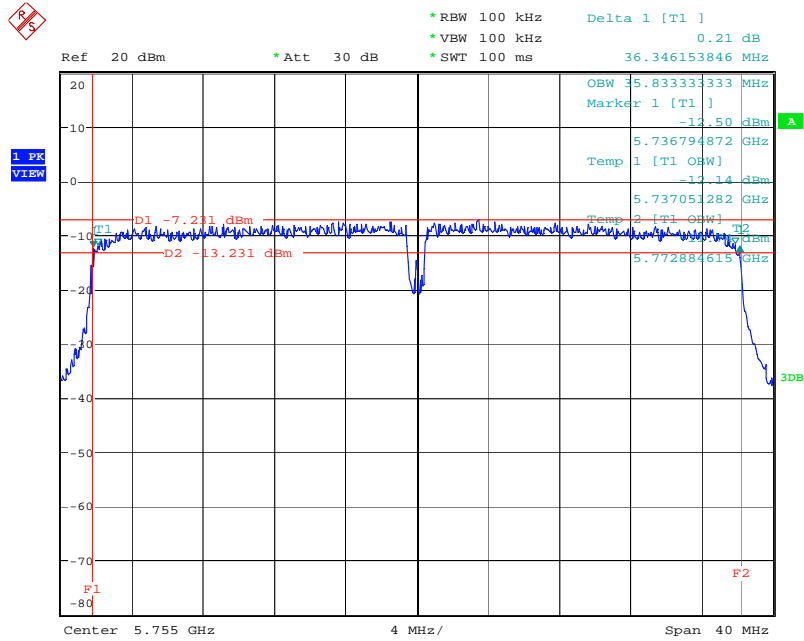


Date: 21.OCT.2009 15:37:13

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

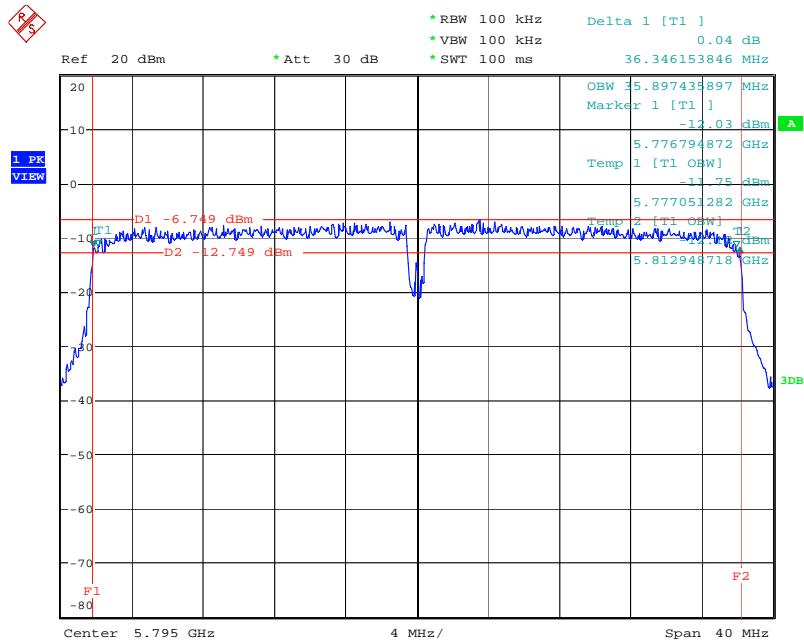


Date: 21.OCT.2009 15:36:05

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

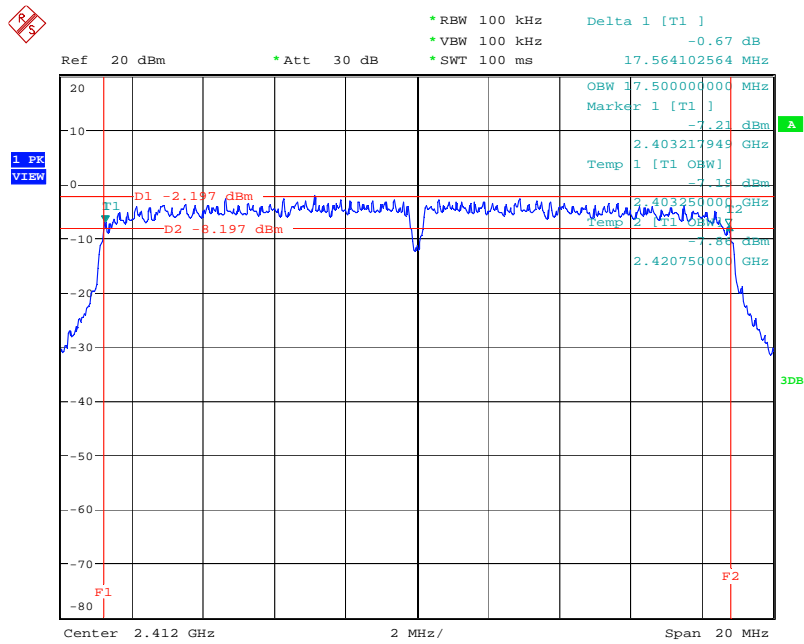


Date: 21.OCT.2009 15:04:14

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

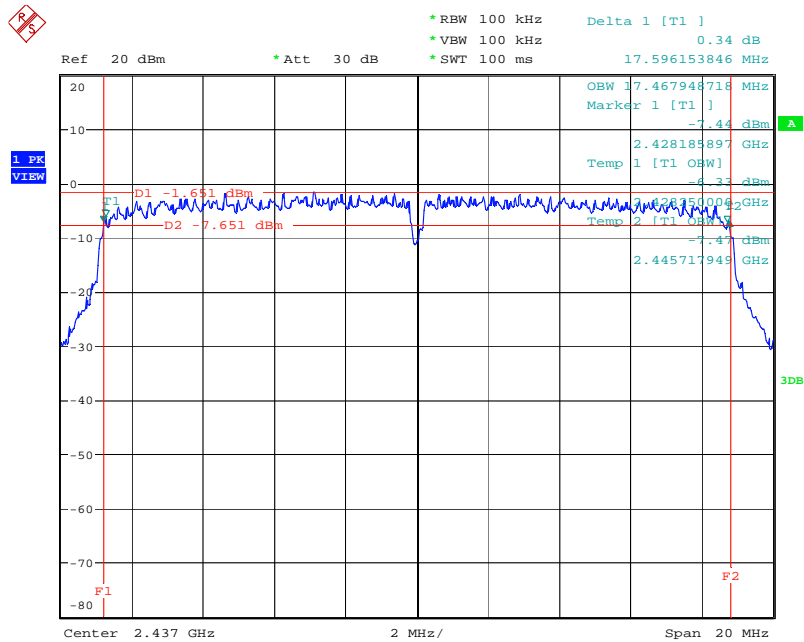


Date: 21.OCT.2009 15:05:19

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

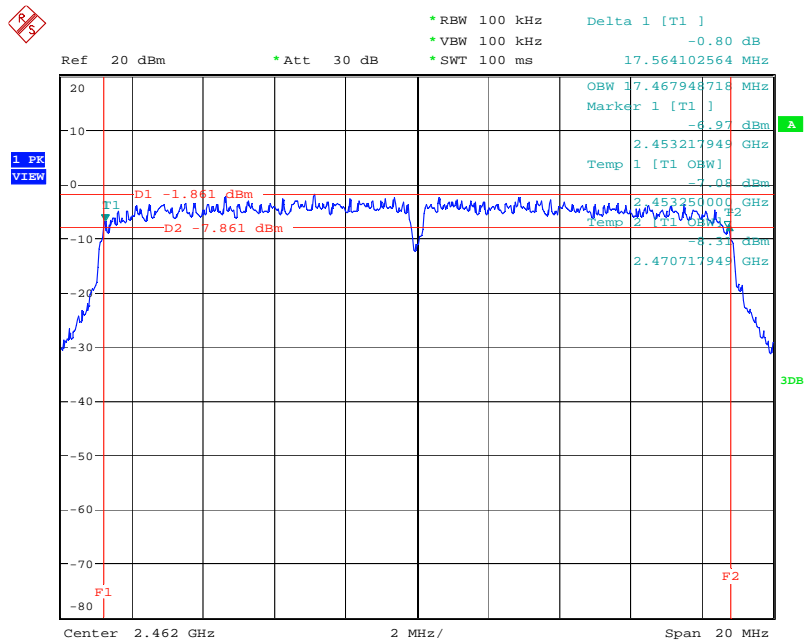


Date: 21.OCT.2009 15:06:27

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2422 MHz

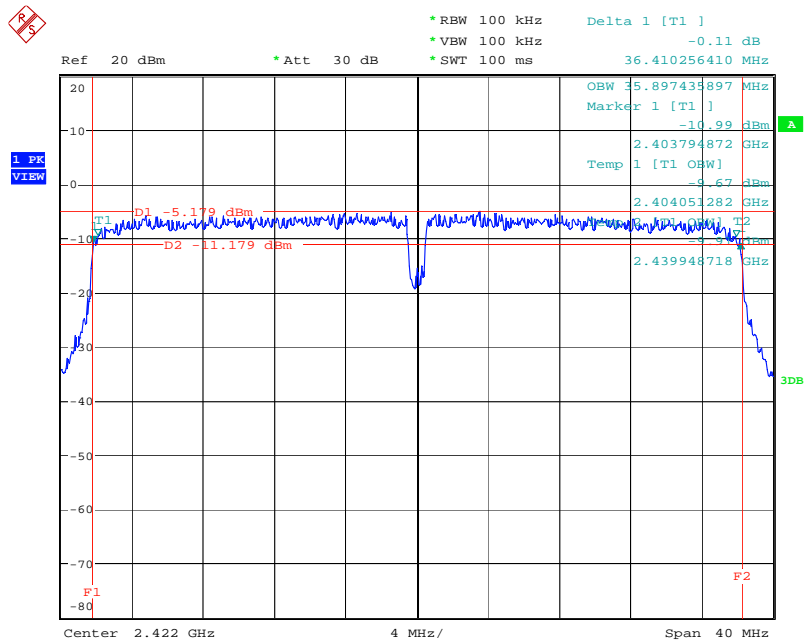


Date: 21.OCT.2009 15:17:38

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2437 MHz

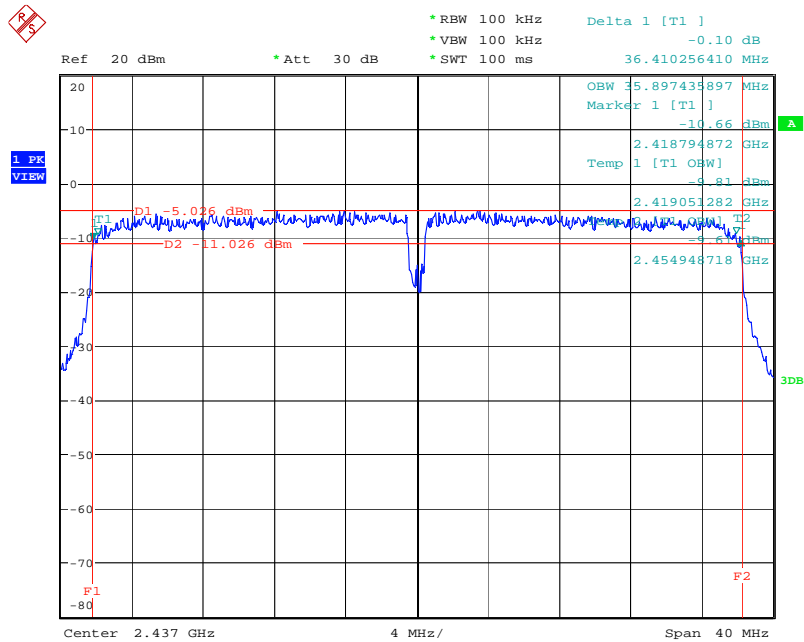

Date: 21.OCT.2009 15:16:40


6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2452 MHz

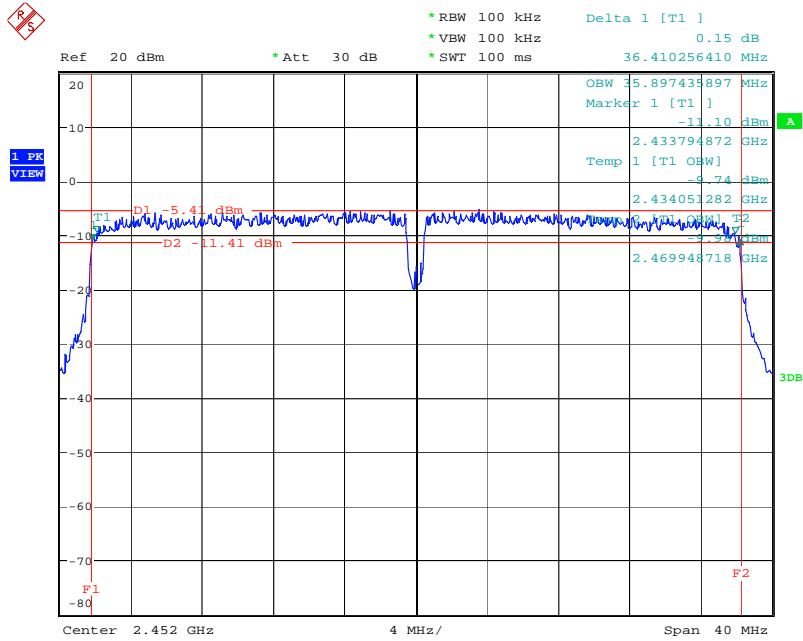

Date: 21.OCT.2009 15:15:38


For Two Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5745 MHz

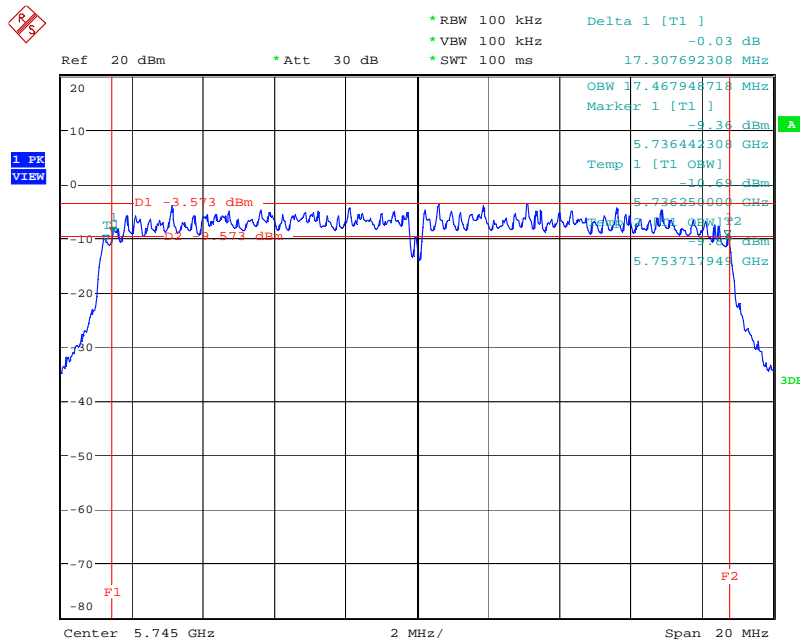


Date: 12.OCT.2009 10:41:20

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5785 MHz

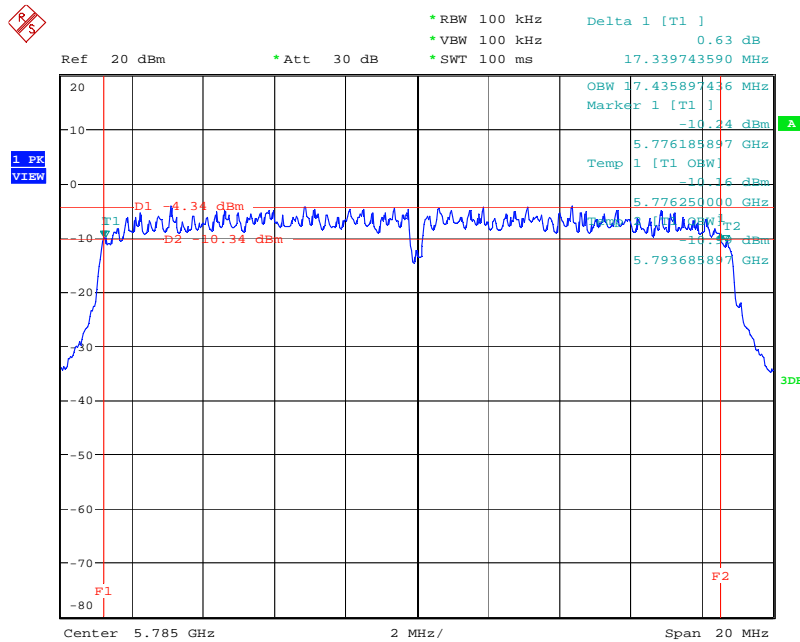


Date: 12.OCT.2009 10:42:39

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (20MHz) / 5825 MHz

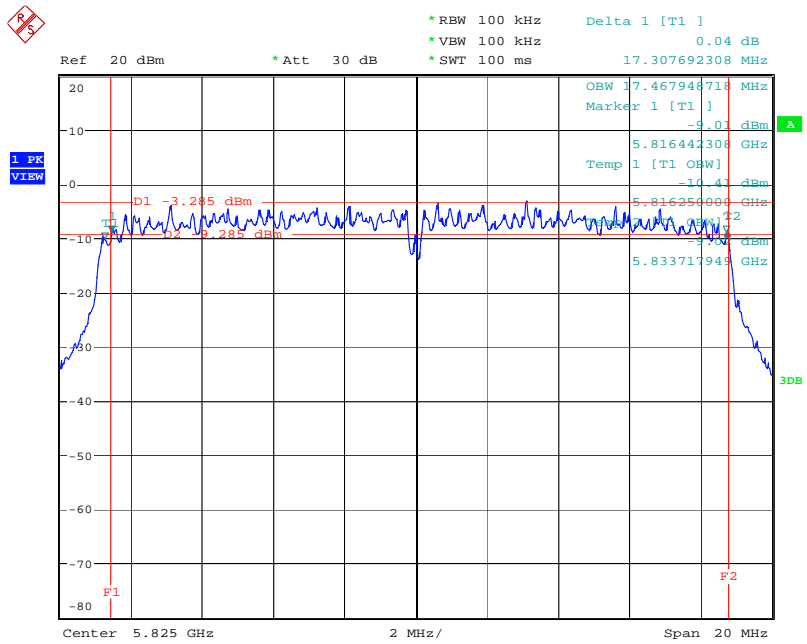


Date: 12.OCT.2009 10:43:56

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz) / 5755 MHz

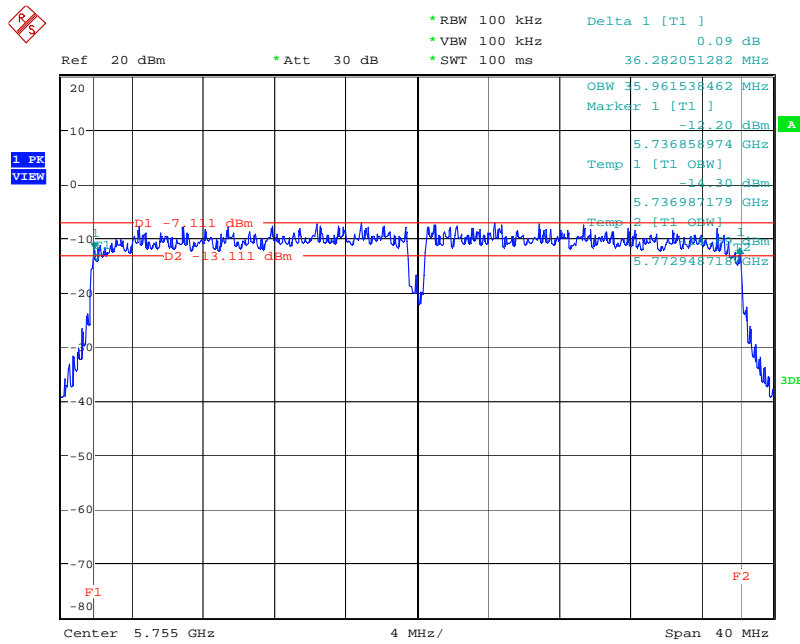


Date: 12.OCT.2009 10:45:24

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. 1 + Ant. 2 (40MHz) / 5795 MHz

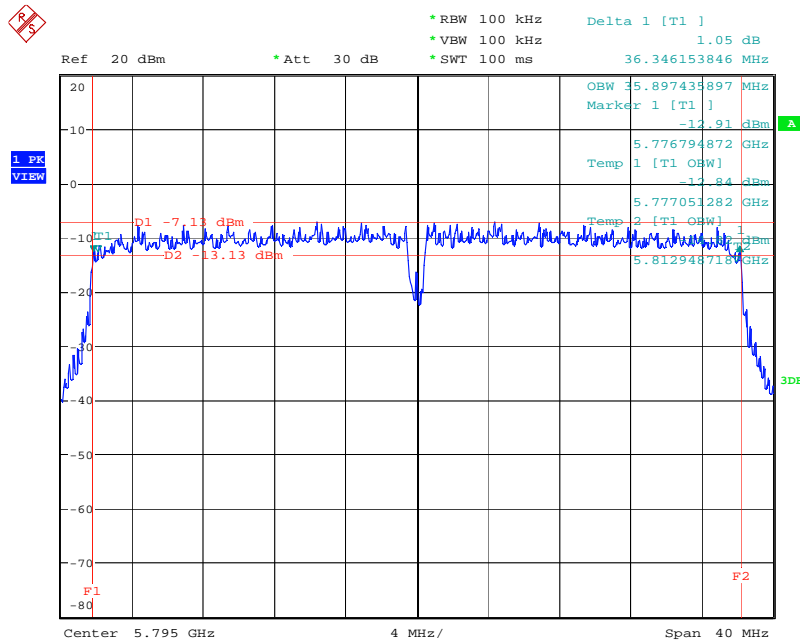


Date: 12.OCT.2009 10:46:49

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2412 MHz

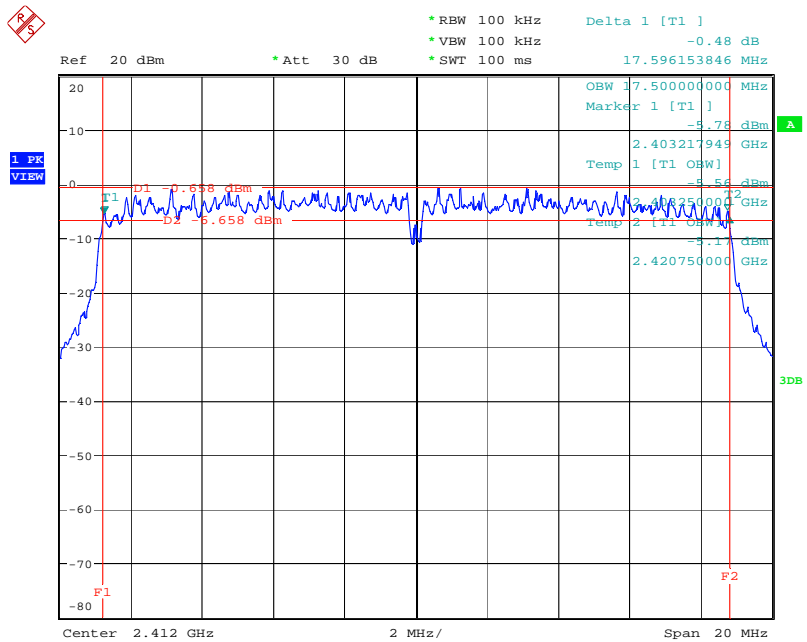


Date: 9.OCT.2009 15:12:51

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2437 MHz

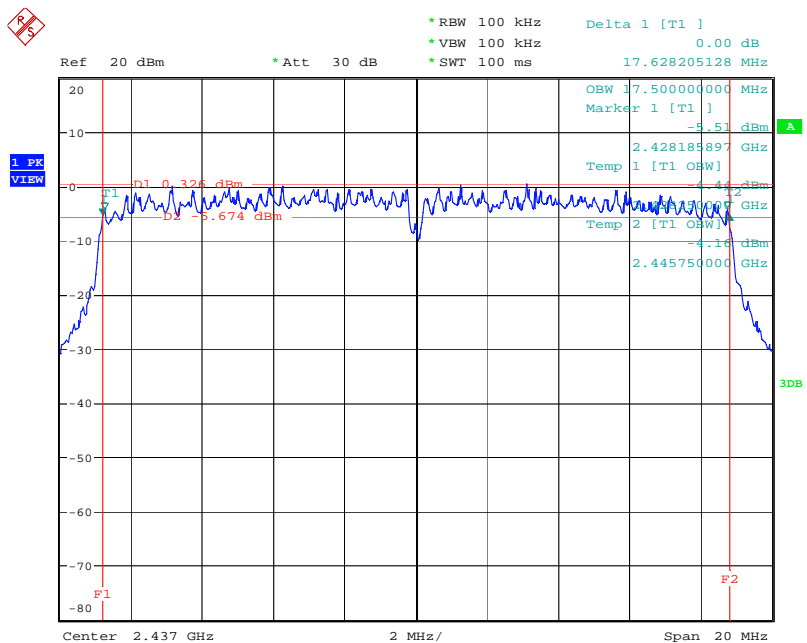


Date: 9.OCT.2009 15:14:13

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (20MHz) / 2462 MHz

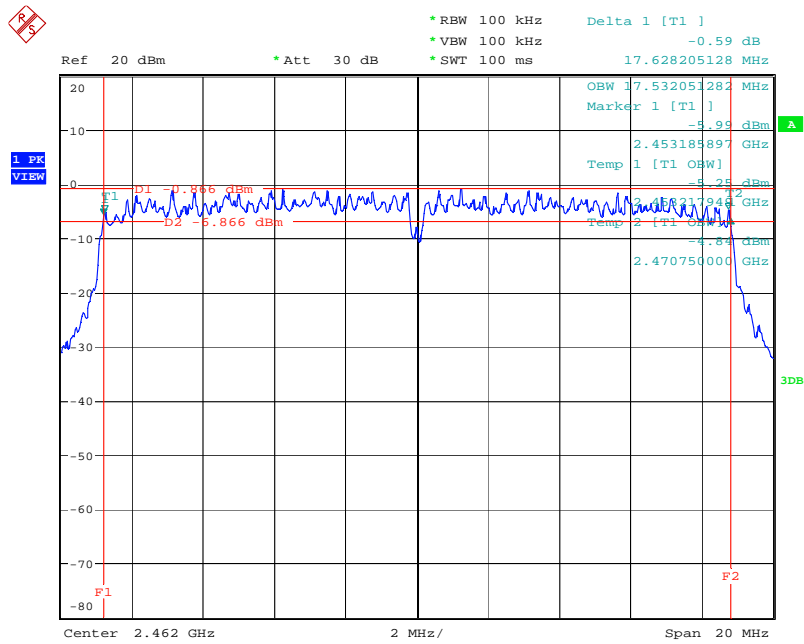


Date: 9.OCT.2009 15:15:26

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2422 MHz

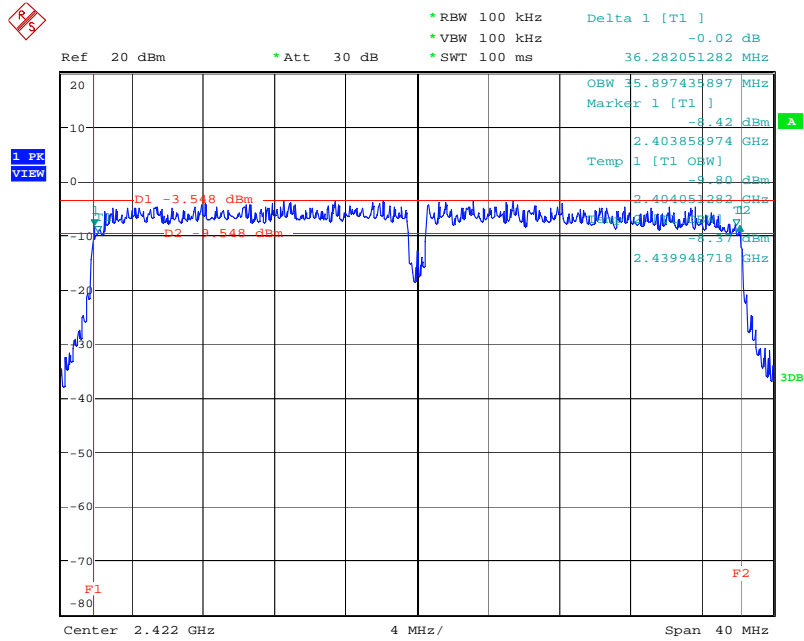


Date: 9.OCT.2009 15:17:58

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2437 MHz

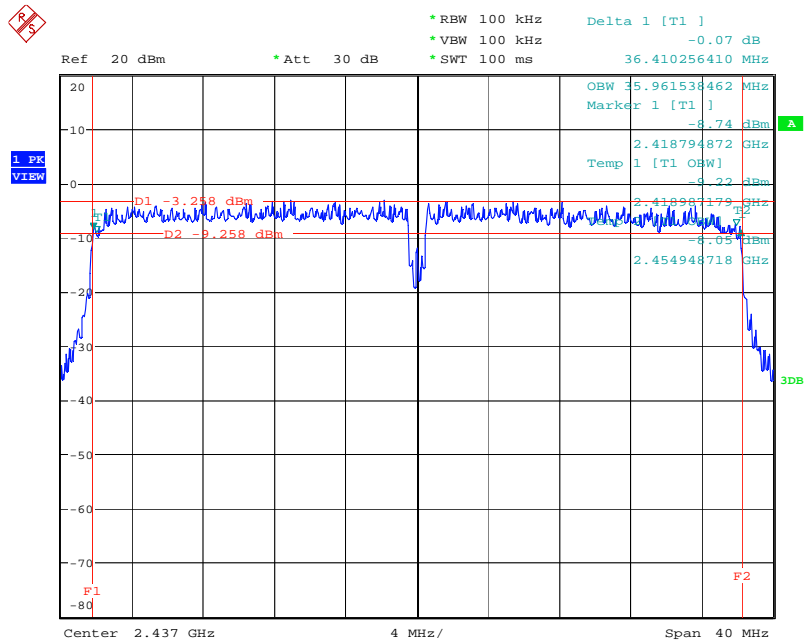

Date: 9.OCT.2009 15:19:03

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 + Ant. 2 (40MHz) / 2452 MHz

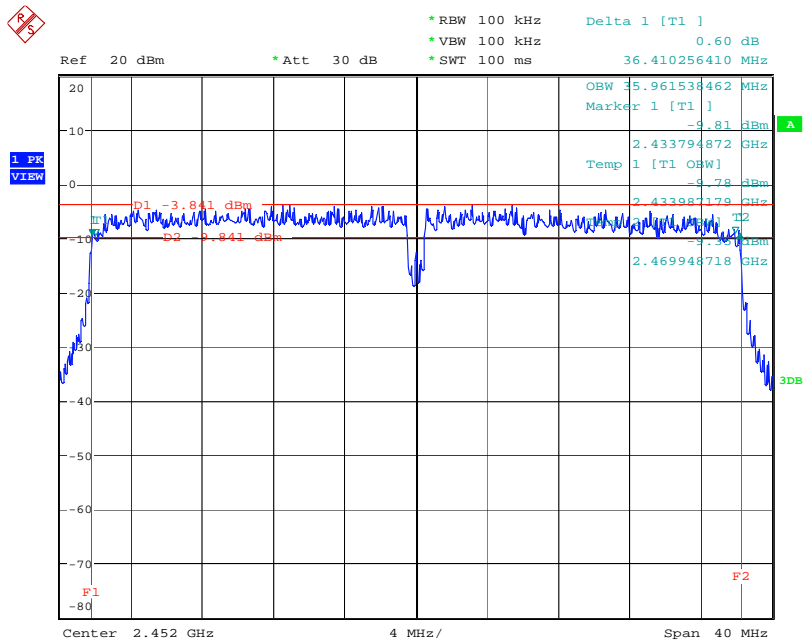

Date: 9.OCT.2009 15:20:05

3.5 Radiated Emissions Measurement

3.5.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

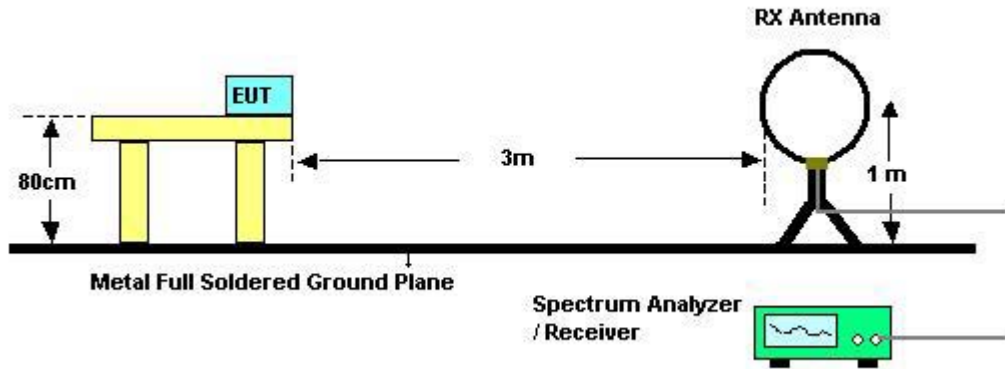

For radiated emissions above 30MHz

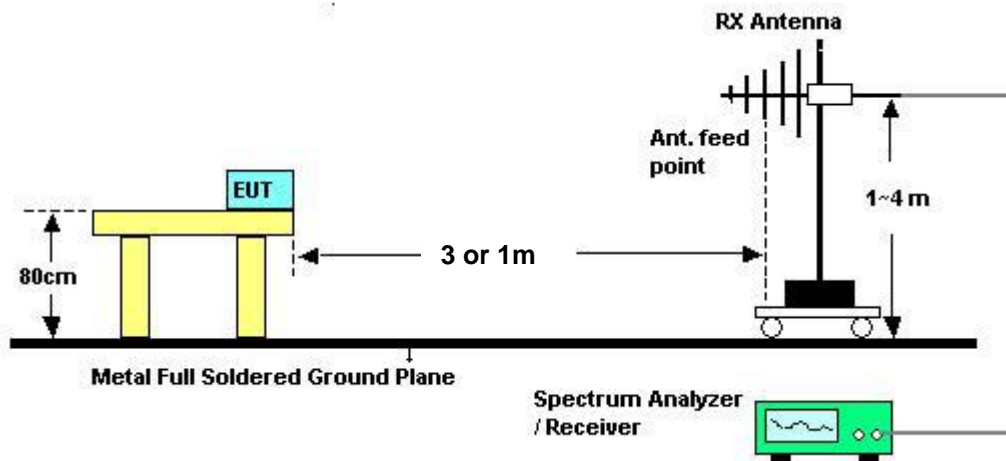

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configurations	Normal Mode (5GHz)

Horizontal

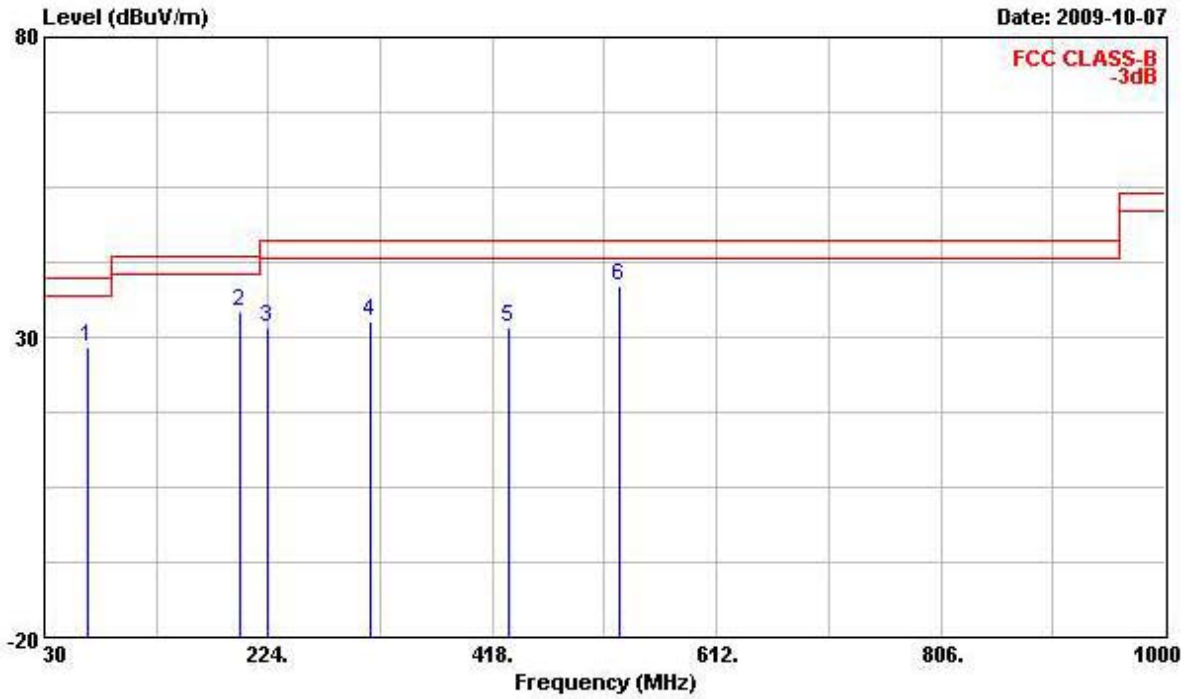

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	67.830	28.28	-11.72	40.00	50.56	6.81	1.71	30.80	Peak
2	198.780	34.16	-9.34	43.50	50.64	11.28	2.84	30.60	Peak
3	223.030	31.53	-14.47	46.00	47.01	12.11	2.96	30.55	Peak
4	312.270	32.51	-13.49	46.00	45.55	13.90	3.43	30.37	Peak
5	431.580	31.65	-14.35	46.00	41.86	15.90	4.00	30.11	Peak
6	528.580	38.43	-7.57	46.00	45.76	18.10	4.39	29.82	Peak

Vertical

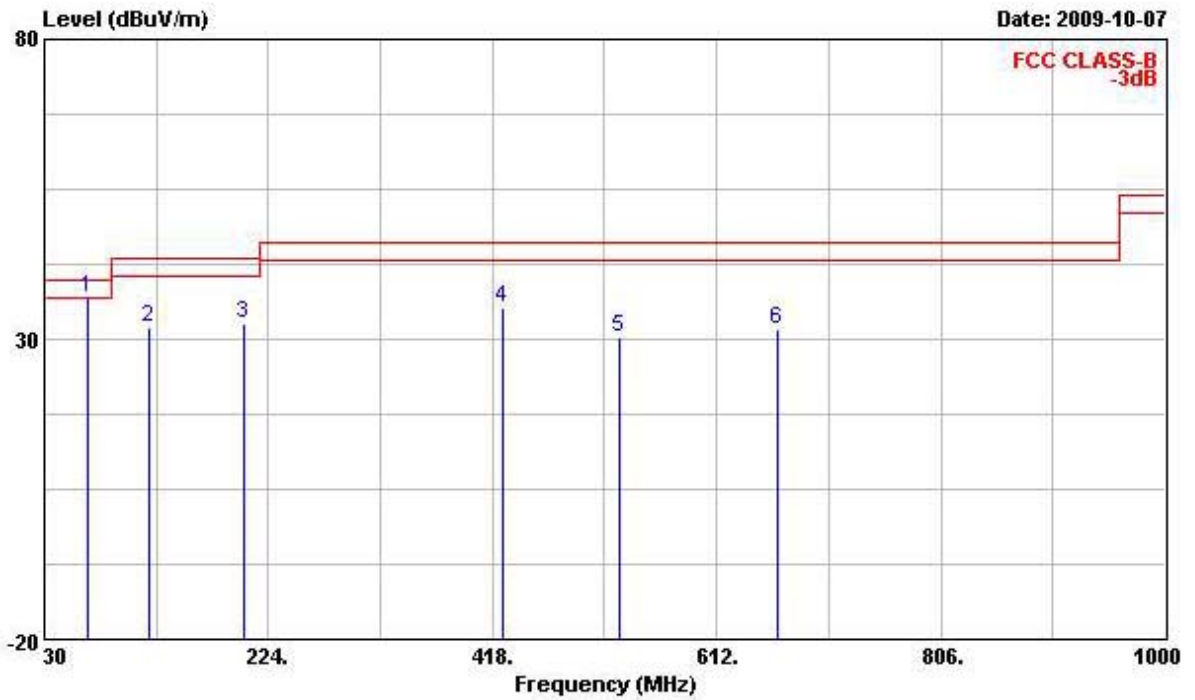

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	67.830	36.90	-3.10	40.00	59.18	6.81	1.71	30.80	Peak
2	121.180	31.95	-11.55	43.50	47.14	13.39	2.18	30.76	Peak
3	202.660	32.63	-10.87	43.50	48.91	11.45	2.86	30.59	Peak
4	427.700	35.35	-10.65	46.00	45.68	15.82	3.97	30.12	Peak
5	528.580	30.26	-15.74	46.00	37.59	18.10	4.39	29.82	Peak
6	665.350	31.57	-14.43	46.00	36.46	19.31	5.14	29.34	Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configurations	Normal Mode (2.4GHz)

Horizontal

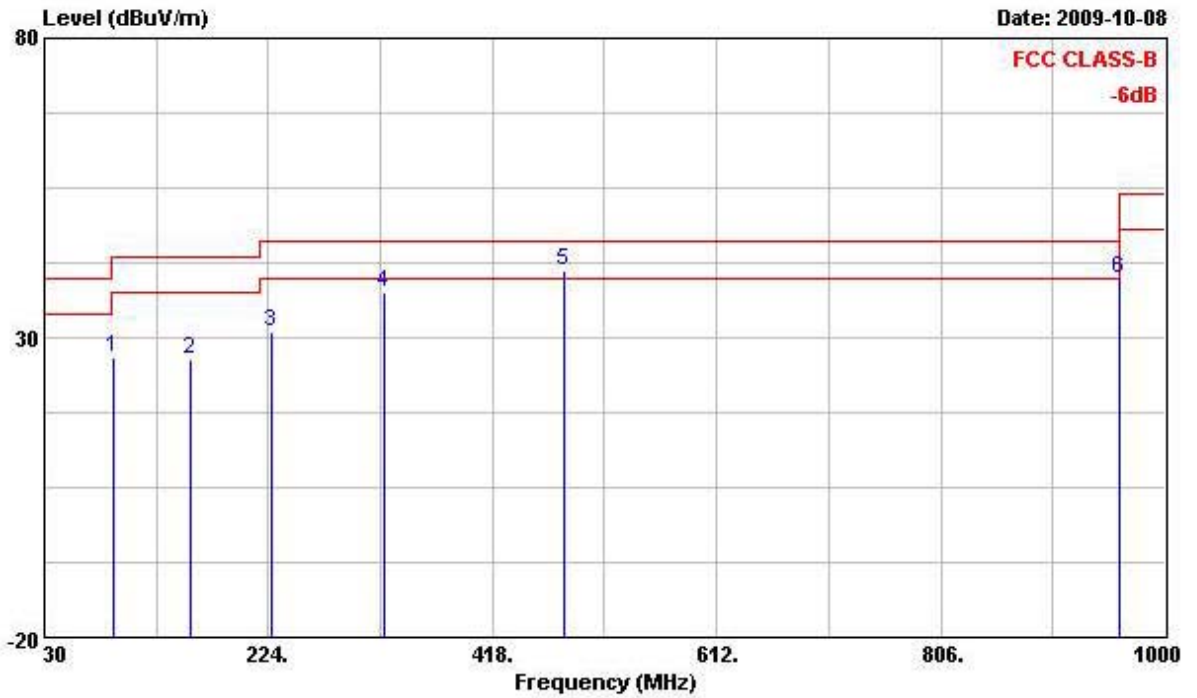

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	90.140	26.74	-16.76	43.50	46.11	9.50	1.93	30.80	Peak
2	156.100	26.23	-17.27	43.50	43.76	10.64	2.52	30.69	Peak
3	225.940	31.05	-14.95	46.00	46.42	12.21	2.97	30.55	Peak
4	323.910	37.69	-8.31	46.00	50.50	14.08	3.46	30.35	Peak
5	479.110	41.08	-4.92	46.00	49.94	16.87	4.23	29.96	Peak
6	960.230	39.96	-14.04	54.00	40.81	21.52	6.09	28.46	Peak

Vertical

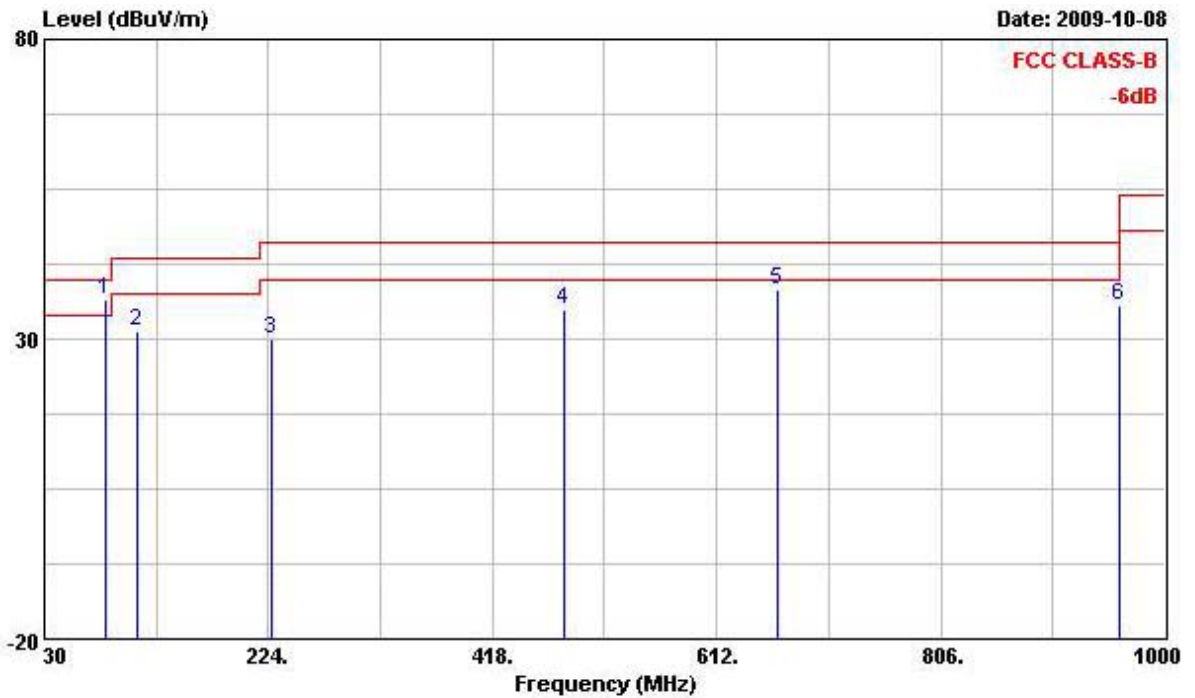

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	82.380	36.44	-3.56	40.00	57.53	7.95	1.76	30.80 Peak
2	110.510	31.22	-12.28	43.50	47.43	12.46	2.11	30.78 Peak
3	225.940	29.85	-16.15	46.00	45.22	12.21	2.97	30.55 Peak
4	479.110	35.00	-11.00	46.00	43.86	16.87	4.23	29.96 Peak
5	665.350	38.16	-7.84	46.00	43.05	19.31	5.14	29.34 Peak
6	960.230	35.63	-18.37	54.00	36.48	21.52	6.09	28.46 Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 149 (20MHz)


Horizontal

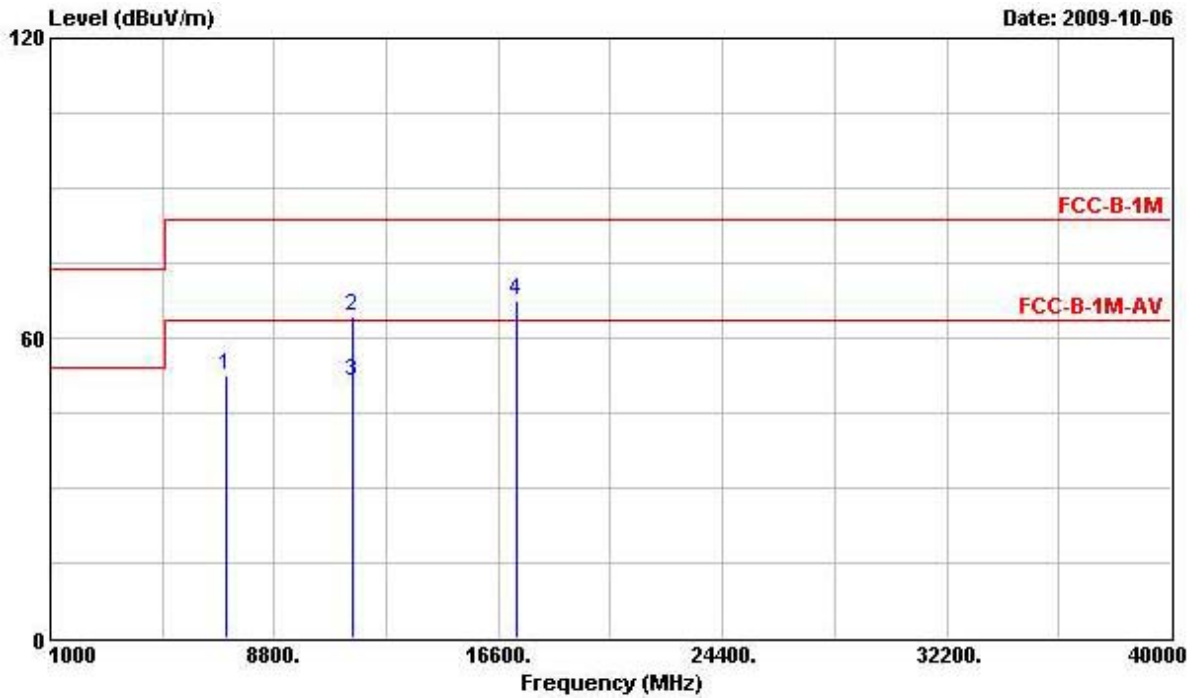

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7106.000	52.53			43.38	37.82	5.61	34.28	Peak
2	11490.000	64.38	-19.16	83.54	50.80	40.59	6.63	33.64	Peak
3	11490.000	51.38	-12.16	63.54	37.80	40.59	6.63	33.64	Average
4	17235.000	67.38			47.50	43.56	8.55	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

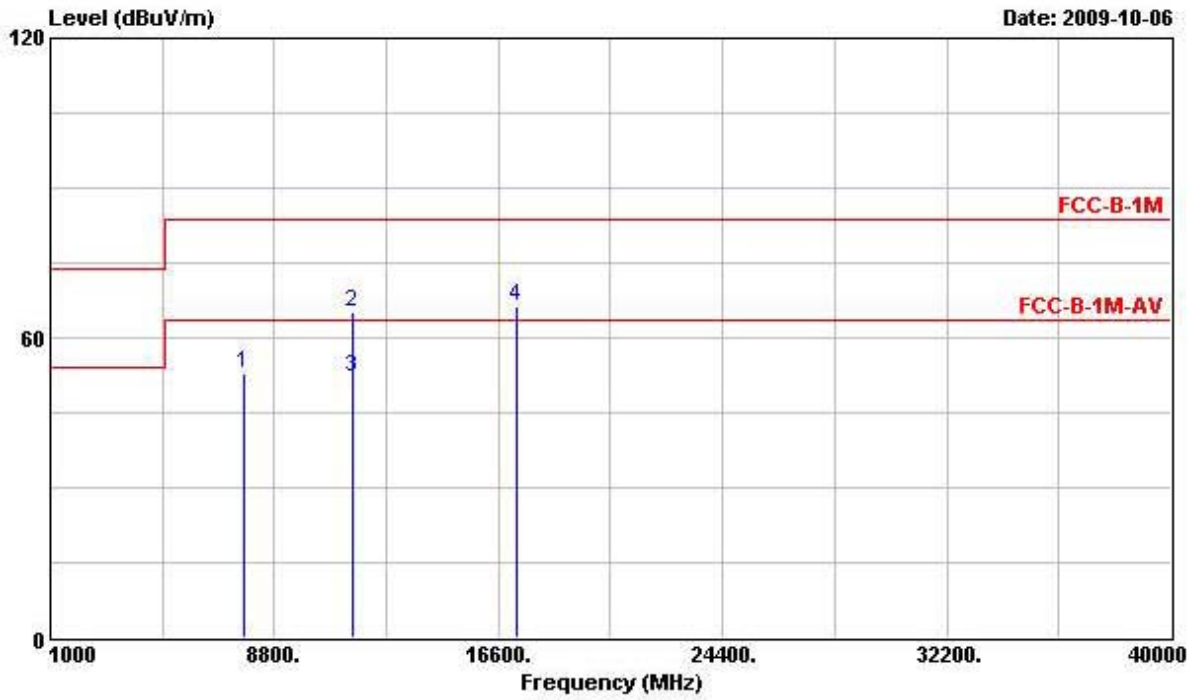


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7754.000	52.93			43.48	38.05	5.73	34.33	Peak
2	11490.000	65.05	-18.49	83.54	51.47	40.59	6.63	33.64	Peak
3	11490.000	51.91	-11.63	63.54	38.33	40.59	6.63	33.64	Average
4	17235.000	66.18			46.30	43.56	8.55	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 157 (20MHz)


Horizontal

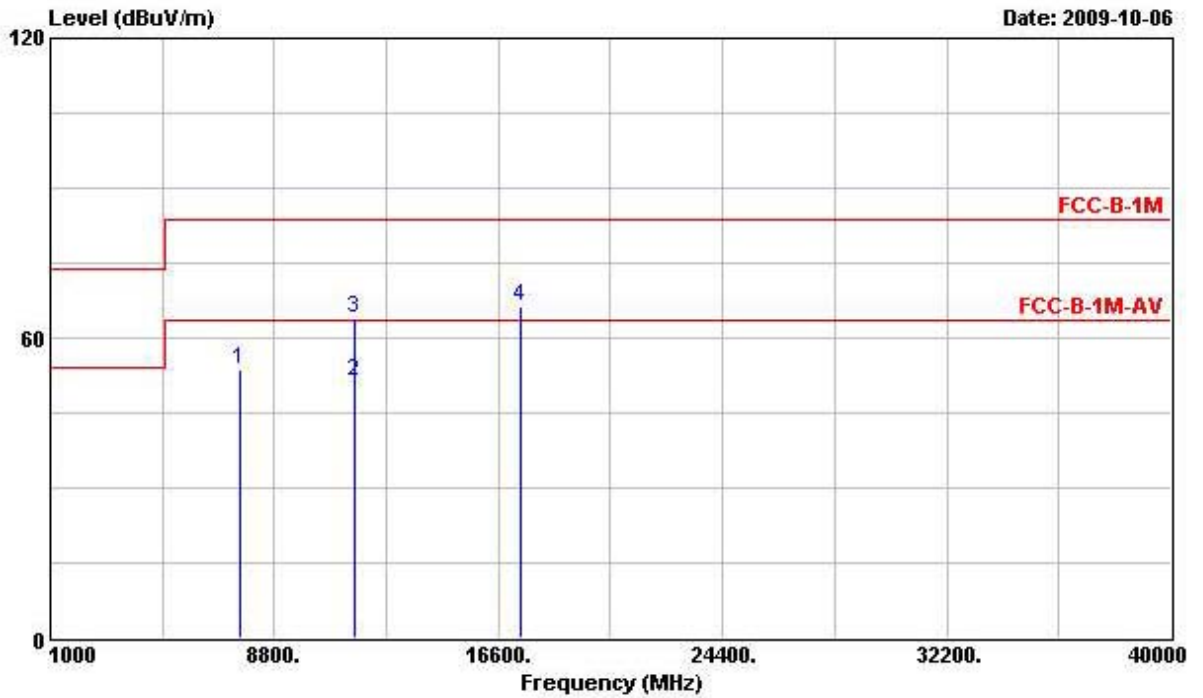

Item	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7594.000	53.75	-29.79	83.54	44.42	37.96	5.68	34.31	Peak
2	11570.000	51.23	-12.31	63.54	37.60	40.63	6.63	33.63	Average
3	11570.000	64.03	-19.51	83.54	50.40	40.63	6.63	33.63	Peak
4	17355.000	66.43			46.64	43.49	8.50	32.20	Peak

Note: An item 4 is on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

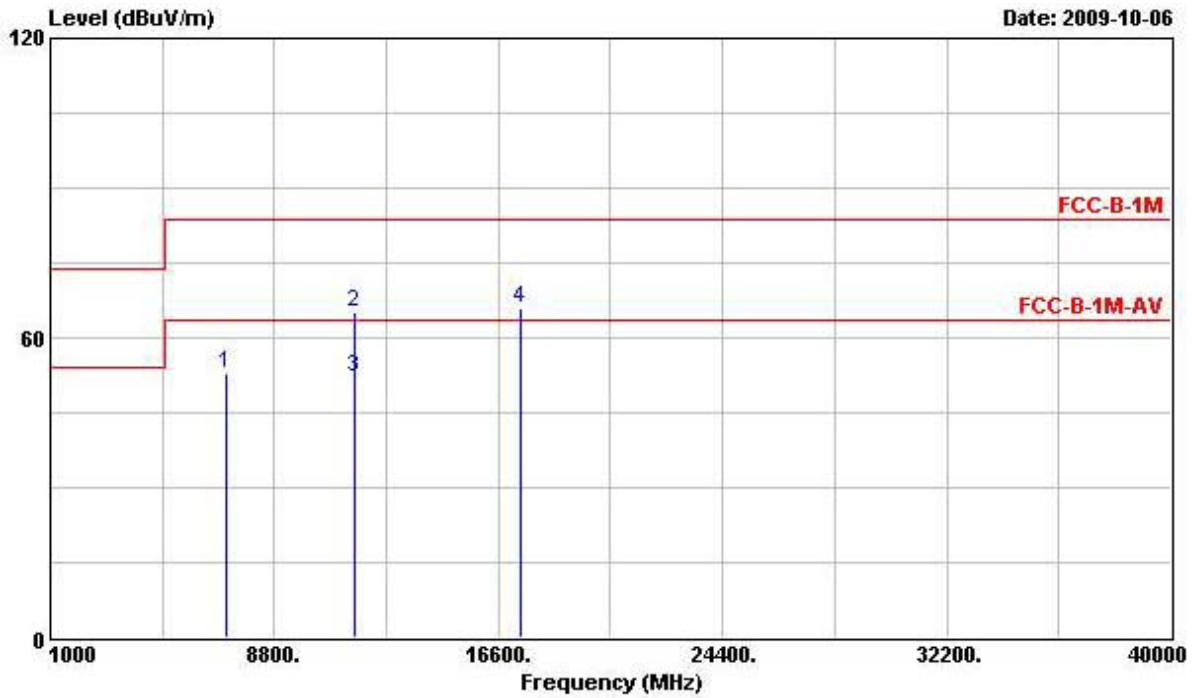


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7150.000	52.99			43.82	37.83	5.62	34.28	Peak
2	11570.000	65.08	-18.46	83.54	51.45	40.63	6.63	33.63	Peak
3	11570.000	52.30	-11.24	63.54	38.67	40.63	6.63	33.63	Average
4	17355.000	66.07			46.28	43.49	8.50	32.20	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 165 (20MHz)


Horizontal

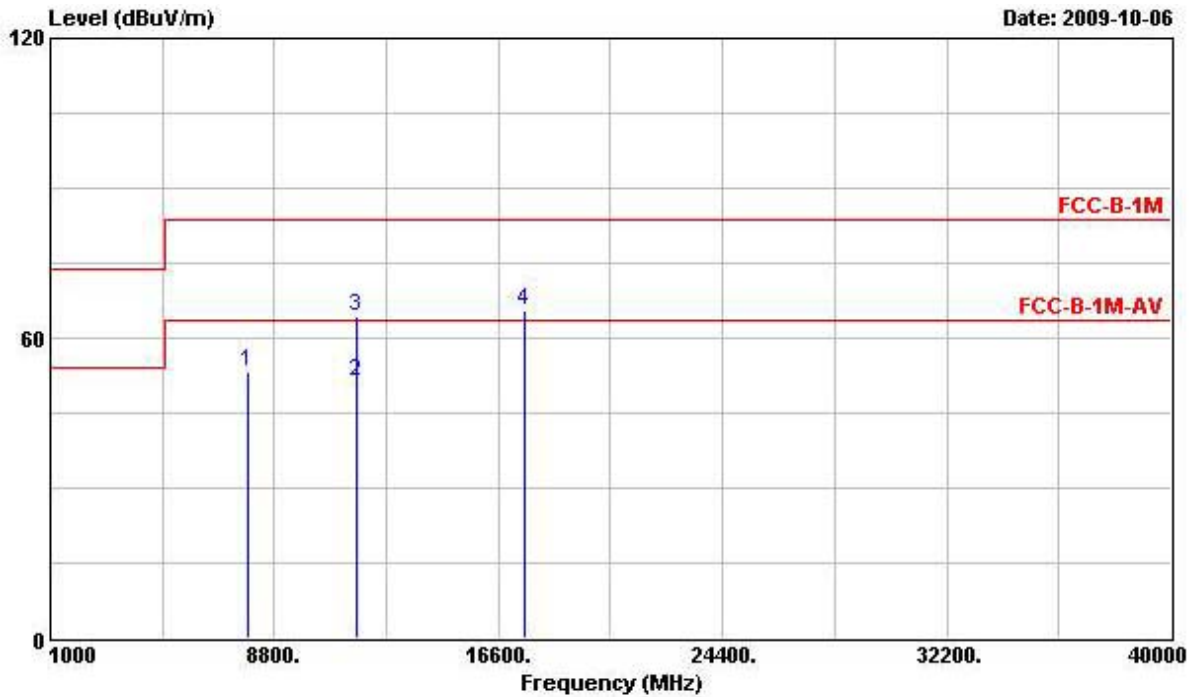

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7874.000	53.41			43.87	38.12	5.77	34.35	Peak
2	11650.000	51.29	-12.25	63.54	37.59	40.66	6.64	33.60	Average
3	11650.000	64.19	-19.35	83.54	50.49	40.66	6.64	33.60	Peak
4	17475.000	65.60			45.90	43.42	8.44	32.16	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

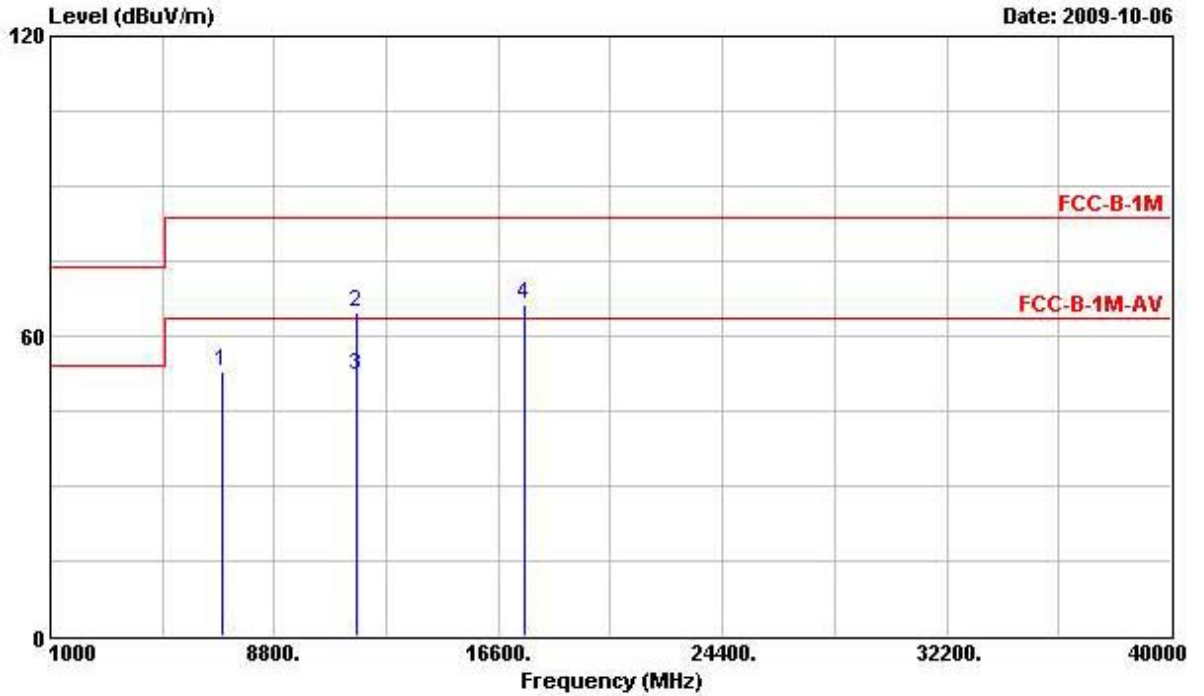


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7018.000	52.72			43.60	37.80	5.60	34.28	Peak
2	11650.000	64.89	-18.65	83.54	51.19	40.66	6.64	33.60	Peak
3	11650.000	52.02	-11.52	63.54	38.32	40.66	6.64	33.60	Average
4	17475.000	66.32			46.62	43.42	8.44	32.16	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 151 (40MHz)


Horizontal

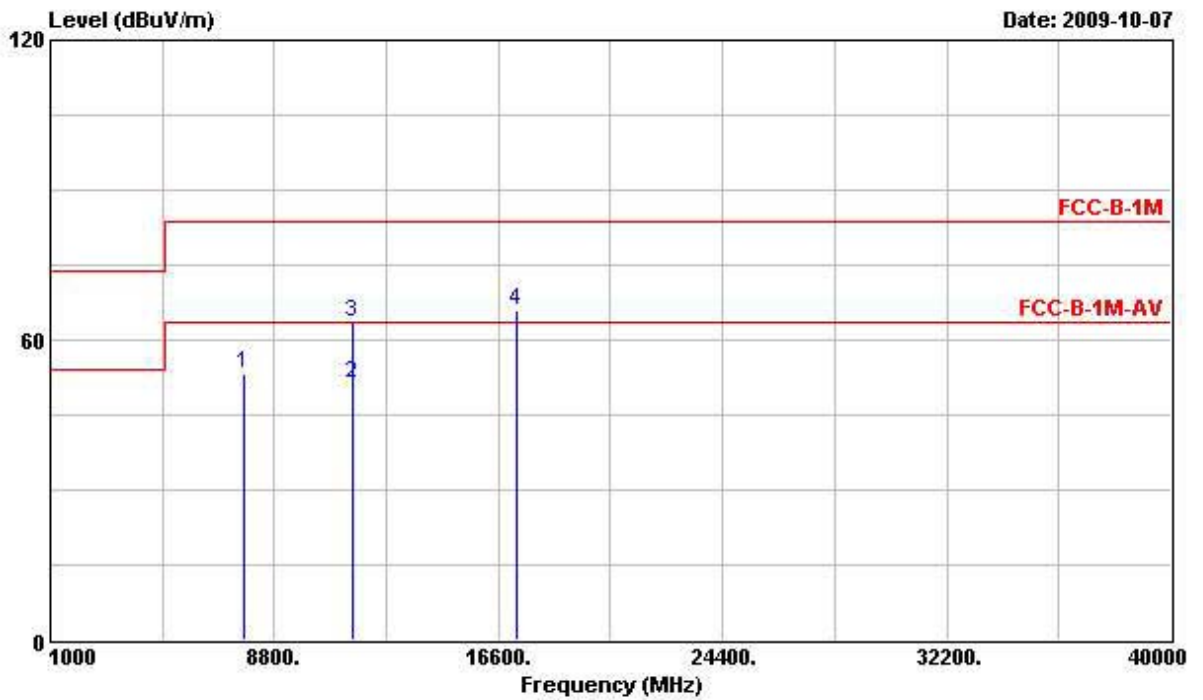

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7714.000	53.12	-30.42	83.54	43.69	38.03	5.72	34.32	Peak
2	11510.000	51.27	-12.27	63.54	37.70	40.60	6.63	33.66	Average
3	11510.000	63.69	-19.85	83.54	50.12	40.60	6.63	33.66	Peak
4	17265.000	65.93			46.08	43.54	8.54	32.23	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

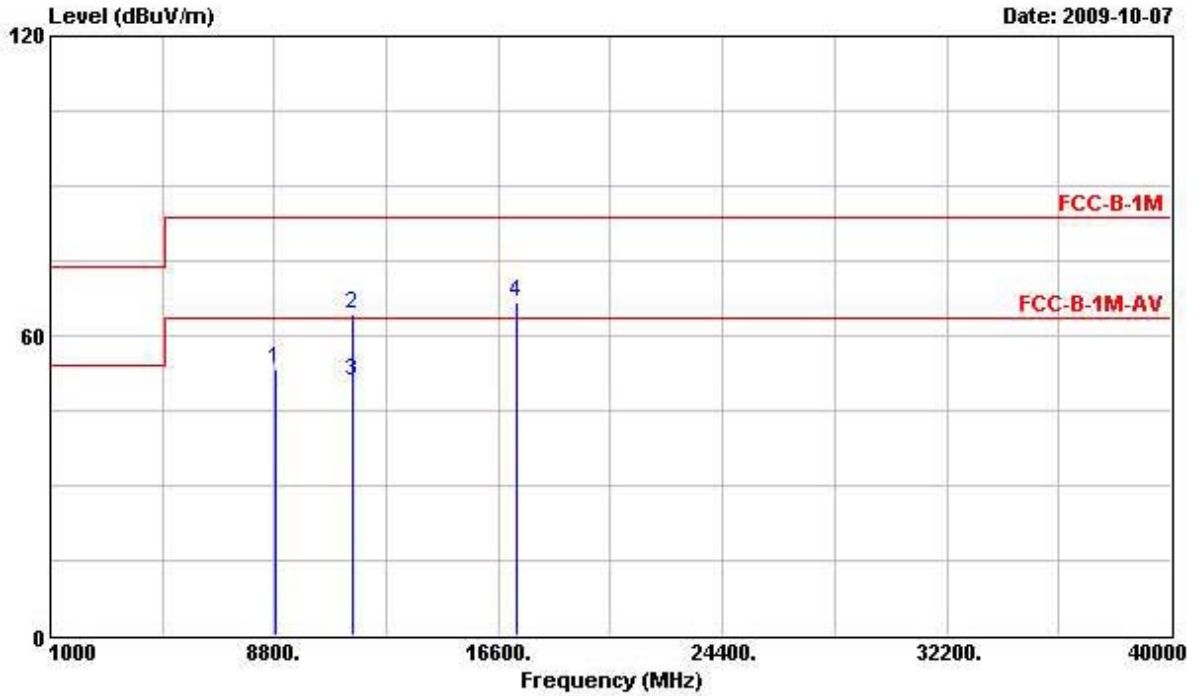


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8852.000	53.14			43.41	38.22	6.09	34.58	Peak
2	11510.000	64.17	-19.37	83.54	50.60	40.60	6.63	33.66	Peak
3	11510.000	50.87	-12.67	63.54	37.30	40.60	6.63	33.66	Average
4	17265.000	66.55			46.70	43.54	8.54	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 159 (40MHz)


Horizontal

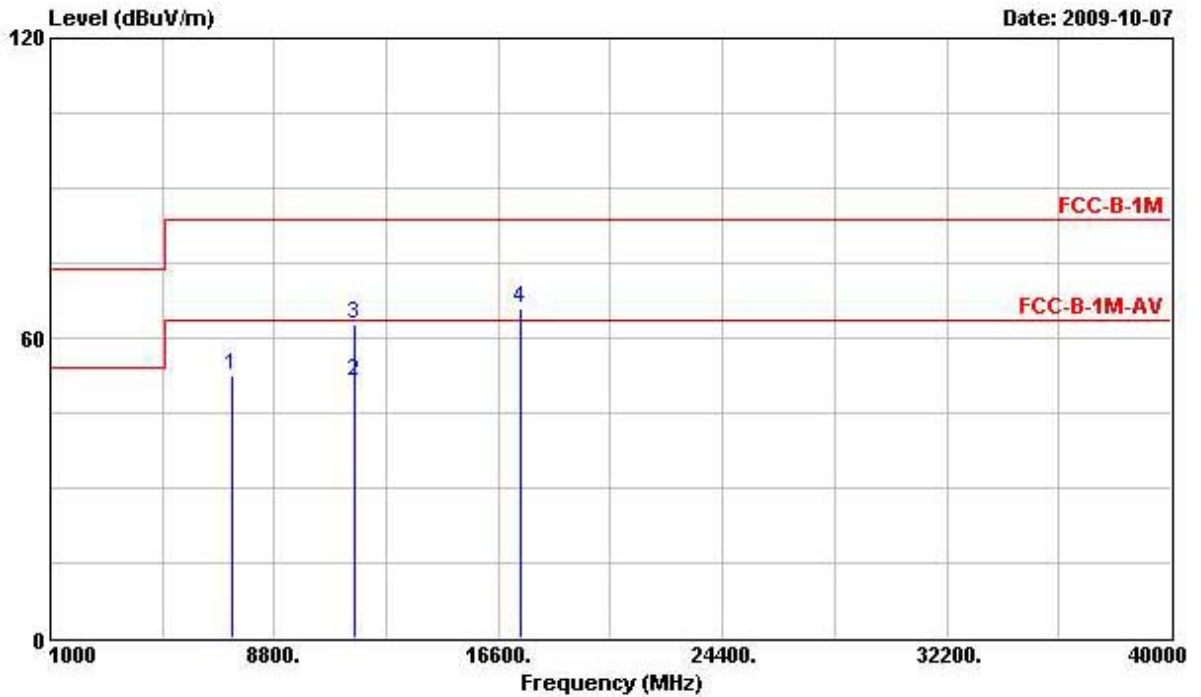

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7318.000	52.53	-31.01	83.54	43.31	37.87	5.64	34.29	Peak
2	11590.000	51.14	-12.40	63.54	37.51	40.63	6.63	33.63	Average
3	11590.000	62.84	-20.70	83.54	49.21	40.63	6.63	33.63	Peak
4	17385.000	65.74			45.97	43.47	8.48	32.18	Peak

Note: An item 4 is on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

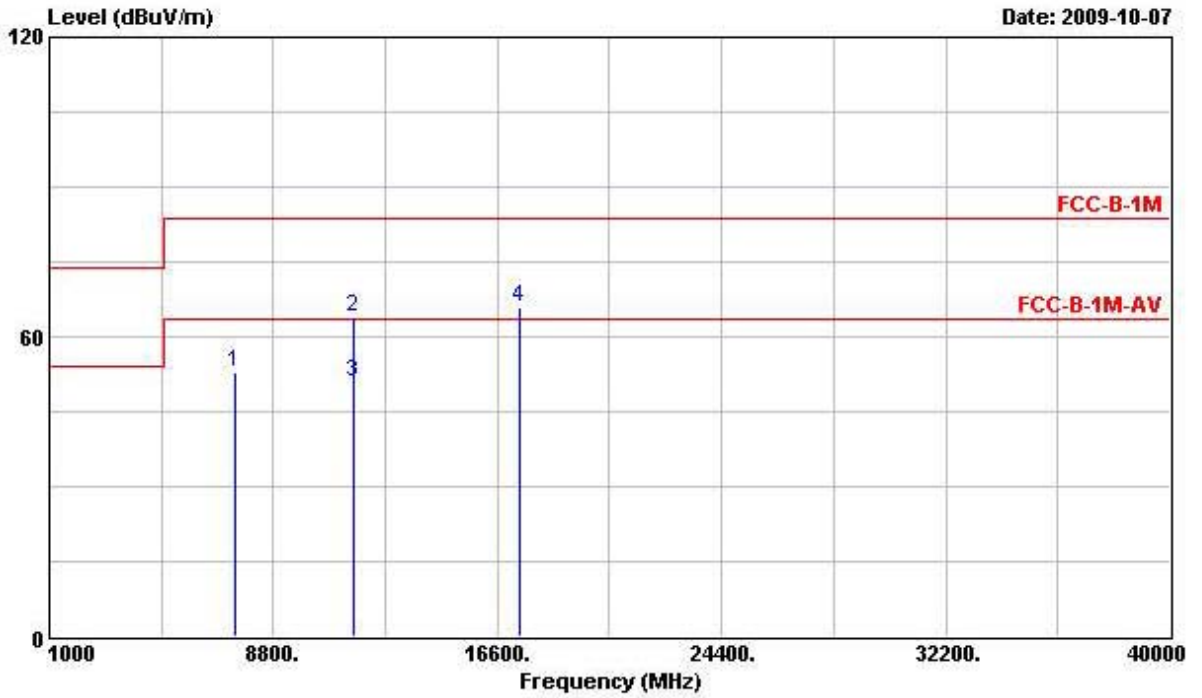


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7448.000	52.94	-30.60	83.54	43.69	37.89	5.65	34.29	Peak
2	11590.000	63.85	-19.69	83.54	50.22	40.63	6.63	33.63	Peak
3	11590.000	51.04	-12.50	63.54	37.41	40.63	6.63	33.63	Average
4	17385.000	66.06			46.29	43.47	8.48	32.18	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 1 (20MHz)


Horizontal

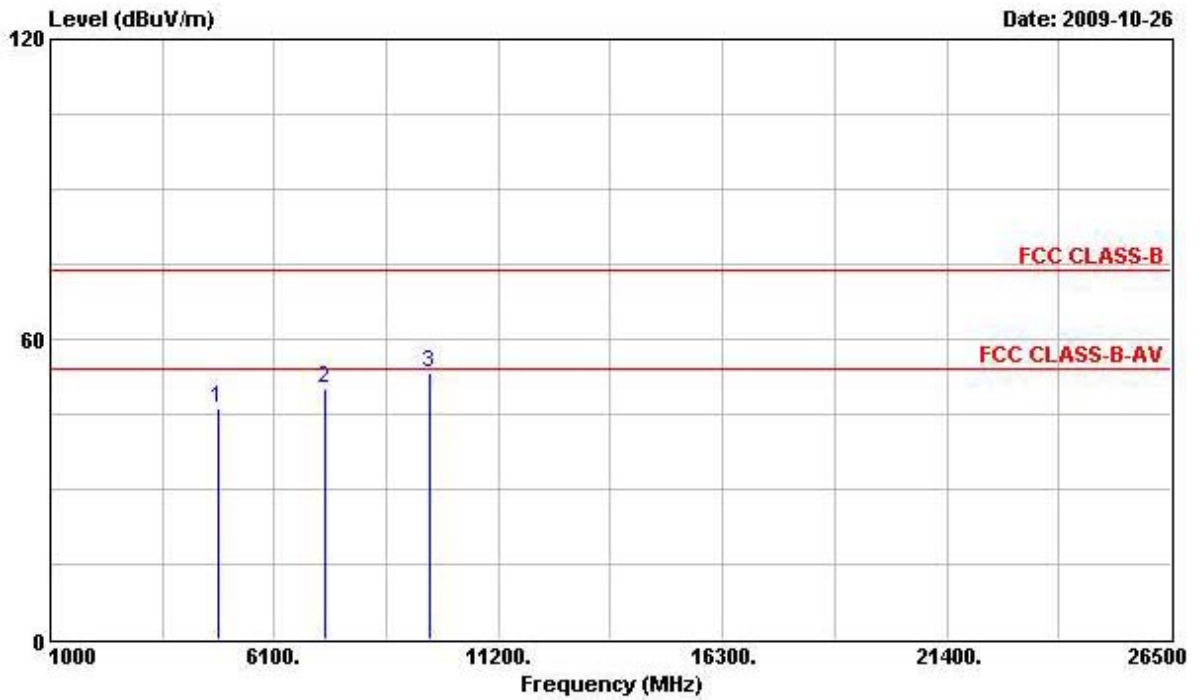

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4824.000	46.28	-7.72	54.00	43.15	33.06	4.58	34.51	PK
2	7236.000	49.97			42.85	35.78	5.63	34.29	Peak
3	9648.000	53.31			43.19	38.41	6.34	34.63	Peak

Note: An item 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

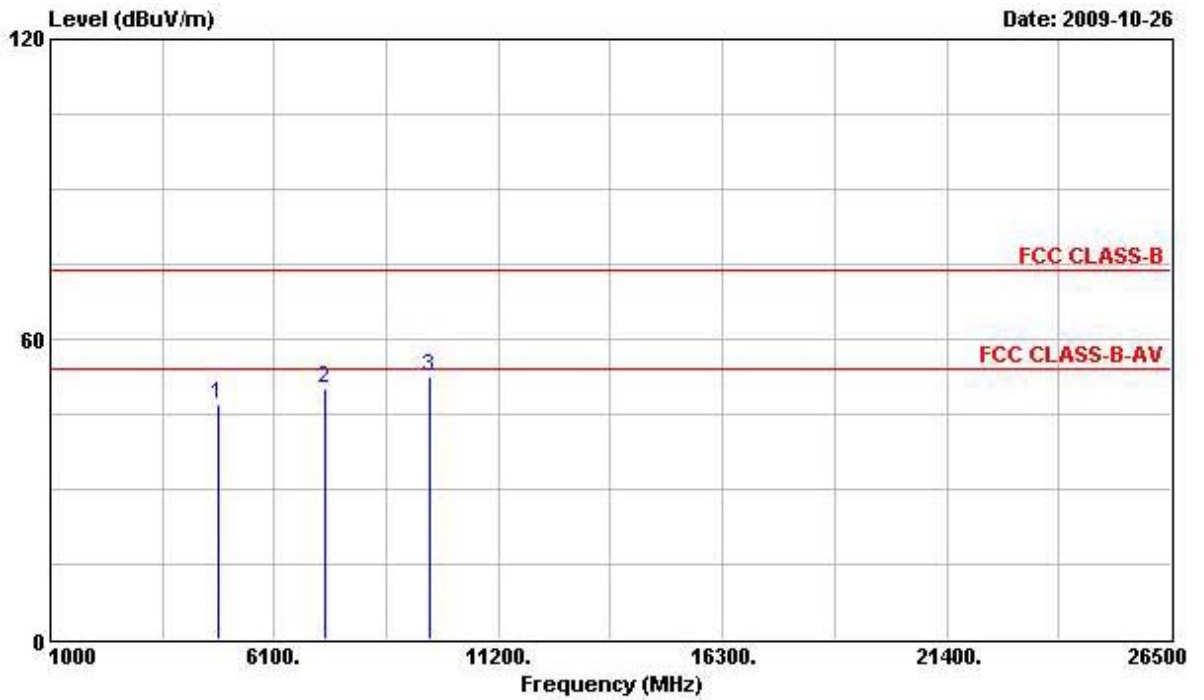


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	46.78	-7.22	54.00	43.65	33.06	4.58	34.51	PK
2	7236.000	50.25			43.13	35.78	5.63	34.29	Peak
3	9648.000	52.63			42.51	38.41	6.34	34.63	Peak

Note: An item 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 6 (20MHz)


Horizontal

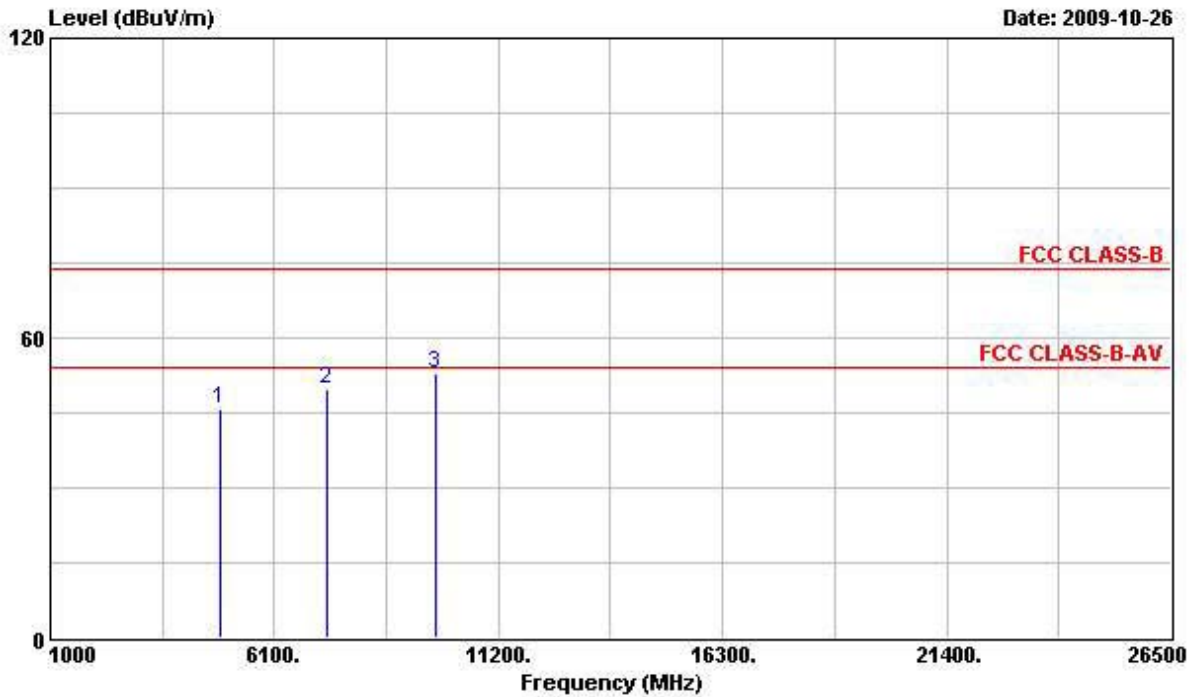

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	45.93	-8.07	54.00	42.61	33.16	4.61	34.45	PK
2	7311.000	49.73	-4.27	54.00	42.44	35.94	5.64	34.29	PK
3	9748.000	53.08			42.68	38.62	6.36	34.58	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

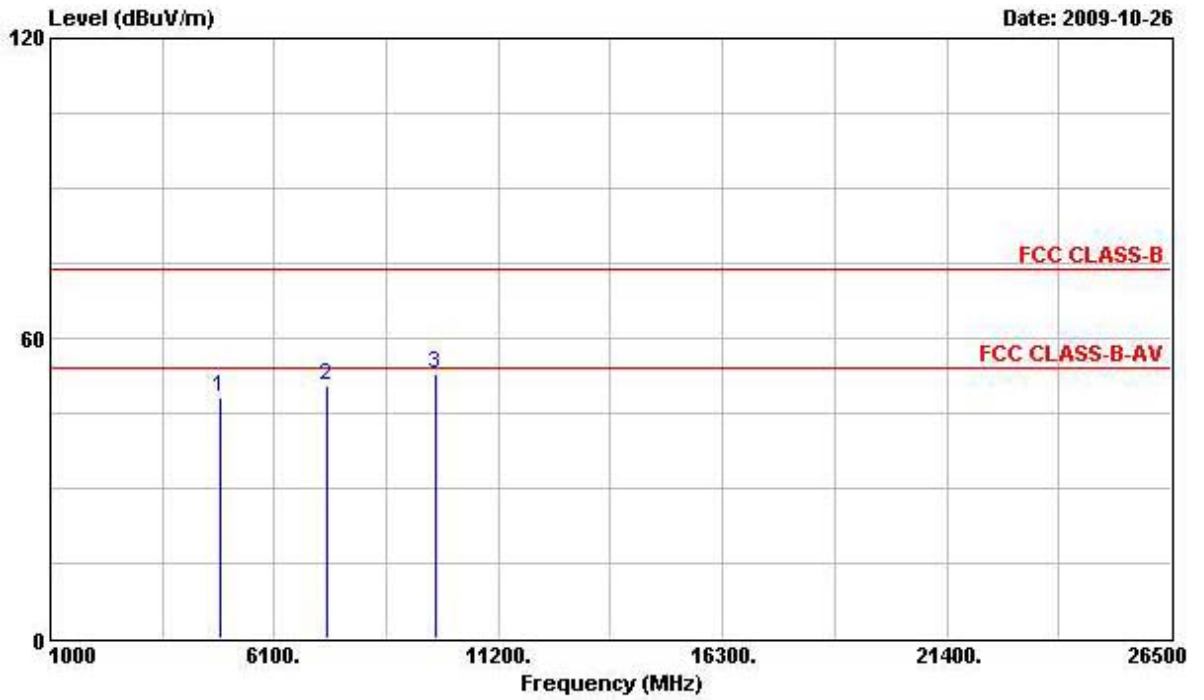


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	48.25	-5.75	54.00	44.93	33.16	4.61	34.45	PK
2	7311.000	50.67	-3.33	54.00	43.38	35.94	5.64	34.29	PK
3	9748.000	52.88			42.48	38.62	6.36	34.58	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Duncan	Configuration	2.4G 802.11n CH 11 (20MHz)


Horizontal

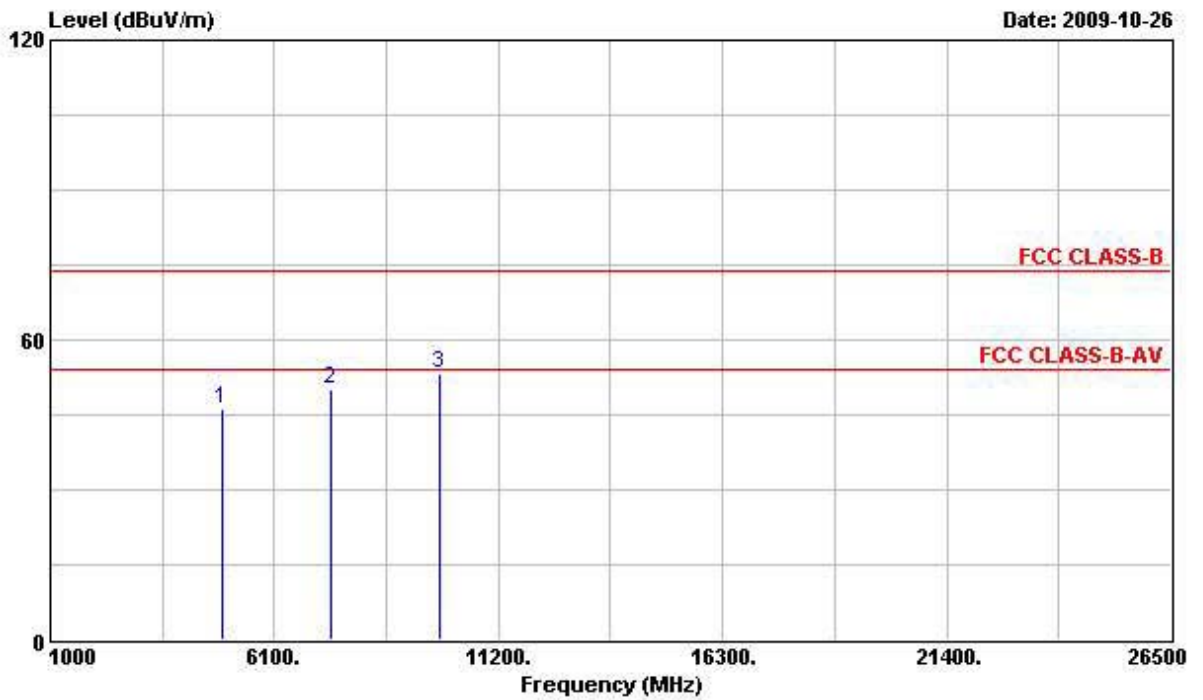

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4924.000	45.99	-8.01	54.00	42.43	33.26	4.68	34.38	PK
2	7386.000	50.19	-3.81	54.00	42.68	36.15	5.65	34.29	PK
3	9848.000	53.25			42.62	38.79	6.38	34.54	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

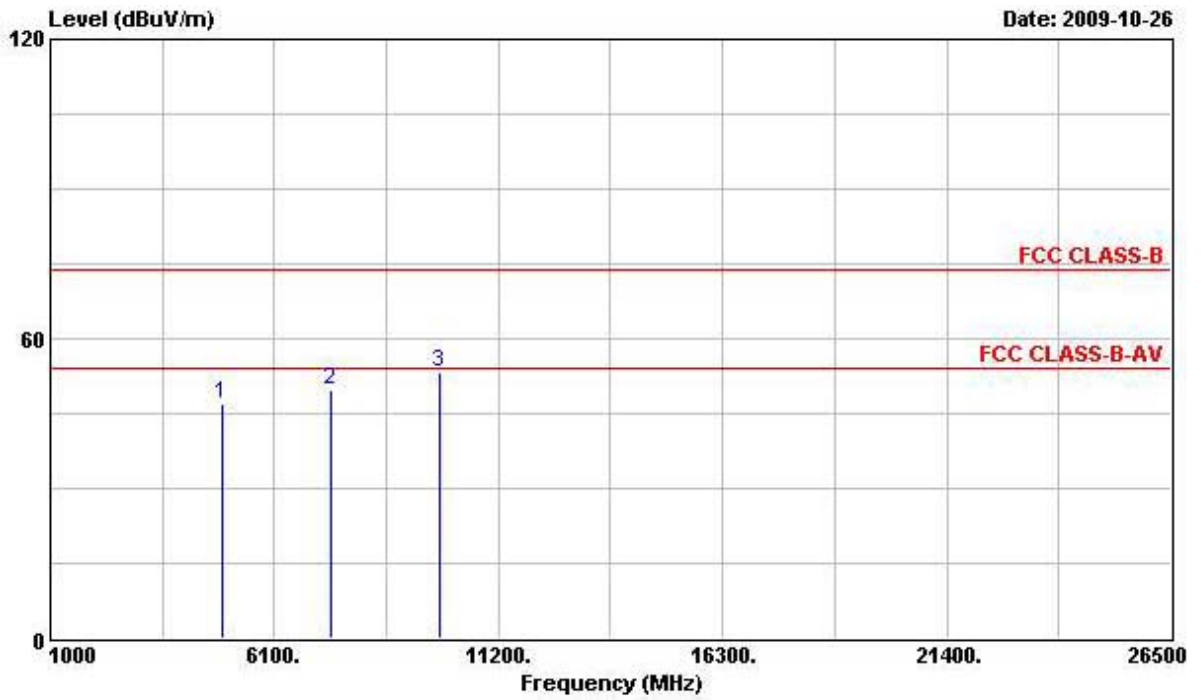


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	46.92	-7.08	54.00	43.36	33.26	4.68	34.38 PK
2	7386.000	49.93	-4.07	54.00	42.42	36.15	5.65	34.29 PK
3	9848.000	53.20			42.57	38.79	6.38	34.54 Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 3 (40MHz)


Horizontal

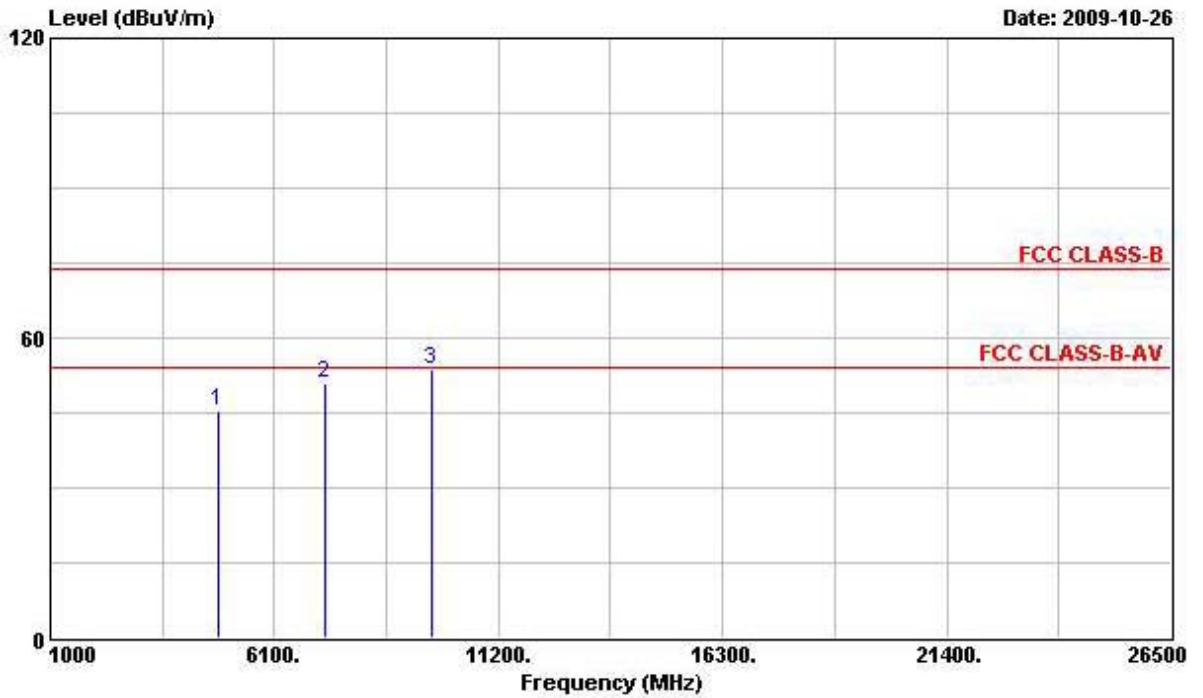

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4844.000	45.42	-8.58	54.00	42.20	33.09	4.61	34.48 PK
2	7266.000	50.90	-3.10	54.00	43.70	35.86	5.63	34.29 PK
3	9688.000	53.54			43.31	38.48	6.35	34.60 Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

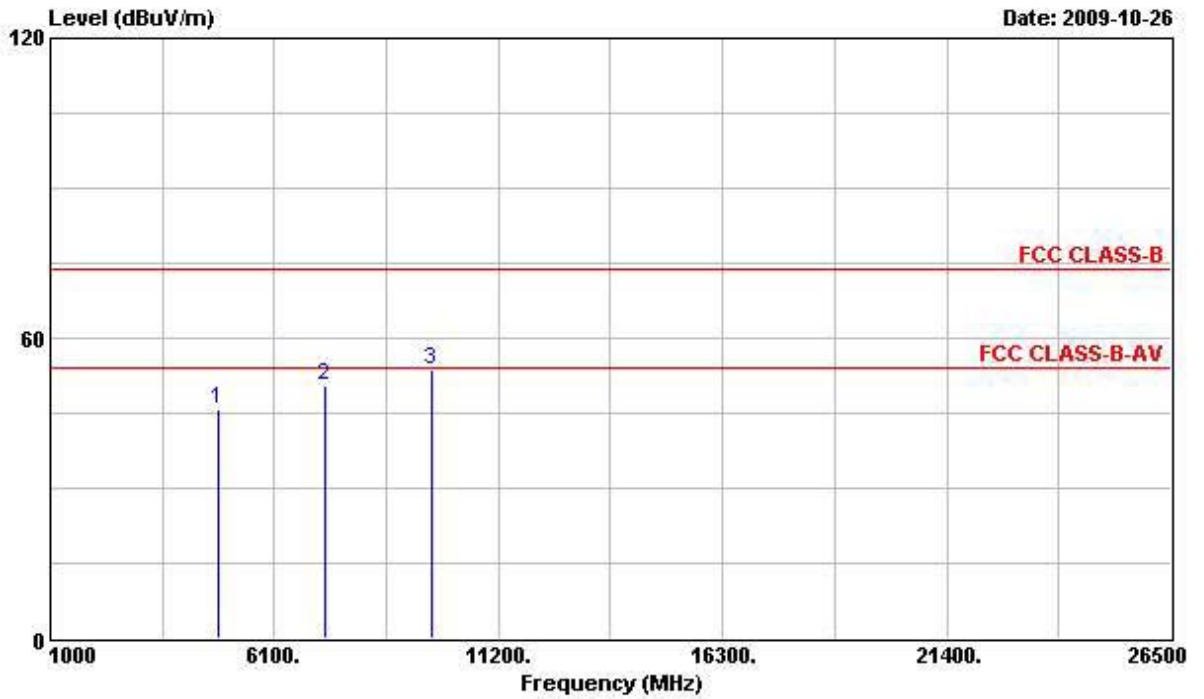


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 4844.000	45.67	-8.33	54.00	42.45	33.09	4.61	34.48	PK
2 7266.000	50.43	-3.57	54.00	43.23	35.86	5.63	34.29	PK
3 9688.000	53.67			43.44	38.48	6.35	34.60	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 6 (40MHz)


Horizontal

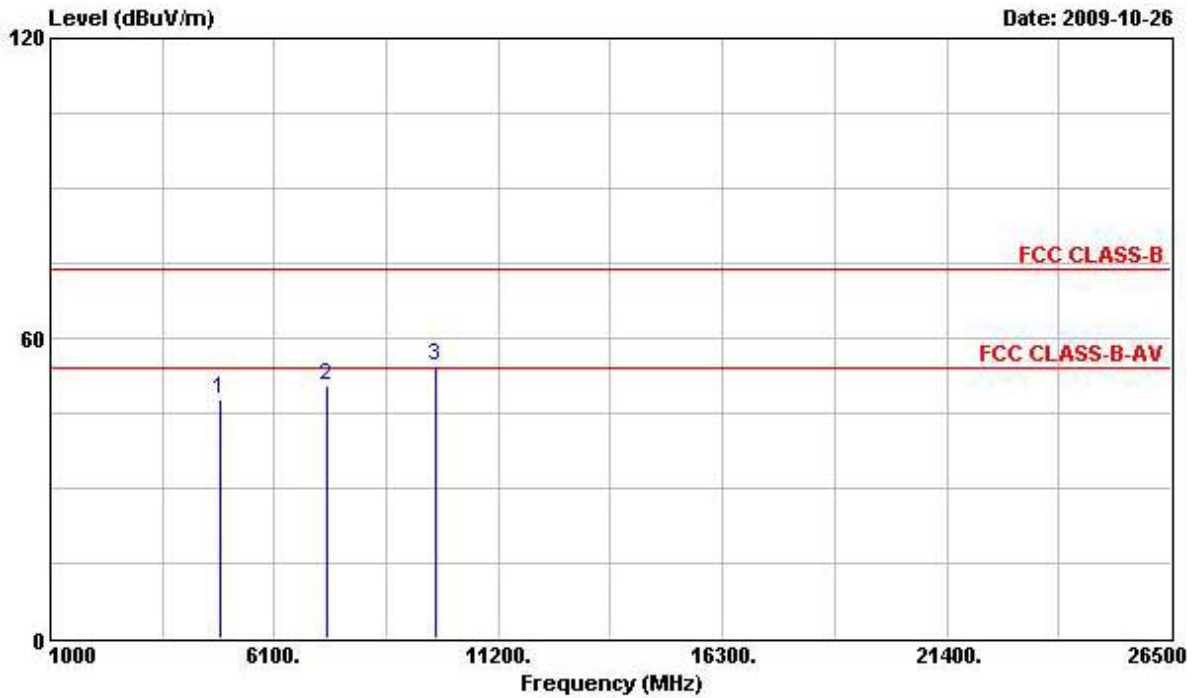

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.83	-6.17	54.00	44.51	33.16	4.61	34.45	PK
2	7311.000	50.36	-3.64	54.00	43.07	35.94	5.64	34.29	PK
3	9748.000	54.51			44.11	38.62	6.36	34.58	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

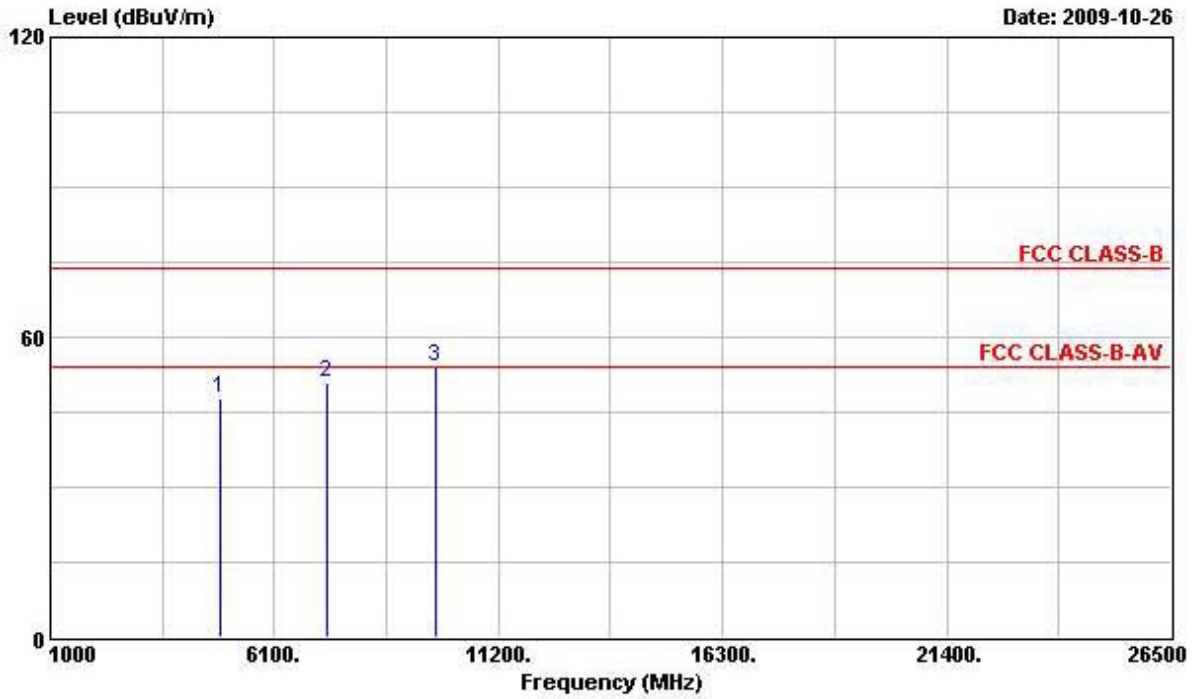


Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.62	-6.38	54.00	44.30	33.16	4.61	34.45 PK
2	7311.000	50.74	-3.26	54.00	43.45	35.94	5.64	34.29 PK
3	9748.000	53.93			43.53	38.62	6.36	34.58 Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 9 (40MHz)


Horizontal

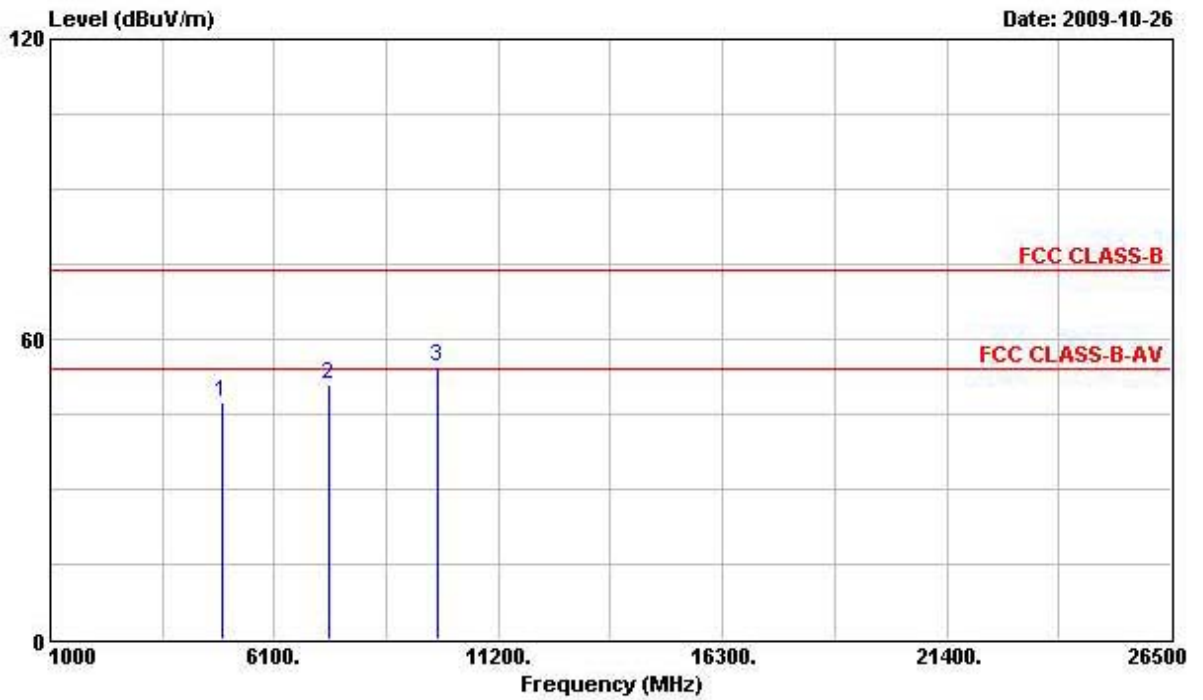

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4904.000	47.32	-6.68	54.00	43.87	33.23	4.64	34.42 PK
2	7356.000	50.88	-3.12	54.00	43.46	36.07	5.64	34.29 PK
3	9808.000	54.49			43.96	38.72	6.37	34.56 Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

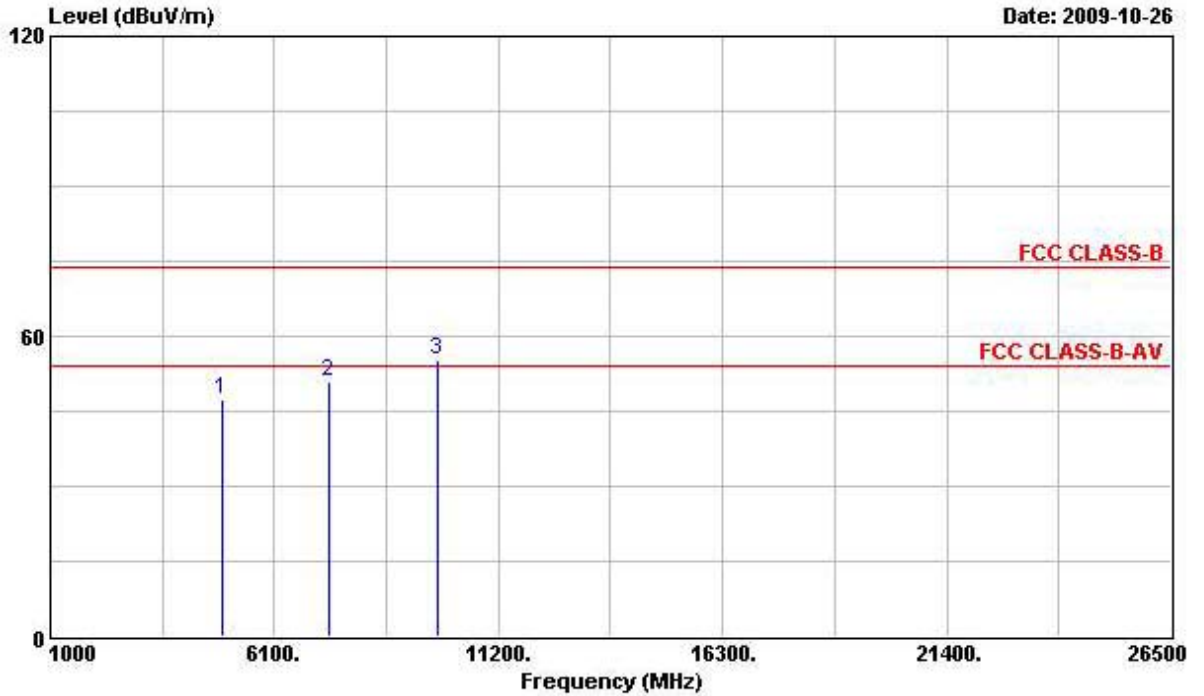

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4904.000	47.29	-6.71	54.00	43.84	33.23	4.64	34.42	PK
2	7356.000	50.96	-3.04	54.00	43.54	36.07	5.64	34.29	PK
3	9808.000	55.46			44.93	38.72	6.37	34.56	Peak

Note: An item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chain:

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 149 (20MHz)


Horizontal

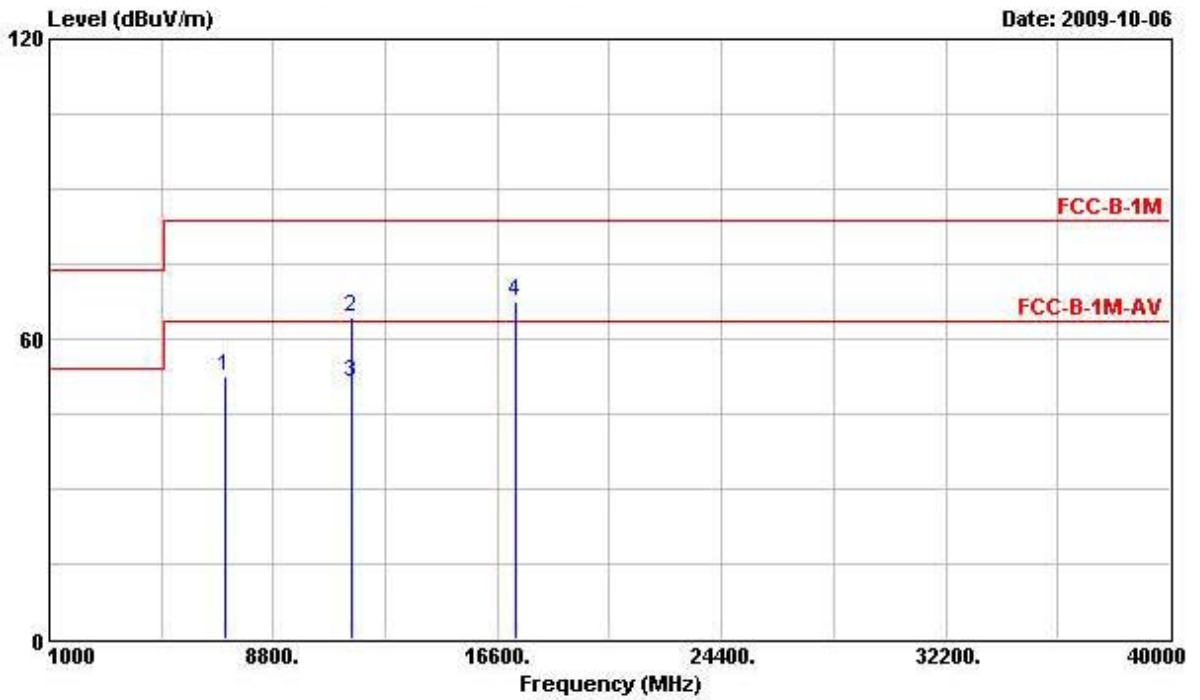

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7106.000	52.57			43.42	37.82	5.61	34.28	Peak
2	11490.000	64.42	-19.12	83.54	50.84	40.59	6.63	33.64	Peak
3	11490.000	51.42	-12.12	63.54	37.84	40.59	6.63	33.64	Average
4	17235.000	67.41			47.53	43.56	8.55	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

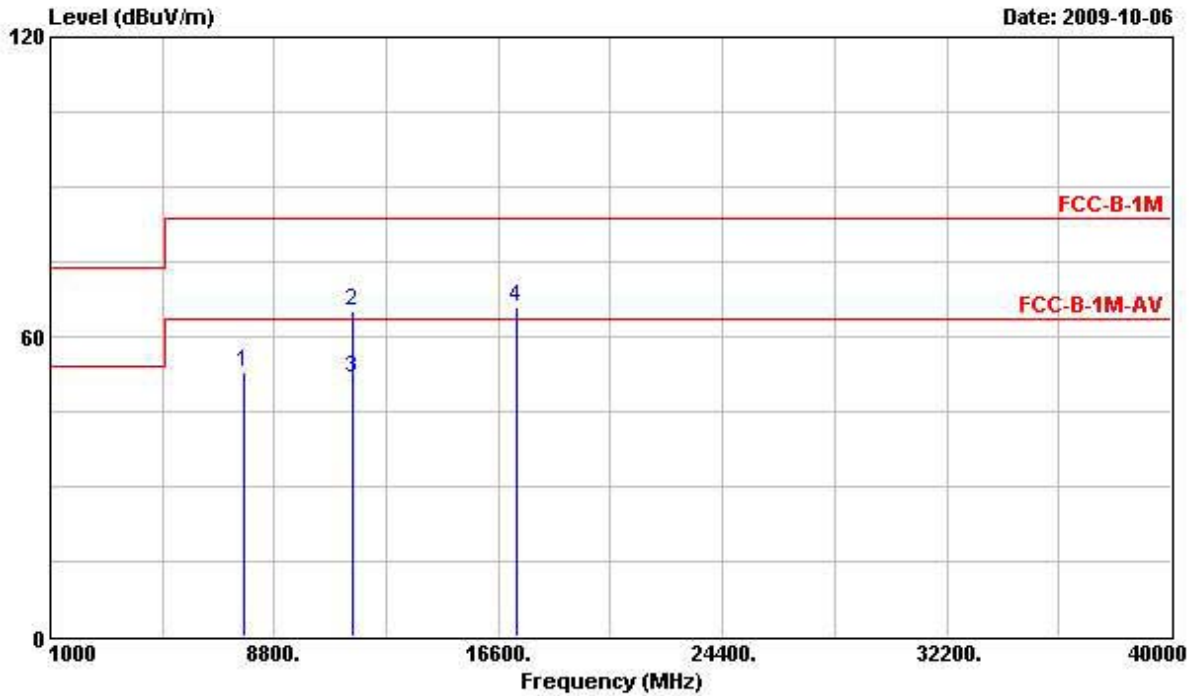


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7754.000	52.96			43.51	38.05	5.73	34.33	Peak
2	11490.000	65.11	-18.43	83.54	51.53	40.59	6.63	33.64	Peak
3	11490.000	51.86	-11.68	63.54	38.28	40.59	6.63	33.64	Average
4	17235.000	65.99			46.11	43.56	8.55	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 157 (20MHz)


Horizontal

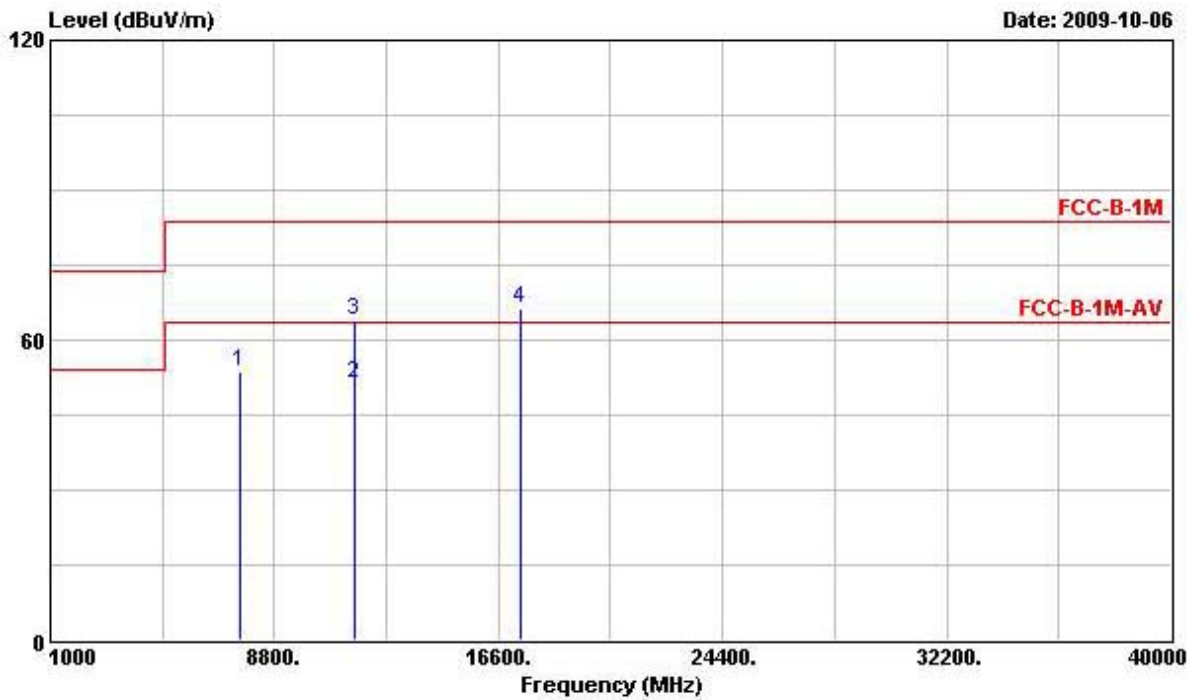

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	7594.000	53.60			44.27	37.96	5.68	34.31 Peak
2	11570.000	51.25	-12.29	63.54	37.62	40.63	6.63	33.63 Average
3	11570.000	64.12	-19.42	83.54	50.49	40.63	6.63	33.63 Peak
4	17355.000	66.38			46.59	43.49	8.50	32.20 Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

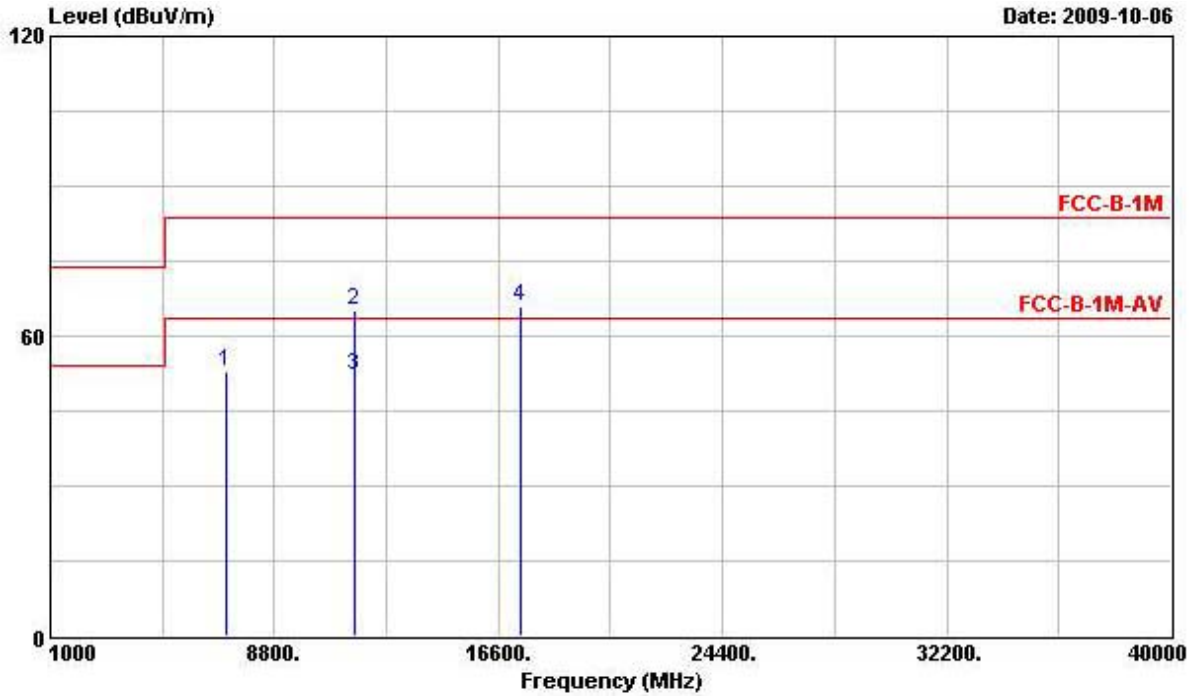


Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7150.000	52.94		43.77	37.83	5.62	34.28	Peak
2	11570.000	64.99	-18.55	83.54	51.36	40.63	6.63	Peak
3	11570.000	52.17	-11.37	63.54	38.54	40.63	6.63	Average
4	17355.000	65.99		46.20	43.49	8.50	32.20	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 165 (20MHz)


Horizontal

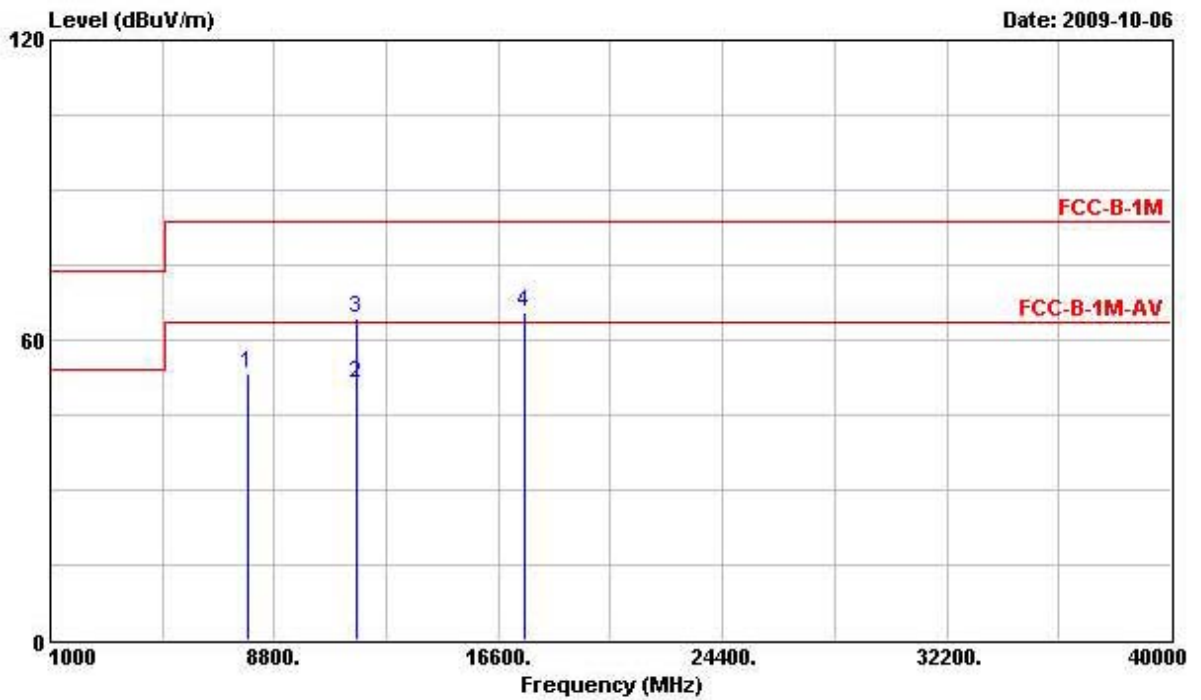

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7874.000	53.10			43.56	38.12	5.77	34.35	Peak
2	11650.000	51.37	-12.17	63.54	37.67	40.66	6.64	33.60	Average
3	11650.000	64.26	-19.28	83.54	50.56	40.66	6.64	33.60	Peak
4	17475.000	65.68			45.98	43.42	8.44	32.16	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

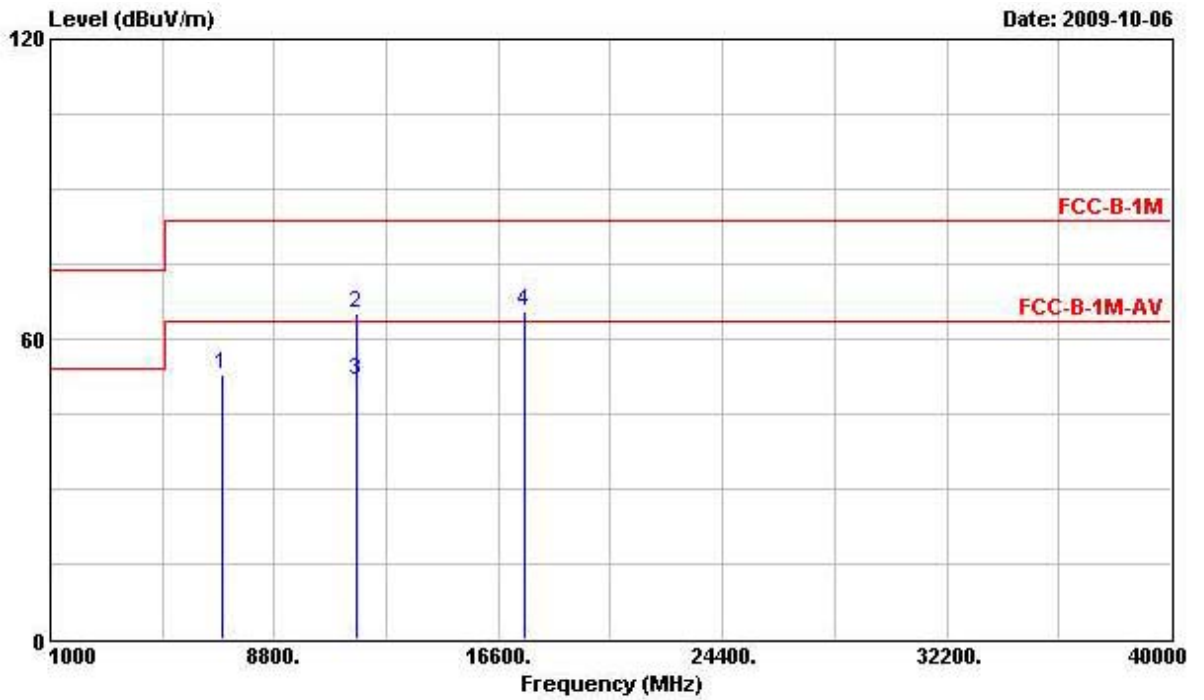


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7018.000	52.80			43.68	37.80	5.60	34.28	Peak
2	11650.000	64.97	-18.57	83.54	51.27	40.66	6.64	33.60	Peak
3	11650.000	51.90	-11.64	63.54	38.20	40.66	6.64	33.60	Average
4	17475.000	65.70			46.00	43.42	8.44	32.16	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n CH 151 (40MHz)


Horizontal

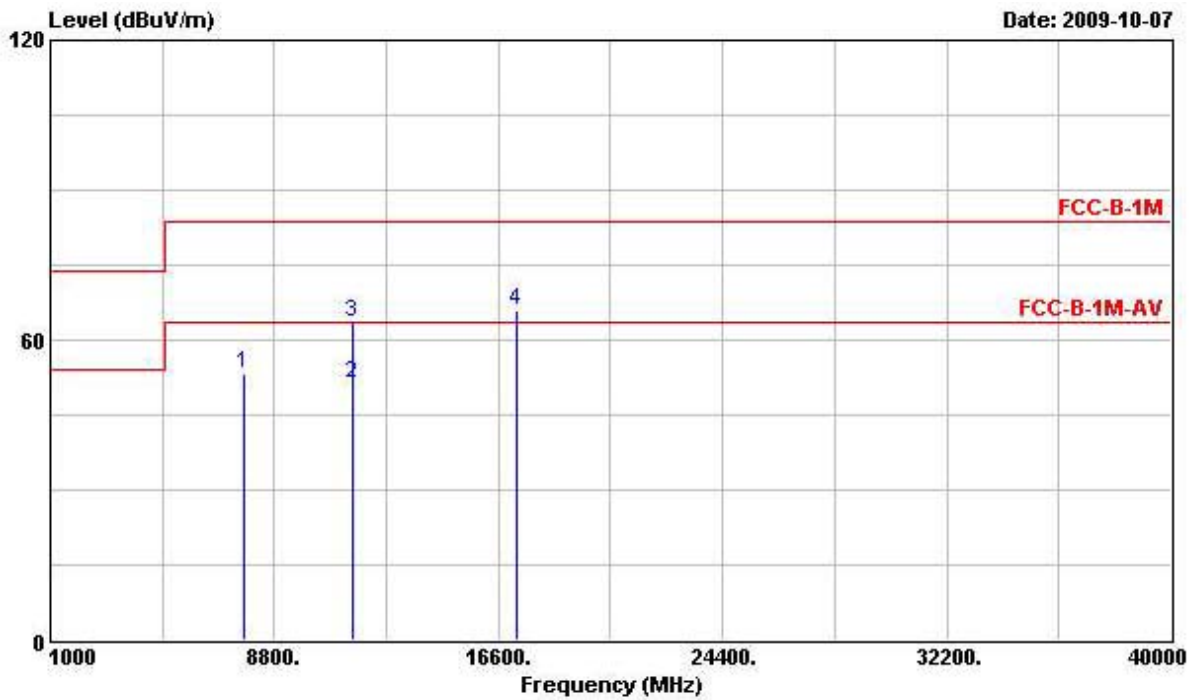

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7714.000	53.16	-30.38	83.54	43.73	38.03	5.72	34.32	Peak
2	11510.000	51.28	-12.26	63.54	37.71	40.60	6.63	33.66	Average
3	11510.000	63.62	-19.92	83.54	50.05	40.60	6.63	33.66	Peak
4	17265.000	65.90			46.05	43.54	8.54	32.23	Peak

Note: An item 4 is on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

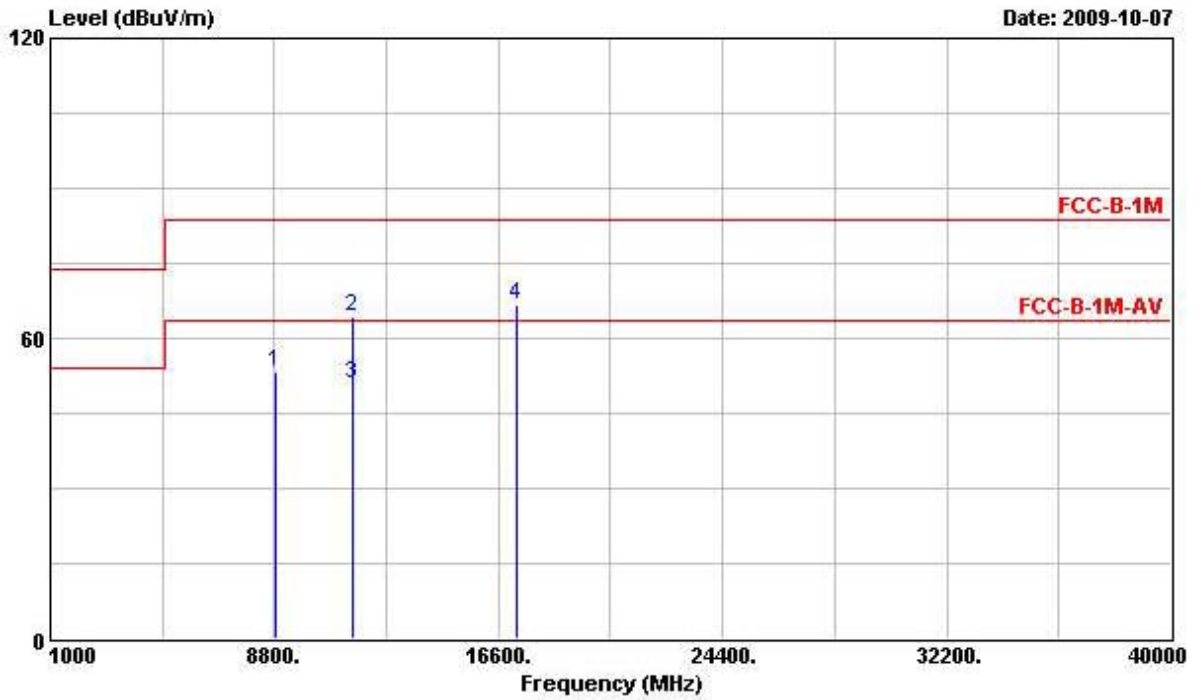


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8852.000	53.23			43.50	38.22	6.09	34.58	Peak
2	11510.000	64.26	-19.28	83.54	50.69	40.60	6.63	33.66	Peak
3	11510.000	50.98	-12.56	63.54	37.41	40.60	6.63	33.66	Average
4	17265.000	66.65			46.80	43.54	8.54	32.23	Peak

Note: An item 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 07, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Duncan	Configuration	5G 802.11n CH 159 (40MHz)


Horizontal

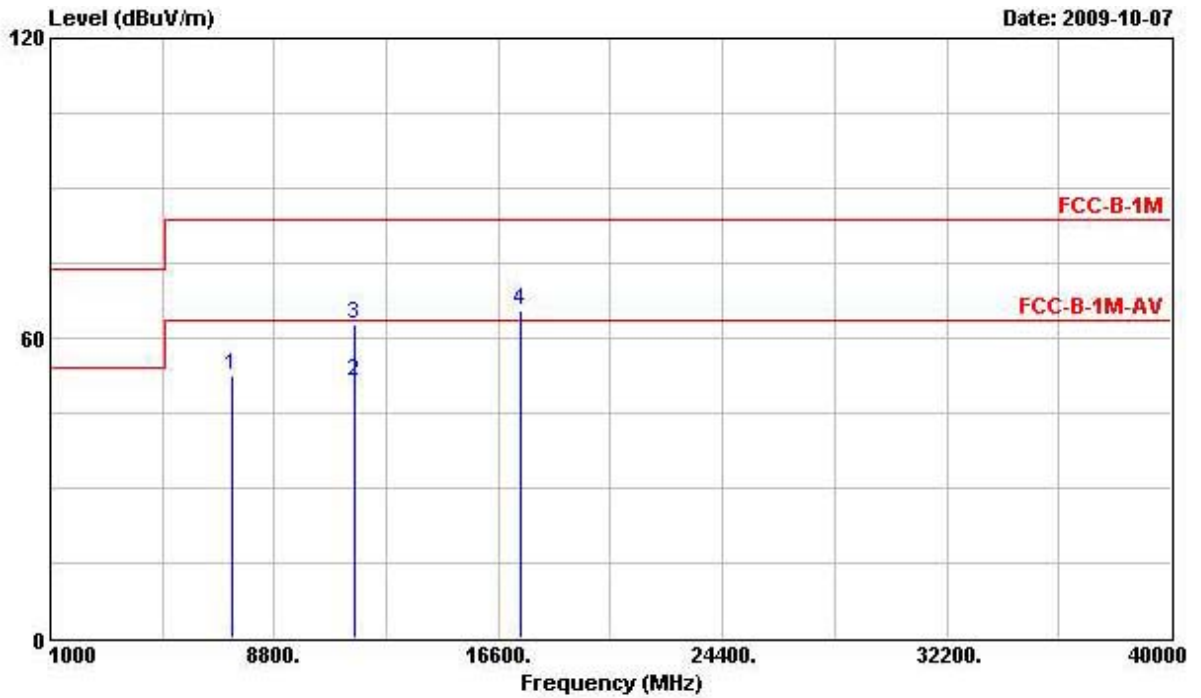

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	7318.000	52.46	-31.08	83.54	43.24	37.87	5.64	34.29	Peak
2	11590.000	51.19	-12.35	63.54	37.56	40.63	6.63	33.63	Average
3	11590.000	62.87	-20.67	83.54	49.24	40.63	6.63	33.63	Peak
4	17385.000	65.54			45.77	43.47	8.48	32.18	Peak

Note: An item 4 is on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Vertical

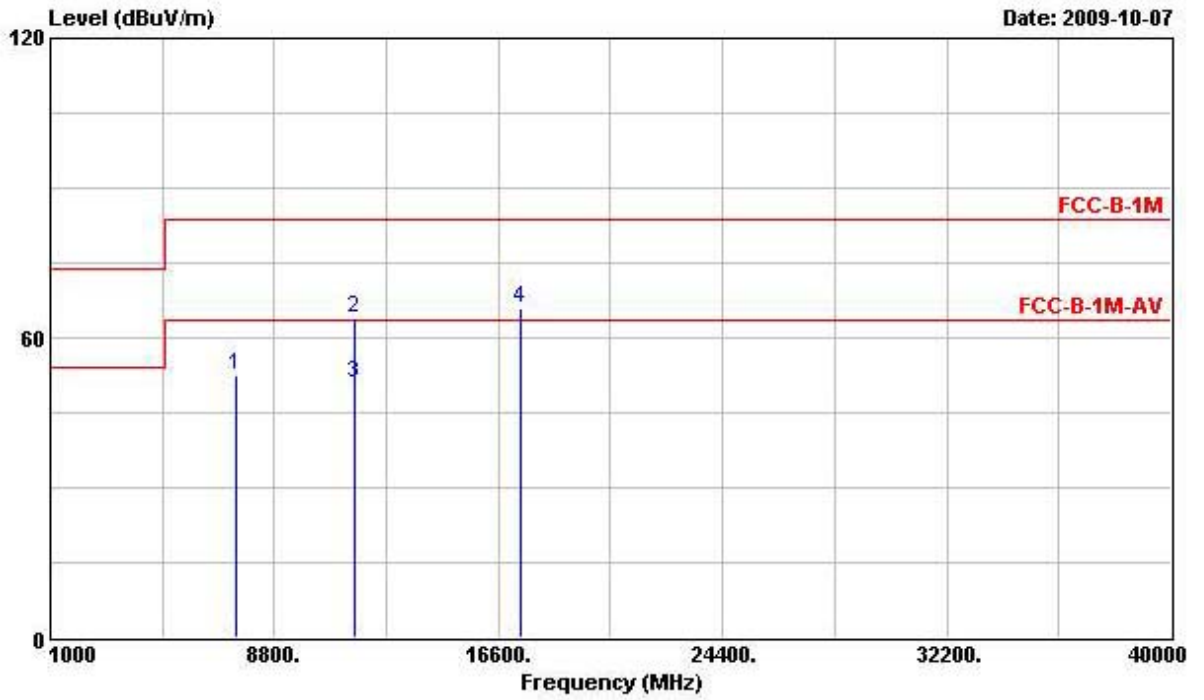

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 1 (20MHz)


Horizontal

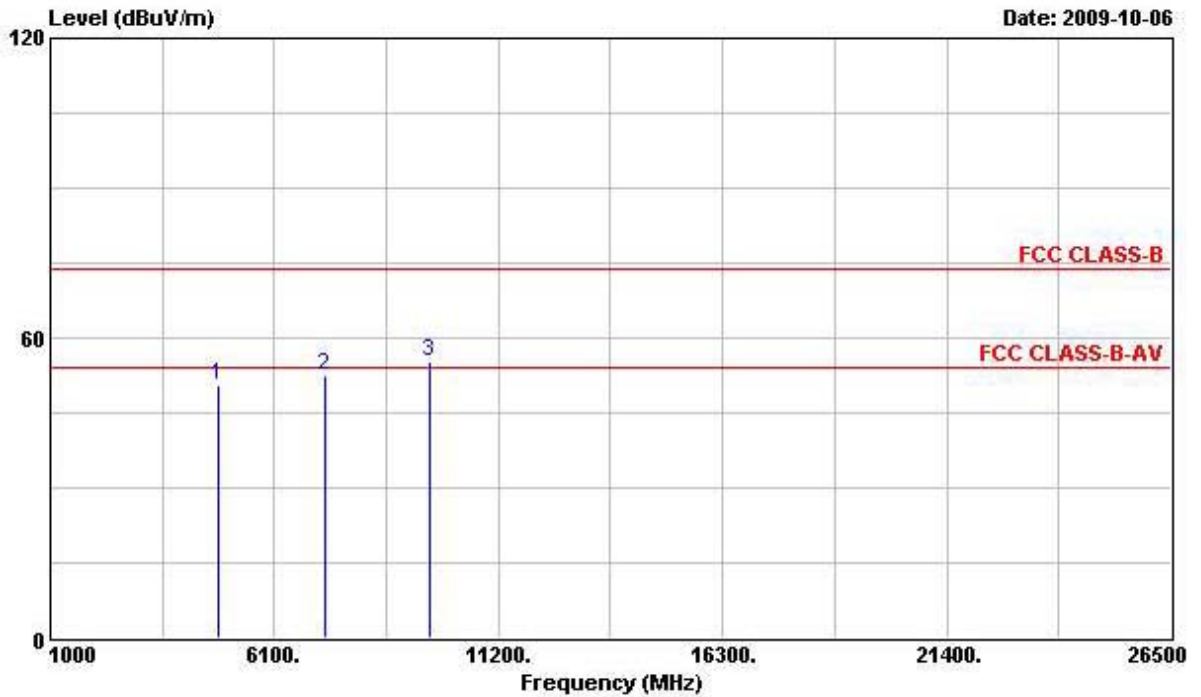

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 4824.000	50.36	-3.64	54.00	44.53	35.76	4.58	34.51	PK
2 7236.000	52.52			43.33	37.85	5.63	34.29	Peak
3 9648.000	55.27			44.17	39.39	6.34	34.63	Peak

Note: An item 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

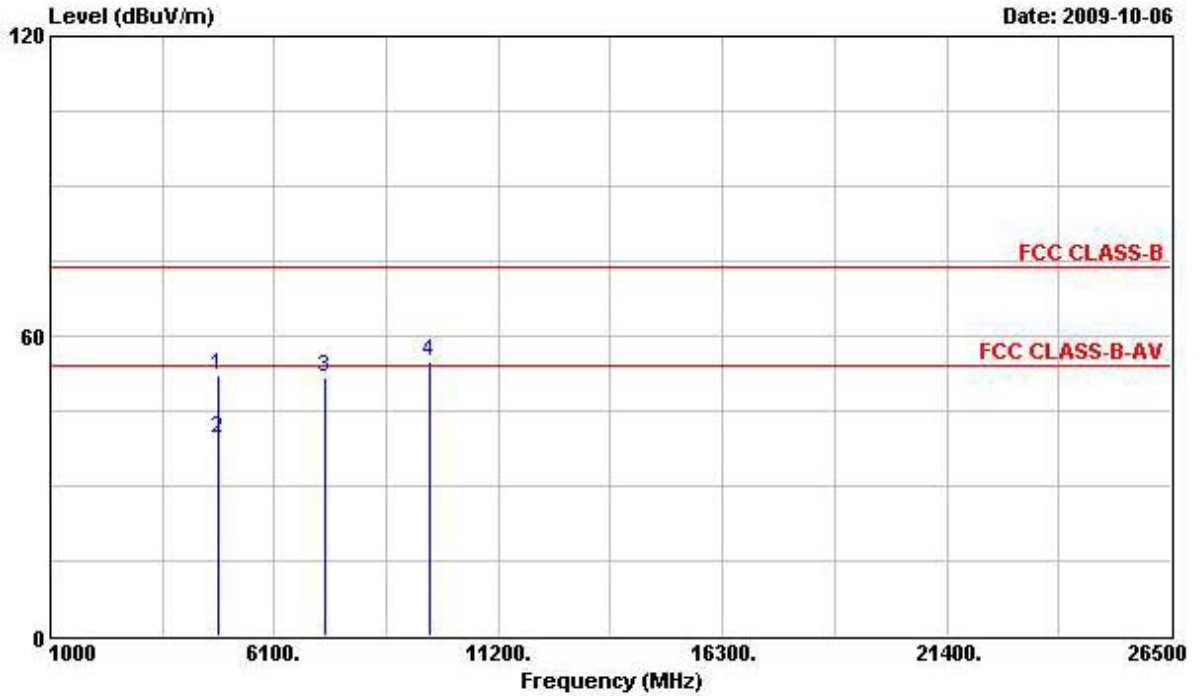


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	52.28	-21.72	74.00	47.08	35.13	4.58	34.51	Peak
2	4824.000	39.32	-14.68	54.00	34.12	35.13	4.58	34.51	Average
3	7236.000	51.66			43.42	36.90	5.63	34.29	Peak
4	9648.000	54.98			44.68	38.59	6.34	34.63	Peak

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 6 (20MHz)


Horizontal

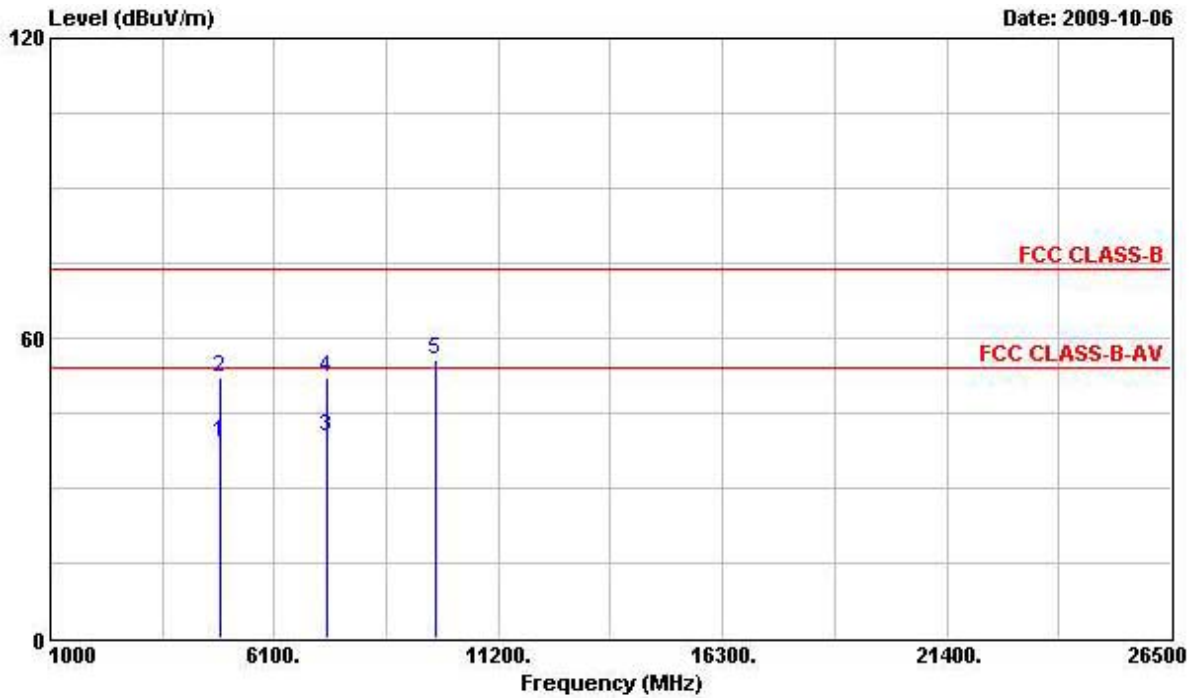

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	39.21	-14.79	54.00	33.22	35.83	4.61	34.45	Average
2	4874.000	52.12	-21.88	74.00	46.13	35.83	4.61	34.45	Peak
3	7311.000	40.46	-13.54	54.00	31.25	37.86	5.64	34.29	Average
4	7311.000	52.26	-21.74	74.00	43.05	37.86	5.64	34.29	Peak
5	9748.000	55.79			44.50	39.51	6.36	34.58	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

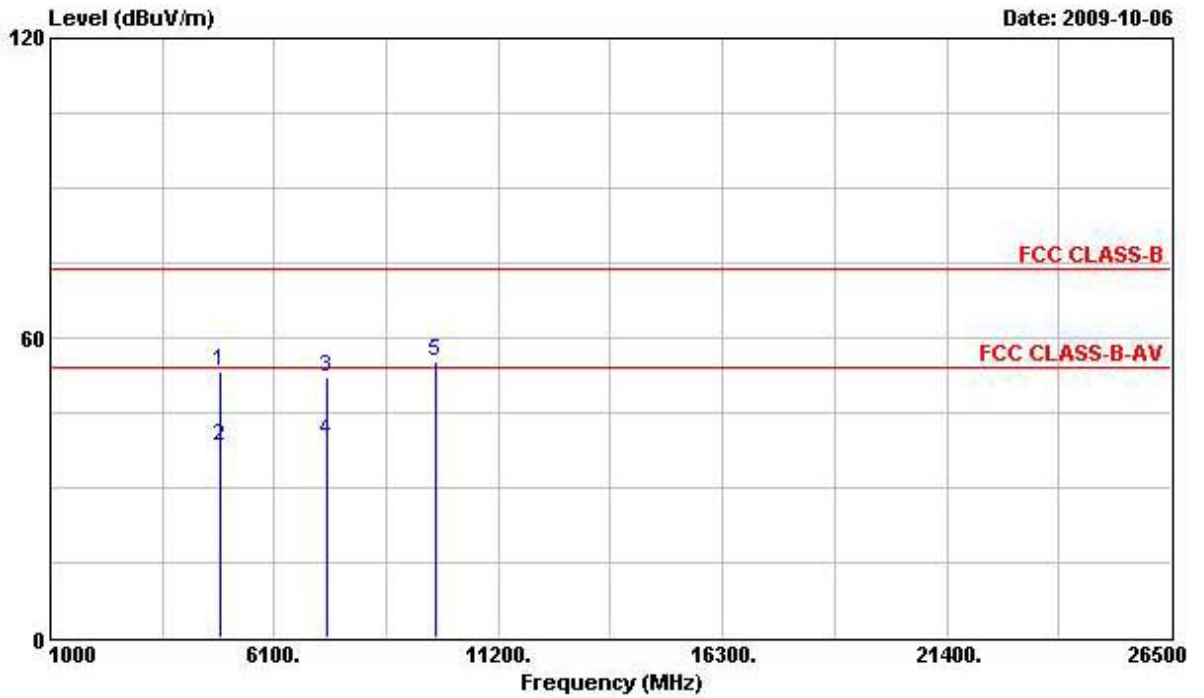


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	53.47	-20.53	74.00	48.13	35.18	4.61	34.45	Peak
2	4874.000	38.46	-15.54	54.00	33.12	35.18	4.61	34.45	Average
3	7311.000	52.22	-21.78	74.00	43.95	36.92	5.64	34.29	Peak
4	7311.000	39.51	-14.49	54.00	31.24	36.92	5.64	34.29	Average
5	9748.000	55.41			44.92	38.71	6.36	34.58	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 11 (20MHz)


Horizontal

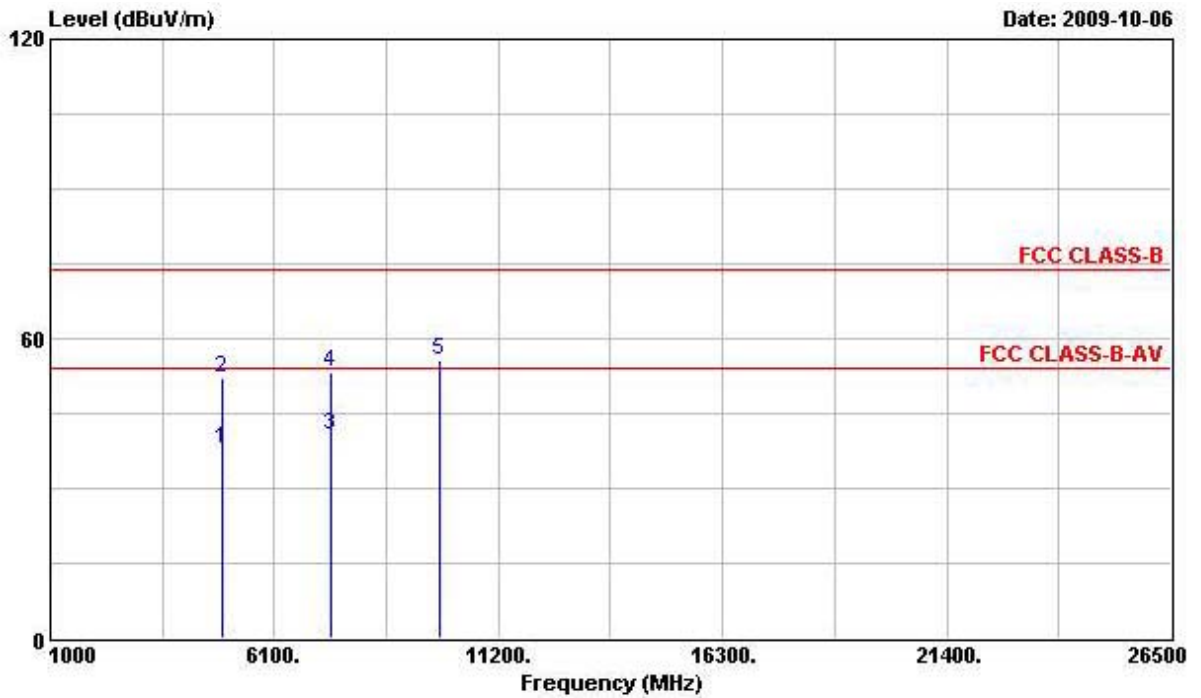

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	37.76	-16.24	54.00	31.56	35.90	4.68	34.38	Average
2	4924.000	52.25	-21.75	74.00	46.05	35.90	4.68	34.38	Peak
3	7386.000	40.51	-13.49	54.00	31.27	37.88	5.65	34.29	Average
4	7386.000	53.40	-20.60	74.00	44.16	37.88	5.65	34.29	Peak
5	9848.000	55.67			44.22	39.61	6.38	34.54	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

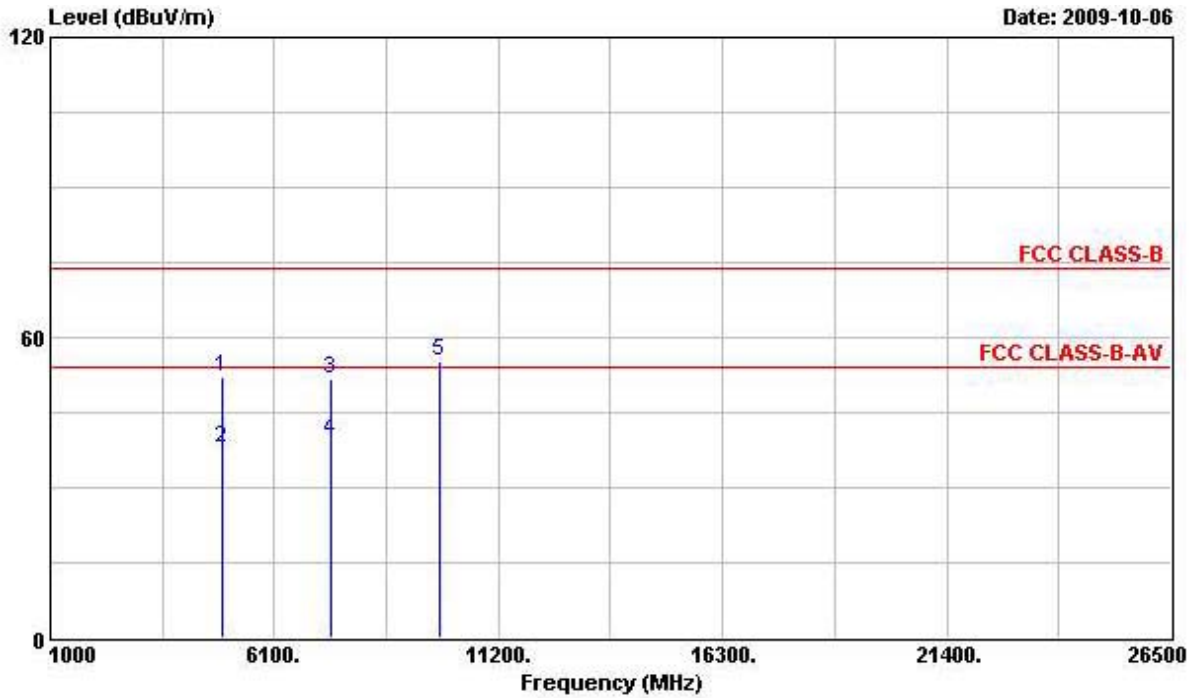


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	52.13	-21.87	74.00	46.60	35.23	4.68	34.38	Peak
2	4924.000	37.77	-16.23	54.00	32.24	35.23	4.68	34.38	Average
3	7386.000	51.79	-22.21	74.00	43.47	36.96	5.65	34.29	Peak
4	7386.000	39.55	-14.45	54.00	31.23	36.96	5.65	34.29	Average
5	9848.000	55.07			44.42	38.81	6.38	34.54	Peak

Note: An item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 3 (40MHz)


Horizontal

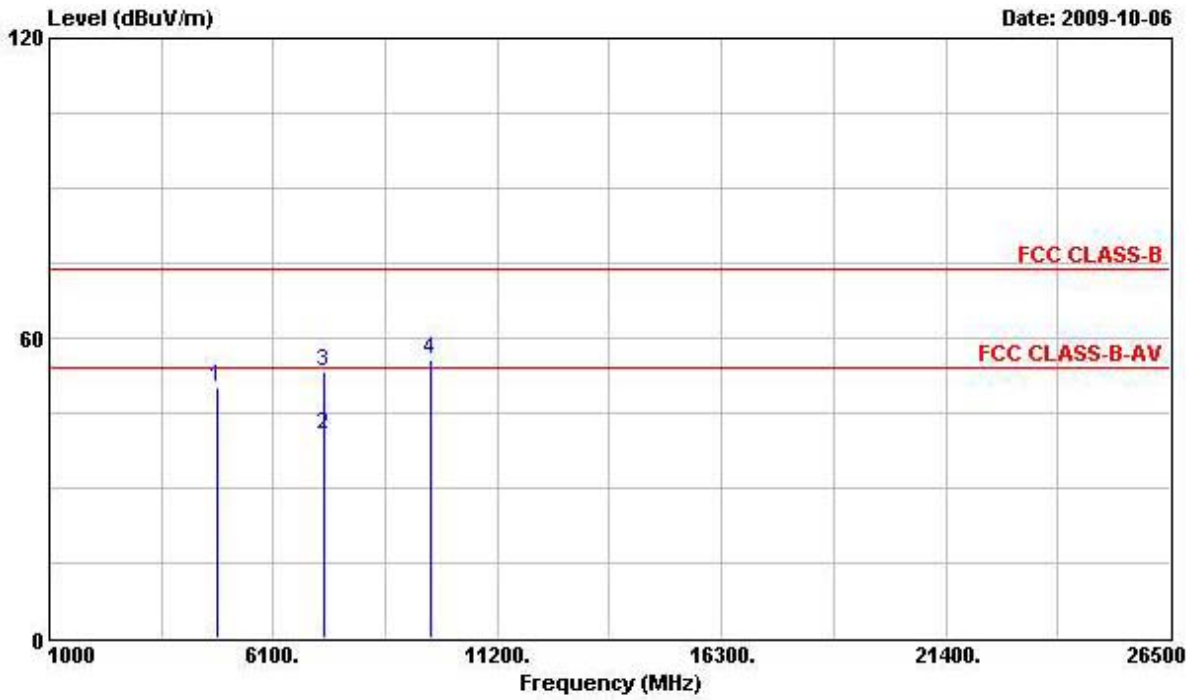

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4844.000	50.29	-3.71	54.00	44.38	35.78	4.61	34.48	PK
2	7266.000	40.49	-13.51	54.00	31.29	37.86	5.63	34.29	Average
3	7266.000	53.15	-20.85	74.00	43.95	37.86	5.63	34.29	Peak
4	9688.000	55.75			44.57	39.43	6.35	34.60	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

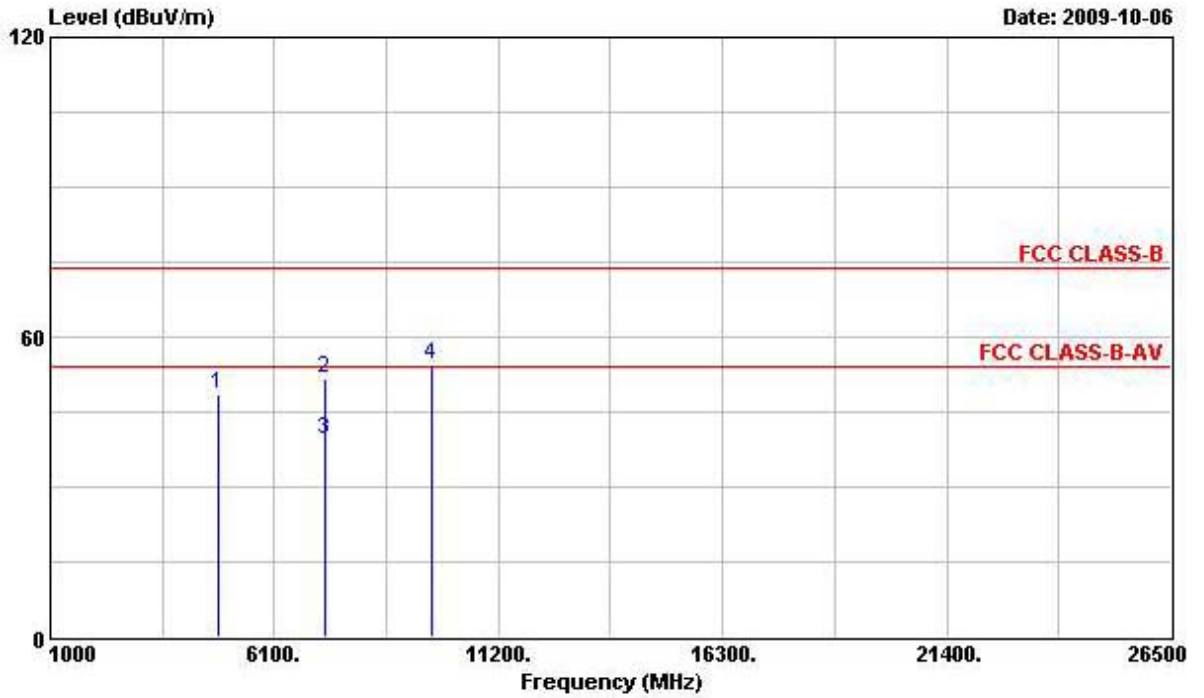


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4844.000	48.46	-5.54	54.00	43.19	35.14	4.61	34.48	PK
2	7266.000	51.89	-22.11	74.00	43.64	36.91	5.63	34.29	Peak
3	7266.000	39.36	-14.64	54.00	31.11	36.91	5.63	34.29	Average
4	9688.000	54.36			43.98	38.63	6.35	34.60	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 6 (40MHz)


Horizontal

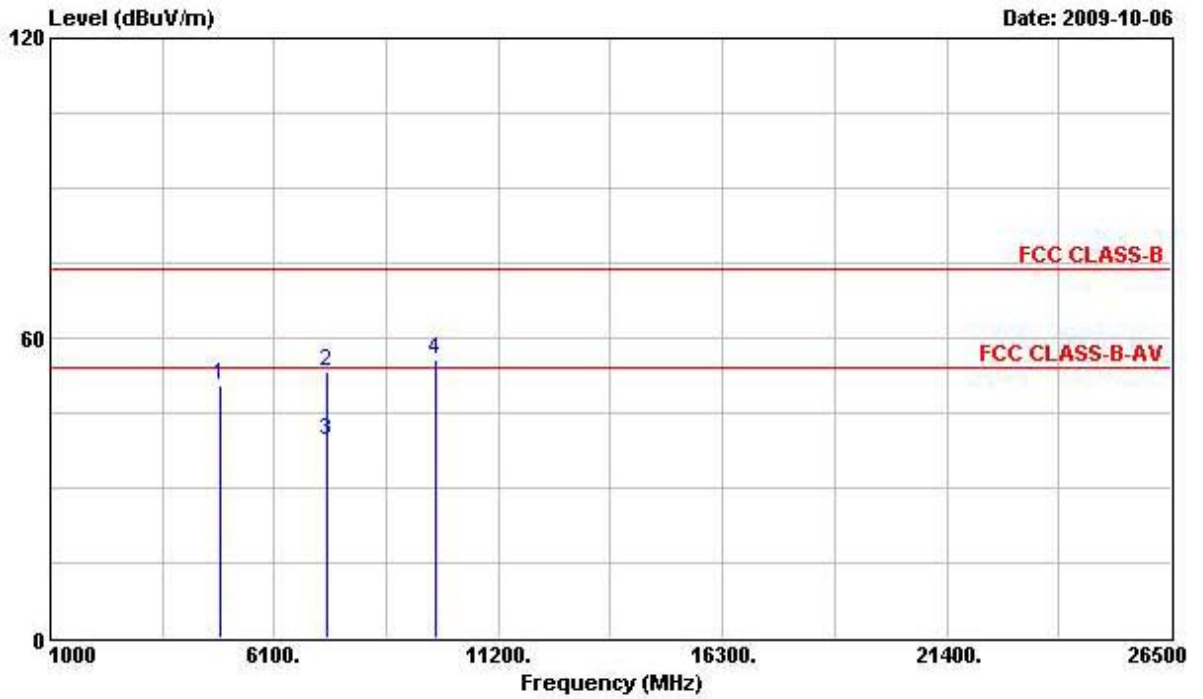

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4874.000	50.63	-3.37	54.00	44.64	35.83	4.61	34.45	PK
2	7311.000	53.47	-20.53	74.00	44.26	37.86	5.64	34.29	Peak
3	7311.000	39.52	-14.48	54.00	30.31	37.86	5.64	34.29	Average
4	9748.000	55.49			44.20	39.51	6.36	34.58	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

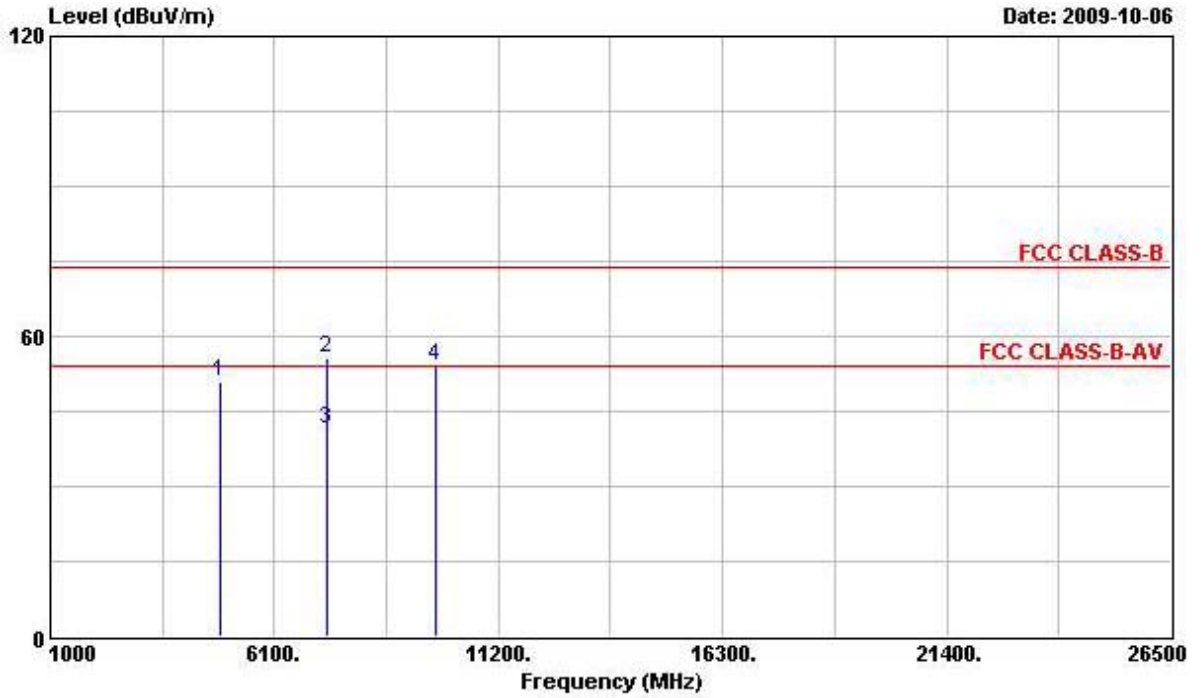


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	50.76	-3.24	54.00	45.42	35.18	4.61	34.45	PK
2	7311.000	55.50	-18.50	74.00	47.23	36.92	5.64	34.29	Peak
3	7311.000	41.54	-12.46	54.00	33.27	36.92	5.64	34.29	Average
4	9748.000	54.04			43.55	38.71	6.36	34.58	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Final Test Date	Oct. 06, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 9 (40MHz)


Horizontal

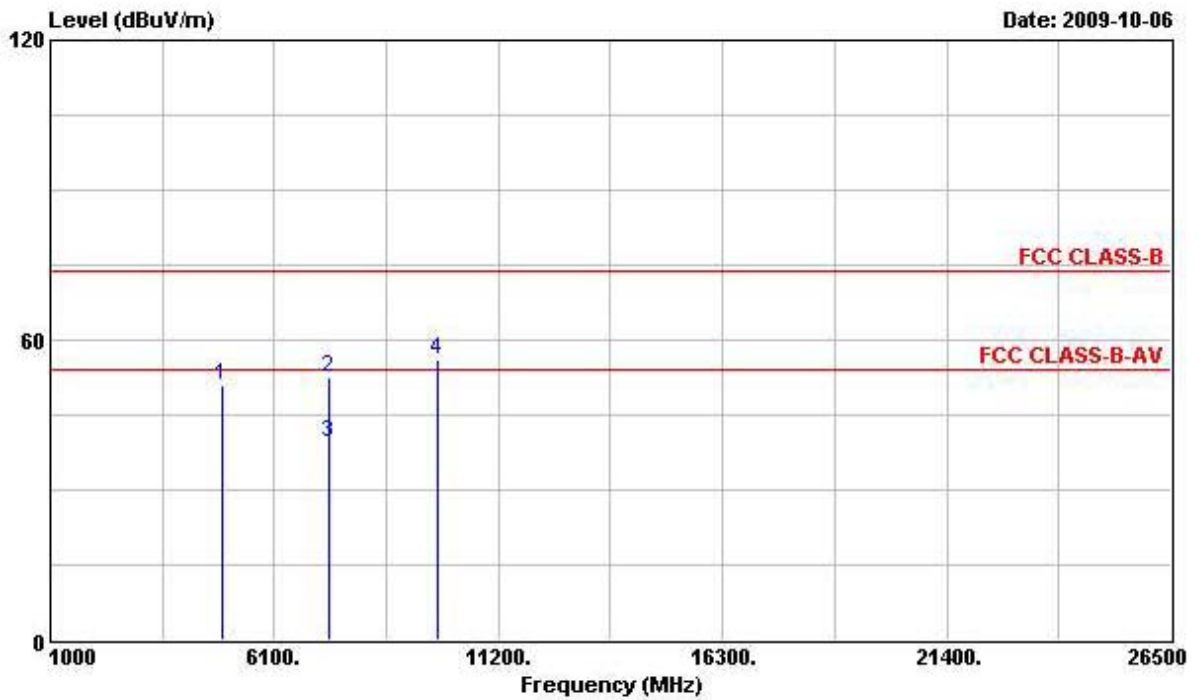

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4904.000	50.79	-3.21	54.00	44.69	35.88	4.64	34.42	PK
2	7356.000	52.42	-21.58	74.00	43.20	37.87	5.64	34.29	Peak
3	7356.000	39.50	-14.50	54.00	30.28	37.87	5.64	34.29	Average
4	9808.000	56.20			44.82	39.57	6.37	34.56	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

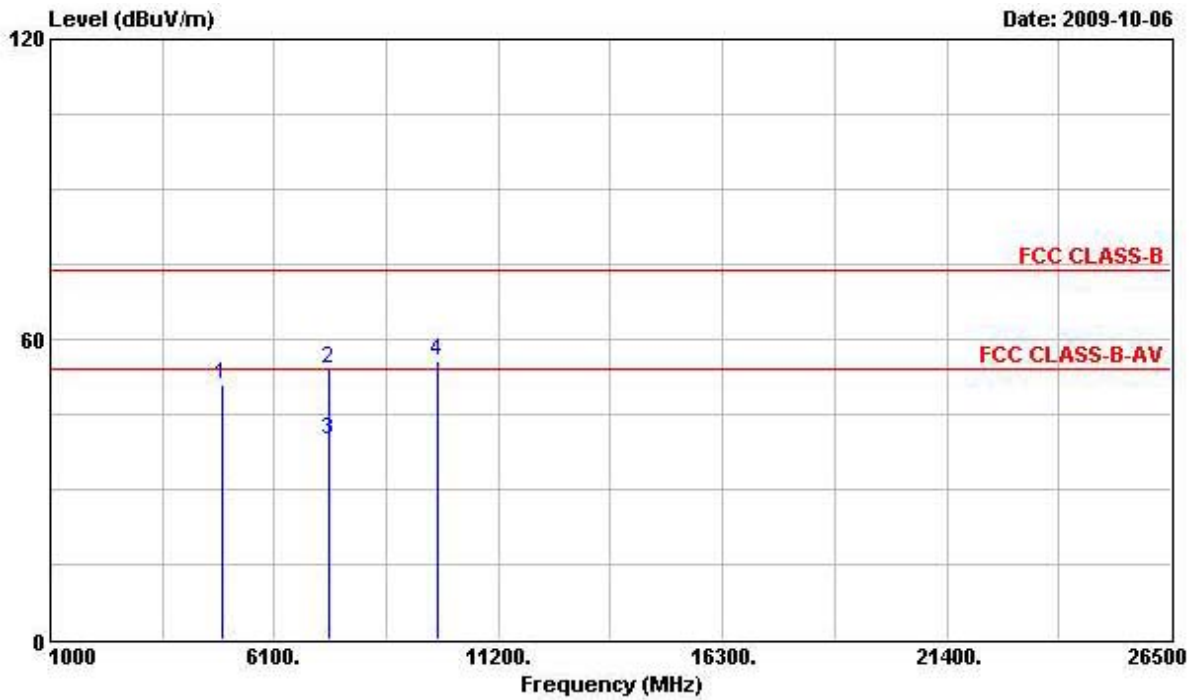

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4904.000	50.92	-3.08	54.00	45.49	35.21	4.64	34.42	PK
2	7356.000	53.95	-20.05	74.00	45.66	36.94	5.64	34.29	Peak
3	7356.000	39.82	-14.18	54.00	31.53	36.94	5.64	34.29	Average
4	9808.000	55.54			44.96	38.77	6.37	34.56	Peak

Note: An item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n Ant. 1 + Ant. 2 CH 149, 157, 165 (20MHz)

Channel 149

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5725.000	73.41	-10.13	83.54	33.63	34.74	5.04	0.00	Peak
2 @	5739.600	115.85			76.03	34.75	5.07	0.00	Peak
1 @	5725.000	59.91	-3.63	63.54	20.13	34.74	5.04	0.00	Average
2 @	5738.160	105.33			65.54	34.75	5.04	0.00	Average

An item 2 is Fundamental Emissions.

Channel 157

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5725.000	70.09	-13.45	83.54	30.31	34.74	5.04	0.00	Peak
2 @	5786.800	117.55			77.70	34.76	5.09	0.00	Peak
3	5850.000	70.12	-13.42	83.54	30.24	34.77	5.11	0.00	Peak
1 @	5787.000	106.99			67.14	34.76	5.09	0.00	Average
2 @	5850.000	57.99	-5.55	63.54	18.11	34.77	5.11	0.00	Average

An item 2 is Fundamental Emissions.

Channel 165

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5822.840	116.27			76.39	34.77	5.11	0.00	Peak
2	5850.000	70.85	-12.69	83.54	30.97	34.77	5.11	0.00	Peak
1 @	5823.320	105.50			65.62	34.77	5.11	0.00	Average
2 @	5850.000	58.19	-5.35	63.54	18.31	34.77	5.11	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n Ant. 1 + Ant. 2 CH 151, 159 (40MHz)

Channel 151

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5745.280	113.04			73.22	34.75	5.07	0.00	Peak
1 @ 5745.760	102.95			63.13	34.75	5.07	0.00	Average

An item 1 is Fundamental Emissions.

Channel 159

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5797.760	114.06			74.21	34.76	5.09	0.00	Peak
1 @ 5796.800	104.16			64.31	34.76	5.09	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 26, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 1, 6, 11 (20MHz)

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2390.000	65.45	-8.55	74.00	34.14	28.29	3.02	0.00	Peak
2 @	2409.940	107.72			76.37	28.33	3.02	0.00	Peak
1 @	2359.780	51.67	-2.33	54.00	20.46	28.22	2.99	0.00	Average
2 @	2413.740	99.25			67.90	28.33	3.02	0.00	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2438.250	111.60			80.15	28.40	3.05	0.00	Peak
1 @	2439.010	100.16			68.71	28.40	3.05	0.00	Average

An item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2467.700	108.58			77.07	28.43	3.08	0.00	Peak
2	2483.500	59.45	-14.55	74.00	27.90	28.47	3.08	0.00	Peak
1 @	2467.130	98.31			66.80	28.43	3.08	0.00	Average
2	2483.500	46.47	-7.53	54.00	14.92	28.47	3.08	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n CH 3, 6, 9 (40MHz)

Channel 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2390.000	67.90	-6.10	74.00	36.59	28.29	3.02	0.00	Peak
2 @	2418.490	109.04			77.69	28.33	3.02	0.00	Peak
1 @	2390.000	51.64	-2.36	54.00	20.33	28.29	3.02	0.00	Average
2 @	2417.730	97.06			65.71	28.33	3.02	0.00	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2430.460	108.65			77.24	28.36	3.05	0.00	Peak
1 @	2433.500	97.42			66.01	28.36	3.05	0.00	Average

An item 1 is Fundamental Emissions.

Channel 9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2438.060	107.53			76.08	28.40	3.05	0.00	Peak
2	2483.660	64.68	-9.32	74.00	33.13	28.47	3.08	0.00	Peak
1 @	2436.730	95.82			64.37	28.40	3.05	0.00	Average
2	2483.500	48.56	-5.44	54.00	17.01	28.47	3.08	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chain:

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n Ant. 1 + Ant. 2 CH 149, 157, 165 (20MHz)

Channel 149

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5725.000	70.31	-13.23	83.54	28.30	36.97	5.04	0.00	Peak
2 @	5747.160	110.20			68.14	36.99	5.07	0.00	Peak
1 @	5725.000	58.78	-4.76	63.54	16.77	36.97	5.04	0.00	Average
2 @	5743.800	98.85			56.79	36.99	5.07	0.00	Average

An item 2 is Fundamental Emissions.

Channel 157

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	5725.000	69.54	-14.00	83.54	27.53	36.97	5.04	0.00	Peak
2 @	5786.800	110.41			68.27	37.05	5.09	0.00	Peak
3	5850.000	69.31	-14.23	83.54	27.09	37.11	5.11	0.00	Peak
1 @	5725.000	58.22	-5.32	63.54	16.21	36.97	5.04	0.00	Average
2 @	5787.600	98.86			56.72	37.05	5.09	0.00	Average
3 @	5850.000	58.42	-5.12	63.54	16.20	37.11	5.11	0.00	Average

An item 2 is Fundamental Emissions.

Channel 165

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	5826.800	109.76			67.56	37.09	5.11	0.00	Peak
2	5850.000	70.26	-13.28	83.54	28.04	37.11	5.11	0.00	Peak
1 @	5827.160	98.60			56.40	37.09	5.11	0.00	Average
2 @	5850.000	58.40	-5.14	63.54	16.18	37.11	5.11	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	5G 802.11n Ant. 1 + Ant. 2 CH 151, 159 (40MHz)

Channel 151

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5750.080	112.74			72.92	34.75	5.07	0.00	Peak
1 @ 5757.280	102.06			62.24	34.75	5.07	0.00	Average

An item 1 is Fundamental Emissions.

Channel 159

Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @ 5798.720	114.02			74.17	34.76	5.09	0.00	Peak
1 @ 5793.320	102.39			62.54	34.76	5.09	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n Ant. 1 + Ant. 2 CH 1, 6, 11(20MHz)

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2390.000	64.73	-9.27	74.00	29.92	31.79	3.02	0.00	Peak
2 @	2406.330	113.42			78.54	31.86	3.02	0.00	Peak
1 @	2359.780	51.29	-2.71	54.00	16.65	31.65	2.99	0.00	Average
2 @	2405.570	102.24			67.36	31.86	3.02	0.00	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2434.260	117.39			82.42	31.92	3.05	0.00	Peak
1 @	2433.500	105.90			70.93	31.92	3.05	0.00	Average

An item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2458.770	114.05			78.94	32.06	3.05	0.00	Peak
2	2483.500	67.18	-6.82	74.00	31.97	32.13	3.08	0.00	Peak
1 @	2459.530	102.43			67.32	32.06	3.05	0.00	Average
2 @	2483.500	49.86	-4.14	54.00	14.65	32.13	3.08	0.00	Average

An item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Oct. 08, 2009	Test Site No.	03CH02-HY
Temperature	25.5	Humidity	52%
Test Engineer	Kobe	Configuration	2.4G 802.11n Ant. 1 + Ant. 2 CH 3, 6, 9 (40MHz)

Channel 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2384.860	69.52	-4.48	74.00	34.78	31.72	3.02	0.00	Peak
2 @	2419.060	110.49			75.61	31.86	3.02	0.00	Peak
1 @	2390.000	53.43	-0.57	54.00	18.62	31.79	3.02	0.00	Average
2 @	2419.060	99.76			64.88	31.86	3.02	0.00	Average

An item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2434.260	115.74			80.77	31.92	3.05	0.00	Peak
1 @	2435.020	102.86			67.89	31.92	3.05	0.00	Average

An item 1 is Fundamental Emissions.

Channel 9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2453.450	110.88			75.84	31.99	3.05	0.00	Peak
2 @	2484.420	70.95	-3.05	74.00	35.74	32.13	3.08	0.00	Peak
1 @	2454.970	99.70			64.59	32.06	3.05	0.00	Average
2 @	2483.500	53.39	-0.61	54.00	18.18	32.13	3.08	0.00	Average

An item 1 is Fundamental Emissions.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Single Chain Emission not in Restricted Band

Low Band Edge Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

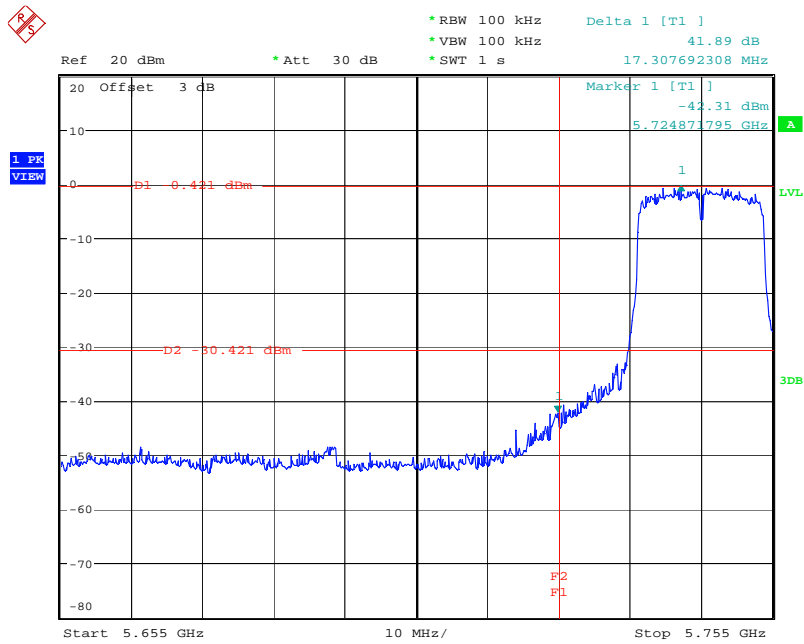


Date: 21.OCT.2009 15:31:10

High Band Edge Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

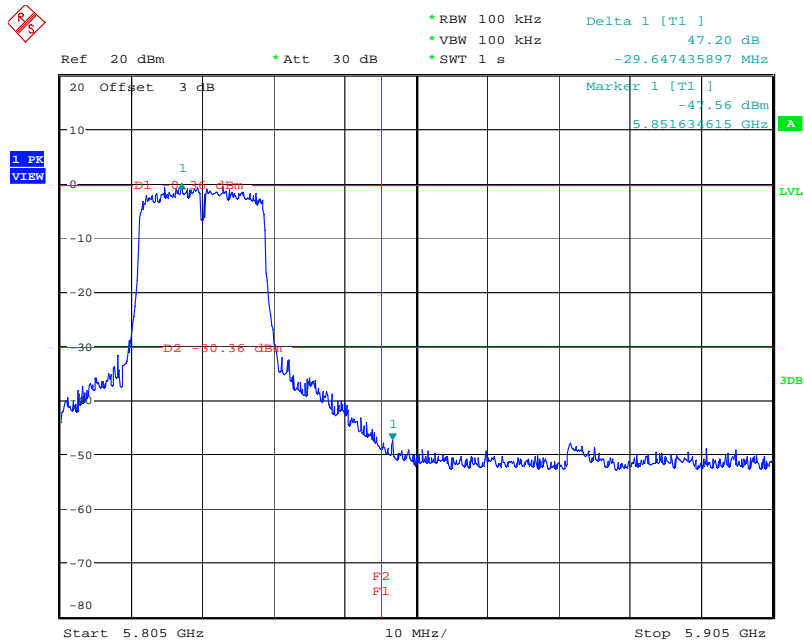


Date: 21.OCT.2009 15:33:39

Low Band Edge Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

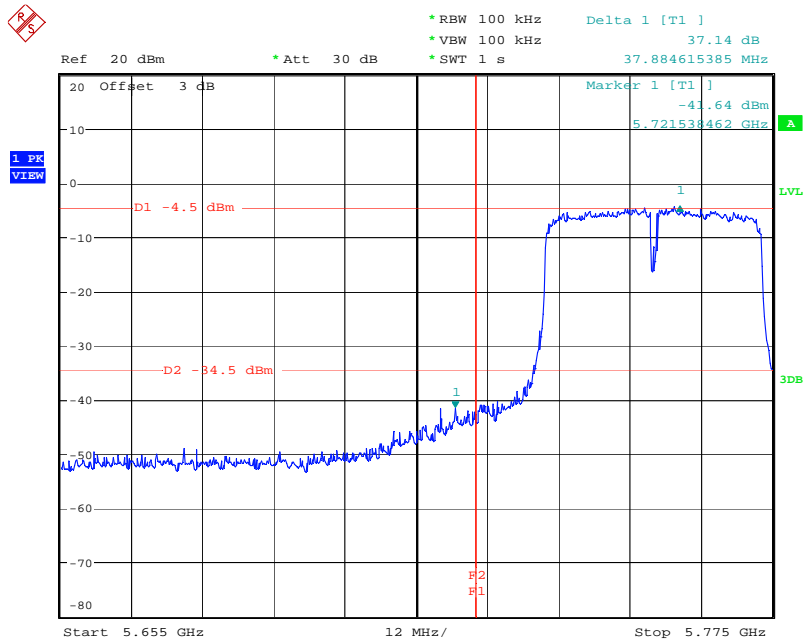


Date: 21.OCT.2009 15:37:24

High Band Edge Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

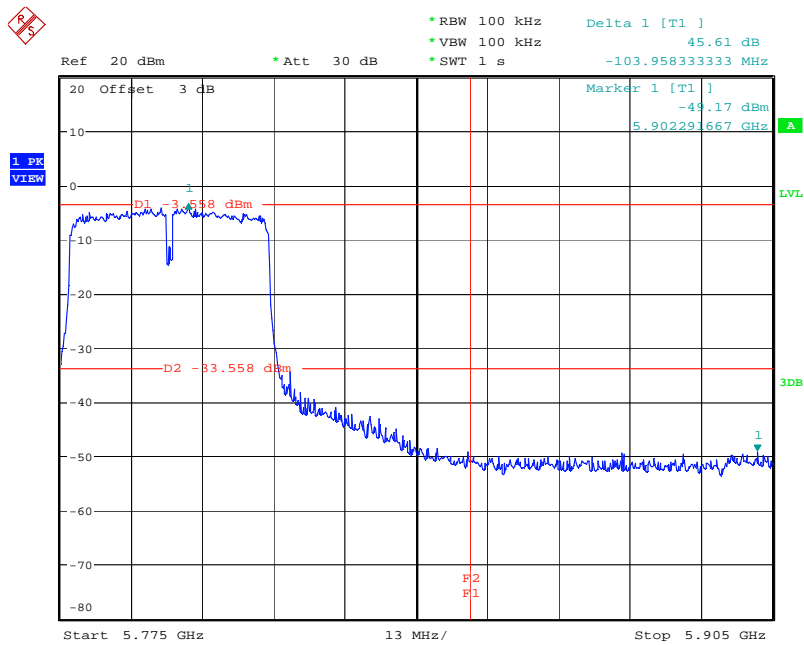


Date: 21.OCT.2009 15:36:16

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

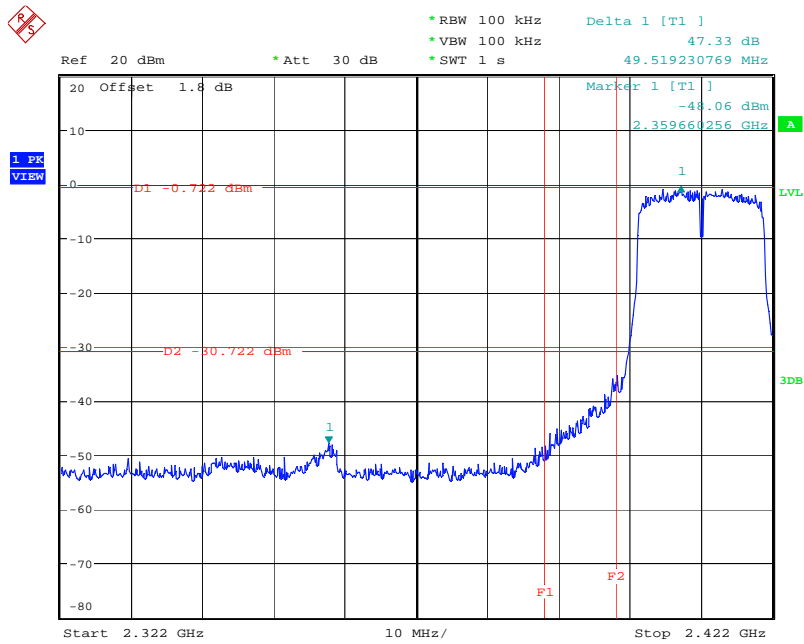


Date: 21.OCT.2009 15:04:25

High Band Edge Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

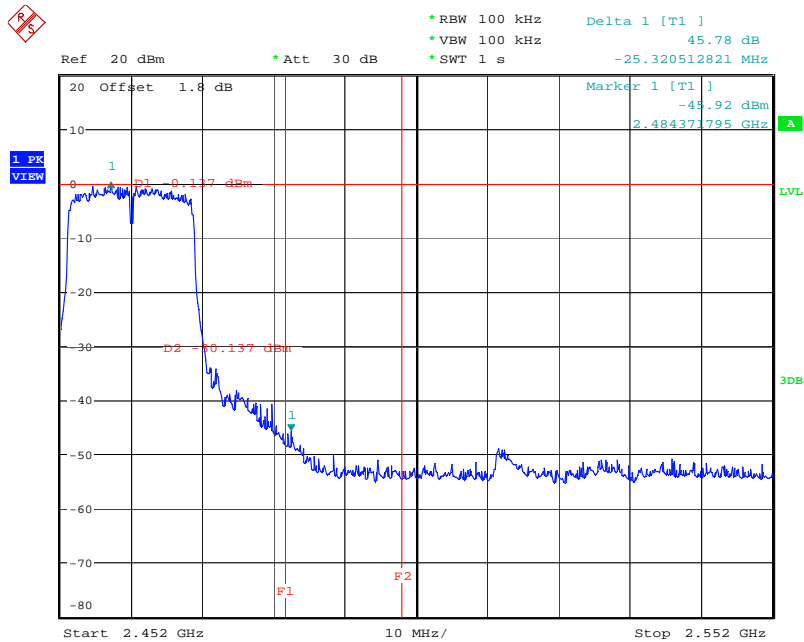


Date: 21.OCT.2009 15:06:38

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2422 MHz

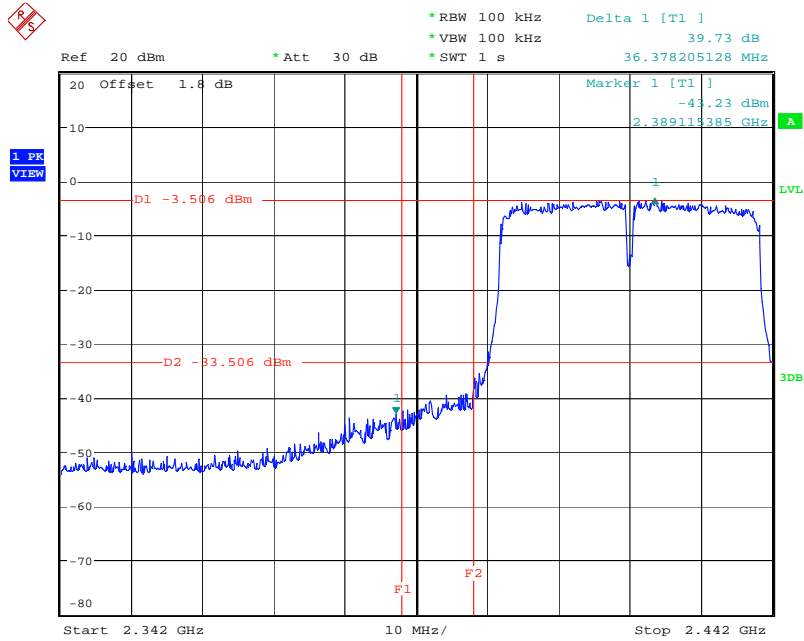

Date: 21.OCT.2009 15:17:49


High Band Edge Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2452 MHz

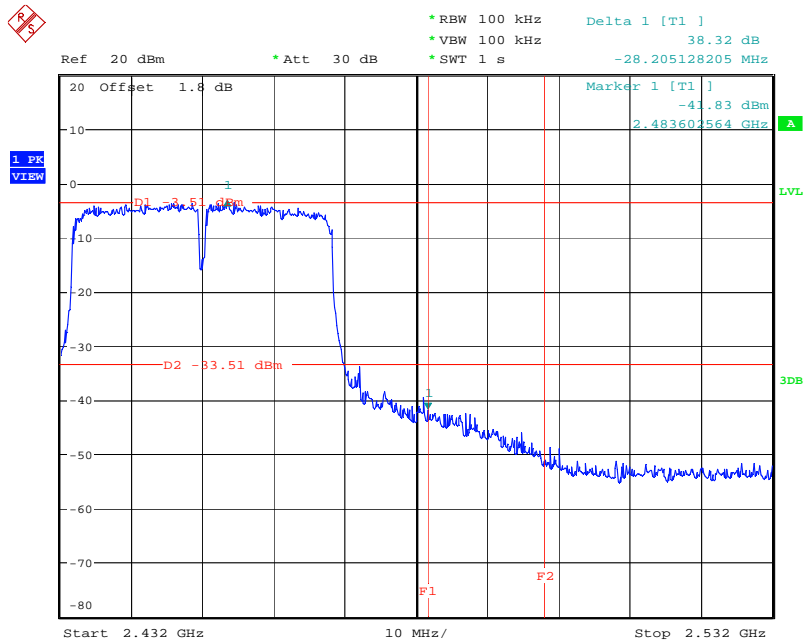

Date: 21.OCT.2009 15:15:49


For Two Chain Emission not in Restricted Band

Low Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. 1 & Ant. 2 (20MHz) / 5745 MHz

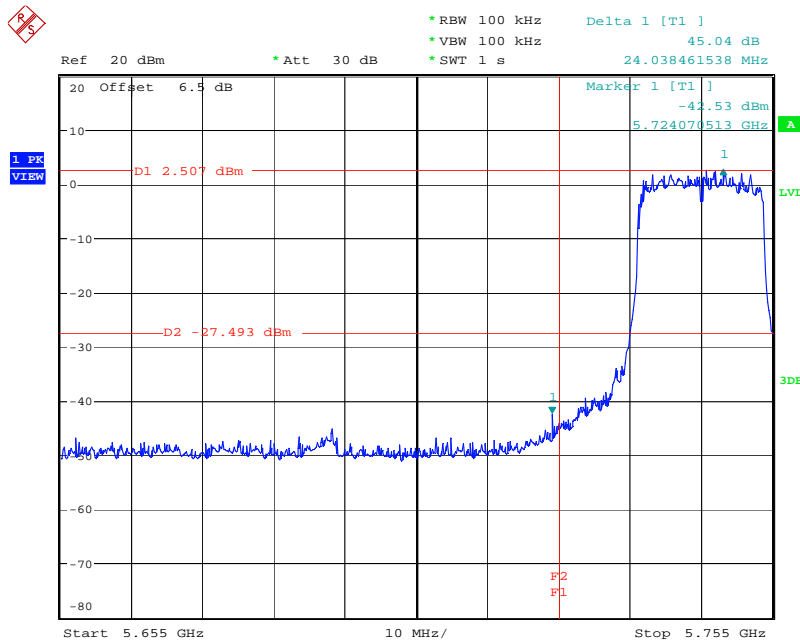


Date: 12.OCT.2009 10:41:31

High Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. 1 & Ant. 2 (20MHz) / 5825 MHz

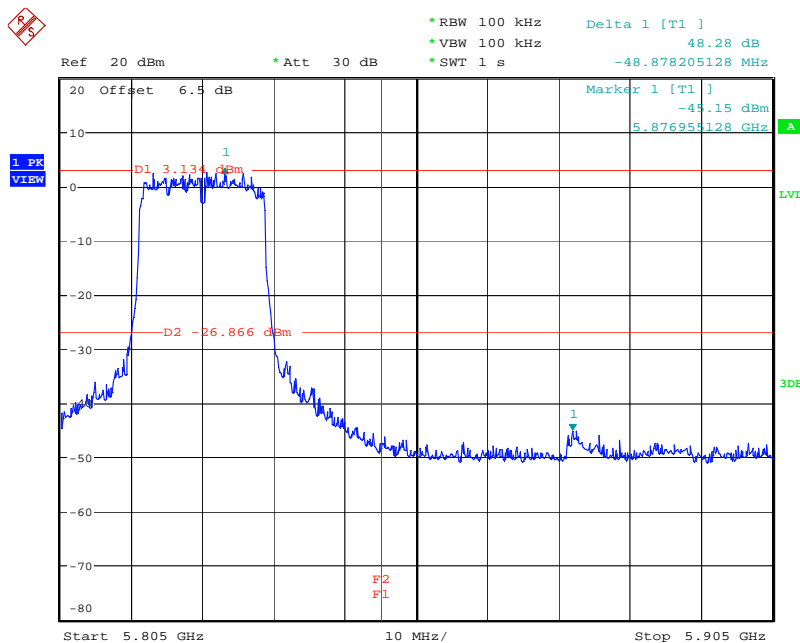


Date: 12.OCT.2009 10:44:06

Low Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. 1 & Ant. 2 (40MHz) / 5755 MHz

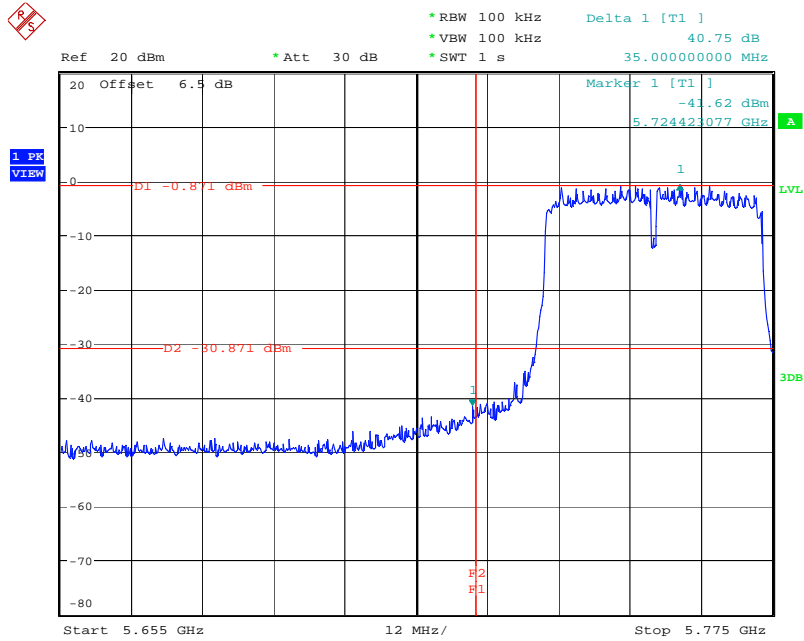


Date: 12.OCT.2009 10:45:35

High Band Edge Plot on Configuration of IEEE 802.11n-5G Ant. 1 & Ant. 2 (40MHz) / 5795 MHz

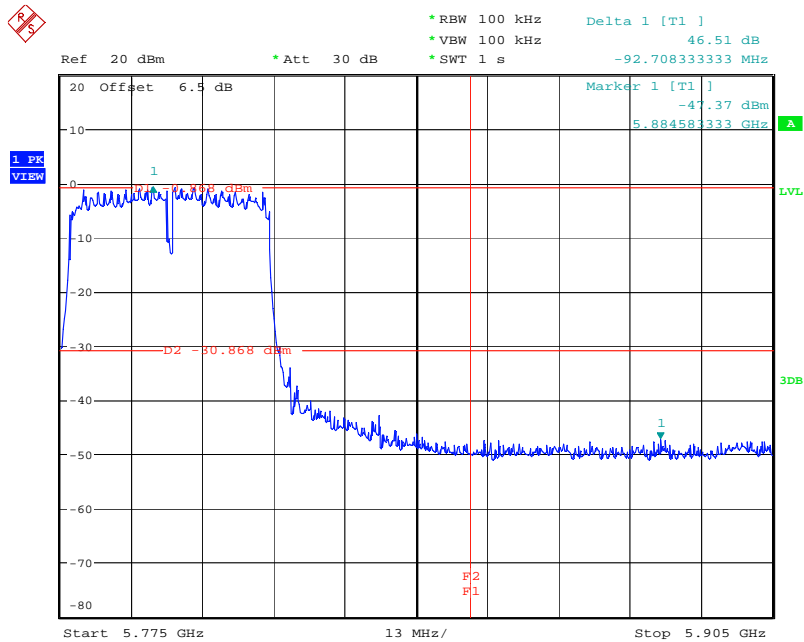


Date: 12.OCT.2009 10:47:00

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 & Ant. 2 (20MHz) / 2412 MHz

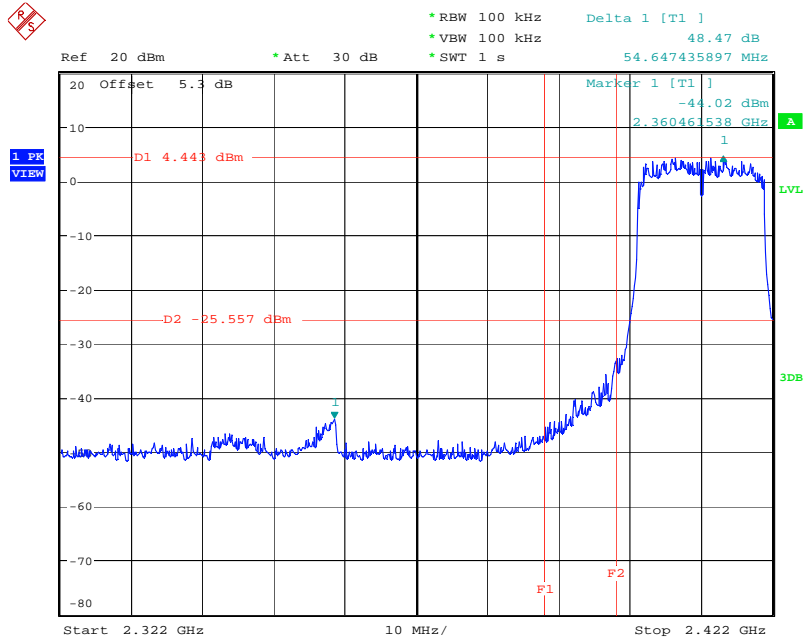


Date: 9.OCT.2009 15:13:02

High Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 & Ant. 2 (20MHz) / 2462 MHz

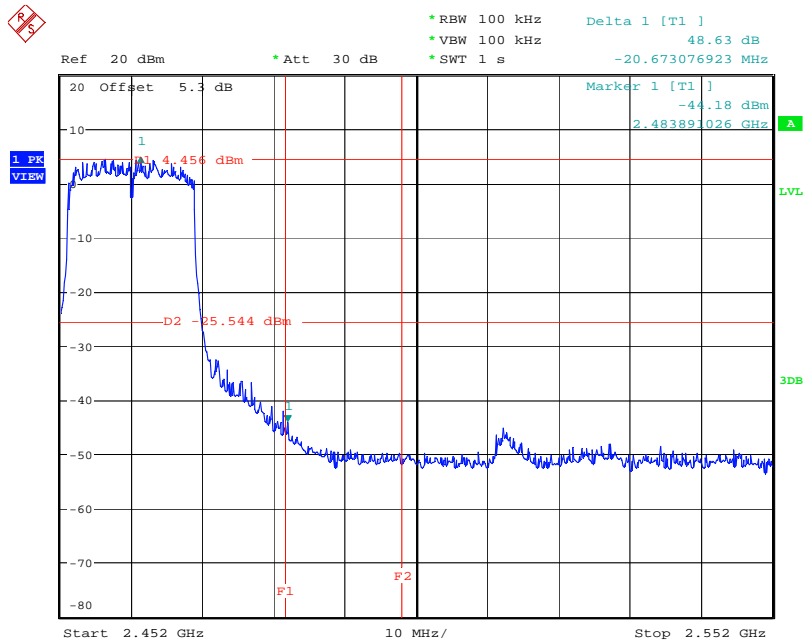


Date: 9.OCT.2009 15:15:37

Low Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 & Ant. 2 (40MHz) / 2422 MHz

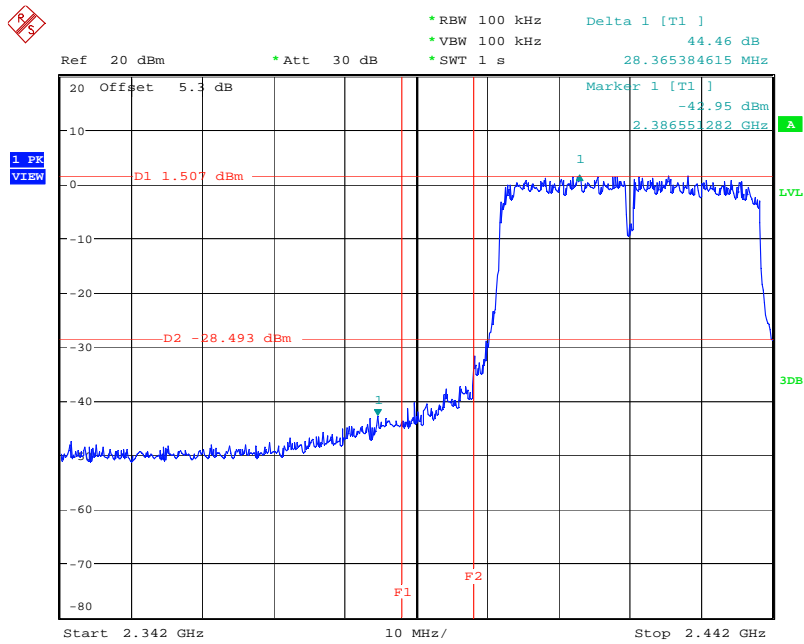

Date: 9.OCT.2009 15:18:09

High Band Edge Plot on Configuration of IEEE 802.11n-2.4G Ant. 1 & Ant. 2 (40MHz) / 2452 MHz

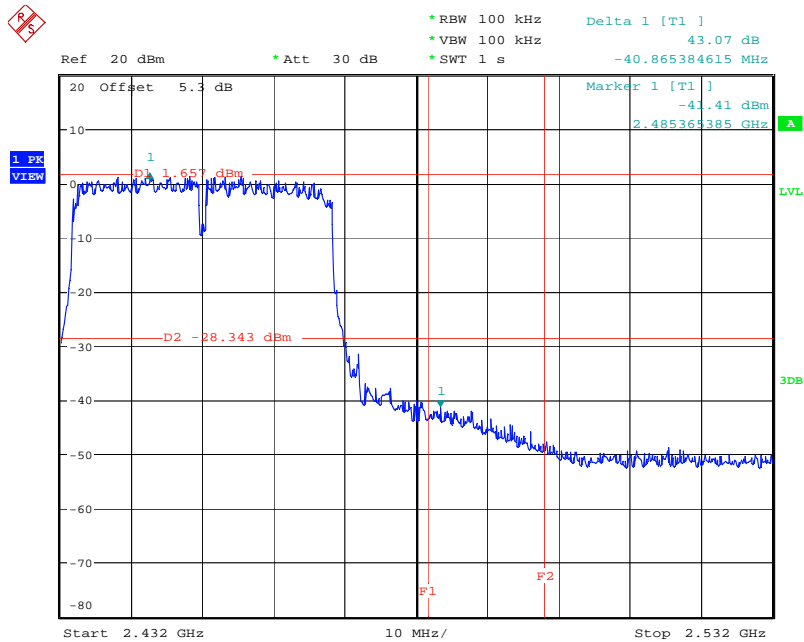

Date: 9.OCT.2009 15:20:16

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 01, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2008	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 17, 2008	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Dec. 17, 2008	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 04, 2009	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 07, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 16, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.


Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul 28, 2008*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-090318

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : March 18, 2009

PI, total 19 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix