

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

**Equipment** : Dual Band WLAN Adapter  
**Model No.** : WLU5022(RoHS)  
**Filing Type** : New Application  
**Applicant** : **Askey Computer Corp.**  
10F, No.119, ChienKang RD., Chung-Ho, Taipei, Taiwan,  
23585, R.O.C.  
**FCC ID** : H8N-WLU5022  
**Manufacturer** : **Askey Computer Corp.**  
10F, No.119, ChienKang RD., Chung-Ho, Taipei, Taiwan,  
23585, R.O.C.  
**Askey Technology (Jing Su) Ltd.**  
No.1388, Jiao Tong Road, Wujiang Economic-Technological  
Development Area, Jiangsu Province, P.R.China  
**Received Date** : Oct. 06, 2009  
**Final Test Date** : Nov. 06, 2009

## Statement

**Test result included is only for the 802.11a/n (5150~5350MHz; 5470~5725MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details ..... 3

2.2 Table for Filed Antenna ..... 3

2.3 Table for Carrier Frequencies ..... 5

2.4 Table for Test Modes ..... 6

2.5 Table for Testing Locations ..... 6

2.6 Table for Supporting Units..... 7

2.7 Table for Parameters of Test Software Setting ..... 7

2.8 EUT Operation during Test ..... 8

2.9 Test Configuration ..... 9

**3 TEST RESULT ..... 11**

3.1 AC Power Line Conducted Emissions Measurement..... 11

3.2 99% Occupied Bandwidth Measurement ..... 15

3.3 Maximum Conducted Output Power Measurement ..... 41

3.4 Power Spectral Density Measurement ..... 78

3.5 Peak Excursion Measurement ..... 104

3.6 Radiated Emissions Measurement..... 129

3.7 Band Edge and Fundamental Emissions Measurement ..... 217

3.8 Frequency Stability Measurement..... 233

3.9 Antenna Requirements..... 236

**4 LIST OF MEASURING EQUIPMENTS ..... 237**

**5 TEST LOCATION..... 239**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 240**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B7**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C4**



# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : Dual Band WLAN Adapter  
Model No. : WLU5022(RoHS)  
Applicant : Askey Computer Corp.  
10F, No.119, ChienKang RD., Chung-Ho, Taipei,  
Taiwan, 23585, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 06, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

| <b>Applied Standard: 47 CFR FCC Part 15 Subpart E</b> |                     |                                   |               |                    |
|---|---------------------|-----------------------------------|---------------|--------------------|
| <b>Part</b>   | <b>Rule Section</b> | <b>Description of Test</b>        | <b>Result</b> | <b>Under Limit</b> |
| 3.1   | 15.207              | AC Power Line Conducted Emissions | Complies      | 14.61 dB           |
| 3.2   | 15.407(a)           | 26dB Spectrum Bandwidth           | Complies      | -                  |
| 3.3   | 15.407(a)           | Maximum Conducted Output Power    | Complies      | 0.24 dB            |
| 3.4   | 15.407(a)           | Power Spectral Density            | Complies      | 0.36 dB            |
| 3.5   | 15.407(a)           | Peak Excursion                    | Complies      | 2.98 dB            |
| 3.6   | 15.407(b)           | Radiated Emissions                | Complies      | 3.10 dB            |
| 3.7   | 15.407(b)           | Band Edge Emissions               | Complies      | 1.82 dB            |
| 3.8   | 15.407(g)           | Frequency Stability               | Complies      | -                  |
| 3.9   | 15.203              | Antenna Requirements              | Complies      | -                  |

| <b>Test Items</b>                             | <b>Uncertainty</b>    | <b>Remark</b>            |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions             | ±2.3dB                | Confidence levels of 95% |
| Maximum Conducted Output Power                | ±0.5dB                | Confidence levels of 95% |
| Power Spectral Density                        | ±0.5dB                | Confidence levels of 95% |
| Peak Excursion                                | ±0.5dB                | Confidence levels of 95% |
| 26dB Spectrum Bandwidth / Frequency Stability | ±8.5×10 <sup>-8</sup> | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz)               | ±0.8dB                | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz)            | ±1.9dB                | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz)   | ±1.9dB                | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz)              | ±1.9dB                | Confidence levels of 95% |
| Temperature                                   | ±0.7                  | Confidence levels of 95% |
| Humidity                                      | ±3.2%                 | Confidence levels of 95% |
| DC / AC Power Source                          | ±1.4%                 | Confidence levels of 95% |

## 2 GENERAL INFORMATION

### 2.1 Product Details

Only the radio detail of IEEE 802.11a/n is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

| Items                    | Description  |
|--------------------------|--|
| Modulation               | See the below table for IEEE 802.11n   |
| Data Modulation          | OFDM (BPSK / QPSK / 16QAM / 64QAM)   |
| Data Rate (Mbps)         | See the below table for IEEE 802.11n   |
| Frequency Range          | 5150~5350MHz; 5470~5725MHz   |
| Channel Band Width (99%) | 1TX-802.11a<br>Band 1~Band 3: 16.75 MHz<br>1TX-802.11n MCS 0<br>(20MHz) Band 1~Band 3: 17.60 MHz<br>(40MHz) Band 1~Band 3: 36.00 MHz<br>2TX-802.11n MCS 8<br>(20MHz) Band 1~Band 2: 17.63 MHz ; Band 3: 17.55 MHz<br>(40MHz) Band 1~Band 3: 36.06 MHz  |
| Conducted Output Power   | 1TX-802.11a<br>Band 1: 13.05 dBm ; Band 2: 13.15 dBm ; Band 3: 13.49 dBm<br>1TX-802.11n MCS 0<br>(20MHz) Band 1: 13.34 dBm ; Band 2: 14.35 dBm ; Band 3: 13.71 dBm<br>(40MHz) Band 1: 13.57 dBm ; Band 2: 14.62 dBm ; Band 3: 13.97 dBm<br>2TX-802.11n MCS 8<br>(20MHz) Band 1: 14.08 dBm ; Band 2: 16.66 dBm ; Band 3: 16.62 dBm<br>(40MHz) Band 1: 15.74 dBm ; Band 2: 16.76 dBm ; Band 3: 16.50 dBm |

### 2.2 Table for Filed Antenna

#### Antenna & Bandwidth

| Antenna Mode              | Single Chain |        | Two Chain |        |
|---------------------------|--------------|--------|-----------|--------|
|                           | 20 MHz       | 40 MHz | 20 MHz    | 40 MHz |
| Bandwidth Mode            |              |        |           |        |
| 802.11b                   | V            | X      | X         | X      |
| 802.11g                   | V            | X      | X         | X      |
| 802.11n(2.4GHz)           | V            | V      | V         | V      |
| 802.11a (5150~5250MHz)    | V            | X      | X         | X      |
| 802.11a (5250~5350MHz)    | V            | X      | X         | X      |
| 802.11a (5470~5725MHz)    | V            | X      | X         | X      |
| 802.11a (5725~5850MHzMHz) | V            | X      | X         | X      |
| 802.11n (5150~5250MHz)    | V            | V      | V         | V      |
| 802.11n (5250~5350MHz)    | V            | V      | V         | V      |
| 802.11n (5470~5725MHz)    | V            | V      | V         | V      |
| 802.11n (5725~5850MHzMHz) | V            | V      | V         | V      |

| Ant. | Antenna Type    | Connector      | Gain (dBi) |      | Remark  |
|------|-----------------|----------------|------------|------|---------|
|      |                 |                | 2.4G       | 5G   |         |
| A    | Printed Antenna | Fixed on Board | 3.44       | 4.06 | TX / RX |
| B    | Printed Antenna | Fixed on Board | 3.44       | 4.06 | TX / RX |

**Antenna: 2T2R Spatial Multiplexing MIMO configuration. IEEE 802.11n used two antennas are for signal transmitting and receiving.**

**IEEE 802.11n Modulation Scheme**

| MCS Index | Nss | Modulation | R   | NBPS | NCBPS |       | NDBPS |       | Data rate(Mbps) |       |
|-----------|-----|------------|-----|------|-------|-------|-------|-------|-----------------|-------|
|           |     |            |     |      | 20MHz | 40MHz | 20MHz | 40MHz | 800nsGI         |       |
|           |     |            |     |      |       |       |       |       | 20MHz           | 40MHz |
| 0         | 1   | BPSK       | 1/2 | 1    | 52    | 108   | 26    | 54    | 6.5             | 13.5  |
| 1         | 1   | QPSK       | 1/2 | 2    | 104   | 216   | 52    | 108   | 13.0            | 27.0  |
| 2         | 1   | QPSK       | 3/4 | 2    | 104   | 216   | 78    | 162   | 19.5            | 40.5  |
| 3         | 1   | 16-QAM     | 1/2 | 4    | 208   | 432   | 104   | 216   | 26.0            | 54.0  |
| 4         | 1   | 16-QAM     | 3/4 | 4    | 208   | 432   | 156   | 324   | 39.0            | 81.0  |
| 5         | 1   | 64-QAM     | 2/3 | 6    | 312   | 648   | 208   | 432   | 52.0            | 108.0 |
| 6         | 1   | 64-QAM     | 3/4 | 6    | 312   | 648   | 234   | 486   | 58.5            | 121.5 |
| 7         | 1   | 64-QAM     | 5/6 | 6    | 312   | 648   | 260   | 540   | 65.0            | 135.0 |
| 8         | 2   | BPSK       | 1/2 | 1    | 104   | 216   | 52    | 108   | 13.0            | 27.0  |
| 9         | 2   | QPSK       | 1/2 | 2    | 208   | 432   | 104   | 216   | 26.0            | 54.0  |
| 10        | 2   | QPSK       | 3/4 | 2    | 208   | 432   | 156   | 324   | 39.0            | 81.0  |
| 11        | 2   | 16-QAM     | 1/2 | 4    | 416   | 864   | 208   | 432   | 52.0            | 108.0 |
| 12        | 2   | 16-QAM     | 3/4 | 4    | 416   | 864   | 312   | 648   | 78.0            | 162.0 |
| 13        | 2   | 64-QAM     | 2/3 | 6    | 624   | 1296  | 416   | 864   | 104.0           | 216.0 |
| 14        | 2   | 64-QAM     | 3/4 | 6    | 624   | 1296  | 468   | 972   | 117.0           | 243.0 |
| 15        | 2   | 64-QAM     | 5/6 | 6    | 624   | 1296  | 520   | 1080  | 130.0           | 270.0 |

| Symbol | Explanation                             |
|--------|---|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPS   | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | guard interval                          |

**2.3 Table for Carrier Frequencies**

**Frequency Allocation**

For 802.11a, 802.11n (20MHz): Use channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136 and 140.

For 802.11n (40MHz): Use channel 38, 46, 54, 62, 102, 110, 118, 126 and 134.

| Frequency Band          | Channel No. | Frequency |
|-------------------------|-------------|-----------|
| 5150~5250 MHz<br>Band 1 | 36          | 5180 MHz  |
|                         | 38          | 5190 MHz  |
|                         | 40          | 5200 MHz  |
|                         | 44          | 5220 MHz  |
|                         | 46          | 5230 MHz  |
|                         | 48          | 5240 MHz  |

| Frequency Band          | Channel No. | Frequency |
|-------------------------|-------------|-----------|
| 5250~5350 MHz<br>Band 2 | 52          | 5260 MHz  |
|                         | 54          | 5270 MHz  |
|                         | 56          | 5280 MHz  |
|                         | 60          | 5300 MHz  |
|                         | 62          | 5310 MHz  |
|                         | 64          | 5320 MHz  |

| Frequency Band          | Channel No. |          | Frequency |          |
|-------------------------|-------------|----------|-----------|----------|
| 5470~5725 MHz<br>Band 3 | 100         | 5500 MHz | 120       | 5600 MHz |
|                         | 102         | 5510 MHz | 124       | 5620 MHz |
|                         | 104         | 5520 MHz | 126       | 5630 MHz |
|                         | 108         | 5540 MHz | 128       | 5640 MHz |
|                         | 110         | 5550 MHz | 132       | 5660 MHz |
|                         | 112         | 5560 MHz | 134       | 5670 MHz |
|                         | 116         | 5580 MHz | 136       | 5680 MHz |
|                         | 118         | 5590 MHz | 140       | 5700 MHz |



**2.4 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items   | Mode                               | Data Rate | Channel                 | Antenna  |
|--|------------------------------------|-----------|-------------------------|----------|
| AC Power Conducted Emission  | Normal Mode                        | Auto      | -                       | -        |
| Max. Conducted Output Power  | 11a Band 1~3/BPSK                  | 6Mbps     | 36/40/48/52/56          | 1        |
|  | 11n Band 1~3/BPSK<br>MCS 0 (20MHz) | 6.5Mbps   | /64/100/116/140         |          |
|  | 11n Band 1~3/BPSK<br>MCS 0 (40MHz) | 13.5Mbps  | 38/46/54/62/102/110/134 |          |
|  | 11n Band 1~3/BPSK<br>MCS 8 (20MHz) | 13Mbps    | 36/40/48/52/56          | 1/2 /1+2 |
|  | 11n Band 1~3/BPSK<br>MCS 8 (40MHz) | 27Mbps    | /64/100/116/140         |          |
| 26dB Spectrum Bandwidth<br>99% Occupied Bandwidth<br>Measurement<br>Power Spectral Density<br>Peak Excursion | 11a Band 1~3/BPSK                  | 6Mbps     | 36/40/48/52/56          | 1        |
|  | 11n Band 1~3/BPSK<br>MCS 0 (20MHz) | 6.5Mbps   | /64/100/116/140         |          |
|  | 11n Band 1~3/BPSK<br>MCS 0 (40MHz) | 13.5Mbps  | 38/46/54/62/102/110/134 |          |
|  | 11n Band 1~3/BPSK<br>MCS 8 (20MHz) | 13Mbps    | 36/40/48/52/56          | 1+2      |
|  | 11n Band 1~3/BPSK<br>MCS 8 (40MHz) | 27Mbps    | /64/100/116/140         |          |
| Radiated Emission Below 1GHz   | Normal Mode                        | Auto      | -                       | -        |
| Radiated Emission Above 1GHz<br>Band Edge Emission   | 11a Band 1~3/BPSK                  | 6Mbps     | 36/40/48/52/56          | 1        |
|  | 11n Band 1~3/BPSK<br>MCS 0 (20MHz) | 6.5Mbps   | /64/100/116/140         |          |
|  | 11n Band 1~3/BPSK<br>MCS 0 (40MHz) | 13.5Mbps  | 38/46/54/62/102/110/134 | 1        |
|  | 11n Band 1~3/BPSK<br>MCS 8 (20MHz) | 13Mbps    | 36/40/48/52/56          | 1+2      |
|  | 11n Band 1~3/BPSK<br>MCS 8 (40MHz) | 27Mbps    | /64/100/116/140         |          |
| Frequency Stability  | 11a/n BPSK<br>MCS 0 (20MHz)        | 6Mbps     | 64                      | 1        |
|  | 11n BPSK<br>MCS 8 (40MHz)          | 27Mbps    | 102                     | 1+2      |

**2.5 Table for Testing Locations**

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. |
|---------------|---------------|----------|--------------|-------------|
| CO04-HY       | Conduction    | Hwa Ya   | 643075       | IC 4086B    |
| TH01-HY       | OVEN Room     | Hwa Ya   | -            | -           |
| 03CH02-HY     | SAC           | Hwa Ya   | 643075       | IC 4086B    |

Semi Anechoic Chamber (SAC).

**2.6 Table for Supporting Units**

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| Notebook     | DELL  | D505  | DoC    |

**2.7 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For Single Chain:**

**Power Parameters of IEEE 802.11a**

| Test Software Version | RT3x7x   |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5180 MHz | 5200 MHz | 5240 MHz |
| IEEE 802.11a          | 06       | 06       | 07       |
| Frequency             | 5260 MHz | 5280 MHz | 5320 MHz |
| IEEE 802.11a          | 07       | 08       | 09       |
| Frequency             | 5500 MHz | 5580 MHz | 5700 MHz |
| IEEE 802.11a          | 0B       | 0B       | 0A       |

**Power Parameters of IEEE 802.11n (20MHz)**

| Test Software Version | RT3x7x   |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5180 MHz | 5200 MHz | 5240 MHz |
| IEEE 802.11n          | 06       | 06       | 07       |
| Frequency             | 5260 MHz | 5280 MHz | 5320 MHz |
| IEEE 802.11n          | 07       | 08       | 09       |
| Frequency             | 5500 MHz | 5580 MHz | 5700 MHz |
| IEEE 802.11n          | 0B       | 0B       | 0A       |

**Power Parameters of IEEE 802.11n (40MHz)**

| Test Software Version | RT3x7x   |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5190 MHz | 5230 MHz | 5270 MHz |
| IEEE 802.11n          | 06       | 07       | 07       |
| Frequency             | 5310 MHz | 5510 MHz | 5550 MHz |
| IEEE 802.11n          | 09       | 0B       | 0B       |
| Frequency             | 5670 MHz |          |          |
| IEEE 802.11n          | 0A       |          |          |

**For Two Chain:**

**Power Parameters of IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)**

| Test Software Version | RT3x7x   |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5180 MHz | 5200 MHz | 5240 MHz |
| IEEE 802.11n          | 0401     | 0401     | 0502     |
| Frequency             | 5260 MHz | 5280 MHz | 5320 MHz |
| IEEE 802.11n          | 0704     | 0804     | 0905     |
| Frequency             | 5500 MHz | 5580 MHz | 5700 MHz |
| IEEE 802.11n          | 0B06     | 0A06     | 0A06     |

**Power Parameters of IEEE 802.11n Ant. 1 + Ant. 2 (40MHz)**

| Test Software Version | RT3x7x   |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5190 MHz | 5230 MHz | 5270 MHz |
| IEEE 802.11n          | 0603     | 0704     | 0704     |
| Frequency             | 5310 MHz | 5510 MHz | 5550 MHz |
| IEEE 802.11n          | 0905     | 0B06     | 0B07     |
| Frequency             | 5670 MHz |          |          |
| IEEE 802.11n          | 0A05     |          |          |

**2.8 EUT Operation during Test**

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “ H “ pattern was used as the test software.

The NB sends “ H “ messages to the panel, and the panel displays “ H “ patterns on the screen.


-Executed " ping.exe " to link with the remote workstation to receive and transmit data by WLAN.

-Executed “RT3x7x” to keep transmitting signals at fixed frequency.


## 2.9 Test Configuration

### 2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

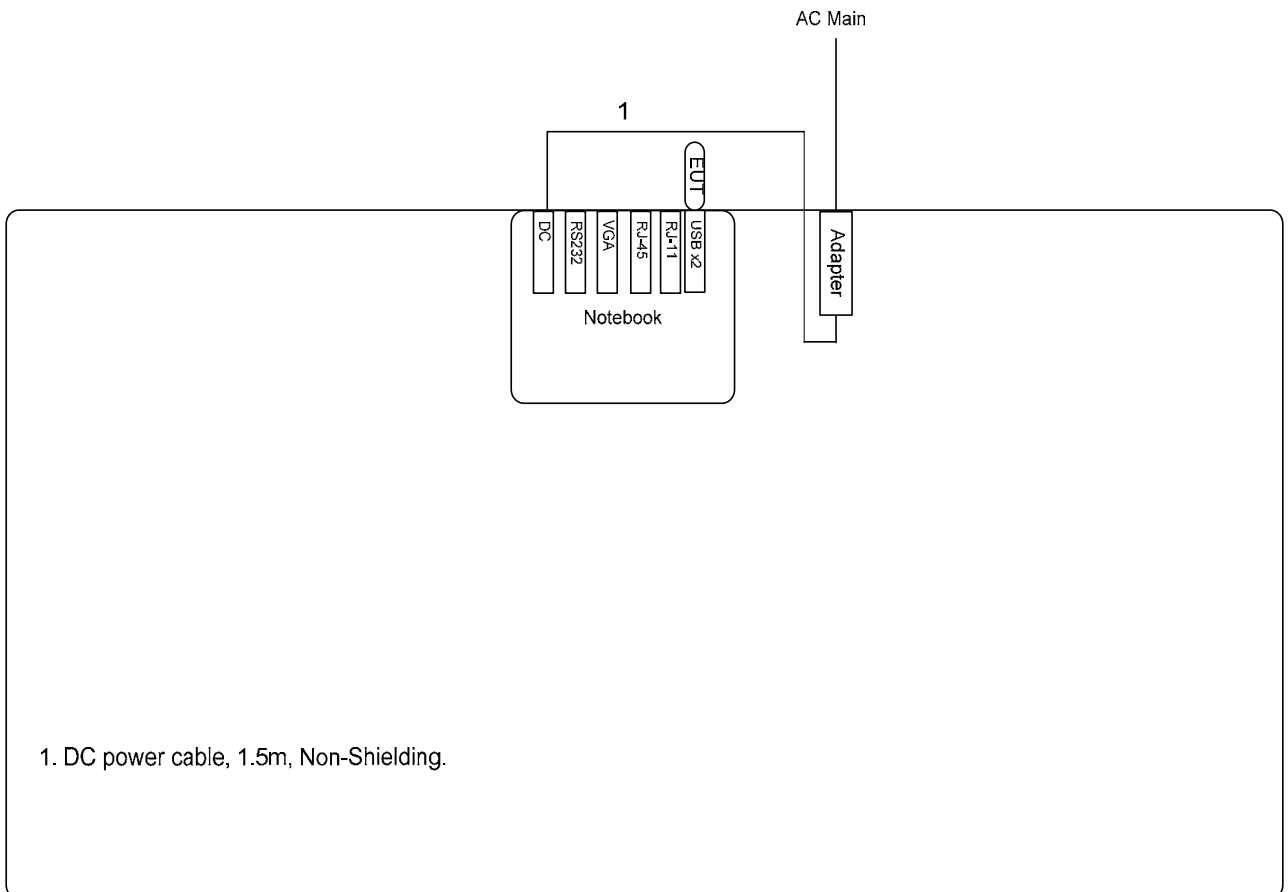

**For radiated emissions above 1GHz**

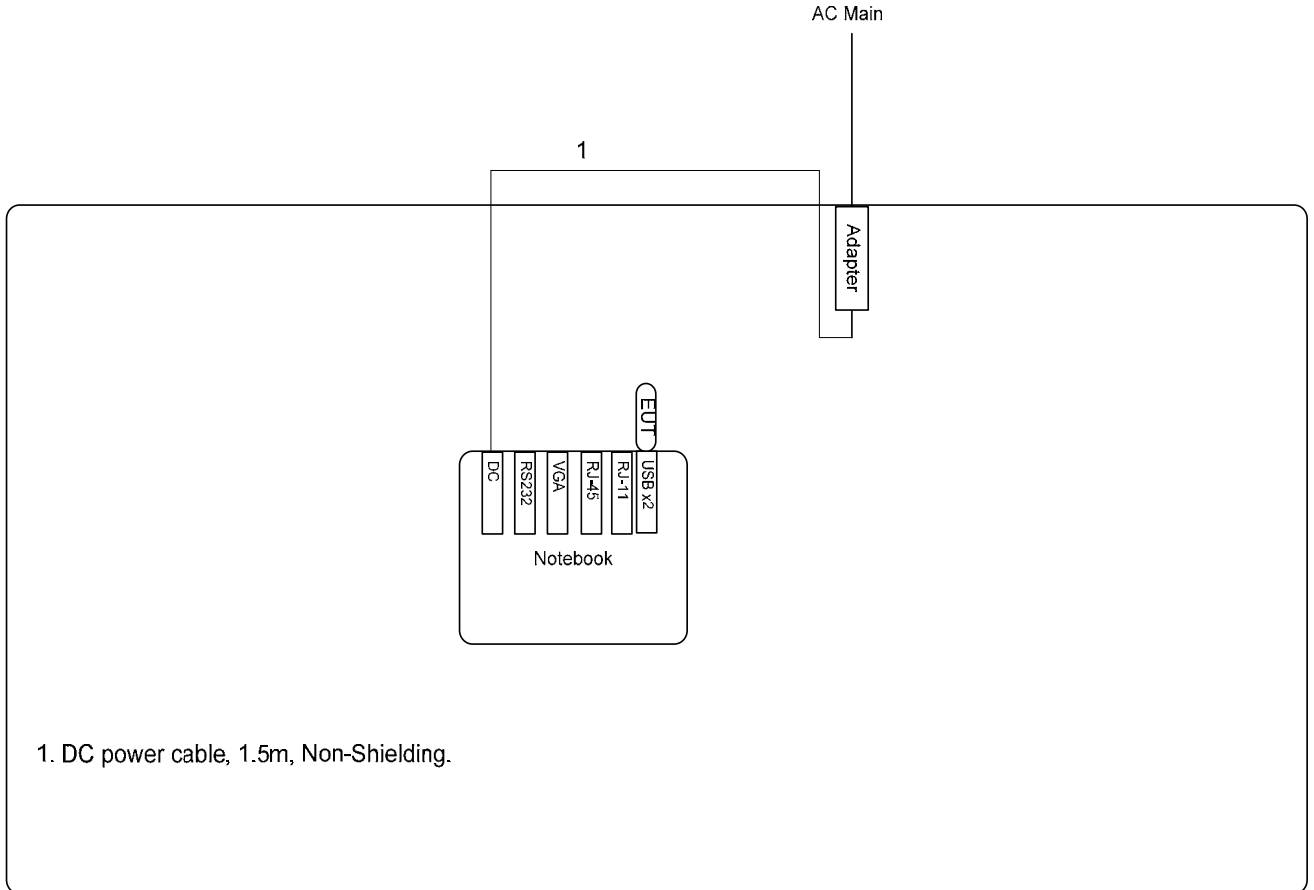

1. DC power cable, 1.5m, Non-Shielding.

### 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 KHz    |

##### 3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

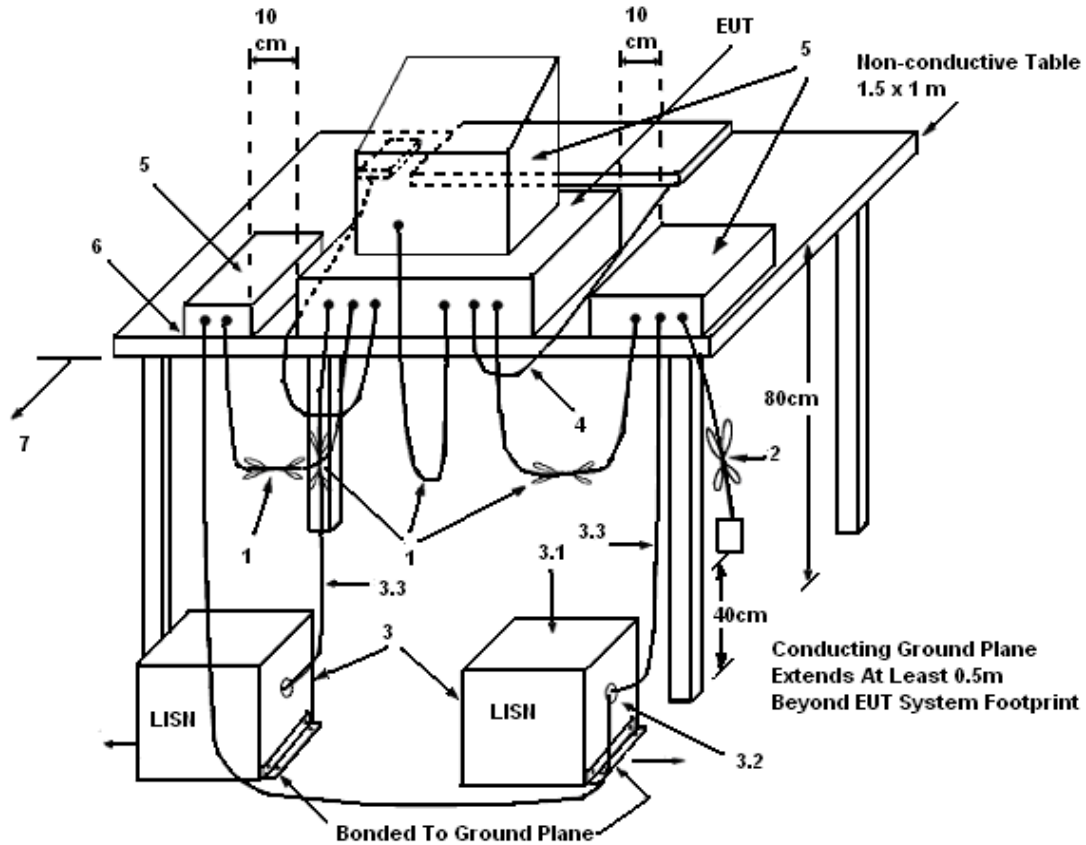

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement

|                        |               |                      |             |
|------------------------|---------------|----------------------|-------------|
| <b>Final Test Date</b> | Oct. 16, 2009 | <b>Test Site No.</b> | CO04-HY     |
| <b>Temperature</b>     | 25            | <b>Humidity</b>      | 55%         |
| <b>Test Engineer</b>   | Chris         | <b>Configuration</b> | Normal Mode |


Line

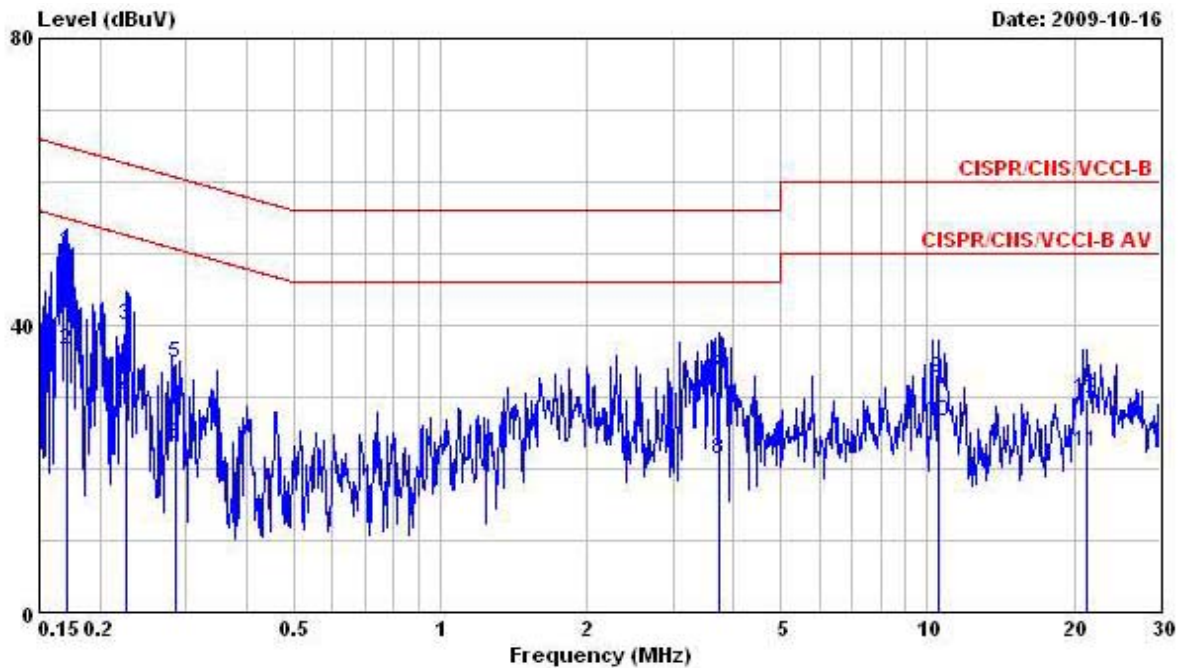

|    | Freq      | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-----------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz       | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.1712450 | 50.29 | -14.61     | 64.90      | 50.14      | 0.08        | 0.07       | QP      |
| 2  | 0.1712450 | 36.46 | -18.44     | 54.90      | 36.31      | 0.08        | 0.07       | Average |
| 3  | 0.2267630 | 40.10 | -22.47     | 62.57      | 39.95      | 0.08        | 0.07       | QP      |
| 4  | 0.2267630 | 29.85 | -22.72     | 52.57      | 29.70      | 0.08        | 0.07       | Average |
| 5  | 0.2846130 | 34.72 | -25.96     | 60.68      | 34.55      | 0.09        | 0.08       | QP      |
| 6  | 0.2846130 | 23.46 | -27.22     | 50.68      | 23.29      | 0.09        | 0.08       | Average |
| 7  | 3.740     | 32.77 | -23.23     | 56.00      | 32.38      | 0.16        | 0.23       | QP      |
| 8  | 3.740     | 21.25 | -24.75     | 46.00      | 20.86      | 0.16        | 0.23       | Average |
| 9  | 10.560    | 32.64 | -27.36     | 60.00      | 32.03      | 0.28        | 0.33       | QP      |
| 10 | 10.560    | 26.47 | -23.53     | 50.00      | 25.86      | 0.28        | 0.33       | Average |
| 11 | 21.260    | 22.39 | -27.61     | 50.00      | 21.54      | 0.42        | 0.43       | Average |
| 12 | 21.260    | 29.61 | -30.39     | 60.00      | 28.76      | 0.42        | 0.43       | QP      |



Neutral

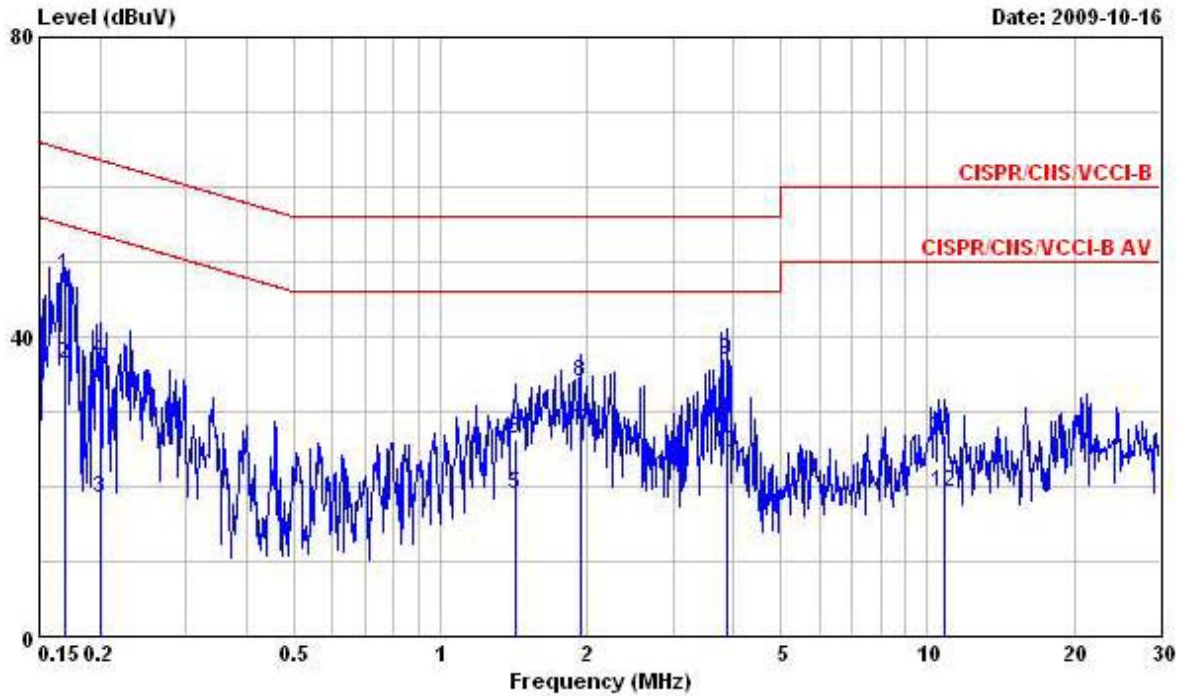

|    | Freq      | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|----|-----------|-------|------------|------------|------------|-------------|------------|---------|
|    | MHz       | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1  | 0.1694400 | 48.15 | -16.84     | 64.99      | 48.00      | 0.08        | 0.07       | QP      |
| 2  | 0.1694400 | 36.42 | -18.57     | 54.99      | 36.27      | 0.08        | 0.07       | Average |
| 3  | 0.1996860 | 18.34 | -35.28     | 53.62      | 18.20      | 0.08        | 0.06       | Average |
| 4  | 0.1996860 | 36.86 | -26.76     | 63.62      | 36.72      | 0.08        | 0.06       | QP      |
| 5  | 1.430     | 18.94 | -27.06     | 46.00      | 18.69      | 0.11        | 0.14       | Average |
| 6  | 1.430     | 26.21 | -29.79     | 56.00      | 25.96      | 0.11        | 0.14       | QP      |
| 7  | 1.940     | 27.49 | -18.51     | 46.00      | 27.22      | 0.11        | 0.16       | Average |
| 8  | 1.940     | 33.95 | -22.05     | 56.00      | 33.68      | 0.11        | 0.16       | QP      |
| 9  | 3.880     | 36.77 | -19.23     | 56.00      | 36.38      | 0.15        | 0.24       | QP      |
| 10 | 3.880     | 24.52 | -21.48     | 46.00      | 24.13      | 0.15        | 0.24       | Average |
| 11 | 10.786    | 26.85 | -33.15     | 60.00      | 26.27      | 0.27        | 0.31       | QP      |
| 12 | 10.786    | 19.15 | -30.85     | 50.00      | 18.57      | 0.27        | 0.31       | Average |

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2 99% Occupied Bandwidth Measurement**

**3.2.1 Limit**

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameters | Setting          |
|---------------------|------------------|
| Attenuation         | Auto             |
| Span Frequency      | > 26dB Bandwidth |
| RB                  | 300 kHz          |
| VB                  | 1000 kHz         |
| Detector            | Peak             |
| Trace               | Max Hold         |
| Sweep Time          | Auto             |

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.2.4 Test Setup Layout**

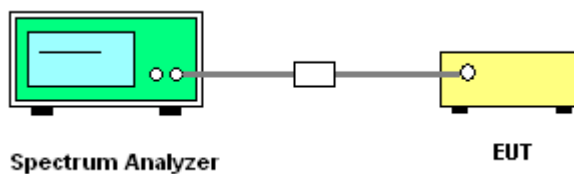

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of 99% Occupied Bandwidth**

|                        |               |                      |           |
|------------------------|---------------|----------------------|-----------|
| <b>Final Test Date</b> | Nov. 06, 2009 | <b>Test Site No.</b> | TH01-HY   |
| <b>Temperature</b>     | 26            | <b>Humidity</b>      | 56%       |
| <b>Test Engineer</b>   | Duncan        | <b>Configuration</b> | 802.11a/n |

**For Single Chain:**

**Configuration of IEEE 802.11a**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 19.87                | 16.75                        |
| 40      | 5200 MHz  | 19.79                | 16.75                        |
| 48      | 5240 MHz  | 19.87                | 16.67                        |
| 52      | 5260 MHz  | 19.63                | 16.67                        |
| 56      | 5280 MHz  | 19.87                | 16.67                        |
| 64      | 5320 MHz  | 19.87                | 16.75                        |
| 100     | 5500 MHz  | 19.79                | 16.75                        |
| 116     | 5580 MHz  | 19.80                | 16.70                        |
| 140     | 5700 MHz  | 19.87                | 16.75                        |

**Configuration IEEE 802.11n (20MHz)**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 20.20                | 17.60                        |
| 40      | 5200 MHz  | 20.30                | 17.60                        |
| 48      | 5240 MHz  | 20.20                | 17.50                        |
| 52      | 5260 MHz  | 20.20                | 17.50                        |
| 56      | 5280 MHz  | 20.40                | 17.60                        |
| 64      | 5320 MHz  | 20.20                | 17.50                        |
| 100     | 5500 MHz  | 20.20                | 17.60                        |
| 116     | 5580 MHz  | 20.20                | 17.50                        |
| 140     | 5700 MHz  | 20.10                | 17.60                        |

**Configuration IEEE 802.11n (40MHz)**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 38      | 5190 MHz  | 39.80                | 36.00                        |
| 46      | 5230 MHz  | 39.80                | 36.00                        |
| 54      | 5270 MHz  | 39.80                | 36.00                        |
| 62      | 5310 MHz  | 39.40                | 36.00                        |
| 102     | 5510 MHz  | 39.60                | 36.00                        |
| 110     | 5550 MHz  | 39.60                | 36.00                        |
| 134     | 5670 MHz  | 39.80                | 36.00                        |

**For Two Chain:**

**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)**


| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 36      | 5180 MHz  | 19.55                | 17.63                        |
| 40      | 5200 MHz  | 19.71                | 17.63                        |
| 48      | 5240 MHz  | 19.63                | 17.55                        |
| 52      | 5260 MHz  | 19.63                | 17.63                        |
| 56      | 5280 MHz  | 19.63                | 17.63                        |
| 64      | 5320 MHz  | 19.55                | 17.63                        |
| 100     | 5500 MHz  | 19.63                | 17.55                        |
| 116     | 5580 MHz  | 19.70                | 17.70                        |
| 140     | 5700 MHz  | 19.79                | 17.55                        |

**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz)**

| Channel | Frequency | 26dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------|----------------------|------------------------------|
| 38      | 5190 MHz  | 39.10                | 36.06                        |
| 46      | 5230 MHz  | 39.26                | 35.90                        |
| 54      | 5270 MHz  | 39.10                | 36.06                        |
| 62      | 5310 MHz  | 39.26                | 36.06                        |
| 102     | 5510 MHz  | 39.42                | 35.90                        |
| 110     | 5550 MHz  | 39.40                | 36.00                        |
| 134     | 5670 MHz  | 39.42                | 36.06                        |


For Single Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

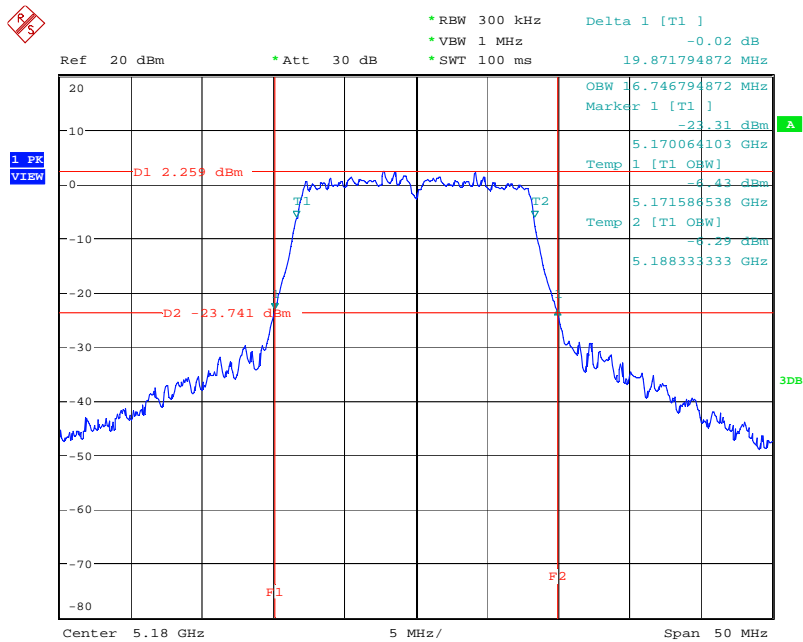


Date: 12.OCT.2009 14:21:56

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

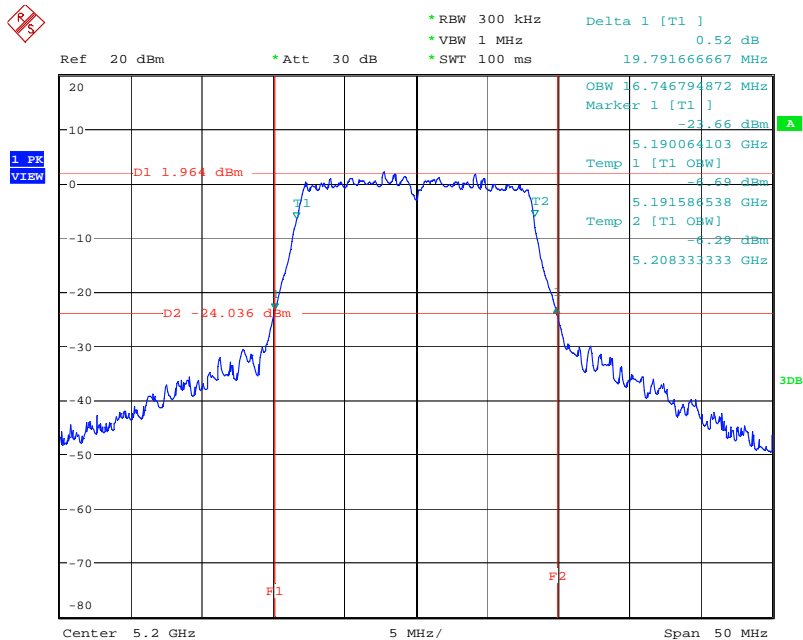


Date: 12.OCT.2009 14:23:32

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

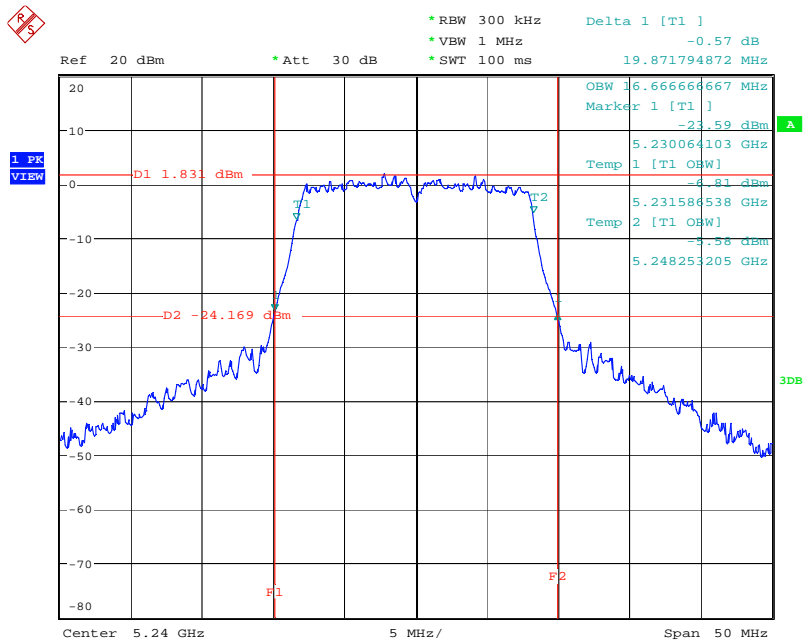


Date: 12.OCT.2009 14:24:41

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5260 MHz

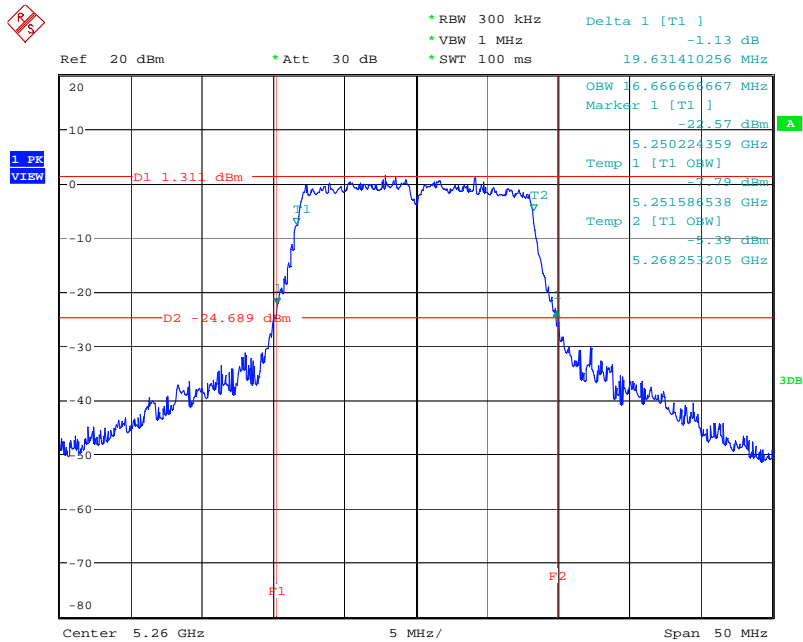


Date: 12.OCT.2009 14:25:51

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5280 MHz

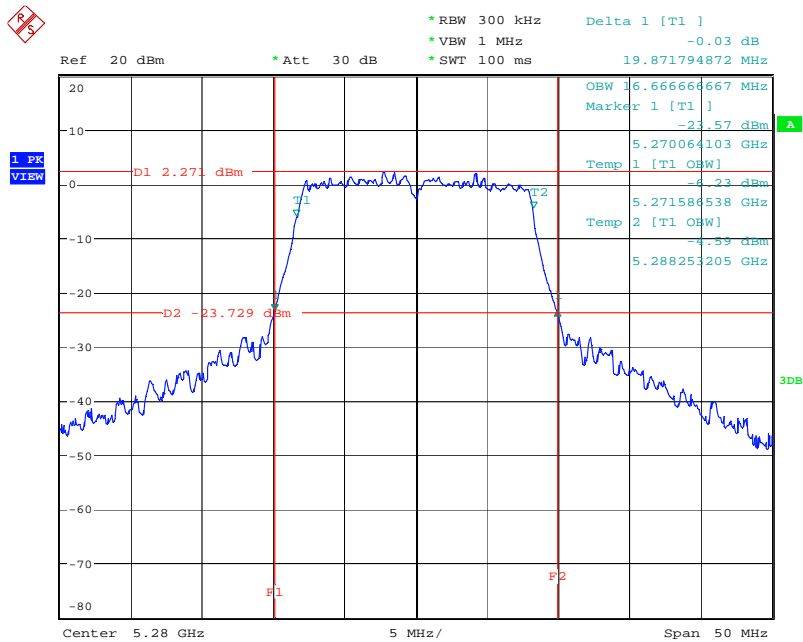


Date: 12.OCT.2009 14:27:02

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5320 MHz

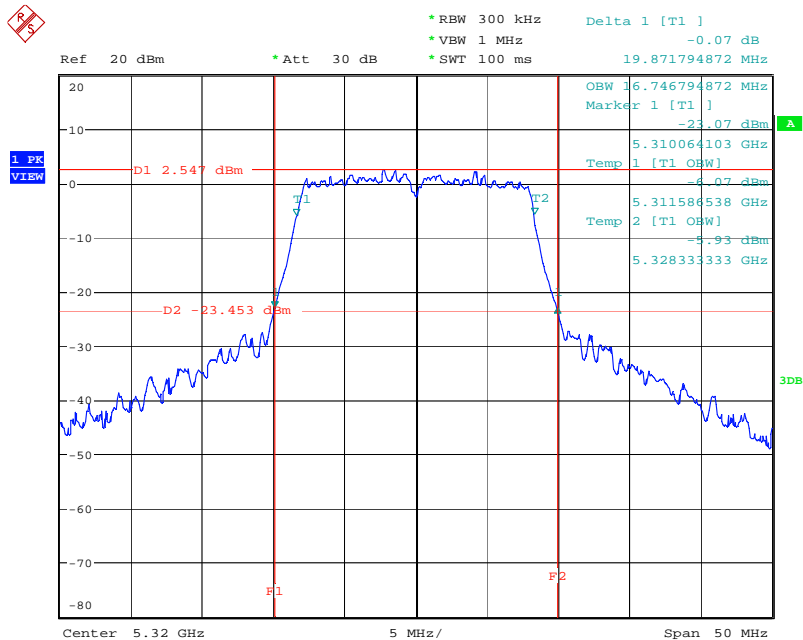


Date: 12.OCT.2009 14:28:09

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5500 MHz

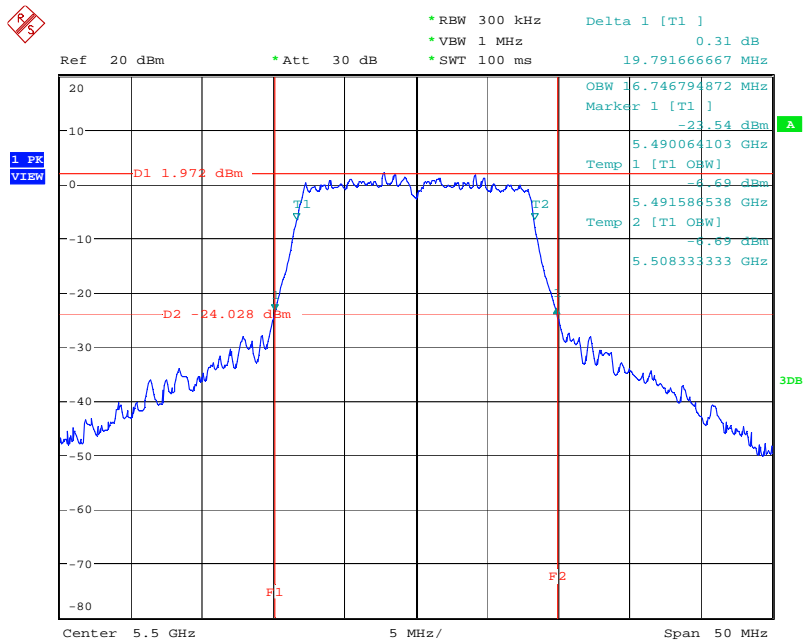

Date: 12.OCT.2009 14:29:42


26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5580 MHz

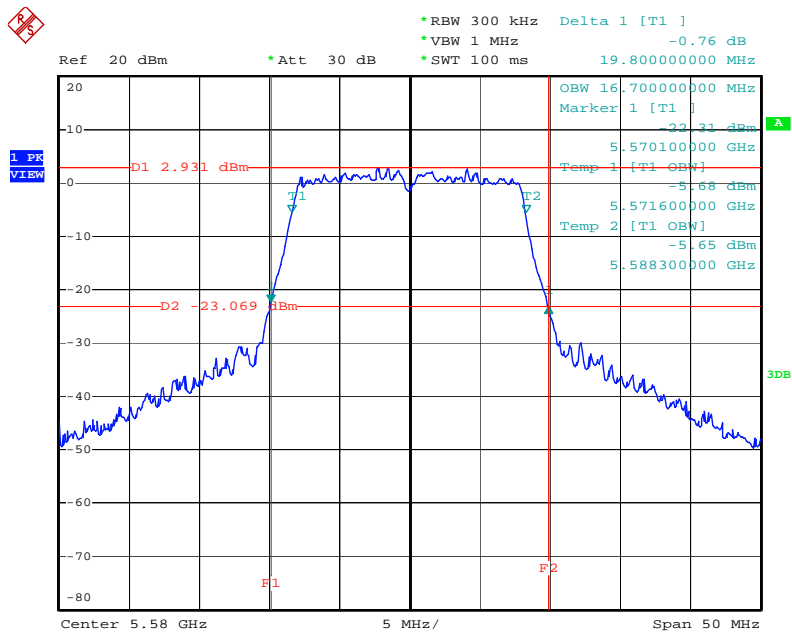

Date: 6.NOV.2009 00:46:03




26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5700 MHz

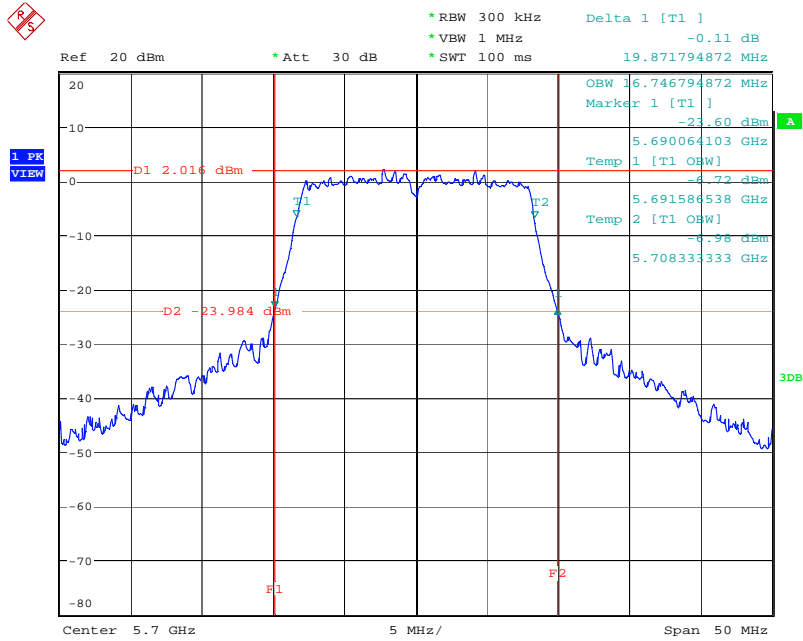


Date: 12.OCT.2009 14:35:20

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5180 MHz

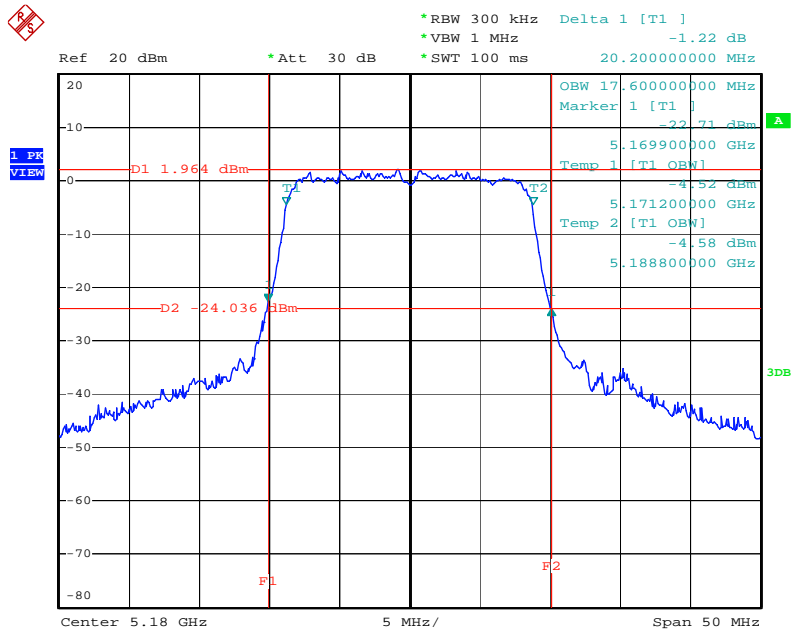


Date: 28.OCT.2009 23:46:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

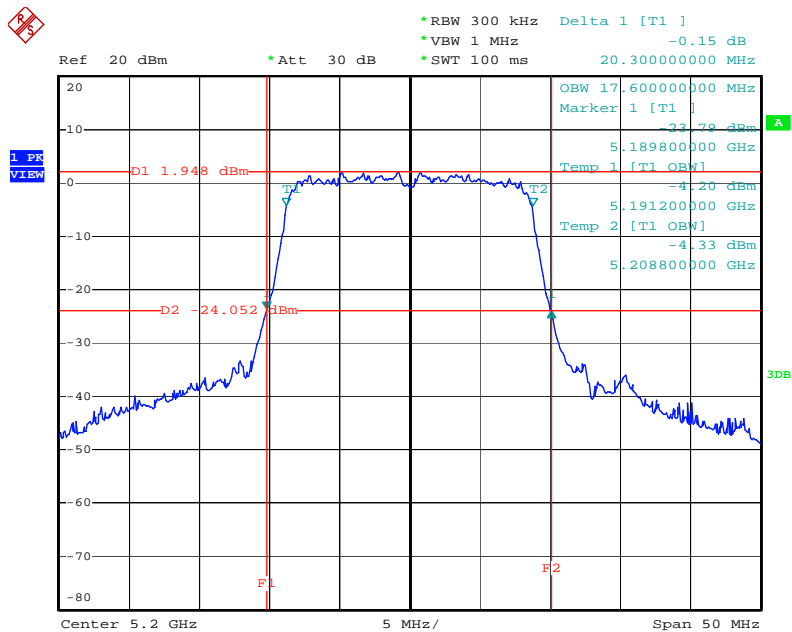


Date: 28.OCT.2009 23:59:08

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5240 MHz

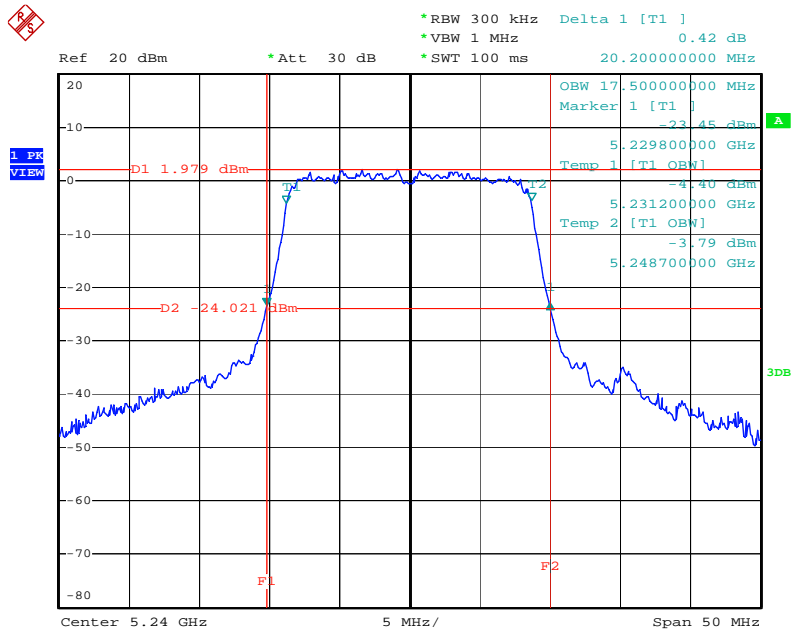


Date: 29.OCT.2009 00:01:41

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5260 MHz

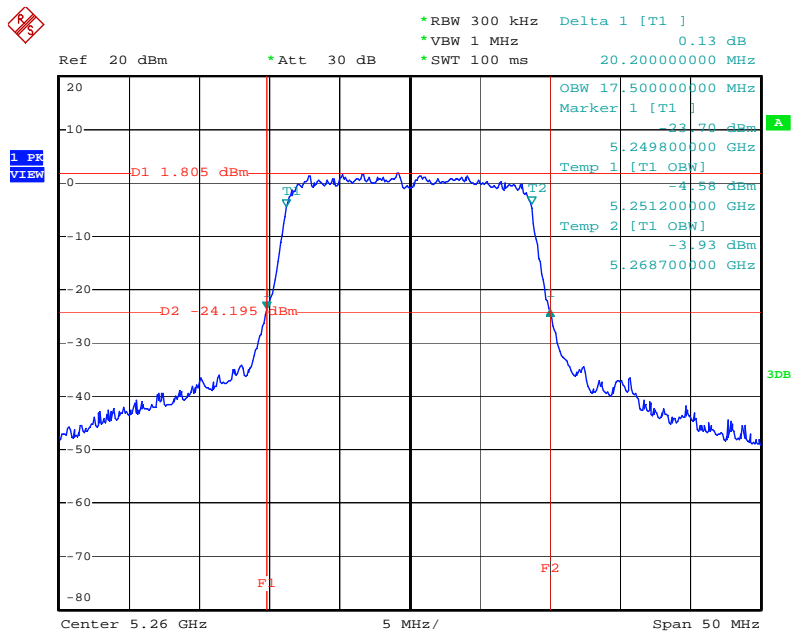


Date: 29.OCT.2009 00:10:44

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

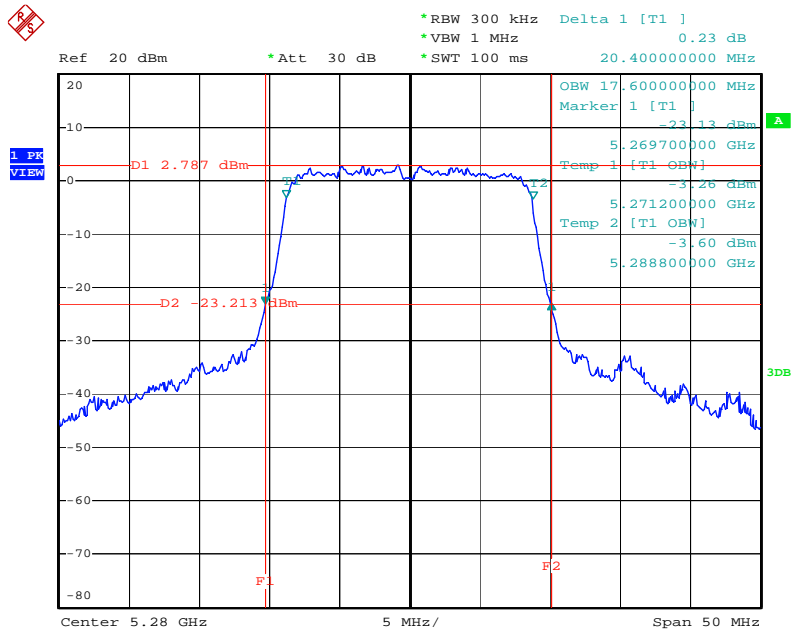


Date: 29.OCT.2009 00:13:42

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5320 MHz

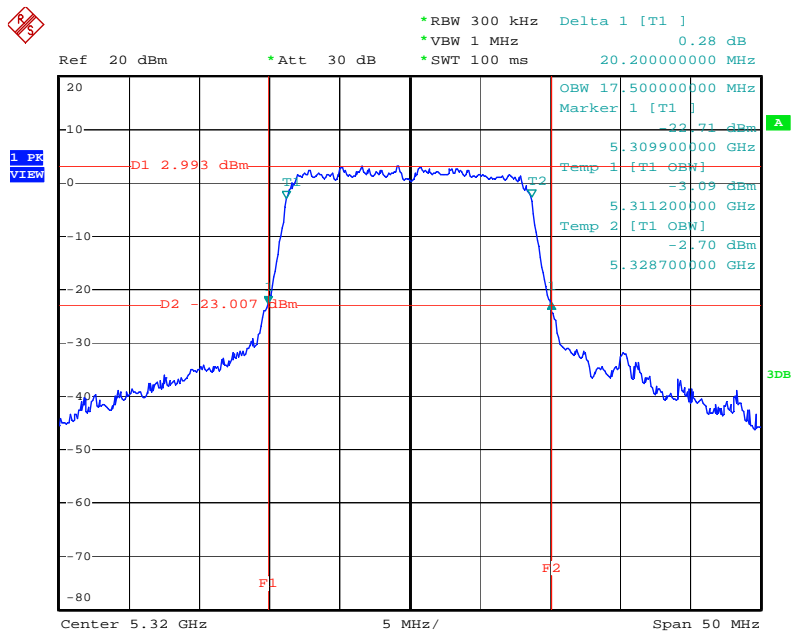


Date: 29.OCT.2009 00:16:42

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5500 MHz

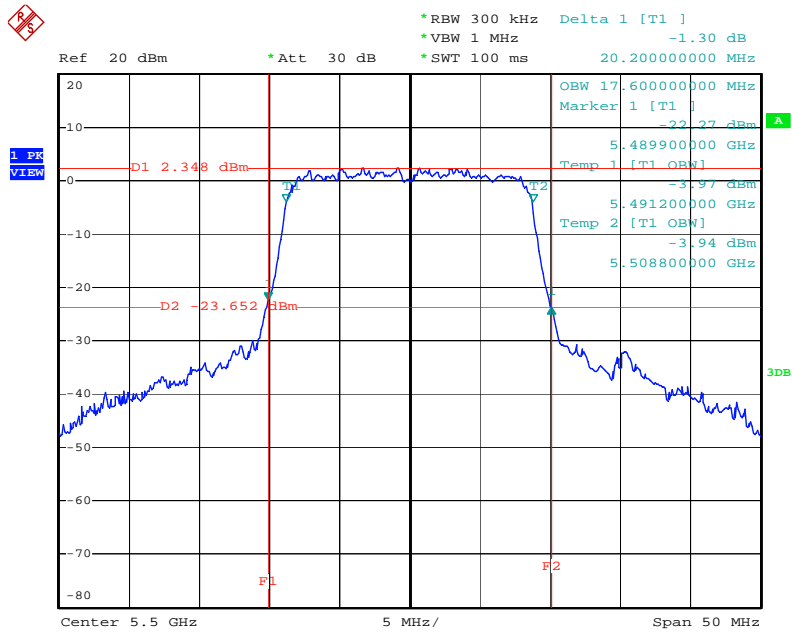


Date: 29.OCT.2009 00:18:33

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

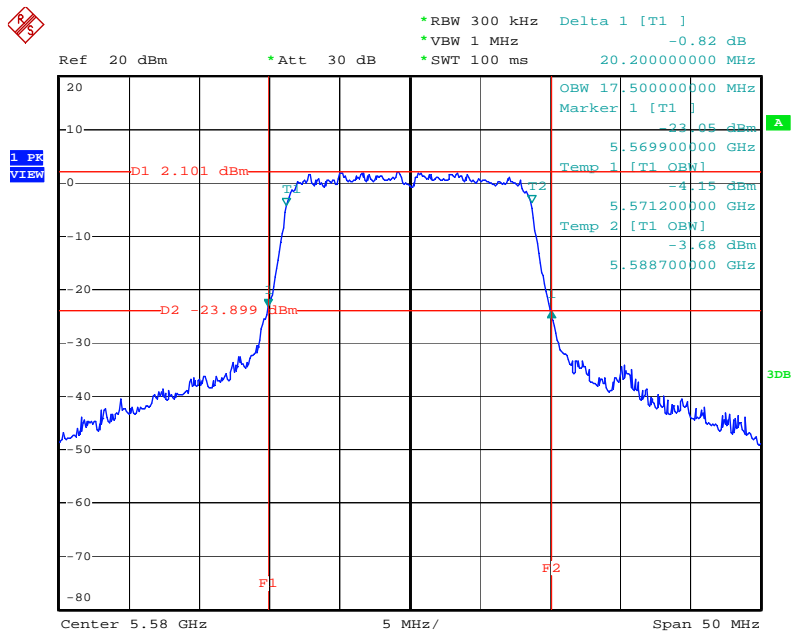


Date: 6.NOV.2009 00:56:48

26 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz)/ 5700 MHz

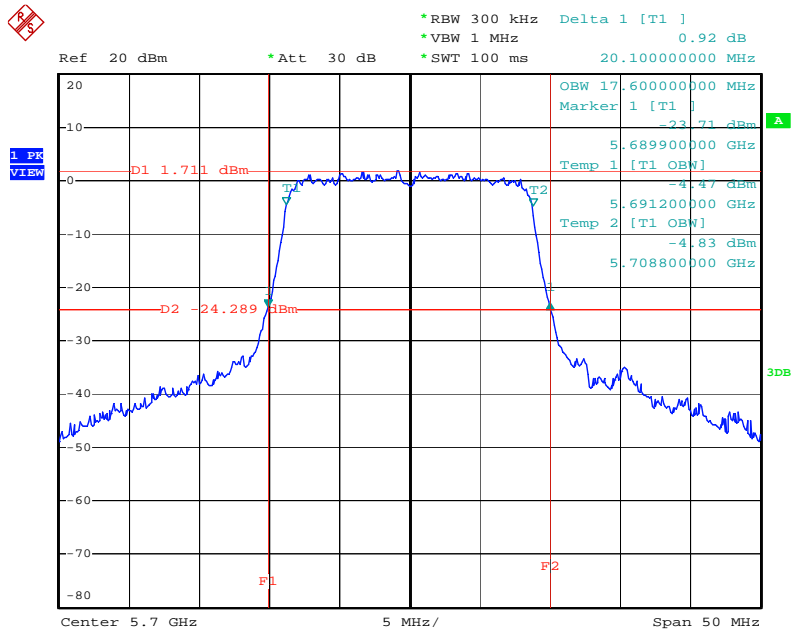


Date: 29.OCT.2009 00:21:11

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5190 MHz

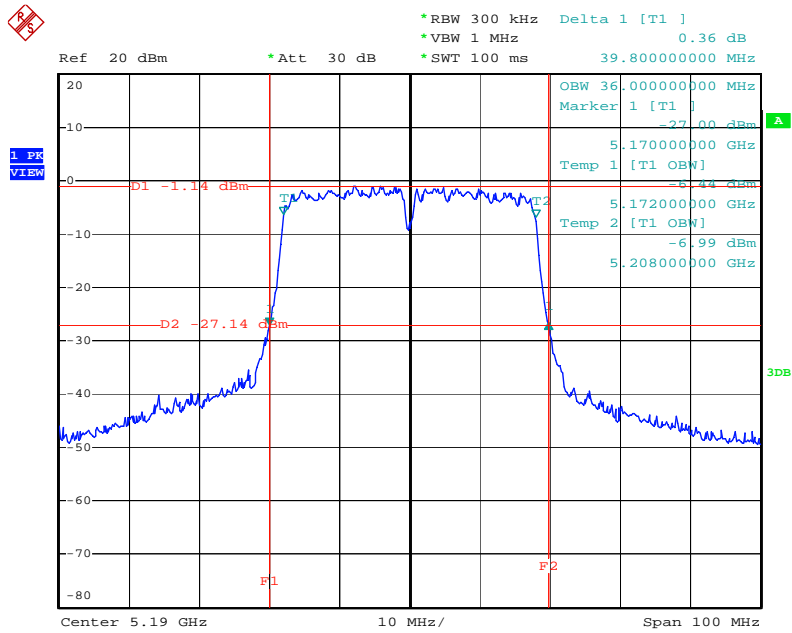


Date: 29.OCT.2009 01:11:39

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

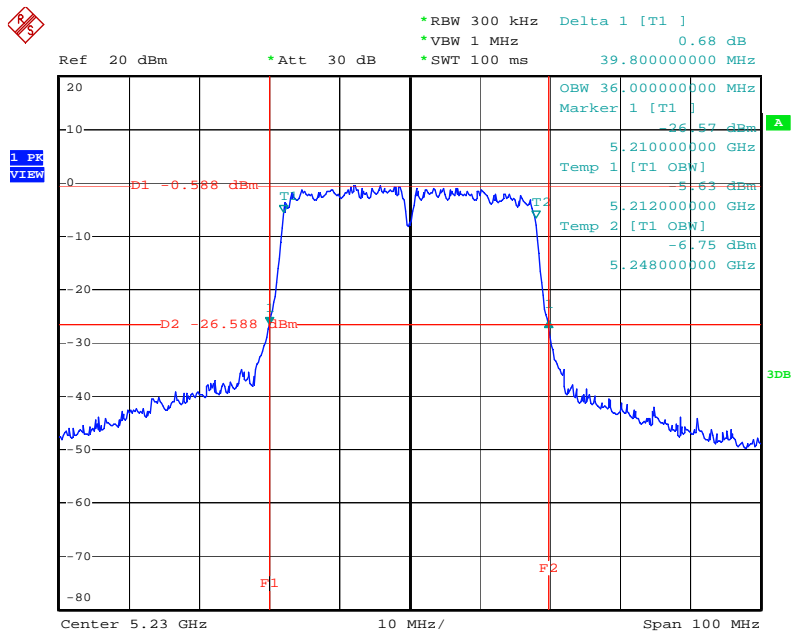


Date: 29.OCT.2009 01:12:58

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5270 MHz

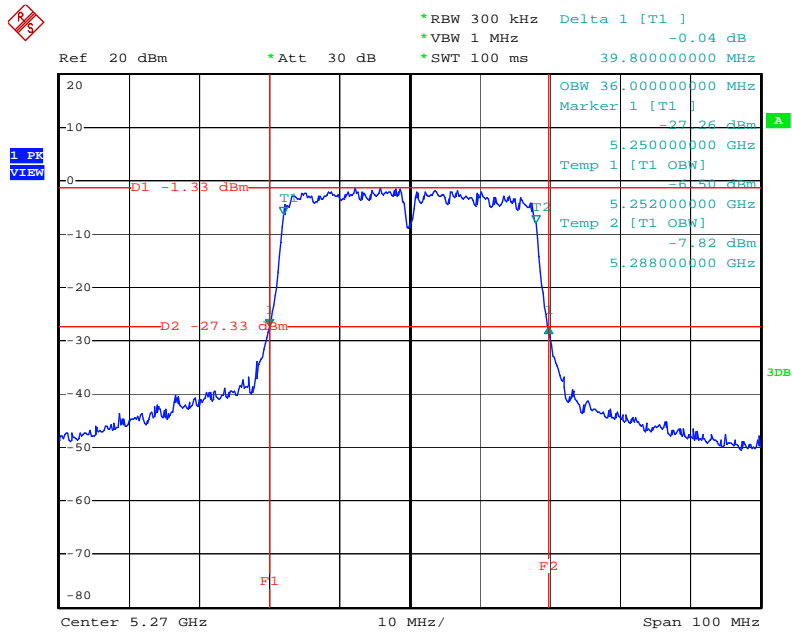

Date: 29.OCT.2009 01:14:02


26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

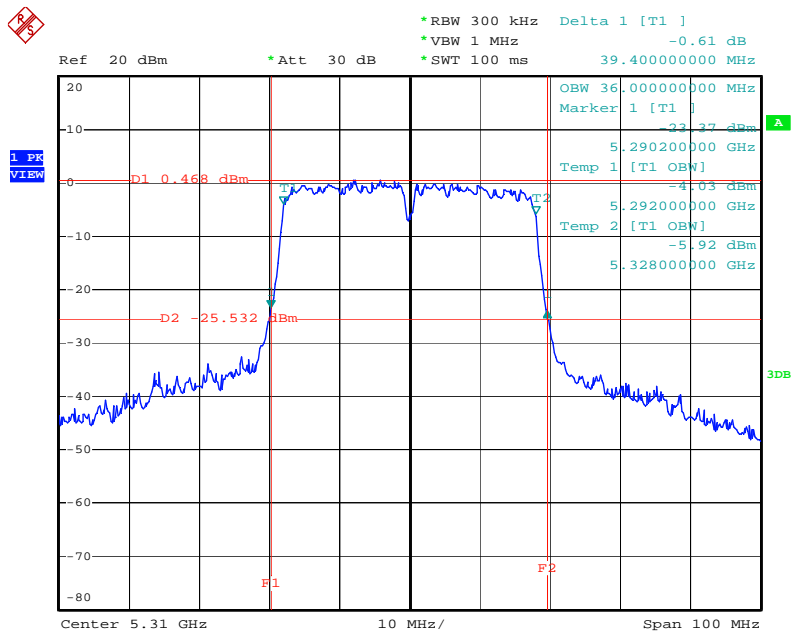

Date: 29.OCT.2009 01:15:09




26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz)/ 5510 MHz

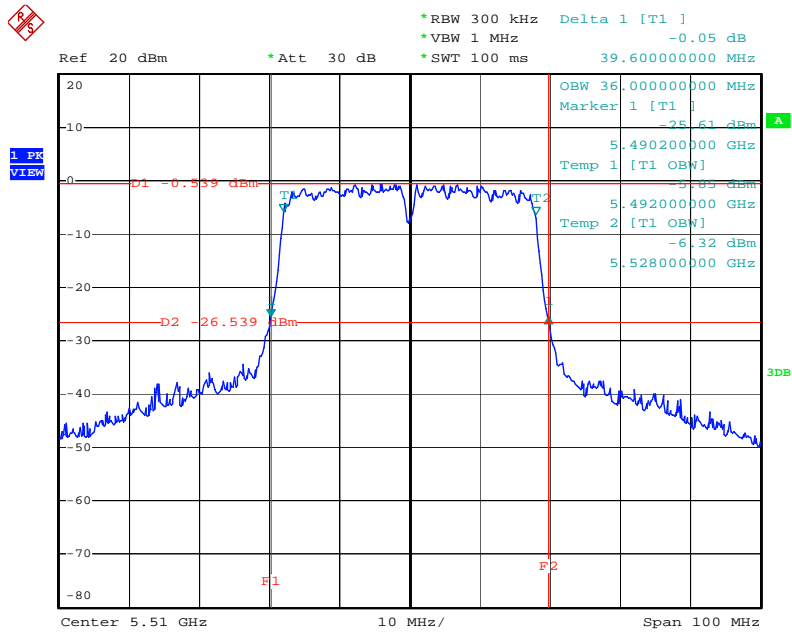


Date: 29.OCT.2009 01:16:19

26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

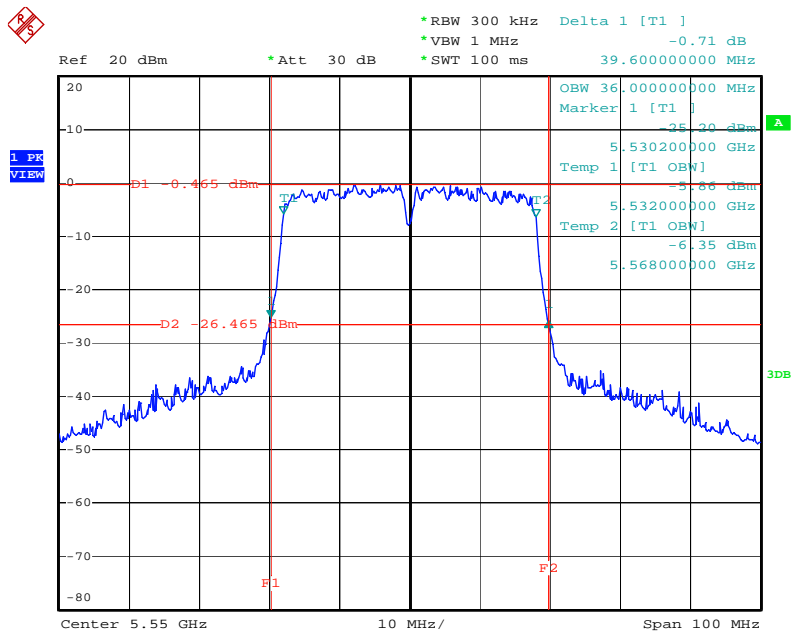

Date: 6.NOV.2009 01:01:18


26 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

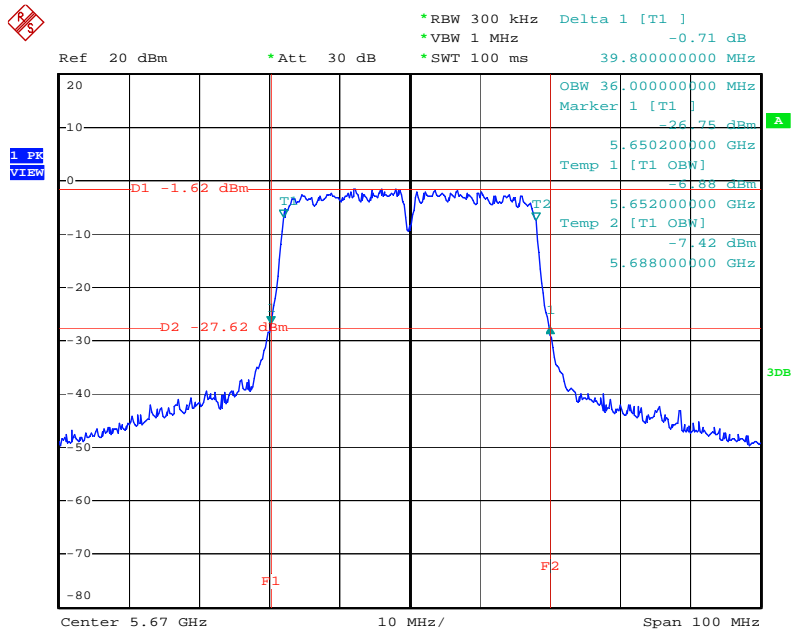

Date: 29.OCT.2009 01:18:37


For Two Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)/ 5180 MHz

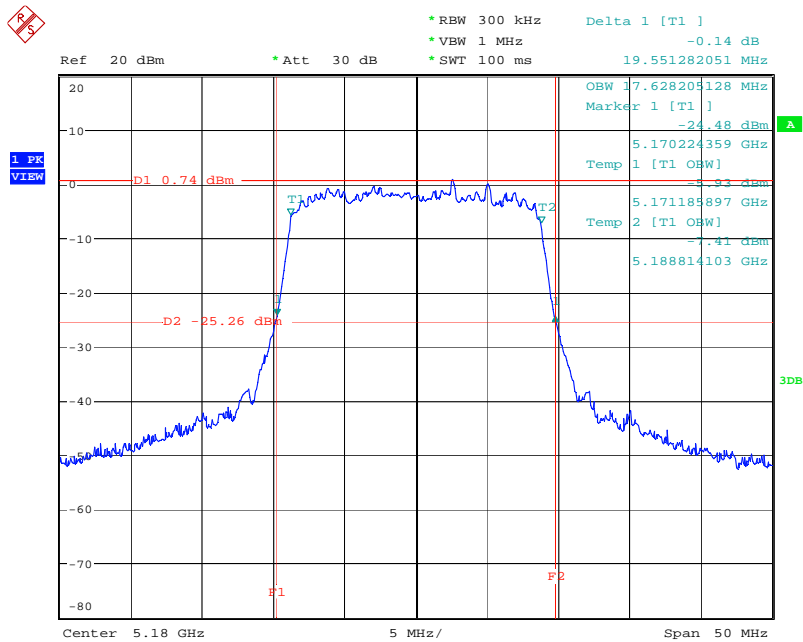


Date: 12.OCT.2009 20:26:55

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5200 MHz

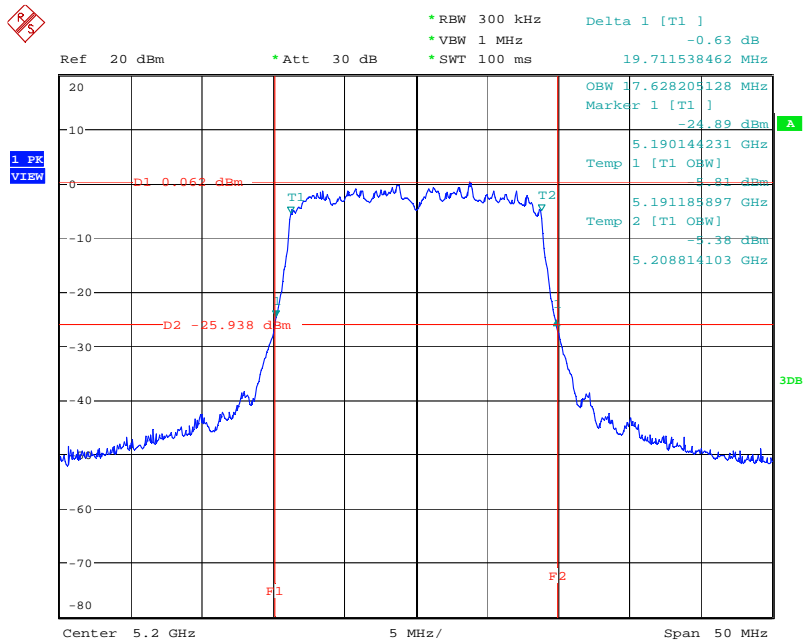


Date: 12.OCT.2009 20:30:41

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5240 MHz

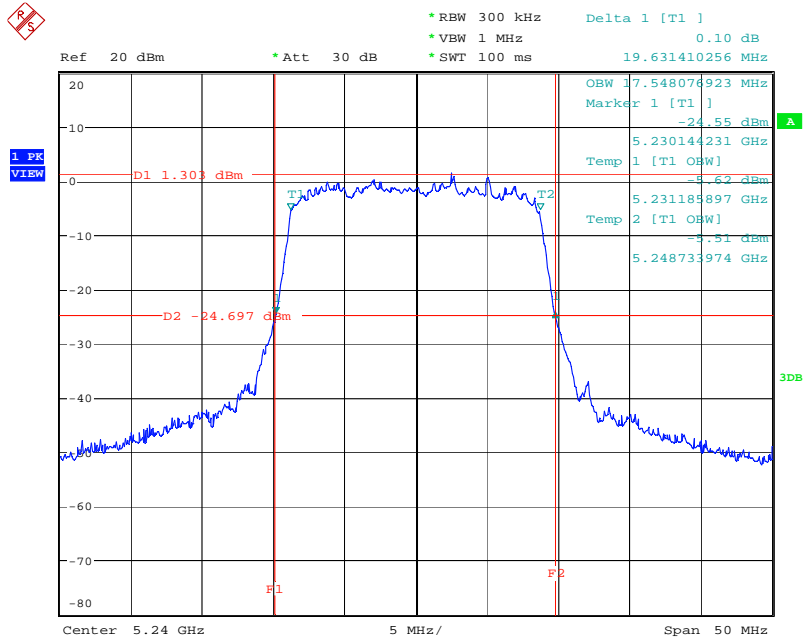


Date: 12.OCT.2009 20:33:28

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)/ 5260 MHz

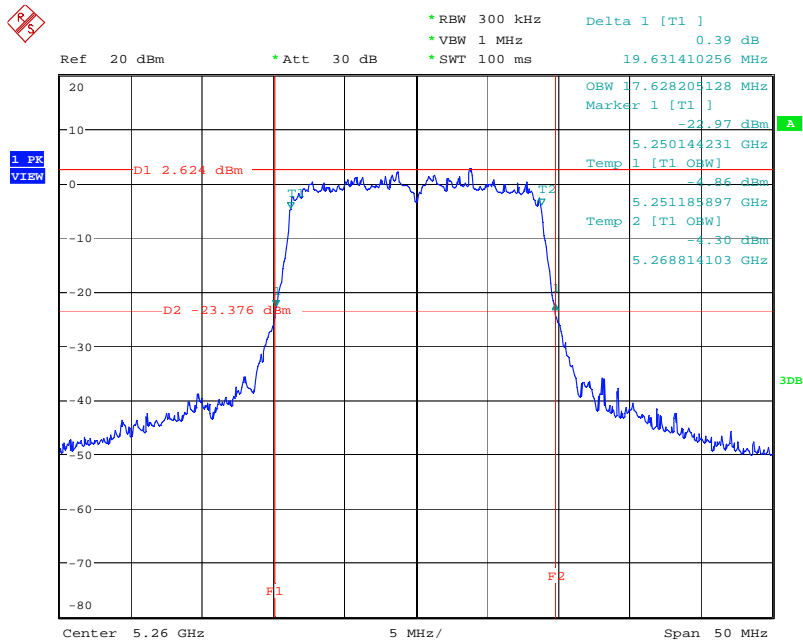


Date: 12.OCT.2009 17:38:29

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5280 MHz

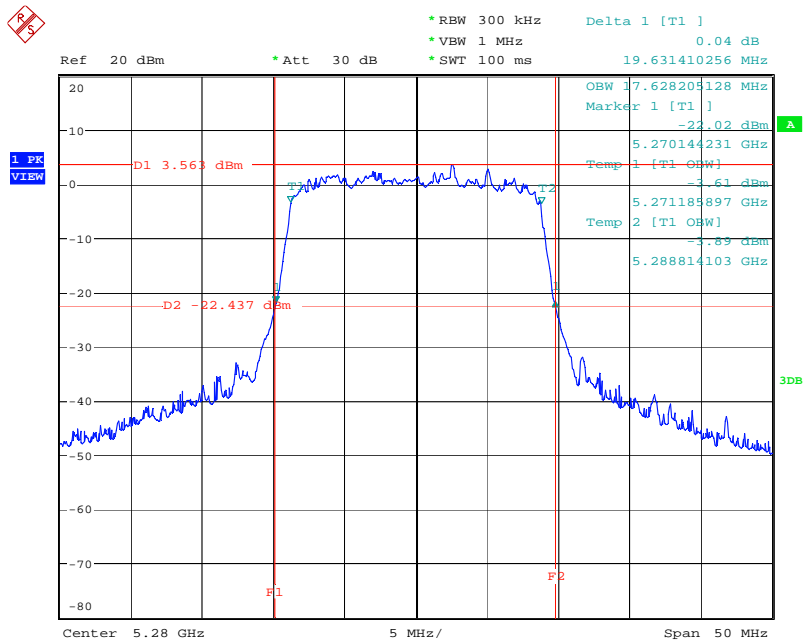


Date: 12.OCT.2009 17:39:37

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5320 MHz

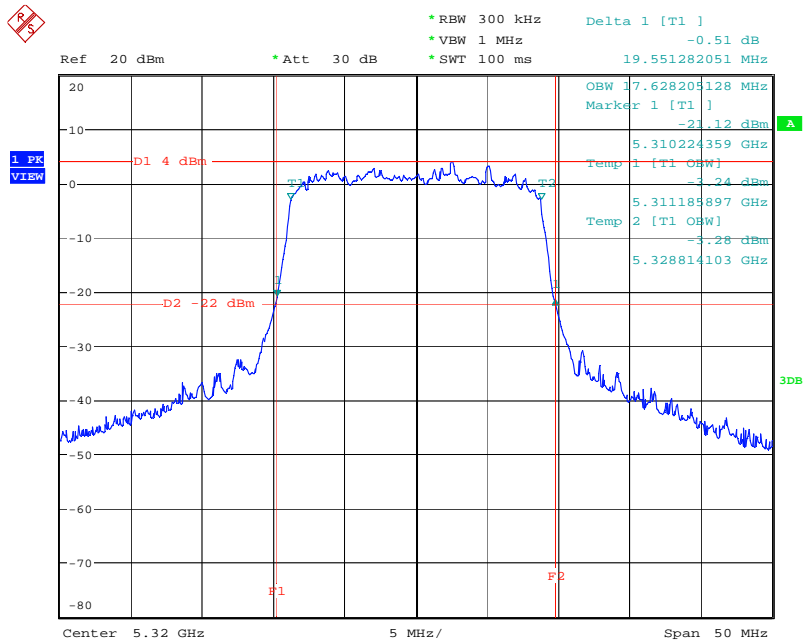


Date: 12.OCT.2009 17:40:38

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)/ 5500 MHz

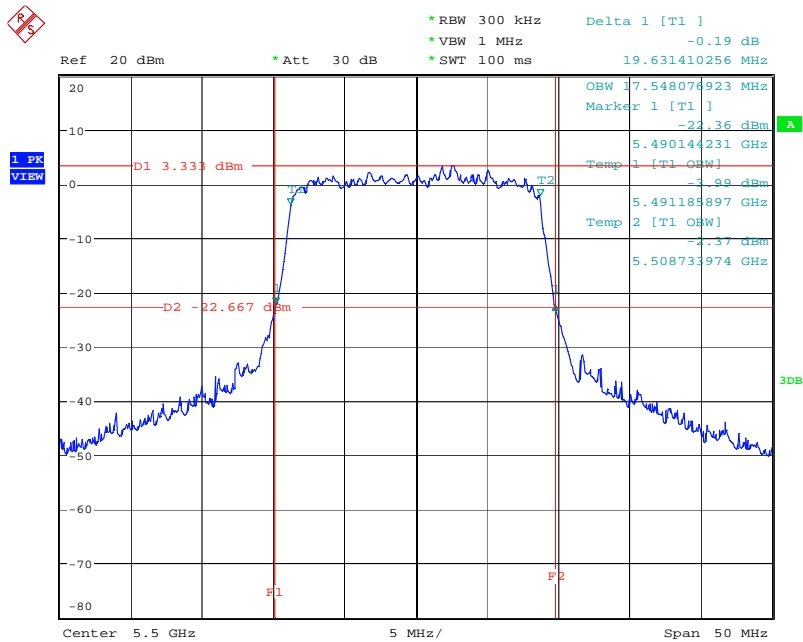


Date: 12.OCT.2009 17:41:43

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5580 MHz

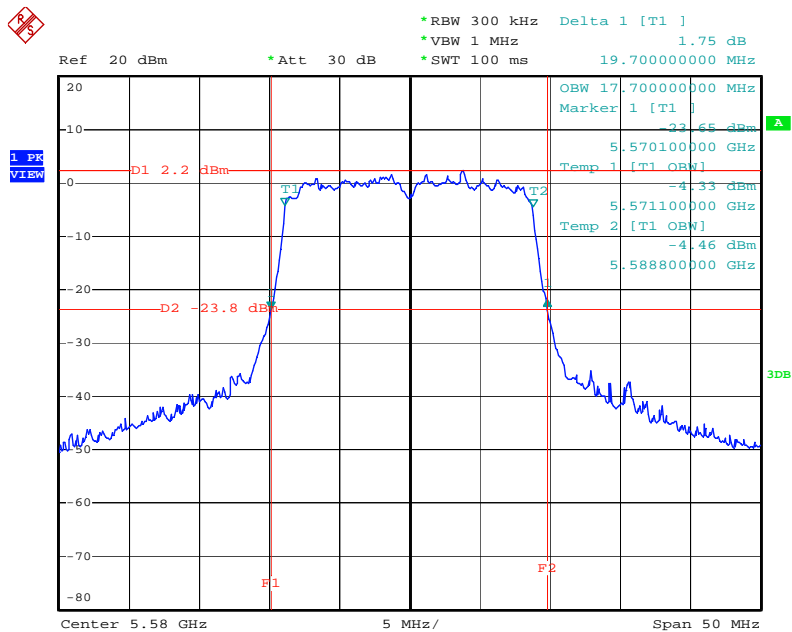


Date: 6.NOV.2009 01:33:21

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5700 MHz

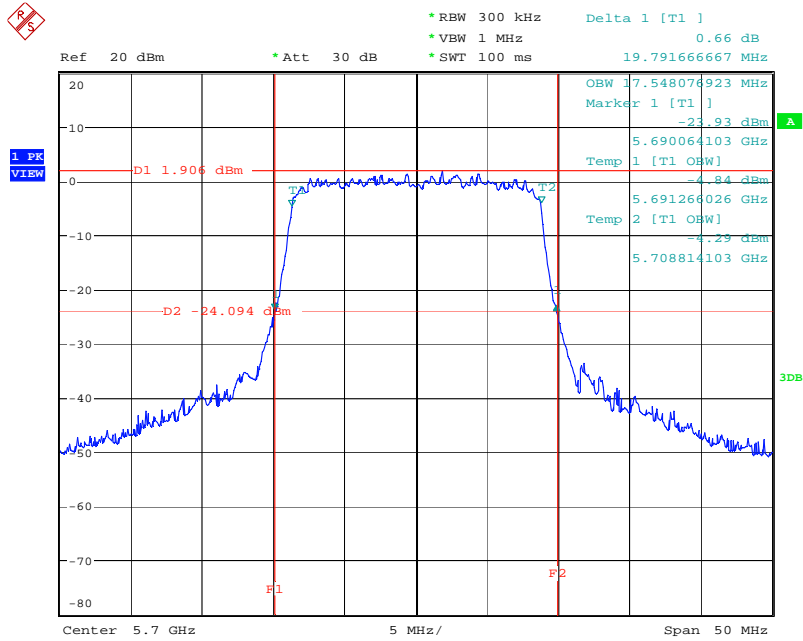


Date: 12.OCT.2009 17:44:01

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5190 MHz

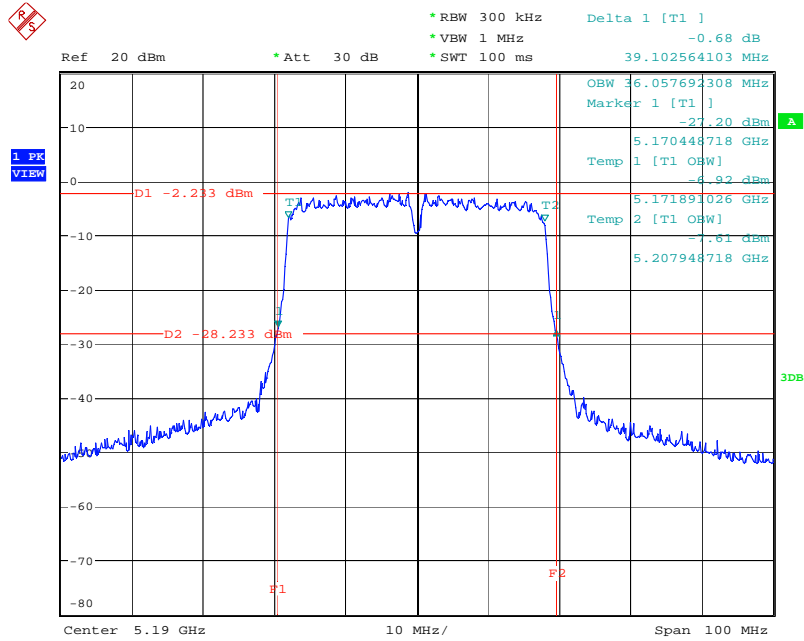

Date: 13.OCT.2009 09:53:29


26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5230 MHz

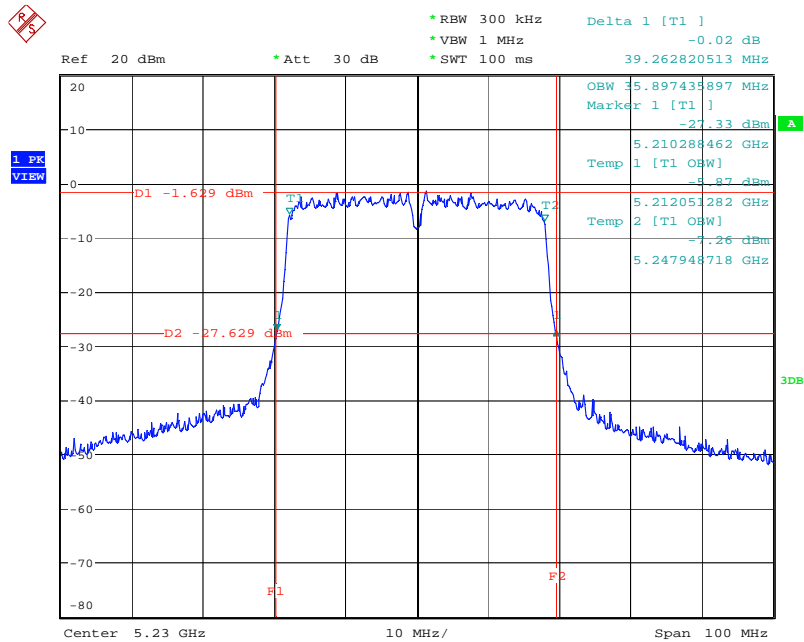

Date: 13.OCT.2009 09:54:33




26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5270 MHz

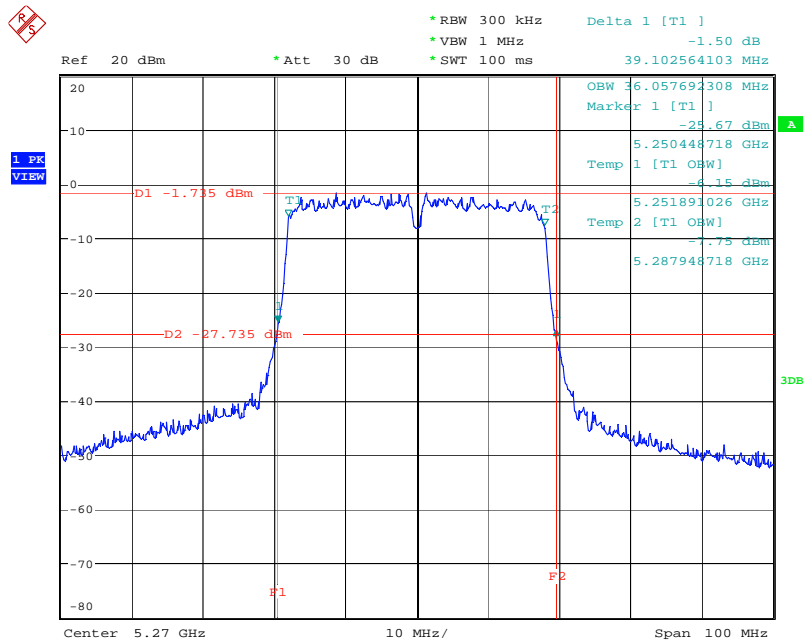


Date: 13.OCT.2009 09:47:10

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5310 MHz

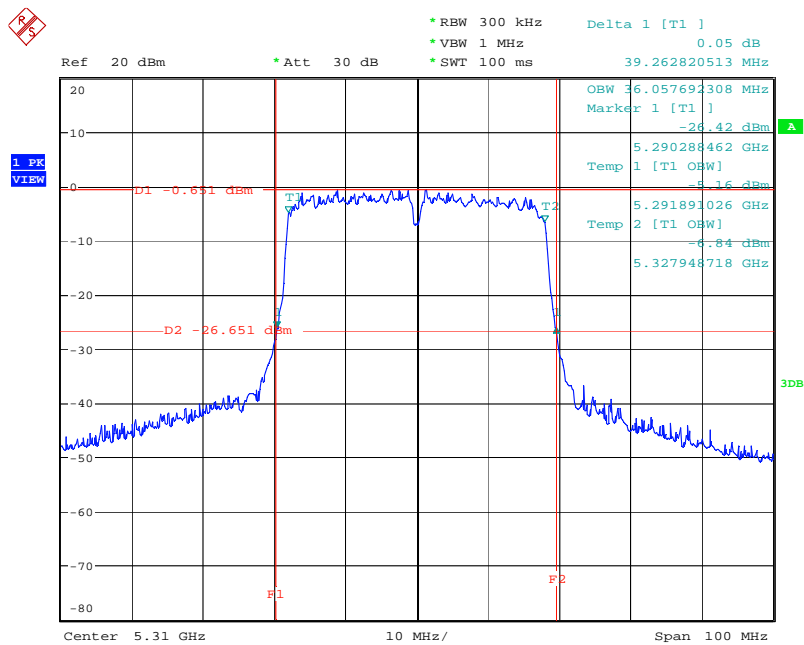


Date: 13.OCT.2009 09:48:18

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5510 MHz

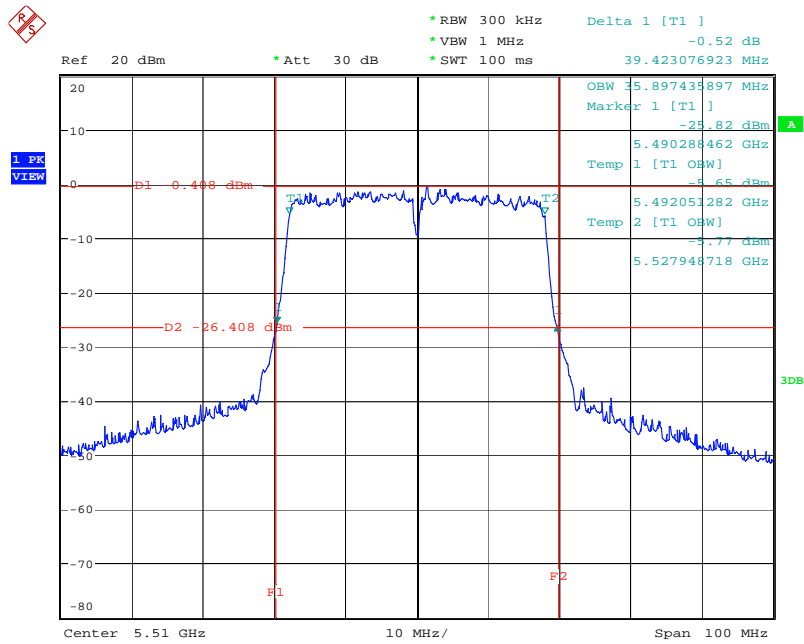


Date: 13.OCT.2009 09:49:24

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5550 MHz

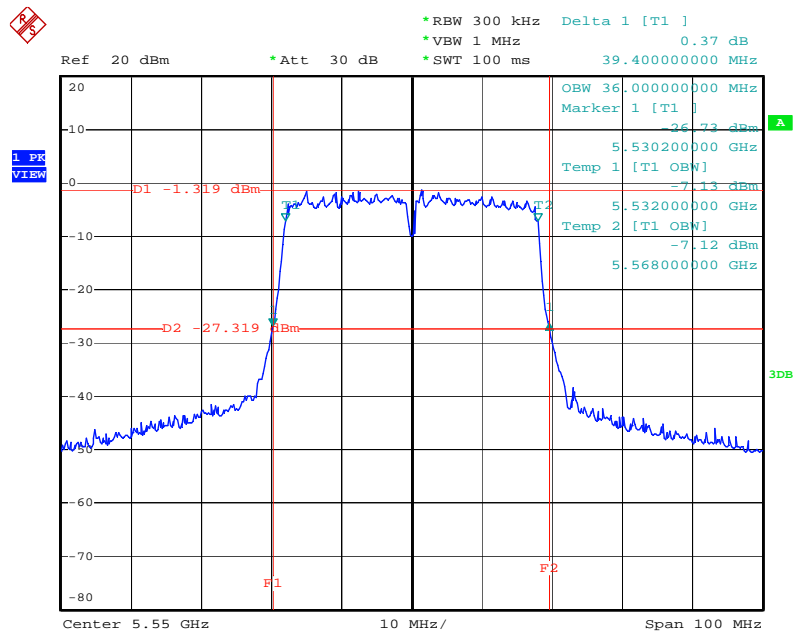

Date: 6.NOV.2009 01:37:00

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5670 MHz

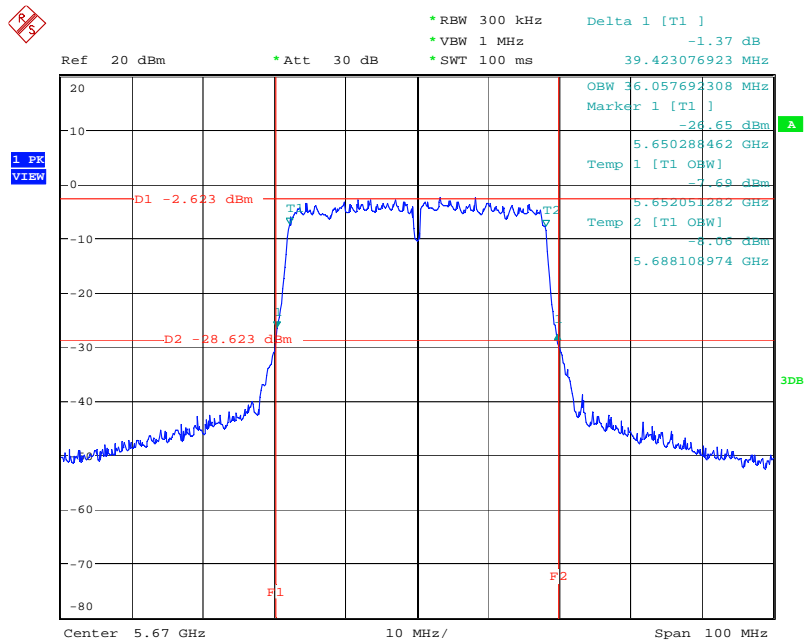

Date: 13.OCT.2009 09:51:43

**3.3 Maximum Conducted Output Power Measurement**

**3.3.1 Limit**

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or 17 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.


**3.3.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| <b>Spectrum Parameter</b> | <b>Setting</b>   |
|---------------------------|--|
| Attenuation               | Auto   |
| Span Frequency            | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                        | 1000 kHz   |
| VB                        | 300 kHz  |
| Detector                  | Sample   |
| Trace                     | Max Hold   |
| Sweep Time                | 60s  |

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with method #3 of FCC Public Notice DA-02-2138.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

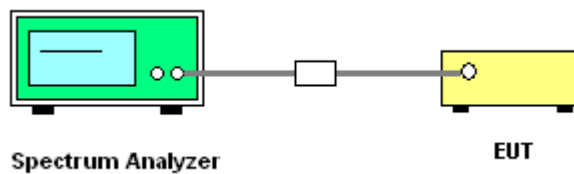**3.3.4 Test Setup Layout****3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Maximum Conducted Output Power**

|                        |               |                      |           |
|------------------------|---------------|----------------------|-----------|
| <b>Final Test Date</b> | Oct. 29, 2009 | <b>Test Site No.</b> | TH01-HY   |
| <b>Temperature</b>     | 26            | <b>Humidity</b>      | 56%       |
| <b>Test Engineer</b>   | Duncan        | <b>Configuration</b> | 802.11a/n |

**For Single Chain:**

**Configuration of IEEE 802.11a**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 36      | 5180 MHz  | 13.05                 | 17.00            | <b>Complies</b> |
| 40      | 5200 MHz  | 12.77                 | 17.00            | <b>Complies</b> |
| 48      | 5240 MHz  | 12.50                 | 17.00            | <b>Complies</b> |
| 52      | 5260 MHz  | 12.06                 | 17.00            | <b>Complies</b> |
| 56      | 5280 MHz  | 13.02                 | 17.00            | <b>Complies</b> |
| 64      | 5320 MHz  | 13.15                 | 17.00            | <b>Complies</b> |
| 100     | 5500 MHz  | 12.73                 | 24.00            | <b>Complies</b> |
| 116     | 5580 MHz  | 13.49                 | 24.00            | <b>Complies</b> |
| 140     | 5700 MHz  | 12.70                 | 24.00            | <b>Complies</b> |

**Configuration IEEE 802.11n (20MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 36      | 5180 MHz  | 13.31                 | 17.00            | <b>Complies</b> |
| 40      | 5200 MHz  | 13.27                 | 17.00            | <b>Complies</b> |
| 48      | 5240 MHz  | 13.34                 | 17.00            | <b>Complies</b> |
| 52      | 5260 MHz  | 13.11                 | 17.00            | <b>Complies</b> |
| 56      | 5280 MHz  | 14.09                 | 17.00            | <b>Complies</b> |
| 64      | 5320 MHz  | 14.35                 | 17.00            | <b>Complies</b> |
| 100     | 5500 MHz  | 13.71                 | 24.00            | <b>Complies</b> |
| 116     | 5580 MHz  | 13.49                 | 24.00            | <b>Complies</b> |
| 140     | 5700 MHz  | 13.07                 | 24.00            | <b>Complies</b> |

**Configuration IEEE 802.11n (40MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 38      | 5190 MHz  | 13.21                 | 17.00            | <b>Complies</b> |
| 46      | 5230 MHz  | 13.57                 | 17.00            | <b>Complies</b> |
| 54      | 5270 MHz  | 12.77                 | 17.00            | <b>Complies</b> |
| 62      | 5310 MHz  | 14.62                 | 17.00            | <b>Complies</b> |
| 102     | 5510 MHz  | 13.70                 | 24.00            | <b>Complies</b> |
| 110     | 5550 MHz  | 13.97                 | 24.00            | <b>Complies</b> |
| 134     | 5670 MHz  | 12.72                 | 24.00            | <b>Complies</b> |

**For Two Chain:**

**Configuration IEEE 802.11n Ant. 1 (20MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 36      | 5180 MHz  | 10.75                 | 17.00            | Complies |
| 40      | 5200 MHz  | 10.51                 | 17.00            | Complies |
| 48      | 5240 MHz  | 11.06                 | 17.00            | Complies |
| 52      | 5260 MHz  | 12.23                 | 17.00            | Complies |
| 56      | 5280 MHz  | 13.32                 | 17.00            | Complies |
| 64      | 5320 MHz  | 13.42                 | 17.00            | Complies |
| 100     | 5500 MHz  | 13.19                 | 24.00            | Complies |
| 116     | 5580 MHz  | 13.56                 | 24.00            | Complies |
| 140     | 5700 MHz  | 12.83                 | 24.00            | Complies |

**Configuration IEEE 802.11n Ant. 2 (20MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 36      | 5180 MHz  | 10.41                 | 17.00            | Complies |
| 40      | 5200 MHz  | 10.72                 | 17.00            | Complies |
| 48      | 5240 MHz  | 11.08                 | 17.00            | Complies |
| 52      | 5260 MHz  | 13.16                 | 17.00            | Complies |
| 56      | 5280 MHz  | 12.75                 | 17.00            | Complies |
| 64      | 5320 MHz  | 13.86                 | 17.00            | Complies |
| 100     | 5500 MHz  | 13.52                 | 24.00            | Complies |
| 116     | 5580 MHz  | 13.65                 | 24.00            | Complies |
| 140     | 5700 MHz  | 11.91                 | 24.00            | Complies |

**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 36      | 5180 MHz  | 13.59                 | 17.00            | Complies |
| 40      | 5200 MHz  | 13.63                 | 17.00            | Complies |
| 48      | 5240 MHz  | 14.08                 | 17.00            | Complies |
| 52      | 5260 MHz  | 15.73                 | 17.00            | Complies |
| 56      | 5280 MHz  | 16.06                 | 17.00            | Complies |
| 64      | 5320 MHz  | 16.66                 | 17.00            | Complies |
| 100     | 5500 MHz  | 16.37                 | 24.00            | Complies |
| 116     | 5580 MHz  | 16.62                 | 24.00            | Complies |
| 140     | 5700 MHz  | 15.40                 | 24.00            | Complies |

**Configuration IEEE 802.11n Ant. 1 (40MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 38      | 5190 MHz  | 12.34                 | 17.00            | <b>Complies</b> |
| 46      | 5230 MHz  | 12.69                 | 17.00            | <b>Complies</b> |
| 54      | 5270 MHz  | 11.96                 | 17.00            | <b>Complies</b> |
| 62      | 5310 MHz  | 13.71                 | 17.00            | <b>Complies</b> |
| 102     | 5510 MHz  | 13.03                 | 24.00            | <b>Complies</b> |
| 110     | 5550 MHz  | 12.83                 | 24.00            | <b>Complies</b> |
| 134     | 5670 MHz  | 12.98                 | 24.00            | <b>Complies</b> |

**Configuration IEEE 802.11n Ant. 2 (40MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 38      | 5190 MHz  | 12.27                 | 17.00            | <b>Complies</b> |
| 46      | 5230 MHz  | 12.76                 | 17.00            | <b>Complies</b> |
| 54      | 5270 MHz  | 12.79                 | 17.00            | <b>Complies</b> |
| 62      | 5310 MHz  | 13.79                 | 17.00            | <b>Complies</b> |
| 102     | 5510 MHz  | 13.90                 | 24.00            | <b>Complies</b> |
| 110     | 5550 MHz  | 13.09                 | 24.00            | <b>Complies</b> |
| 134     | 5670 MHz  | 11.62                 | 24.00            | <b>Complies</b> |


**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz)**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result          |
|---------|-----------|-----------------------|------------------|-----------------|
| 38      | 5190 MHz  | 15.32                 | 17.00            | <b>Complies</b> |
| 46      | 5230 MHz  | 15.74                 | 17.00            | <b>Complies</b> |
| 54      | 5270 MHz  | 15.41                 | 17.00            | <b>Complies</b> |
| 62      | 5310 MHz  | 16.76                 | 17.00            | <b>Complies</b> |
| 102     | 5510 MHz  | 16.50                 | 24.00            | <b>Complies</b> |
| 110     | 5550 MHz  | 15.97                 | 24.00            | <b>Complies</b> |
| 134     | 5670 MHz  | 15.36                 | 24.00            | <b>Complies</b> |




For Single Chain:

Channel Output Power Plot on Configuration IEEE 802.11a / 5180 MHz

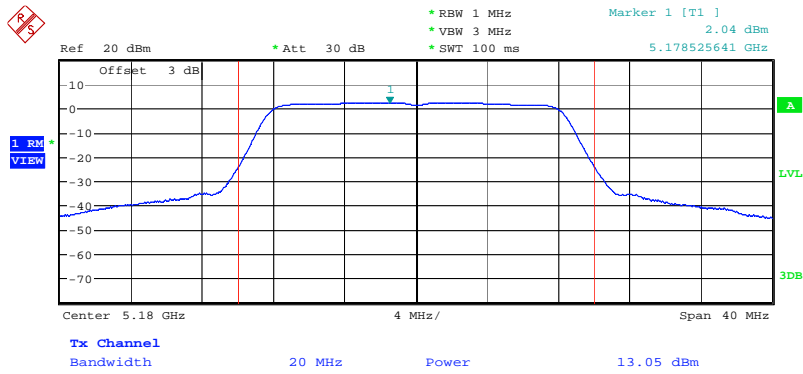


Date: 12.OCT.2009 14:21:38

Channel Output Power Plot on Configuration IEEE 802.11a / 5200 MHz

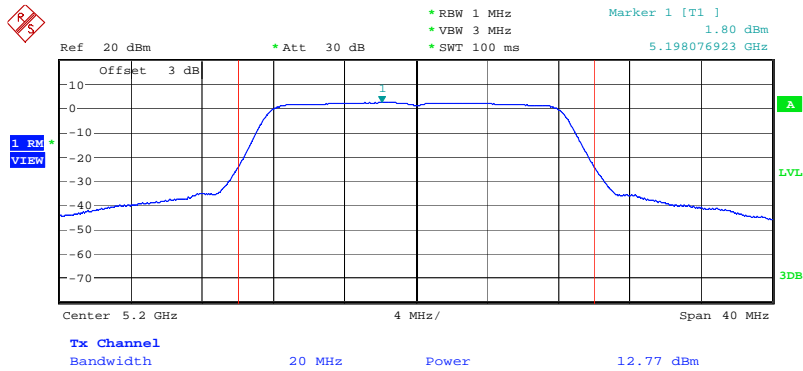


Date: 12.OCT.2009 14:23:13

Channel Output Power Plot on Configuration IEEE 802.11a / 5240 MHz

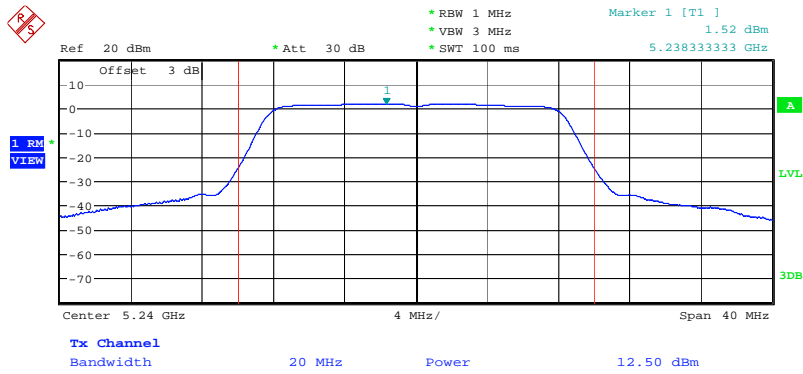


Date: 12.OCT.2009 14:24:22

Channel Output Power Plot on Configuration IEEE 802.11a / 5260 MHz

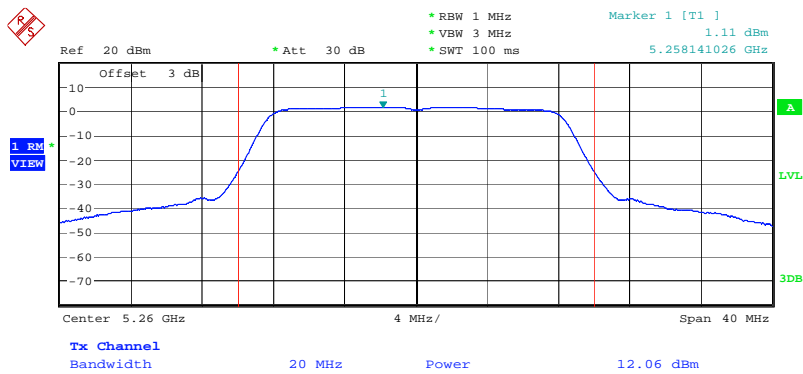


Date: 12.OCT.2009 14:25:32

Channel Output Power Plot on Configuration IEEE 802.11a / 5280 MHz

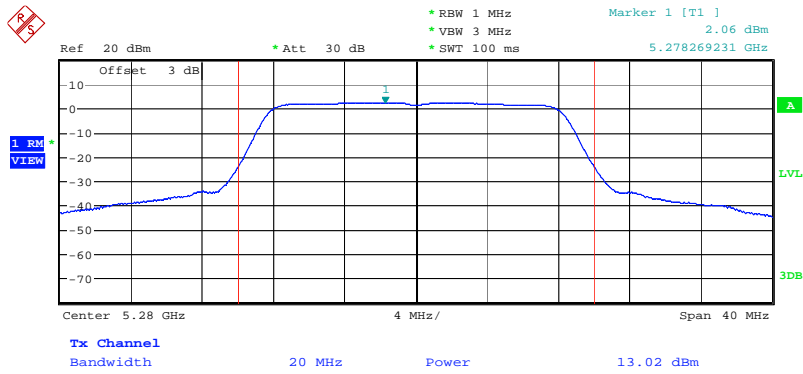


Date: 12.OCT.2009 14:26:43

Channel Output Power Plot on Configuration IEEE 802.11a / 5320 MHz

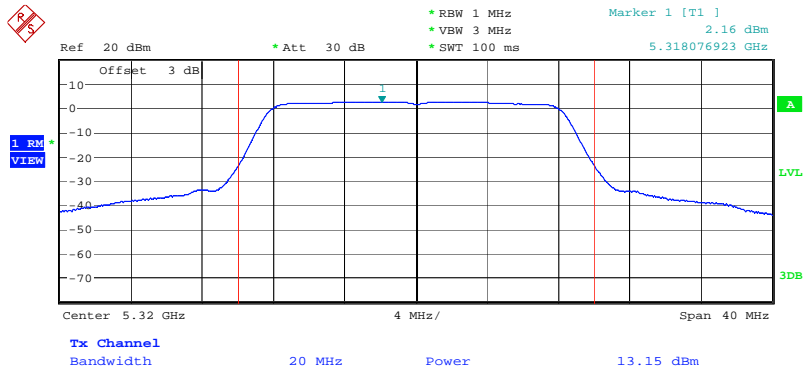


Date: 12.OCT.2009 14:27:50

Channel Output Power Plot on Configuration IEEE 802.11a / 5500 MHz

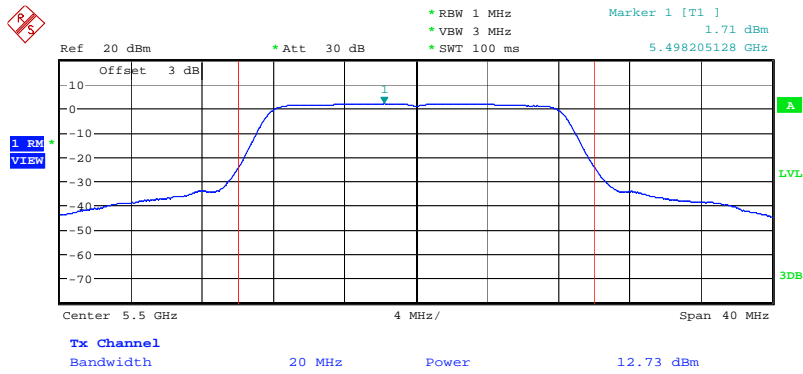


Date: 12.OCT.2009 14:29:23

Channel Output Power Plot on Configuration IEEE 802.11a / 5580 MHz

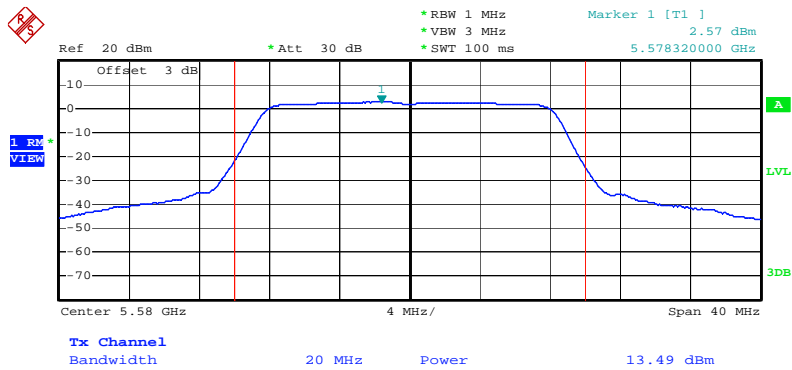


Date: 6.NOV.2009 00:45:43

Channel Output Power Plot on Configuration IEEE 802.11a / 5700 MHz

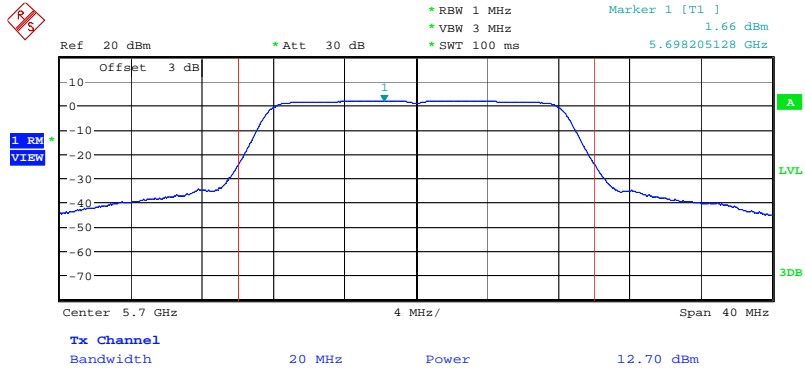


Date: 12.OCT.2009 14:35:02

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

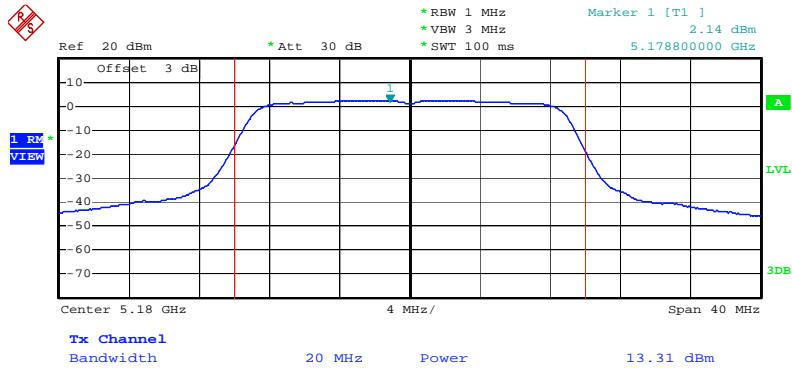


Date: 28.OCT.2009 23:45:44

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

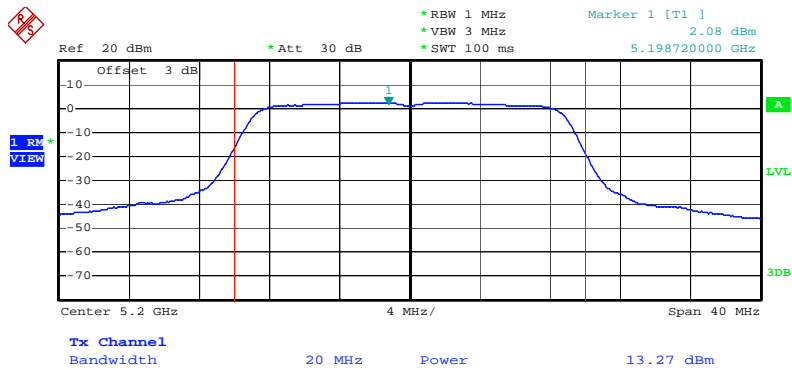


Date: 28.OCT.2009 23:58:48

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

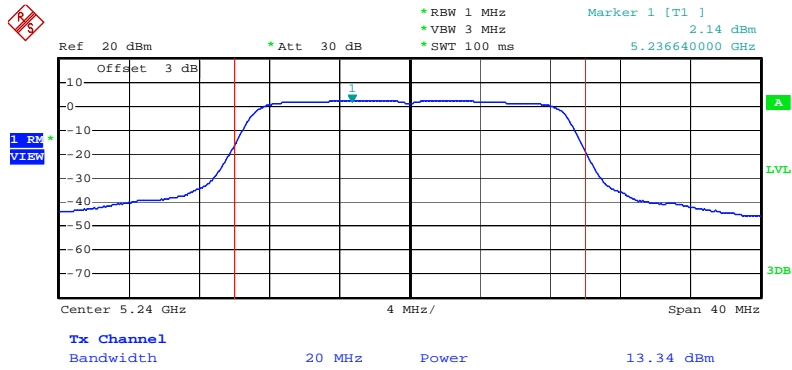


Date: 29.OCT.2009 00:01:21

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

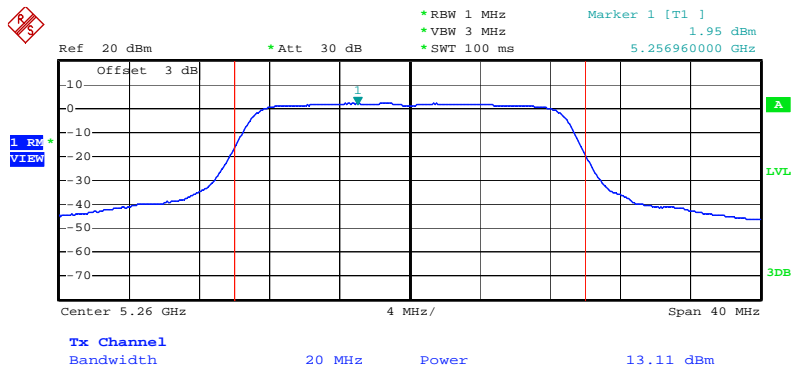


Date: 29.OCT.2009 00:10:25

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

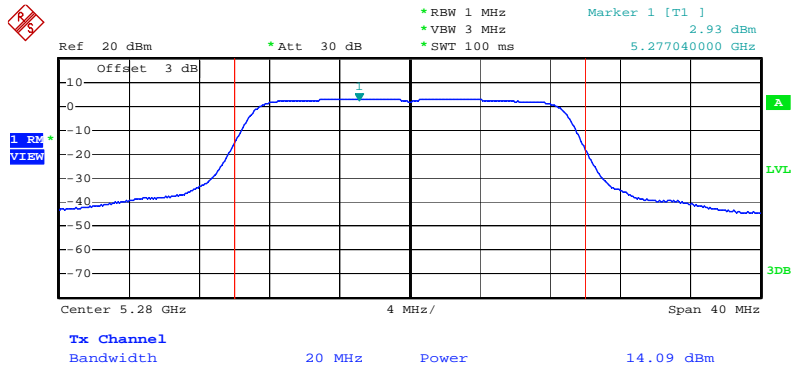

Date: 29.OCT.2009 00:13:23


Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

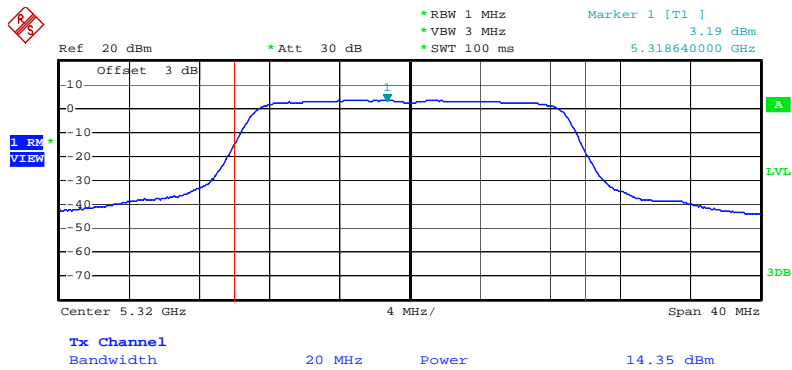

Date: 29.OCT.2009 00:16:23




Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

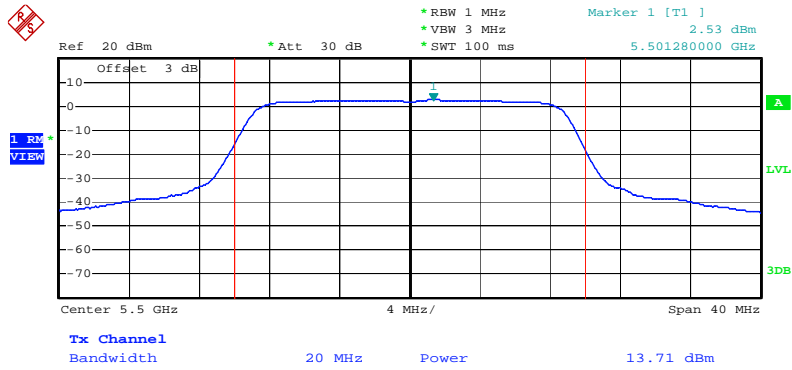


Date: 29.OCT.2009 00:18:14

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

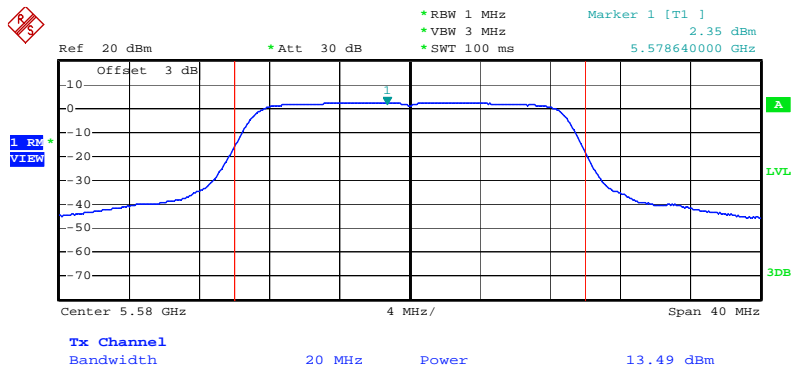


Date: 6.NOV.2009 00:56:28

Channel Output Power Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

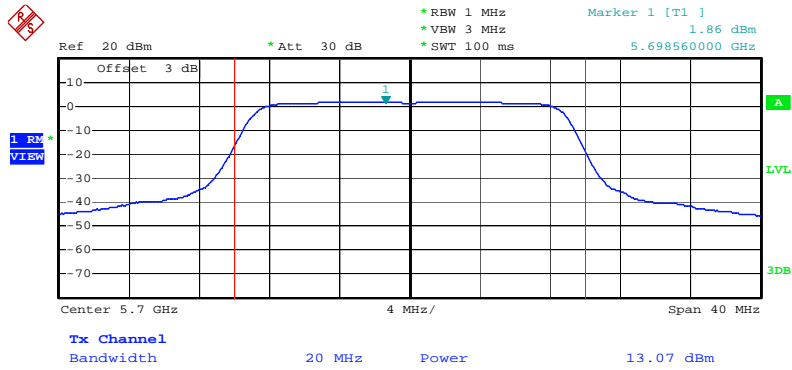


Date: 29.OCT.2009 00:20:52

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

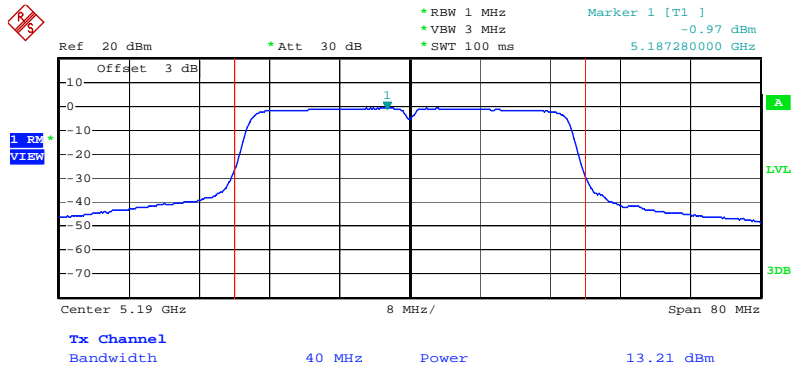


Date: 29.OCT.2009 01:11:19

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

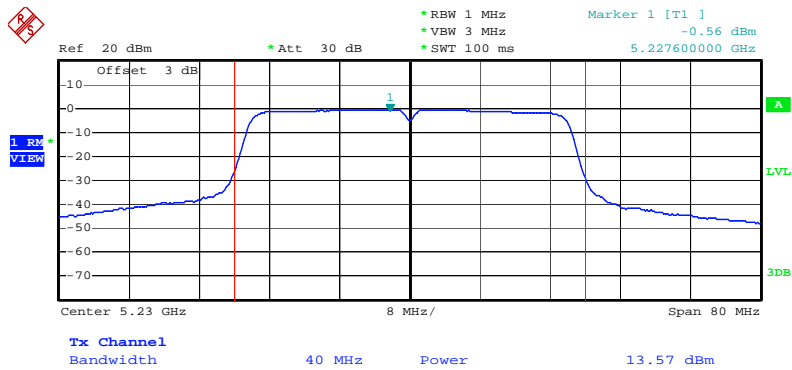


Date: 29.OCT.2009 01:12:38

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

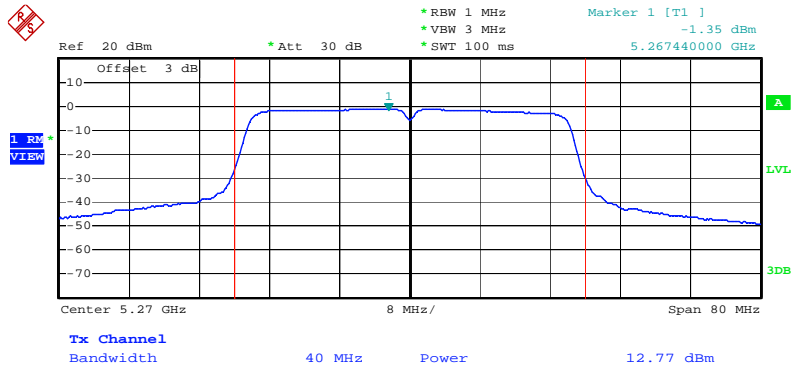


Date: 29.OCT.2009 01:13:43

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

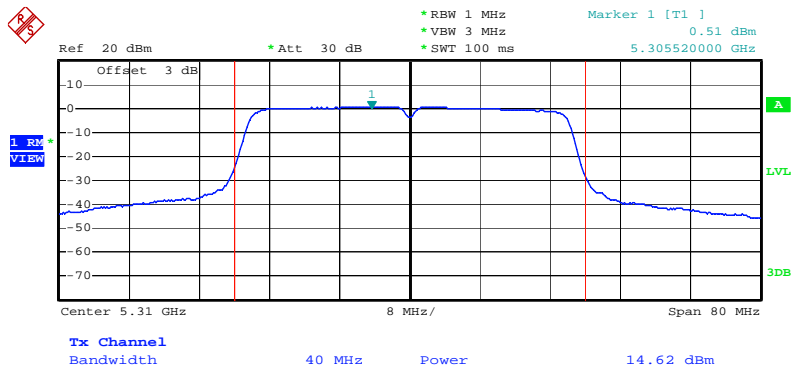


Date: 29.OCT.2009 01:14:49

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5510 MHz

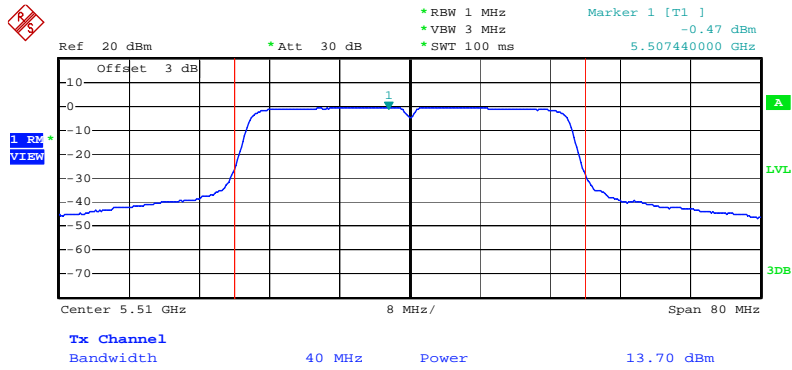


Date: 29.OCT.2009 01:16:00

Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

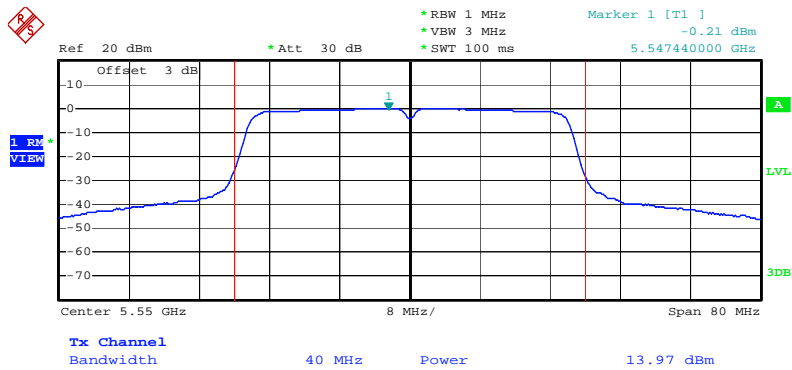

Date: 6.NOV.2009 01:00:58


Channel Output Power Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

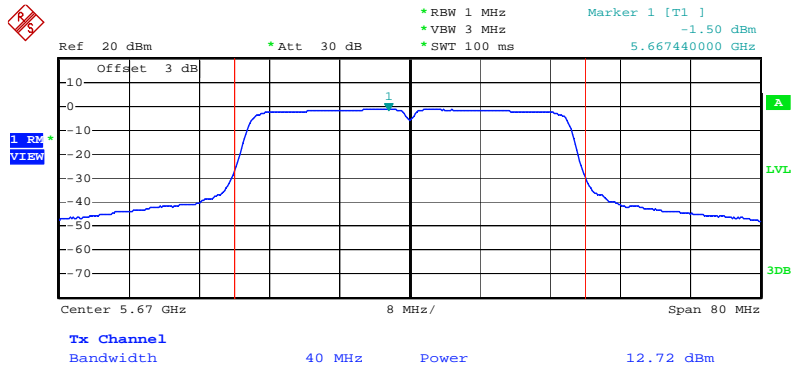

Date: 29.OCT.2009 01:18:18


For Two Chain:

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5180 MHz

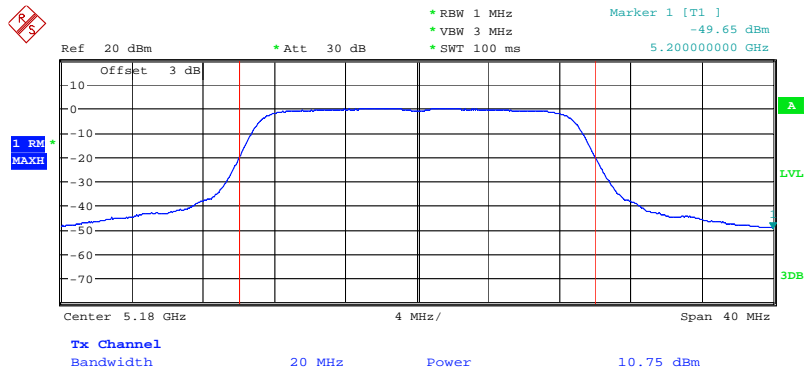


Date: 12.OCT.2009 20:45:37

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5200 MHz

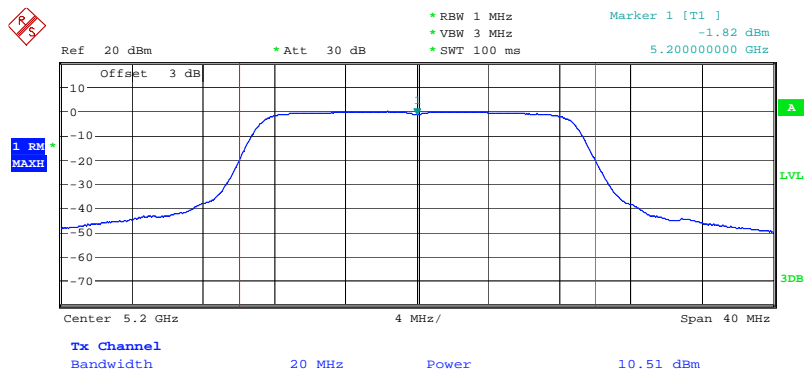


Date: 12.OCT.2009 20:48:09

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5240 MHz

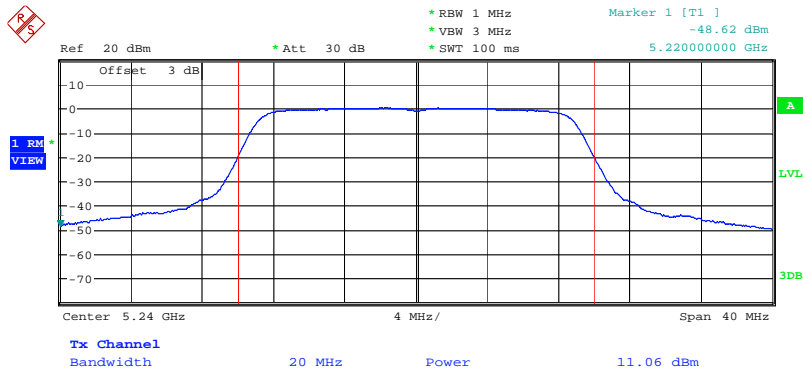

Date: 12.OCT.2009 20:48:59


Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5260 MHz

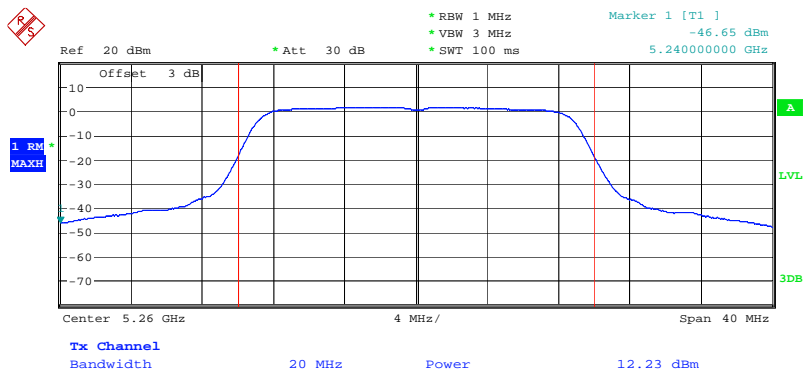

Date: 12.OCT.2009 20:50:42




Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5280 MHz

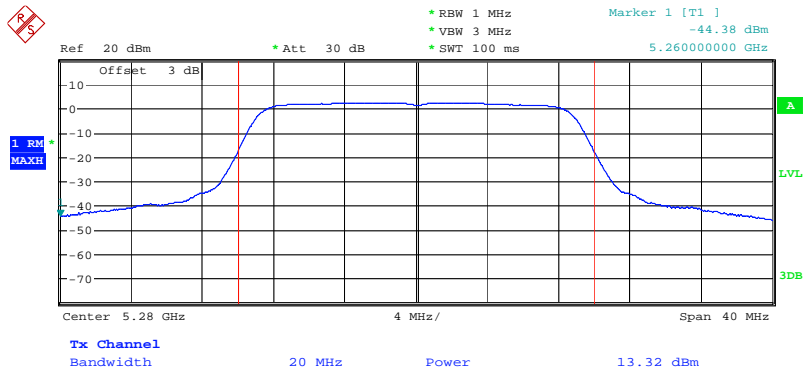


Date: 12.OCT.2009 20:51:34

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5320 MHz

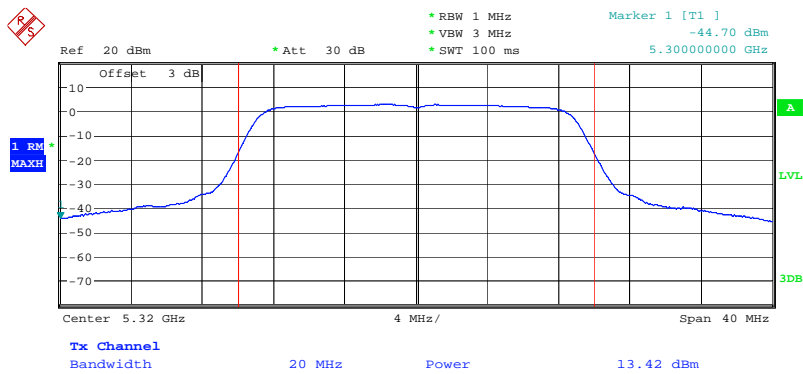


Date: 12.OCT.2009 20:53:22

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5500 MHz

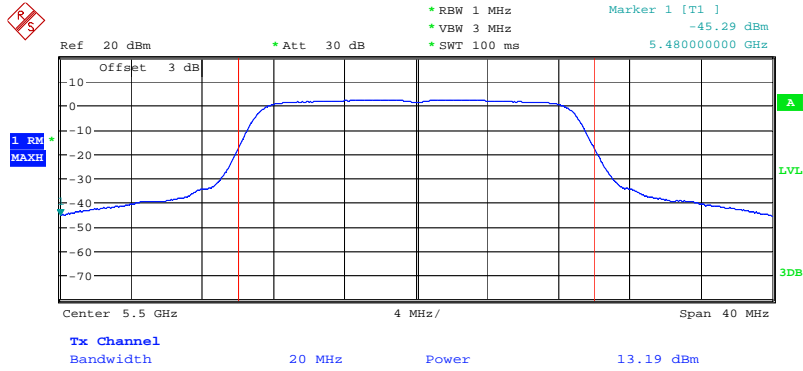


Date: 12.OCT.2009 20:53:57

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5580 MHz

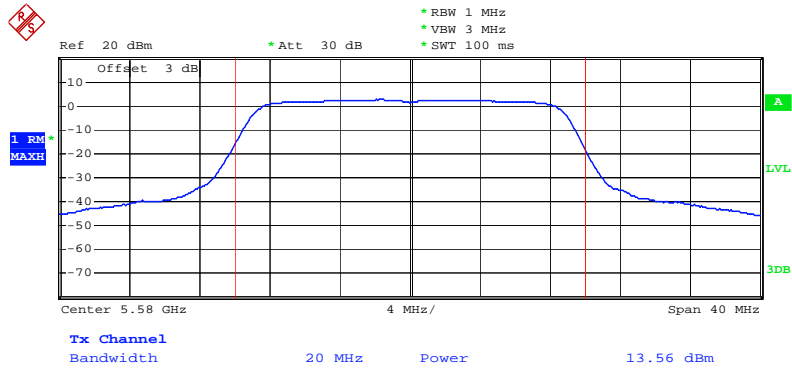


Date: 6.NOV.2009 01:22:51

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (20MHz) / 5700 MHz

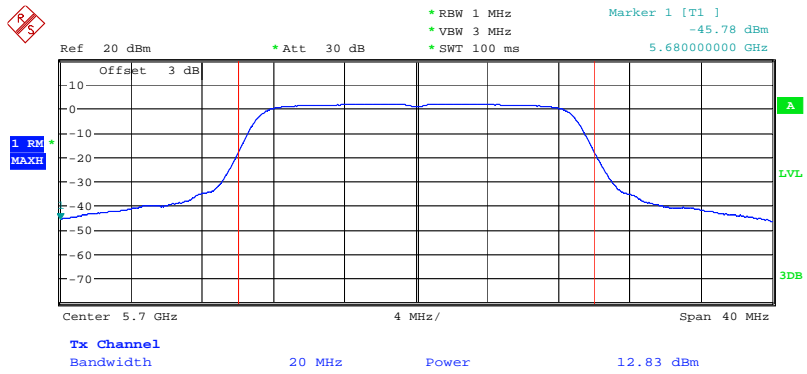


Date: 12.OCT.2009 20:56:16

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5180 MHz

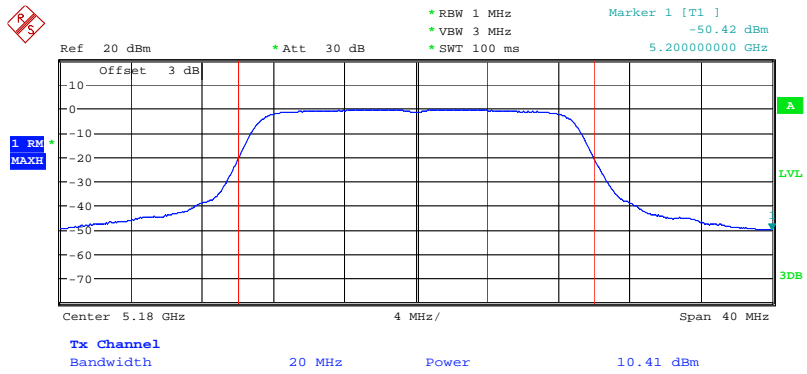


Date: 12.OCT.2009 20:46:41

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5200 MHz

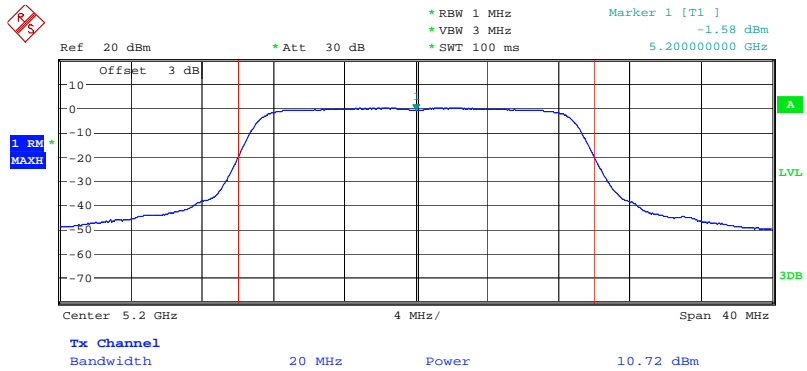


Date: 12.OCT.2009 20:47:28

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5240 MHz

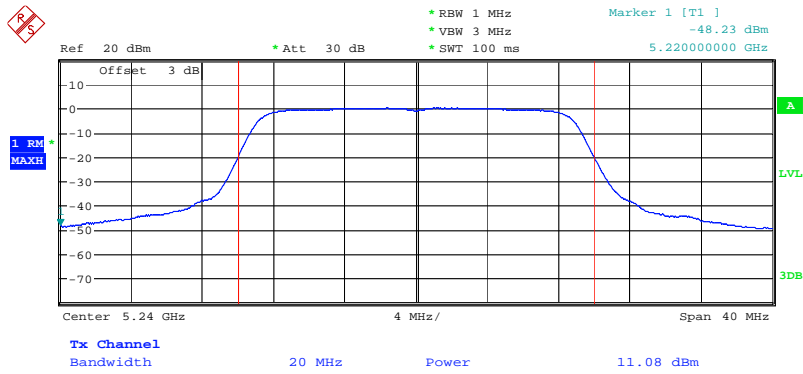


Date: 12.OCT.2009 20:49:31

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5260 MHz

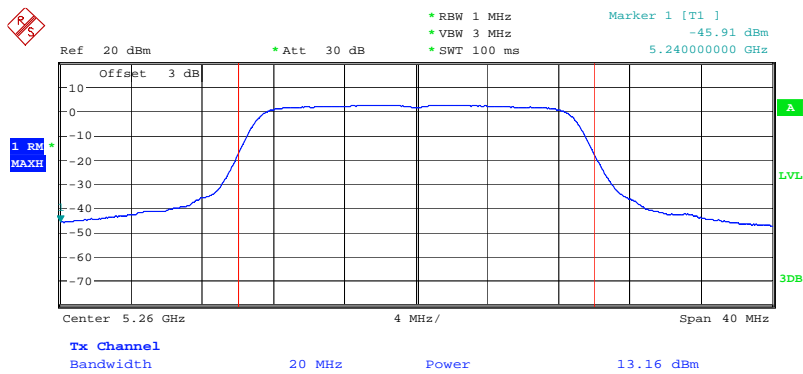


Date: 12.OCT.2009 20:50:07

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5280 MHz

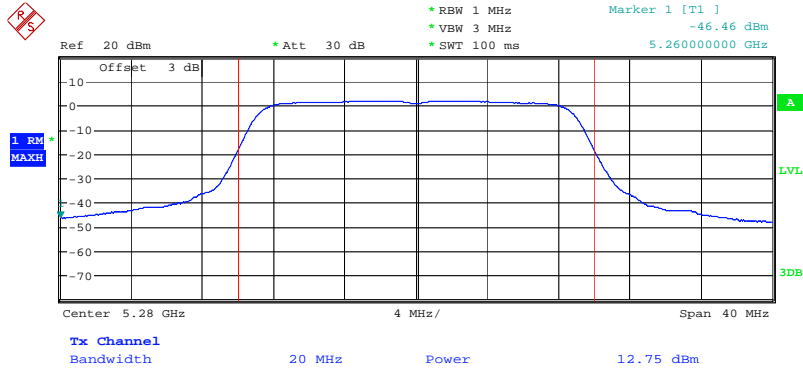


Date: 12.OCT.2009 20:52:17

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5320 MHz

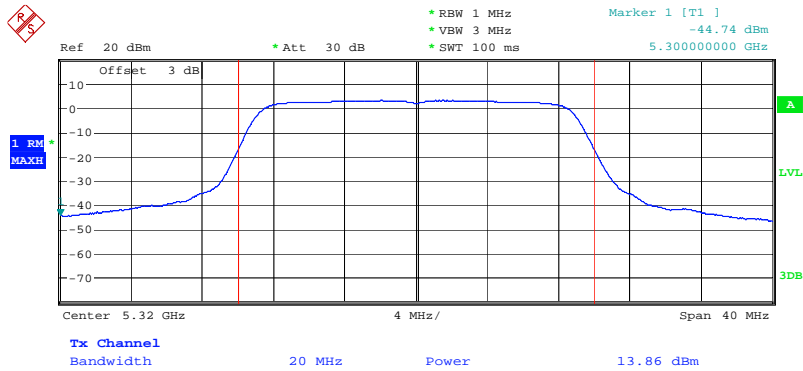


Date: 12.OCT.2009 20:52:48

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5500 MHz

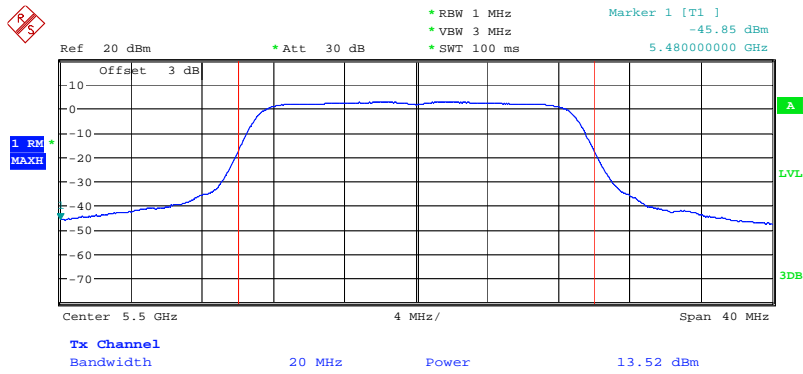


Date: 12.OCT.2009 20:54:29

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5580 MHz

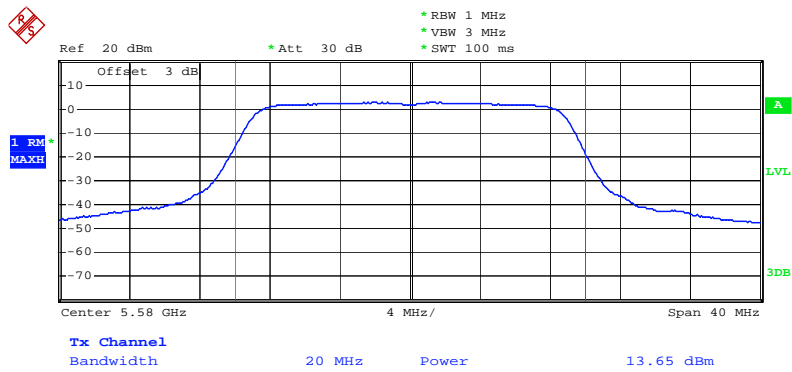

Date: 6.NOV.2009 01:24:03


Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (20MHz) / 5700 MHz

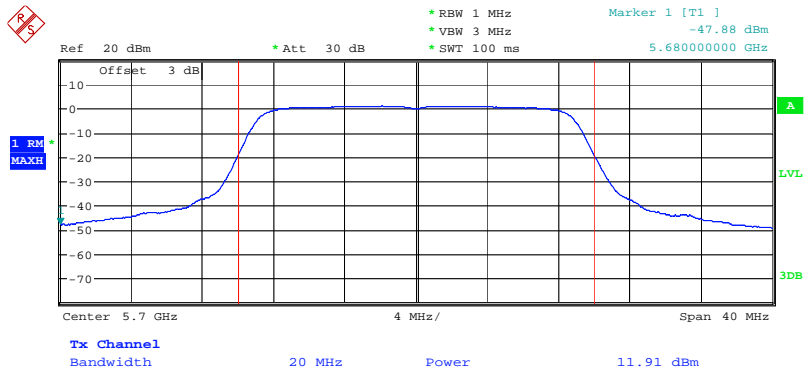

Date: 12.OCT.2009 20:56:53




Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5190 MHz

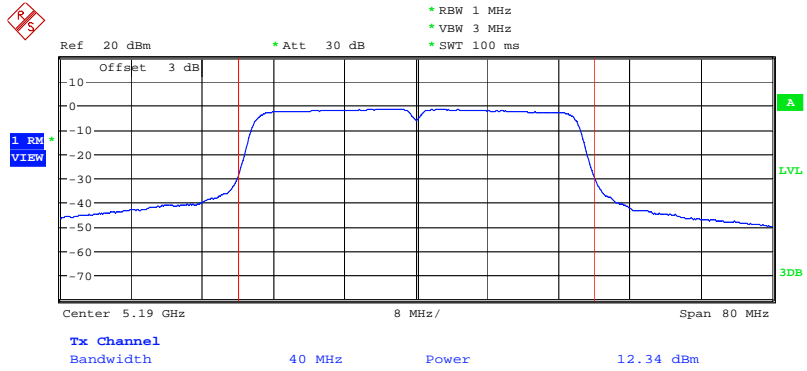


Date: 9.OCT.2009 11:19:51

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5230 MHz

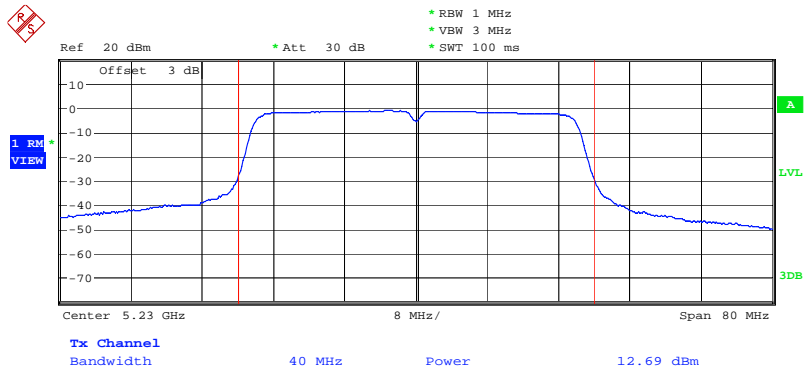


Date: 9.OCT.2009 11:20:35

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5270 MHz

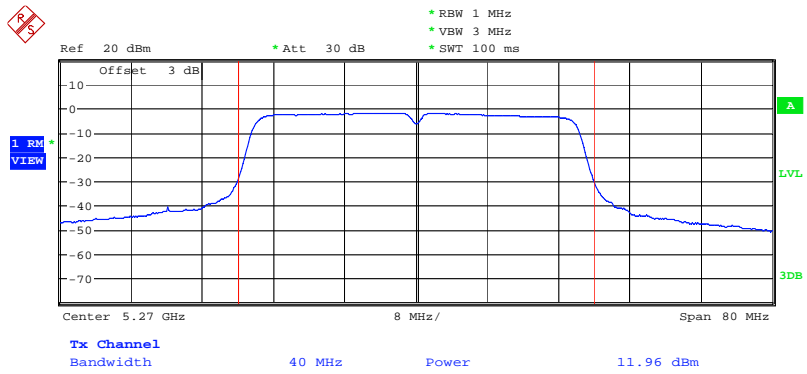


Date: 9.OCT.2009 11:23:35

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5310 MHz

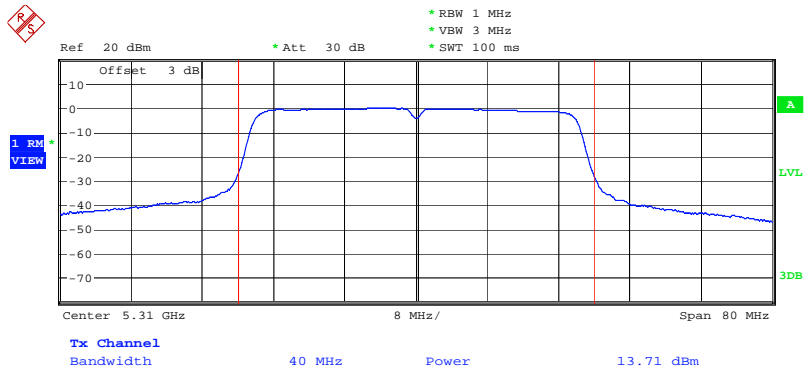


Date: 9.OCT.2009 11:24:13

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5510 MHz

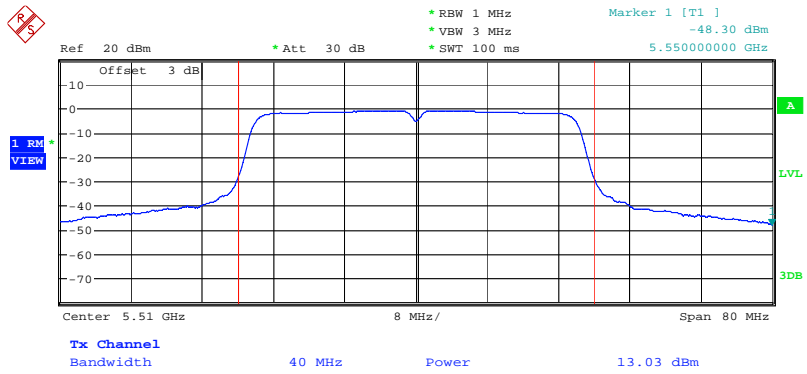


Date: 9.OCT.2009 14:25:39

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5550 MHz

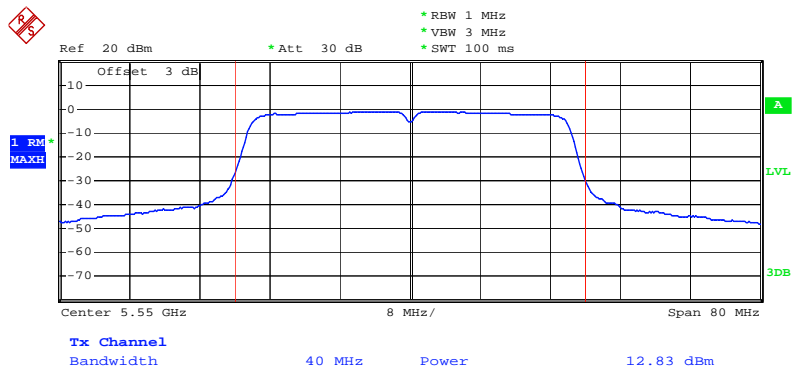


Date: 6.NOV.2009 01:27:23

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 1 (40MHz) / 5670 MHz

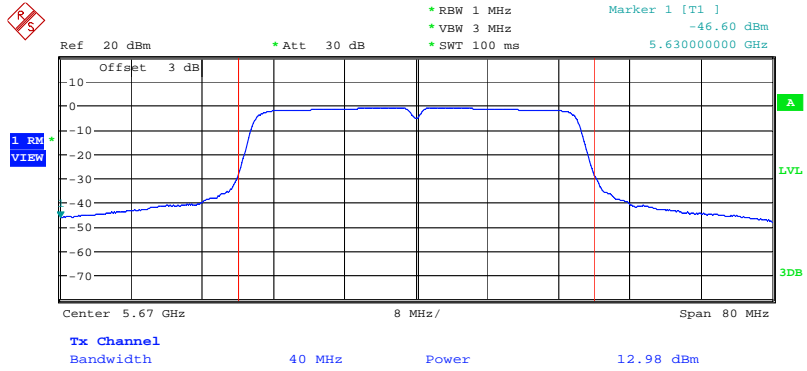


Date: 9.OCT.2009 11:28:57

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5190 MHz

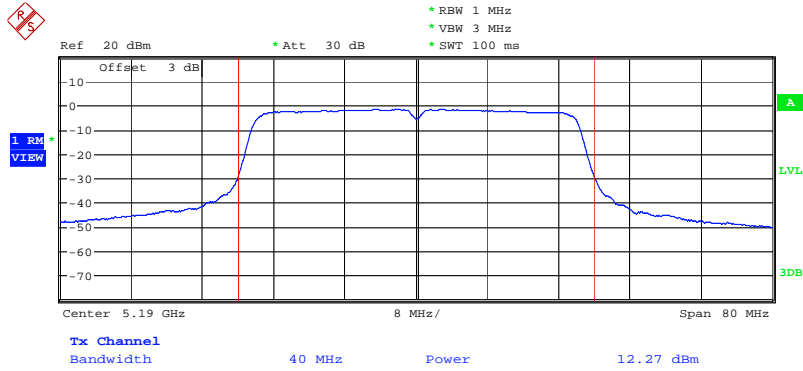


Date: 9.OCT.2009 11:19:07

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5230 MHz

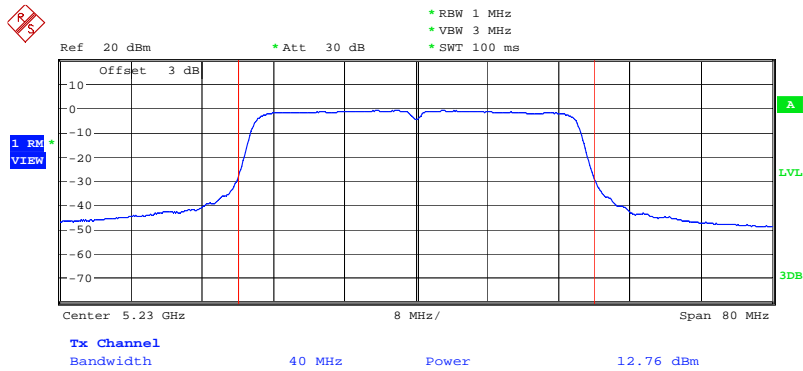


Date: 9.OCT.2009 11:21:53

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5270 MHz

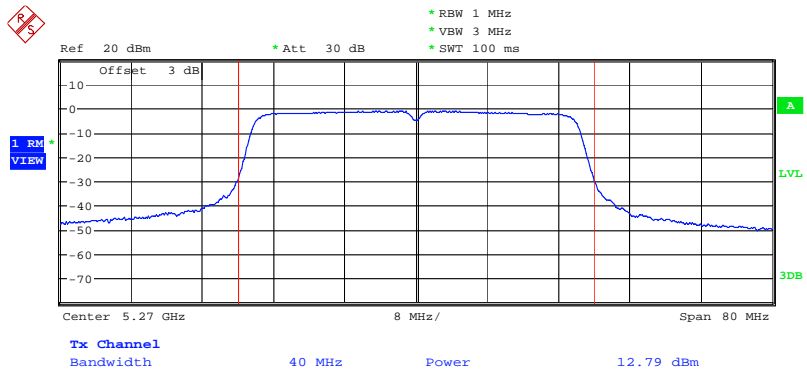


Date: 9.OCT.2009 11:22:49

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5310 MHz

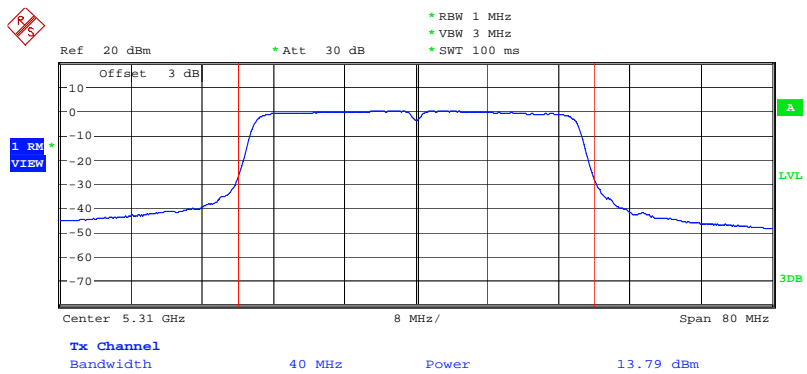


Date: 9.OCT.2009 11:24:42

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5510 MHz

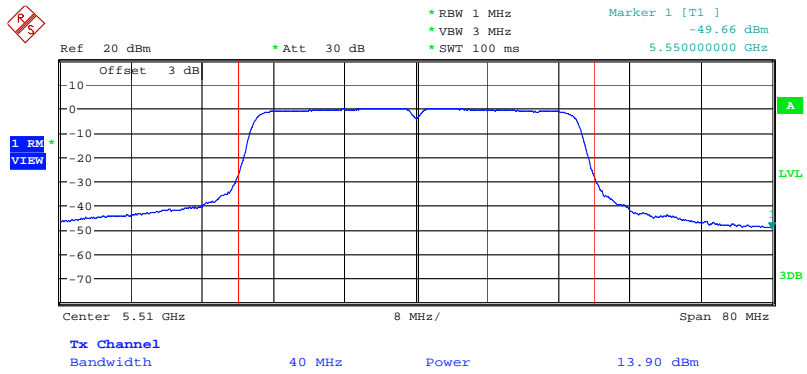


Date: 9.OCT.2009 14:24:11

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5550 MHz

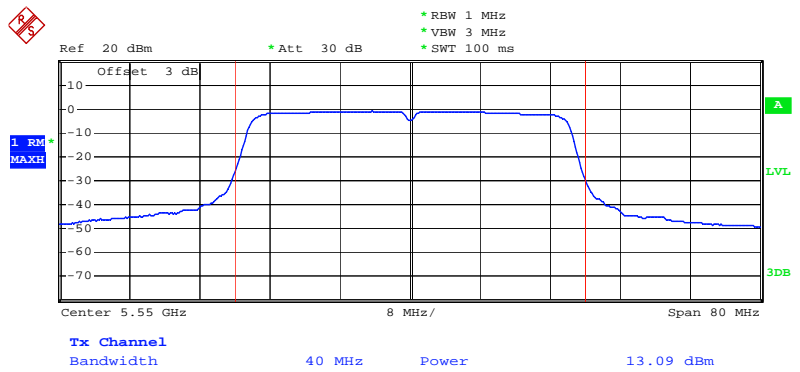

Date: 6.NOV.2009 01:26:36

Channel Output Power Plot on Configuration IEEE 802.11n Ant. 2 (40MHz) / 5670 MHz

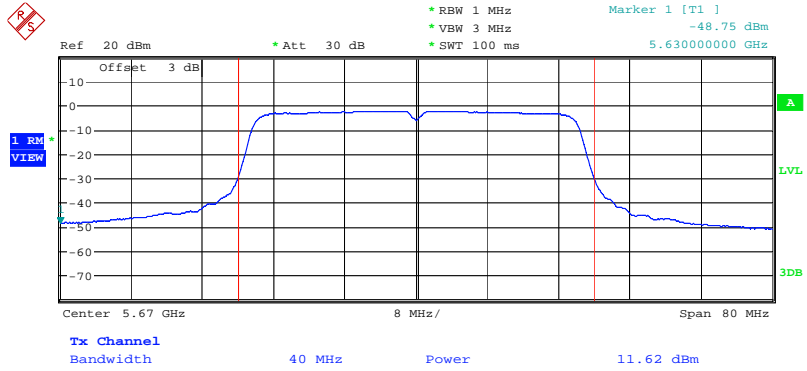

Date: 9.OCT.2009 11:29:26



**3.4 Power Spectral Density Measurement**

**3.4.1 Limit**

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

| Frequency Range | Power Spectral Density limit (dBm/MHz) |
|-----------------|--|
| 5.15~5.25 GHz   | 4                                      |
| 5.25-5.35 GHz   | 11                                     |
| 5.725-5.825     | 17                                     |

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz   |
| VB                 | 3000 kHz   |
| Detector           | Peak   |
| Trace              | Max Hold   |
| Sweep Time         | Auto   |

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.4.4 Test Setup Layout**

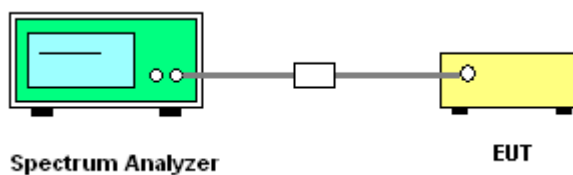

**3.4.5 Test Deviation**

There is no deviation with the original standard.

**3.4.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Test Result of Power Spectral Density**

|                        |               |                      |           |
|------------------------|---------------|----------------------|-----------|
| <b>Final Test Date</b> | Oct. 29, 2009 | <b>Test Site No.</b> | TH01-HY   |
| <b>Temperature</b>     | 26            | <b>Humidity</b>      | 56%       |
| <b>Test Engineer</b>   | Duncan        | <b>Configuration</b> | 802.11a/n |

**For Single Chain:**

**Configuration of IEEE 802.11a**

| Frequency | Power Density (dBm) | Max. Limit (dBm) | Result          |
|-----------|---------------------|------------------|-----------------|
| 5180 MHz  | 2.61                | 4.00             | <b>Complies</b> |
| 5200 MHz  | 2.13                | 4.00             | <b>Complies</b> |
| 5240 MHz  | 1.86                | 4.00             | <b>Complies</b> |
| 5260 MHz  | 1.51                | 11.00            | <b>Complies</b> |
| 5280 MHz  | 2.39                | 11.00            | <b>Complies</b> |
| 5320 MHz  | 2.63                | 11.00            | <b>Complies</b> |
| 5500 MHz  | 1.98                | 11.00            | <b>Complies</b> |
| 5580 MHz  | 2.93                | 11.00            | <b>Complies</b> |
| 5700 MHz  | 2.30                | 11.00            | <b>Complies</b> |

**Configuration IEEE 802.11n (20MHz)**

| Frequency | Power Density (dBm) | Max. Limit (dBm) | Result          |
|-----------|---------------------|------------------|-----------------|
| 5180 MHz  | 2.61                | 4.00             | <b>Complies</b> |
| 5200 MHz  | 2.60                | 4.00             | <b>Complies</b> |
| 5240 MHz  | 2.59                | 4.00             | <b>Complies</b> |
| 5260 MHz  | 2.41                | 11.00            | <b>Complies</b> |
| 5280 MHz  | 3.43                | 11.00            | <b>Complies</b> |
| 5320 MHz  | 3.67                | 11.00            | <b>Complies</b> |
| 5500 MHz  | 2.93                | 11.00            | <b>Complies</b> |
| 5580 MHz  | 2.72                | 11.00            | <b>Complies</b> |
| 5700 MHz  | 2.27                | 11.00            | <b>Complies</b> |

**Configuration IEEE 802.11n (40MHz)**

| Frequency | Power Density (dBm) | Max. Limit (dBm) | Result          |
|-----------|---------------------|------------------|-----------------|
| 5190 MHz  | -0.53               | 4.00             | <b>Complies</b> |
| 5230 MHz  | -0.11               | 4.00             | <b>Complies</b> |
| 5270 MHz  | -0.90               | 11.00            | <b>Complies</b> |
| 5310 MHz  | 0.92                | 11.00            | <b>Complies</b> |
| 5510 MHz  | -0.10               | 11.00            | <b>Complies</b> |
| 5550 MHz  | 0.77                | 11.00            | <b>Complies</b> |
| 5670 MHz  | -1.13               | 11.00            | <b>Complies</b> |

For Two Chain:

Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)


| Frequency | Power Density (dBm) | Max. Limit (dBm) | Result   |
|-----------|---------------------|------------------|----------|
| 5180 MHz  | 3.64                | 4.00             | Complies |
| 5200 MHz  | 3.42                | 4.00             | Complies |
| 5240 MHz  | 3.57                | 4.00             | Complies |
| 5260 MHz  | 5.74                | 11.00            | Complies |
| 5280 MHz  | 6.25                | 11.00            | Complies |
| 5320 MHz  | 6.66                | 11.00            | Complies |
| 5500 MHz  | 6.16                | 11.00            | Complies |
| 5580 MHz  | 5.52                | 11.00            | Complies |
| 5700 MHz  | 5.38                | 11.00            | Complies |

Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz)

| Frequency | Power Density (dBm) | Max. Limit (dBm) | Result   |
|-----------|---------------------|------------------|----------|
| 5190 MHz  | 2.02                | 4.00             | Complies |
| 5230 MHz  | 2.44                | 4.00             | Complies |
| 5270 MHz  | 2.50                | 11.00            | Complies |
| 5310 MHz  | 3.67                | 11.00            | Complies |
| 5510 MHz  | 3.63                | 11.00            | Complies |
| 5550 MHz  | 2.33                | 11.00            | Complies |
| 5670 MHz  | 1.67                | 11.00            | Complies |


For Single Chain:

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

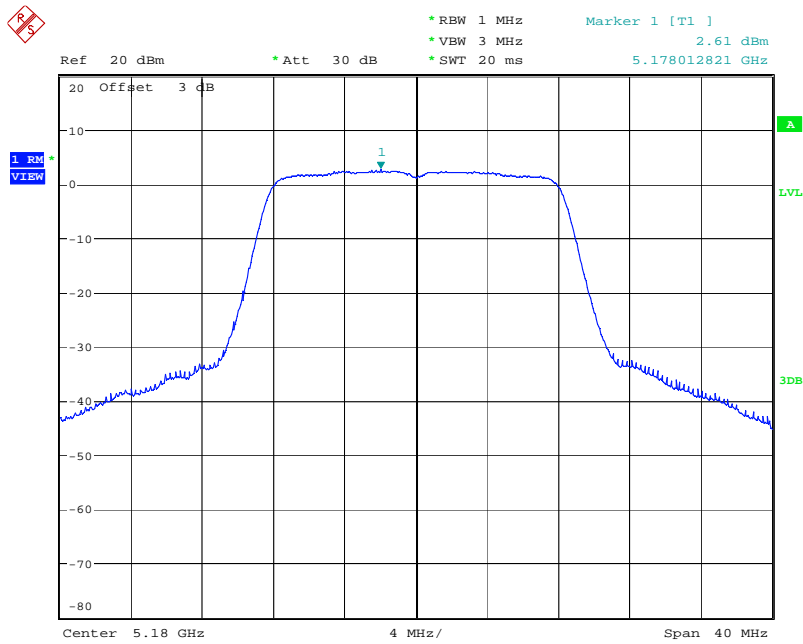


Date: 12.OCT.2009 14:21:47

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

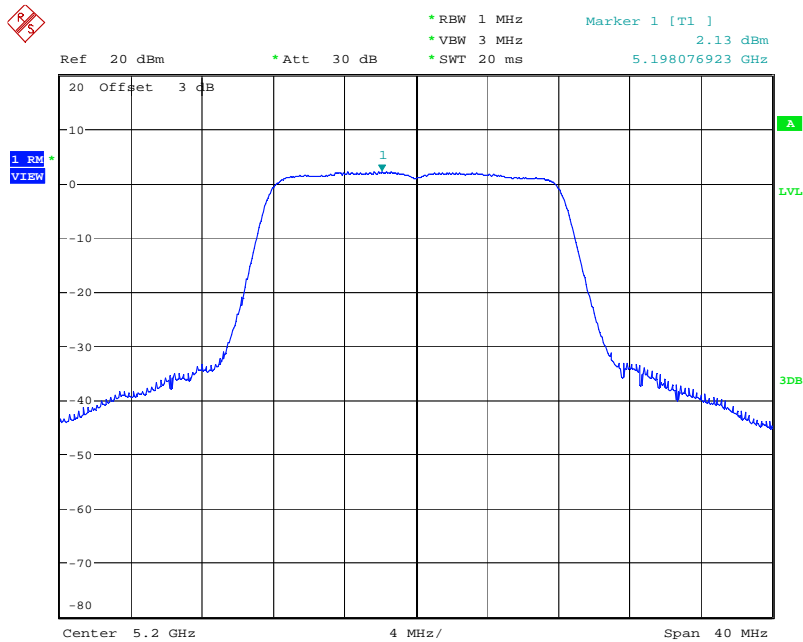


Date: 12.OCT.2009 14:23:22

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

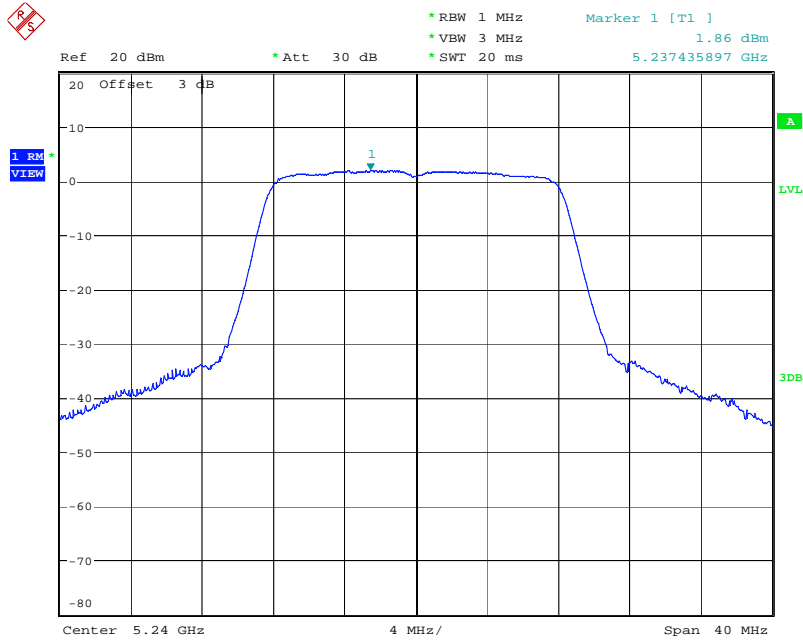


Date: 12.OCT.2009 14:24:31

Power Density Plot on Configuration IEEE 802.11a / 5260 MHz

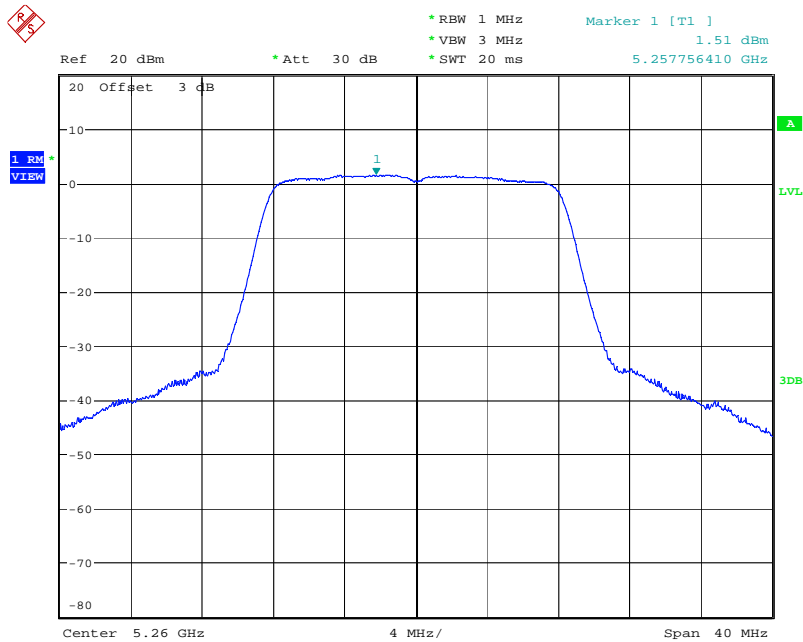


Date: 12.OCT.2009 14:25:41

Power Density Plot on Configuration IEEE 802.11a / 5280 MHz

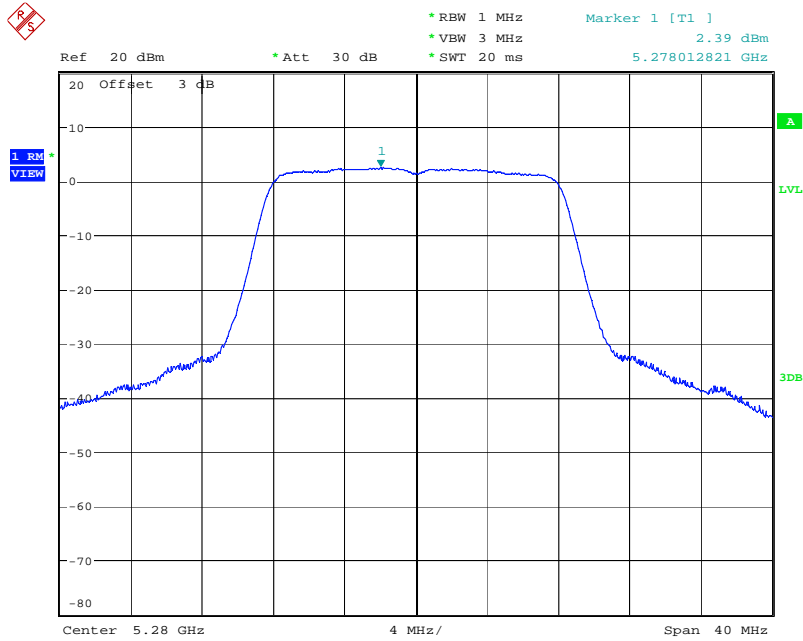


Date: 12.OCT.2009 14:26:52

Power Density Plot on Configuration IEEE 802.11a / 5320 MHz

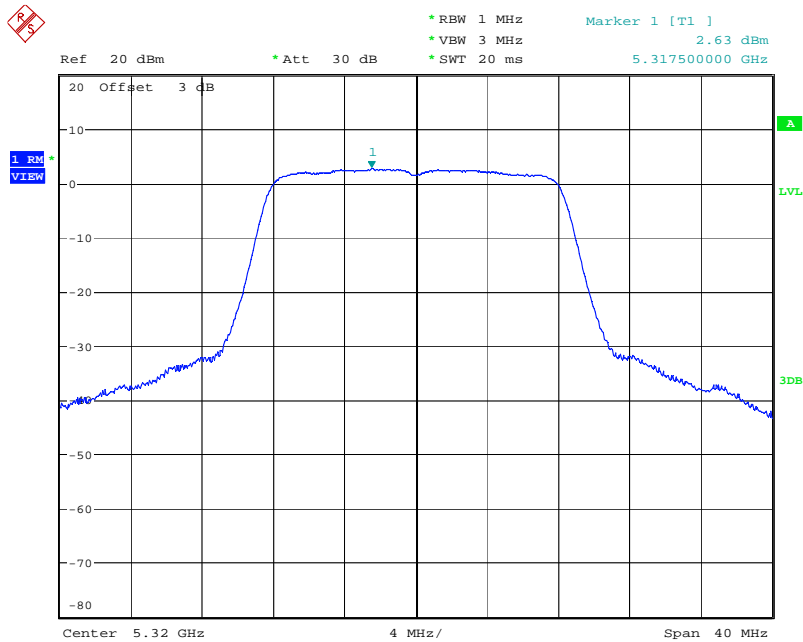


Date: 12.OCT.2009 14:27:59

Power Density Plot on Configuration IEEE 802.11a / 5500 MHz

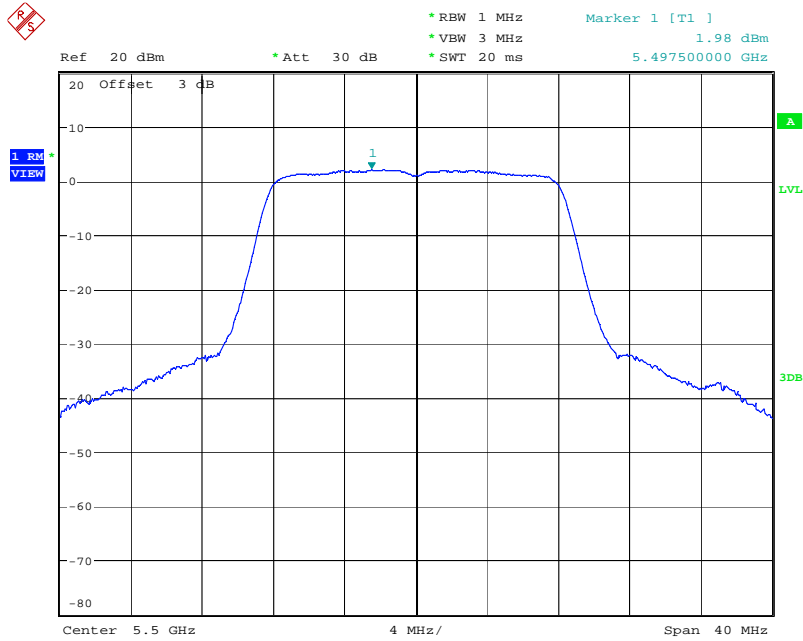


Date: 12.OCT.2009 14:29:32

Power Density Plot on Configuration IEEE 802.11a / 5580 MHz

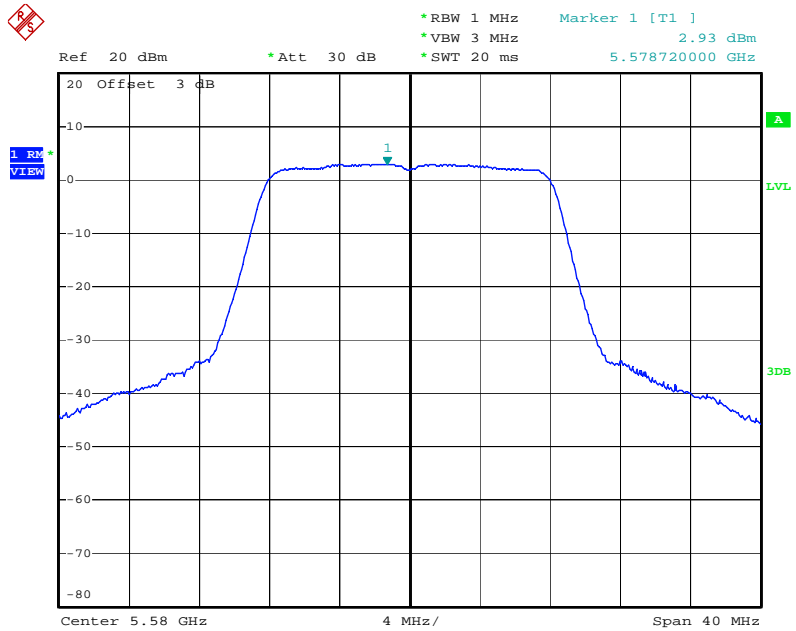

Date: 6.NOV.2009 00:45:52


Power Density Plot on Configuration IEEE 802.11a / 5700 MHz

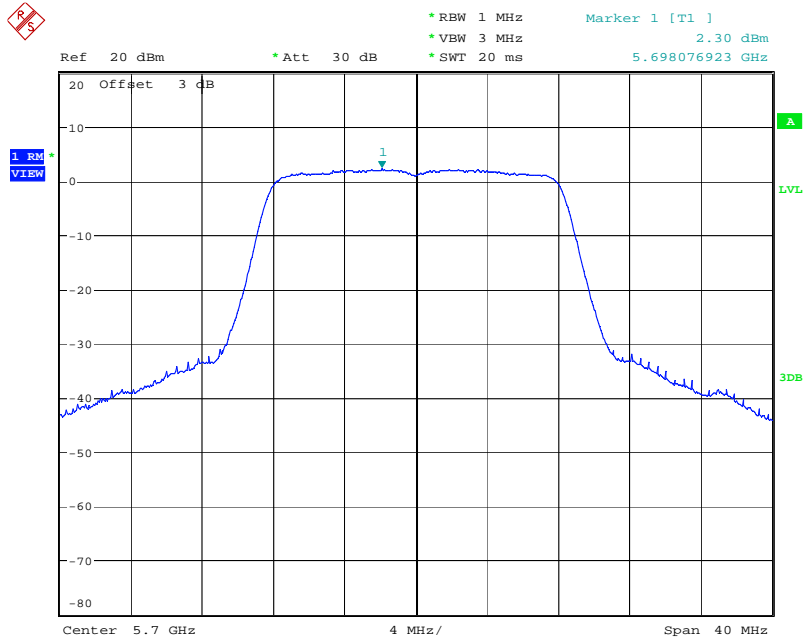

Date: 12.OCT.2009 14:35:11




Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

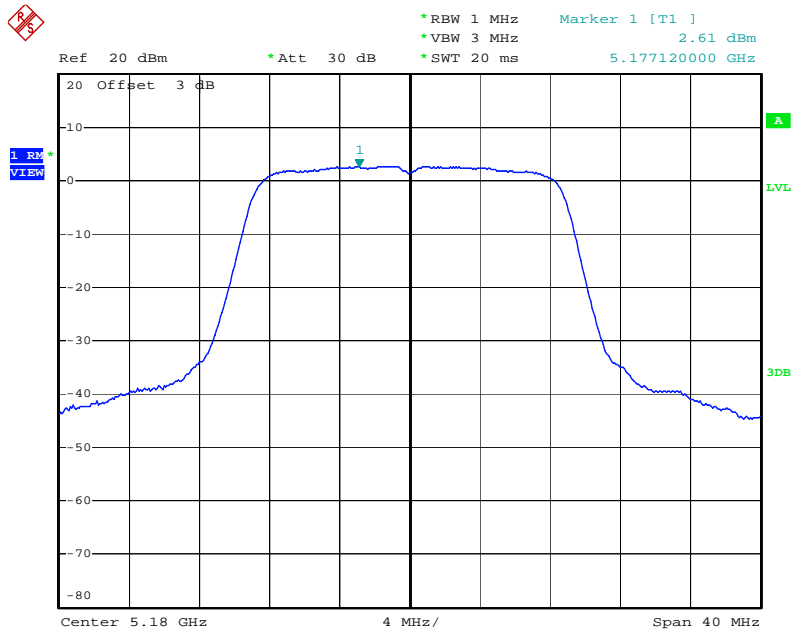


Date: 28.OCT.2009 23:45:53

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

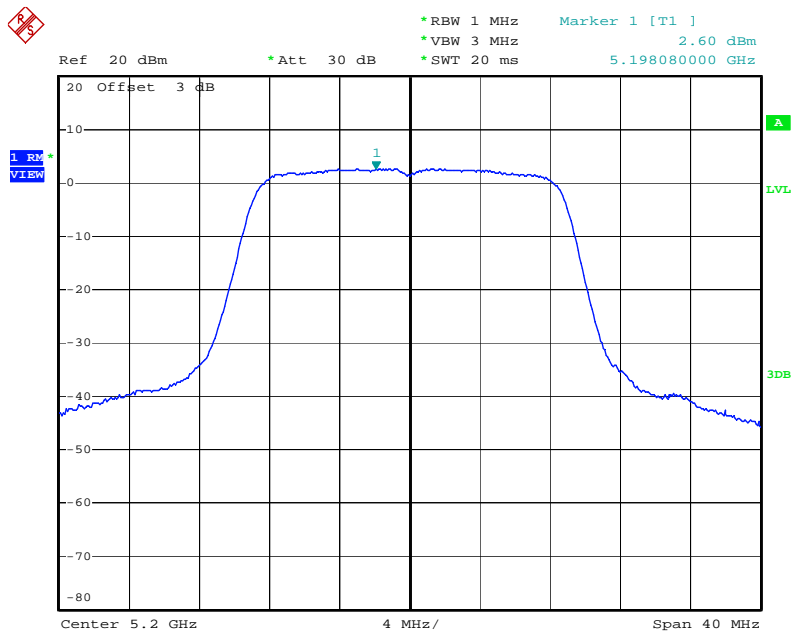


Date: 28.OCT.2009 23:58:58

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

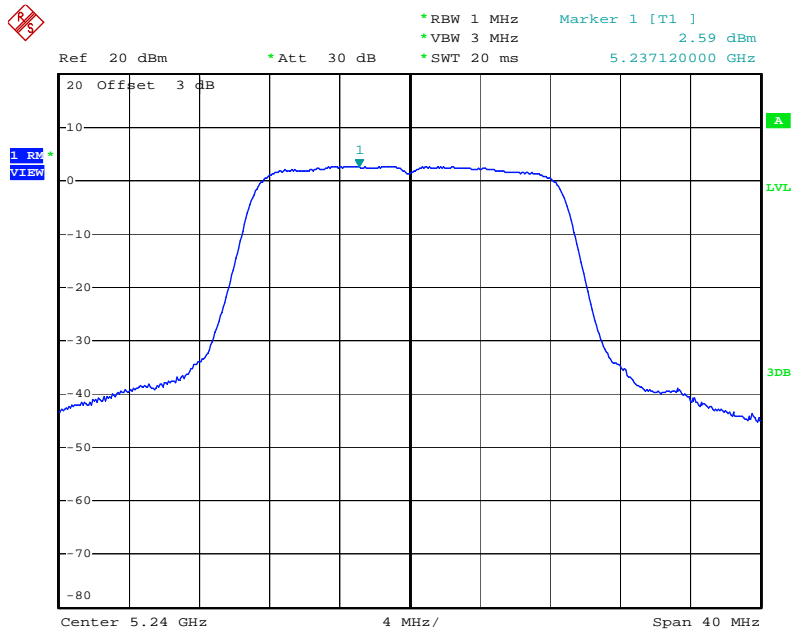


Date: 29.OCT.2009 00:01:30

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

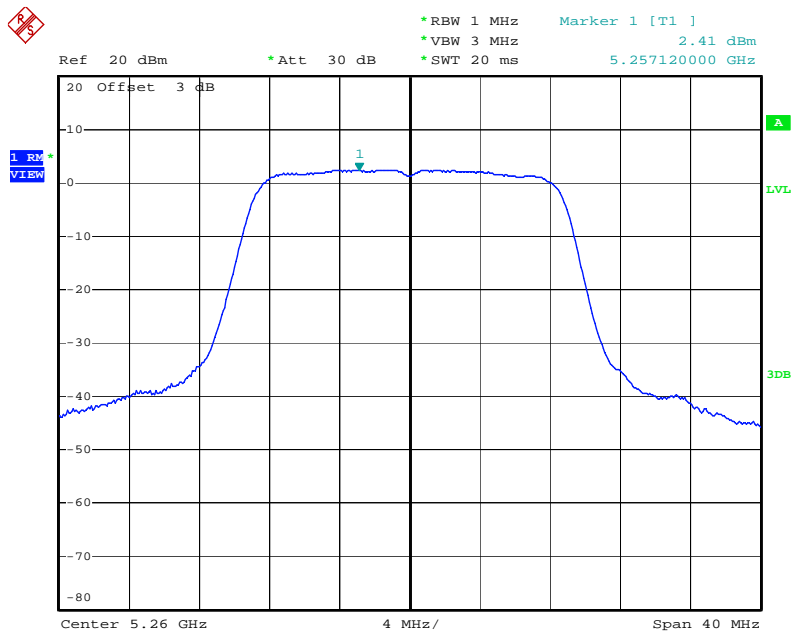


Date: 29.OCT.2009 00:10:34

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

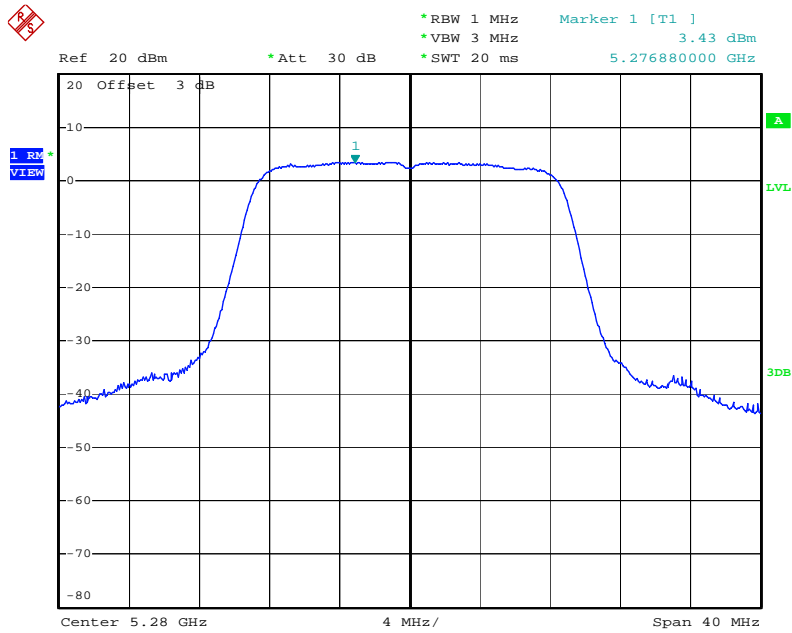


Date: 29.OCT.2009 00:13:32

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

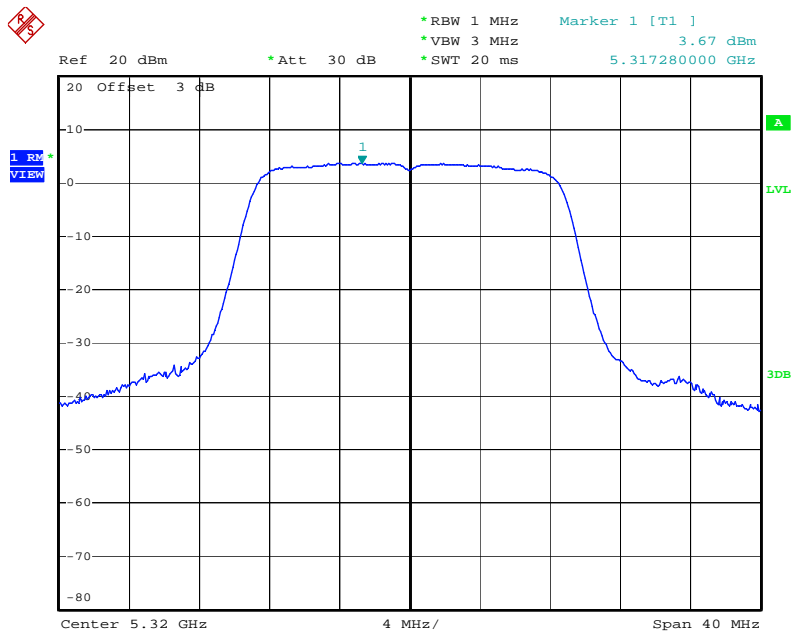


Date: 29.OCT.2009 00:16:32

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

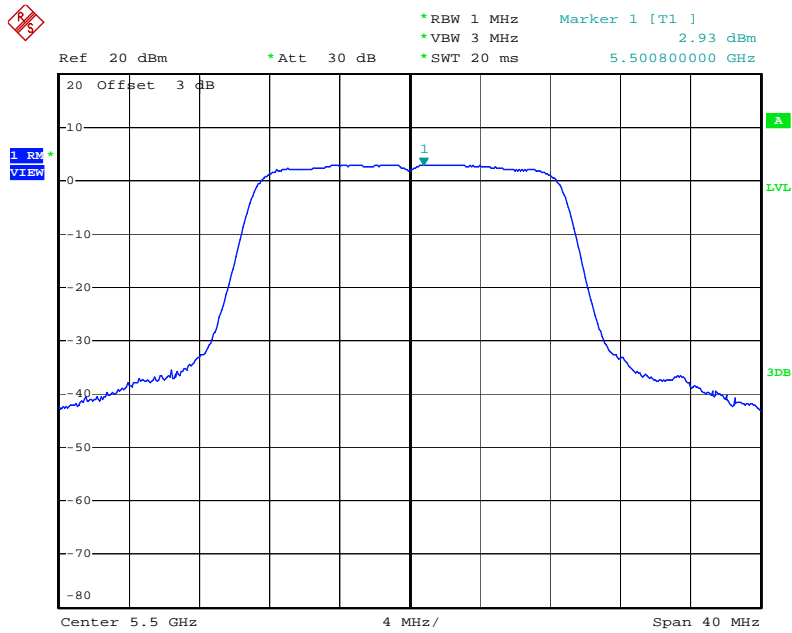


Date: 29.OCT.2009 00:18:23

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

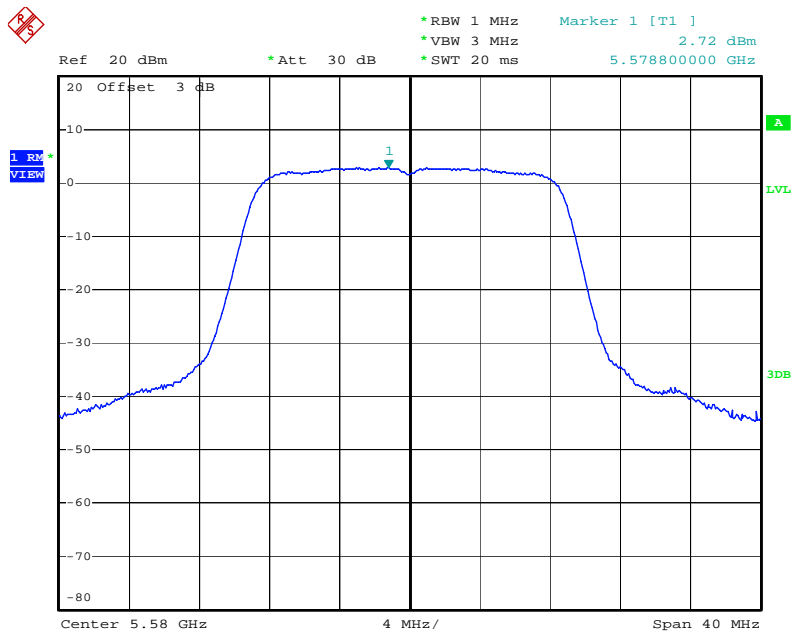


Date: 6.NOV.2009 00:56:37

Power Density Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

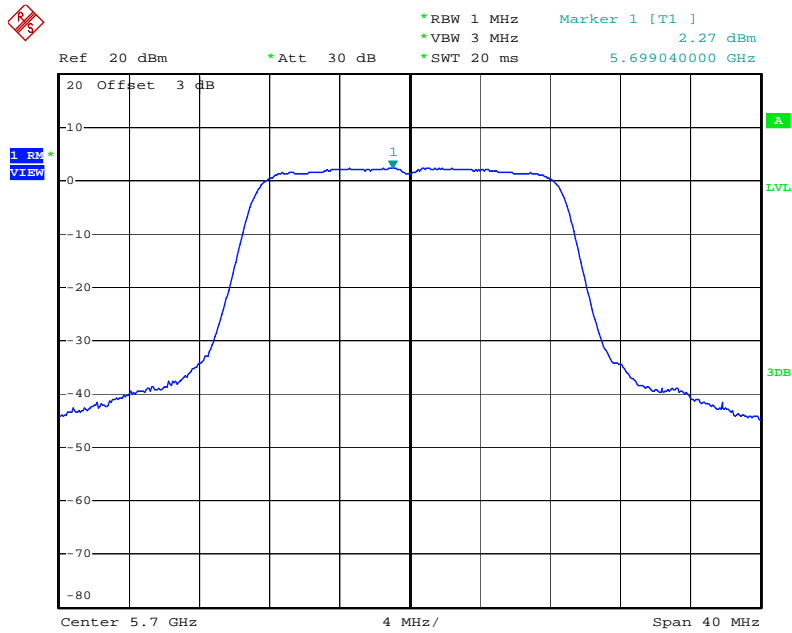


Date: 29.OCT.2009 00:21:01

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

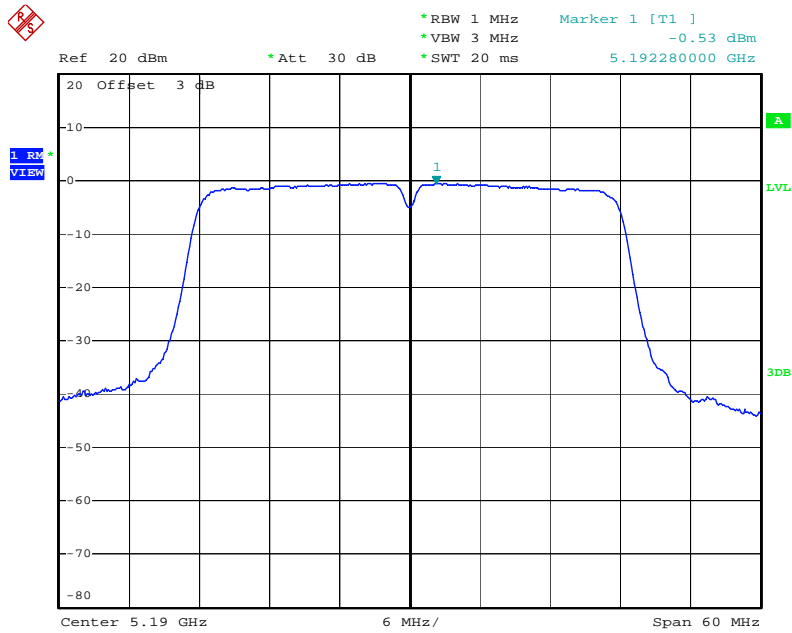


Date: 29.OCT.2009 01:11:28

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

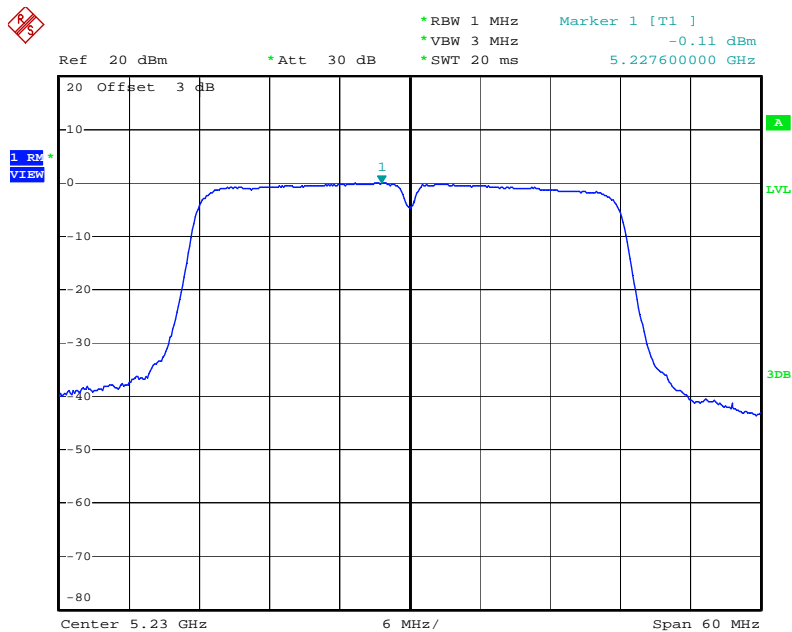


Date: 29.OCT.2009 01:12:47

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

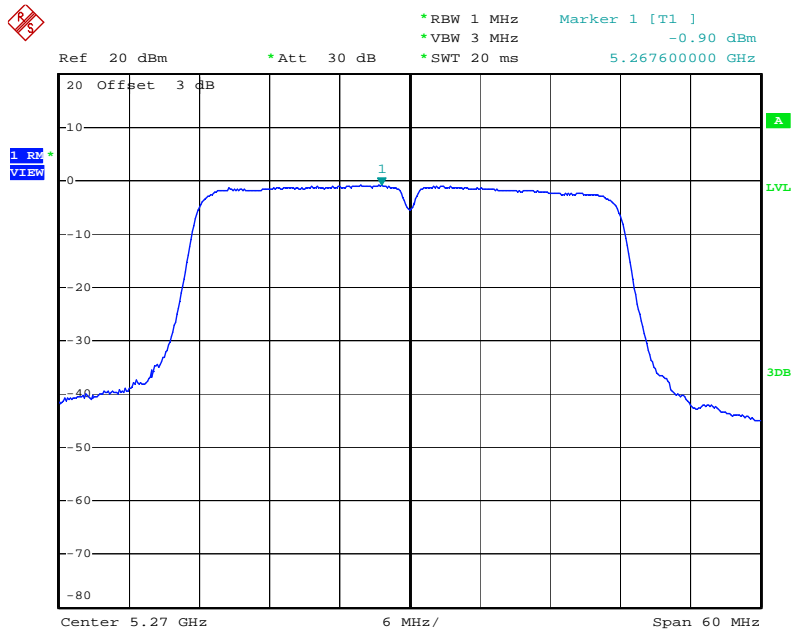


Date: 29.OCT.2009 01:13:52

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

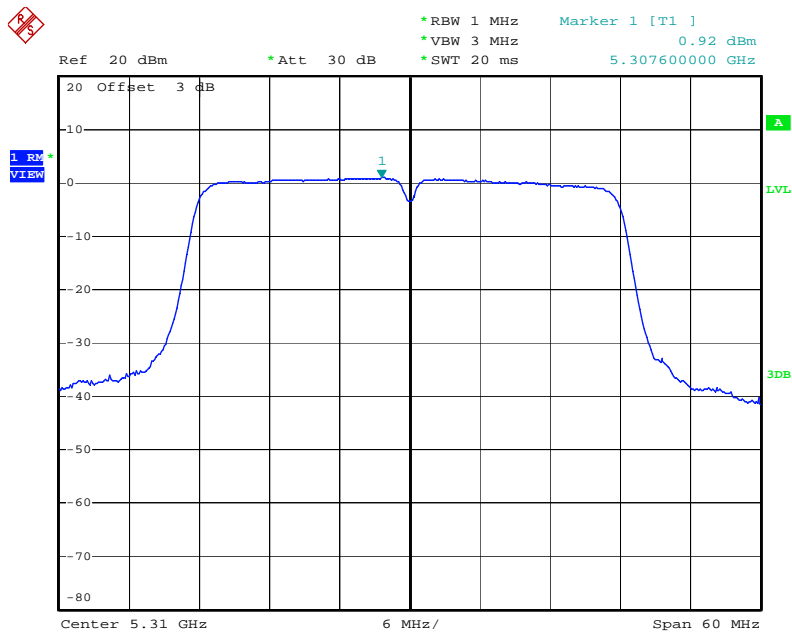


Date: 29.OCT.2009 01:14:59

Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5510 MHz

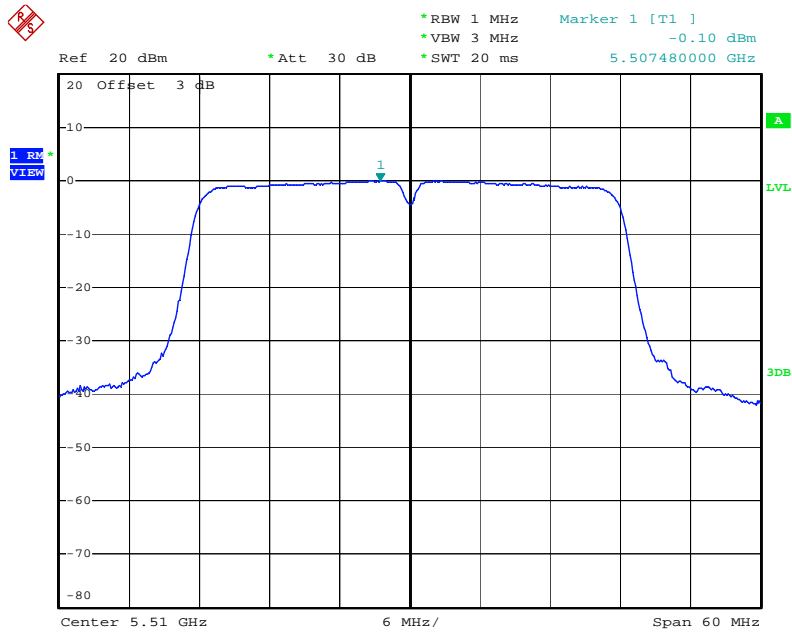

Date: 29.OCT.2009 01:16:09


Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

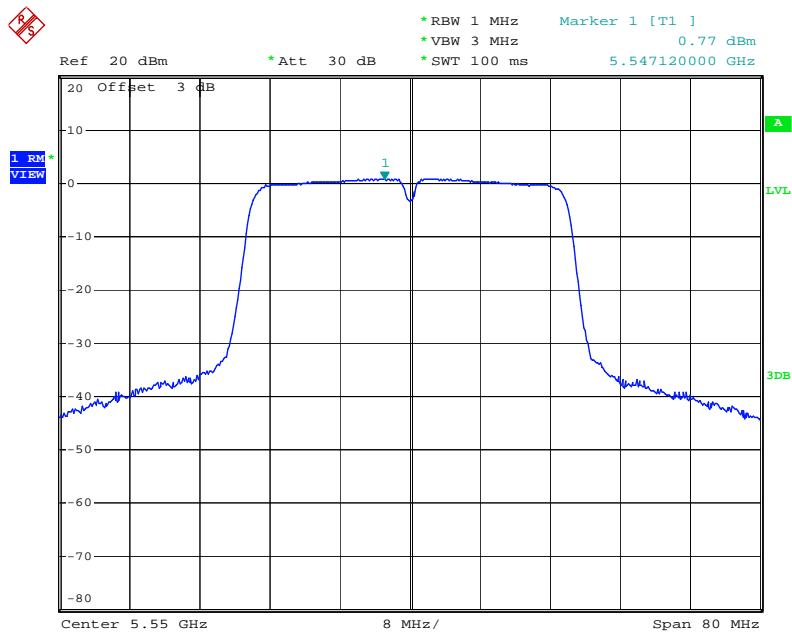

Date: 6.NOV.2009 02:06:37




Power Density Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

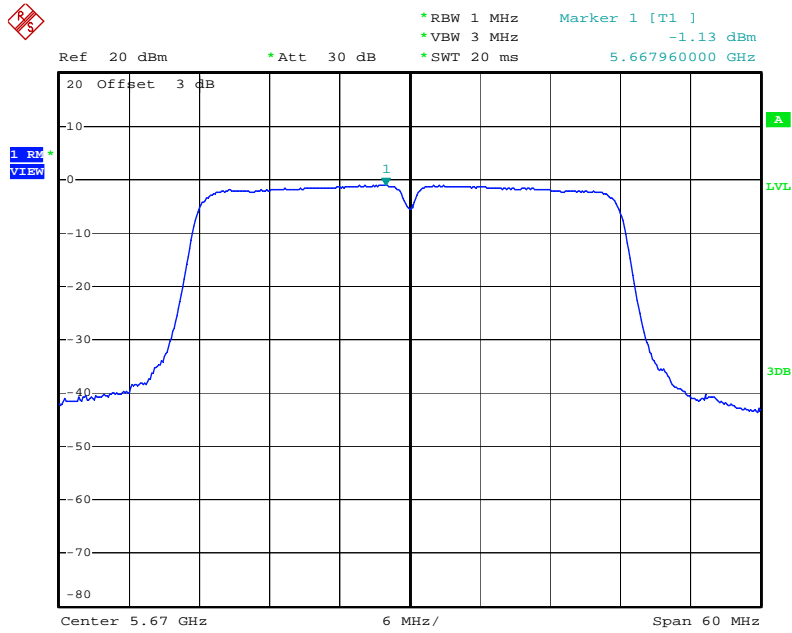

Date: 29.OCT.2009 01:18:27


For Two Chain:

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5180 MHz

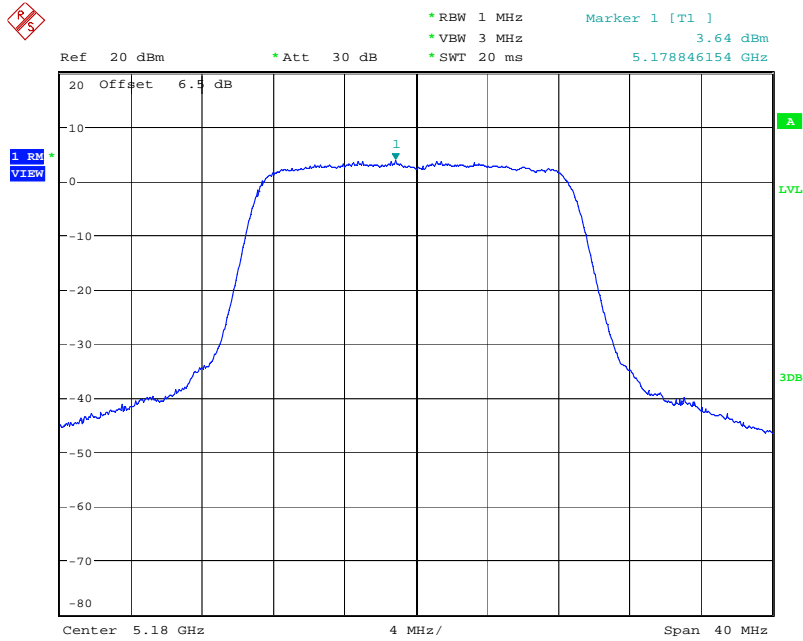


Date: 12.OCT.2009 20:26:45

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5200 MHz

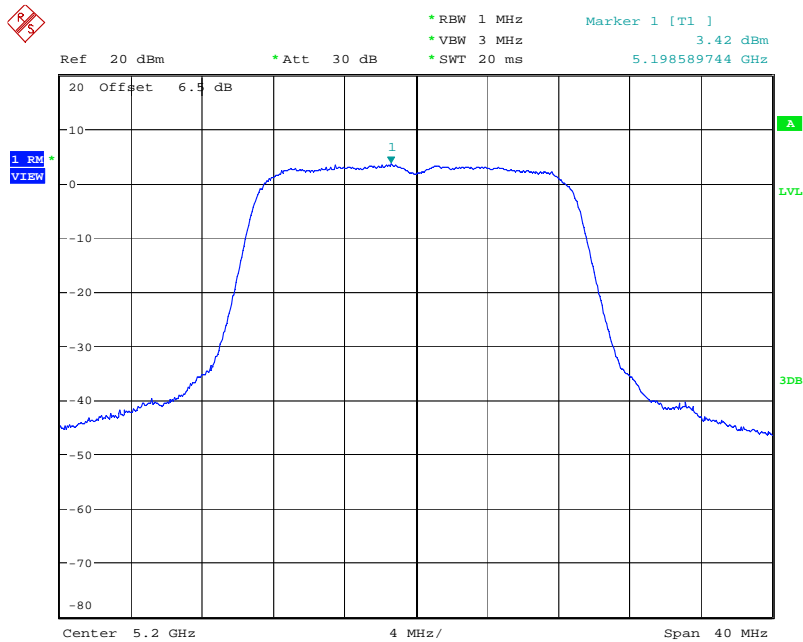


Date: 12.OCT.2009 20:30:31

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5240 MHz

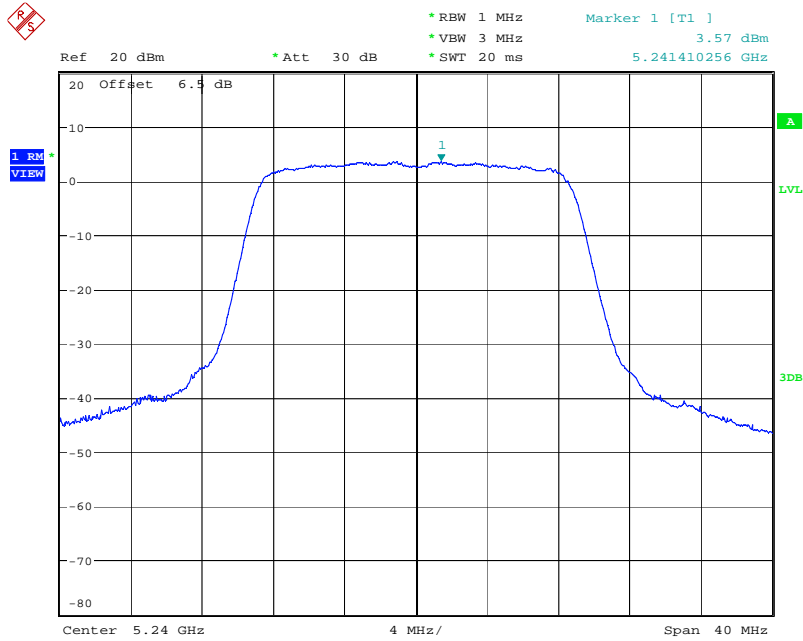


Date: 12.OCT.2009 20:33:18

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5260 MHz

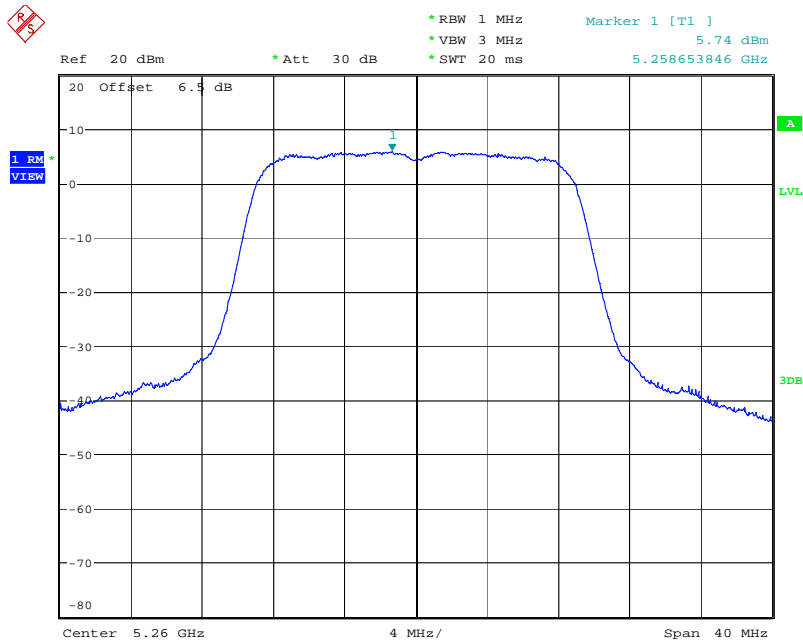


Date: 12.OCT.2009 17:38:19

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5280 MHz

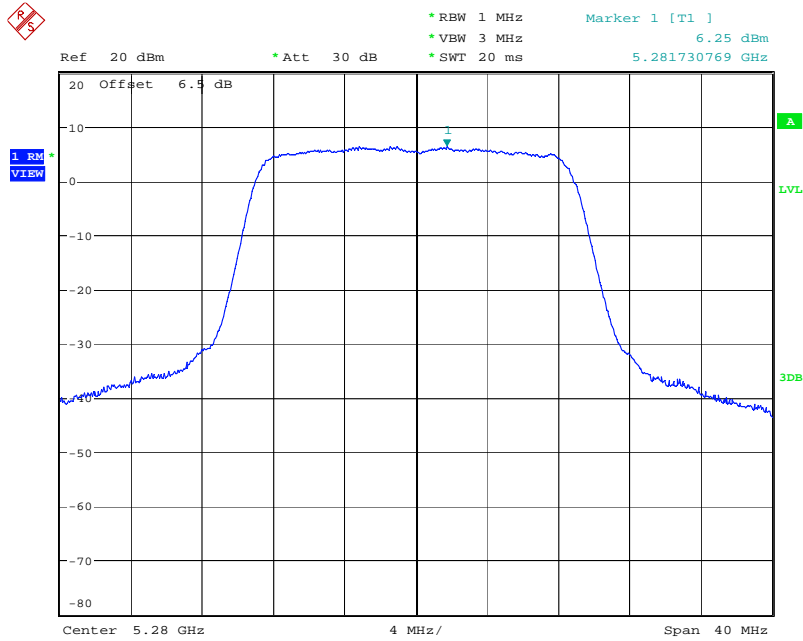


Date: 12.OCT.2009 17:39:27

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5320 MHz

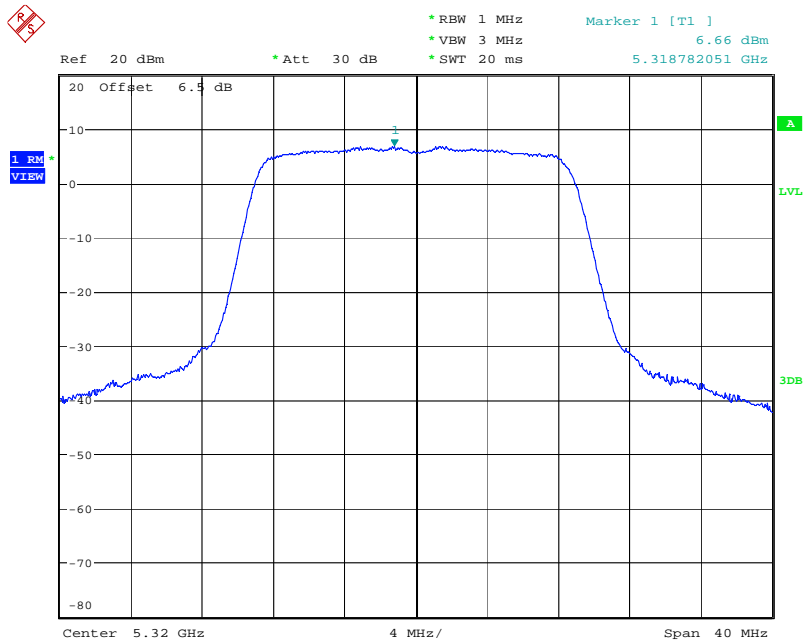


Date: 12.OCT.2009 17:40:28

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5500 MHz

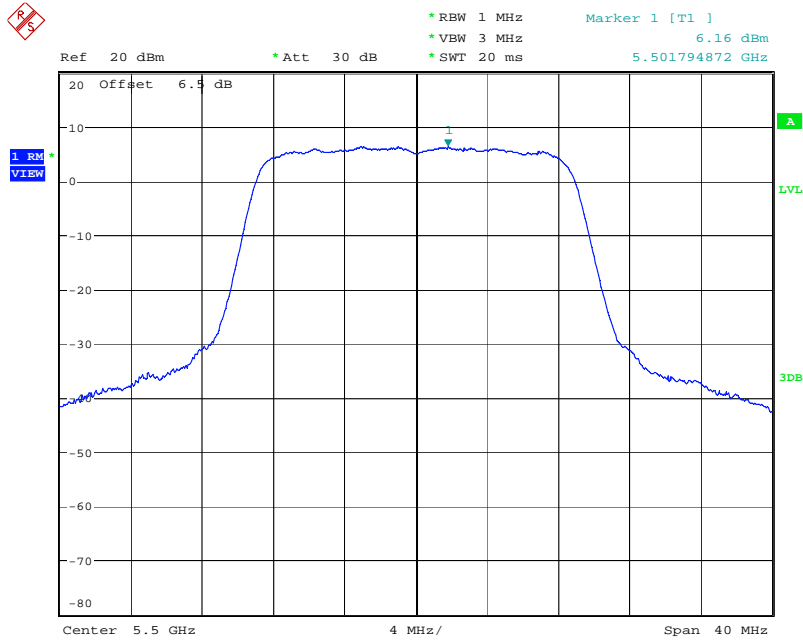


Date: 12.OCT.2009 17:41:33

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5580 MHz

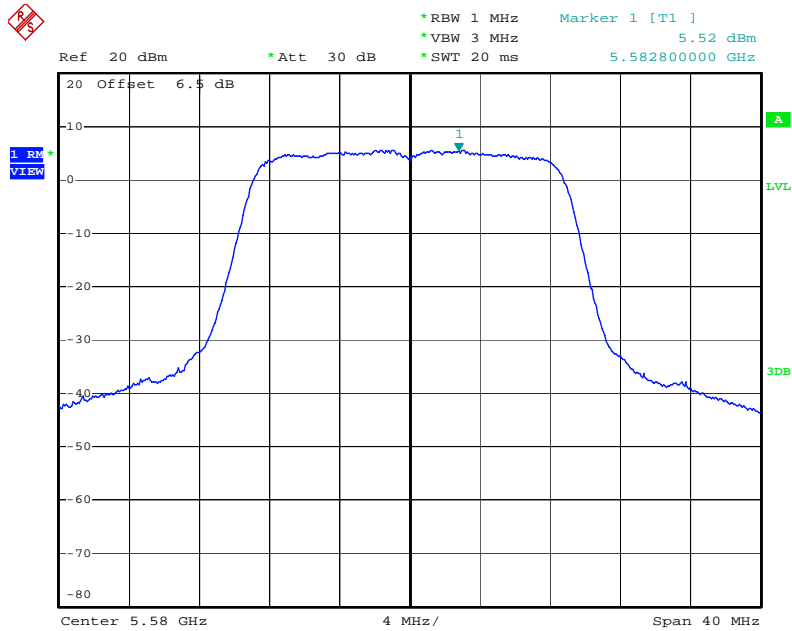


Date: 6.NOV.2009 01:33:11

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5700 MHz

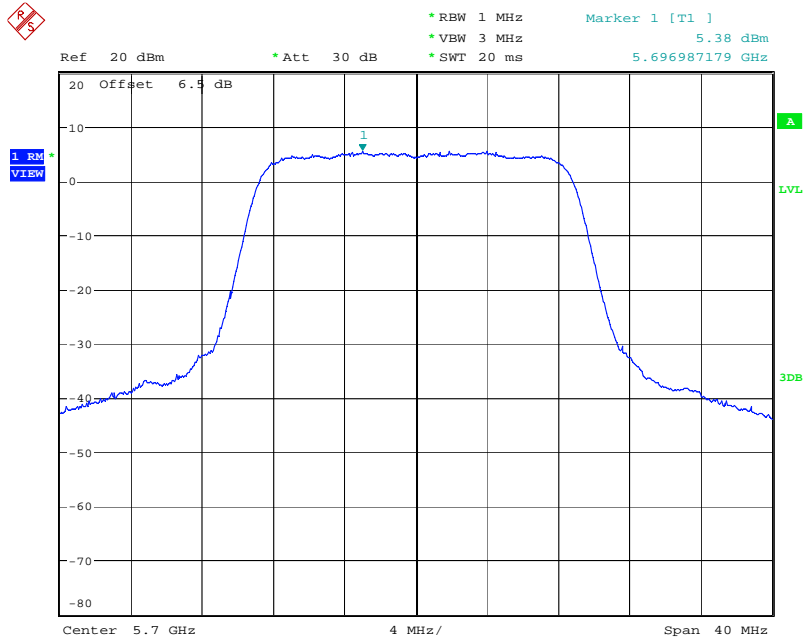


Date: 12.OCT.2009 17:43:51

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5190 MHz

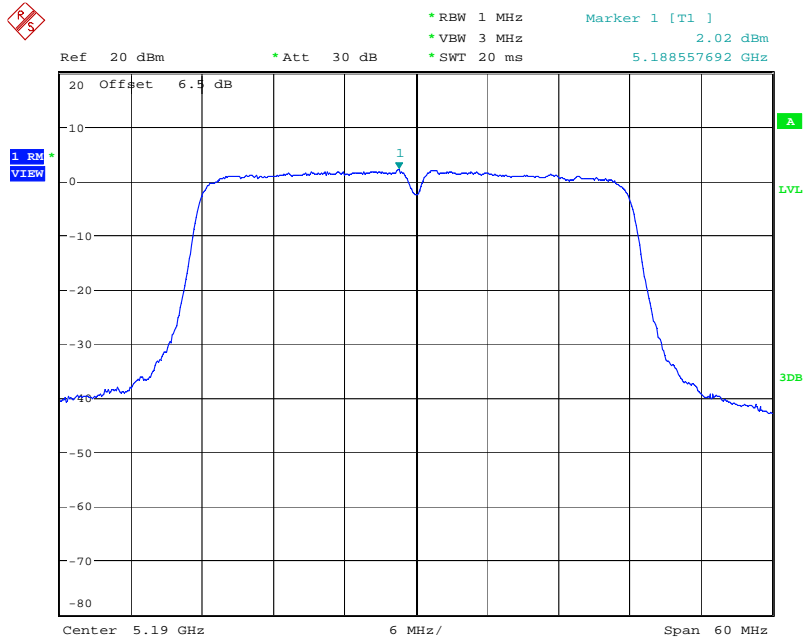


Date: 13.OCT.2009 09:53:19

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5230 MHz

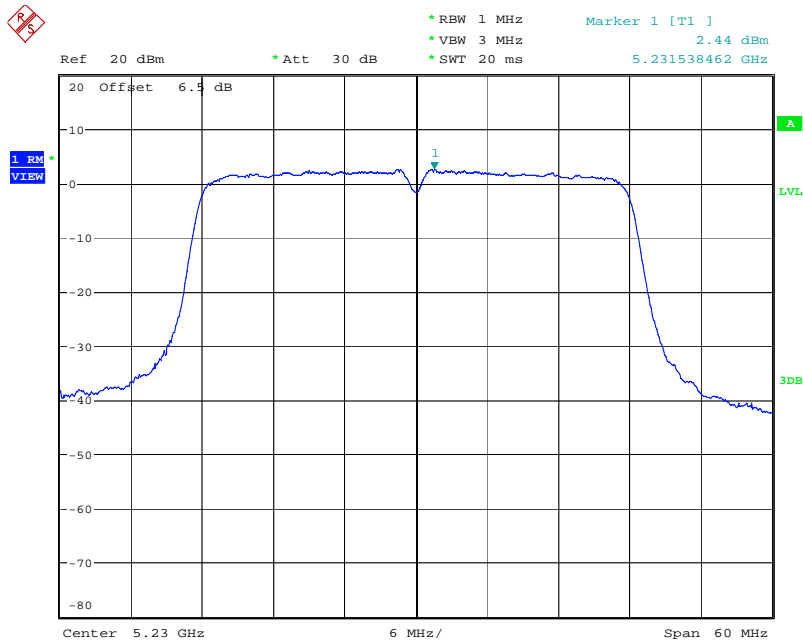


Date: 13.OCT.2009 09:54:23

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5270 MHz

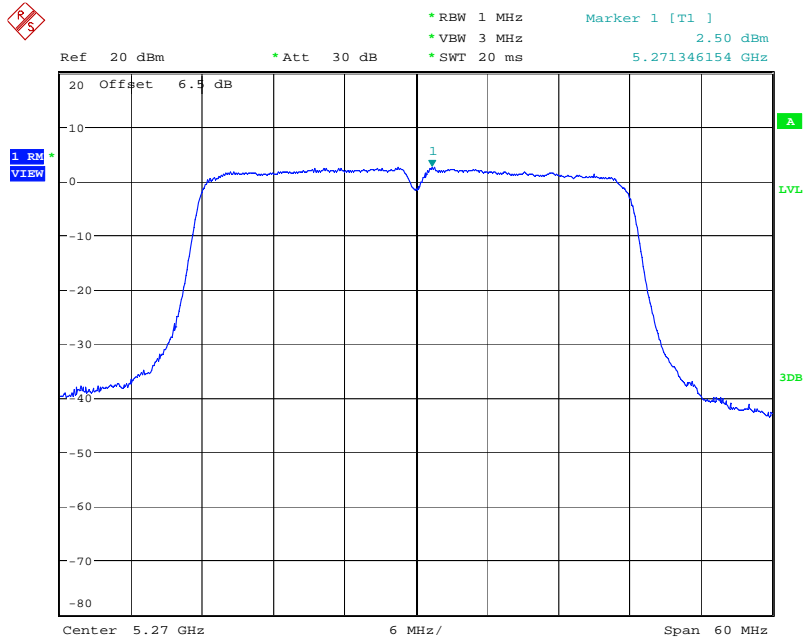

Date: 13.OCT.2009 09:47:00


Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5310 MHz

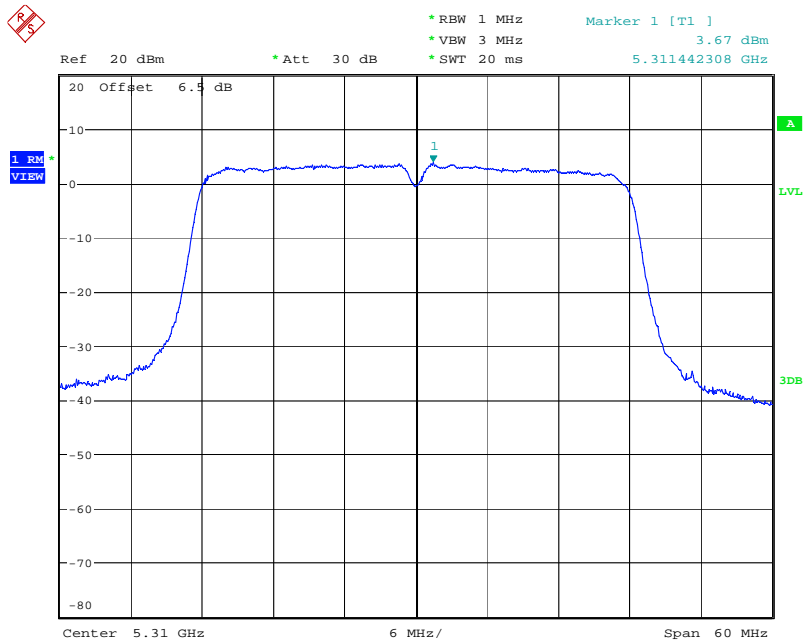

Date: 13.OCT.2009 09:48:08




Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5510 MHz

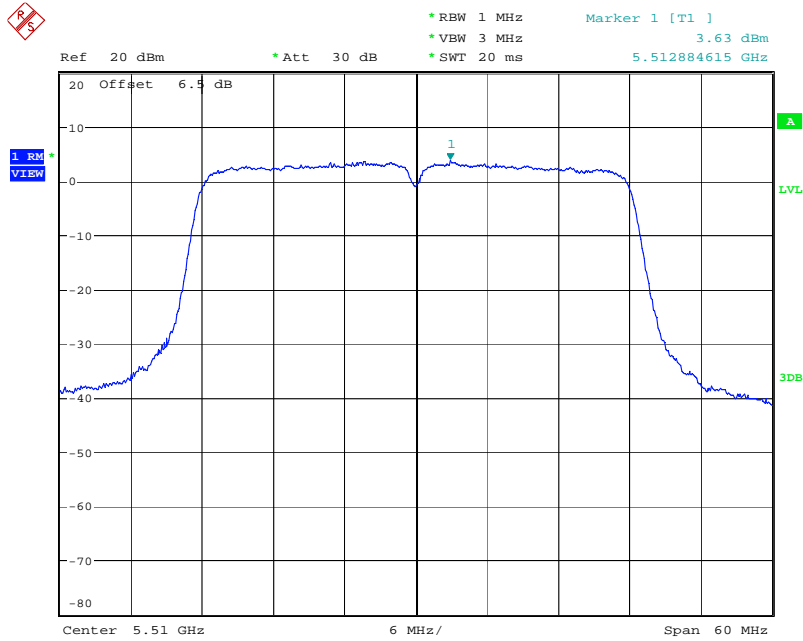


Date: 13.OCT.2009 09:49:14

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5550 MHz

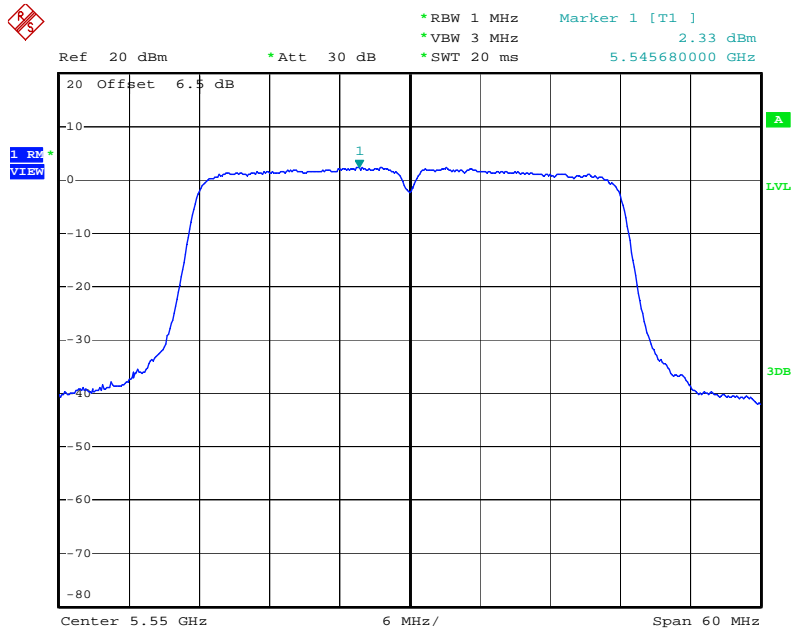

Date: 6.NOV.2009 01:36:49

Power Density Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5670 MHz

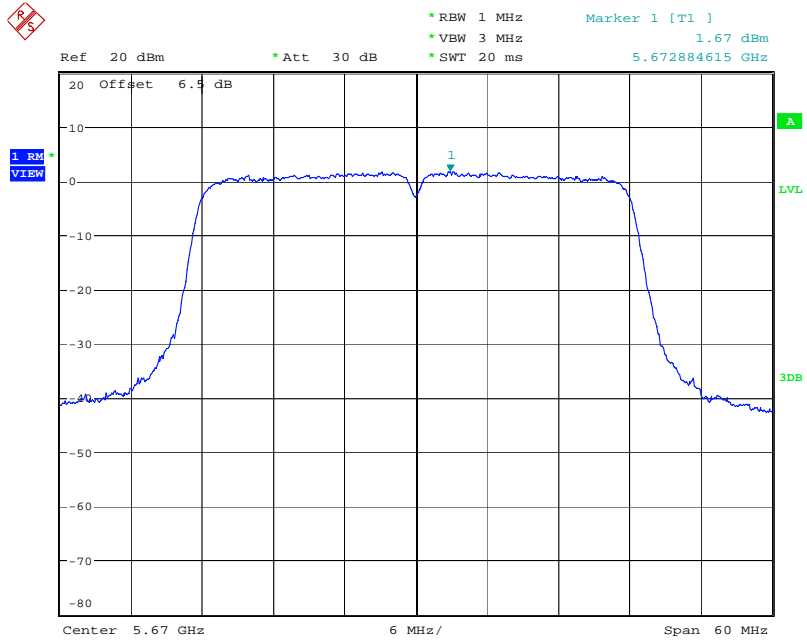

Date: 13.OCT.2009 09:51:33

**3.5 Peak Excursion Measurement**

**3.5.1 Limit**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting  |
|--------------------|--|
| Attenuation        | Auto   |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz (Peak Trace) / 1000 kHz (Average Trace)             |
| VB                 | 3000 kHz (Peak Trace) / 300 kHz (Average Trace)              |
| Detector           | Peak (Peak Trace) / Sample (Average Trace)                   |
| Trace              | Max Hold   |
| Sweep Time         | 60s  |

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold—and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

**3.5.4 Test Setup Layout**

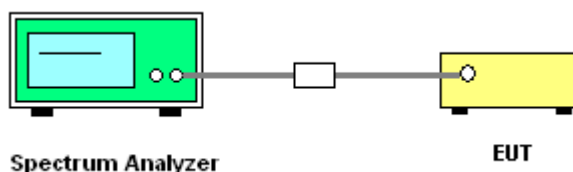

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Peak Excursion**

|                        |               |                      |           |
|------------------------|---------------|----------------------|-----------|
| <b>Final Test Date</b> | Oct. 29, 2009 | <b>Test Site No.</b> | TH01-HY   |
| <b>Temperature</b>     | 26            | <b>Humidity</b>      | 56%       |
| <b>Test Engineer</b>   | Duncan        | <b>Configuration</b> | 802.11a/n |

**For Single Chain:**

**Configuration of IEEE 802.11a**

| Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result          |
|-----------|---------------------|-----------------|-----------------|
| 5180 MHz  | 8.92                | 13              | <b>Complies</b> |
| 5200 MHz  | 8.88                | 13              | <b>Complies</b> |
| 5240 MHz  | 8.88                | 13              | <b>Complies</b> |
| 5260 MHz  | 8.88                | 13              | <b>Complies</b> |
| 5280 MHz  | 8.86                | 13              | <b>Complies</b> |
| 5320 MHz  | 8.92                | 13              | <b>Complies</b> |
| 5500 MHz  | 8.94                | 13              | <b>Complies</b> |
| 5580 MHz  | 9.01                | 13              | <b>Complies</b> |
| 5700 MHz  | 8.94                | 13              | <b>Complies</b> |

**Configuration IEEE 802.11n (20MHz)**

| Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result          |
|-----------|---------------------|-----------------|-----------------|
| 5180 MHz  | 9.09                | 13              | <b>Complies</b> |
| 5200 MHz  | 9.09                | 13              | <b>Complies</b> |
| 5240 MHz  | 9.15                | 13              | <b>Complies</b> |
| 5260 MHz  | 9.17                | 13              | <b>Complies</b> |
| 5280 MHz  | 9.09                | 13              | <b>Complies</b> |
| 5320 MHz  | 9.09                | 13              | <b>Complies</b> |
| 5500 MHz  | 9.08                | 13              | <b>Complies</b> |
| 5580 MHz  | 9.09                | 13              | <b>Complies</b> |
| 5700 MHz  | 9.18                | 13              | <b>Complies</b> |

**Configuration IEEE 802.11n (40MHz)**

| Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result          |
|-----------|---------------------|-----------------|-----------------|
| 5190 MHz  | 9.05                | 13              | <b>Complies</b> |
| 5230 MHz  | 9.06                | 13              | <b>Complies</b> |
| 5270 MHz  | 8.90                | 13              | <b>Complies</b> |
| 5310 MHz  | 9.05                | 13              | <b>Complies</b> |
| 5510 MHz  | 9.12                | 13              | <b>Complies</b> |
| 5550 MHz  | 9.07                | 13              | <b>Complies</b> |
| 5670 MHz  | 9.08                | 13              | <b>Complies</b> |

For Two Chain:

**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz)**


| Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result          |
|-----------|---------------------|-----------------|-----------------|
| 5180 MHz  | 9.89                | 13              | <b>Complies</b> |
| 5200 MHz  | 9.57                | 13              | <b>Complies</b> |
| 5240 MHz  | 9.96                | 13              | <b>Complies</b> |
| 5260 MHz  | 9.50                | 13              | <b>Complies</b> |
| 5280 MHz  | 9.96                | 13              | <b>Complies</b> |
| 5320 MHz  | 10.02               | 13              | <b>Complies</b> |
| 5500 MHz  | 9.83                | 13              | <b>Complies</b> |
| 5580 MHz  | 9.89                | 13              | <b>Complies</b> |
| 5700 MHz  | 9.68                | 13              | <b>Complies</b> |

**Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz)**

| Frequency | Peak Excursion (dB) | Max. Limit (dB) | Result          |
|-----------|---------------------|-----------------|-----------------|
| 5190 MHz  | 9.50                | 13              | <b>Complies</b> |
| 5230 MHz  | 9.62                | 13              | <b>Complies</b> |
| 5270 MHz  | 9.65                | 13              | <b>Complies</b> |
| 5310 MHz  | 9.48                | 13              | <b>Complies</b> |
| 5510 MHz  | 9.54                | 13              | <b>Complies</b> |
| 5550 MHz  | 9.74                | 13              | <b>Complies</b> |
| 5670 MHz  | 9.31                | 13              | <b>Complies</b> |


For Single Chain:

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

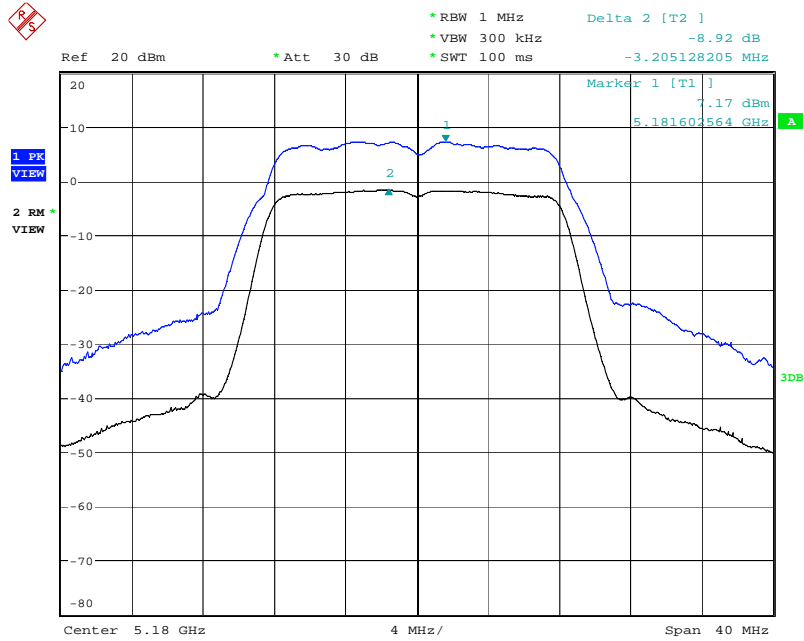


Date: 12.OCT.2009 14:22:11

Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

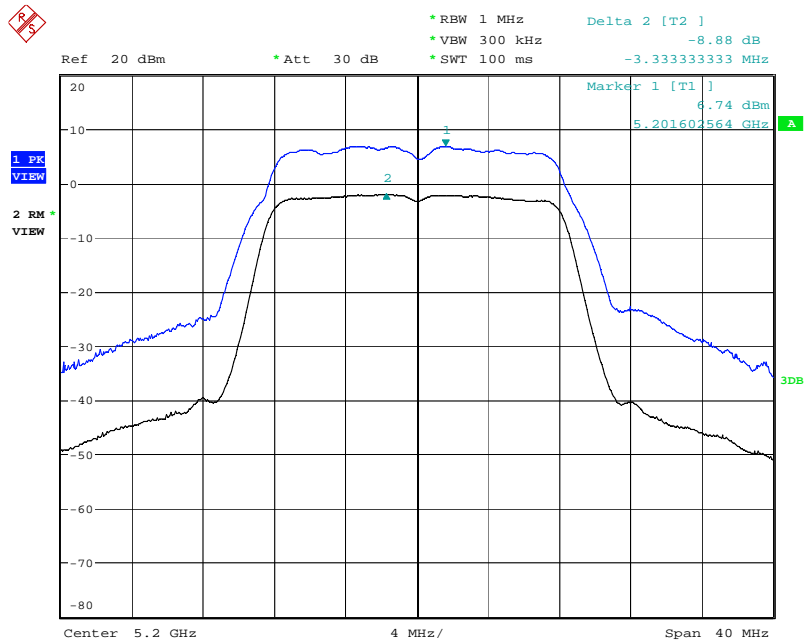


Date: 12.OCT.2009 14:23:46

Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

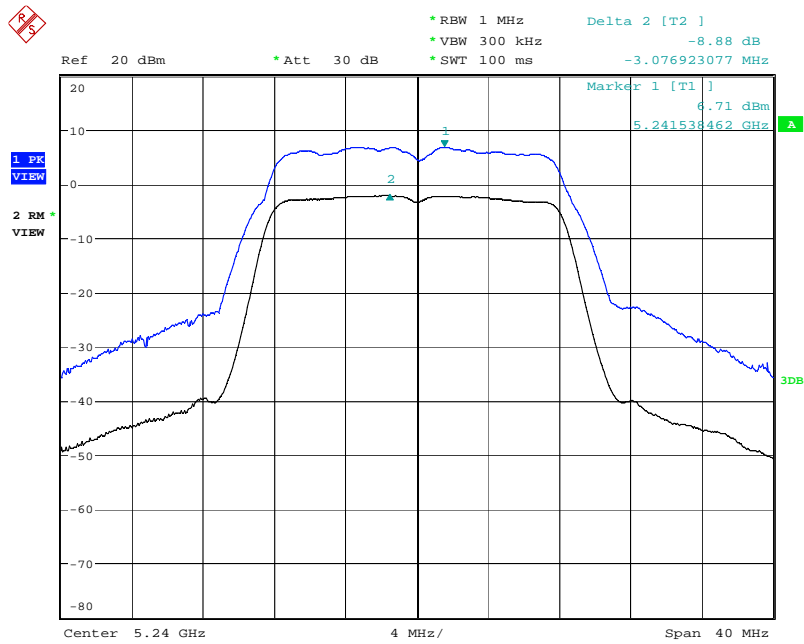


Date: 12.OCT.2009 14:24:55

Peak Excursion Plot on Configuration IEEE 802.11a / 5260 MHz

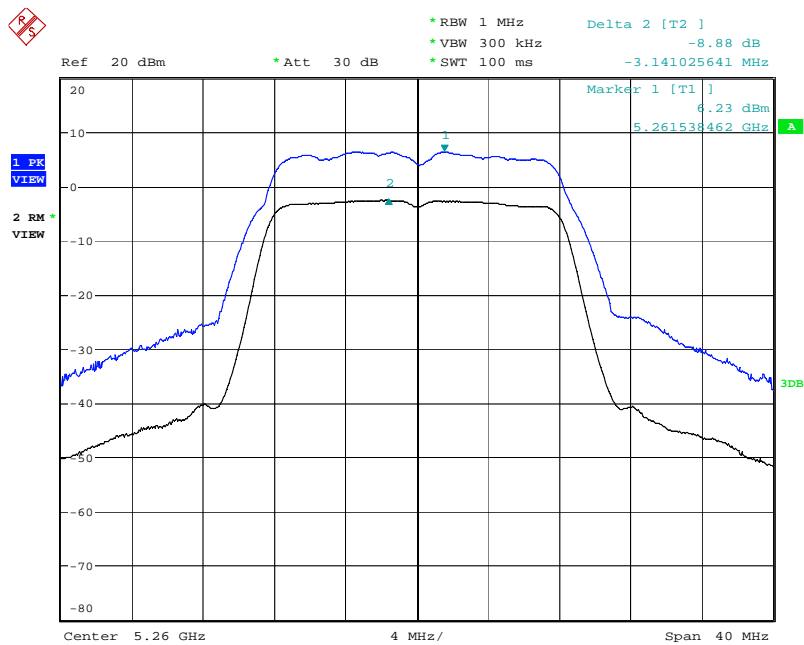


Date: 12.OCT.2009 14:26:05

Peak Excursion Plot on Configuration IEEE 802.11a / 5280 MHz

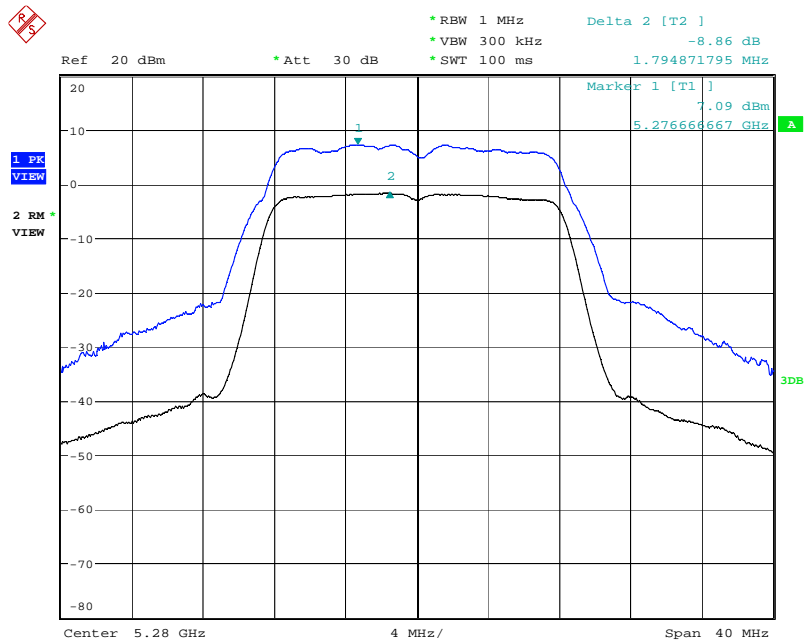

Date: 12.OCT.2009 14:27:17


Peak Excursion Plot on Configuration IEEE 802.11a / 5320 MHz

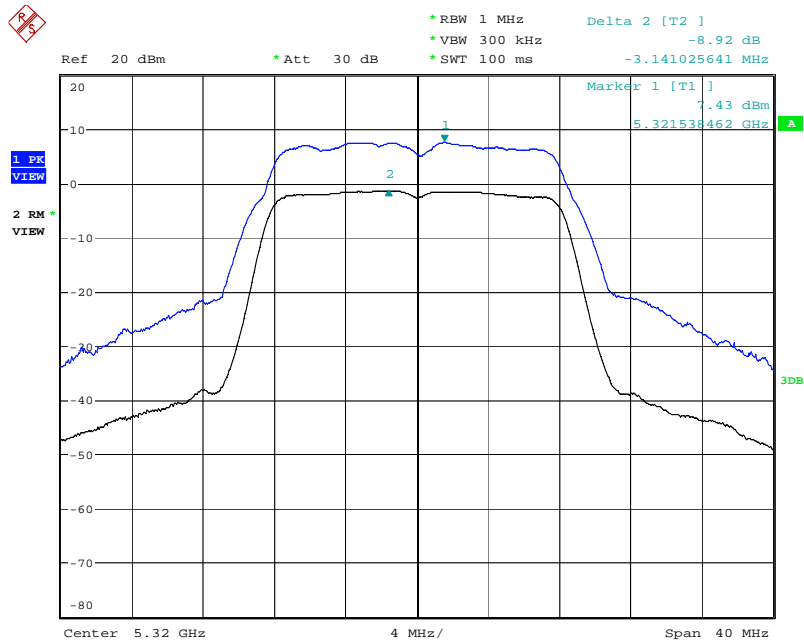

Date: 12.OCT.2009 14:28:24




Peak Excursion Plot on Configuration IEEE 802.11a / 5500 MHz

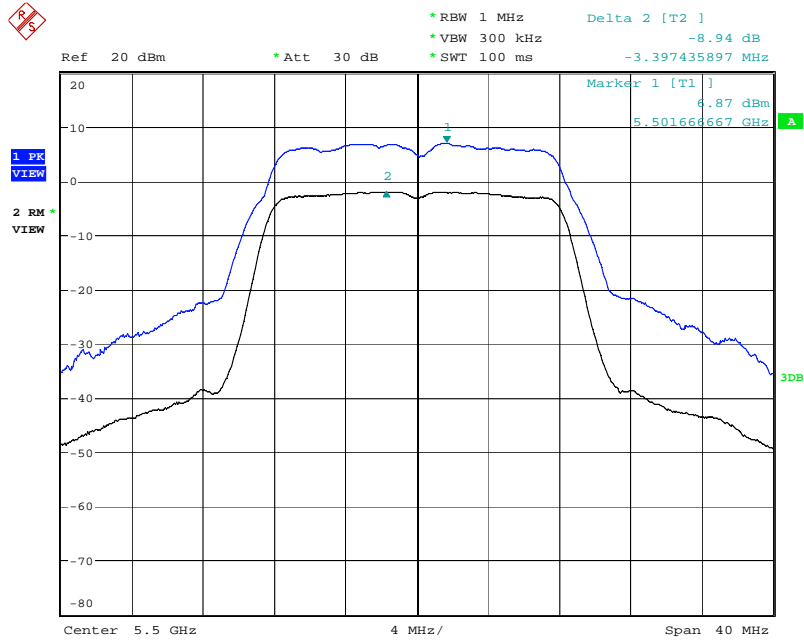


Date: 12.OCT.2009 14:29:57

Peak Excursion Plot on Configuration IEEE 802.11a / 5580 MHz

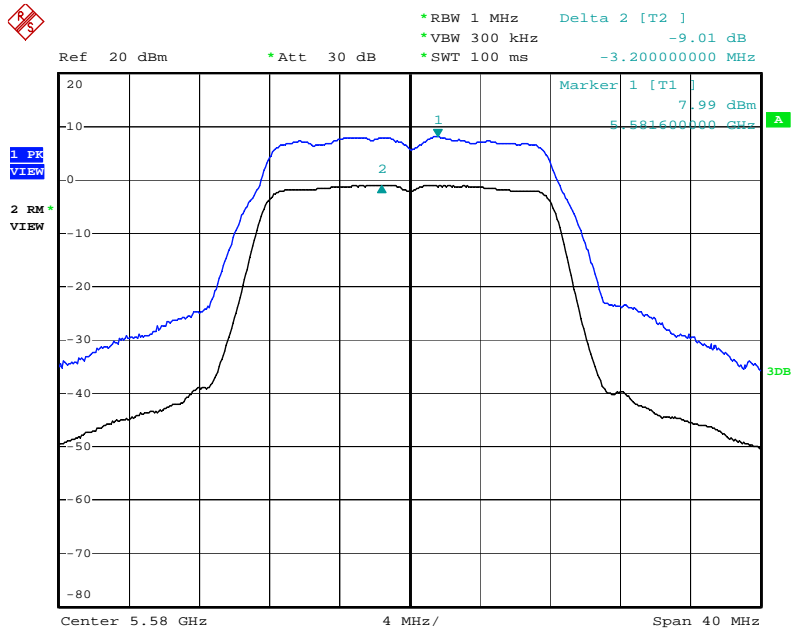


Date: 6.NOV.2009 00:46:18

Peak Excursion Plot on Configuration IEEE 802.11a / 5700 MHz

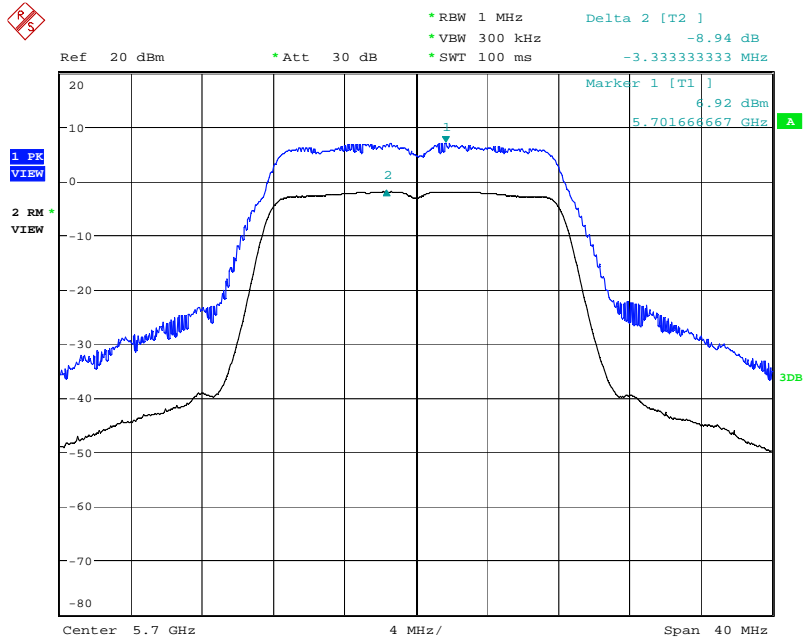


Date: 12.OCT.2009 14:35:35

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5180 MHz

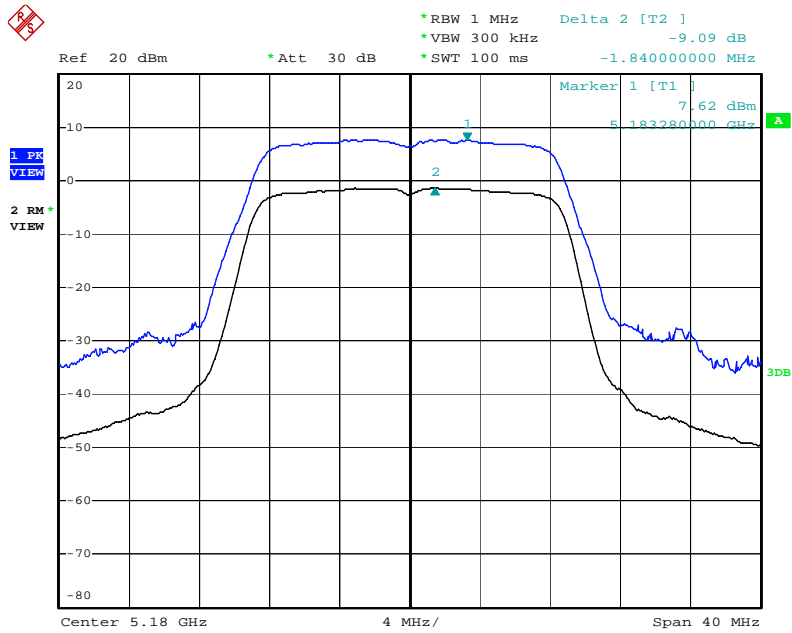


Date: 28.OCT.2009 23:46:19

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5200 MHz

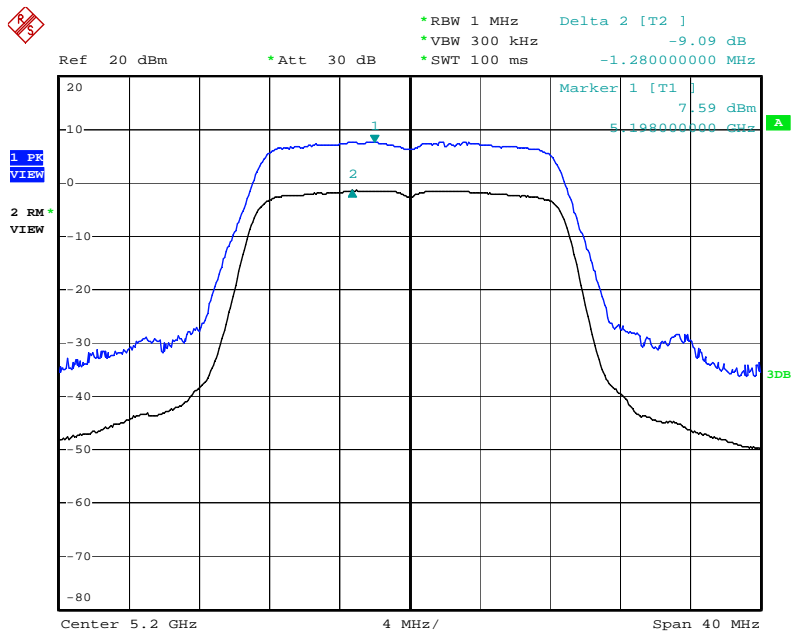


Date: 28.OCT.2009 23:59:23

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5240 MHz

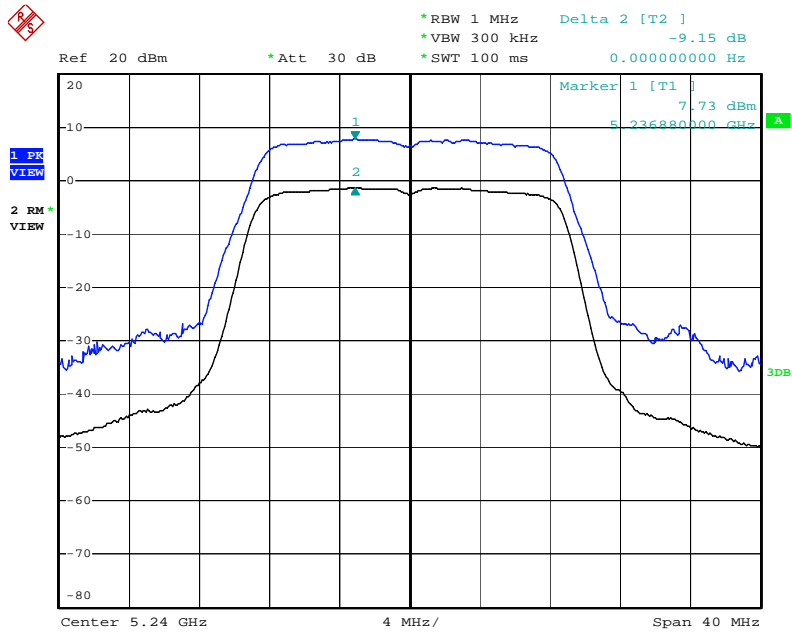


Date: 29.OCT.2009 00:01:56

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5260 MHz

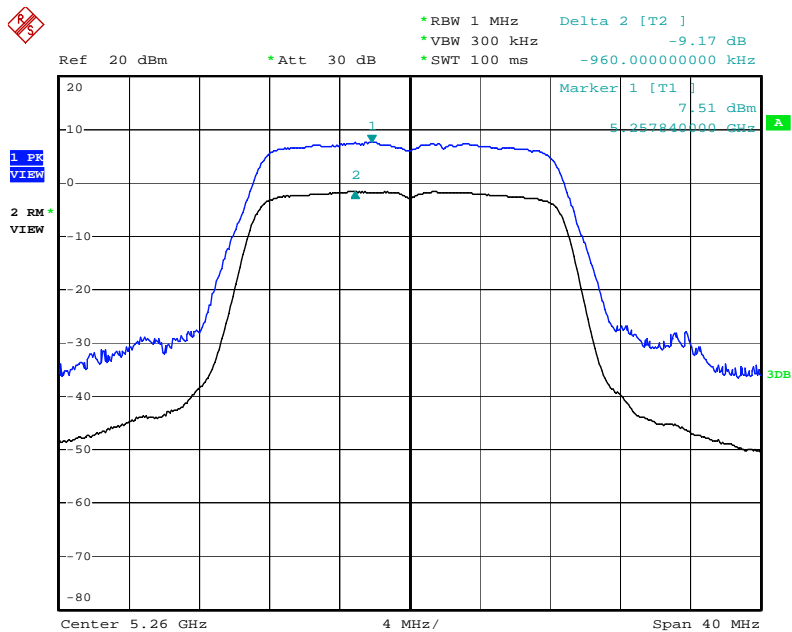


Date: 29.OCT.2009 00:10:59

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5280 MHz

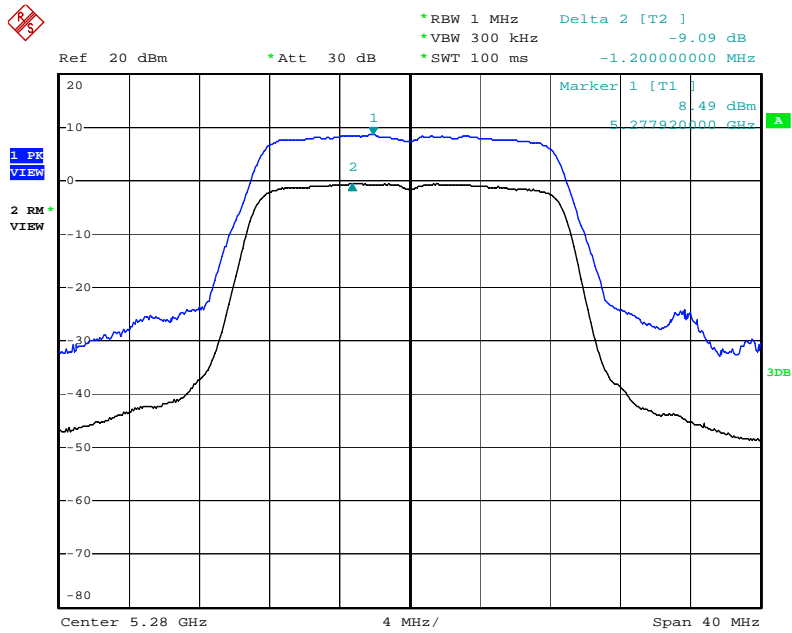


Date: 29.OCT.2009 00:13:57

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5320 MHz

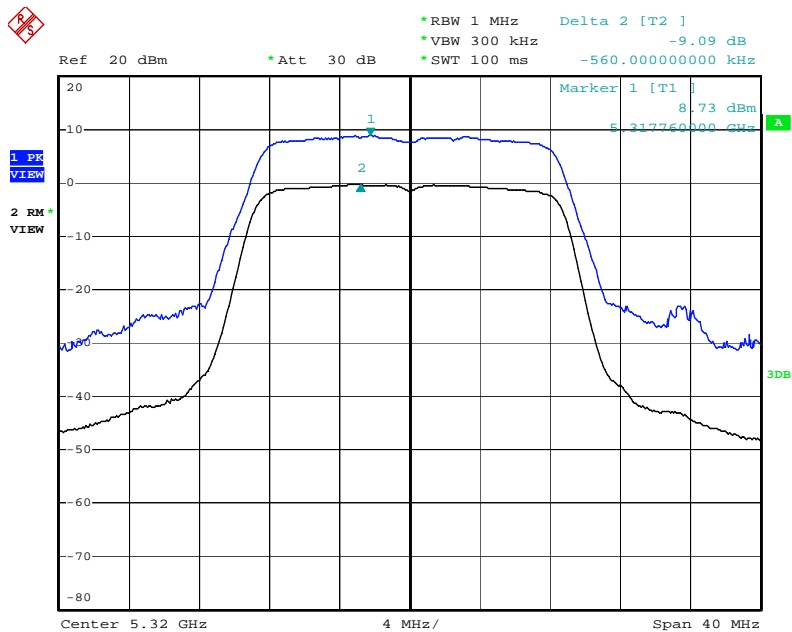


Date: 29.OCT.2009 00:16:57

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5500 MHz

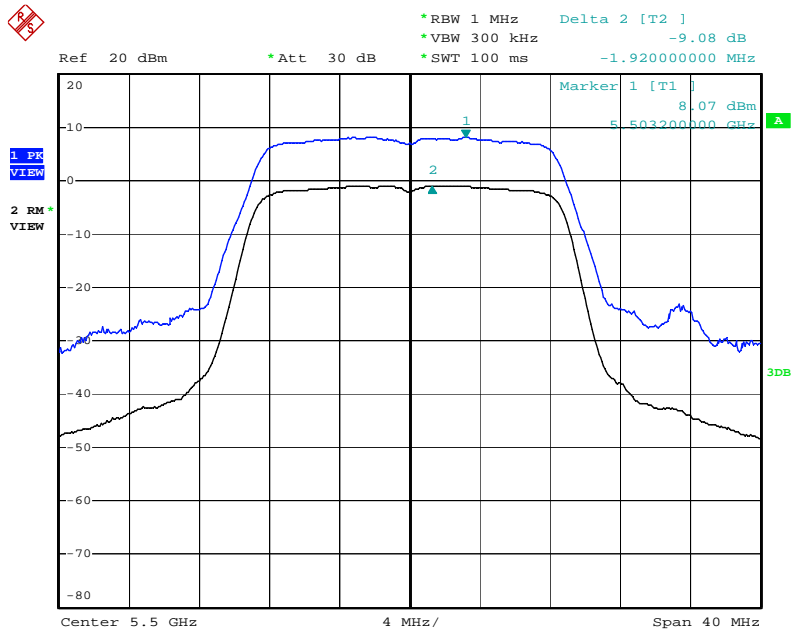


Date: 29.OCT.2009 00:18:48

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5580 MHz

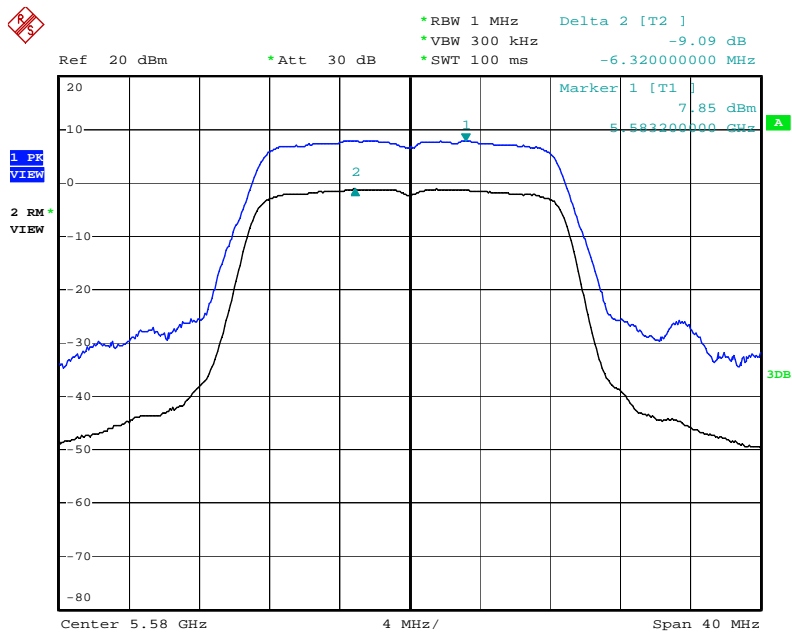


Date: 6.NOV.2009 00:57:03

Peak Excursion Plot on Configuration IEEE 802.11n (20MHz) / 5700 MHz

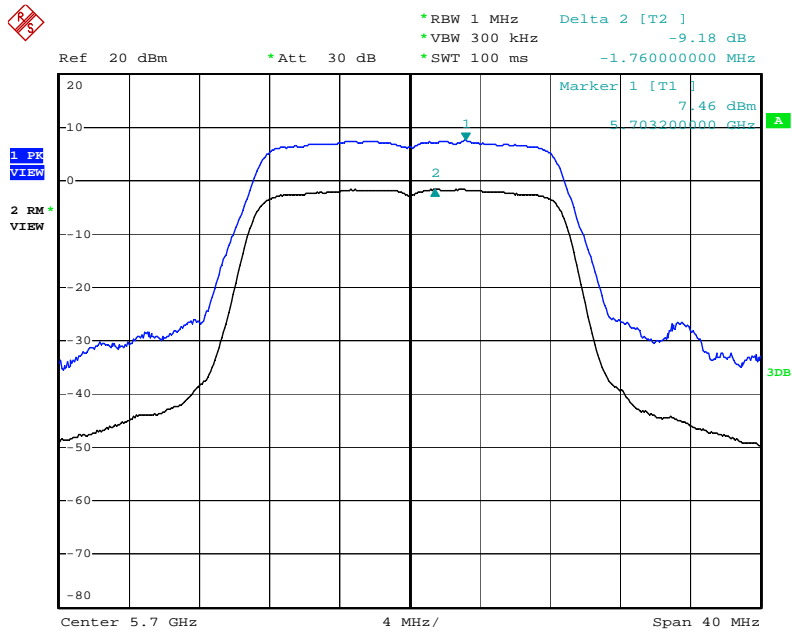


Date: 29.OCT.2009 00:21:26

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5190 MHz

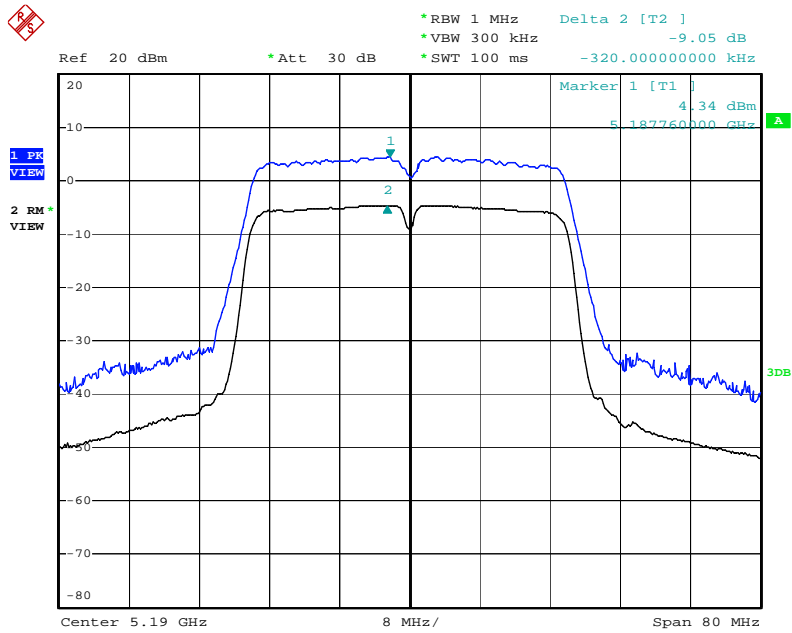

Date: 29.OCT.2009 01:11:54


Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5230 MHz

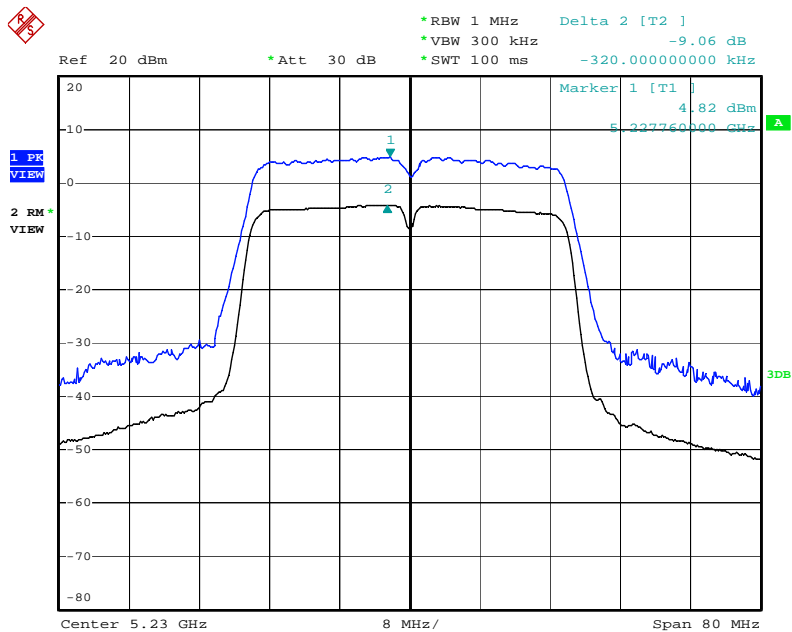

Date: 29.OCT.2009 01:13:13




Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5270 MHz

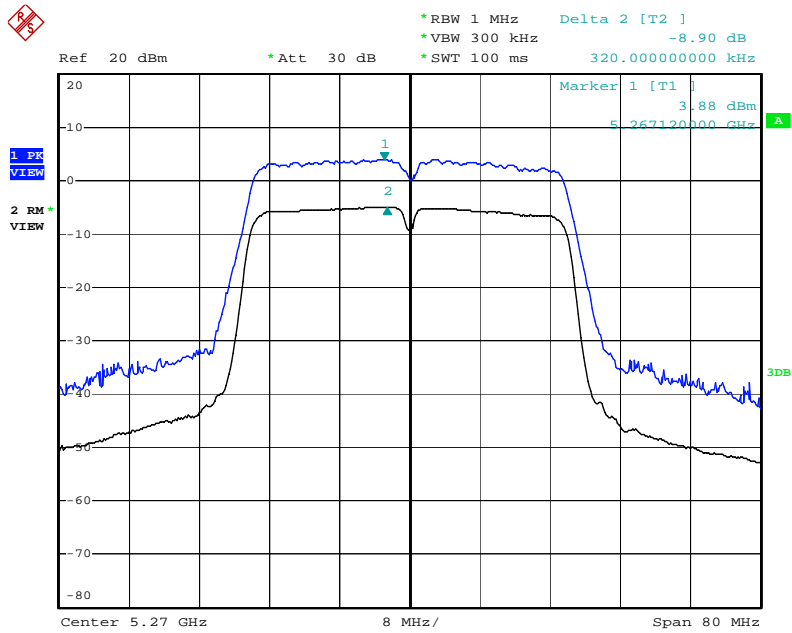


Date: 29.OCT.2009 01:14:18

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5310 MHz

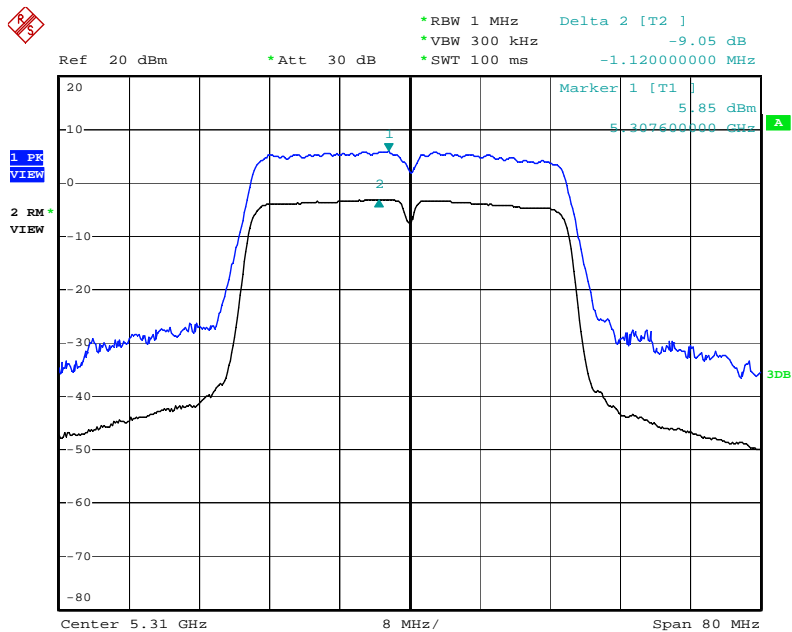


Date: 29.OCT.2009 01:15:24

Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5550 MHz

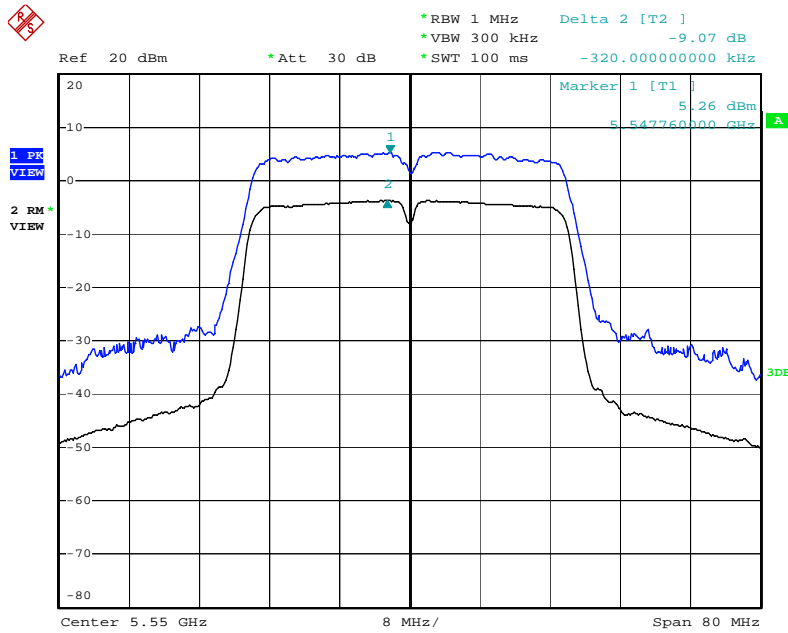

Date: 6.NOV.2009 01:01:33


Peak Excursion Plot on Configuration IEEE 802.11n (40MHz) / 5670 MHz

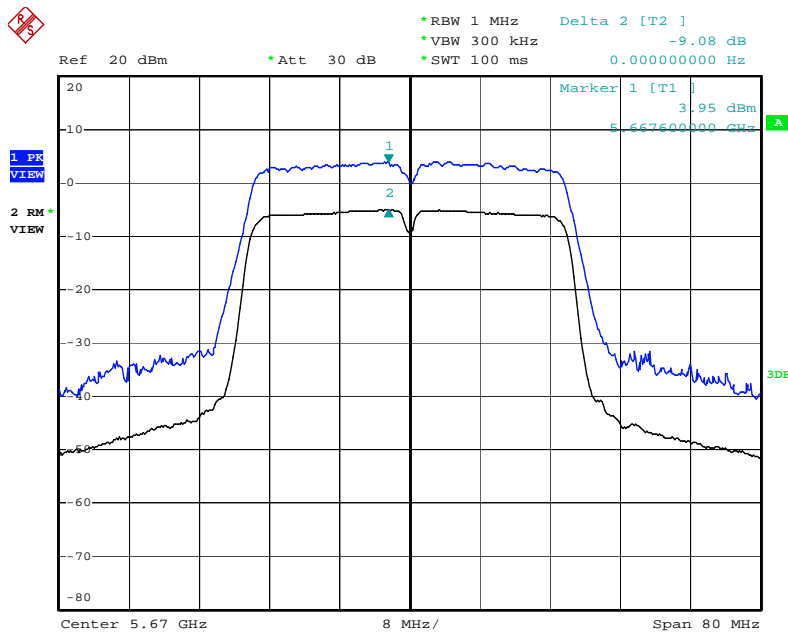

Date: 29.OCT.2009 01:18:52


For Two Chain:

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5180 MHz

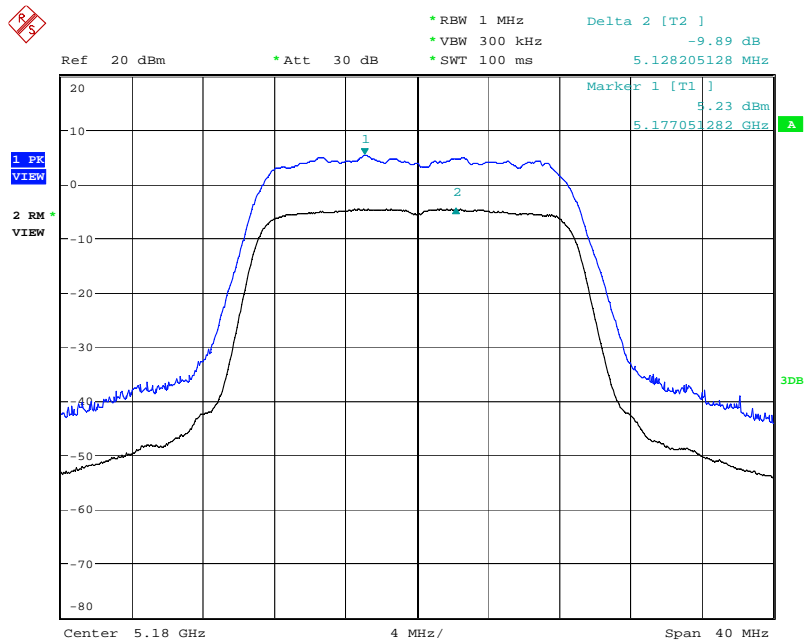


Date: 12.OCT.2009 20:27:09

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5200 MHz

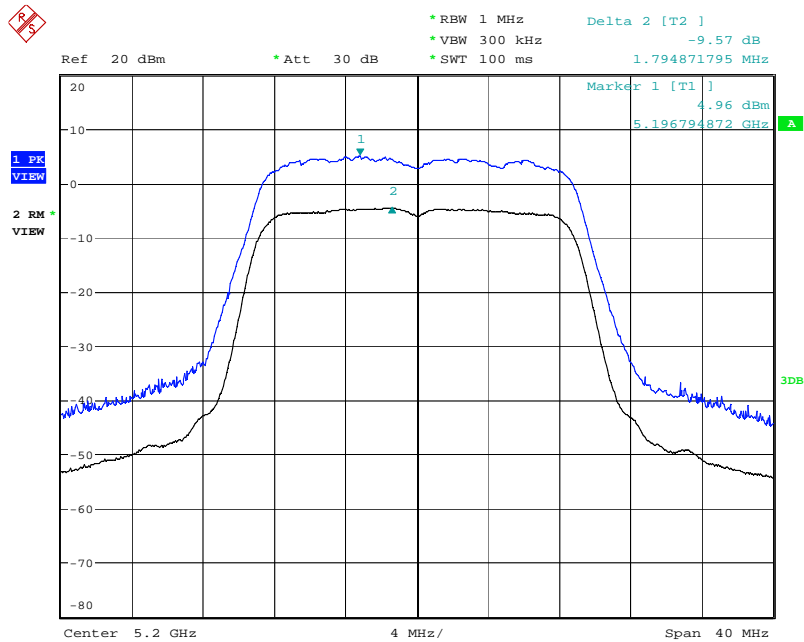


Date: 12.OCT.2009 20:30:55

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5240 MHz

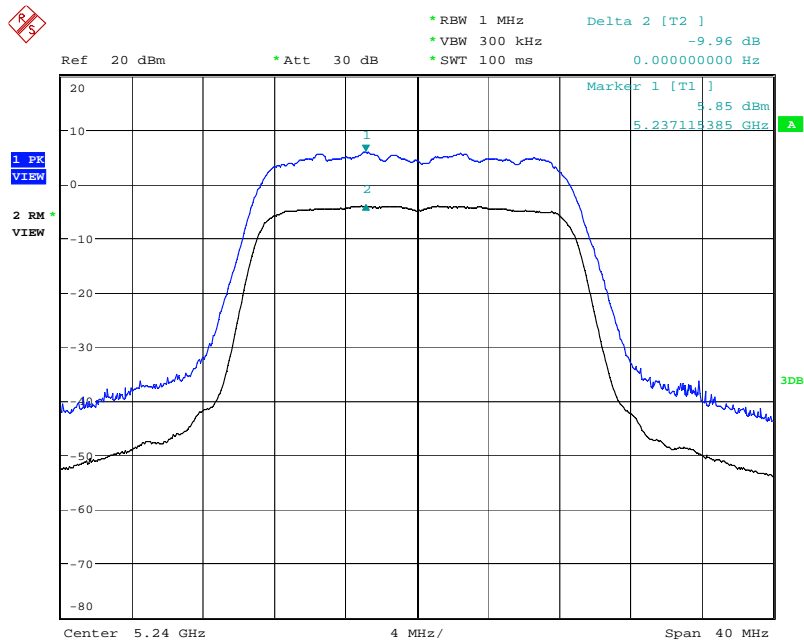


Date: 12.OCT.2009 20:33:43

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5260 MHz

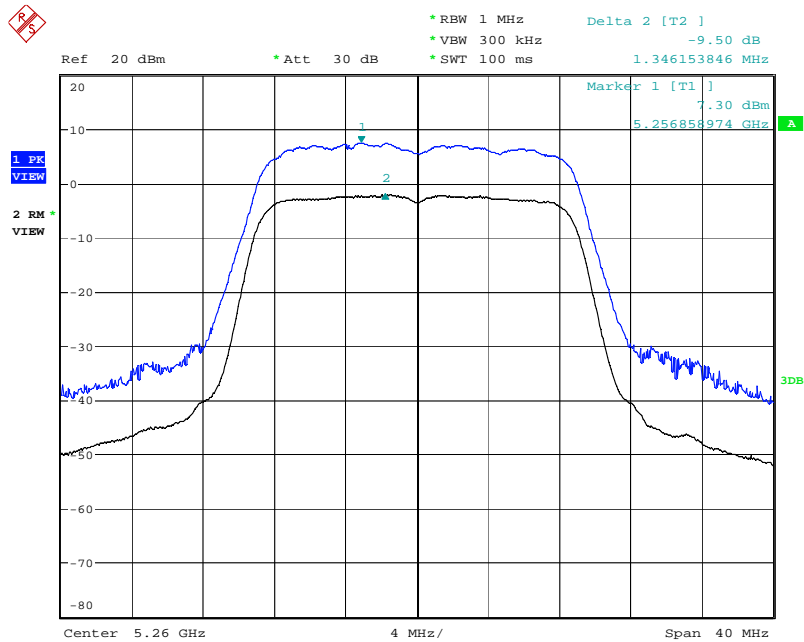


Date: 12.OCT.2009 17:38:43

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5280 MHz

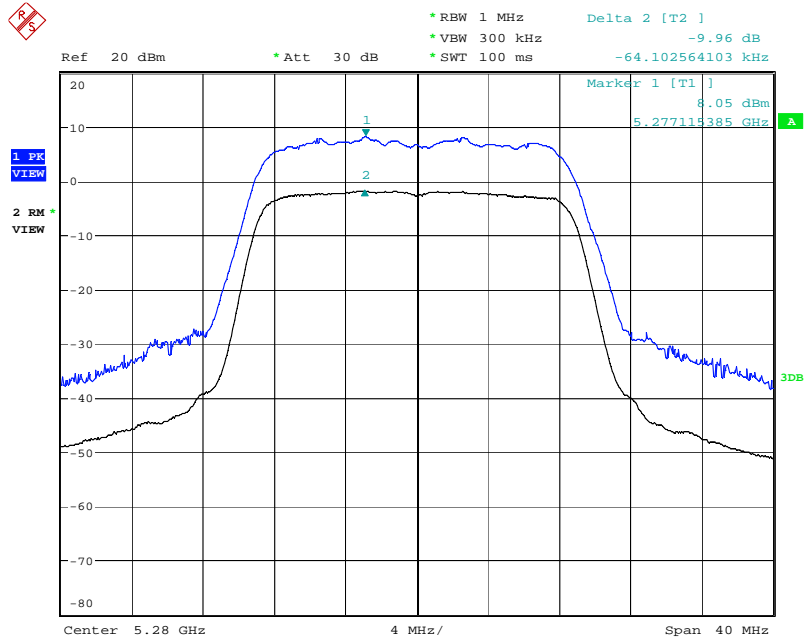


Date: 12.OCT.2009 17:39:51

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5320 MHz

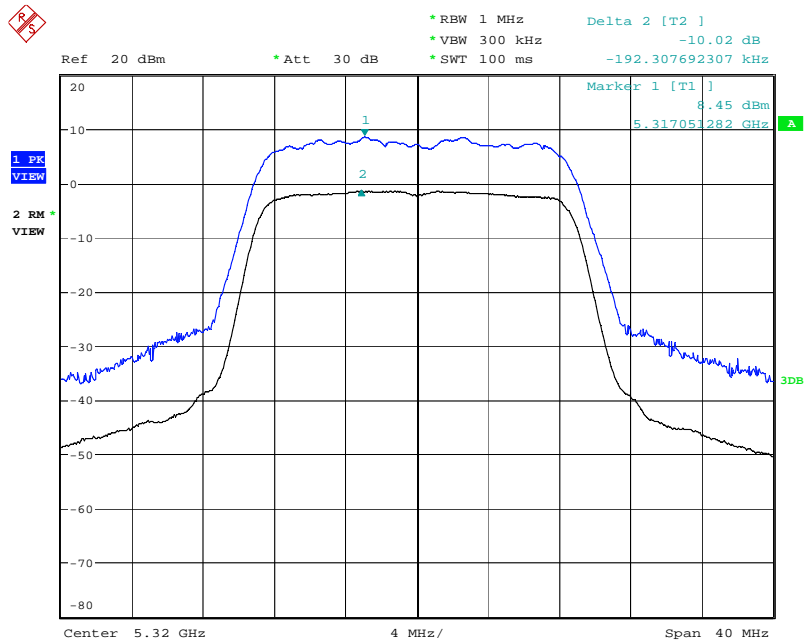


Date: 12.OCT.2009 17:40:52

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5500 MHz

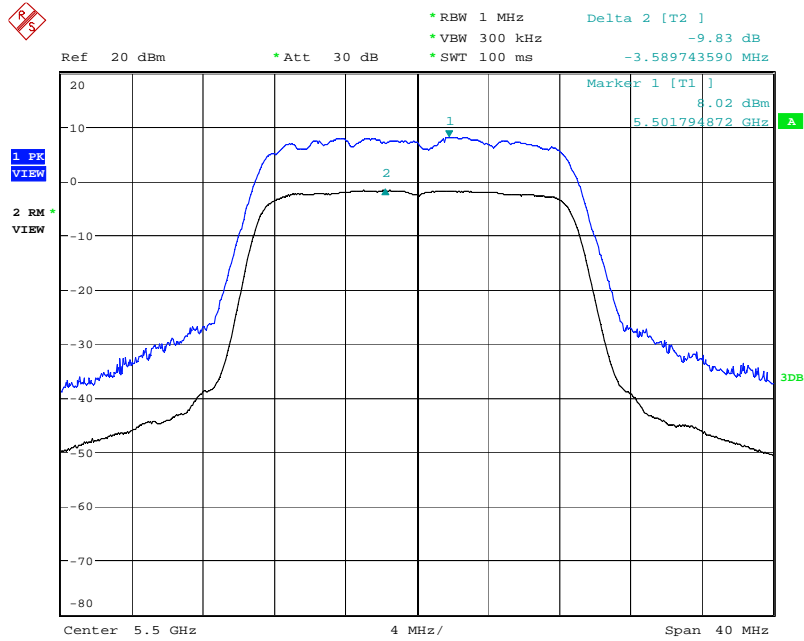


Date: 12.OCT.2009 17:41:57

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5580 MHz

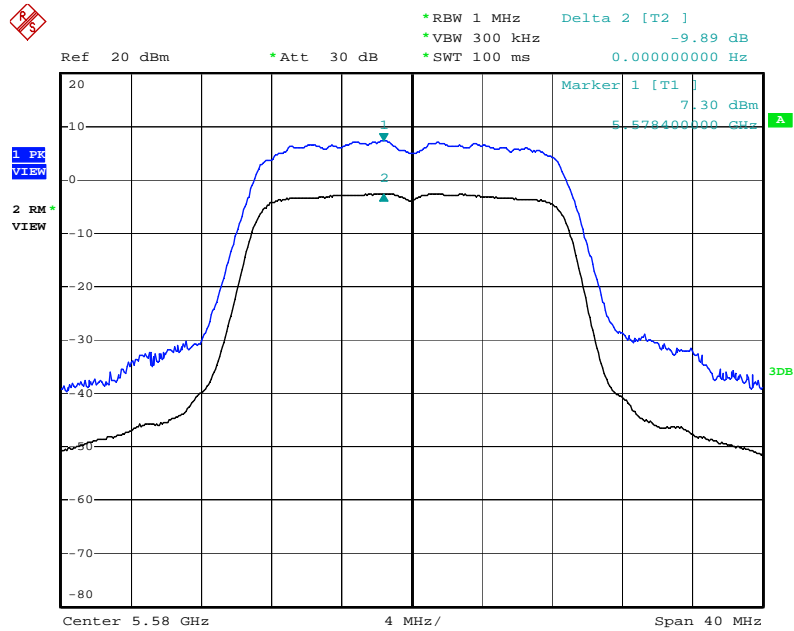


Date: 6.NOV.2009 01:33:36

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (20MHz) / 5700 MHz

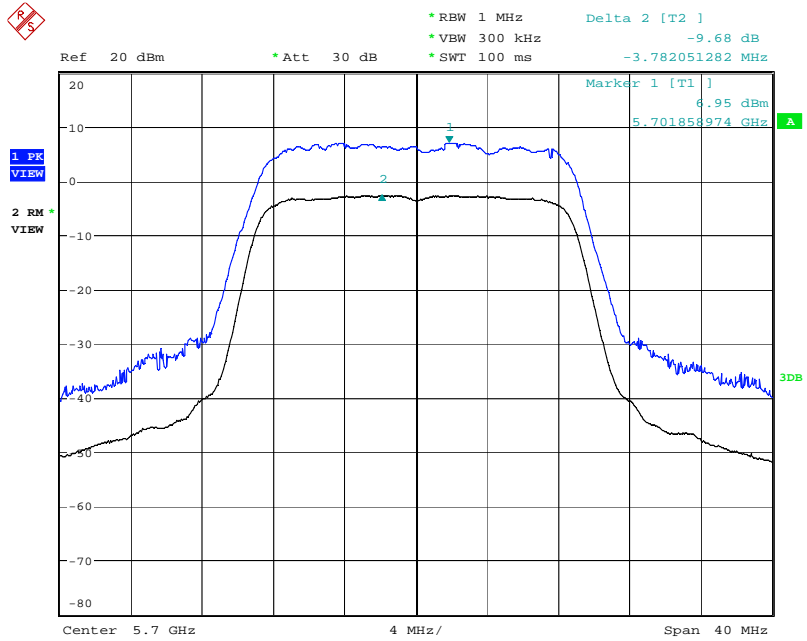


Date: 12.OCT.2009 17:44:15

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5190 MHz

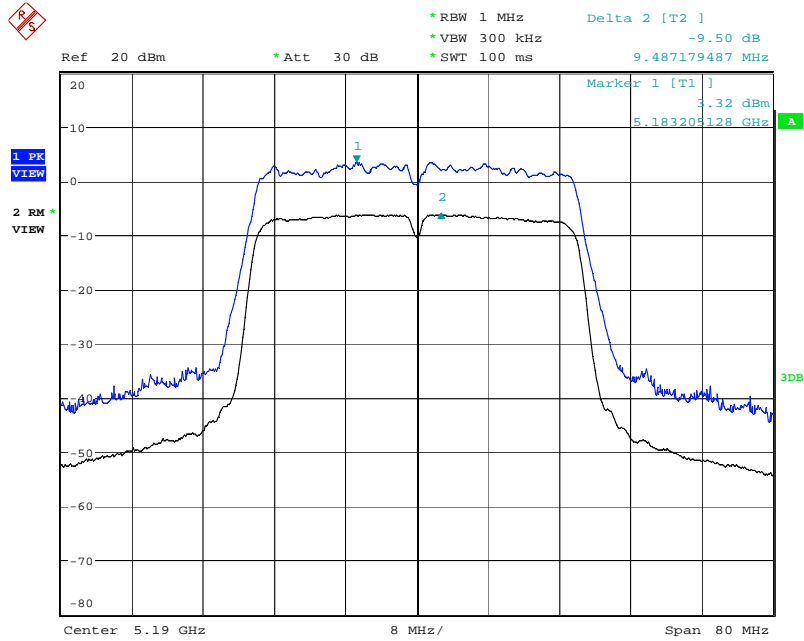

Date: 13.OCT.2009 09:53:43


Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5230 MHz

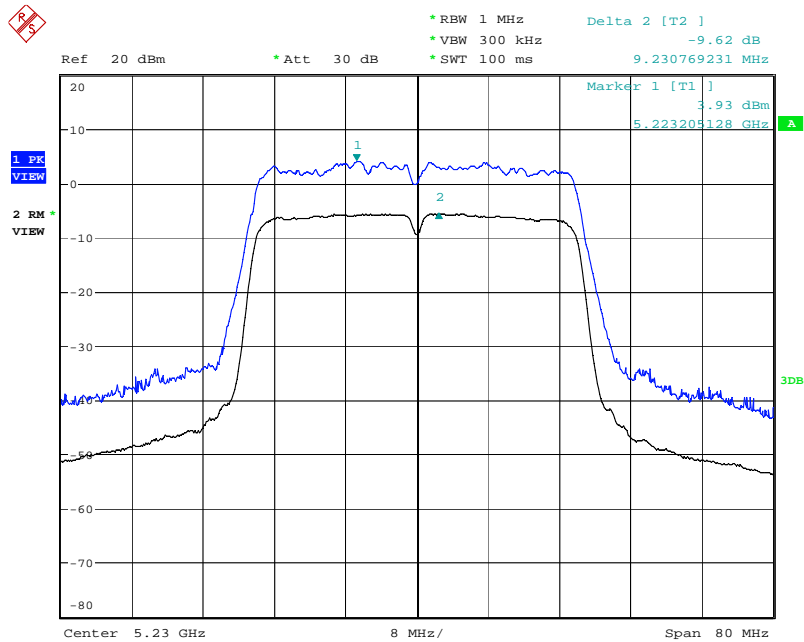

Date: 13.OCT.2009 09:54:48




Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5270 MHz

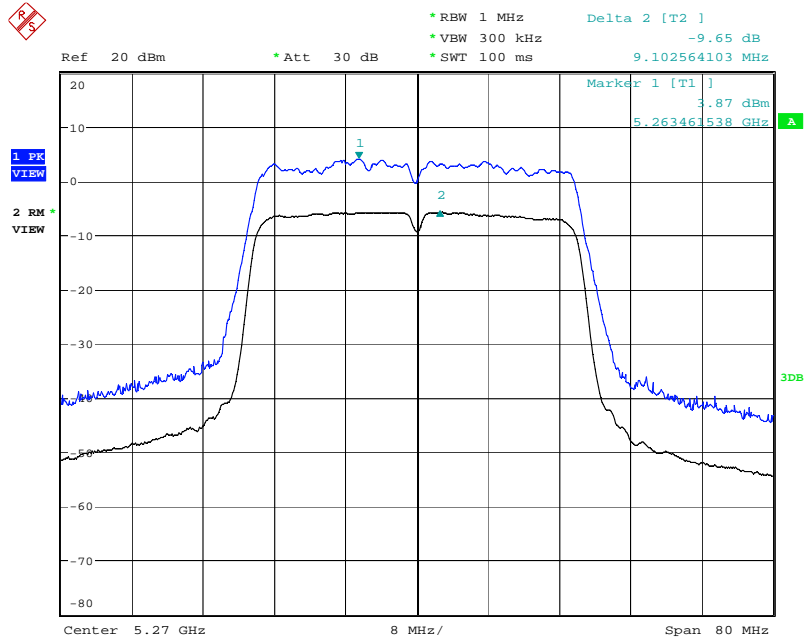


Date: 13.OCT.2009 09:47:24

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5310 MHz

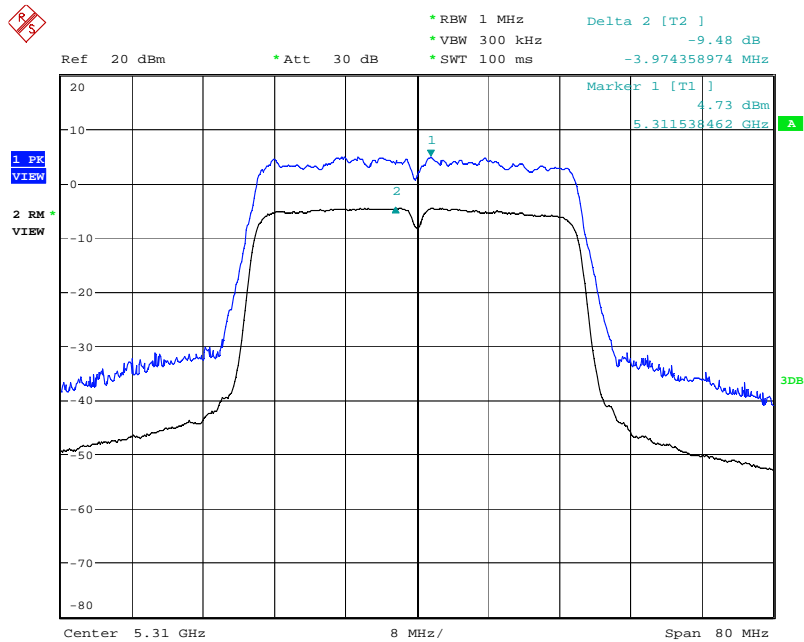


Date: 13.OCT.2009 09:48:32

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5510 MHz

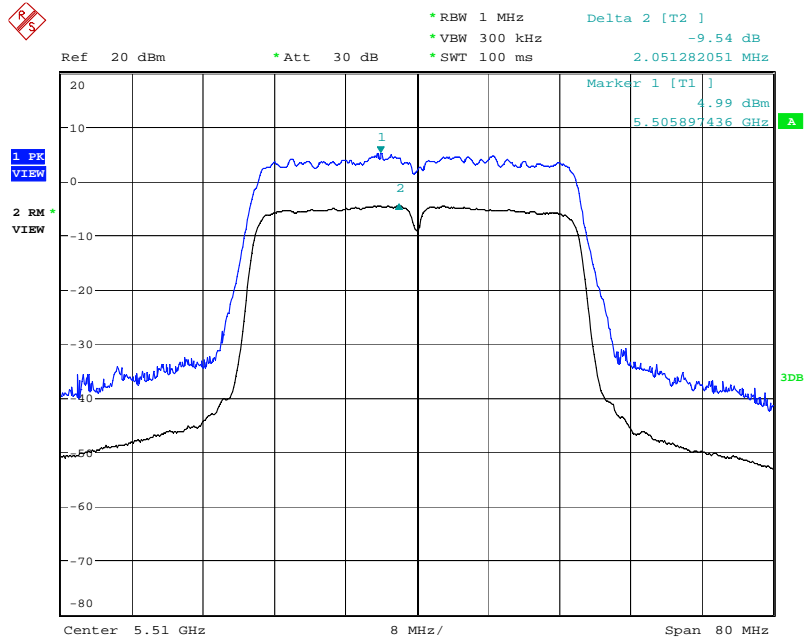


Date: 13.OCT.2009 09:49:38

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5550 MHz

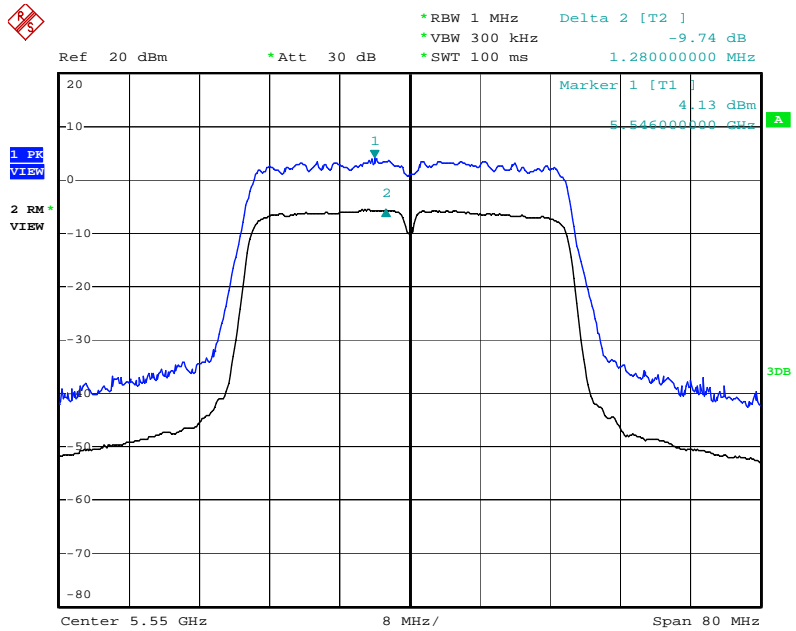

Date: 6.NOV.2009 01:37:15

Peak Excursion Plot on Configuration IEEE 802.11n Ant. 1 + Ant. 2 (40MHz) / 5670 MHz

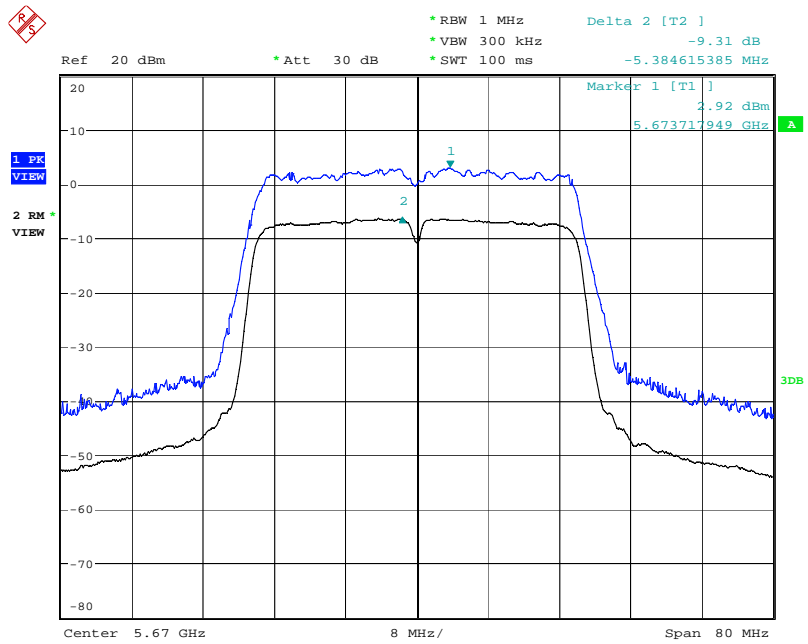

Date: 13.OCT.2009 09:51:57

**3.6 Radiated Emissions Measurement**

**3.6.1 Limit**

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| <b>Frequencies (MHz)</b> | <b>Field Strength (micorvolts/meter)</b> | <b>Measurement Distance (meters)</b> |
|--------------------------|--|--------------------------------------|
| 0.009~0.490              | 2400/F(KHz)                              | 300                                  |
| 0.490~1.705              | 24000/F(KHz)                             | 30                                   |
| 1.705~30.0               | 30                                       | 30                                   |
| 30~88                    | 100                                      | 3                                    |
| 88~216                   | 150                                      | 3                                    |
| 216~960                  | 200                                      | 3                                    |
| Above 960                | 500                                      | 3                                    |

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| <b>Spectrum Parameter</b>                 | <b>Setting</b>                                 |
|---|--|
| Attenuation                               | Auto   |
| Start Frequency                           | 1000 MHz                                       |
| Stop Frequency                            | 40 GHz   |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz z for peak                         |


| <b>Receiver Parameter</b> | <b>Setting</b>                   |
|---------------------------|----------------------------------|
| Attenuation               | Auto                             |
| Start ~ Stop Frequency    | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency    | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency    | 30MHz~1000MHz / RB 120kHz for QP |

**3.6.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.6.4 Test Setup Layout

For radiated emissions below 30MHz

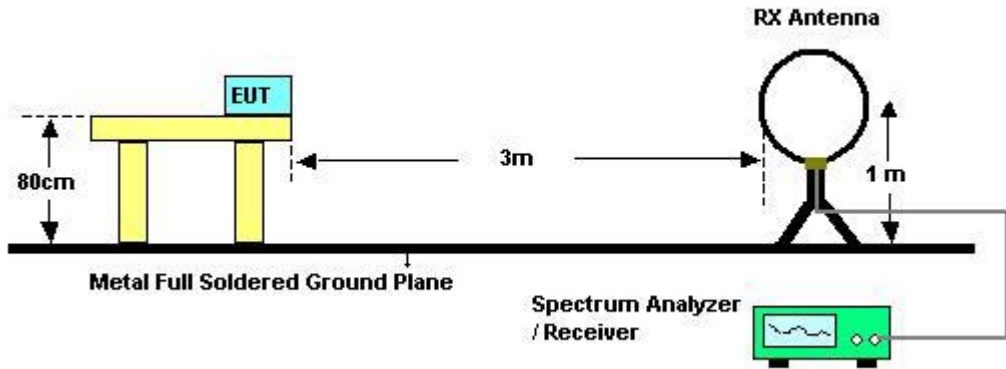

For radiated emissions above 30MHz

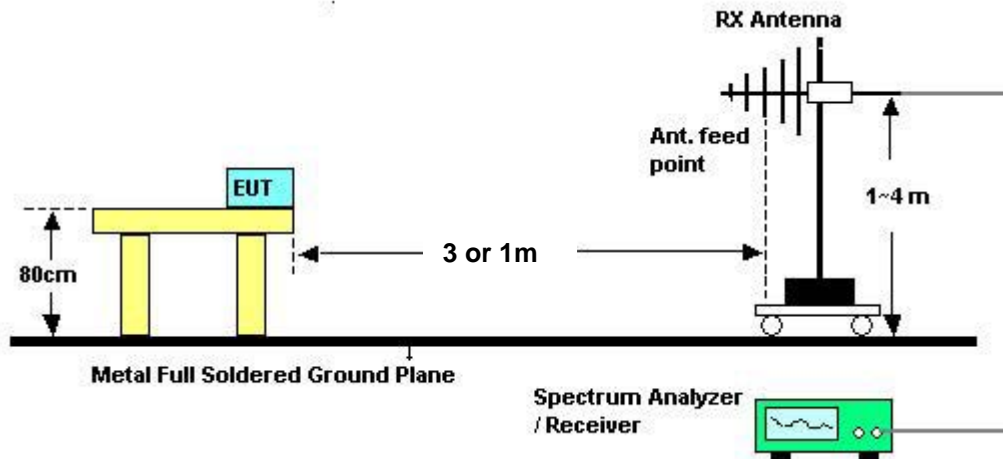

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.6.7 Results of Radiated Emissions (9kHz~30MHz)**

|                        |               |                      |           |
|------------------------|---------------|----------------------|-----------|
| <b>Final Test Date</b> | Oct. 07, 2009 | <b>Test Site No.</b> | 03CH02-HY |
| <b>Temperature</b>     | 25.5          | <b>Humidity</b>      | 52%       |
| <b>Test Engineer</b>   | Kobe          |                      |           |

| <b>Freq. (MHz)</b> | <b>Level (dBuV)</b> | <b>Over Limit (dB)</b> | <b>Limit Line (dBuV)</b> | <b>Remark</b> |
|--------------------|---------------------|------------------------|--------------------------|---------------|
| -                  | -                   | -                      | -                        | See Note      |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.6.8 Results of Radiated Emissions (30MHz~1GHz)

|                 |               |                |                    |
|-----------------|---------------|----------------|--------------------|
| Final Test Date | Oct. 07, 2009 | Test Site No.  | 03CH02-HY          |
| Temperature     | 25.5          | Humidity       | 52%                |
| Test Engineer   | Kobe          | Configurations | Normal Mode (5GHz) |


Horizontal

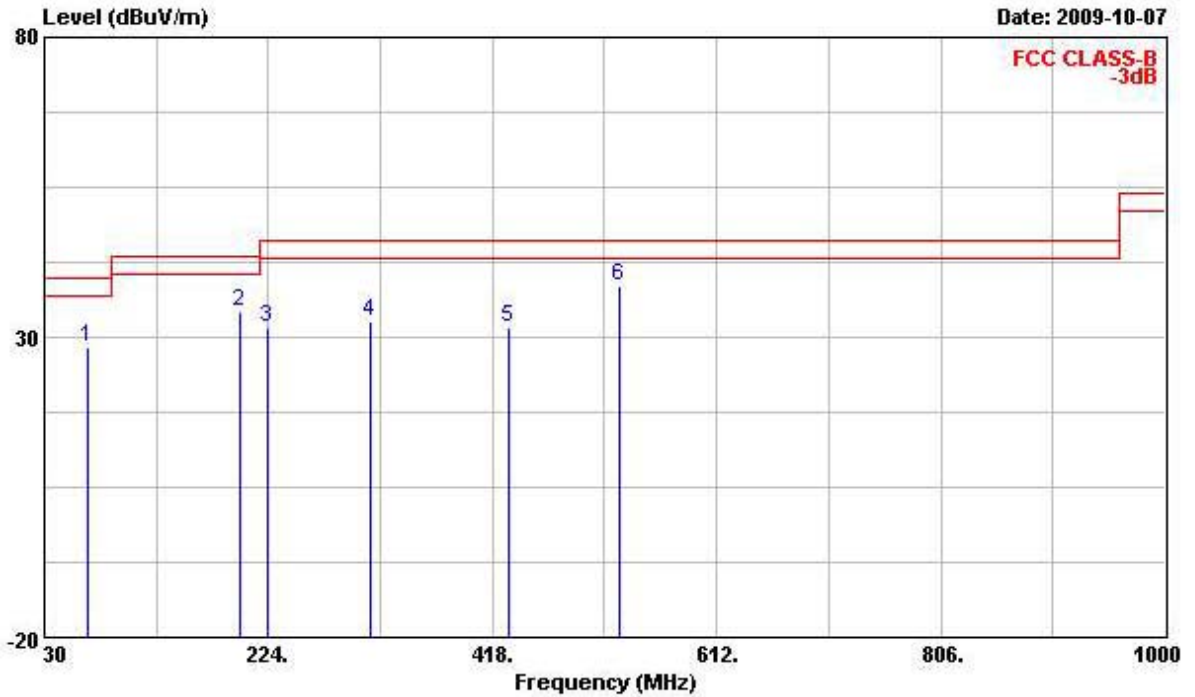

|   | Freq    | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |        |
| 1 | 67.830  | 28.28  | -11.72     | 40.00      | 50.56             | 6.81           | 1.71       | 30.80         | Peak   |
| 2 | 198.780 | 34.16  | -9.34      | 43.50      | 50.64             | 11.28          | 2.84       | 30.60         | Peak   |
| 3 | 223.030 | 31.53  | -14.47     | 46.00      | 47.01             | 12.11          | 2.96       | 30.55         | Peak   |
| 4 | 312.270 | 32.51  | -13.49     | 46.00      | 45.55             | 13.90          | 3.43       | 30.37         | Peak   |
| 5 | 431.580 | 31.65  | -14.35     | 46.00      | 41.86             | 15.90          | 4.00       | 30.11         | Peak   |
| 6 | 528.580 | 38.43  | -7.57      | 46.00      | 45.76             | 18.10          | 4.39       | 29.82         | Peak   |



Vertical

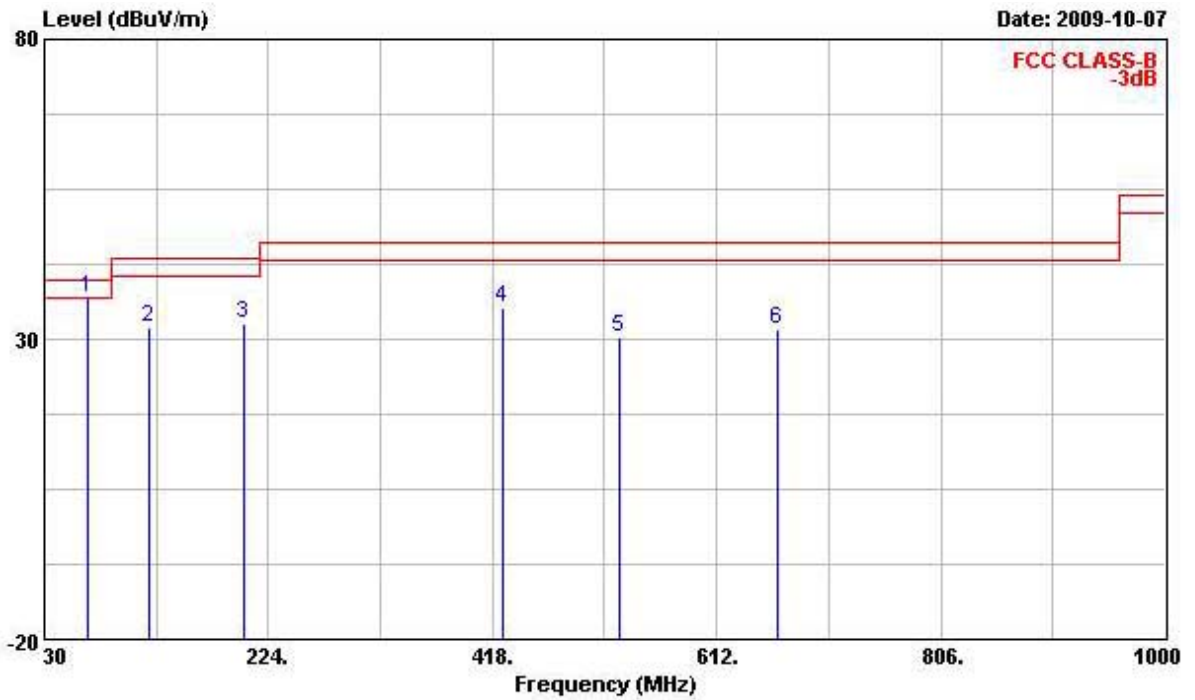

|   | Freq    | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |        |
| 1 | 67.830  | 36.90  | -3.10      | 40.00      | 59.18             | 6.81           | 1.71       | 30.80         | Peak   |
| 2 | 121.180 | 31.95  | -11.55     | 43.50      | 47.14             | 13.39          | 2.18       | 30.76         | Peak   |
| 3 | 202.660 | 32.63  | -10.87     | 43.50      | 48.91             | 11.45          | 2.86       | 30.59         | Peak   |
| 4 | 427.700 | 35.35  | -10.65     | 46.00      | 45.68             | 15.82          | 3.97       | 30.12         | Peak   |
| 5 | 528.580 | 30.26  | -15.74     | 46.00      | 37.59             | 18.10          | 4.39       | 29.82         | Peak   |
| 6 | 665.350 | 31.57  | -14.43     | 46.00      | 36.46             | 19.31          | 5.14       | 29.34         | Peak   |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Single Chain:


|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 36 |

Horizontal

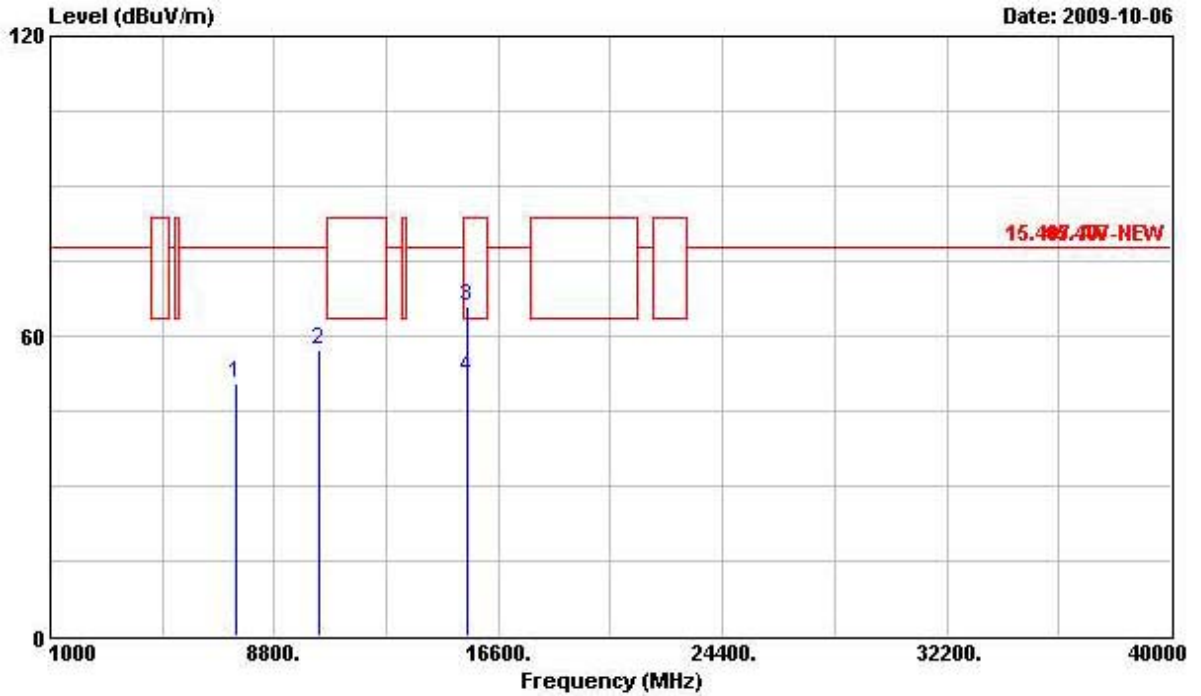

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna | Cable | Preamp |       |         |
|---|-----------|--------|------------|------------|-------------|-------|--------|-------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV        | dB/m  | dB     | dB    |         |
| 1 | 7480.000  | 50.34  | -27.50     | 77.84      | 41.07       | 37.90 | 5.66   | 34.29 | PEAK    |
| 2 | 10360.000 | 57.06  | -20.78     | 77.84      | 44.47       | 40.02 | 6.71   | 34.14 | Peak    |
| 3 | 15540.000 | 66.06  | -17.48     | 83.54      | 47.64       | 42.81 | 8.45   | 32.84 | PEAK    |
| 4 | 15540.000 | 51.54  | -12.00     | 63.54      | 33.12       | 42.81 | 8.45   | 32.84 | Average |


Vertical

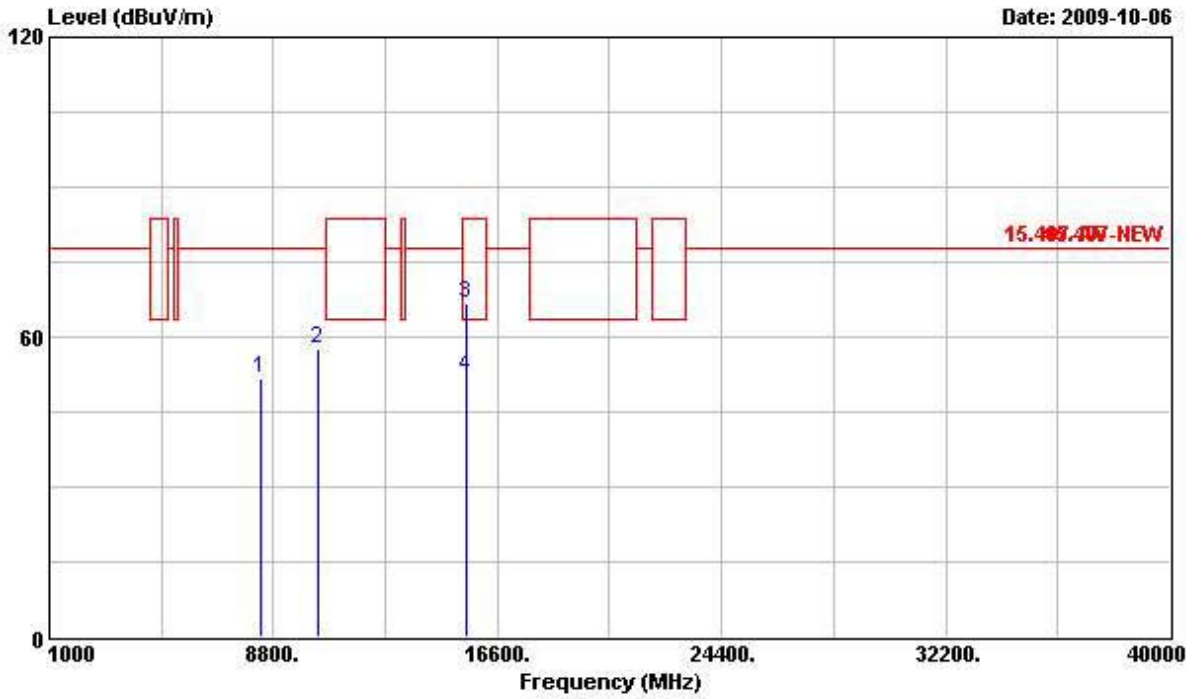

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 8384.000  | 51.84  | -26.00     | 77.84      | 41.74             | 38.43          | 5.91       | 34.24         | PEAK    |
| 2 | 10360.000 | 57.77  | -20.07     | 77.84      | 45.18             | 40.02          | 6.71       | 34.14         | PEAK    |
| 3 | 15540.000 | 66.85  | -16.69     | 83.54      | 48.43             | 42.81          | 8.45       | 32.84         | PEAK    |
| 4 | 15540.000 | 52.07  | -11.47     | 63.54      | 33.65             | 42.81          | 8.45       | 32.84         | Average |


|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 40 |

Horizontal

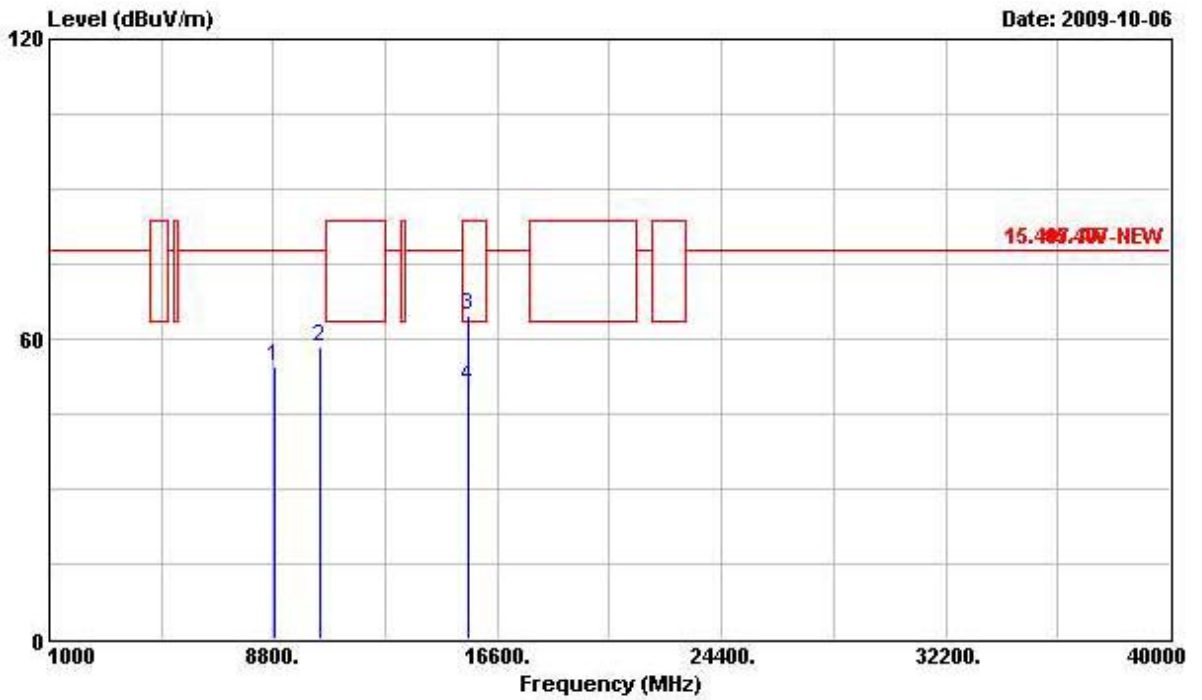

|   | Freq      | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | Remark        |
|---|-----------|--------|--------|--------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | Limit  | Line   | Level       | Loss  | Factor |               |
|   |           |        | dB     | dBuV/m | dBuV        | dB    | dB     |               |
| 1 | 8812.000  | 54.53  | -23.31 | 77.84  | 44.72       | 38.25 | 6.08   | 34.52 Peak    |
| 2 | 10400.000 | 58.24  | -19.60 | 77.84  | 45.55       | 40.04 | 6.75   | 34.10 Peak    |
| 3 | 15600.000 | 64.92  | -18.62 | 83.54  | 46.57       | 42.82 | 8.45   | 32.92 Peak    |
| 4 | 15600.000 | 50.47  | -13.07 | 63.54  | 32.12       | 42.82 | 8.45   | 32.92 Average |


Vertical

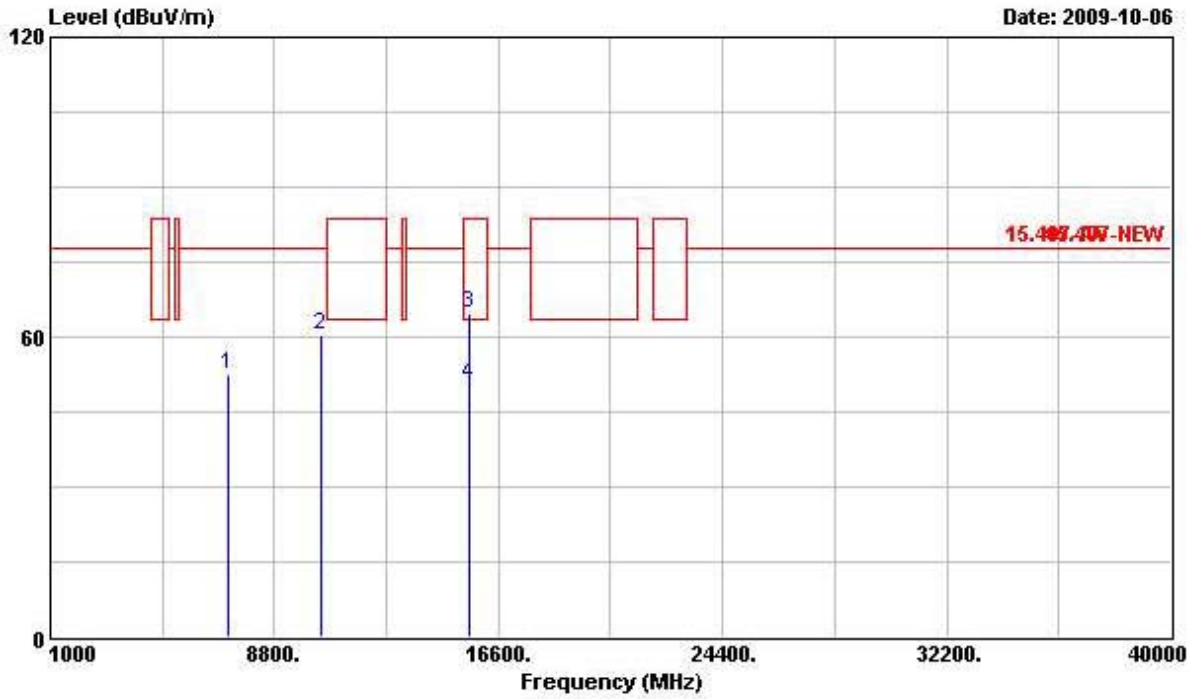

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7200.000  | 52.66  | -25.18     | 77.84      | 43.49             | 37.84          | 5.62       | 34.29         | PEAK    |
| 2 | 10400.000 | 60.54  | -17.30     | 77.84      | 47.85             | 40.04          | 6.75       | 34.10         | PEAK    |
| 3 | 15600.000 | 64.93  | -18.61     | 83.54      | 46.58             | 42.82          | 8.45       | 32.92         | PEAK    |
| 4 | 15600.000 | 50.46  | -13.08     | 63.54      | 32.11             | 42.82          | 8.45       | 32.92         | Average |


|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 48 |

Horizontal

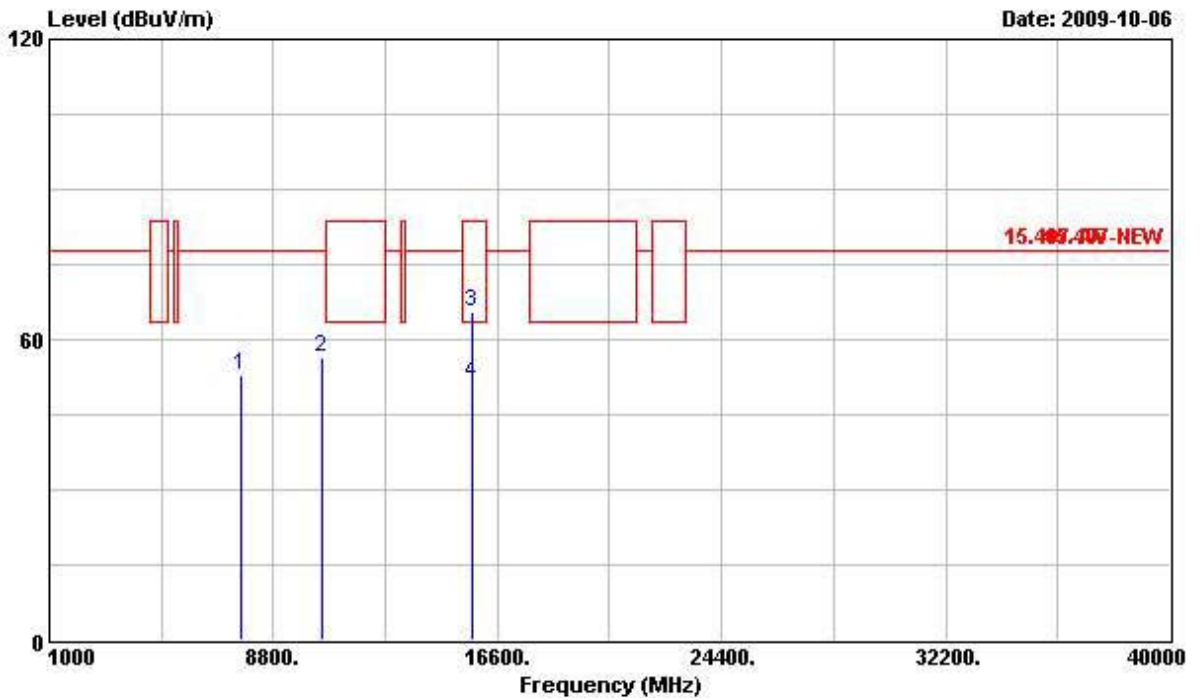

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7674.000  | 52.84  | -25.00     | 77.84      | 43.44             | 38.01          | 5.71       | 34.32         | Peak    |
| 2 | 10480.000 | 56.36  | -21.48     | 77.84      | 43.48             | 40.09          | 6.82       | 34.03         | Peak    |
| 3 | 15720.000 | 65.54  | -18.00     | 83.54      | 47.27             | 42.84          | 8.46       | 33.03         | Peak    |
| 4 | 15720.000 | 51.42  | -12.12     | 63.54      | 33.15             | 42.84          | 8.46       | 33.03         | Average |


Vertical

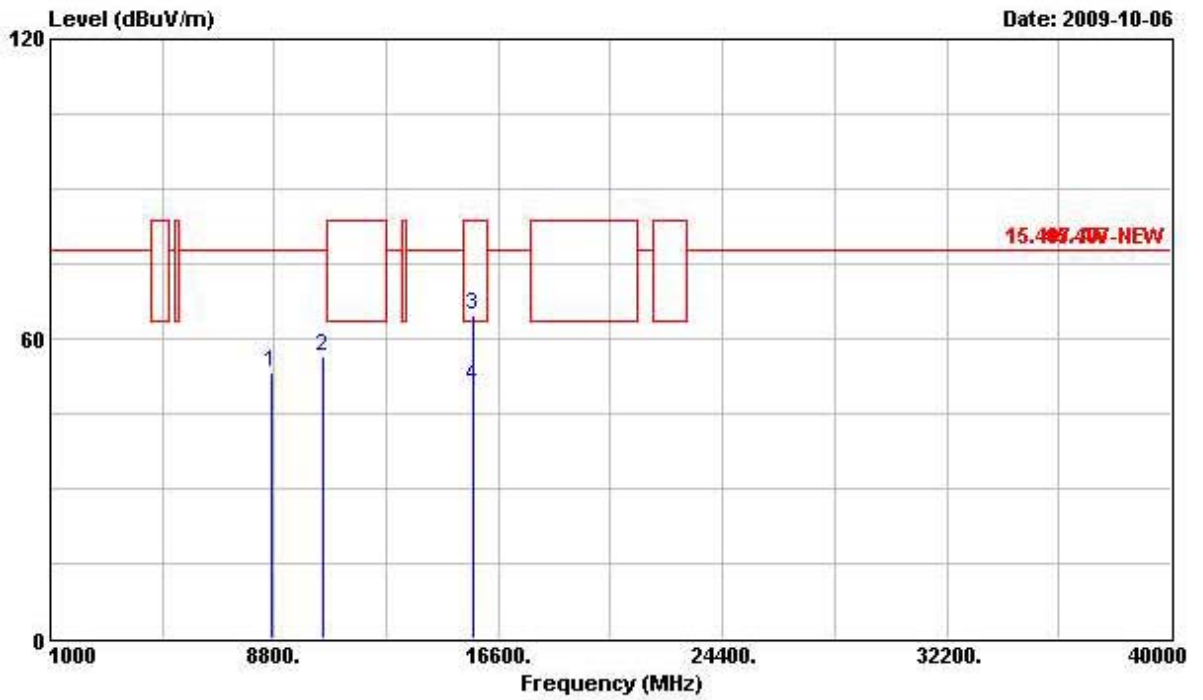

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 8680.000  | 53.27  | -24.57     | 77.84      | 43.29             | 38.35          | 6.02       | 34.39         | Peak    |
| 2 | 10480.000 | 56.42  | -21.42     | 77.84      | 43.54             | 40.09          | 6.82       | 34.03         | Peak    |
| 3 | 15720.000 | 64.72  | -18.82     | 83.54      | 46.45             | 42.84          | 8.46       | 33.03         | Peak    |
| 4 | 15720.000 | 50.52  | -13.02     | 63.54      | 32.25             | 42.84          | 8.46       | 33.03         | Average |

|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 52 |


Horizontal

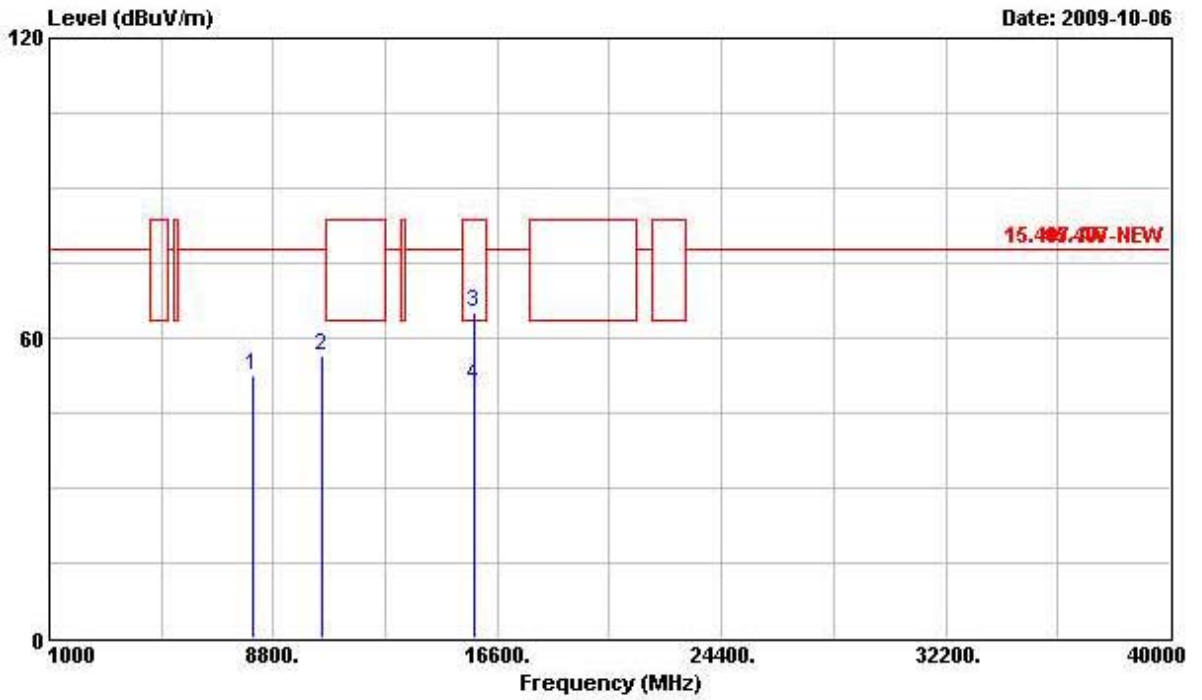

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 8088.000  | 52.65  | -25.19     | 77.84      | 42.91             | 38.25          | 5.83       | 34.34         | Peak    |
| 2 | 10520.000 | 56.57  | -21.27     | 77.84      | 43.61             | 40.11          | 6.85       | 34.00         | Peak    |
| 3 | 15780.000 | 65.18  | -18.36     | 83.54      | 46.97             | 42.86          | 8.46       | 33.11         | Peak    |
| 4 | 15780.000 | 50.36  | -13.18     | 63.54      | 32.15             | 42.86          | 8.46       | 33.11         | Average |




Vertical

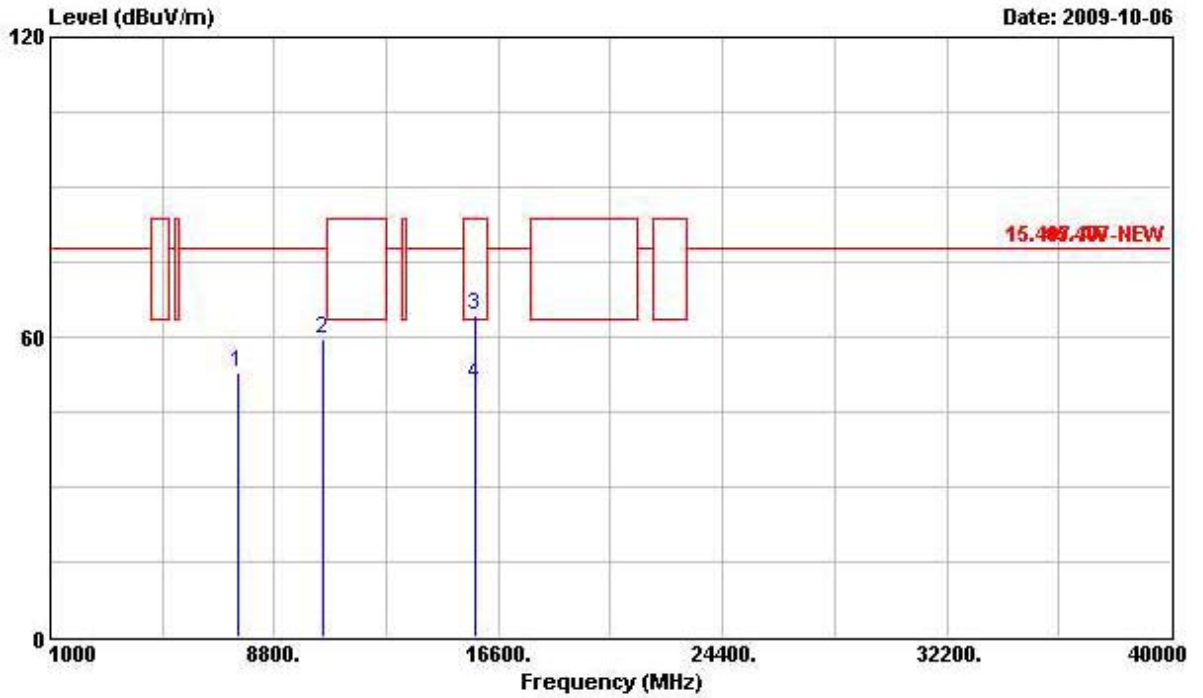

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7514.000  | 52.80  | -25.04     | 77.84      | 43.53             | 37.91          | 5.66       | 34.30         | Peak    |
| 2 | 10520.000 | 59.46  | -18.38     | 77.84      | 46.50             | 40.11          | 6.85       | 34.00         | Peak    |
| 3 | 15780.000 | 64.19  | -19.35     | 83.54      | 45.98             | 42.86          | 8.46       | 33.11         | Peak    |
| 4 | 15780.000 | 50.66  | -12.88     | 63.54      | 32.45             | 42.86          | 8.46       | 33.11         | Average |


|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 08, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 56 |

Horizontal

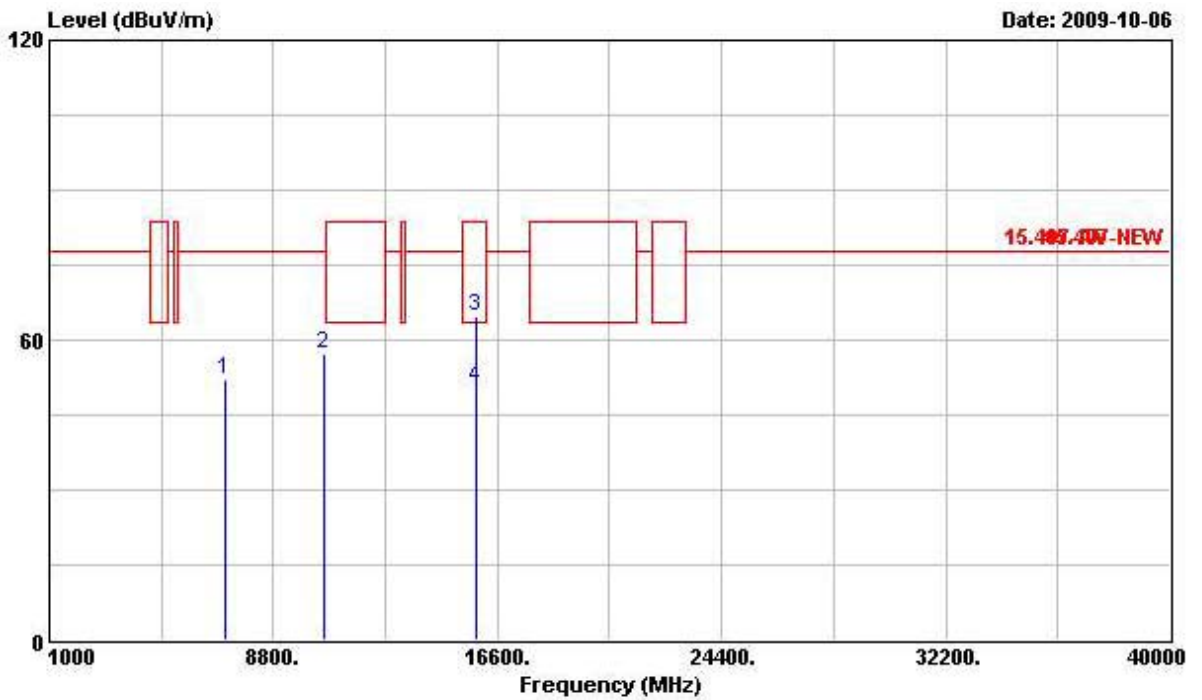

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna | Cable | Preamp | Remark        |
|---|-----------|--------|------------|------------|-------------|-------|--------|---------------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV        | dB/m  | dB     | dB            |
| 1 | 7102.000  | 52.17  | -25.67     | 77.84      | 43.02       | 37.82 | 5.61   | 34.28 Peak    |
| 2 | 10560.000 | 57.11  | -20.73     | 77.84      | 44.04       | 40.13 | 6.88   | 33.94 Peak    |
| 3 | 15840.000 | 64.82  | -18.72     | 83.54      | 46.65       | 42.87 | 8.46   | 33.16 Peak    |
| 4 | 15840.000 | 50.41  | -13.13     | 63.54      | 32.24       | 42.87 | 8.46   | 33.16 Average |


Vertical

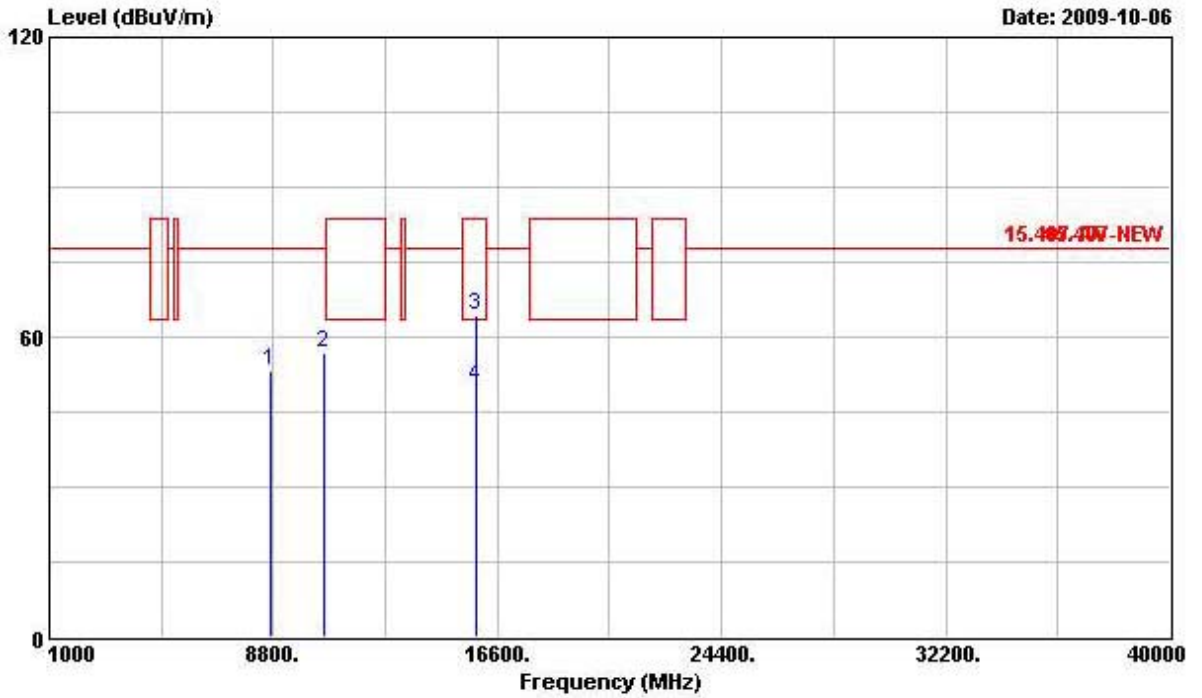

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 8724.000  | 53.43  | -24.41     | 77.84      | 43.50             | 38.33          | 6.04       | 34.44         | Peak    |
| 2 | 10560.000 | 56.91  | -20.93     | 77.84      | 43.84             | 40.13          | 6.88       | 33.94         | Peak    |
| 3 | 15840.000 | 64.39  | -19.15     | 83.54      | 46.22             | 42.87          | 8.46       | 33.16         | Peak    |
| 4 | 15840.000 | 50.32  | -13.22     | 63.54      | 32.15             | 42.87          | 8.46       | 33.16         | Average |


|                 |               |               |               |
|-----------------|---------------|---------------|---------------|
| Final Test Date | Oct. 08, 2009 | Test Site No. | 03CH02-HY     |
| Temperature     | 25.5          | Humidity      | 52%           |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 64 |

Horizontal

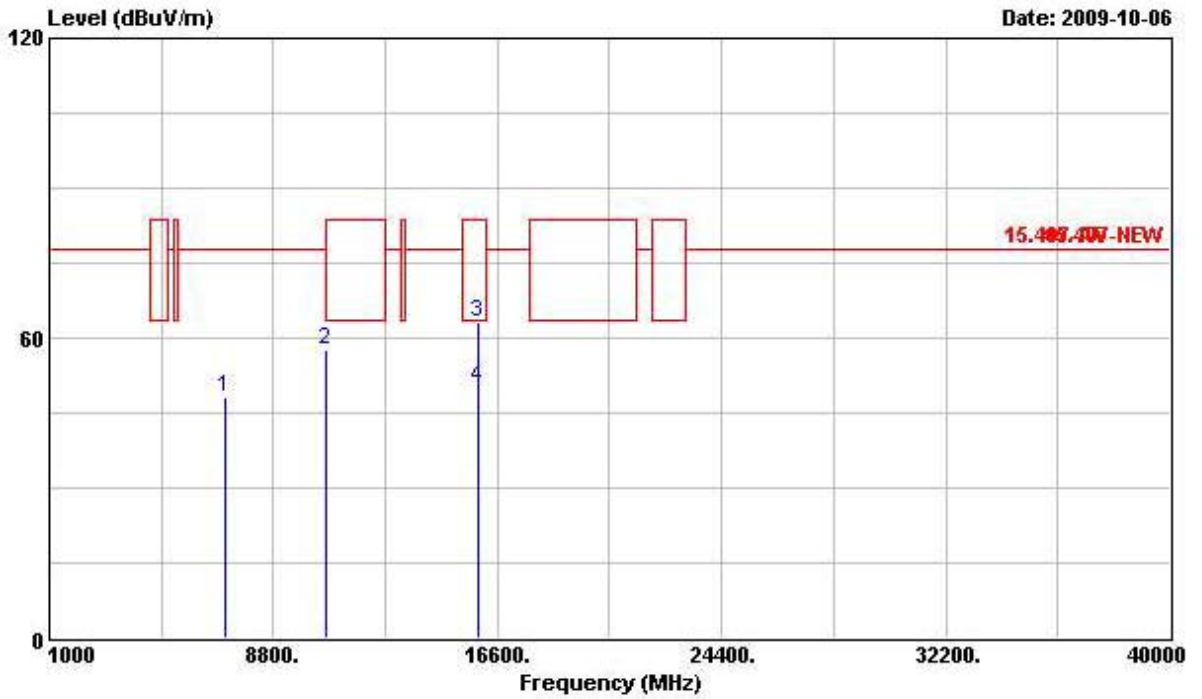

|      | Over       | Limit | ReadAntenna | Cable | Preamp |        |      |       |         |
|------|------------|-------|-------------|-------|--------|--------|------|-------|---------|
| Freq | Level      | Limit | Level       | Loss  | Factor | Remark |      |       |         |
| MHz  | dBuV/m     | dB    | dBuV/m      | dB    | dB     |        |      |       |         |
| 1    | 7096.000   | 47.98 | -29.86      | 77.84 | 38.83  | 37.82  | 5.61 | 34.28 | Peak    |
| 2    | @10640.000 | 57.78 | -5.76       | 63.54 | 44.51  | 40.18  | 6.93 | 33.84 | PK      |
| 3    | 15960.000  | 63.09 | -20.45      | 83.54 | 45.02  | 42.89  | 8.47 | 33.29 | Peak    |
| 4    | 15960.000  | 50.18 | -13.36      | 63.54 | 32.11  | 42.89  | 8.47 | 33.29 | Average |


Vertical

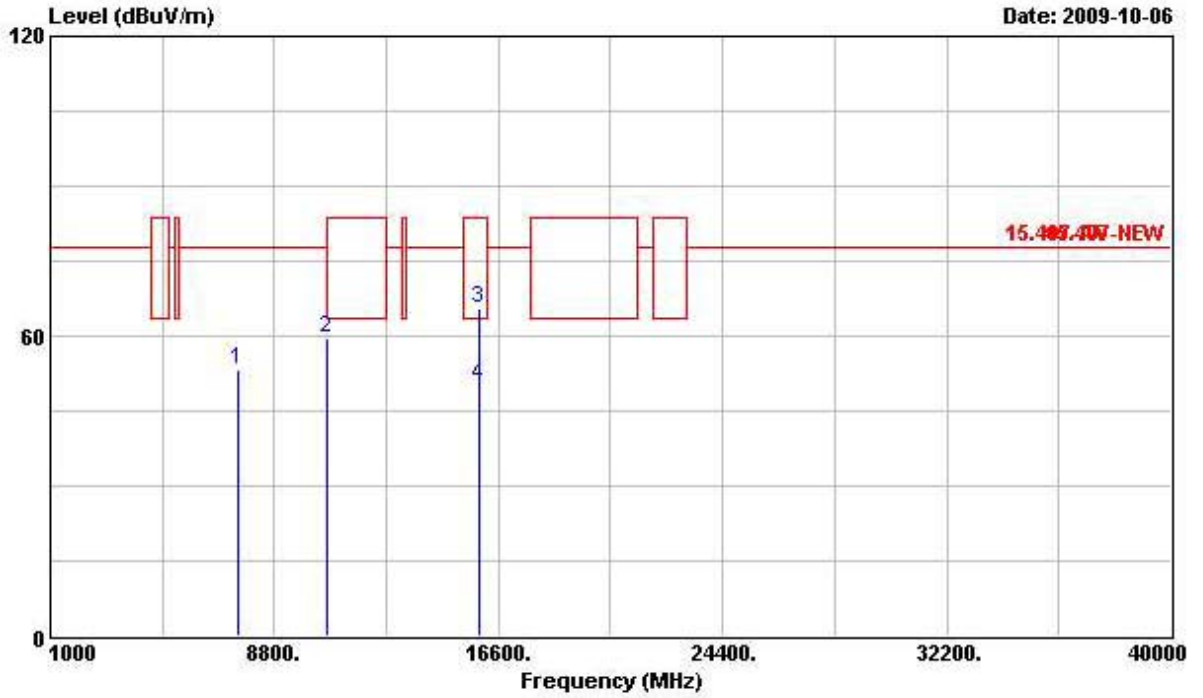

|   | Freq       | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|------------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz        | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7564.000   | 53.22  | -24.62     | 77.84      | 43.91             | 37.94          | 5.67       | 34.30         | Peak    |
| 2 | @10640.000 | 59.41  | -4.13      | 63.54      | 46.14             | 40.18          | 6.93       | 33.84         | PK      |
| 3 | 15960.000  | 65.56  | -17.98     | 83.54      | 47.49             | 42.89          | 8.47       | 33.29         | Peak    |
| 4 | 15960.000  | 50.22  | -13.32     | 63.54      | 32.15             | 42.89          | 8.47       | 33.29         | Average |


|                 |               |               |                |
|-----------------|---------------|---------------|----------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY      |
| Temperature     | 25.5          | Humidity      | 52%            |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 100 |

Horizontal

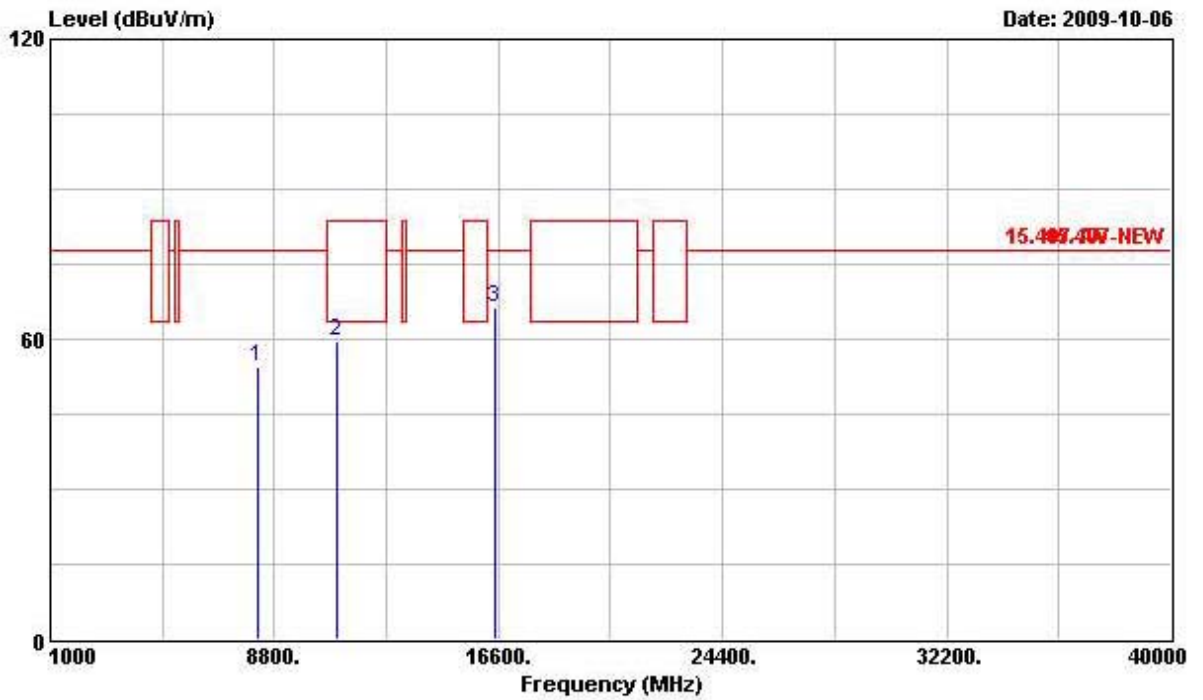

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |        |
| 1 | 8210.000  | 54.45  | -23.39     | 77.84      | 44.57             | 38.32          | 5.86       | 34.30         | Peak   |
| 2 | 11000.000 | 59.68  | -3.86      | 63.54      | 45.50             | 40.40          | 7.17       | 33.39         | PK     |
| 3 | 16500.000 | 66.36  | -11.48     | 77.84      | 47.40             | 43.50          | 8.24       | 32.78         | Peak   |


Vertical

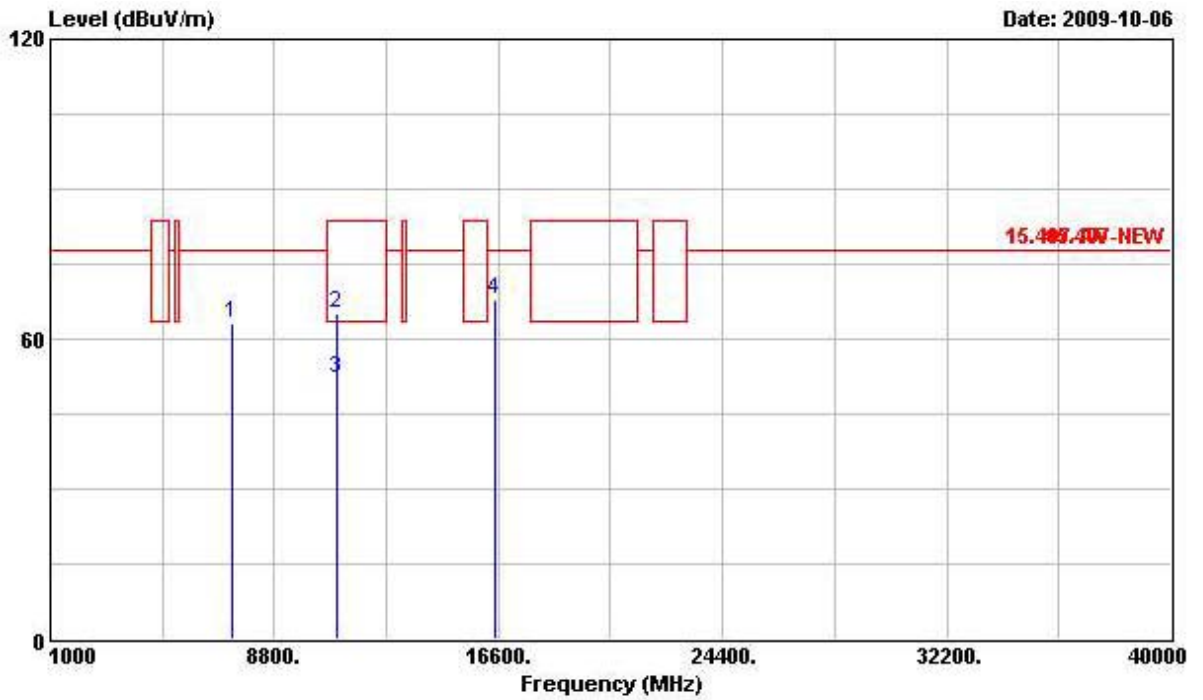

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7344.000  | 63.03  | -14.81     | 77.84      | 53.81             | 37.87          | 5.64       | 34.29         | Peak    |
| 2 | 11000.000 | 65.01  | -18.53     | 83.54      | 50.83             | 40.40          | 7.17       | 33.39         | Peak    |
| 3 | 11000.000 | 52.18  | -11.36     | 63.54      | 38.00             | 40.40          | 7.17       | 33.39         | Average |
| 4 | 16500.000 | 68.05  | -9.79      | 77.84      | 49.09             | 43.50          | 8.24       | 32.78         | Peak    |

|                 |               |               |                |
|-----------------|---------------|---------------|----------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY      |
| Temperature     | 25.5          | Humidity      | 52%            |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 116 |


Horizontal

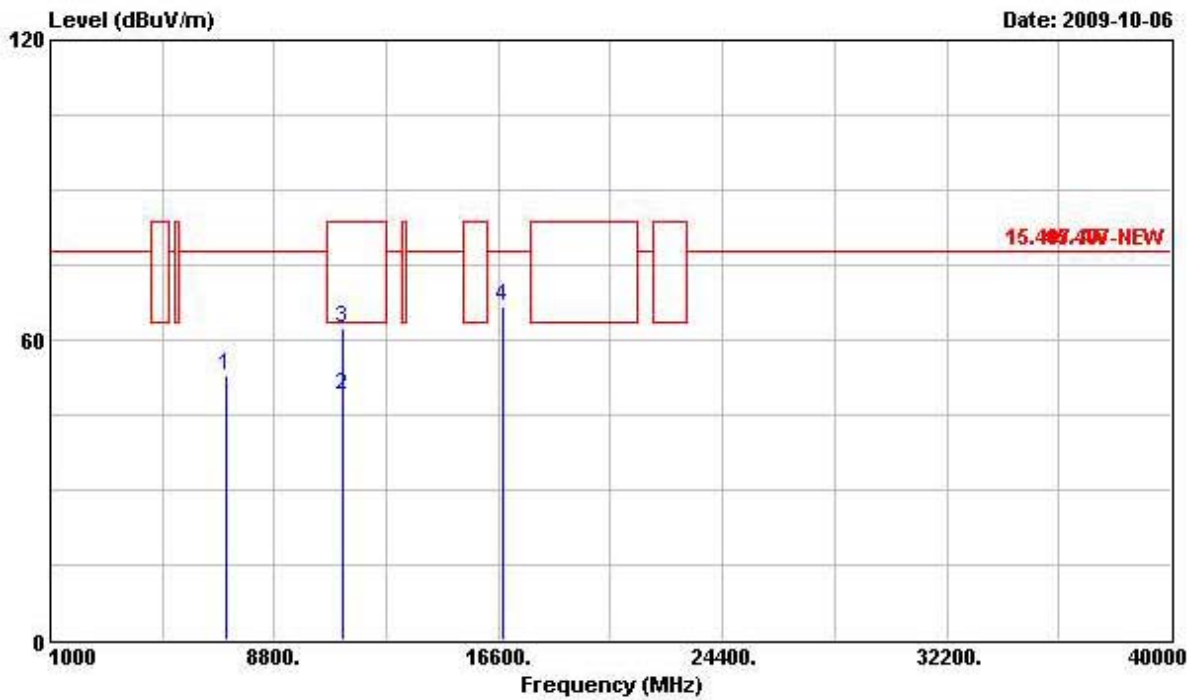

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7094.000  | 53.08  | -24.76     | 77.84      | 43.93             | 37.82          | 5.61       | 34.28         | Peak    |
| 2 | 11160.000 | 49.11  | -14.43     | 63.54      | 35.06             | 40.44          | 7.05       | 33.44         | Average |
| 3 | 11160.000 | 62.54  | -21.00     | 83.54      | 48.49             | 40.44          | 7.05       | 33.44         | Peak    |
| 4 | 16740.000 | 66.75  | -11.09     | 77.84      | 47.46             | 43.56          | 8.37       | 32.64         | Peak    |




Vertical

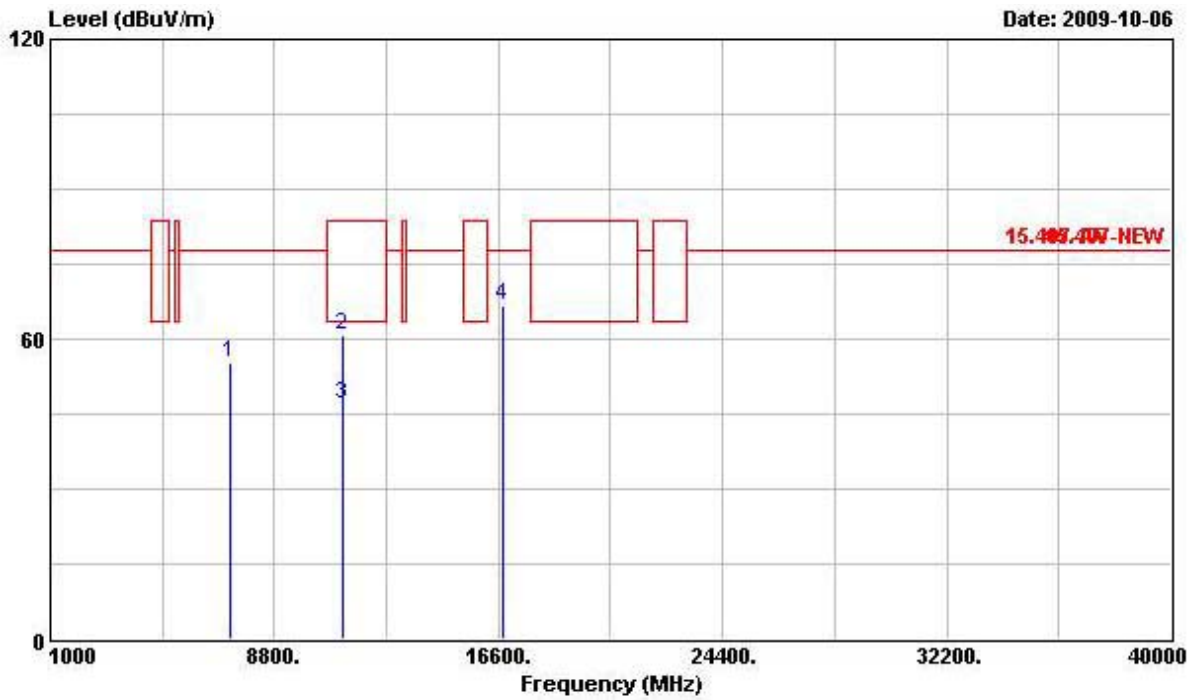

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7280.000  | 55.26  | -22.58     | 77.84      | 46.06             | 37.86          | 5.63       | 34.29         | Peak    |
| 2 | 11160.000 | 60.86  | -22.68     | 83.54      | 46.81             | 40.44          | 7.05       | 33.44         | Peak    |
| 3 | 11160.000 | 47.14  | -16.40     | 63.54      | 33.09             | 40.44          | 7.05       | 33.44         | Average |
| 4 | 16740.000 | 66.78  | -11.06     | 77.84      | 47.49             | 43.56          | 8.37       | 32.64         | Peak    |


|                 |               |               |                |
|-----------------|---------------|---------------|----------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY      |
| Temperature     | 25.5          | Humidity      | 52%            |
| Test Engineer   | Kobe          | Configuration | 802.11a CH 140 |

Horizontal

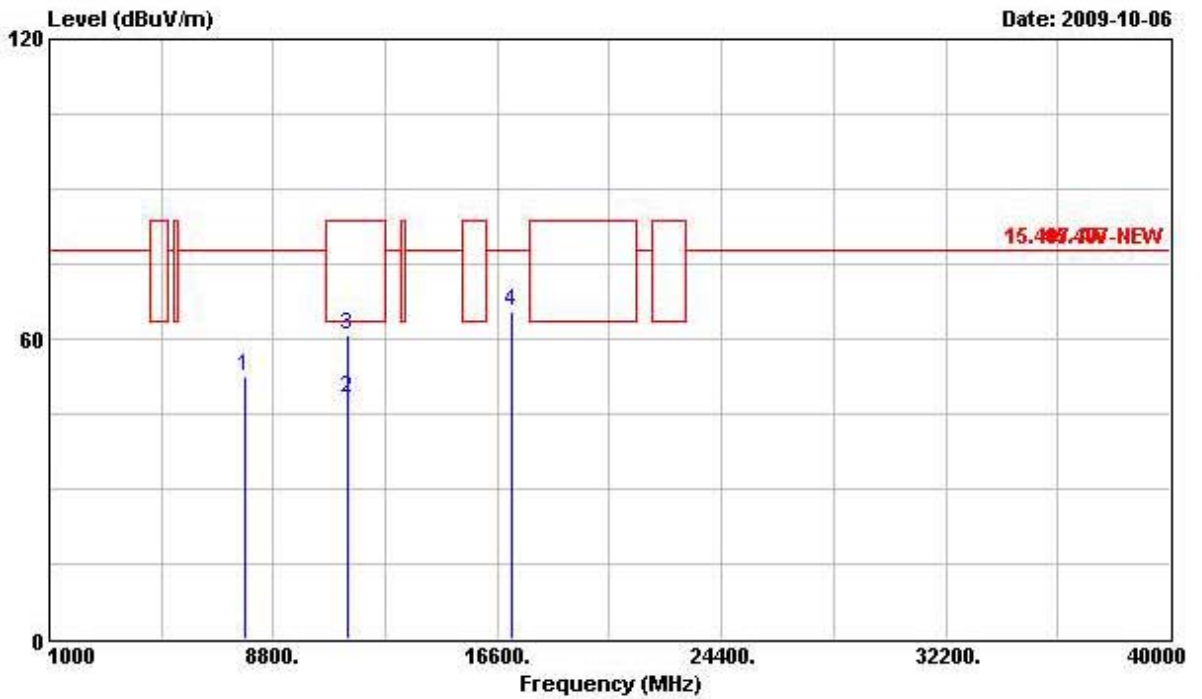

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7822.000  | 52.54  | -25.30     | 77.84      | 43.04             | 38.09          | 5.75       | 34.34         | Peak    |
| 2 | 11400.000 | 48.21  | -15.33     | 63.54      | 34.54             | 40.56          | 6.71       | 33.60         | Average |
| 3 | 11400.000 | 60.72  | -22.82     | 83.54      | 47.05             | 40.56          | 6.71       | 33.60         | Peak    |
| 4 | 17100.000 | 65.67  | -12.17     | 77.84      | 45.70             | 43.64          | 8.61       | 32.28         | Peak    |


Vertical

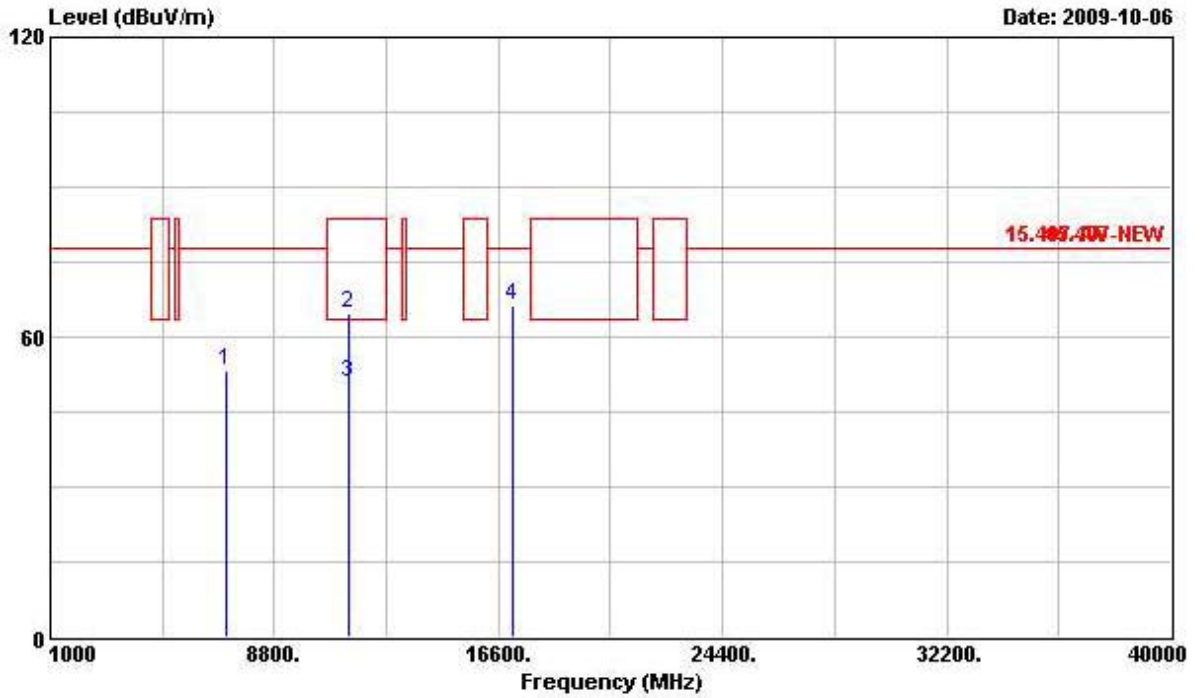

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7092.000  | 53.35  | -24.49     | 77.84      | 44.20             | 37.82          | 5.61       | 34.28         | Peak    |
| 2 | 11400.000 | 64.59  | -18.95     | 83.54      | 50.92             | 40.56          | 6.71       | 33.60         | Peak    |
| 3 | 11400.000 | 50.95  | -12.59     | 63.54      | 37.28             | 40.56          | 6.71       | 33.60         | Average |
| 4 | 17100.000 | 66.33  | -11.51     | 77.84      | 46.36             | 43.64          | 8.61       | 32.28         | Peak    |


|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 36 (20MHz) |

Horizontal

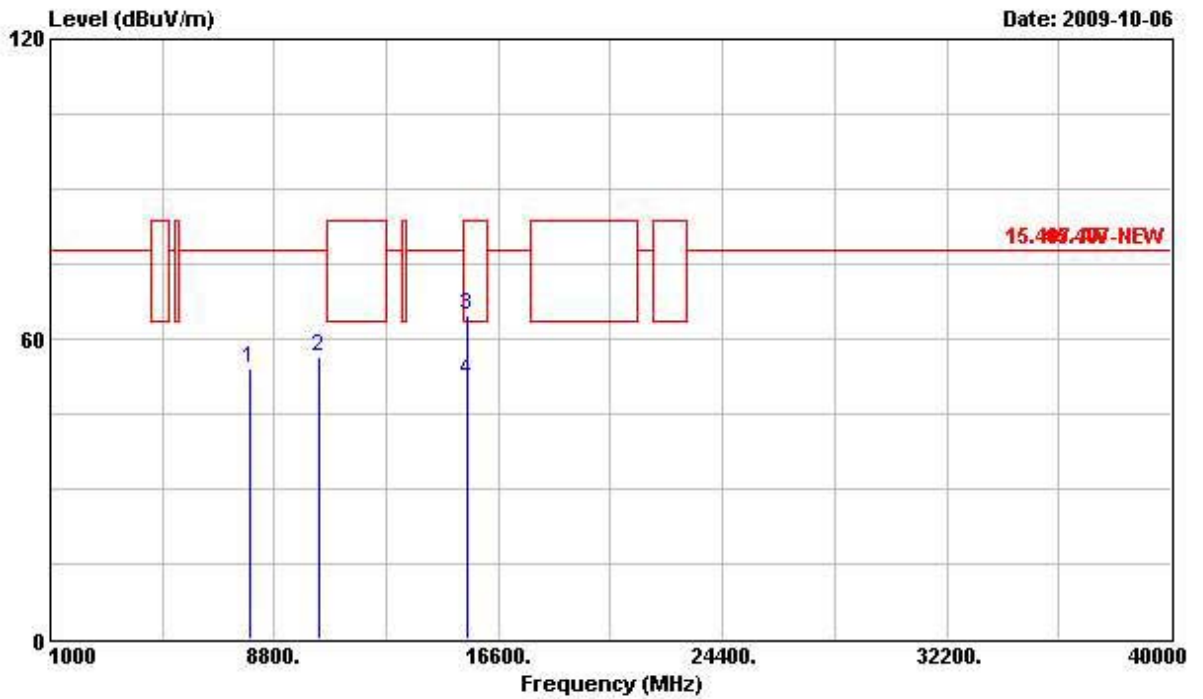

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7944.000  | 53.92  | -23.92     | 77.84      | 44.33             | 38.16          | 5.79       | 34.36         | Peak    |
| 2 | 10360.000 | 56.49  | -21.35     | 77.84      | 43.90             | 40.02          | 6.71       | 34.14         | Peak    |
| 3 | 15540.000 | 64.62  | -18.92     | 83.54      | 46.20             | 42.81          | 8.45       | 32.84         | Peak    |
| 4 | 15540.000 | 51.62  | -11.92     | 63.54      | 33.20             | 42.81          | 8.45       | 32.84         | Average |


Vertical

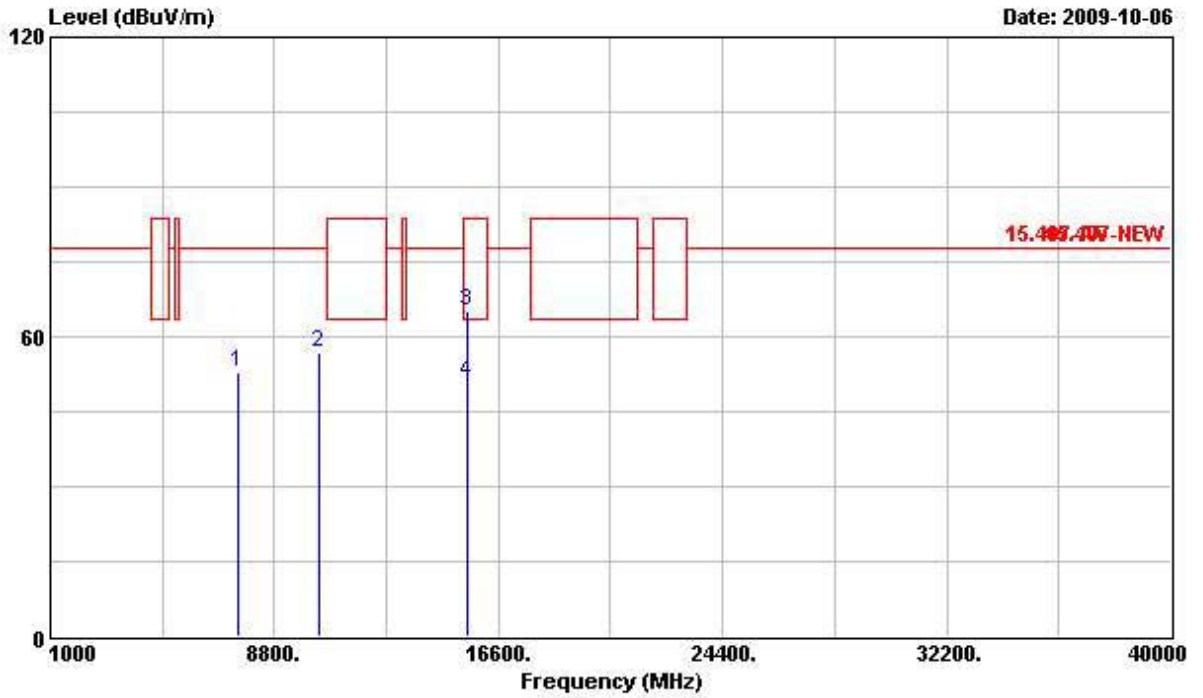

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7506.000  | 52.87  | -24.97     | 77.84      | 43.60             | 37.91          | 5.66       | 34.30         | Peak    |
| 2 | 10360.000 | 56.93  | -20.91     | 77.84      | 44.34             | 40.02          | 6.71       | 34.14         | Peak    |
| 3 | 15540.000 | 65.09  | -18.45     | 83.54      | 46.67             | 42.81          | 8.45       | 32.84         | Peak    |
| 4 | 15540.000 | 50.76  | -12.78     | 63.54      | 32.34             | 42.81          | 8.45       | 32.84         | Average |


|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 40 (20MHz) |

Horizontal

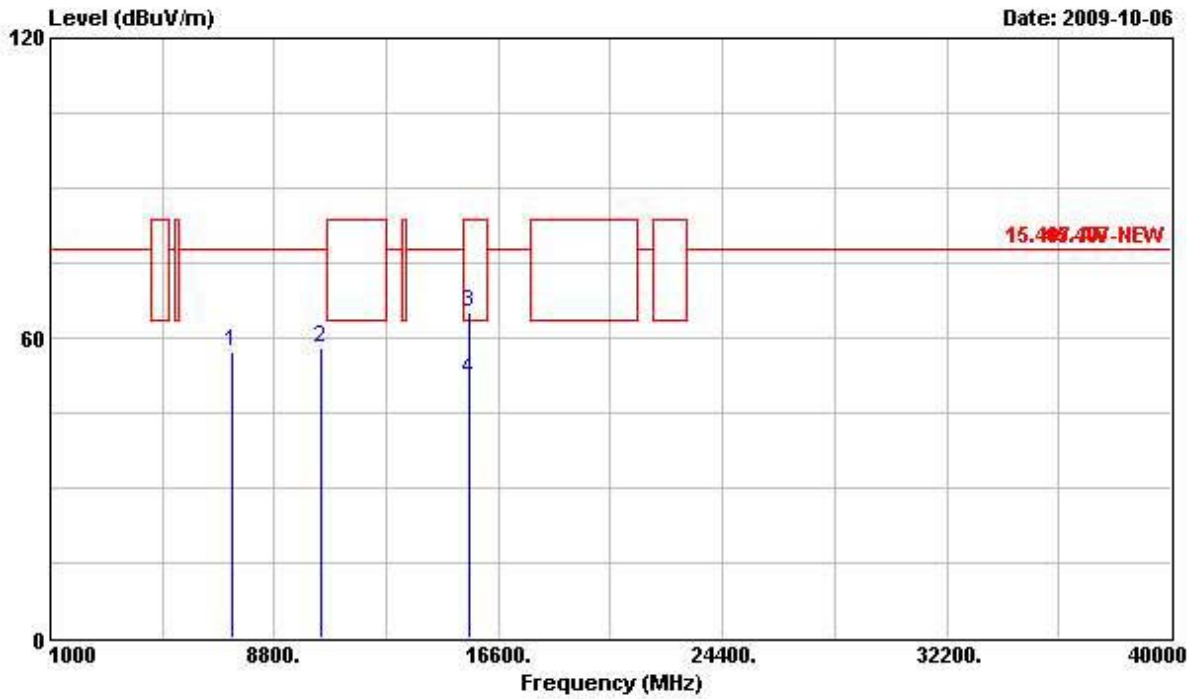

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7316.000  | 57.05  | -20.79     | 77.84      | 47.83             | 37.87          | 5.64       | 34.29         | Peak    |
| 2 | 10400.000 | 58.12  | -19.72     | 77.84      | 45.43             | 40.04          | 6.75       | 34.10         | Peak    |
| 3 | 15600.000 | 65.23  | -18.31     | 83.54      | 46.88             | 42.82          | 8.45       | 32.92         | Peak    |
| 4 | 15600.000 | 51.66  | -11.88     | 63.54      | 33.31             | 42.82          | 8.45       | 32.92         | Average |


Vertical

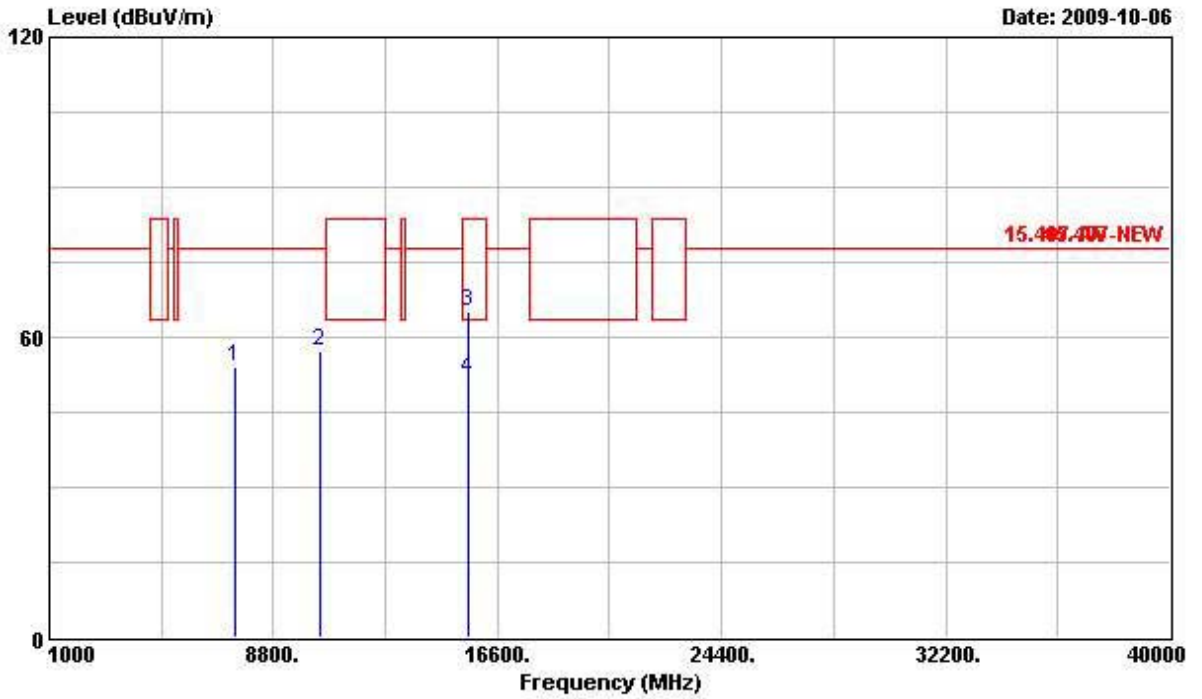

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7468.000  | 53.95  | -23.89     | 77.84      | 44.69             | 37.89          | 5.66       | 34.29         | Peak    |
| 2 | 10400.000 | 57.39  | -20.45     | 77.84      | 44.70             | 40.04          | 6.75       | 34.10         | Peak    |
| 3 | 15600.000 | 65.25  | -18.29     | 83.54      | 46.90             | 42.82          | 8.45       | 32.92         | Peak    |
| 4 | 15600.000 | 51.68  | -11.86     | 63.54      | 33.33             | 42.82          | 8.45       | 32.92         | Average |

|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 48 (20MHz) |


Horizontal

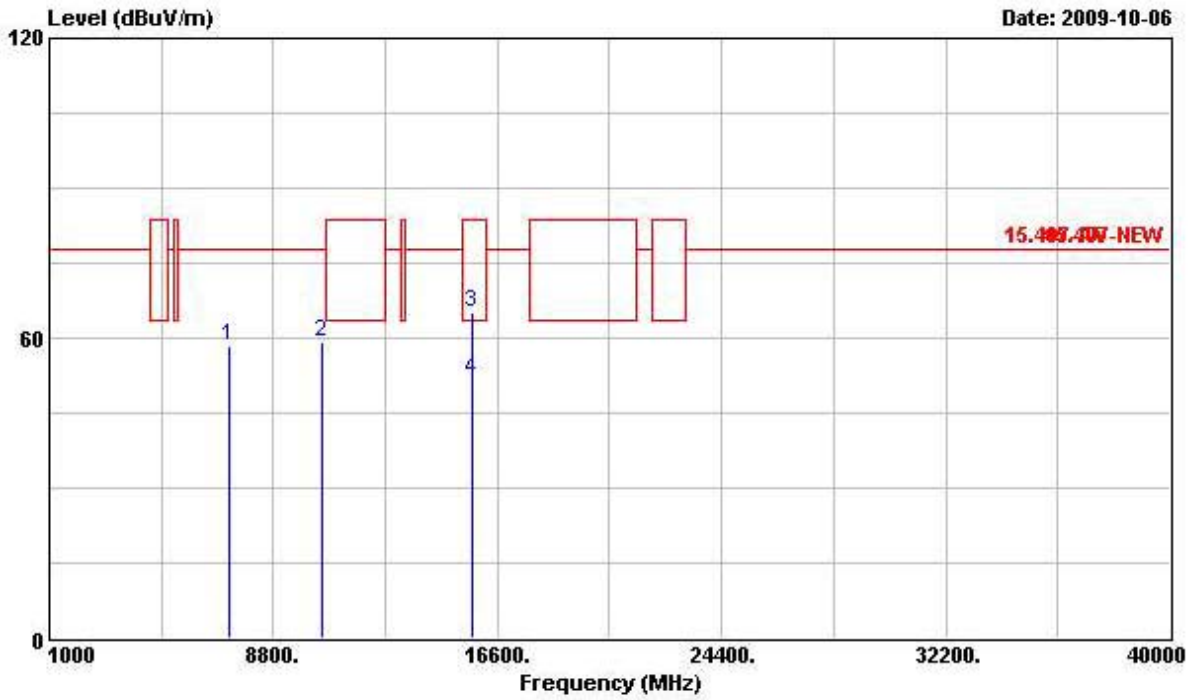

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7238.000  | 58.53  | -19.31     | 77.84      | 49.34             | 37.85          | 5.63       | 34.29         | Peak    |
| 2 | 10480.000 | 59.14  | -18.70     | 77.84      | 46.26             | 40.09          | 6.82       | 34.03         | Peak    |
| 3 | 15720.000 | 65.08  | -18.46     | 83.54      | 46.81             | 42.84          | 8.46       | 33.03         | Peak    |
| 4 | 15720.000 | 51.79  | -11.75     | 63.54      | 33.52             | 42.84          | 8.46       | 33.03         | Average |




Vertical

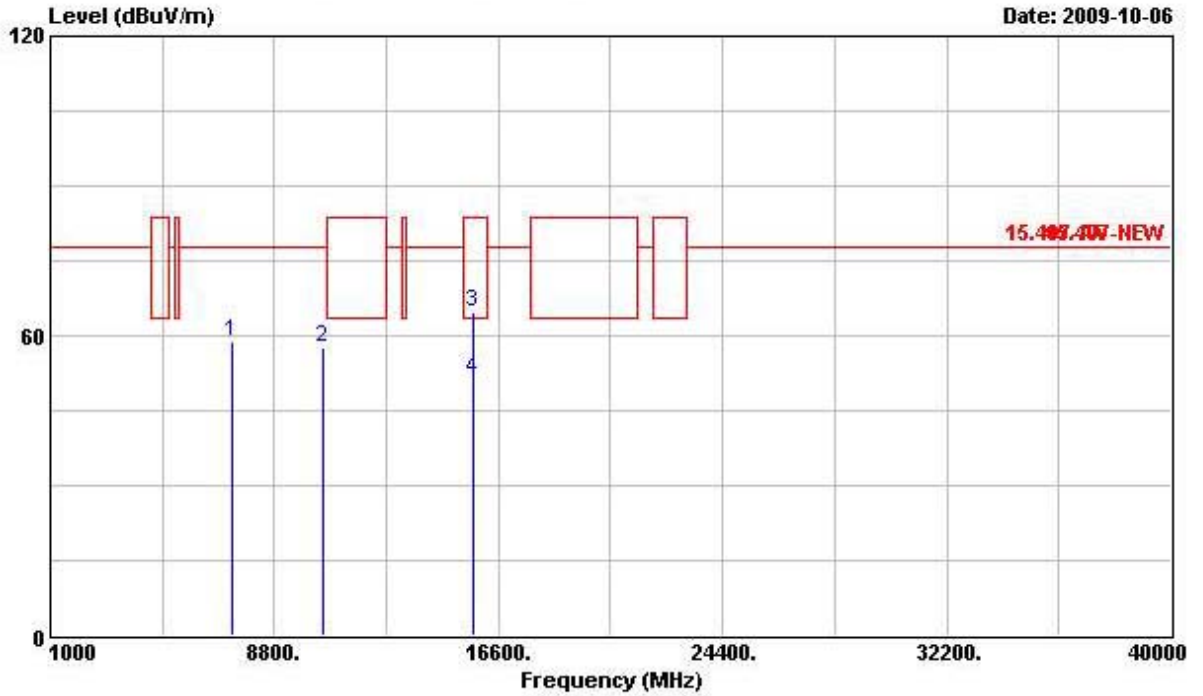

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7306.000  | 58.69  | -19.15     | 77.84      | 49.48             | 37.86          | 5.64       | 34.29         | Peak    |
| 2 | 10480.000 | 57.58  | -20.26     | 77.84      | 44.70             | 40.09          | 6.82       | 34.03         | Peak    |
| 3 | 15720.000 | 64.88  | -18.66     | 83.54      | 46.61             | 42.84          | 8.46       | 33.03         | Peak    |
| 4 | 15720.000 | 51.48  | -12.06     | 63.54      | 33.21             | 42.84          | 8.46       | 33.03         | Average |


|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 52 (20MHz) |

Horizontal

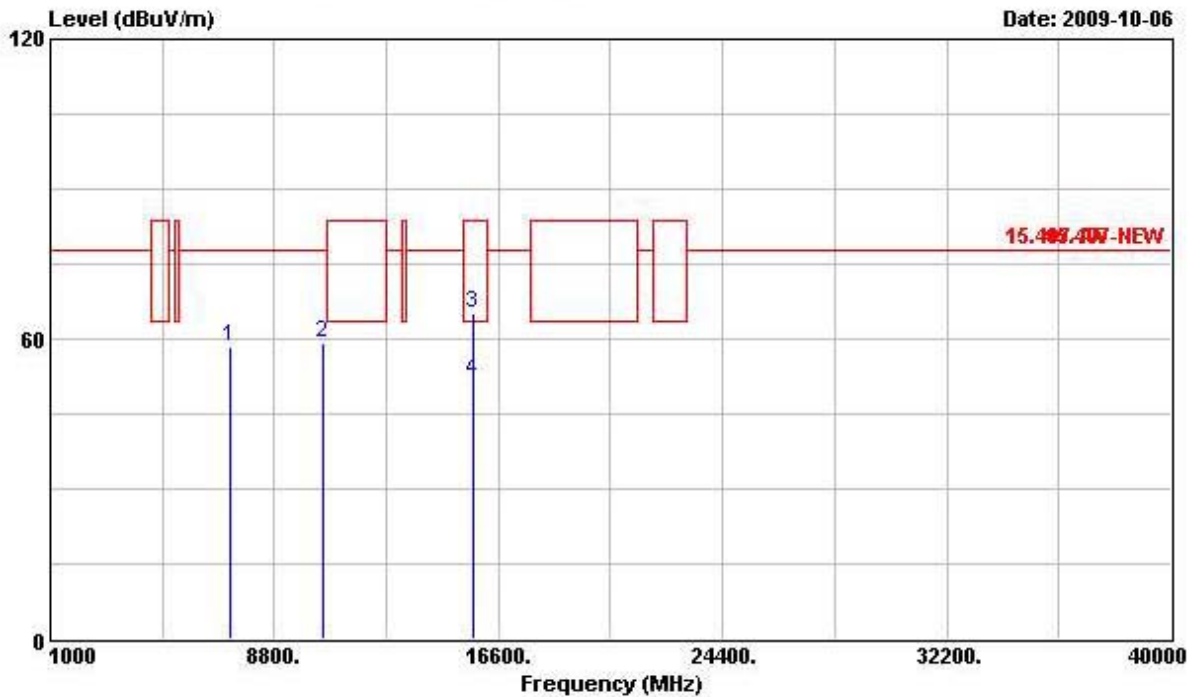

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7238.000  | 58.53  | -19.31     | 77.84      | 49.34             | 37.85          | 5.63       | 34.29         | Peak    |
| 2 | 10480.000 | 59.14  | -18.70     | 77.84      | 46.26             | 40.09          | 6.82       | 34.03         | Peak    |
| 3 | 15720.000 | 65.08  | -18.46     | 83.54      | 46.81             | 42.84          | 8.46       | 33.03         | Peak    |
| 4 | 15720.000 | 51.79  | -11.75     | 63.54      | 33.52             | 42.84          | 8.46       | 33.03         | Average |


Vertical

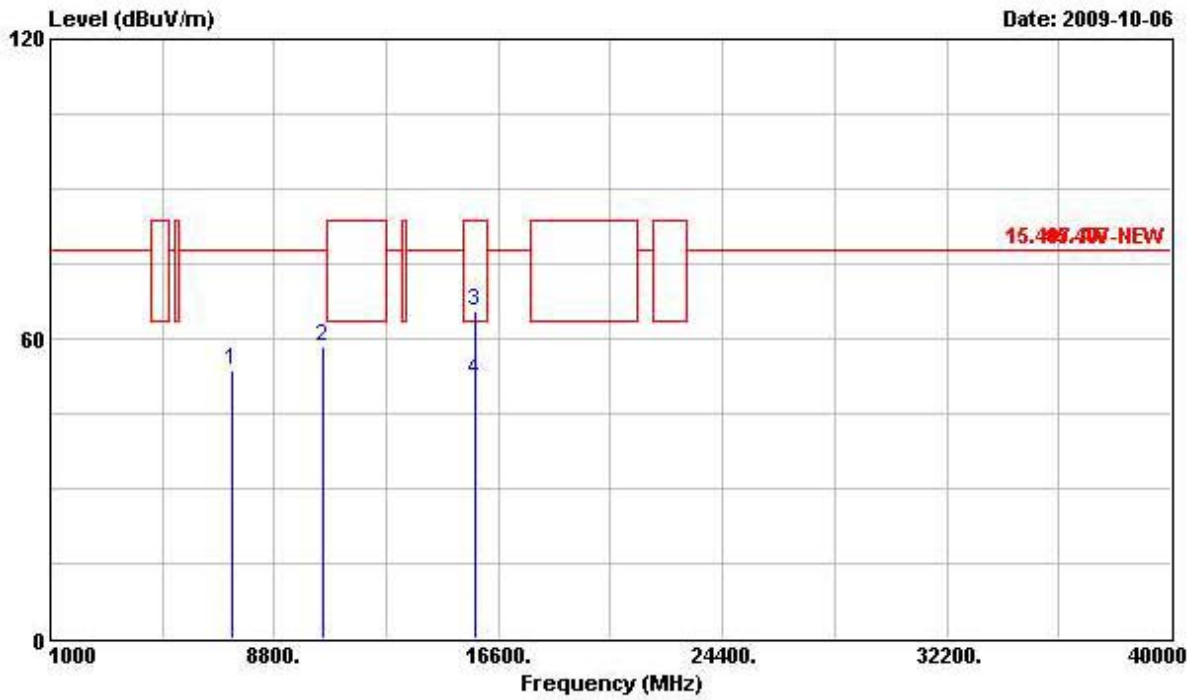

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7306.000  | 53.81  | -24.03     | 77.84      | 44.60             | 37.86          | 5.64       | 34.29         | Peak    |
| 2 | 10520.000 | 58.56  | -19.28     | 77.84      | 45.60             | 40.11          | 6.85       | 34.00         | Peak    |
| 3 | 15780.000 | 65.44  | -18.10     | 83.54      | 47.23             | 42.86          | 8.46       | 33.11         | Peak    |
| 4 | 15780.000 | 51.55  | -11.99     | 63.54      | 33.34             | 42.86          | 8.46       | 33.11         | Average |


|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 56 (20MHz) |

Horizontal

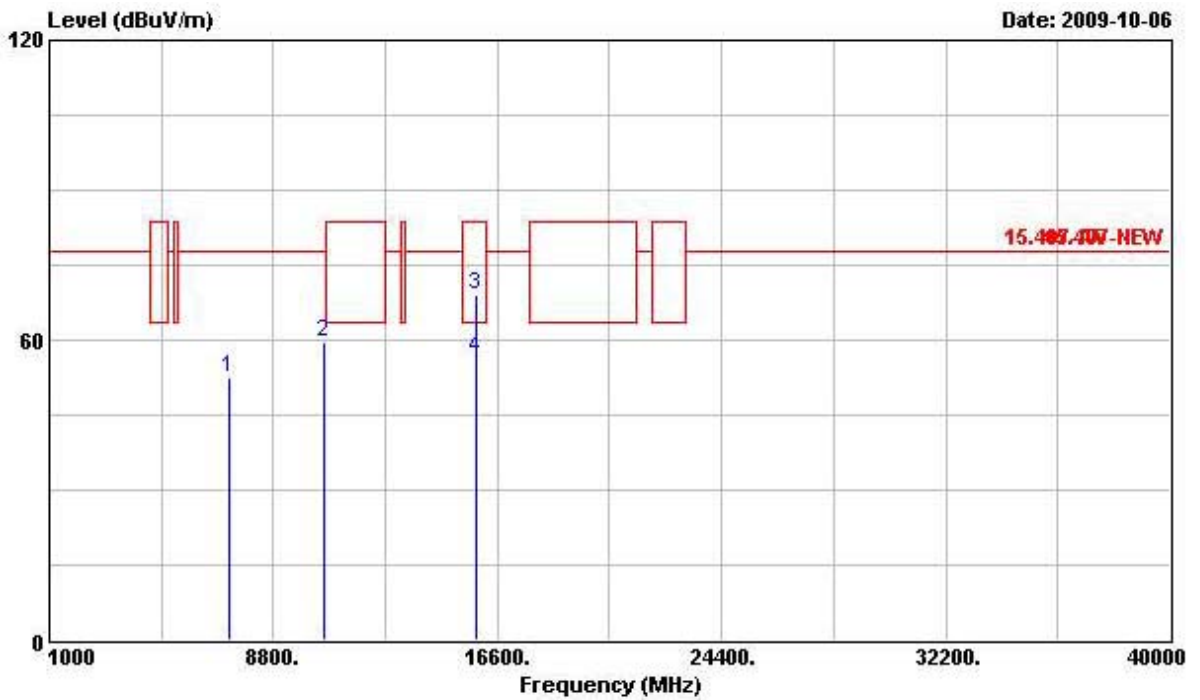

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7244.000  | 52.49  | -25.35     | 77.84      | 43.30             | 37.85          | 5.63       | 34.29         | Peak    |
| 2 | 10560.000 | 59.67  | -18.17     | 77.84      | 46.60             | 40.13          | 6.88       | 33.94         | Peak    |
| 3 | 15840.000 | 69.27  | -14.27     | 83.54      | 51.10             | 42.87          | 8.46       | 33.16         | Peak    |
| 4 | 15840.000 | 56.37  | -7.17      | 63.54      | 38.20             | 42.87          | 8.46       | 33.16         | Average |


Vertical

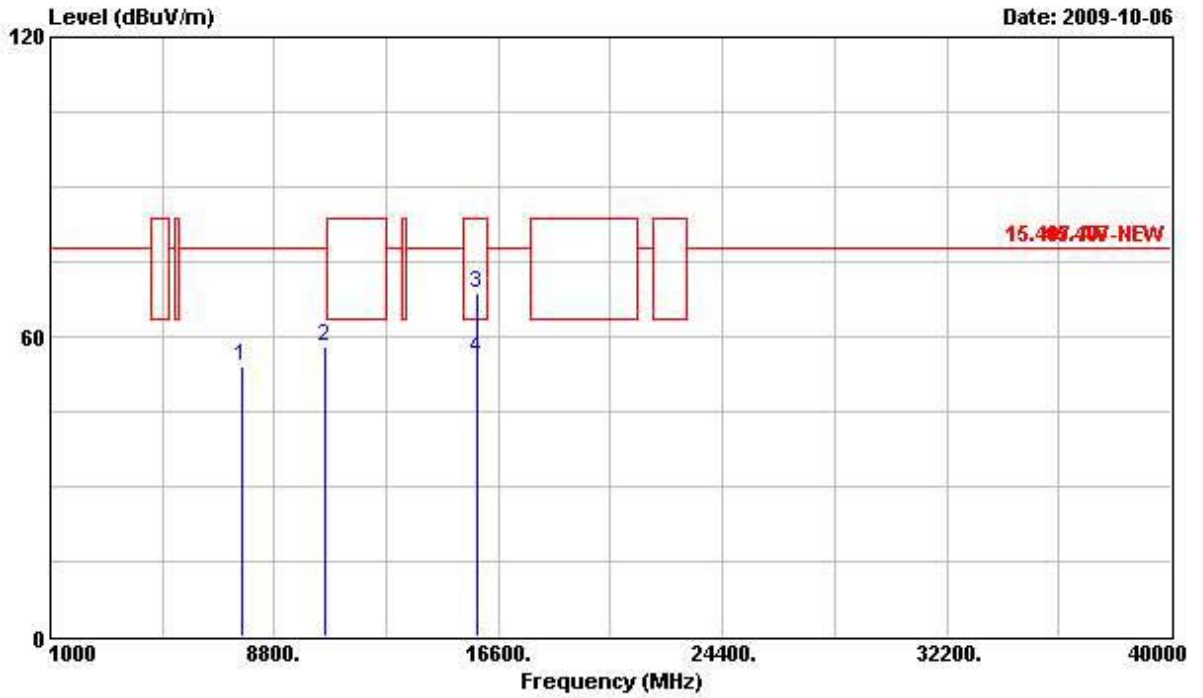

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7678.000  | 53.90  | -23.94     | 77.84      | 44.50             | 38.01          | 5.71       | 34.32         | Peak    |
| 2 | 10560.000 | 58.17  | -19.67     | 77.84      | 45.10             | 40.13          | 6.88       | 33.94         | Peak    |
| 3 | 15840.000 | 68.59  | -14.95     | 83.54      | 50.42             | 42.87          | 8.46       | 33.16         | Peak    |
| 4 | 15840.000 | 55.67  | -7.87      | 63.54      | 37.50             | 42.87          | 8.46       | 33.16         | Average |


|                 |               |               |                       |
|-----------------|---------------|---------------|-----------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY             |
| Temperature     | 25.5          | Humidity      | 52%                   |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 64 (20MHz) |

Horizontal

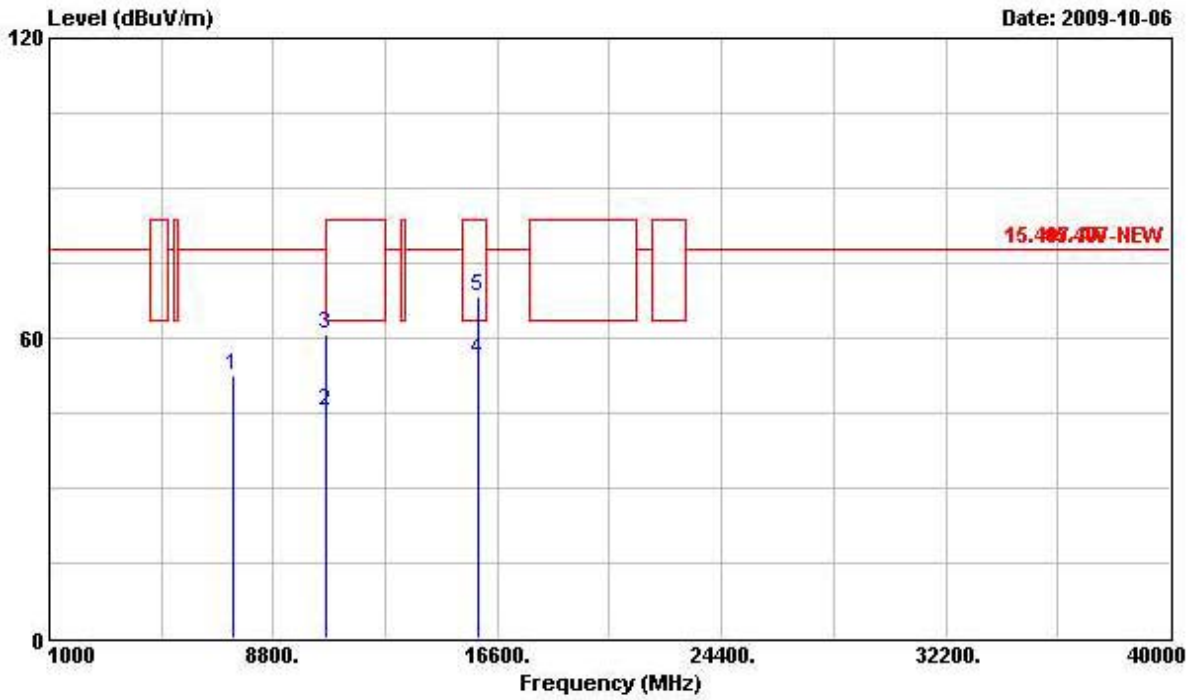

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7428.000  | 52.66  | -25.18     | 77.84      | 43.41             | 37.89          | 5.65       | 34.29         | Peak    |
| 2 | 10640.000 | 45.37  | -18.17     | 63.54      | 32.10             | 40.18          | 6.93       | 33.84         | Average |
| 3 | 10640.000 | 60.87  | -22.67     | 83.54      | 47.60             | 40.18          | 6.93       | 33.84         | Peak    |
| 4 | 15960.000 | 55.57  | -7.97      | 63.54      | 37.50             | 42.89          | 8.47       | 33.29         | Average |
| 5 | 15960.000 | 68.37  | -15.17     | 83.54      | 50.30             | 42.89          | 8.47       | 33.29         | Peak    |


Vertical

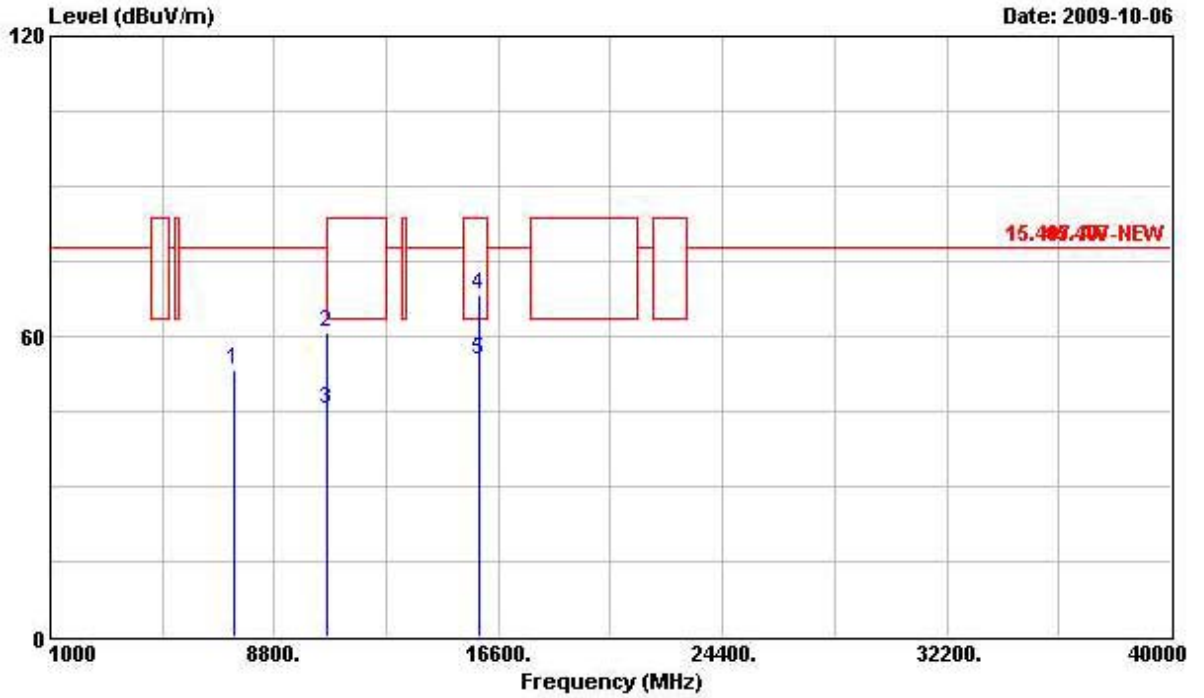

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7390.000  | 53.13  | -24.71     | 77.84      | 43.89             | 37.88          | 5.65       | 34.29         | Peak    |
| 2 | 10640.000 | 60.92  | -22.62     | 83.54      | 47.65             | 40.18          | 6.93       | 33.84         | Peak    |
| 3 | 10640.000 | 45.37  | -18.17     | 63.54      | 32.10             | 40.18          | 6.93       | 33.84         | Average |
| 4 | 15960.000 | 68.47  | -15.07     | 83.54      | 50.40             | 42.89          | 8.47       | 33.29         | Peak    |
| 5 | 15960.000 | 55.27  | -8.27      | 63.54      | 37.20             | 42.89          | 8.47       | 33.29         | Average |

|                 |               |               |                        |
|-----------------|---------------|---------------|------------------------|
| Final Test Date | Oct. 06, 2009 | Test Site No. | 03CH02-HY              |
| Temperature     | 25.5          | Humidity      | 52%                    |
| Test Engineer   | Kobe          | Configuration | 802.11n CH 100 (20MHz) |


Horizontal

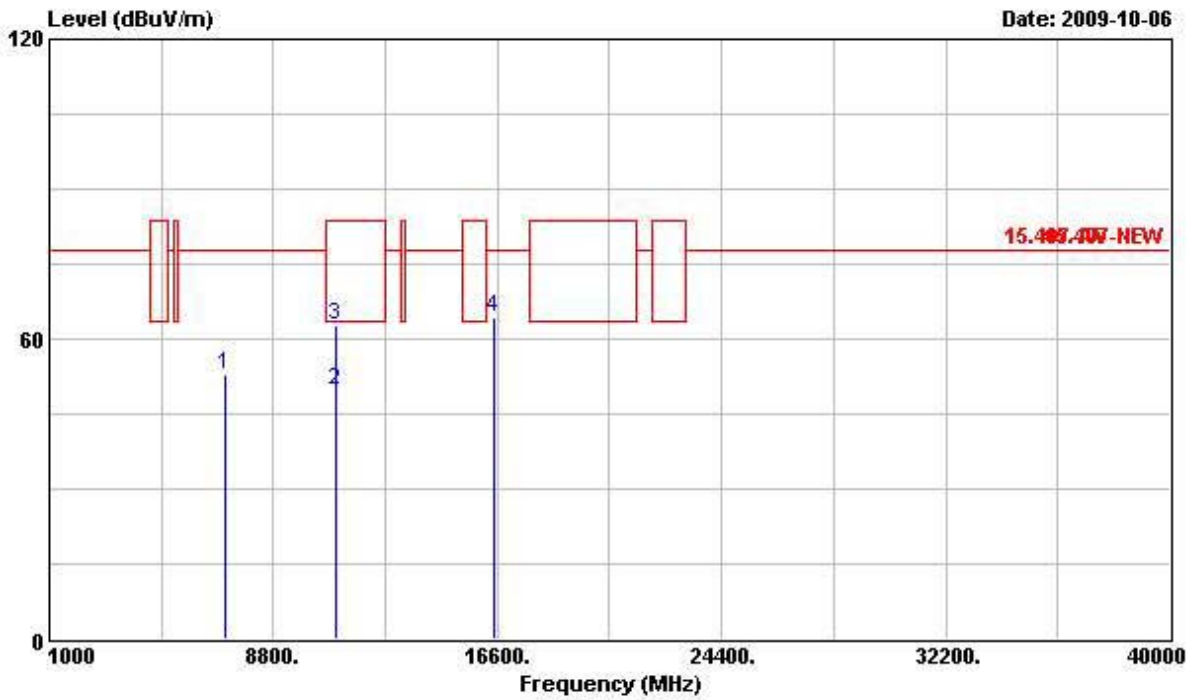

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBUV/m | dB         | dBUV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7106.000  | 52.92  | -24.92     | 77.84      | 43.77             | 37.82          | 5.61       | 34.28         | Peak    |
| 2 | 11000.000 | 49.58  | -13.96     | 63.54      | 35.40             | 40.40          | 7.17       | 33.39         | Average |
| 3 | 11000.000 | 62.60  | -20.94     | 83.54      | 48.42             | 40.40          | 7.17       | 33.39         | Peak    |
| 4 | 16500.000 | 64.36  | -13.48     | 77.84      | 45.40             | 43.50          | 8.24       | 32.78         | Peak    |



Vertical

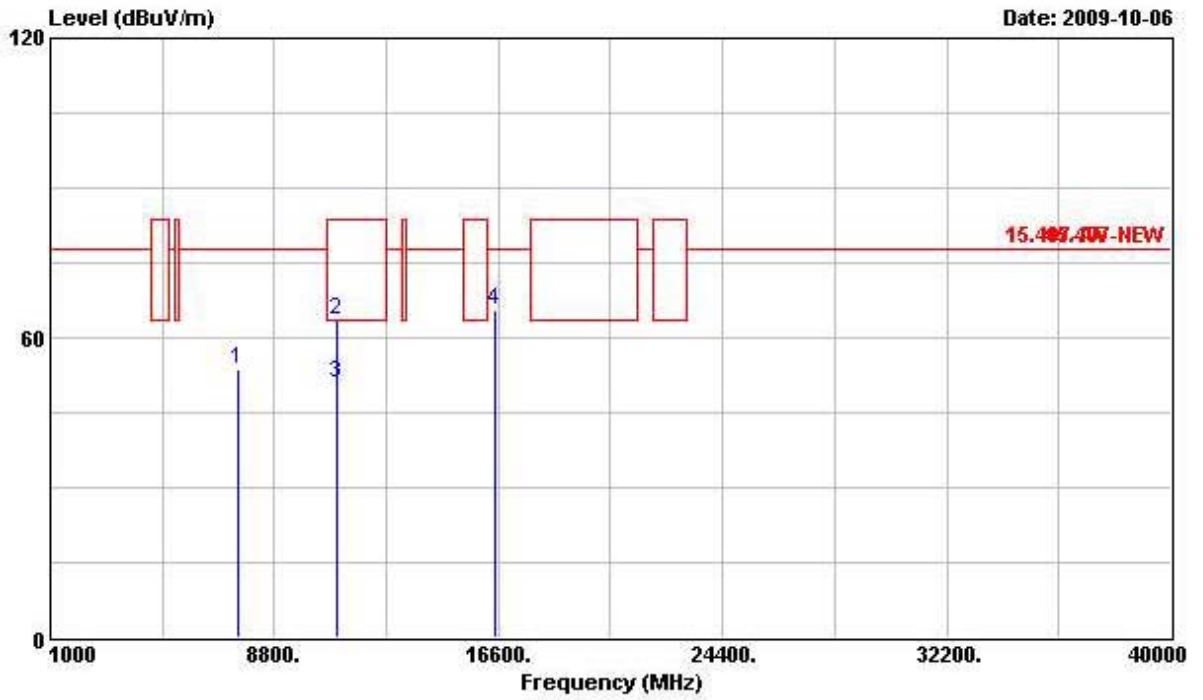

|   | Freq      | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|
|   | MHz       | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         |
| 1 | 7546.000  | 53.62  | -24.22     | 77.84      | 44.32             | 37.93          | 5.67       | 34.30         | Peak    |
| 2 | 11000.000 | 63.68  | -19.86     | 83.54      | 49.50             | 40.40          | 7.17       | 33.39         | Peak    |
| 3 | 11000.000 | 50.98  | -12.56     | 63.54      | 36.80             | 40.40          | 7.17       | 33.39         | Average |
| 4 | 16500.000 | 65.56  | -12.28     | 77.84      | 46.60             | 43.50          | 8.24       | 32.78         | Peak    |