



*EMC Test Report  
Application for Grant of Equipment Authorization  
pursuant to  
Industry Canada RSS-Gen Issue 2 / RSS 210 Issue 7  
FCC Part 15 Subpart C*

*Model: WLU6111-D69*

IC CERTIFICATION #: 1353A-WLU6111  
FCC ID: H8N-WLU6111

APPLICANT: Askey Computer Corporation  
10F, No. 119 ChienKang Rd., Chung-Ho  
Taipei, Taiwan R.O.C.

TEST SITE(S): Elliott Laboratories  
41039 Boyce Road.  
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5

REPORT DATE: October 28, 2009

REISSUE DATE: December 3, 2009

FINAL TEST DATES: July 23, July 24, July 25 and July 26, 2009

AUTHORIZED SIGNATORY:

A handwritten signature in blue ink, appearing to read "Mark E. Hill", written over a horizontal line.

Mark E. Hill  
Staff Engineer  
Elliott Laboratories



Testing Cert #2016-01

Elliott Laboratories is accredited by the A2LA, certificate number 2016-01, to perform the test(s) listed in this report, except where noted otherwise. This report shall not be reproduced, except in its entirety, without the written approval of Elliott Laboratories

**REVISION HISTORY**

Rev#	Date	Comments	Modified By
	November 18, 2009	First release	
1	December 3, 2009	Reissued to correct model number and description on page 9	D. Guidotti

## TABLE OF CONTENTS

<b>COVER PAGE</b> .....	<b>1</b>
<b>REVISION HISTORY</b> .....	<b>2</b>
<b>TABLE OF CONTENTS</b> .....	<b>3</b>
<b>SCOPE</b> .....	<b>5</b>
<b>OBJECTIVE</b> .....	<b>6</b>
<b>STATEMENT OF COMPLIANCE</b> .....	<b>6</b>
<b>DEVIATIONS FROM THE STANDARDS</b> .....	<b>6</b>
<b>TEST RESULTS SUMMARY</b> .....	<b>7</b>
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ) .....	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS .....	8
MEASUREMENT UNCERTAINTIES .....	8
<b>EQUIPMENT UNDER TEST (EUT) DETAILS</b> .....	<b>9</b>
GENERAL.....	9
OTHER EUT DETAILS .....	9
ANTENNA SYSTEM .....	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT .....	9
EUT INTERFACE PORTS .....	10
EUT OPERATION .....	10
<b>TEST SITE</b> .....	<b>11</b>
GENERAL INFORMATION.....	11
CONDUCTED EMISSIONS CONSIDERATIONS .....	11
RADIATED EMISSIONS CONSIDERATIONS .....	11
<b>MEASUREMENT INSTRUMENTATION</b> .....	<b>12</b>
RECEIVER SYSTEM .....	12
INSTRUMENT CONTROL COMPUTER .....	12
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	12
FILTERS/ATTENUATORS .....	13
ANTENNAS.....	13
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	13
INSTRUMENT CALIBRATION.....	13
<b>TEST PROCEDURES</b> .....	<b>14</b>
EUT AND CABLE PLACEMENT .....	14
CONDUCTED EMISSIONS.....	14
RADIATED EMISSIONS .....	14
RADIATED EMISSIONS .....	15
BANDWIDTH MEASUREMENTS .....	16
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS .....	17
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN .....	17
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS .....	18
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS .....	18
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS .....	19
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	19
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....	19
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	20
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	21

**TABLE OF CONTENTS (Continued)**

**APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....1**  
**APPENDIX B TEST DATA .....2**  
**APPENDIX C PHOTOGRAPHS OF TEST CONFIGURATIONS .....3**  
**APPENDIX D PROPOSED FCC ID LABEL & LABEL LOCATION .....4**  
**APPENDIX E DETAILED PHOTOGRAPHS .....5**  
**APPENDIX F OPERATOR'S MANUAL .....6**  
**APPENDIX G BLOCK DIAGRAM .....7**  
**APPENDIX H SCHEMATIC DIAGRAMS .....8**  
**APPENDIX I THEORY OF OPERATION .....9**  
**APPENDIX J RF EXPOSURE INFORMATION .....10**

## SCOPE

An electromagnetic emissions test has been performed on the Askey Computer Corporation model WLU6111-D69, pursuant to the following rules:

Industry Canada RSS-Gen Issue 2  
RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"  
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003  
FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

**OBJECTIVE**

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

**STATEMENT OF COMPLIANCE**

The tested sample of Askey Computer Corporation model WLU6111-D69 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 2

RSS 210 Issue 7 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Askey Computer Corporation model WLU6111-D69 and therefore apply only to the tested sample. The sample was selected and prepared by Jerry Chen of Askey Computer Corporation.

**DEVIATIONS FROM THE STANDARDS**

No deviations were made from the published requirements listed in the scope of this report.

**TEST RESULTS SUMMARY****DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM / DSSS techniques	-	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	802.11g: 15.3 MHz 802.11b: 6.6 MHz	>500kHz	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	802.11g: 18.5 dBm (70mW) EIRP = 18.9dBm <sup>Note 1</sup>  802.11b: 19.1 dBm (82mW) EIRP = 19.5dBm <sup>Note 1</sup>	1 Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	802.11g: -3.14 dBm/3kHz  802.11b: 0.1 dBm/3KHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	<-30dBc	< -30dBc <sup>Note 2</sup>	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	53.2dB $\mu$ V/m @ 2390.1MHz (-0.8dB)	15.207 in restricted bands, all others <-30dBc <sup>Note 2</sup>	Complies

Note 1: EIRP calculated using antenna gain of 0.4 dBi for the highest EIRP multi-point system.

Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst) / RMS averaging over a time interval, as permitted under RSS 210 section A8.4(4).

**GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS**

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antenna is integral to the pcb	Refer to standard	Complies
15.109	RSS GEN 7.2.3 Table 1	Receiver spurious emissions B Mode	45.4dB $\mu$ V/m @ 1039.9MHz	Refer to standard	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	47.5dB $\mu$ V @ 0.282MHz (-3.3dB)	Refer to standard	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in Exhibit 11, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual		Statement for products with detachable antenna	N/A
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	802.11g: 17.2 MHz 802.11b: 12.0 MHz	Information only	N/A

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	$\pm 2.4$
Radiated Emissions	0.015 to 30	$\pm 3.0$
Radiated Emissions	30 to 1000	$\pm 3.6$
Radiated Emissions	1000 to 40000	$\pm 6.0$



**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Askey Computer Corporation model WLU6111-D69 is a 802.11bgn device that will connect to a printer, allowing for wireless connectivity. The EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.3VDC.

The sample was received on July 23, 2009 and tested on July 23, July 24, July 25 and July 26, 2009. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Askey Computer Corporation	WLU6111-D69	802.11b/g/n Module	N/A	H8N-WLU6111

**OTHER EUT DETAILS**

The 802.11n mode is restricted to 20 MHz SISO operation only. The 802.11g Legacy was tested as representative of the 802.11n 20MHz SISO mode.

**ANTENNA SYSTEM**

The antenna is integral to the device. Antenna gain of 0.4dBi.

**ENCLOSURE**

The EUTs enclosure is constructed of plastic, and measures approximately 6cm by 5cm by 3cm.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at Elliott.

**SUPPORT EQUIPMENT**

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	PP01L	Laptop	CN-04P449- 48643-2CH-2011	-
Askey	-	5V to 3.3V fixture	-	-

The following equipment was used as remote support equipment for Conducted emissions testing:

Company	Model	Description	Serial Number	FCC ID
Netgear	FS108	Hub	-	-

**EUT INTERFACE PORTS**

The I/O cabling configuration during testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
USB/Laptop	EUT Board	USB Cable	Shielded	1.5
Fixture	EUT	multiconductor	Unshielded	0.2
AC Power	AC Mains	3Wire	Unshielded	1.0
Ethernet/Laptop*	Hub	Cat-5	Unshielded	10.0

\* used as remote support equipment and cabled only during Conducted emissions testing.

**EUT OPERATION**

During emissions testing the EUT was configured to transmit at the noted channel. The EUT was connected to a laptop via USB. The connection allowed for control of the radio and provided power. A test fixture was provided that would step the 5V from the USB to 3.3V. This was located between the laptop and the EUT.

Unless otherwise stated, all testing in 802.11b mode was performed at 1MBs. All testing in 802.11g mode was performed at 6Mbs. This was determined to be worse case during preliminary testing.

**TEST SITE****GENERAL INFORMATION**

Final test measurements were taken on July 23, July 24, July 25 and July 26, 2009 at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	2845B-4	
Chamber 5	211948	2845B-5	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement with the exception, on OATS sites, of predictable local TV, radio, and mobile communications traffic. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

**RADIATED EMISSIONS CONSIDERATIONS**

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

## **MEASUREMENT INSTRUMENTATION**

### **RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

### **INSTRUMENT CONTROL COMPUTER**

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

### **LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

### *FILTERS/ATTENUATORS*

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

### *ANTENNAS*

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

### *ANTENNA MAST AND EQUIPMENT TURNTABLE*

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

### *INSTRUMENT CALIBRATION*

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.


## TEST PROCEDURES

### EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

### CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

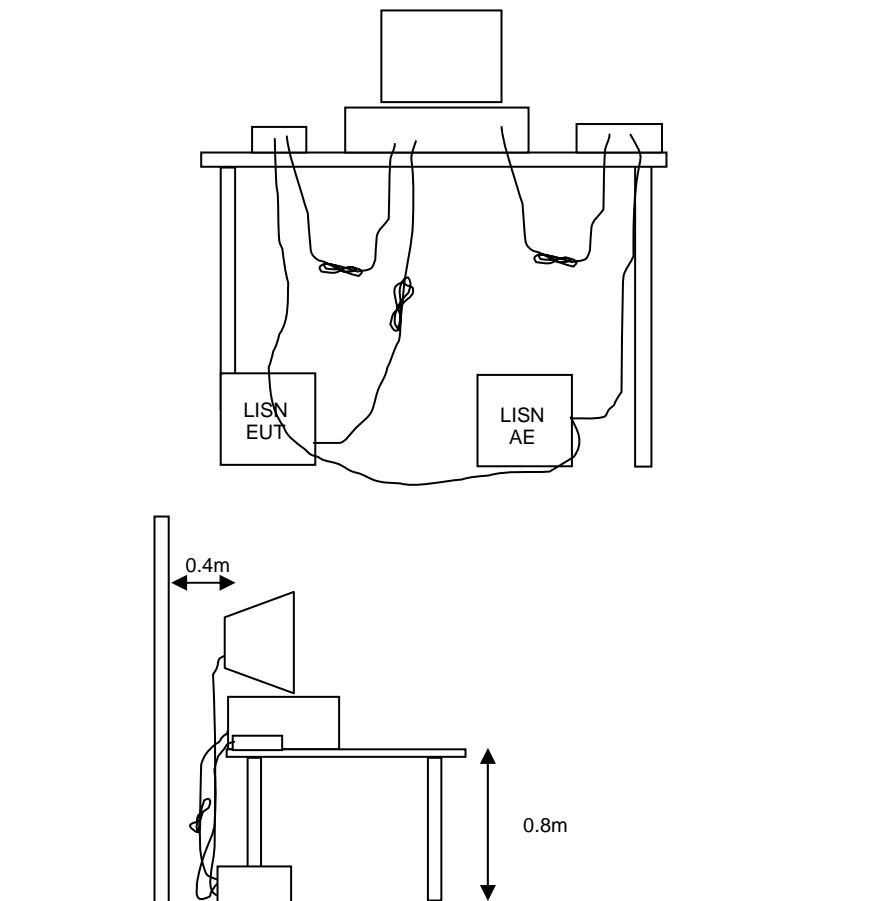

**Figure 1 Typical Conducted Emissions Test Configuration**


**RADIATED EMISSIONS**

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

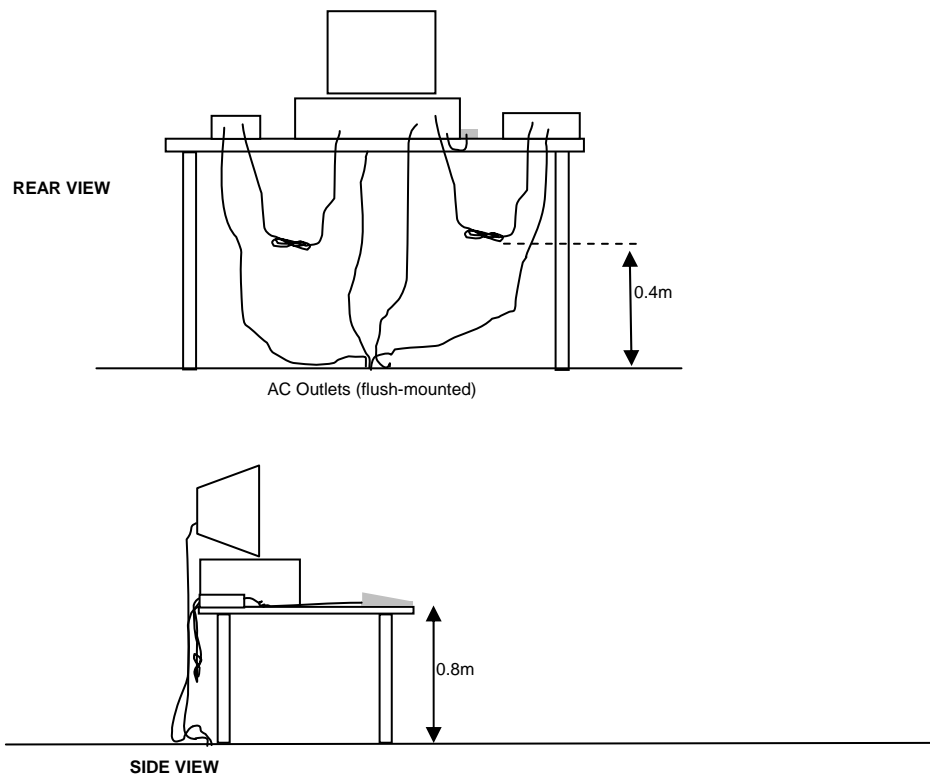


Typical Test Configuration for Radiated Field Strength Measurements

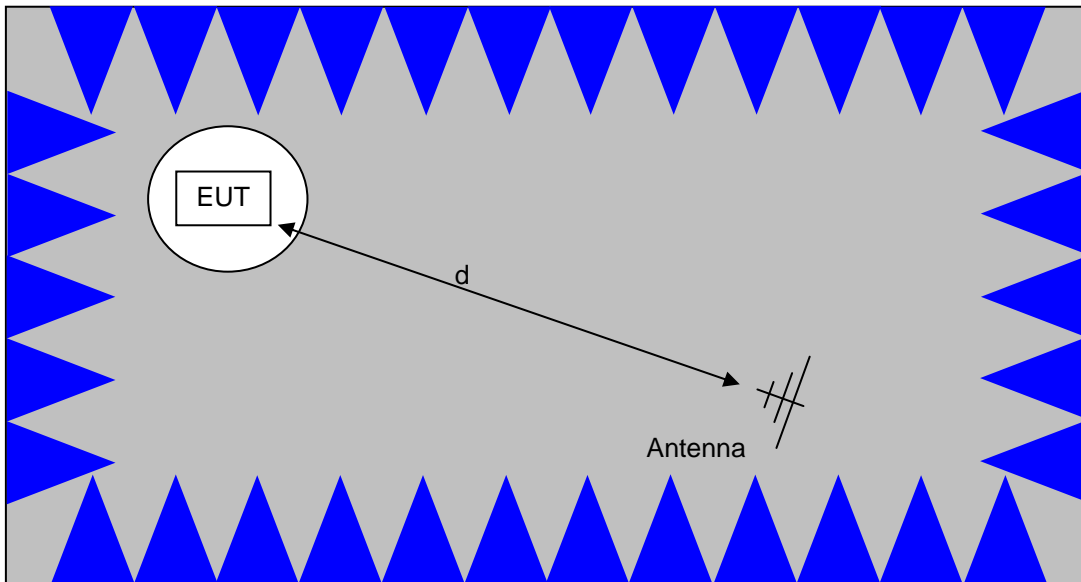

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.

Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

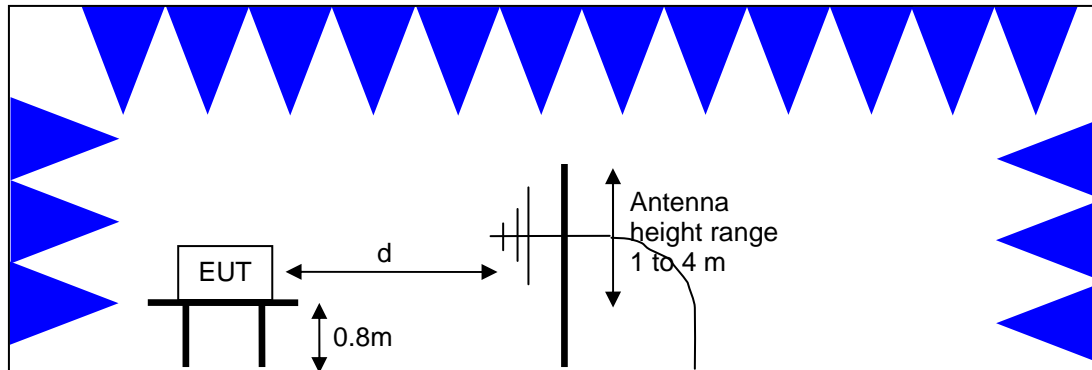

Test Configuration for Radiated Field Strength Measurements  
Semi-Anechoic Chamber, Plan and Side Views

#### **BANDWIDTH MEASUREMENTS**

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.



**SPECIFICATION LIMITS AND SAMPLE CALCULATIONS**

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

**CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN**

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

**GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands<sup>1</sup> (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F <sub>KHz</sub> @ 300m	67.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 300m
0.490-1.705	24000/F <sub>KHz</sub> @ 30m	87.6-20*log <sub>10</sub> (F <sub>KHz</sub> ) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

**RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS**

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

<sup>1</sup> The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

**OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS**

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

**TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS**

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

**SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

$S$  = Specification Limit in dBuV

$M$  = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_C = R_R + F_d$$

and

$$M = R_C - L_S$$

where:

$$R_R = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_C = \text{Corrected Reading in dBuV/m}$$

$$L_S = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

#### *SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION*

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of 3m from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

## Appendix A Test Equipment Calibration Data

### Radiated Emissions, 30 - 18,000 MHz, 24-Jul-09

Engineer: Rafael Varelas

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	263	09-Oct-09
EMCO	Antenna, Horn, 1-18 GHz	3115	786	06-Dec-09
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	26-Feb-10
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1731	02-Dec-09
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	1771	20-Oct-09

### Radio Spurious Emissions, 24-Jul-09

Engineer: Suhaila Khushzad

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpecAn 9 KHz-26.5 GHz, Non-Program	8563E	284	29-Dec-09
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	03-Jun-10
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	19-Sep-09
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1731	02-Dec-09

### Conducted Emissions - AC Power Ports, 26-Jul-09

Engineer: Peter Sales

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	18-Mar-10
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	06-Apr-10
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	10-Feb-10

### Radio Antenna Port (Power and Spurious Emissions), 26-Jul-09

Engineer: Rafael Varelas

<u>Manufacturer</u>	<u>Description</u>	<u>Model #</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	SpectAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	10-Apr-10
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	19-Sep-09
Weinschel Corp	Attenuator, 20dB , 50 ohms, 25W, DC-18 GHz	5787A-20	1994	N/A

## ***Appendix B Test Data***

T76037 52 Pages



## EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
		Account Manager:	Dean Eriksen
Contact:	Jerry Chan	Project Manager:	Mark Hills
Emissions Standard(s):	FCC Part 15, RSS 210	Class:	B
Immunity Standard(s):	-	Environment:	-

# EMC Test Data

For The

## Askey Computer Corporation

Model

WLU6111-D69

Date of Last Test: 11/18/2009



Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Project Manager:	Mark Hills
		Class:	B

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions**

**Test Specific Details**

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

**General Test Configuration**

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

**Ambient Conditions:** Temperature: 21.4 °C Rel. Humidity: 40 %

**Summary of Results - Device Operating in the 2400-2483.5 MHz Band**

Run #	Mode	Channel	Power Setting	Test Performed	Limit	Result / Margin
1a	b mode	1	19	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247 (c)	45.2dBµV/m @ 2390.0MHz (-8.8dB)
			19	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	48.0dBµV/m @ 4824.0MHz (-6.0dB)
1b	b mode	6	19	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	51.5dBµV/m @ 4874.0MHz (-2.5dB)
1c	b mode	11	19	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247 (c)	50.4dBµV/m @ 2483.6MHz (-3.6dB)
			19	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	52.5dBµV/m @ 4924.0MHz (-1.5dB)
2a	g mode	1	16	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247 (c)	53.2dBµV/m @ 2390.1MHz (-0.8dB)
			19	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	43.9dBµV/m @ 1040.0MHz (-10.1dB)
2b	g mode	2	19	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247 (c)	50.3dBµV/m @ 2390.1MHz (-3.7dB)
2c	g mode	6	19	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	43.3dBµV/m @ 1039.9MHz (-10.7dB)
2d	g mode	10	19	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247 (c)	47.3dBµV/m @ 2483.6MHz (-6.7dB)
2e	g mode	11	16.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247 (c)	51.7dBµV/m @ 2483.6MHz (-2.3dB)
			19.0	Radiated Emissions 1 - 26 GHz	FCC Part 15.209 / 15.247 (c)	44.3dBµV/m @ 1040.0MHz (-9.7dB)

**Modifications Made During Testing**

No modifications were made to the EUT during testing

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Project Manager:	Mark Hills
		Class:	B

**Deviations From The Standard**

No deviations were made from the requirements of the standard.

Run #1: Radiated Spurious Emissions, 1000 - 25000 MHz. Operating Mode: 802.11b,

Run #1a: Low Channel @ 2412 MHz

Bandedge Target Power = 19, Spurious Target Power = 19

Port: Main, Upright Orientation

Date of Test: 7/23/2009  
 Test Engineer: Rafael Varelas  
 Test Location: FT Chamber #3

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

**Fundamental Field Strength - Main Port**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	PK/QP/Avg	degrees	meters	
2413.868	105.0	V	-	-	Avg	87	1.1	EUT Upright
2414.710	108.5	V	-	-	PK	87	1.1	EUT Upright
2412.545	104.1	V	-	-	PK	87	1.1	RB=VB= 100kHz, EUT Upright
2413.868	98.7	H	-	-	Avg	198	1.9	EUT Upright
2414.108	102.1	H	-	-	PK	198	1.9	EUT Upright
2413.627	98.2	H	-	-	PK	198	1.9	RB=VB= 100kHz, EUT Upright


**Other Spurious Emissions**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	PK/QP/Avg	degrees	meters	
4824.030	48.0	V	54.0	-6.0	AVG	34	1.1	RB 1 MHz; VB: 10 Hz
4824.060	51.0	V	74.0	-23.0	PK	34	1.1	RB 1 MHz; VB: 1 MHz
1064.170	42.5	V	54.0	-11.5	Peak	82	1.0	
7240.830	50.9	H	74.0	-23.1	Peak	208	1.6	Note 2
9650.000	51.2	H	74.0	-22.8	Peak	150	1.3	Note 2

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.


Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

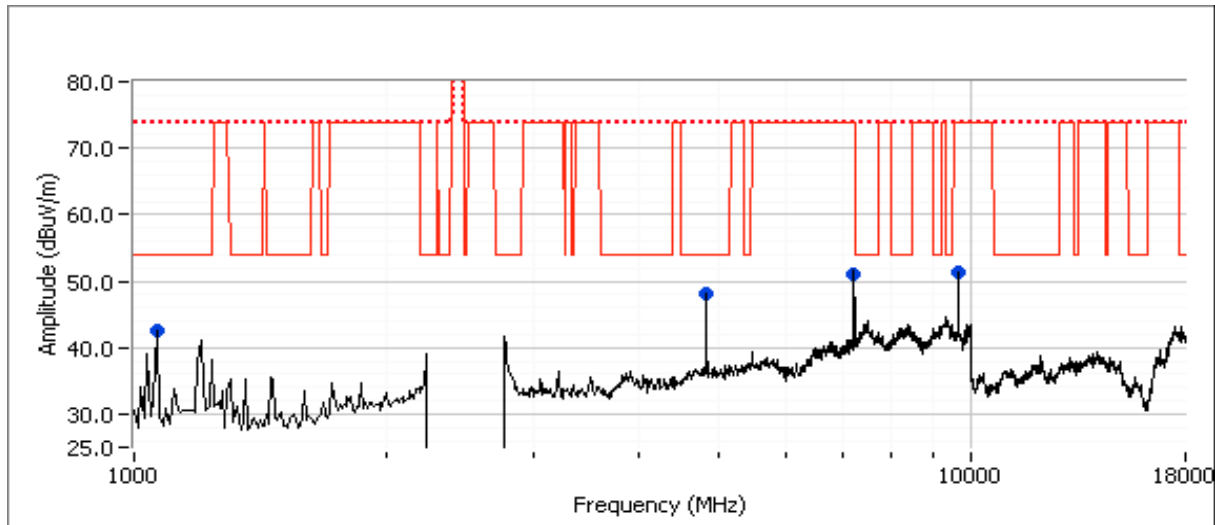


### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247	Detector	Azimuth	Height	Comments
MHz	dBuV/m	V/H	Limit	Margin	PK/QP/Avg	degrees	meters
2390.000	45.2	V	54.0	-8.8	Avg	87	1.1
2389.700	57.8	V	74.0	-16.2	PK	87	1.1
2390.060	41.7	H	54.0	-12.3	Avg	198	1.9
2388.377	53.9	H	74.0	-20.1	PK	198	1.9

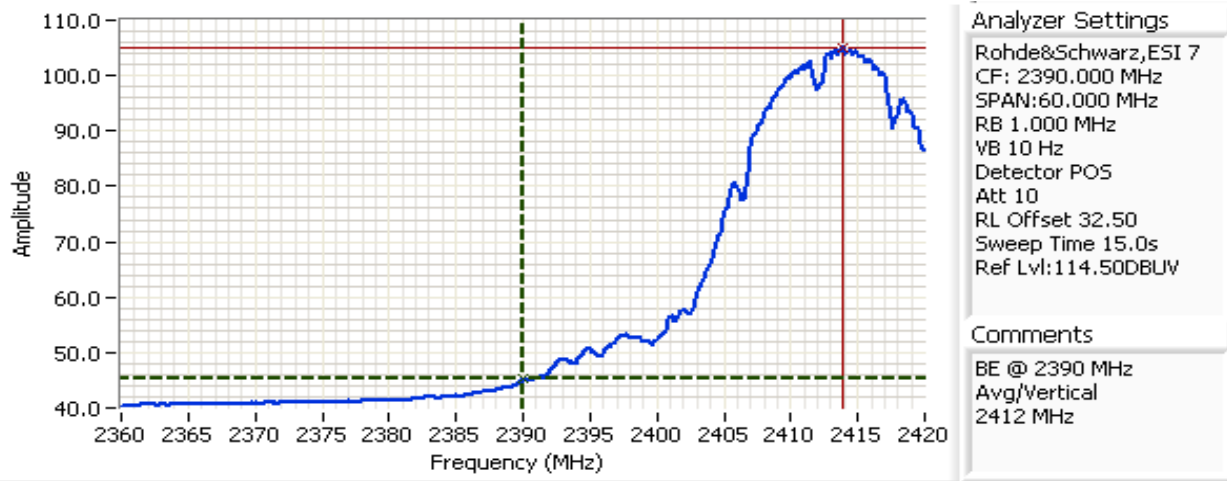

Cursor 1	2390.0601	45.20	+	-	+	-	Delta Freq.	23.808
Cursor 2	2413.8677	104.97	+	-	+	-	Delta Amplitude	59.78

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

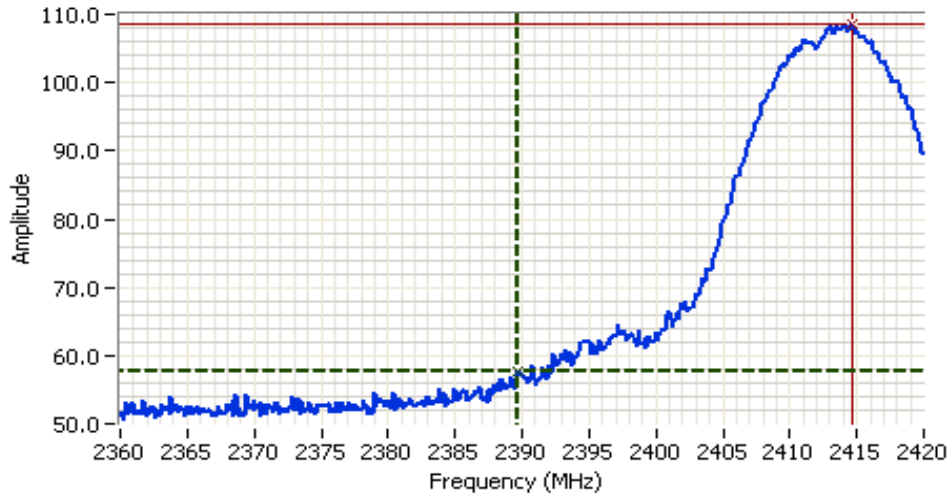

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.50  
 Sweep Time 5.0ms  
 Ref Lvl: 114.50DBUv

**Comments**  
 BE @ 2390 MHz  
 PK/Vertical  
 2412 MHz

Cursor 1	2389.6995	57.81	+	*	🔒
Cursor 2	2414.7095	108.47	+	*	🔒

Delta Freq. 25.010  
 Delta Amplitude 50.67





# EMC Test Data

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
		Account Manager:	Dean Eriksen
Contact:	Jerry Chan	Project Manager:	Mark Hills
Standard:	FCC Part 15, RSS 210	Class:	B

**Run #1b: Center Channel @ 2437 MHz**  
**Spurious Target Power = 19**

Date of Test: 7/23/2009  
 Test Engineer: Rafael Varelas  
 Test Location: FT Chamber #3

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

**Fundamental Field Strength - Main Port**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2437.000	99.1	H	-	-	Avg	307	1.9	EUT Flat
2437.000	103.1	H	-	-	PK	307	1.9	EUT Flat
2437.000	99.0	H	-	-	PK	307	1.9	RB=VB= 100kHz, EUT Flat
2437.000	98.8	V	-	-	Avg	273	1.0	EUT Flat
2437.000	102.4	V	-	-	PK	273	1.0	EUT Flat
2437.000	98.2	V	-	-	PK	273	1.0	RB=VB= 100kHz, EUT Flat
2437.000	99.2	H	-	-	Avg	200	1.8	EUT Upright
2437.000	103.1	H	-	-	PK	200	1.8	EUT Upright
2437.000	99.0	H	-	-	PK	200	1.8	RB=VB= 100kHz, EUT Upright
2437.000	106.8	V	-	-	Avg	86	1.5	EUT Upright
2437.000	110.6	V	-	-	PK	86	1.5	EUT Upright
2437.000	106.3	V	-	-	PK	86	1.5	RB=VB= 100kHz, EUT Upright
2437.000	104.8	H	-	-	Avg	164	1.8	EUT Side
2437.000	108.6	H	-	-	PK	164	1.8	EUT Side
2437.000	104.6	H	-	-	PK	164	1.8	RB=VB= 100kHz, EUT Side
2437.000	102.1	V	-	-	Avg	235	1.2	EUT Side
2437.000	106.0	V	-	-	PK	235	1.2	EUT Side
2437.000	101.8	V	-	-	PK	235	1.2	RB=VB= 100kHz, EUT Side

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Project Manager:	Mark Hills
		Class:	B

### Fundamental Field Strength - AuX Port

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2437.000	99.2	H	-	-	Avg	308	1.9	EUT Flat
2437.000	102.9	H	-	-	PK	308	1.9	EUT Flat
2437.000	98.7	H	-	-	PK	308	1.9	RB=VB= 100kHz, EUT Flat
2437.000	99.3	V	-	-	Avg	273	1.0	EUT Flat
2437.000	102.8	V	-	-	PK	273	1.0	EUT Flat
2437.000	98.7	V	-	-	PK	273	1.0	RB=VB= 100kHz, EUT Flat
2437.000	99.2	H	-	-	Avg	200	1.8	EUT Upright
2437.000	103.1	H	-	-	PK	200	1.8	EUT Upright
2437.000	98.7	H	-	-	PK	200	1.8	RB=VB= 100kHz, EUT Upright
2437.000	106.6	V	-	-	Avg	86	1.5	EUT Upright
2437.000	110.5	V	-	-	PK	86	1.5	EUT Upright
2437.000	106.1	V	-	-	PK	86	1.5	RB=VB= 100kHz, EUT Upright
2437.000	104.4	H	-	-	Avg	153	1.9	EUT Side
2437.000	108.1	H	-	-	PK	153	1.9	EUT Side
2437.000	103.8	H	-	-	PK	153	1.9	RB=VB= 100kHz, EUT Side
2437.000	102.7	V	-	-	Avg	297	1.2	EUT Side
2437.000	106.4	V	-	-	PK	297	1.2	EUT Side
2437.000	101.8	V	-	-	PK	297	1.2	RB=VB= 100kHz, EUT Side

### Other Spurious Emissions


#### Port: Main, Upright Orientation

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4874.020	51.5	V	54.0	-2.5	AVG	80	1.0	RB 1 MHz; VB: 10 Hz
4874.000	54.0	V	74.0	-20.0	PK	80	1.0	RB 1 MHz; VB: 1 MHz
7312.690	49.4	H	54.0	-4.6	AVG	216	1.4	RB 1 MHz; VB: 10 Hz
7312.430	54.6	H	74.0	-19.4	PK	216	1.4	RB 1 MHz; VB: 1 MHz
1064.170	45.2	V	54.0	-8.8	Peak	95	1.6	
9749.170	48.8	H	74.0	-25.2	Peak	155	1.3	Note 2
12186.670	40.4	H	54.0	-13.6	Peak	16	1.0	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

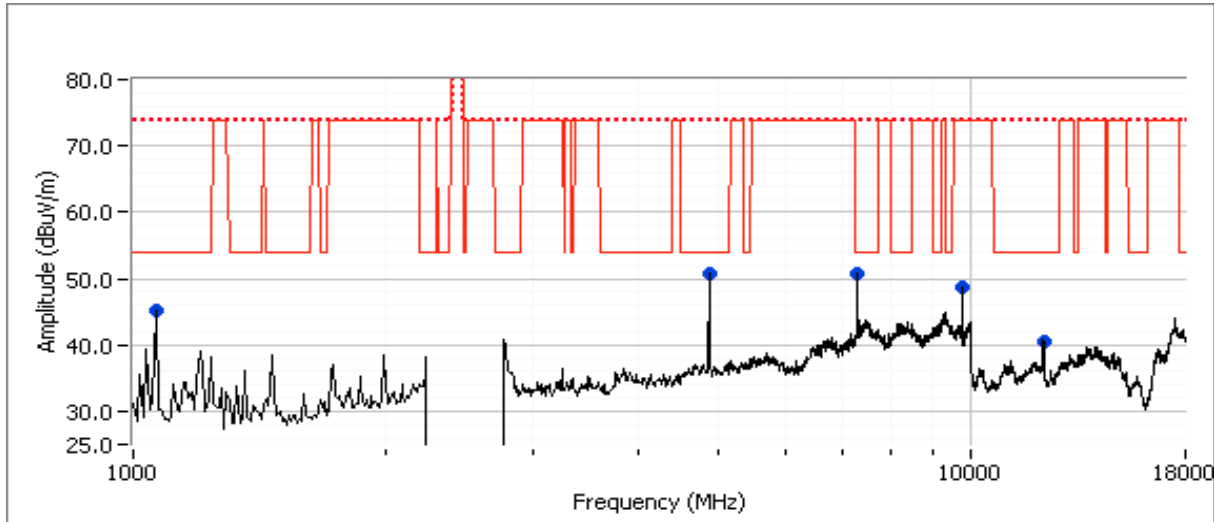

Run #1c: High Channel @ 2462 MHz  
 Bandedge Target Power = 19, Spurious Target Power = 19  
 Port: Main, Upright Orientation

Date of Test: 7/23/2009  
 Test Engineer: Rafael Varelas  
 Test Location: FT Chamber #3

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

**Fundamental Field Strenght - Main Port**


Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2463.721	106.4	V	-	-	Avg	88	1.4	EUT Upright
2464.562	110.2	V	-	-	PK	88	1.4	EUT Upright
2463.721	105.8	V	-	-	PK	88	1.4	RB=VB= 100kHz, EUT Upright
2463.841	99.9	H	-	-	Avg	200	1.2	EUT Upright
2464.562	103.8	H	-	-	PK	200	1.2	EUT Upright
2463.841	99.2	H	-	-	PK	200	1.2	RB=VB= 100kHz, EUT Upright

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

### Other Spurious Emissions

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4923.980	52.5	V	54.0	-1.5	AVG	85	1.0	RB 1 MHz; VB: 10 Hz
4924.000	54.5	V	74.0	-19.5	PK	85	1.0	RB 1 MHz; VB: 1 MHz
7387.810	49.6	V	54.0	-4.4	AVG	283	1.3	RB 1 MHz; VB: 10 Hz
7387.150	55.0	V	74.0	-19.0	PK	283	1.3	RB 1 MHz; VB: 1 MHz
12306.670	40.1	H	54.0	-13.9	Peak	238	1.0	
1064.170	43.7	V	54.0	-10.3	Peak	73	1.6	
9848.330	48.6	H	74.0	-25.4	Peak	154	1.3	Note 2

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

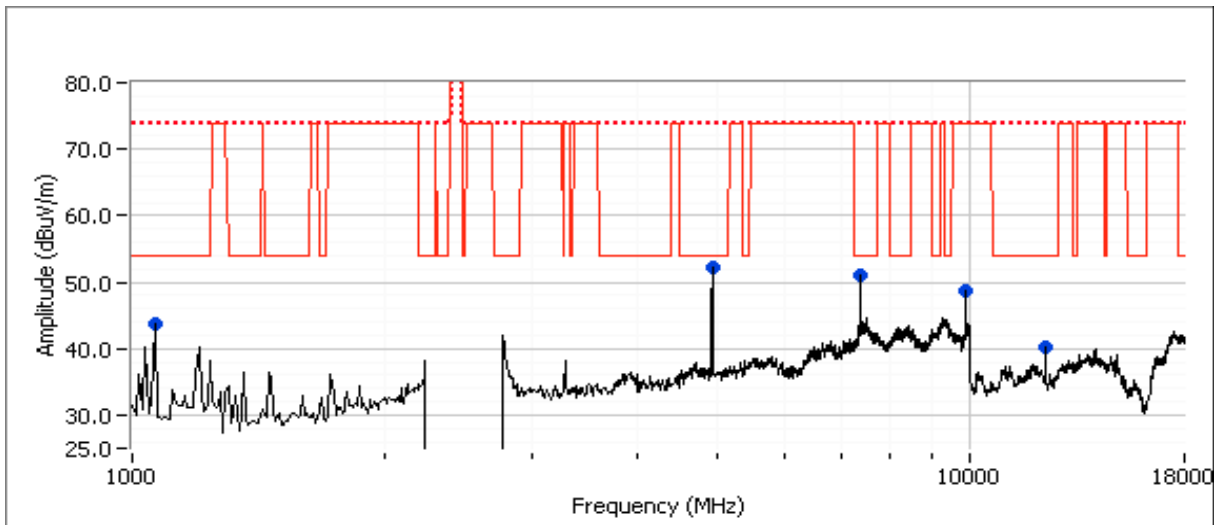



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.560	50.4	V	54.0	-3.6	Avg	88	1.4	
2483.560	60.6	V	74.0	-13.4	PK	88	1.4	
2483.560	47.0	H	54.0	-7.0	Avg	200	1.2	
2486.686	56.1	H	74.0	-17.9	PK	200	1.2	



**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector AutoPeak  
 Att 10  
 RL Offset 32.50  
 Sweep Time 15.0s  
 Ref Lvl: 114.50DBUV

---


**Comments**

BE @ 2483.5 MHz  
 Avg/Vertical  
 2462 MHz

Cursor 1	2463.7205	106.36		Delta Freq.	19.840
Cursor 2	2483.5601	50.37		Delta Amplitude	55.99



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

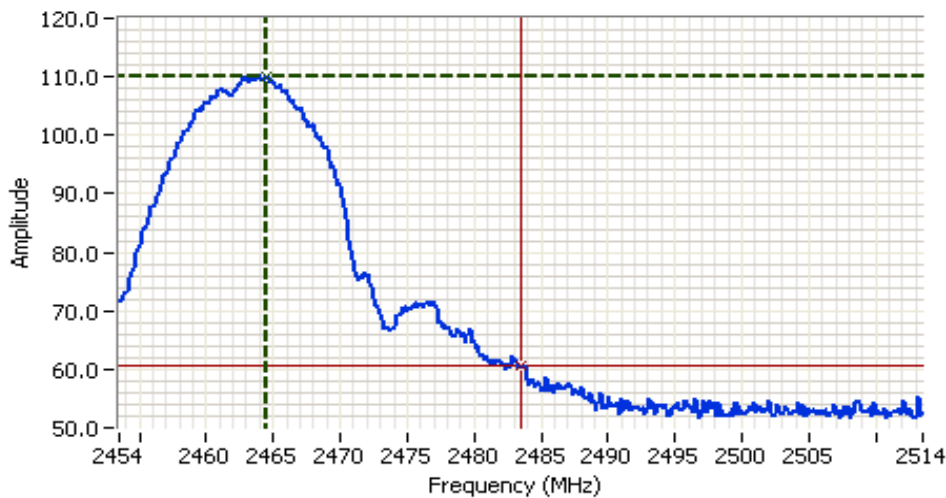

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.50  
 Sweep Time 5.0ms  
 Ref Lvl: 114.50DBUV

**Comments**

BE @ 2483.5 MHz  
 PK/Vertical  
 2462 MHz

Cursor 1	2464.5620	110.17	
Cursor 2	2483.5601	60.58	

Delta Freq. 18.998

Delta Amplitude 49.59




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

Run #2: Radiated Spurious Emissions, 1000 - 25000 MHz. Operating Mode: 802.11g,  
 Run #2a: Low Channel @ 2412 MHz  
 Bandedge Target Power = 16, Spurious Target Power = 19  
 Port: Main, Upright Orientation

Date of Test: 7/24/2009  
 Test Engineer: Suhaila Khushzad  
 Test Location: Chamber # 5

Config. Used: 1  
 Config Change: None  
 Host Unit Voltage 120V/ 60Hz

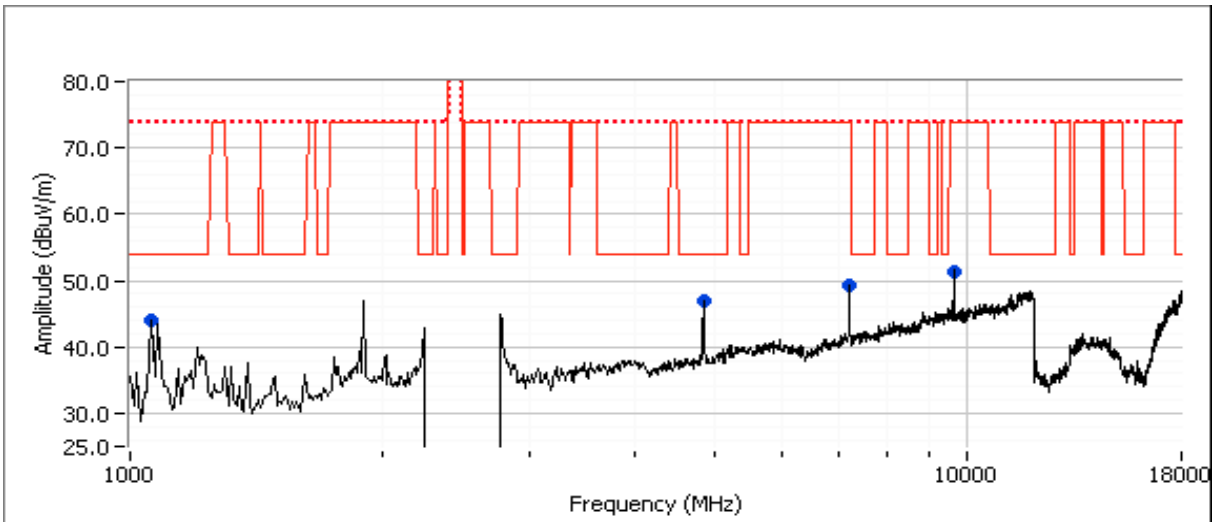

### Other Spurious Emissions


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
1040.030	43.9	H	54.0	-10.1	AVG	116	1.0	RB 1 MHz; VB: 10 Hz
1040.010	46.2	H	74.0	-27.8	PK	116	1.0	RB 1 MHz; VB: 1 MHz
4824.030	35.7	V	54.0	-18.3	AVG	116	1.1	RB 1 MHz; VB: 10 Hz
4823.900	47.3	V	74.0	-26.7	PK	116	1.1	RB 1 MHz; VB: 1 MHz
7237.430	44.5	H	74.0	-29.5	AVG	312	1.2	Note 2
7237.500	56.8	H	74.0	-17.2	PK	312	1.2	Note 2
9648.230	45.4	H	54.0	-28.6	AVG	152	1.0	Note 2
9647.430	59.6	H	74.0	-14.4	PK	152	1.0	Note 2

Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

**Band Edge Signal Field Strength**

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.060	53.2	V	54.0	-0.8	Avg	119	1.5	
2390.060	69.9	V	74.0	-4.1	PK	119	1.5	
2390.060	49.2	H	54.0	-4.8	Avg	2	1.3	
2389.690	65.8	H	74.0	-8.3	PK	2	1.3	

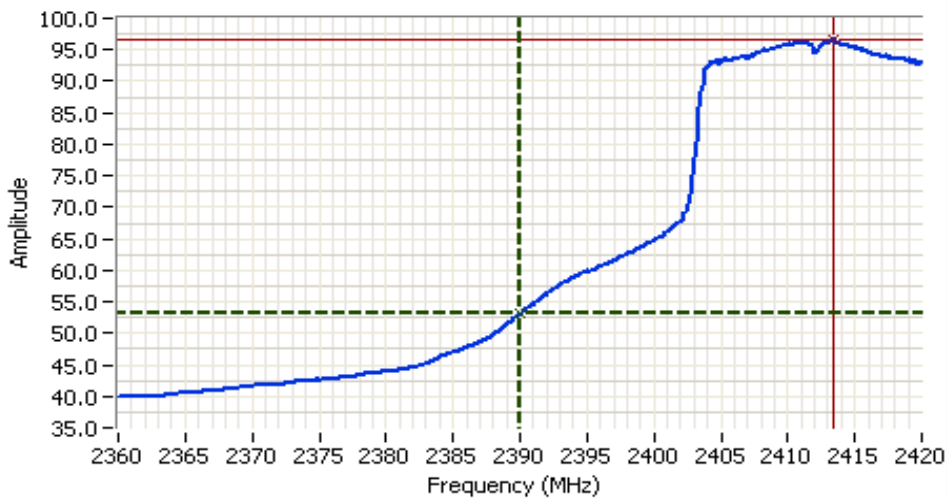

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUW


**Comments**  
 BE @ 2390 MHz  
 Avg-V

Cursor 1	2390.0601	53.17	
Cursor 2	2413.3867	96.54	

Delta Freq. 23.327  
 Delta Amplitude 43.37



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

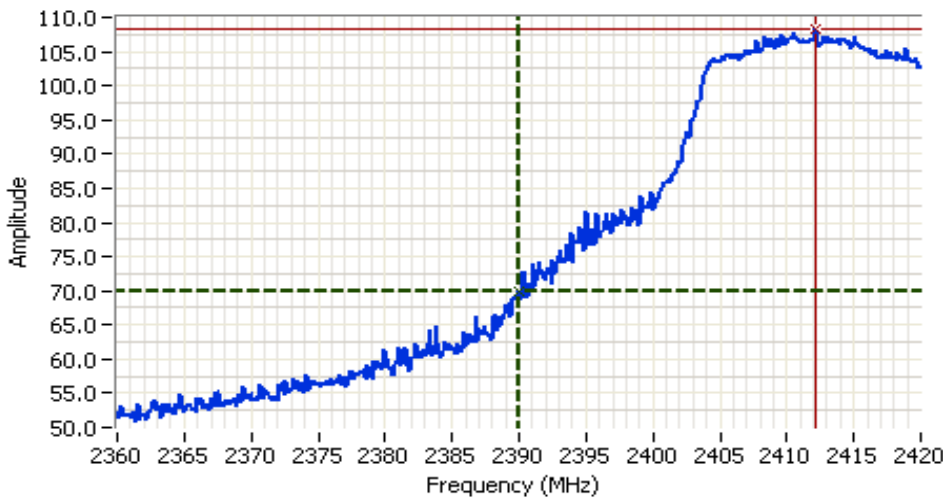


**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2390 MHz  
 Avg-V

Cursor 1	2390.0601	69.93	
Cursor 2	2412.1843	108.18	

Delta Freq. 22.124  
 Delta Amplitude 38.25

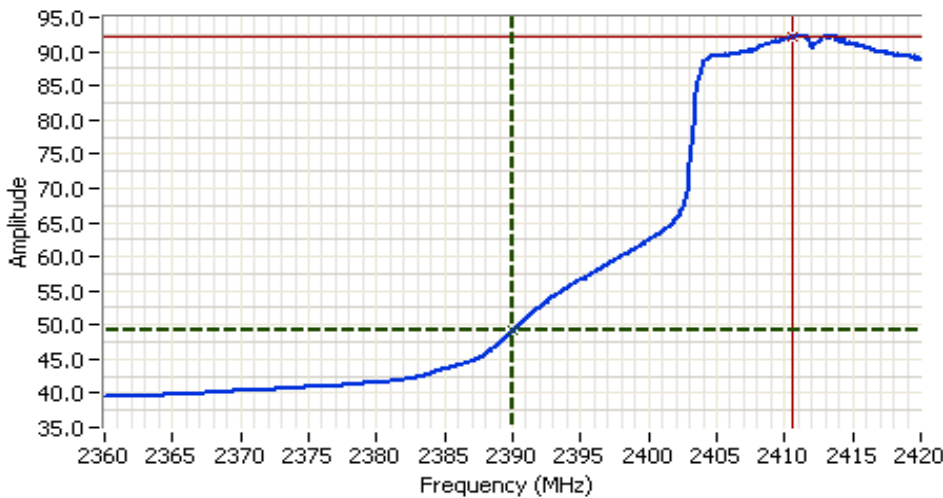

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUV


**Comments**  
 BE @ 2390 MHz  
 Avg-H

Cursor 1	2390.0601	49.20	
Cursor 2	2410.6213	92.24	

Delta Freq. 20.561  
 Delta Amplitude 43.03



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

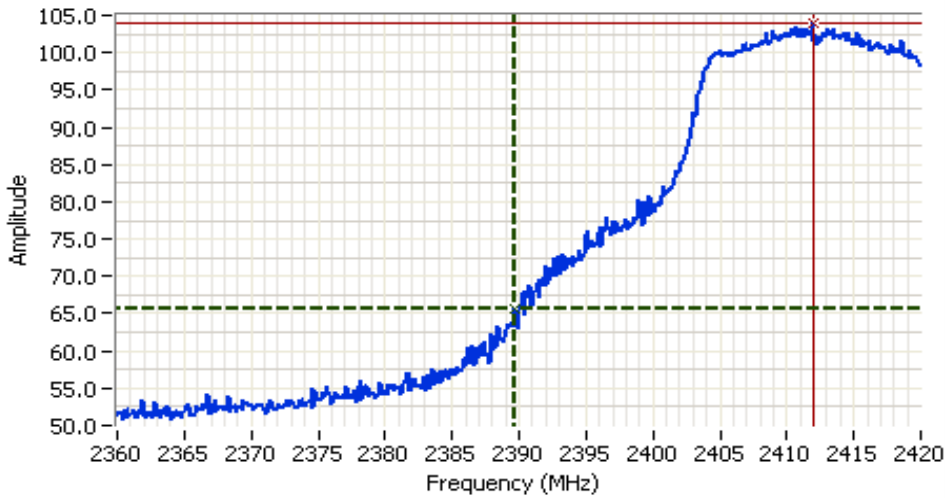

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.200dBuV

**Comments**  
 BE @ 2390 MHz  
 Peak-H

Cursor 1	2389.6995	65.75		Delta Freq.	22.244
Cursor 2	2411.9438	103.86		Delta Amplitude	38.11




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

Run #2b: Low Channel @ 2417 MHz  
 Bandedge Target Power = 19  
 Port: Main, Upright Orientation

### Band Edge Signal Field Strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	V/H	Limit	Margin	PK/QP/Avg	degrees	meters	
2390.060	50.3	V	54.0	-3.7	Avg	106	1.5	
2389.450	65.3	V	74.0	-8.7	PK	106	1.5	
2390.060	46.8	H	54.0	-7.2	Avg	4	2.3	
2389.450	63.6	H	74.0	-10.4	PK	4	2.3	

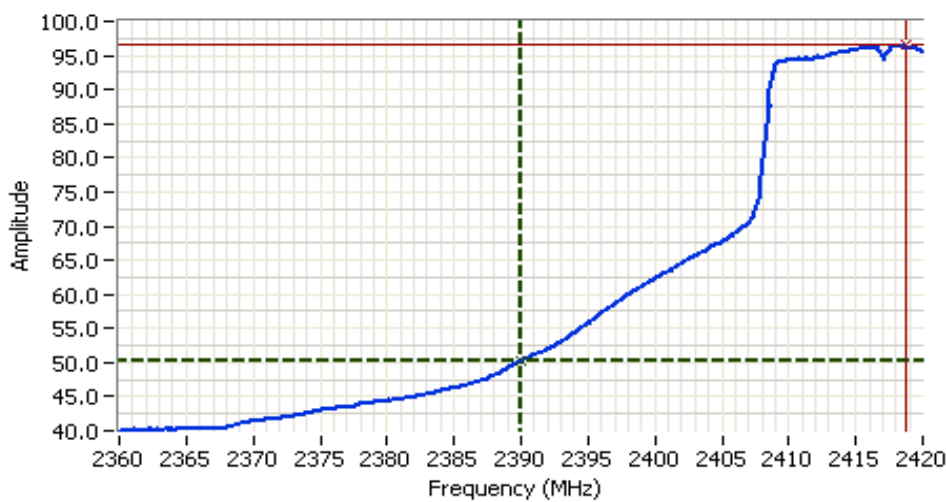

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUW

---

**Comments**


BE @ 2390 MHz  
 Avg-V,  
 CH 2

Cursor 1	2390.0601	50.29	
Cursor 2	2418.6772	96.50	

Delta Freq. 28.617  
 Delta Amplitude 46.21



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

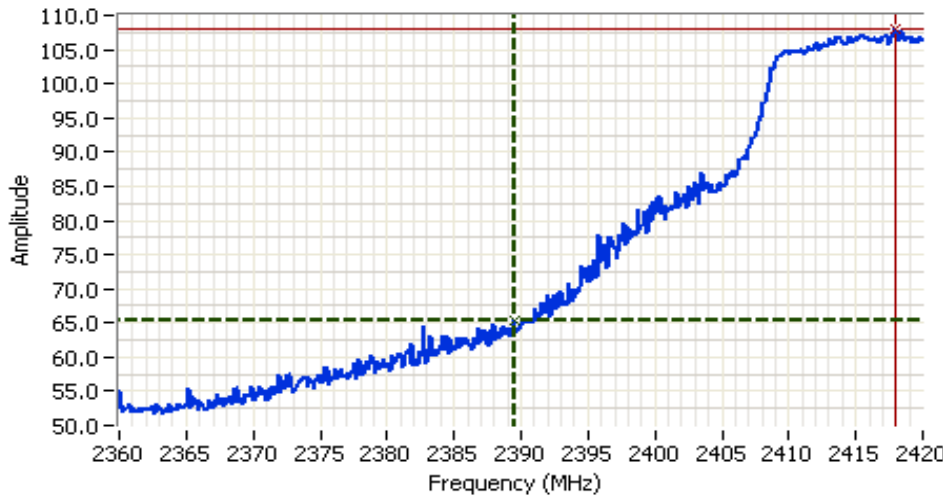


**Analyzer Settings**  
 Rohde&Schwarz,ESI 7  
 CF: 2390.000 MHz  
 SPAN:60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl:114.20DBUV

**Comments**  
 BE @ 2390 MHz  
 Peak-V,  
 CH 2

Cursor 1	2389.4590	65.27	
Cursor 2	2417.9558	107.85	

Delta Freq. 28.497  
 Delta Amplitude 42.61

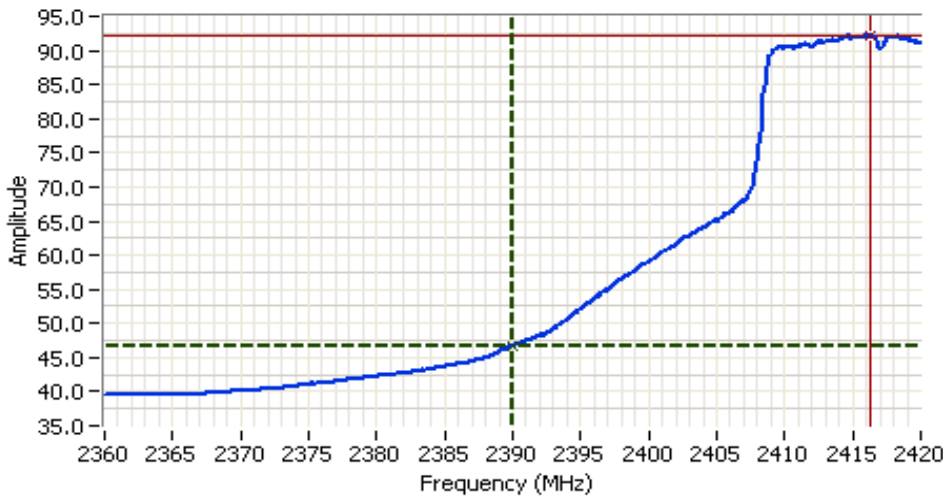

**Analyzer Settings**  
 Rohde&Schwarz,ESI 7  
 CF: 2390.000 MHz  
 SPAN:60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl:114.20DBUV

**Comments**  
 BE @ 2390 MHz  
 Avg-H  
 CH 2


Cursor 1	2390.0601	46.76	
Cursor 2	2416.2725	92.19	

Delta Freq. 26.212  
 Delta Amplitude 45.43





Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

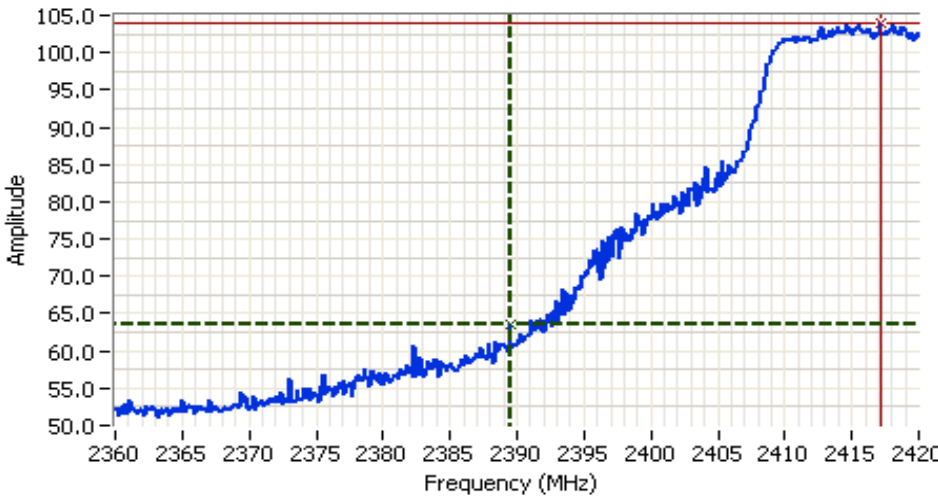

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2390.000 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector PO5  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2390 MHz  
 Peak-H  
 CH 2


Cursor 1	2389.4590	63.57	
Cursor 2	2417.1143	104.02	

Delta Freq. 27.655  
 Delta Amplitude 40.45



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

Run #2c: Center Channel @ 2437 MHz, EUT Up right on table  
 Spurious Target Power = 19  
 Port: Main, Upright Orientation

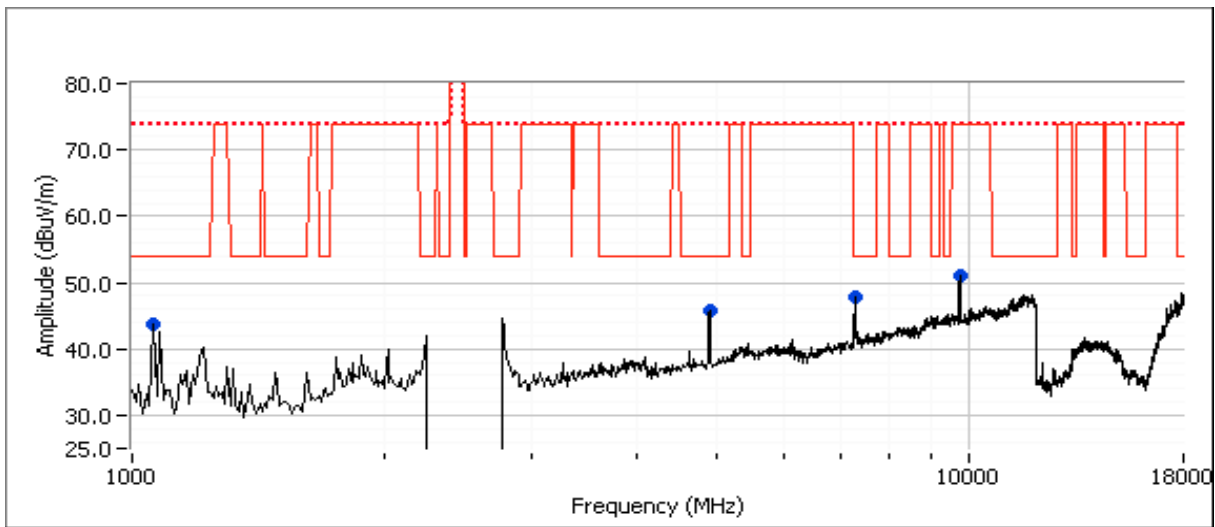

**Other Spurious Emissions**

Frequency MHz	Level dBuV/m	Pol V/H	15.209 / 15.247 Limit Margin	Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
1039.870	43.3	H	54.0 -10.7	AVG	157	1.0	RB 1 MHz; VB: 10 Hz
1040.000	45.2	H	74.0 -28.8	PK	157	1.0	RB 1 MHz; VB: 1 MHz
7313.410	40.0	H	54.0 -14.0	AVG	183	1.0	RB 1 MHz; VB: 10 Hz
7308.080	54.3	H	74.0 -19.7	PK	183	1.0	RB 1 MHz; VB: 1 MHz
9747.930	46.2	H	74.0 -27.8	AVG	158	1.4	Note 2
9744.660	61.4	H	74.0 -12.6	PK	158	1.4	Note 2
4873.770	36.2	V	54.0 -17.8	AVG	285	1.3	RB 1 MHz; VB: 10 Hz
4871.500	46.9	V	74.0 -27.1	PK	285	1.3	RB 1 MHz; VB: 1 MHz


Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	Project Manager: Mark Hills
Standard: FCC Part 15, RSS 210	Class: B

Run #2d: 10th Channel @ 2457 MHz,  
Bandedge Target Power = 19  
Port: Main, Upright Orientation

**Band Edge Signal Field Strength**

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2483.560	47.3	V	54.0	-6.7	Avg	237	1.5	
2484.880	65.9	V	74.0	-8.1	PK	237	1.5	
2483.560	43.9	H	54.0	-10.1	Avg	327	1.0	
2484.040	60.8	H	74.0	-13.2	PK	327	1.0	

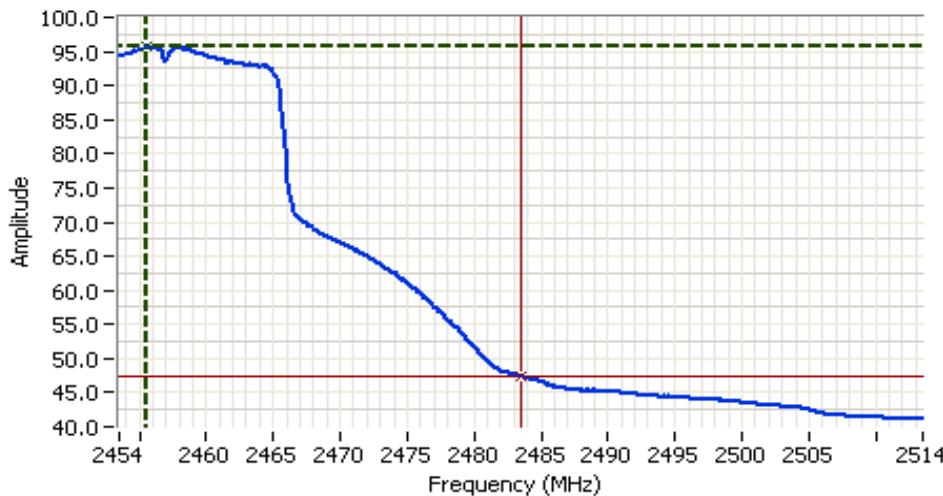

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUV


**Comments**  
 BE @ 2483.5 MHz  
 Avg-V  
 CH 10

Cursor 1	2455.5442	95.61	
Cursor 2	2483.5601	47.30	

Delta Freq. 28.016  
Delta Amplitude 48.31




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

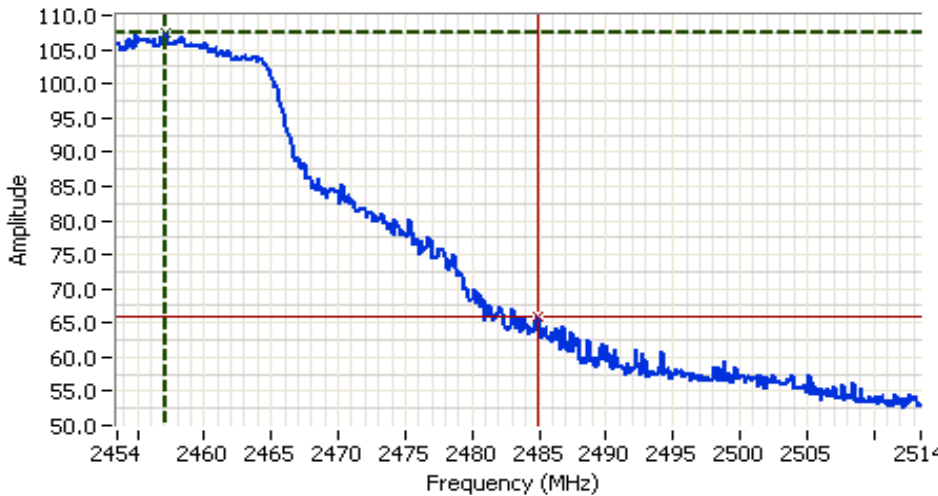

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2483.5 MHz  
 Peak-V  
 CH 10

Cursor 1	2457.1072	107.53	+	-	+	-	Delta Freq.	27.776
Cursor 2	2484.8828	65.94	+	-	+	-	Delta Amplitude	41.60

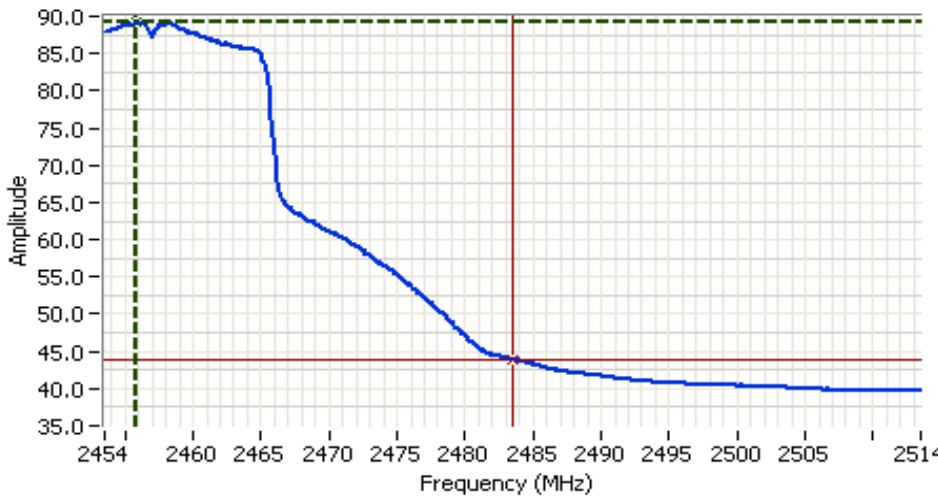


**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2483.5 MHz  
 Avg-H  
 CH 10

Cursor 1	2455.7847	89.19	+	-	+	-	Delta Freq.	27.775
Cursor 2	2483.5601	43.91	+	-	+	-	Delta Amplitude	45.28



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

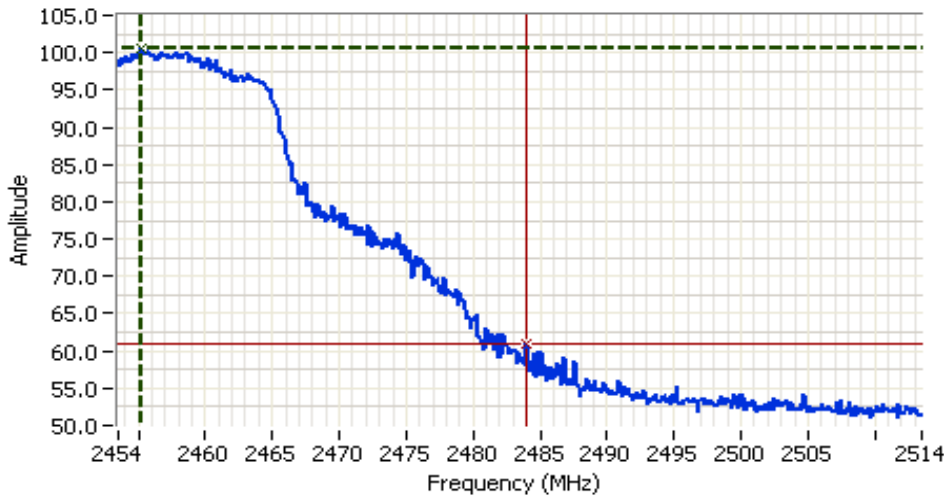

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2483.5 MHz  
 Peak-H  
 CH 10


Cursor 1	2455.1833	100.51	
Cursor 2	2484.0410	60.83	

Delta Freq. 28.858  
 Delta Amplitude 39.68



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

Run #2e: High Channel @ 2462 MHz  
 Bandedge Target Power = 16.5, Spurious = 19  
 Port: Main, Upright Orientation

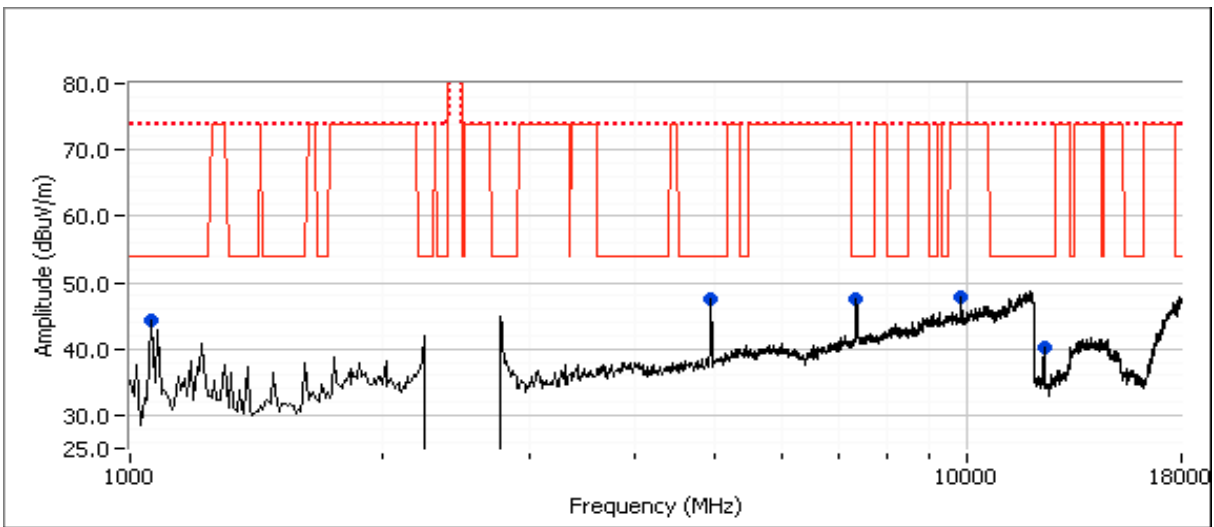

**Other Spurious Emissions**


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	V/H	Limit	Margin	PK/QP/Avg	degrees	meters	
1039.960	44.3	H	54.0	-9.7	AVG	147	1.0	RB 1 MHz; VB: 10 Hz
1040.100	46.4	H	74.0	-27.6	PK	147	1.0	RB 1 MHz; VB: 1 MHz
4923.620	39.9	H	54.0	-14.1	AVG	26	1.3	RB 1 MHz; VB: 10 Hz
4923.690	50.7	H	74.0	-23.3	PK	26	1.3	RB 1 MHz; VB: 1 MHz
7388.150	42.9	V	54.0	-11.1	AVG	273	1.3	RB 1 MHz; VB: 10 Hz
7388.420	55.0	V	74.0	-19.0	PK	273	1.3	RB 1 MHz; VB: 1 MHz
9848.210	42.2	H	74.0	-31.8	AVG	127	1.2	Note 2
9845.750	55.8	H	74.0	-18.2	PK	127	1.2	Note 2
12309.210	36.8	H	54.0	-17.2	AVG	162	1.0	RB 1 MHz; VB: 10 Hz
12300.680	51.4	H	74.0	-22.6	PK	162	1.0	RB 1 MHz; VB: 1 MHz

Note 2: Signal is in restricted band, compliance shown via antenna conducted measurements.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

### Band Edge Signal Field Strength

Frequency MHz	Level dB $\mu$ V/m	Pol V/H	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
2483.560	51.7	V	54.0	-2.3	Avg	237	1.4	
2483.880	69.7	V	74.0	-4.3	PK	237	1.4	
2483.560	47.1	H	54.0	-6.9	Avg	328	1.0	
2483.680	65.3	H	74.0	-8.7	PK	328	1.0	

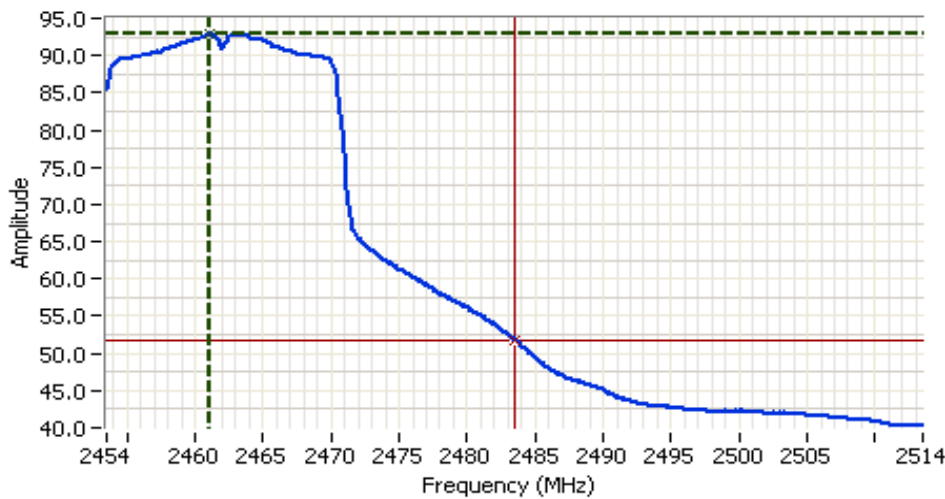

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUV


**Comments**  
 BE @ 2483.5 MHz  
 Avg-V  
 CH 11

Cursor 1	2461.0752	92.82	
Cursor 2	2483.5601	51.72	

Delta Freq. 22.485  
 Delta Amplitude 41.10



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

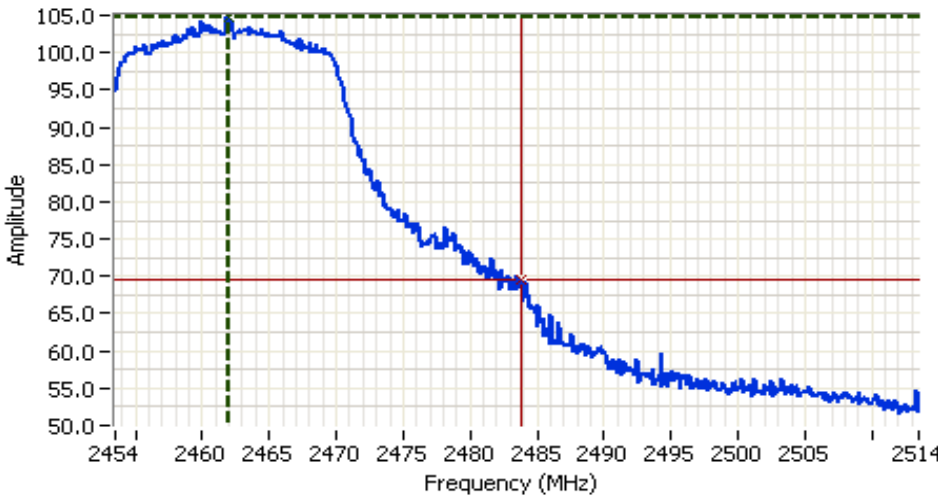


**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2483.5 MHz  
 Peak-V  
 CH 11

Cursor 1	2461.9167	104.85	
Cursor 2	2483.8005	69.67	

Delta Freq. 21.884  
 Delta Amplitude 35.18

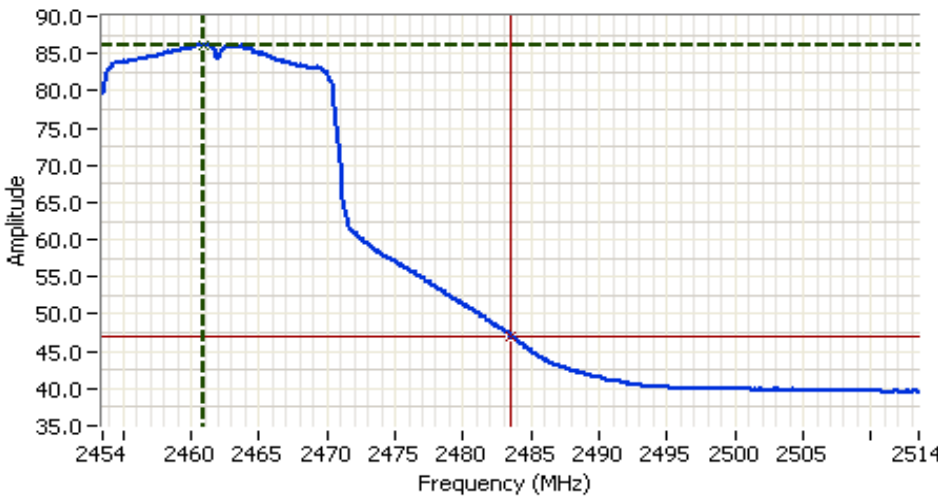

**Analyzer Settings**  
 Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 10 Hz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 15.0s  
 Ref Lvl: 114.20DBUV

**Comments**  
 BE @ 2483.5 MHz  
 Avg-H  
 CH 11


Cursor 1	2460.9548	86.20	
Cursor 2	2483.5601	47.10	

Delta Freq. 22.605  
 Delta Amplitude 39.10





Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Project Manager: Mark Hills
	Class: B

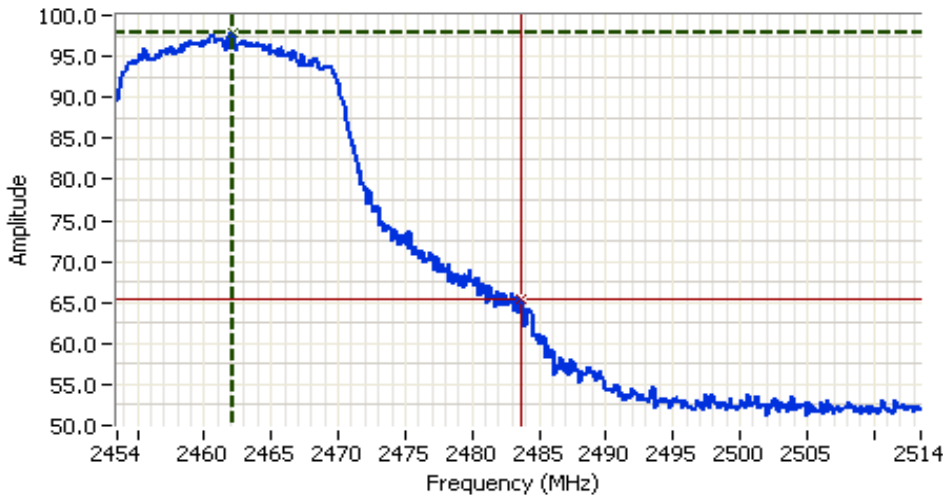

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2483.500 MHz  
 SPAN: 60.000 MHz  
 RB 1.000 MHz  
 VB 1.000 MHz  
 Detector POS  
 Att 10  
 RL Offset 32.20  
 Sweep Time 5.0ms  
 Ref Lvl: 114.20DBUW

**Comments**

BE @ 2483.5 MHz  
 Peak-H  
 CH 11

Cursor 1	2462.1572	97.90	
Cursor 2	2483.6804	65.34	

Delta Freq. 21.523

Delta Amplitude 32.56






Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

### Run #1: Output Power

Power Setting <sup>2</sup>	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP <sup>Note 2</sup>	
		(dBm) <sup>1</sup>	mW			dBm	W
16	2412	15.8	38.0	0.40	Pass	16.2	0.042
19	2417	18.2	65.5	0.40	Pass	18.6	0.072
19	2437	18.1	64.6	0.40	Pass	18.5	0.071
19	2457	18.5	70.0	0.40	Pass	18.9	0.077
16.5	2462	16.0	39.8	0.40	Pass	16.4	0.044

- Note 1: RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the ESI analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 50 MHz. **Spurious limit is -30dBc because this method was used.**
- Note 2: Power setting - the software power setting used during testing, included for reference only.

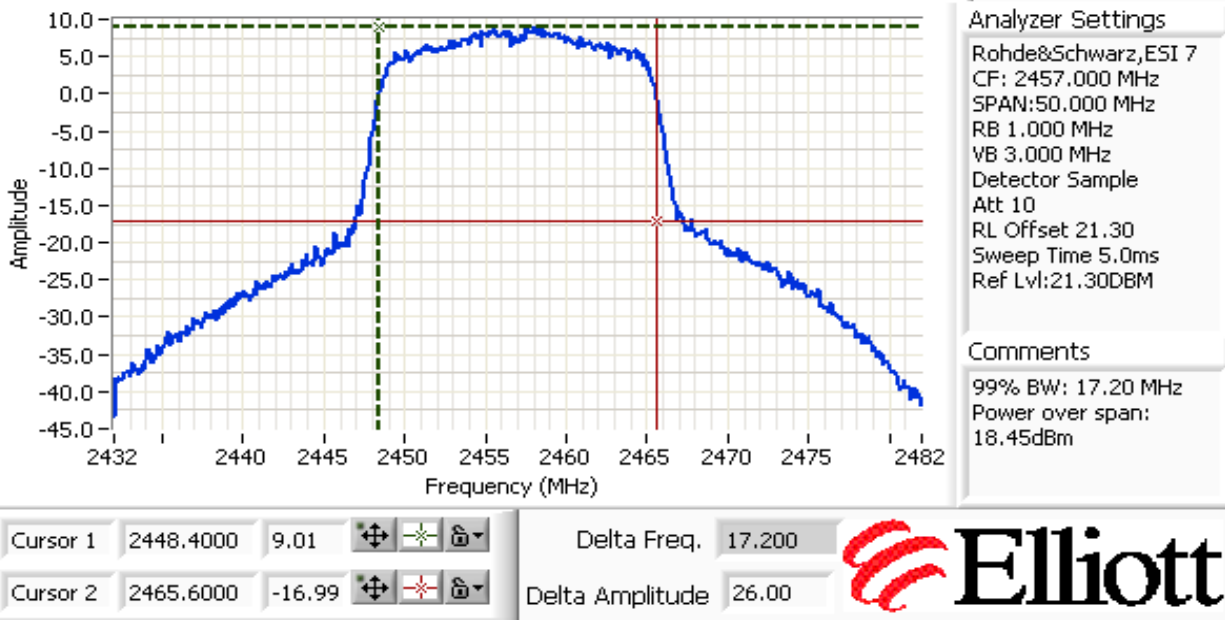


Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A

**Run #2: Power spectral Density**

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) <sup>Note 1</sup>		
16.0	2412.8233	-6.2	8.0	Pass
19.0	2436.7504	-3.4	8.0	Pass
16.5	2461.7511	-5.7	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

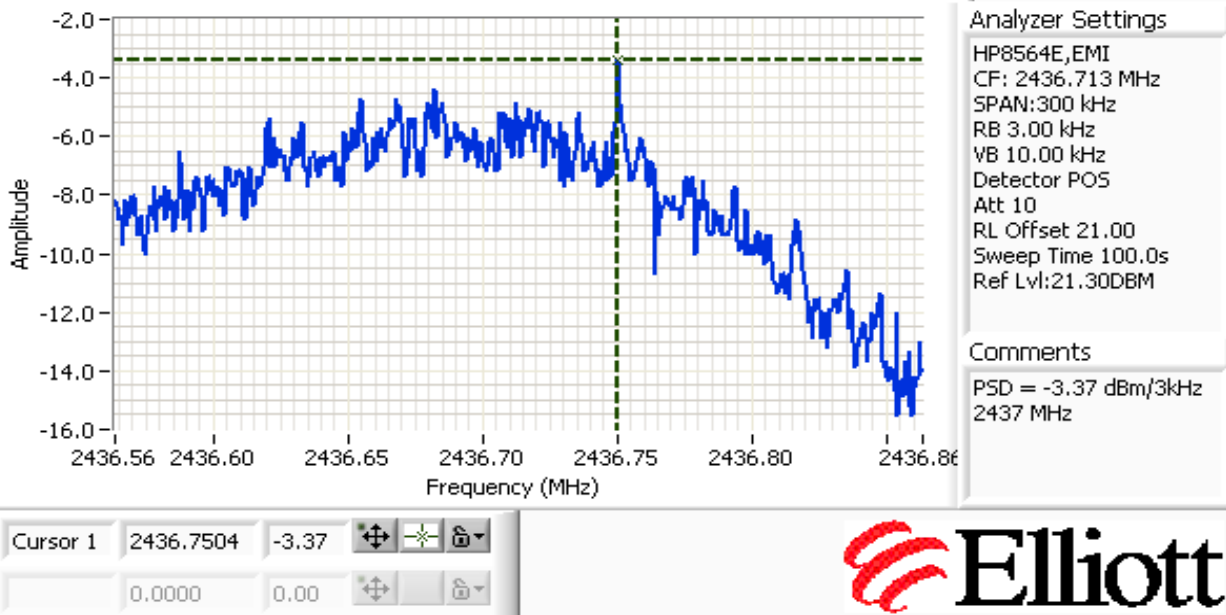

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100 kHz	15.8	17.1
-	2437	100 kHz	15.3	17.2
-	2462	100 kHz	15.3	17.1

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB



**Analyzer Settings**

HP8564E,EMI  
 CF: 2437.000 MHz  
 SPAN:50.000 MHz  
 RB 100 kHz  
 VB 100 kHz  
 Detector Normal  
 Att 10  
 RL Offset 21.00  
 Sweep Time 50.0ms  
 Ref Lvl:21.30DBM

---

**Comments**


6dB BW: 15.25 MHz

Cursor 1	2445.0000	8.30	
Cursor 2	2429.7500	2.30	

Delta Freq. 15.250  
Delta Amplitude 6.00



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

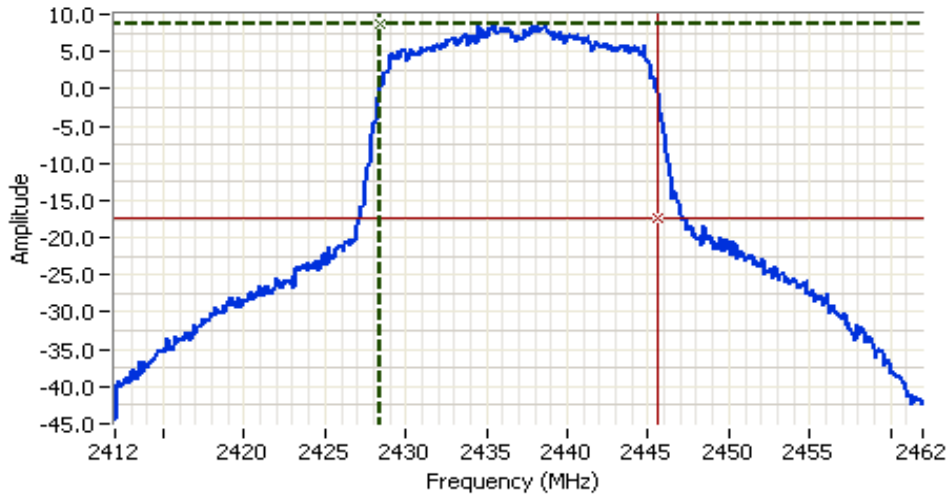

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2437.000 MHz  
 SPAN: 50.000 MHz  
 RB 1.000 MHz  
 VB 3.000 MHz  
 Detector Sample  
 Att 10  
 RL Offset 21.30  
 Sweep Time 5.0ms  
 Ref Lvl: 21.30DBM

**Comments**

99% BW: 17.20 MHz  
 Power over span:  
 18.14dBm

Cursor 1	2428.4000	8.61	+	-	+	-
Cursor 2	2445.6000	-17.39	+	-	+	-

Delta Freq. 17.200

Delta Amplitude 26.00



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A


**Run #4: Out of Band Spurious Emissions**

Note: All plots were taken with RBW=VBW=100kHz


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

Plots for low channel

Out of Band Spurious Emissions @ 2412 MHz, 802.11g, BE

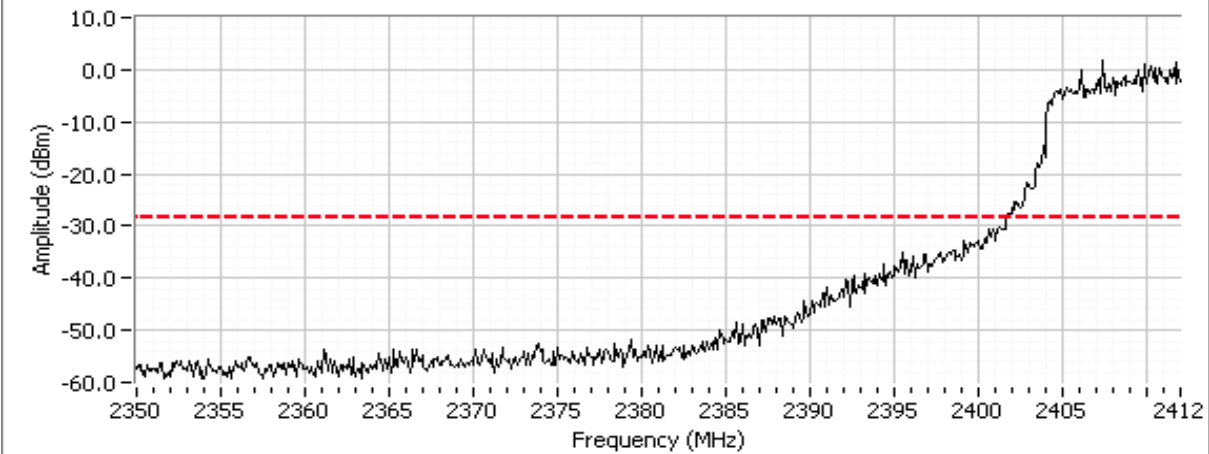


Out of Band Spurious Emissions @ 2412 MHz, 802.11g

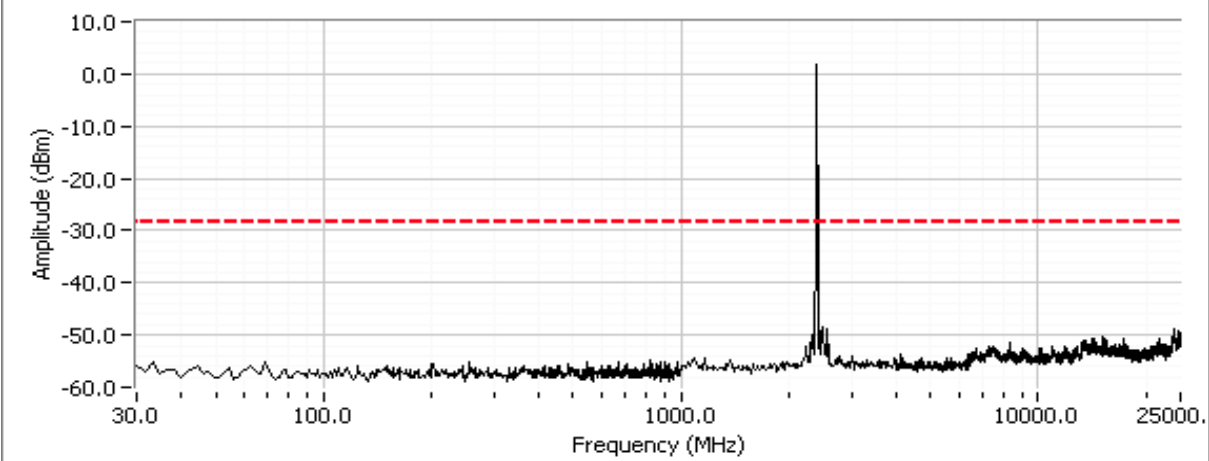

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A



Plots for center channel

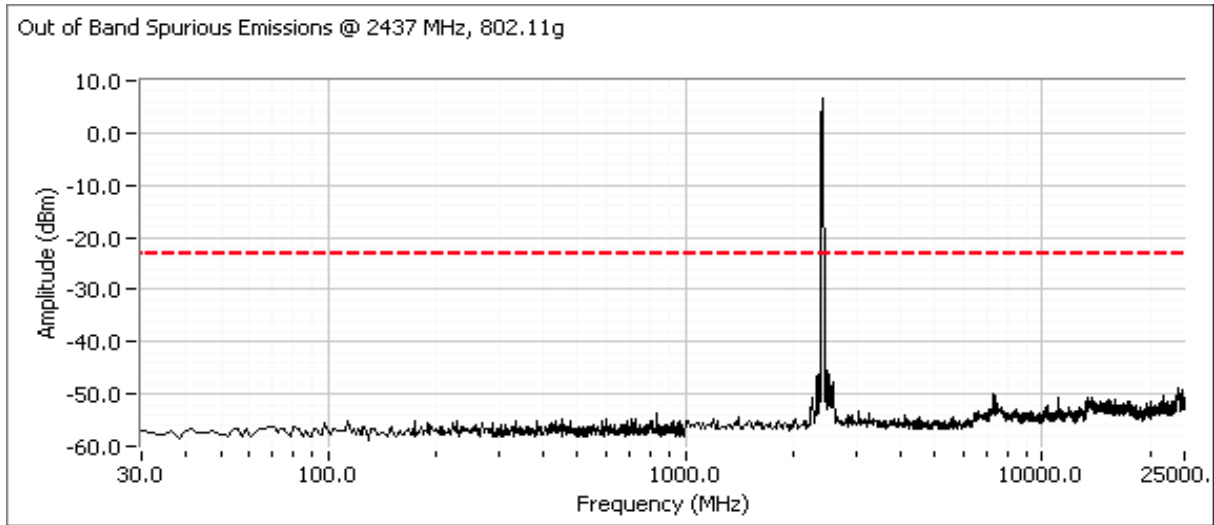



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A

Plots for high channel

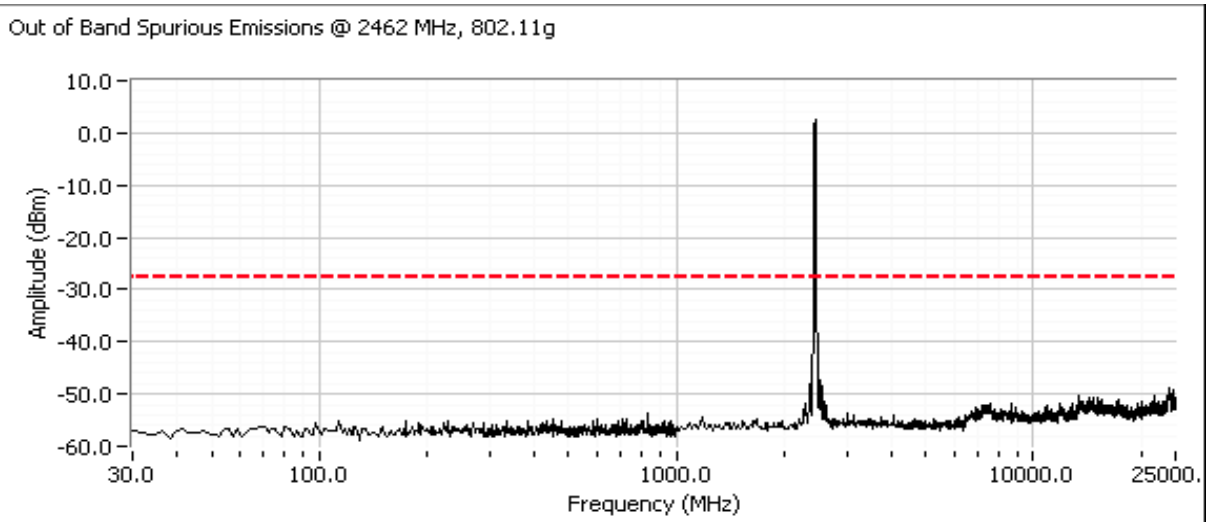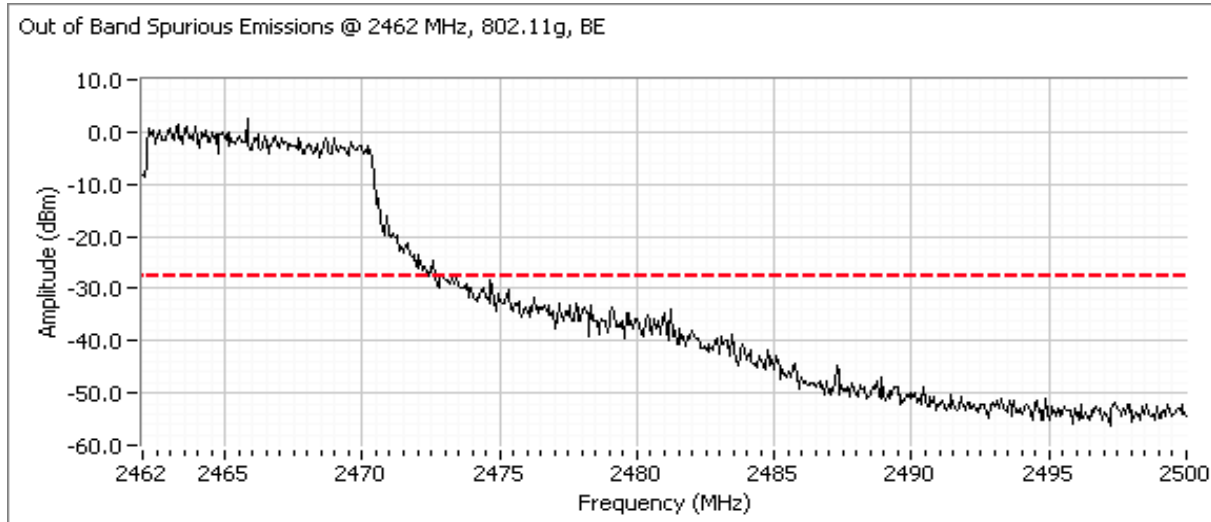

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
		Account Manager:	Dean Eriksen
Contact:	Jerry Chan		
Standard:	FCC Part 15, RSS 210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements  
Power, PSD, Bandwidth and Spurious Emissions  
(802.11 B Mode)**

**Test Specific Details**

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 7/26/2009  
 Test Engineer: Rafael Varelas  
 Test Location: FT Chamber #4

Config. Used: -  
 Config Change: -  
 Host Unit Voltage 120V/ 60Hz

**General Test Configuration**

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

**Ambient Conditions:**

Temperature: 21.6 °C  
 Rel. Humidity: 42 %

**Summary of Results**

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	19.1 dBm (82mW) 19.5 dBm EIRP
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	0.1 dBm/3KHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	6.6 MHz
3	-	-	99% Bandwidth	RSS GEN	-	12 MHz
4	-	-	Spurious emissions	15.247(b)	Pass	<-30dBc

**Modifications Made During Testing**

No modifications were made to the EUT during testing

**Deviations From The Standard**

No deviations were made from the requirements of the standard.


Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A

### Run #1: Output Power

Power Setting <sup>2</sup>	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP <sup>Note 2</sup>	
		(dBm) <sup>1</sup>	mW			dBm	W
19	2412	19.1	82.0	0.40	Pass	19.5	0.090
19	2437	18.6	71.6	0.40	Pass	19.0	0.079
19	2462	19.1	81.3	0.40	Pass	19.5	0.089

Note 1: RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was not continuous but the ESI analyzer was configured with a gated sweep such that the analyzer was only sweeping when the device was transmitting) and power integration over 30? MHz. **Spurious limit is -30dBc because this method was used.**

Note 2: Power setting - the software power setting used during testing, included for reference only.

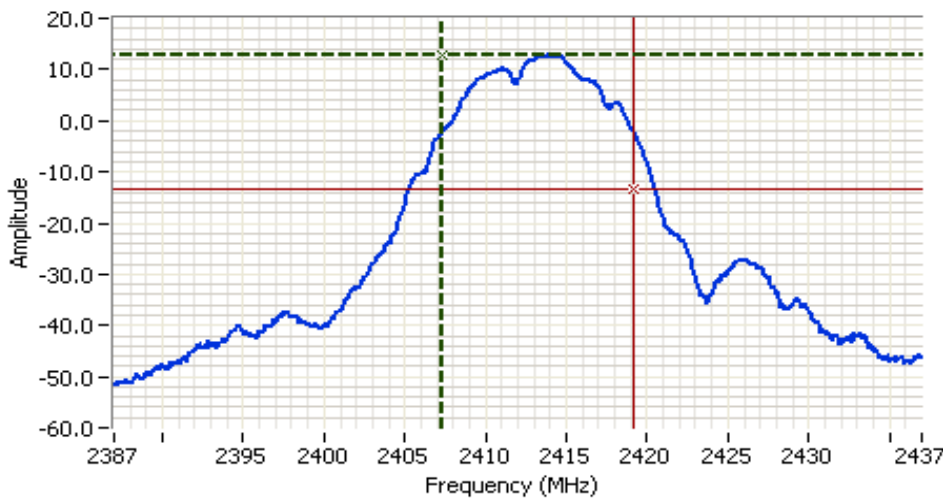

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2412.000 MHz  
 SPAN: 50.000 MHz  
 RB 1.000 MHz  
 VB 3.000 MHz  
 Detector Sample  
 Att 10  
 RL Offset 21.30  
 Sweep Time 5.0ms  
 Ref Lvl: 21.30DBM

**Comments**

99% BW: 11.80 MHz  
 Power over span:  
 19.14dBm

Cursor 1	2407.3000	12.79	↕	↔	⏏
Cursor 2	2419.1000	-13.21	↕	↔	⏏

Delta Freq. 11.800  
 Delta Amplitude 26.00




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A

**Run #2: Power spectral Density**

Power Setting	Frequency (MHz)	PSD	Limit dBm/3kHz	Result
		(dBm/3kHz) <small>Note 1</small>		
19	2412.7821	0.1	8.0	Pass
19	2436.2207	-1.0	8.0	Pass
19	2462.7809	-0.2	8.0	Pass

Note 1: Power spectral density measured using RB=3 kHz, VB=10kHz, analyzer with peak detector and with a sweep time set to ensure a dwell time of at least 1 second per 3kHz. The measurement is made at the frequency of PPSD determined from preliminary scans using RB=3kHz using multiple sweeps at a faster rate over the 6dB bandwidth of the signal.

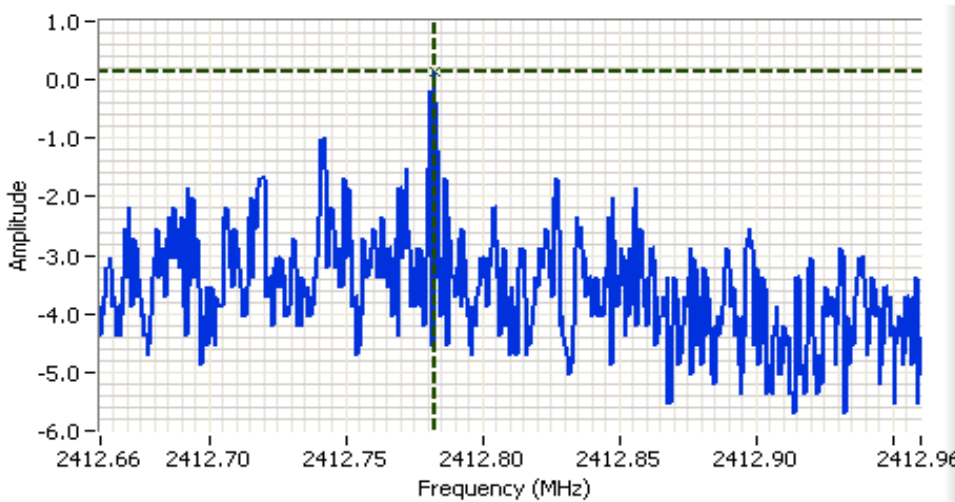

**Analyzer Settings**

HP8564E,EMI  
 CF: 2412.810 MHz  
 SPAN:300 kHz  
 RB 3.00 kHz  
 VB 10.00 kHz  
 Detector POS  
 Att 10  
 RL Offset 21.00  
 Sweep Time 100.0s  
 Ref Lvl:21.30DBM

---

**Comments**

PSD = 0.13 dBm/3kHz  
 2412 MHz

Cursor 1	2412.7821	0.13	
	0.0000	0.00	




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A

Run #3: Signal Bandwidth

Power Setting	Frequency (MHz)	Resolution Bandwidth	Bandwidth (MHz)	
			6dB	99%
-	2412	100 kHz	6.6	11.8
-	2437	100 kHz	7.2	12.0
-	2462	100 kHz	7.3	11.8

Note 1: 99% bandwidth measured in accordance with RSS GEN, with RB > 1% of the span and VB > 3xRB

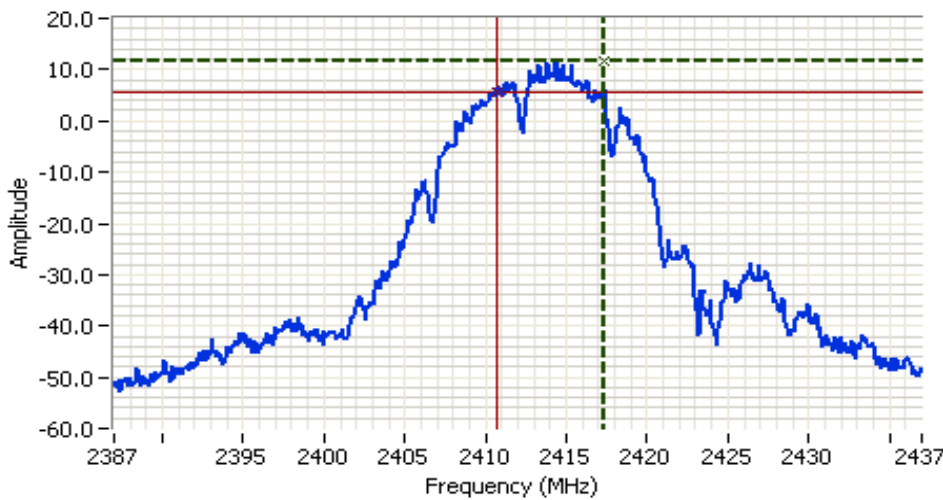

Analyzer Settings

HP8564E,EMI  
CF: 2412.000 MHz  
SPAN:50.000 MHz  
RB 100 kHz  
VB 100 kHz  
Detector Normal  
Att 10  
RL Offset 21.00  
Sweep Time 50.0ms  
Ref Lvl:21.30DBM

Comments


6dB BW: 6.58 MHz

Cursor 1	2417.3333	11.63	↕	✳	🔒
Cursor 2	2410.7500	5.63	↕	✳	🔒

Delta Freq. 6.583  
Delta Amplitude 6.00



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

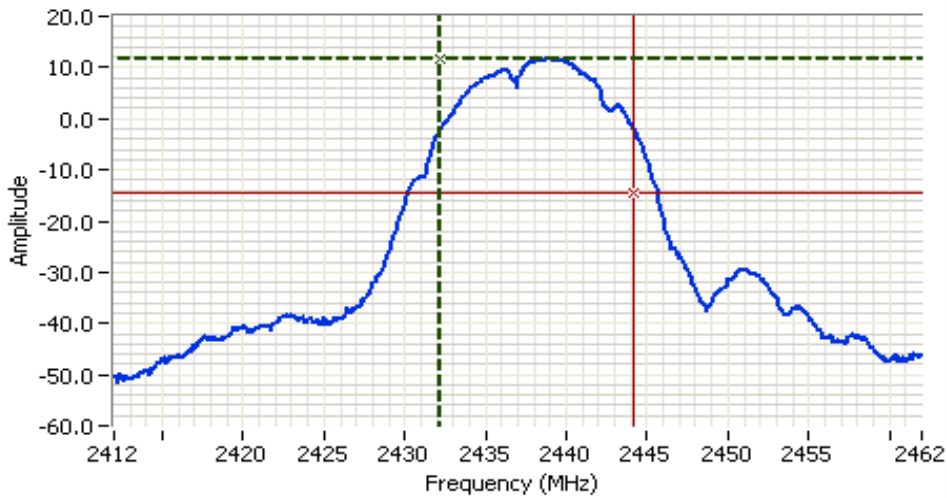

**Analyzer Settings**

Rohde&Schwarz, ESI 7  
 CF: 2437.000 MHz  
 SPAN: 50.000 MHz  
 RB 1.000 MHz  
 VB 3.000 MHz  
 Detector Sample  
 Att 10  
 RL Offset 21.30  
 Sweep Time 5.0ms  
 Ref Lvl: 21.30dBm

**Comments**

99% BW: 12.00 MHz  
 Power over span:  
 18.55dBm

Cursor 1	2432.2000	11.68	
Cursor 2	2444.2000	-14.32	

Delta Freq.	12.000
Delta Amplitude	26.00



Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: N/A


### Run #4: Out of Band Spurious Emissions

Note: All plots were taken with RBW=VBW=100kHz


Frequency (MHz)	Limit	Result
2412	-30dBc	Pass
2437	-30dBc	Pass
2462	-30dBc	Pass

#### Plots for low channel

Out of Band Spurious Emissions @ 2412 MHz, 802.11b, BE

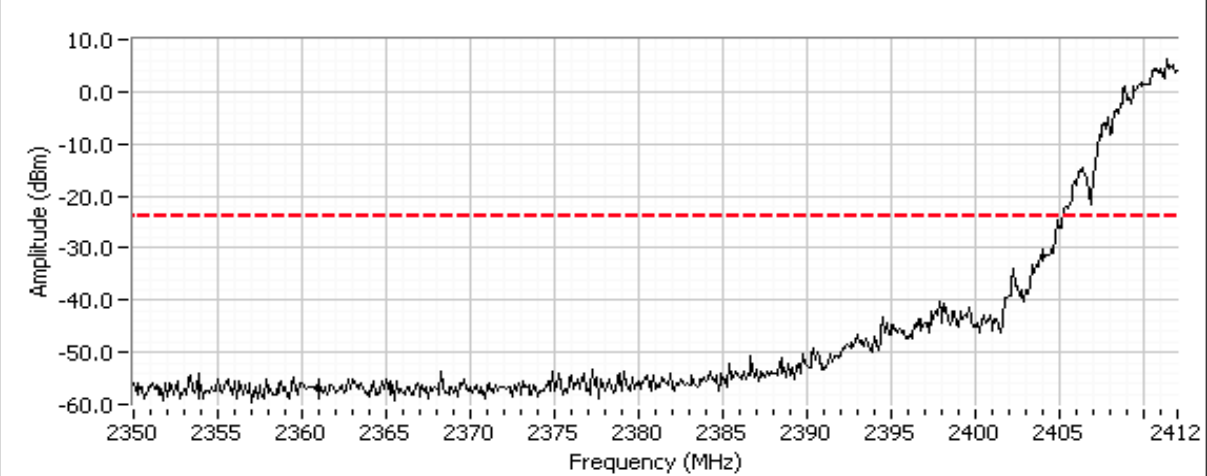


Out of Band Spurious Emissions @ 2412 MHz, 802.11b

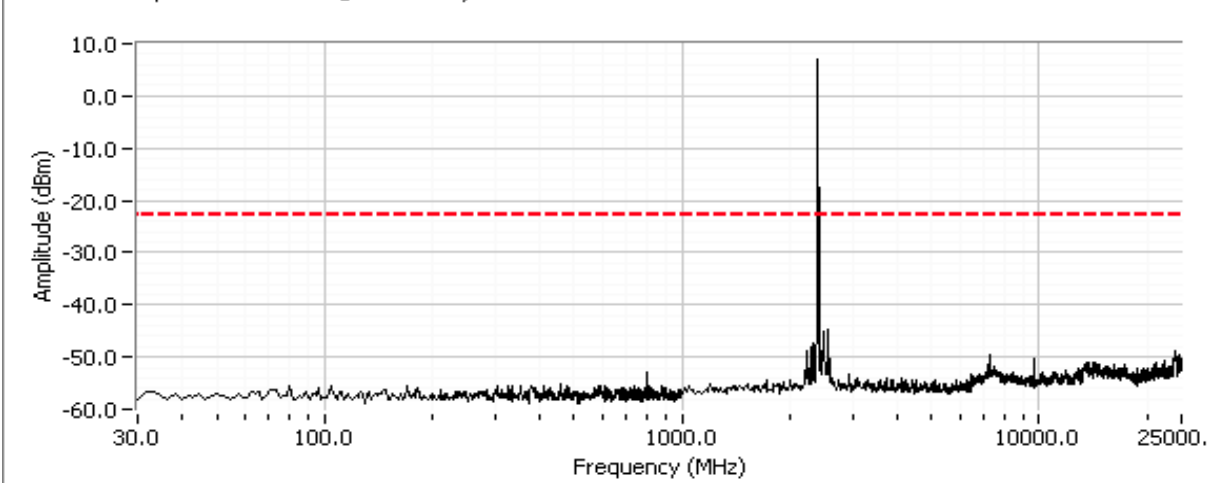

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

Plots for center channel

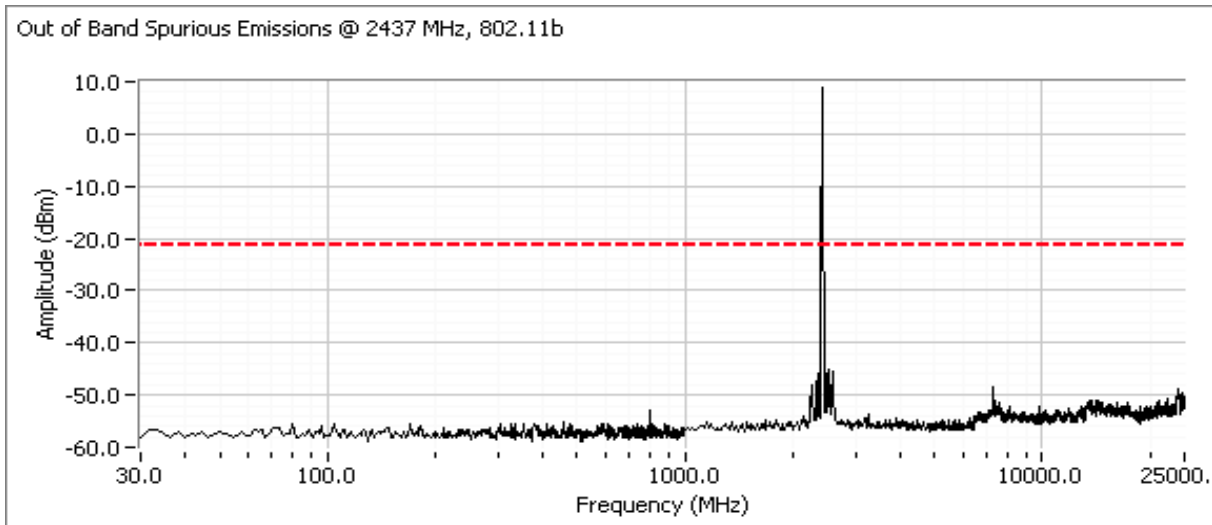




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: N/A

Plots for high channel

Out of Band Spurious Emissions @ 2462 MHz, 802.11b BE



Out of Band Spurious Emissions @ 2462 MHz, 802.11b

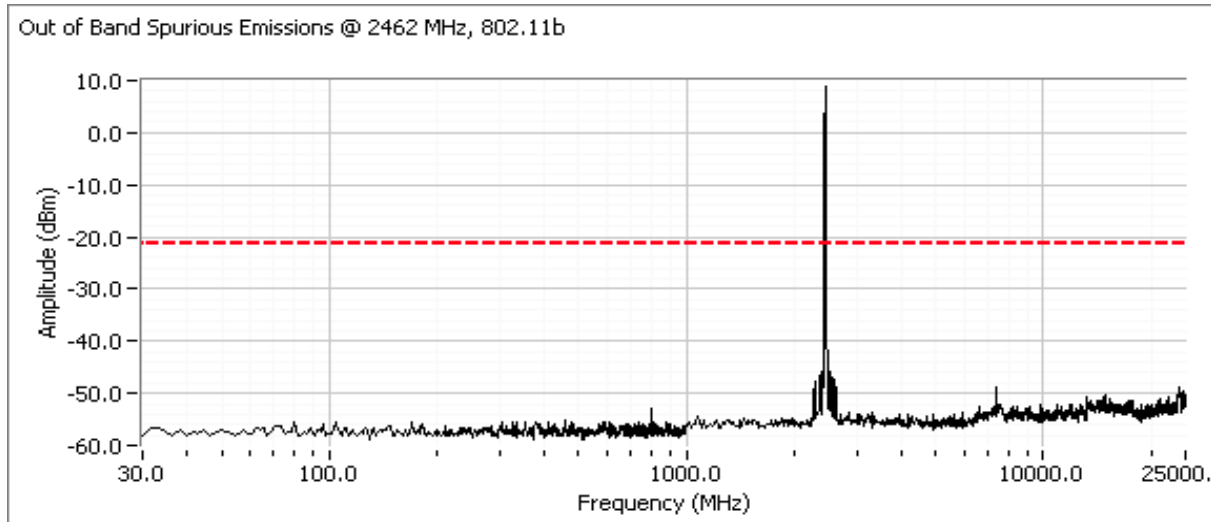




Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: B

Run #1: Maximized Readings, 1000 - 7500 MHz. 802.11b Mode  
Rx Mode on 2437 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 7500 MHz	3	3	0.0

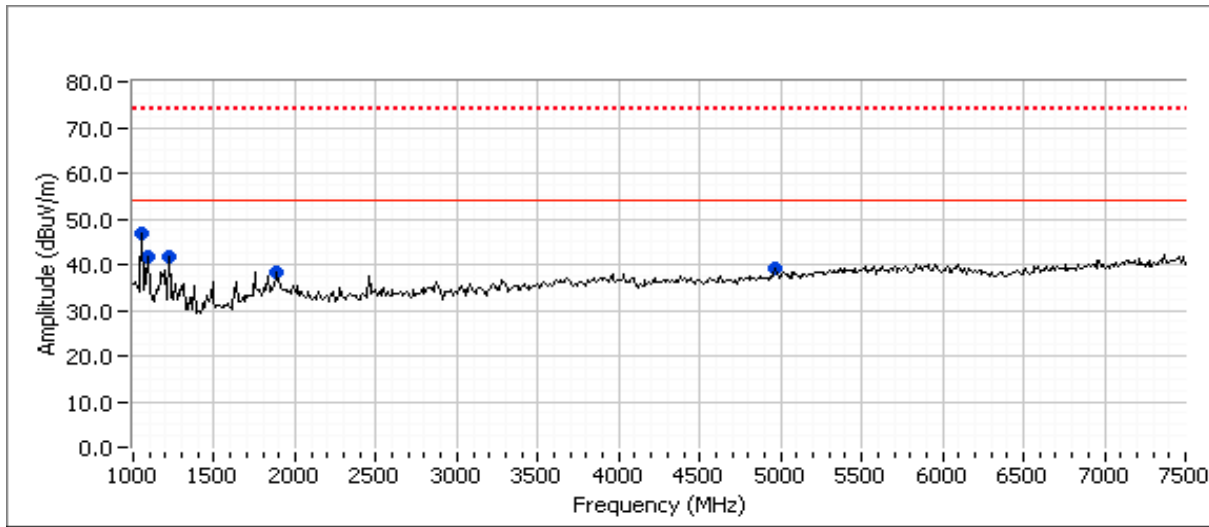

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dBuV/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1039.930	46.7	H	54.0	-7.3	Peak	148	1.0	
1039.980	41.8	V	54.0	-12.2	Peak	161	1.0	
1200.090	41.5	V	54.0	-12.5	Peak	183	1.9	
4948.060	39.2	H	54.0	-14.8	Peak	50	1.3	
1865.800	38.2	V	54.0	-15.8	Peak	129	1.9	

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Class:	B

**Final peak and average readings**


Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1039.930	45.4	H	54.0	-8.6	AVG	109	1.0	RB 1 MHz; VB: 10 Hz
1040.060	47.2	H	74.0	-26.8	PK	109	1.0	RB 1 MHz; VB: 1 MHz
1065.850	40.3	V	54.0	-13.7	AVG	161	1.1	RB 1 MHz; VB: 10 Hz
1066.830	49.1	V	74.0	-24.9	PK	161	1.1	RB 1 MHz; VB: 1 MHz
1199.160	32.7	V	54.0	-21.3	AVG	149	1.5	RB 1 MHz; VB: 10 Hz
1202.090	47.9	V	74.0	-26.1	PK	149	1.5	RB 1 MHz; VB: 1 MHz
1865.400	35.4	V	54.0	-18.6	AVG	136	1.6	RB 1 MHz; VB: 10 Hz
1867.730	45.7	V	74.0	-28.3	PK	136	1.6	RB 1 MHz; VB: 1 MHz
4939.730	33.1	H	54.0	-20.9	AVG	92	1.4	RB 1 MHz; VB: 10 Hz
4948.460	44.4	H	74.0	-29.6	PK	92	1.4	RB 1 MHz; VB: 1 MHz

Note 1: Above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
Contact: Jerry Chan	Account Manager: Dean Eriksen
Standard: FCC Part 15, RSS 210	Class: B

Run #2: Maximized Readings, 1000 - 7500 MHz. 802.11g Mode  
Rx Mode on 2437 MHz

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
1000 - 7500 MHz	3	3	0.0

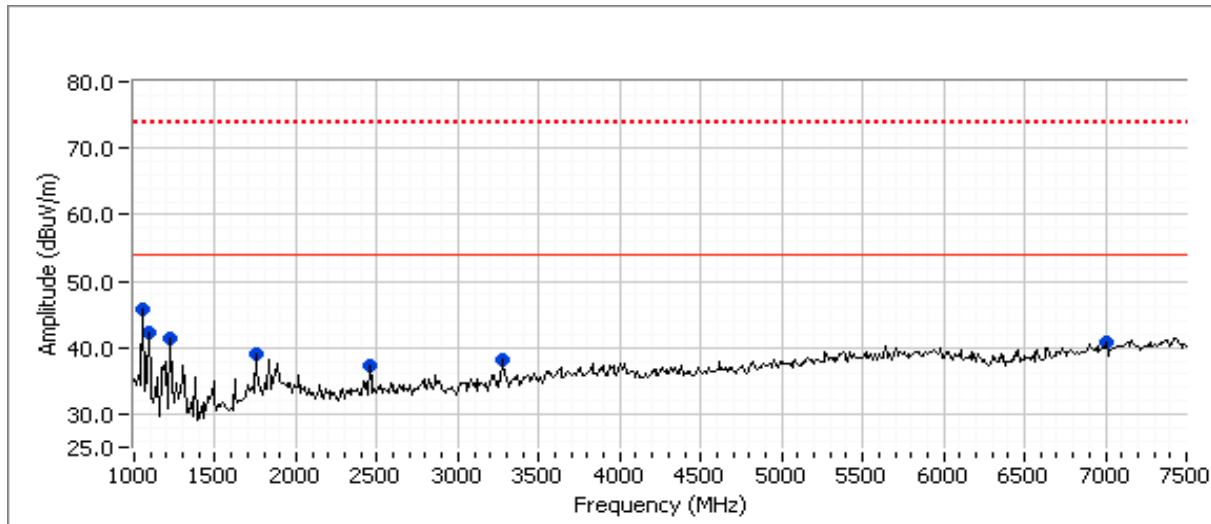

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dBµV/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1039.930	45.9	H	54.0	-8.1	Peak	151	1.0	
1039.980	42.3	V	54.0	-11.7	Peak	162	1.0	
1200.090	41.3	V	54.0	-12.7	Peak	186	1.9	
7024.020	40.8	V	54.0	-13.2	Peak	216	1.3	
1731.640	39.1	V	54.0	-14.9	Peak	136	1.6	
3249.400	38.1	V	54.0	-15.9	Peak	129	1.6	
2437.250	37.3	V	54.0	-16.7	Peak	189	1.6	

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Class:	B

**Final peak and average readings**

Frequency MHz	Level dB $\mu$ V/m	Pol v/h	FCC Class B		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1039.930	44.6	H	54.0	-9.4	AVG	155	1.0	RB 1 MHz; VB: 10 Hz
1040.000	46.9	H	74.0	-27.1	PK	155	1.0	RB 1 MHz; VB: 1 MHz
1065.750	40.6	V	54.0	-13.4	AVG	161	1.0	RB 1 MHz; VB: 10 Hz
1066.340	48.2	V	74.0	-25.8	PK	161	1.0	RB 1 MHz; VB: 1 MHz
1200.160	35.1	V	54.0	-18.9	AVG	191	1.8	RB 1 MHz; VB: 10 Hz
1201.760	51.9	V	74.0	-22.1	PK	191	1.8	RB 1 MHz; VB: 1 MHz
1732.240	33.7	V	54.0	-20.3	AVG	144	1.5	RB 1 MHz; VB: 10 Hz
1737.570	55.5	V	74.0	-18.5	PK	144	1.5	RB 1 MHz; VB: 1 MHz
3249.270	33.0	V	54.0	-21.0	AVG	97	1.2	RB 1 MHz; VB: 10 Hz
3249.200	42.6	V	74.0	-31.4	PK	97	1.2	RB 1 MHz; VB: 1 MHz
2437.050	35.5	V	54.0	-18.5	AVG	204	1.5	RB 1 MHz; VB: 10 Hz
2437.050	43.5	V	74.0	-30.5	PK	204	1.5	RB 1 MHz; VB: 1 MHz
7022.290	35.2	V	54.0	-18.8	AVG	175	1.0	RB 1 MHz; VB: 10 Hz
7015.420	47.2	V	74.0	-26.8	PK	175	1.0	RB 1 MHz; VB: 1 MHz

Note 1: Above 1 GHz, the FCC specifies the limit as an average measurement. In addition, the FCC states that the peak reading of any emission above 1 GHz, can not exceed the average limit by more than 20 dB.

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
		Account Manager:	Dean Eriksen
Contact:	Jerry Chan		
Standard:	FCC Part 15, RSS 210	Class:	B

**Conducted Emissions**

*(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

**Test Specific Details**

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 7/25/2009	Config. Used: 2
Test Engineer: Peter Sales	Config Change: None
Test Location: Fremont Chamber #4	EUT Voltage: 230V/50Hz

**General Test Configuration**

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

**Ambient Conditions:**                      Temperature:                      22 °C  
    Rel. Humidity:                      43 %

**Summary of Results**

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 230V/50Hz	EN 55022 B	Pass	47.5dBµV @ 0.282MHz (-3.3dB)
2	CE, AC Power, 110V/60Hz	EN 55022 B	Pass	44.7dBµV @ 0.272MHz (-6.4dB)

**Modifications Made During Testing**



No modifications were made to the EUT during testing

**Deviations From The Standard**

No deviations were made from the requirements of the standard.

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: B

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz

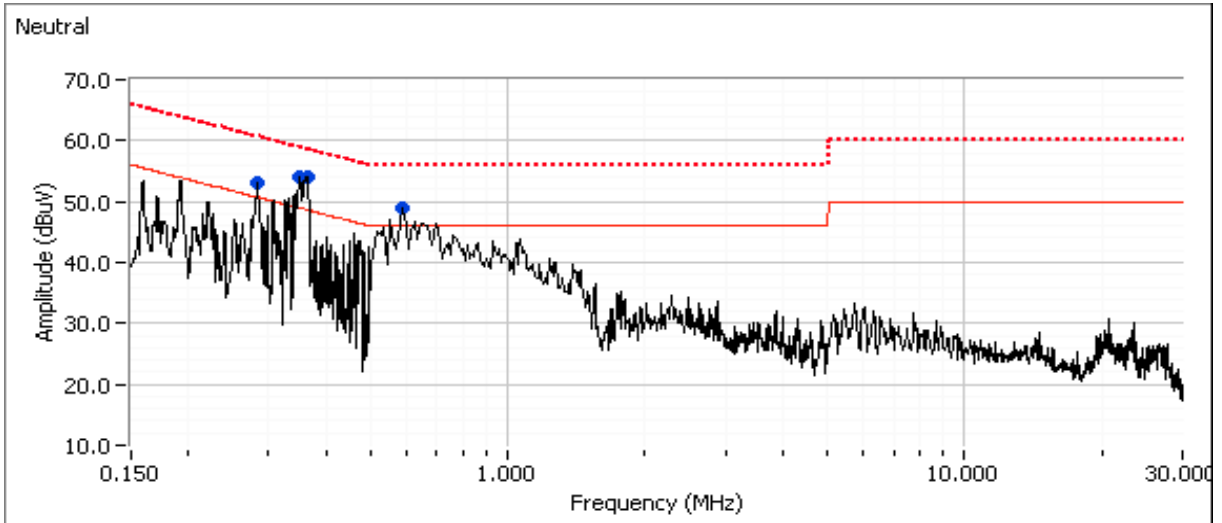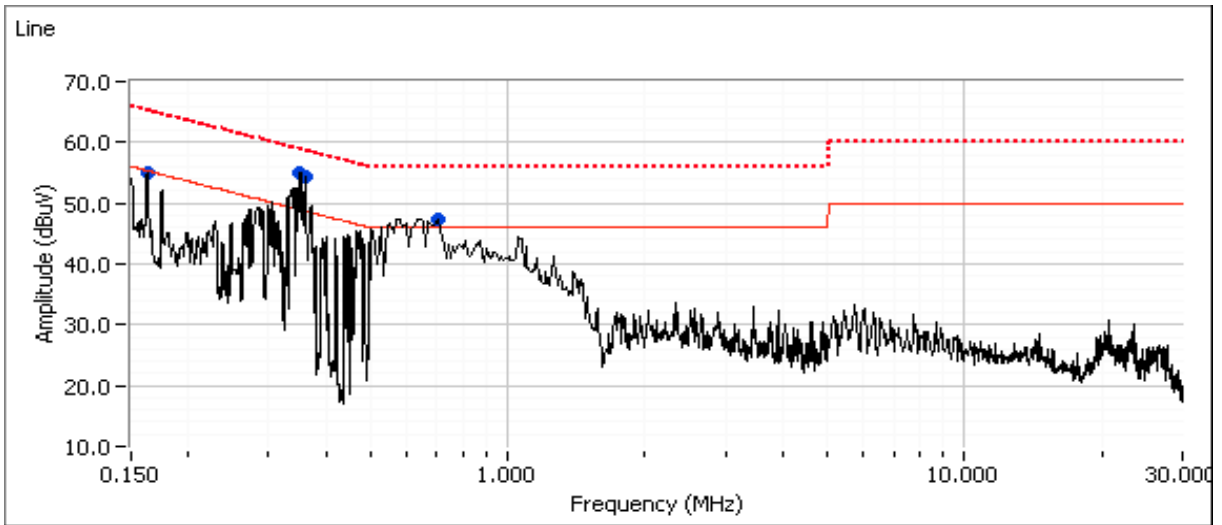

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz Continued next page...



Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Class:	B

**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**



Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Limit	Class B Margin	Detector QP/Ave	Comments
0.362	53.9	Neutral	48.6	5.3	Peak	
0.349	53.9	Neutral	49.0	4.9	Peak	
0.282	53.0	Neutral	50.7	2.3	Peak	
0.591	48.9	Neutral	46.0	2.9	Peak	
0.350	54.9	Line 1	48.9	6.0	Peak	
0.363	54.3	Line 1	48.7	5.6	Peak	
0.162	55.0	Line 1	55.3	-0.3	Peak	
0.727	47.3	Line 1	46.0	1.3	Peak	

**Final quasi-peak and average readings**

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Limit	Class B Margin	Detector QP/Ave	Comments
0.282	47.5	Neutral	50.8	-3.3	AVG	AVG (0.10s)
0.363	54.3	Line 1	58.7	-4.4	QP	QP (1.00s)
0.350	53.5	Line 1	59.0	-5.5	QP	QP (1.00s)
0.349	52.4	Neutral	59.0	-6.6	QP	QP (1.00s)
0.362	51.6	Neutral	58.7	-7.1	QP	QP (1.00s)
0.591	38.4	Neutral	46.0	-7.6	AVG	AVG (0.10s)
0.282	49.1	Neutral	60.8	-11.7	QP	QP (1.00s)
0.591	43.4	Neutral	56.0	-12.6	QP	QP (1.00s)
0.363	34.9	Line 1	48.7	-13.8	AVG	AVG (0.10s)
0.349	35.1	Neutral	49.0	-13.9	AVG	AVG (0.10s)
0.350	34.8	Line 1	49.0	-14.2	AVG	AVG (0.10s)
0.727	41.4	Line 1	56.0	-14.6	QP	QP (1.00s)
0.362	32.8	Neutral	48.7	-15.9	AVG	AVG (0.10s)
0.162	47.8	Line 1	65.4	-17.6	QP	QP (1.00s)
0.162	37.0	Line 1	55.4	-18.4	AVG	AVG (0.10s)
0.727	22.8	Line 1	46.0	-23.2	AVG	AVG (0.10s)

Client: Askey Computer Corporation	Job Number: J76020
Model: WLU6111-D69	T-Log Number: T76037
	Account Manager: Dean Eriksen
Contact: Jerry Chan	
Standard: FCC Part 15, RSS 210	Class: B

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 110V/60Hz

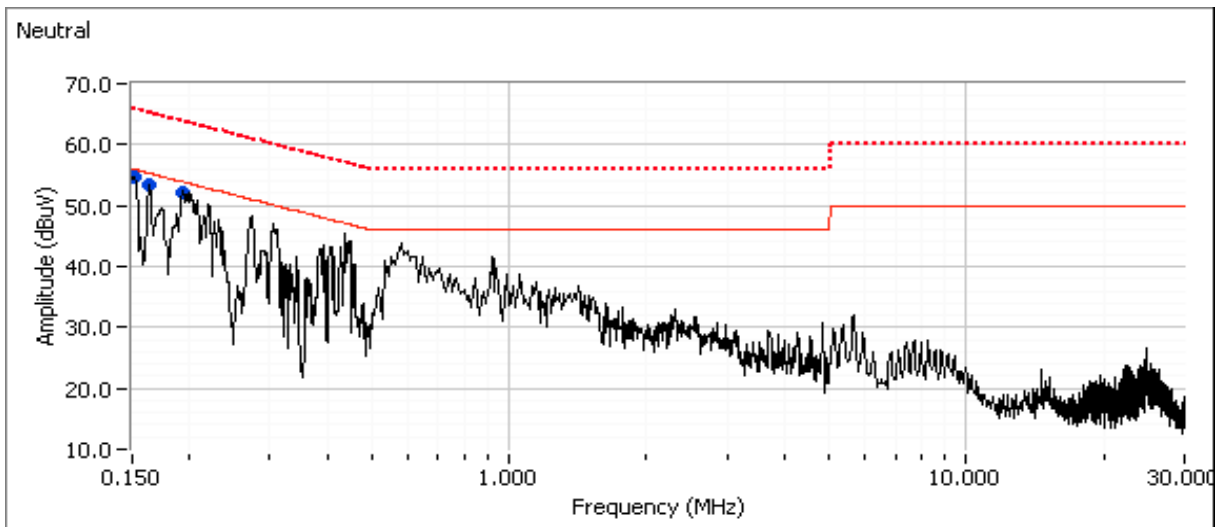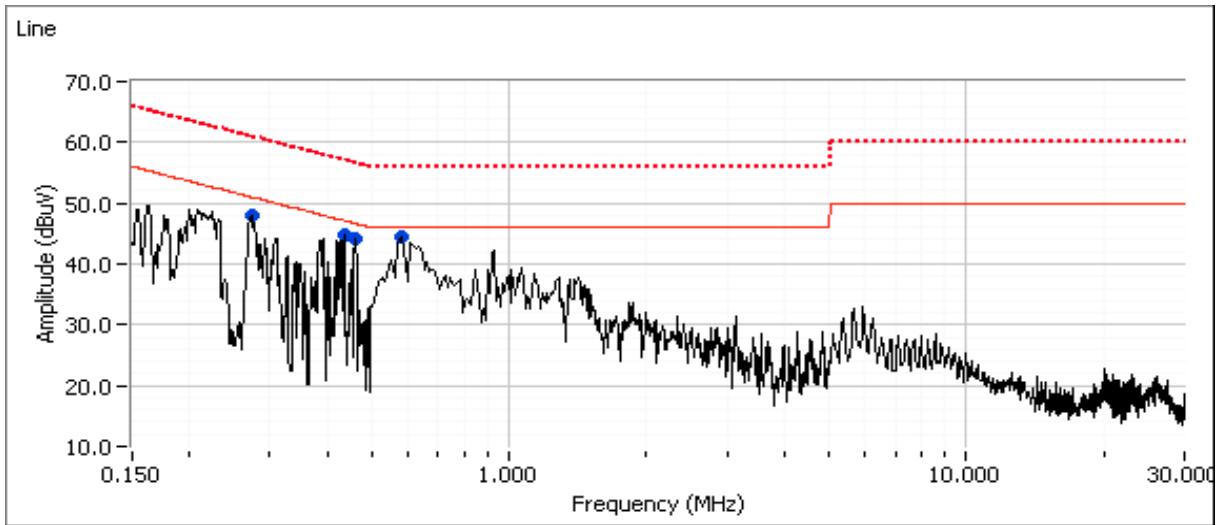

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 110V/60Hz Continued next page...

Client:	Askey Computer Corporation	Job Number:	J76020
Model:	WLU6111-D69	T-Log Number:	T76037
Contact:	Jerry Chan	Account Manager:	Dean Eriksen
Standard:	FCC Part 15, RSS 210	Class:	B

**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Limit	Class B Margin	Detector QP/Ave	Comments
0.152	54.6	Neutral	55.9	-1.3	Peak	
0.577	44.5	Line 1	46.0	-1.5	Peak	
0.195	52.2	Neutral	53.9	-1.7	Peak	
0.165	53.4	Neutral	55.3	-1.9	Peak	
0.439	44.7	Line 1	47.1	-2.4	Peak	
0.462	44.1	Line 1	46.7	-2.6	Peak	
0.272	47.9	Line 1	51.0	-3.1	Peak	

**Final quasi-peak and average readings**

Frequency MHz	Level dB $\mu$ V	AC Line	EN 55022 Limit	Class B Margin	Detector QP/Ave	Comments
0.272	44.7	Line 1	51.1	-6.4	AVG	AVG (0.10s)
0.577	37.7	Line 1	46.0	-8.3	AVG	AVG (0.10s)
0.577	44.9	Line 1	56.0	-11.1	QP	QP (1.00s)
0.462	43.7	Line 1	56.7	-13.0	QP	QP (1.00s)
0.272	47.5	Line 1	61.1	-13.6	QP	QP (1.00s)
0.152	52.1	Neutral	65.9	-13.8	QP	QP (1.00s)
0.438	43.0	Line 1	57.1	-14.1	QP	QP (1.00s)
0.165	50.0	Neutral	65.2	-15.2	QP	QP (1.00s)
0.195	48.0	Neutral	63.8	-15.8	QP	QP (1.00s)
0.195	37.0	Neutral	53.8	-16.8	AVG	AVG (0.10s)
0.165	37.4	Neutral	55.2	-17.8	AVG	AVG (0.10s)
0.152	37.1	Neutral	55.9	-18.8	AVG	AVG (0.10s)
0.438	26.3	Line 1	47.1	-20.8	AVG	AVG (0.10s)
0.462	22.6	Line 1	46.7	-24.1	AVG	AVG (0.10s)

## *Appendix C Photographs of Test Configurations*

Uploaded as a separate exhibit

## ***Appendix D Proposed FCC ID Label & Label Location***

Uploaded as a separate exhibit

## *Appendix E Detailed Photographs*

Uploaded as a separate exhibit

## *Appendix F Operator's Manual*

Uploaded as a separate exhibit

## *Appendix G Block Diagram*

Uploaded as a separate exhibit



## *Appendix H Schematic Diagrams*

Uploaded as a separate exhibit

## *Appendix I Theory of Operation*

Uploaded as a separate exhibit

## *Appendix J RF Exposure Information*

Uploaded as a separate exhibit