



FCC RF Test Report

APPLICANT : ASKEY COMPUTER CORPORATION
EQUIPMENT : WAN Module
BRAND NAME : ASKEY
MODEL NAME : WHDHQ10
FCC ID : H8N-WWH0011
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
WCDMA Band V : 826.4 ~ 846.6 MHz /
871.4 ~ 891.6 MHz
WCDMA Band II : 1852.4 ~ 1907.6 MHz /
1932.4 ~ 1987.6 MHz
CDMA2000 BC0 : 824.70 ~ 848.31 MHz /
869.70 ~ 893.31 MHz
CDMA2000 BC1 : 1851.25 ~ 1908.75 MHz /
1931.25 ~ 1988.75 MHz
MAX. ERP/EIRP POWER : GSM850 (GPRS 8) : 1.40 W
GSM850 (EDGE 8) : 0.36 W
GSM1900 (GPRS 8) : 0.46 W
GSM1900 (EDGE 8) : 0.23 W
WCDMA Band V (RMC 12.2Kbps) : 0.14 W
WCDMA Band II (RMC 12.2Kbps) : 0.16 W
CDMA2000 BC0 : 0.15 W
CDMA2000 BC1 : 0.20 W



The product was received on Oct. 05, 2011 and completely tested on Oct. 18, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 4
SUMMARY OF TEST RESULT 5
1 GENERAL DESCRIPTION 6
1.1 Applicant..... 6
1.2 Manufacturer 6
1.3 Feature of Equipment Under Test..... 7
1.4 Emission Designator and Maximum ERP/EIRP Power 8
1.5 Testing Site..... 8
1.6 Applied Standards 8
1.7 Ancillary Equipment List 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode..... 10
2.2 Connection Diagram of Test System 12
3 TEST RESULT 13
3.1 Conducted Output Power Measurement 13
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 16
3.3 Occupied Bandwidth Measurement 22
3.4 Band Edge Measurement..... 31
3.5 Conducted Emission Measurement 40
3.6 Field Strength of Spurious Radiation Measurement 61
3.7 Frequency Stability Measurement..... 79
4 LIST OF MEASURING EQUIPMENT 88
5 UNCERTAINTY OF EVALUATION 89
APPENDIX A. PHOTOGRAPHS OF EUT
APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 16.33 dB at 3760.00 MHz
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

ASKEY COMPUTER CORPORATION

10F., No. 119, Chienkang Rd., Chung-Ho, Taiwan, R.O.C.

1.2 Manufacturer

1. ASKEY COMPUTER CORPORATION

10F., No. 119, Chienkang Rd., Chung-Ho, Taiwan, R.O.C.

2. ASKEY TECHNOLOGY (JIANG SU) LTD.

No. 1388, Jiao Tong Road, Wujiang Economic-Technological Development Area, Jiangsu Province, P.R. China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WAN Module
Brand Name	ASKEY
Model Name	WHDHQ10
FCC ID	H8N-WWH0011
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 32.84 dBm GSM1900 : 29.66 dBm WCDMA Band V : 22.39 dBm WCDMA Band II : 22.08 dBm CDMA2000 BC0 : 23.02 dBm CDMA2000 BC1 : 22.29 dBm
Antenna Type	Band 850 : Fixed External Antenna with gain 2.18 dBi Band 1900 : Fixed External Antenna with gain 2.3 dBi
HW Version	1.0
SW Version	V0.4.01
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) CDMA2000 : QPSK
EUT Stage	Identical Prototype

Remark:

1. For other wireless features of this EUT, the test report will be issued separately.
2. This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Emission Designator and Maximum ERP/EIRP Power

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	GSM850	GPRS 8	246KGXW	1.40 W
Part 22	GSM850	EDGE 8	240KG7W	0.36 W
Part 22	WCDMA Band V	RMC 12.2Kbps	4M16F9W	0.14 W
Part 22	CDMA2000 BC0	1xEV-DO Rev. A	1M27F9W	0.15 W
Part 24	GSM1900	GPRS 8	244KGXW	0.46 W
Part 24	GSM1900	EDGE 8	248KG7W	0.23 W
Part 24	WCDMA Band II	RMC 12.2Kbps	4M16F9W	0.16 W
Part 24	CDMA2000 BC1	1xEV-DO Rev. 0	1M27F9W	0.20 W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.



1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPC-60300	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V and CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II and CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link 	<ul style="list-style-type: none"> ■ GPRS 8 Link ■ EDGE 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
CDMA2000 BC0	<ul style="list-style-type: none"> ■ 1xEV-DO Rev. A Link Mode 	<ul style="list-style-type: none"> ■ 1xEV-DO Rev. A Link Mode
CDMA2000 BC1	<ul style="list-style-type: none"> ■ 1xEV-DO Rev. 0 Link Mode 	<ul style="list-style-type: none"> ■ 1xEV-DO Rev. 0 Link Mode

Note: The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band II, 1xEVDO RETAP 12288K mode for CDMA2000 BC0 and 1xEVDO RTAP 153.6K mode for CDMA2000 BC1 on QPSK Link, only these modes were used for all tests.




The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8	32.84	32.53	32.51	29.55	29.66	29.43
GPRS 10	32.58	32.32	32.37	29.26	29.47	29.31
GPRS 12	27.90	28.06	27.98	28.13	28.52	28.63
EGPRS 8	25.95	25.97	26.16	26.15	26.52	26.21
EGPRS 10	25.77	25.78	25.96	25.89	26.24	25.94
EGPRS 12	25.86	25.98	25.89	24.87	25.30	25.42

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.11	22.22	22.39	21.88	22.08	21.89
HSDPA Subtest-1	21.64	21.76	22.01	21.39	21.47	21.47
HSDPA Subtest-2	21.76	21.70	21.88	21.41	21.48	21.48
HSDPA Subtest-3	21.16	21.24	21.46	20.92	20.99	21.05
HSDPA Subtest-4	21.10	21.26	21.37	21.08	20.97	21.10
HSUPA Subtest-1	21.28	21.23	21.16	21.06	20.69	20.96
HSUPA Subtest-2	20.02	20.27	20.30	19.96	20.09	20.02
HSUPA Subtest-3	20.22	20.45	20.32	19.86	20.08	20.33
HSUPA Subtest-4	20.377	20.58	20.79	20.15	19.98	20.09
HSUPA Subtest-5	21.30	21.61	20.94	20.90	20.53	20.75

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	21.49	21.35	21.44	21.96	20.71	21.34
1xRTT RC3+SO55	21.44	21.24	21.42	22.00	20.68	21.27
1xRTT RC3+SO32	21.36	21.27	21.24	22.01	20.68	21.31
1xEVDO RTAP 9.6K	22.57	22.69	22.98	22.19	20.94	21.59
1xEVDO RTAP 38.4K	22.51	22.62	22.97	22.17	20.80	21.32
1xEVDO RTAP 153.6K	22.55	22.64	22.89	22.29	20.71	21.42
1xEVDO RETAP 128K	22.61	22.65	22.79	22.19	20.65	21.40
1xEVDO RETAP 2048K	22.55	22.75	22.89	22.16	20.34	21.32
1xEVDO RETAP 12288K	22.54	22.72	23.02	22.20	20.28	21.38

2.2 Connection Diagram of Test System

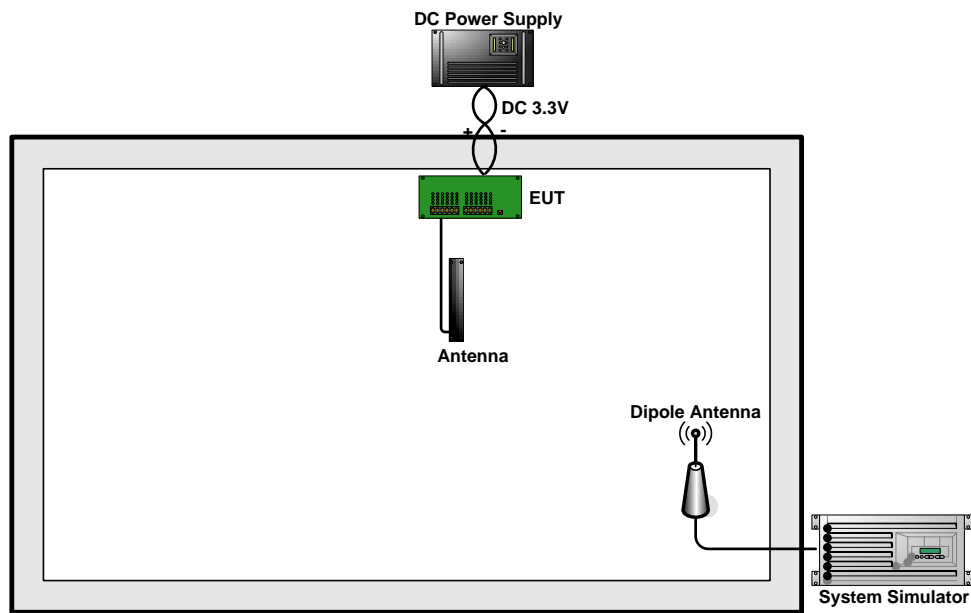

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

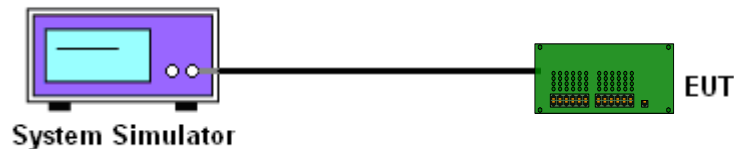



3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GPRS 8)	128 (Low)	824.2	32.84	1.92
	189 (Mid)	836.4	32.53	1.79
	251 (High)	848.8	32.51	1.78
GSM850 (EDGE 8)	128 (Low)	824.2	25.95	0.39
	189 (Mid)	836.4	25.97	0.40
	251 (High)	848.8	26.16	0.41
WCDMA Band V (RMC 12.2Kbps)	4132 (Low)	826.4	22.11	0.16
	4182 (Mid)	836.4	22.22	0.17
	4233 (High)	846.6	22.39	0.17

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GPRS 8)	512 (Low)	1850.2	29.55	0.90
	661 (Mid)	1880.0	29.66	0.92
	810 (High)	1909.8	29.43	0.88
GSM1900 (EDGE 8)	512 (Low)	1850.2	26.15	0.41
	661 (Mid)	1880.0	26.52	0.45
	810 (High)	1909.8	26.21	0.42
WCDMA Band II (RMC 12.2Kbps)	9262 (Low)	1852.4	21.88	0.15
	9400 (Mid)	1880.0	22.08	0.16
	9538 (High)	1907.6	21.89	0.15



CDMA2000 BC0					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xEV-DO Rev. A	RETAP 12288K	1013 (Low)	824.70	22.54	0.18
		384 (Mid)	836.52	22.72	0.19
		777 (High)	848.31	23.02	0.20

CDMA2000 BC1					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xEV-DO Rev. 0	RTAP 153.6K	25 (Low)	1851.25	22.29	0.17
		600 (Mid)	1880.00	20.71	0.12
		1175 (High)	1908.75	21.42	0.14



3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.2.4 Test Setup

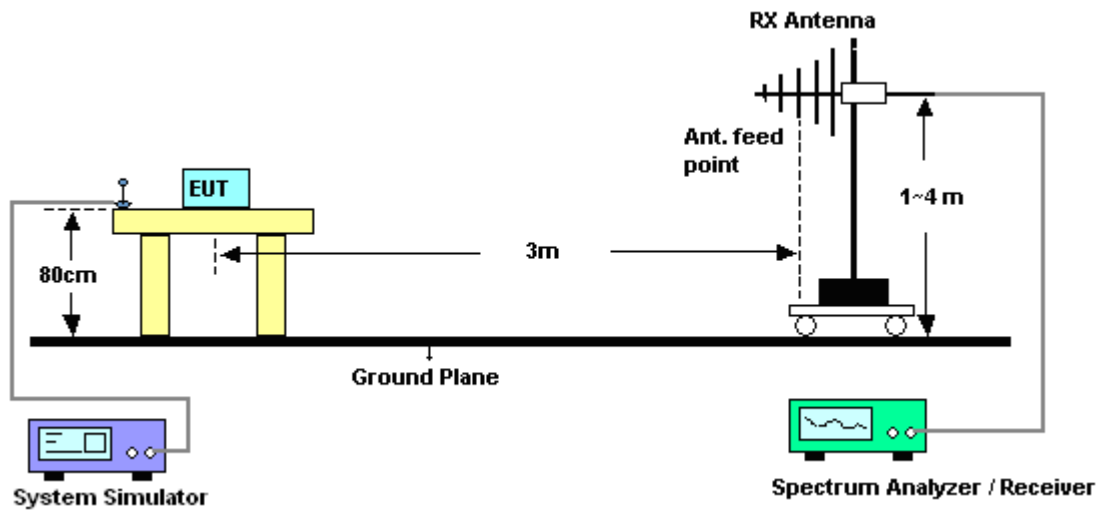

3.2.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	1.84	30.80	30.49	1.12
836.4	2.41	31.21	31.47	1.40
848.8	1.24	31.53	30.62	1.15
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-9.00	32.84	21.69	0.15
836.4	-8.71	32.85	21.99	0.16
848.8	-9.13	34.11	22.83	0.19

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-3.68	30.80	24.97	0.31
836.4	-3.53	31.21	25.53	0.36
848.8	-4.31	31.53	25.07	0.32
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-14.29	32.84	16.40	0.04
836.4	-14.20	32.85	16.50	0.04
848.8	-14.56	34.11	17.40	0.05

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-8.12	30.80	20.53	0.11
836.40	-7.63	31.21	21.43	0.14
846.60	-9.24	31.53	20.14	0.10
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-18.98	32.84	11.71	0.01
836.40	-18.73	32.85	11.97	0.02
846.60	-19.75	34.11	12.21	0.02

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

CDMA2000 BC0 1xEV-DO Rev. A_RETAP 12288K Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-8.01	30.80	20.64	0.12
836.52	-7.24	31.21	21.82	0.15
848.31	-8.81	31.53	20.57	0.11
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-18.65	32.84	12.04	0.02
836.52	-18.40	32.85	12.30	0.02
848.31	-19.58	34.11	12.38	0.02

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-28.13	41.24	13.11	0.02
1880.0	-25.98	41.46	15.48	0.04
1909.8	-25.62	41.21	15.59	0.04
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-16.85	41.52	24.67	0.29
1880.0	-16.49	43.10	26.61	0.46
1909.8	-16.92	42.73	25.81	0.38

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-31.24	41.24	10.00	0.01
1880.0	-29.10	41.46	12.36	0.02
1909.8	-29.61	41.21	11.60	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.88	41.52	21.64	0.15
1880.0	-19.45	43.10	23.65	0.23
1909.8	-19.90	42.73	22.83	0.19

* EIRP = LVL (dBm) + Correction Factor (dB)



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-32.29	41.24	8.95	0.01
1880.00	-30.56	41.46	10.90	0.01
1907.60	-29.86	41.21	11.35	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-20.62	41.52	20.90	0.12
1880.00	-20.97	43.10	22.13	0.16
1907.60	-21.43	42.73	21.30	0.13

* EIRP = LVL (dBm) + Correction Factor (dB)

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-28.21	41.24	13.03	0.02
1880.00	-28.11	41.46	13.35	0.02
1908.75	-30.05	41.21	11.16	0.01
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-20.55	41.52	20.97	0.13
1880.00	-20.00	43.10	23.10	0.20
1908.75	-22.22	42.73	20.51	0.11

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

3.3.4 Test Setup

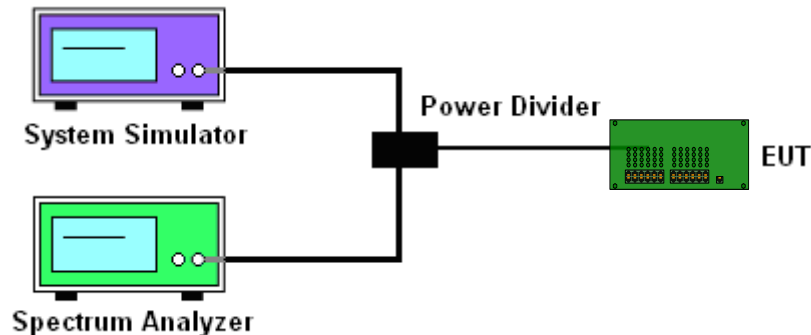




3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 189

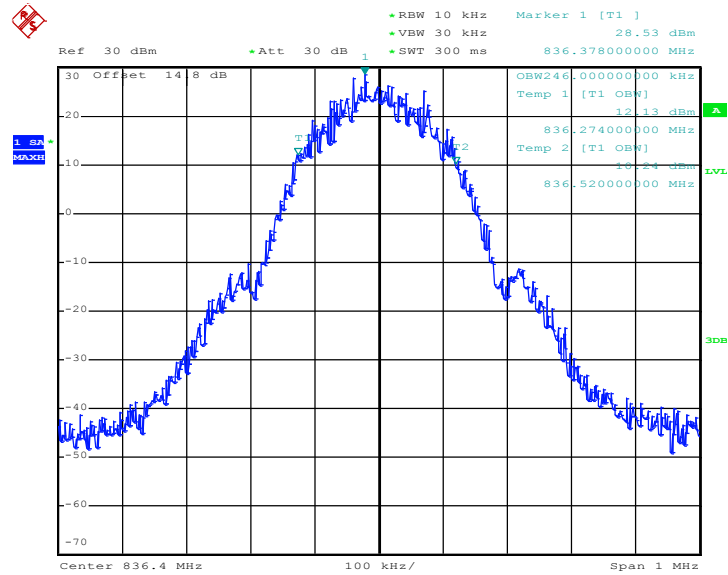

Date: 17.OCT.2011 09:53:41

26dB Bandwidth Plot on Channel 189

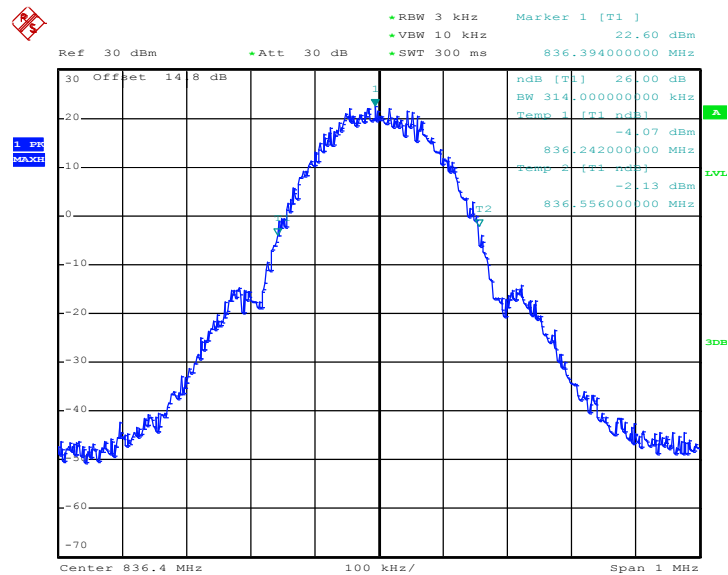


Date: 13.OCT.2011 09:41:50




Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

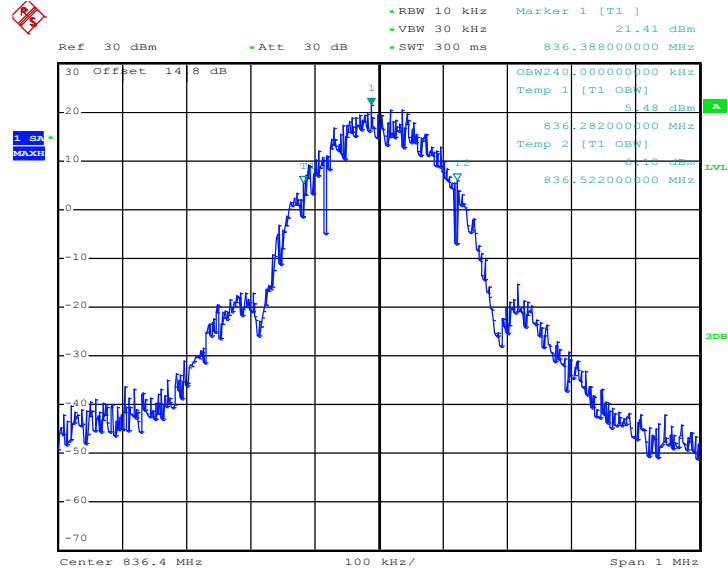

Date: 13.OCT.2011 10:45:55

26dB Bandwidth Plot on Channel 189

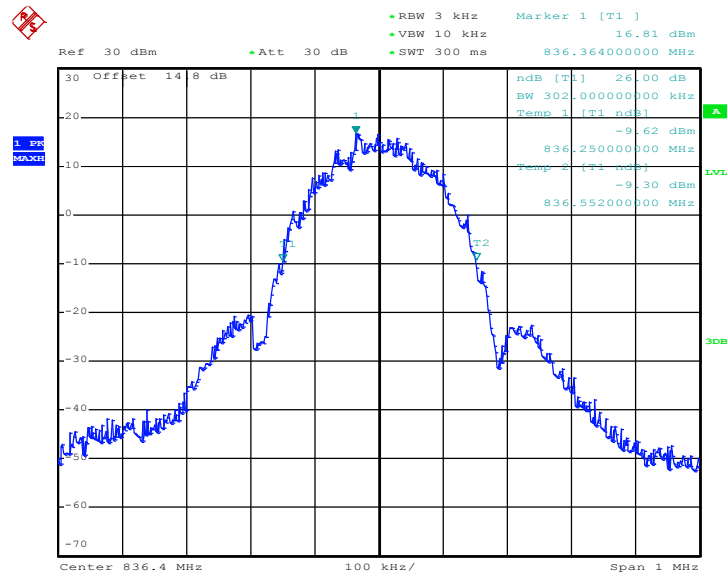


Date: 13.OCT.2011 10:44:34




Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 661

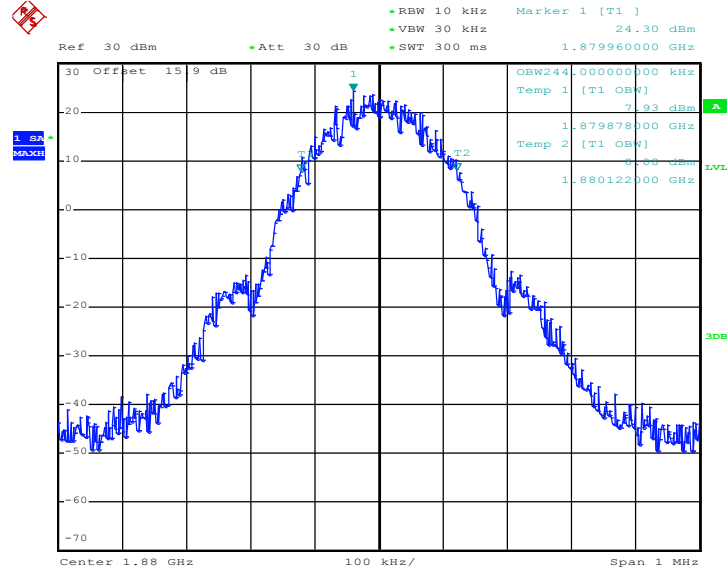

Date: 13.OCT.2011 10:08:07

26dB Bandwidth Plot on Channel 661

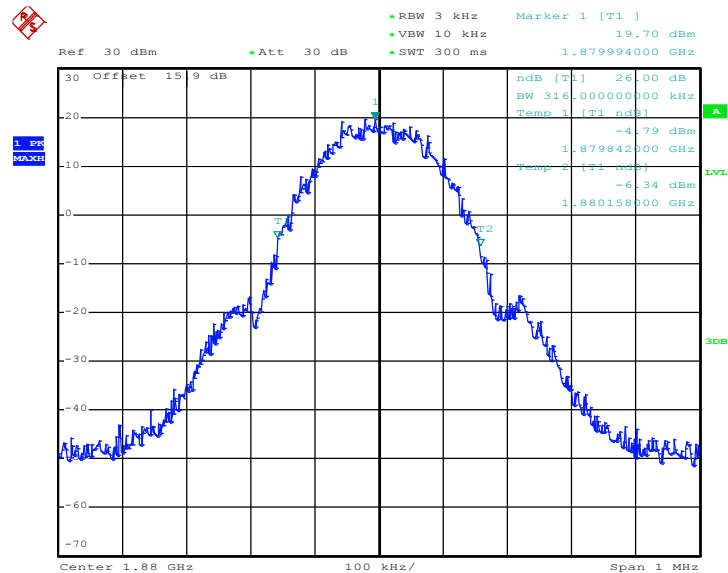


Date: 13.OCT.2011 10:06:46




Band :	GSM 1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 661

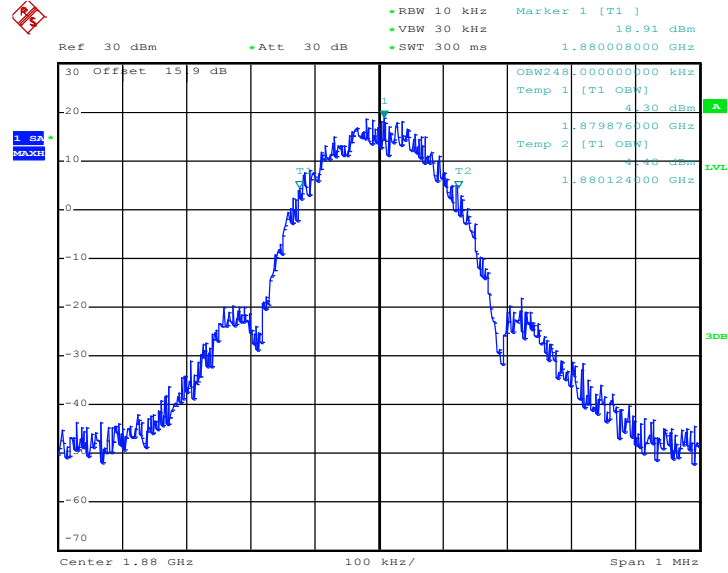

Date: 13.OCT.2011 10:24:21

26dB Bandwidth Plot on Channel 661

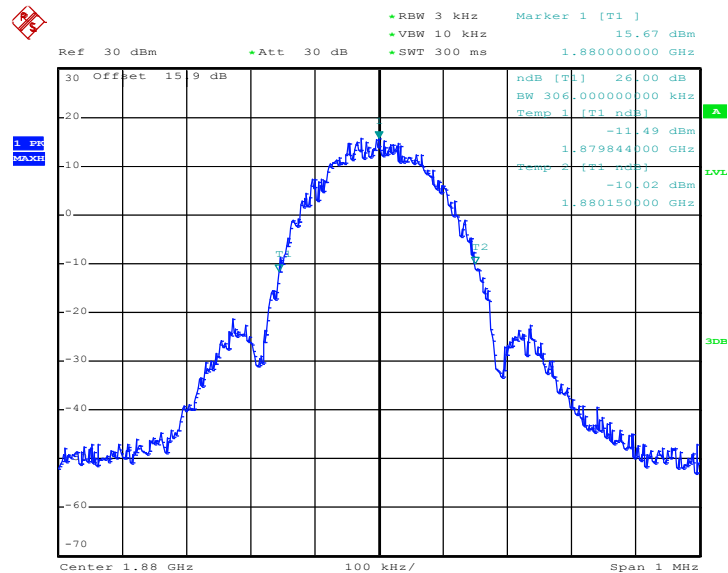


Date: 13.OCT.2011 10:23:01




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

99% Occupied Bandwidth Plot on Channel 4182

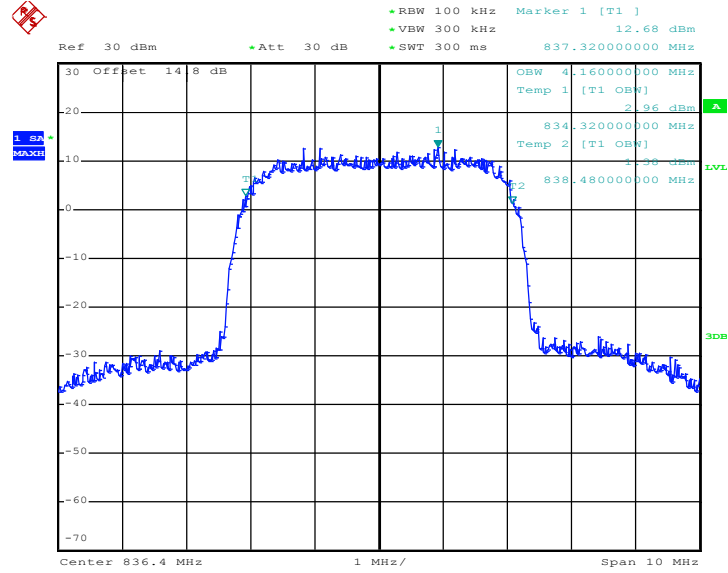

Date: 13.OCT.2011 11:13:40

26dB Bandwidth Plot on Channel 4182

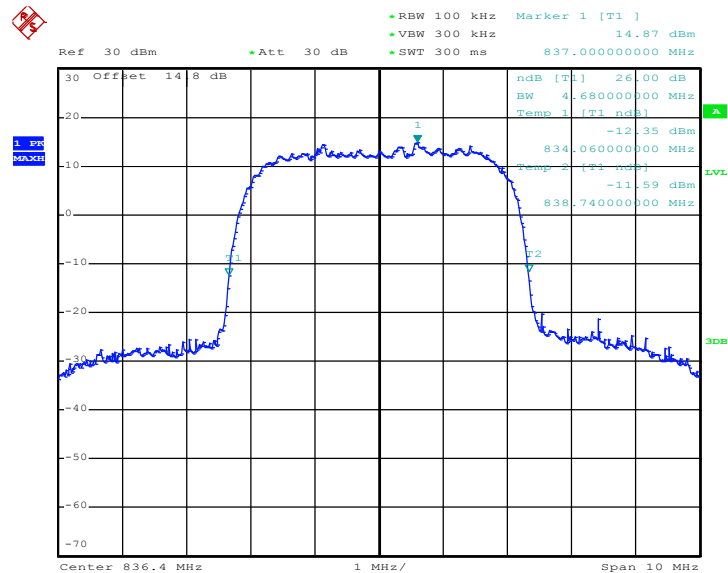


Date: 13.OCT.2011 11:12:19




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

99% Occupied Bandwidth Plot on Channel 9400

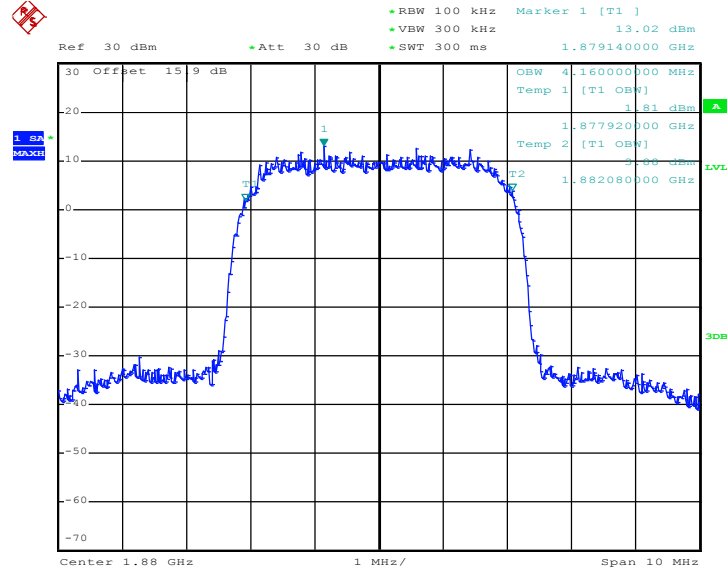

Date: 13.OCT.2011 11:03:02

26dB Bandwidth Plot on Channel 9400

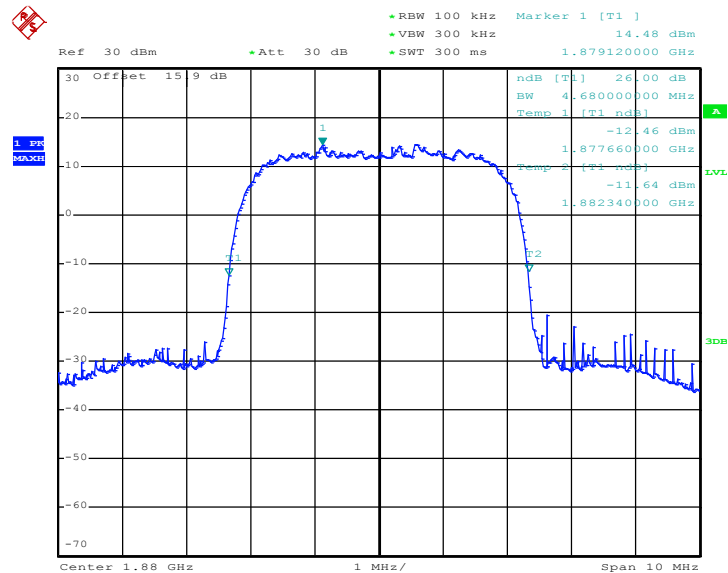


Date: 13.OCT.2011 11:01:41




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 600

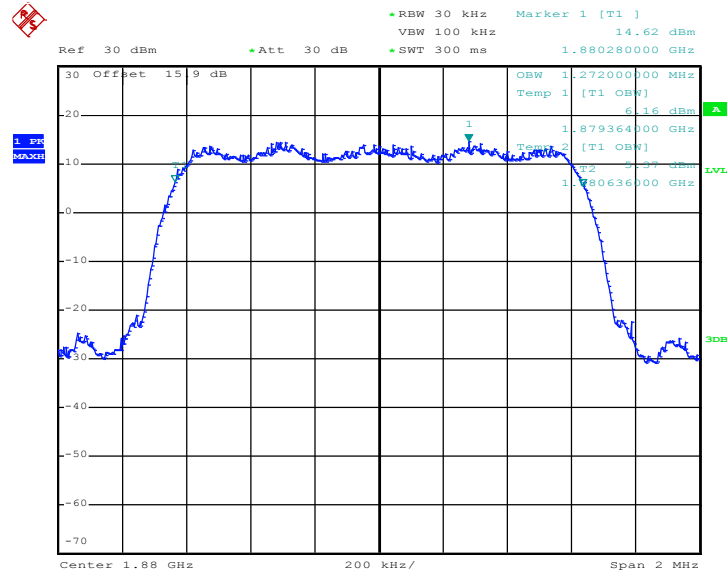

Date: 13.OCT.2011 13:46:28

26dB Bandwidth Plot on Channel 600

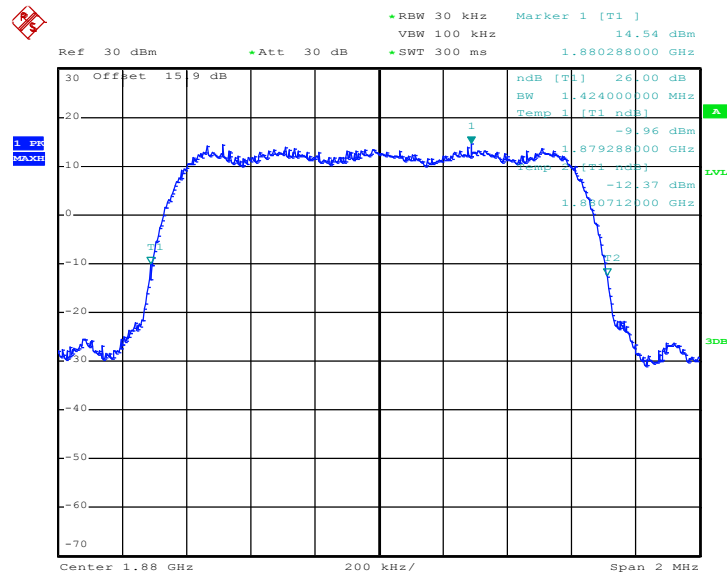

Date: 13.OCT.2011 13:42:52

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly $BW/100$.
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of $10 \log (1\% BW/\text{measurement RBW})$ was implemented.


3.4.4 Test Setup

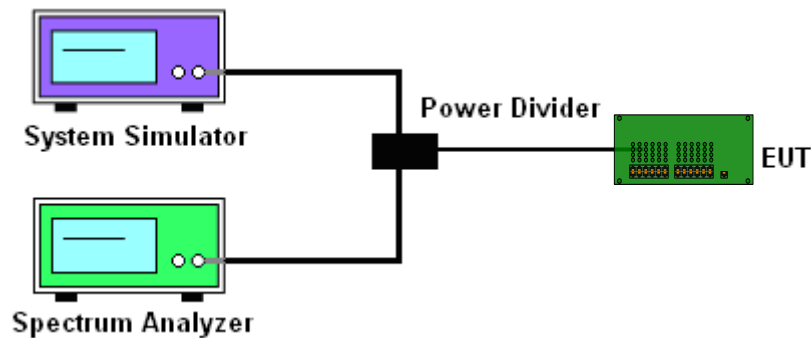

3.4.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

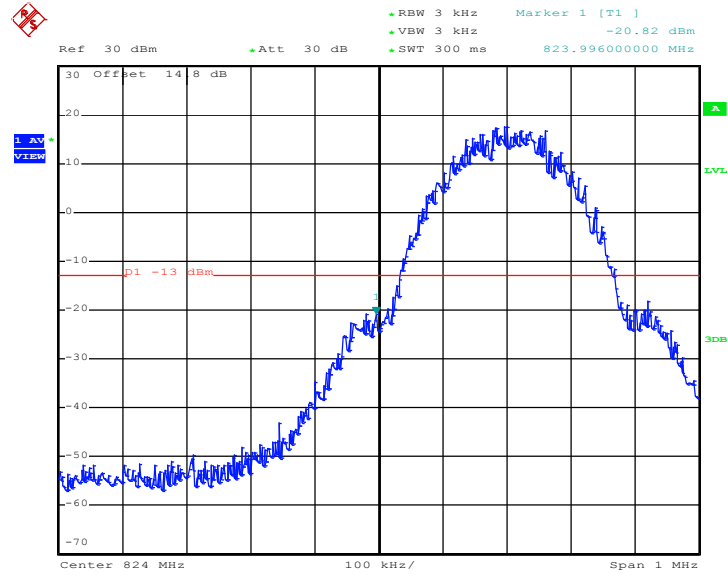

Date: 13.OCT.2011 09:45:07

Higher Band Edge Plot on Channel 251

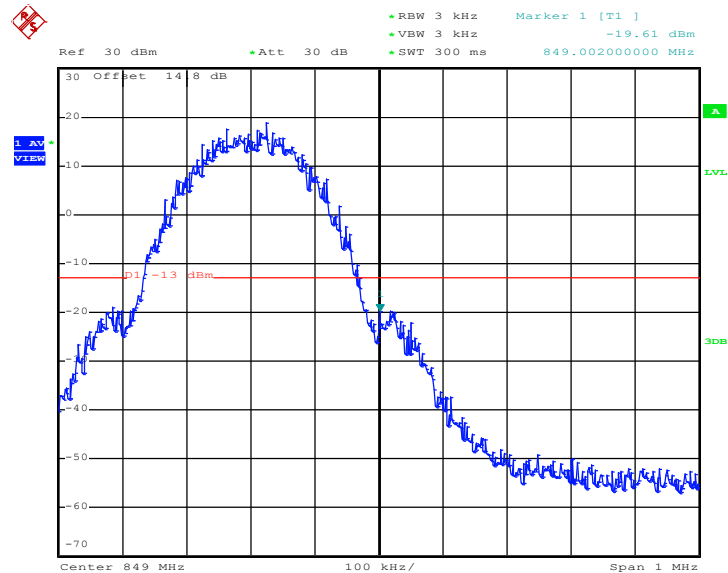


Date: 13.OCT.2011 09:45:34




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

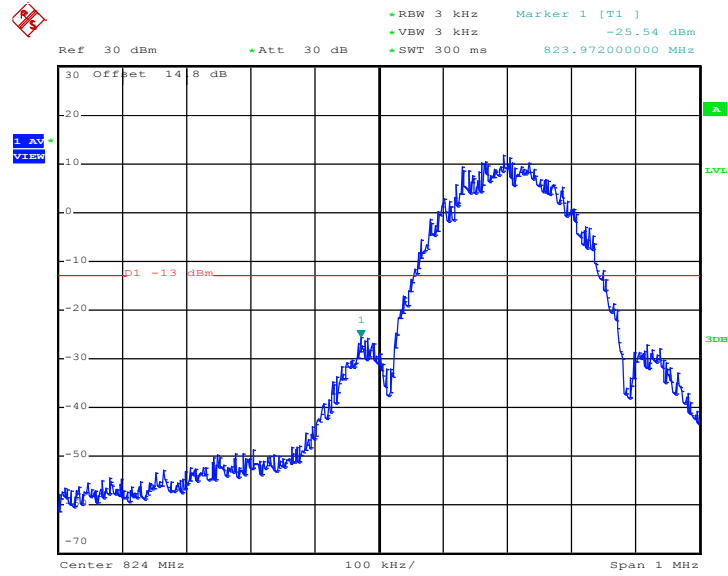

Date: 13.OCT.2011 10:47:51

Higher Band Edge Plot on Channel 251

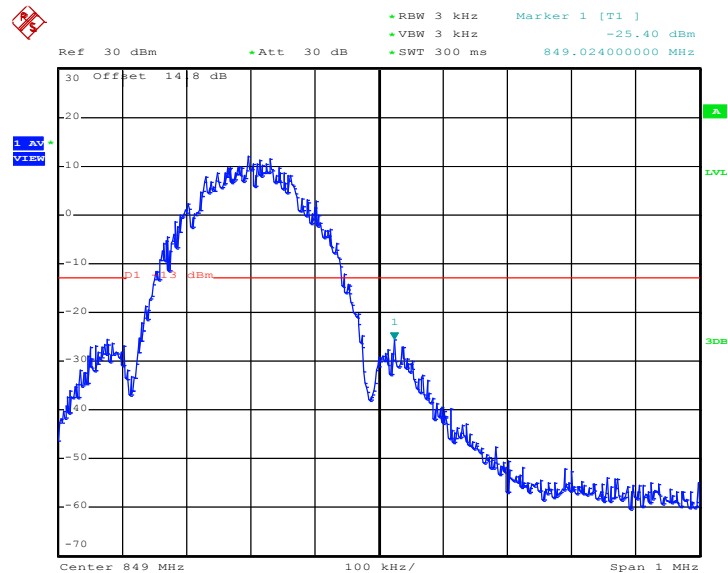


Date: 13.OCT.2011 10:48:18




Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 512

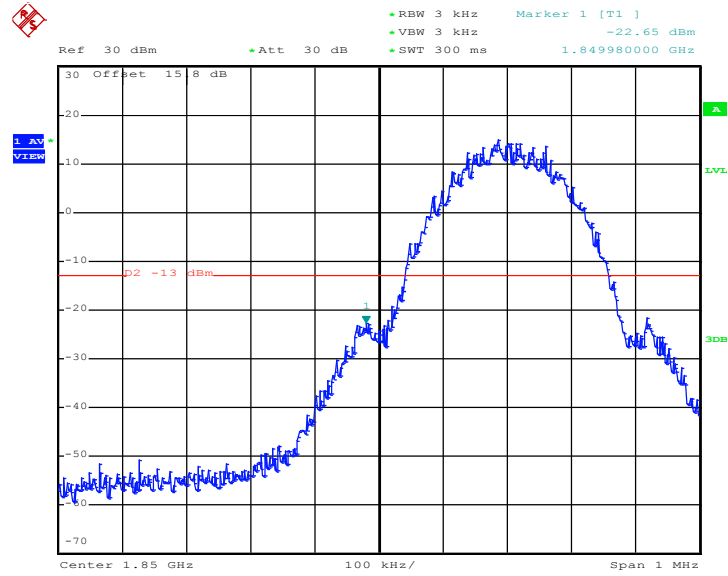

Date: 17.OCT.2011 17:09:29

Higher Band Edge Plot on Channel 810

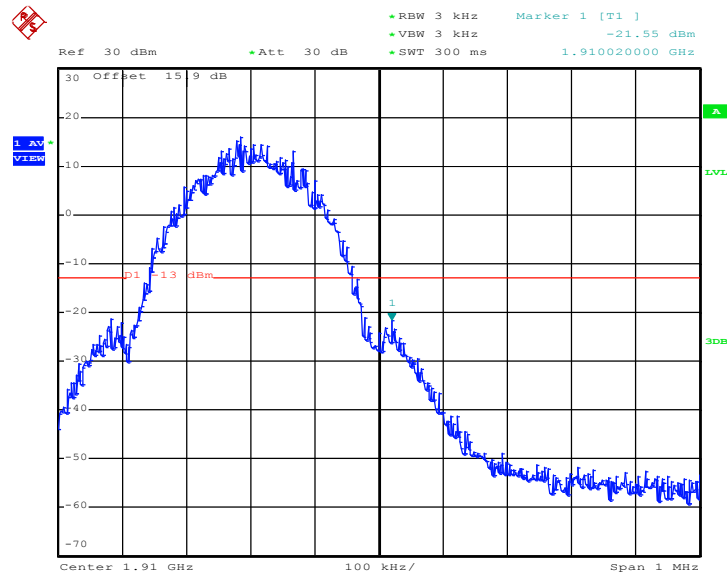


Date: 13.OCT.2011 10:10:30




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 512

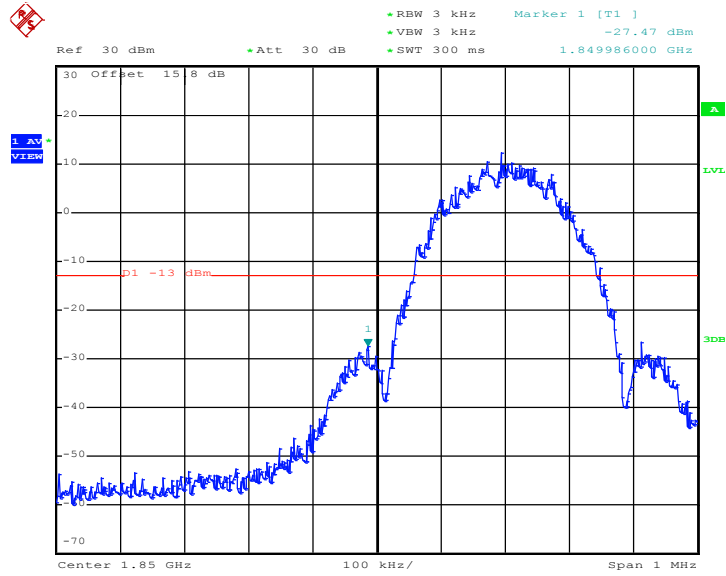

Date: 18.OCT.2011 10:35:15

Higher Band Edge Plot on Channel 810

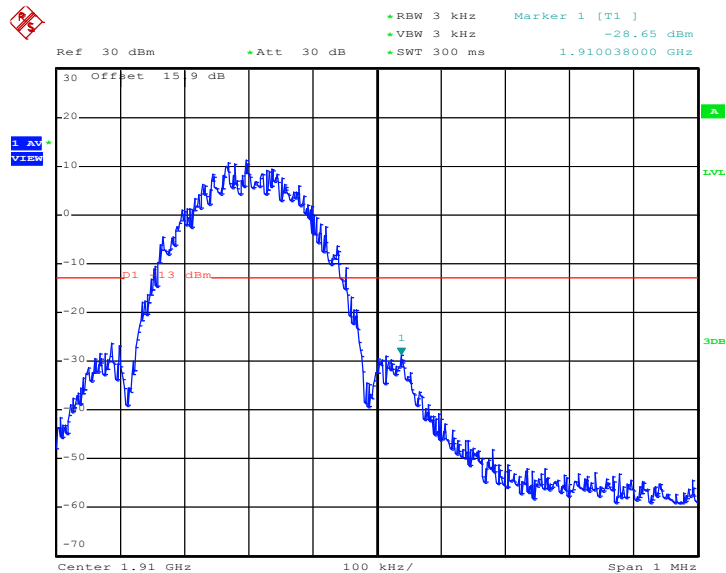


Date: 13.OCT.2011 10:26:45




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 4132

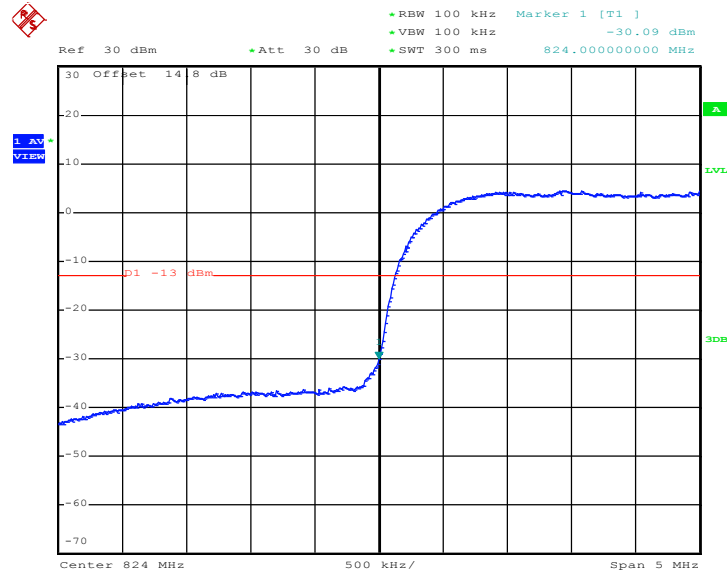

Date: 13.OCT.2011 11:15:38

Higher Band Edge Plot on Channel 4233

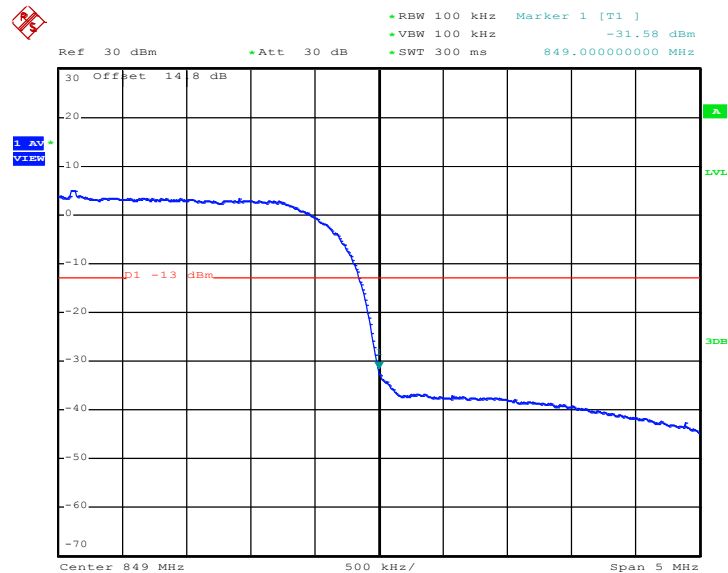


Date: 13.OCT.2011 11:16:04




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 9262

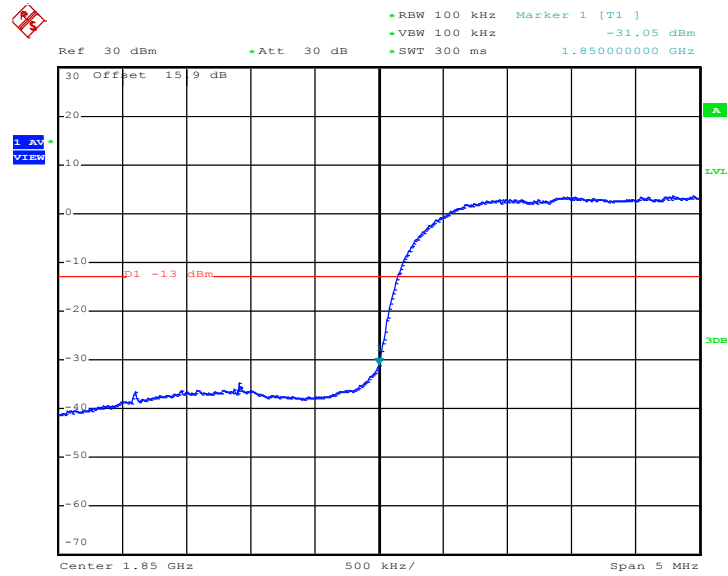

Date: 13.OCT.2011 11:05:00

Higher Band Edge Plot on Channel 9538

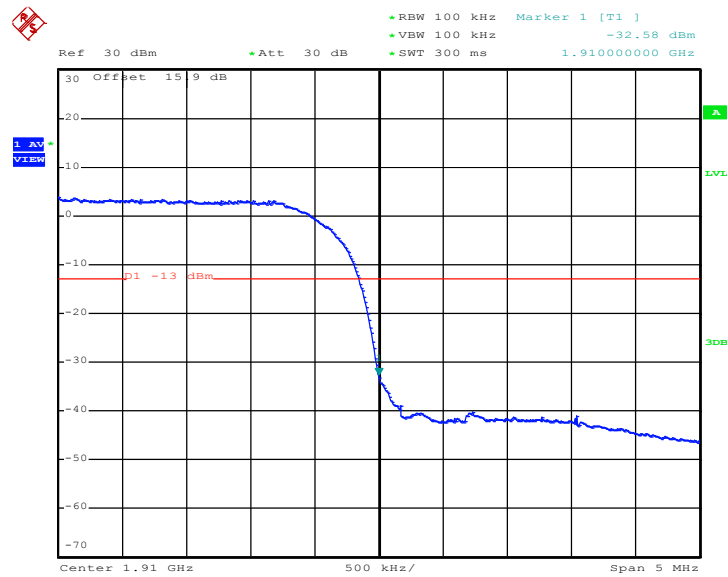


Date: 13.OCT.2011 11:05:27




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 12288K		

Lower Band Edge Plot on Channel 1013

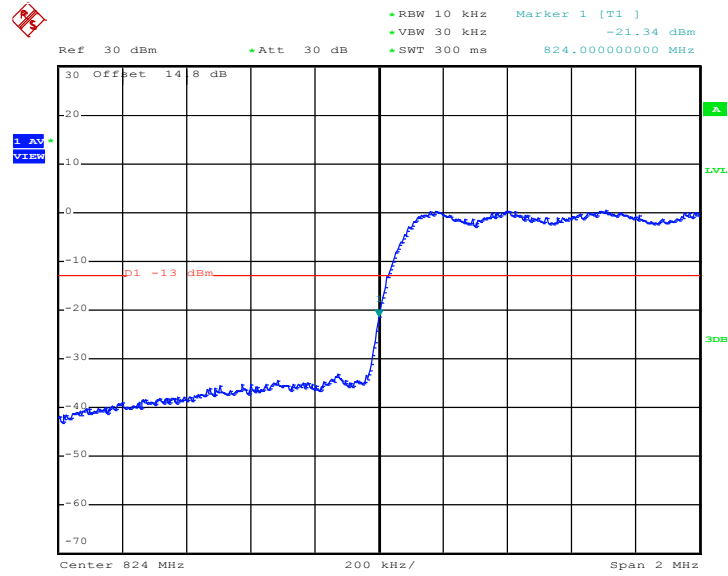

Date: 13.OCT.2011 15:13:21

Higher Band Edge Plot on Channel 777

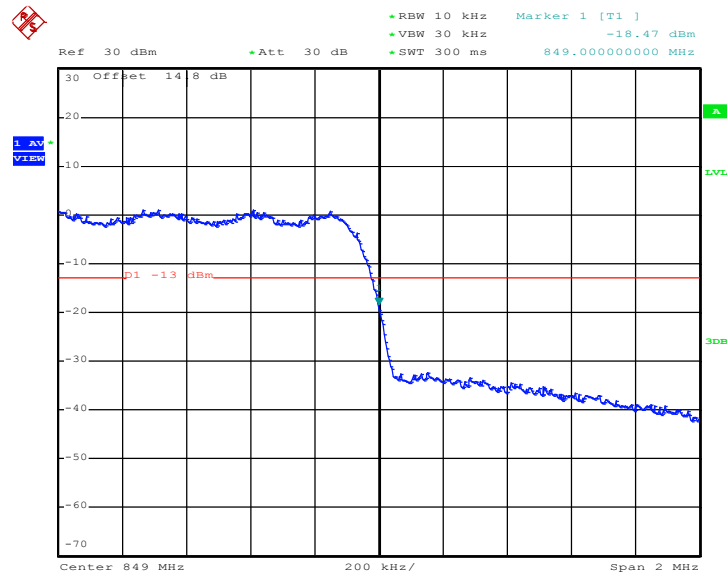


Date: 13.OCT.2011 15:14:38




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Lower Band Edge Plot on Channel 25

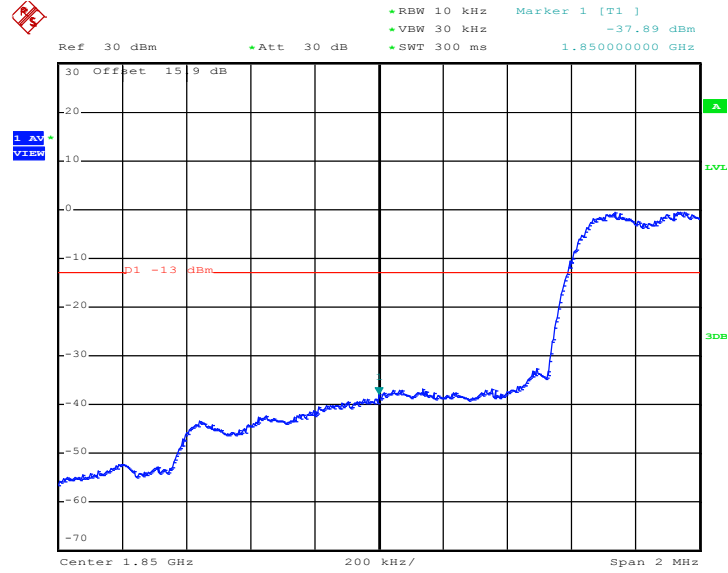

Date: 13.OCT.2011 13:51:05

Higher Band Edge Plot on Channel 1175

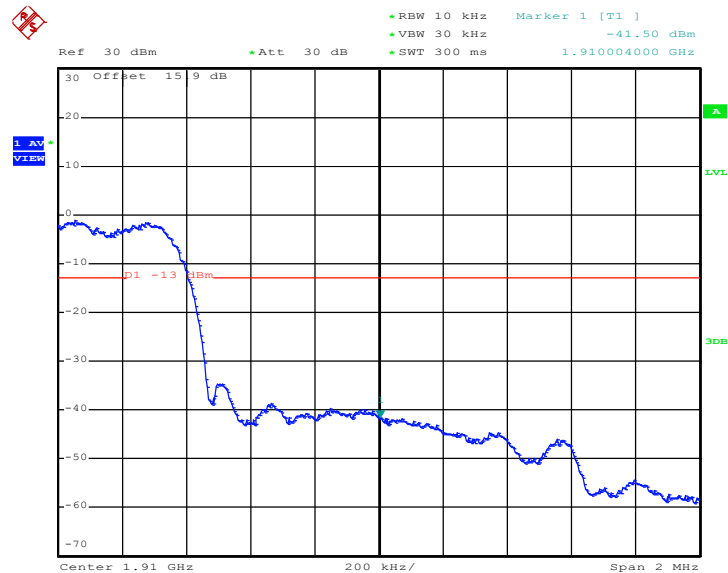

Date: 13.OCT.2011 13:49:36

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


3.5.4 Test Setup

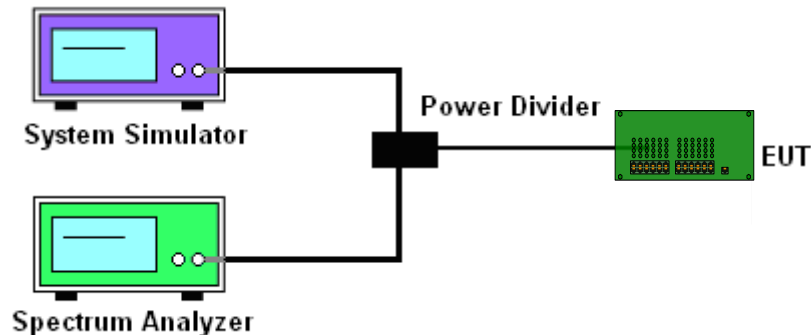

3.5.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

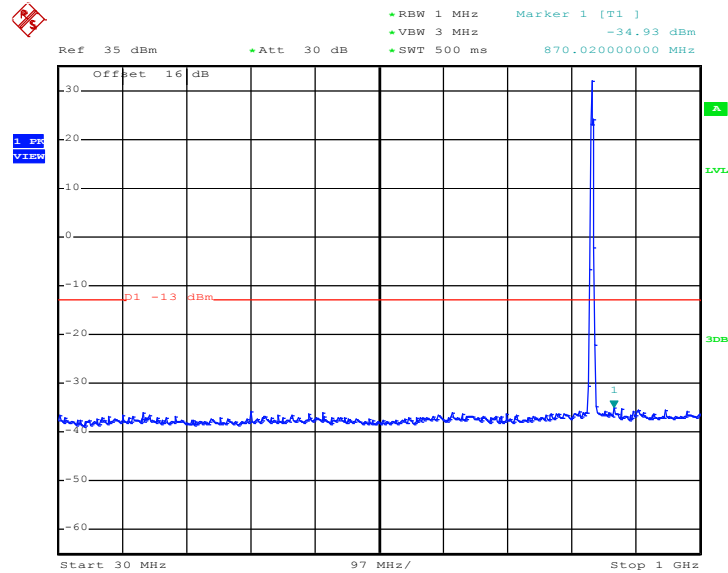

Date: 13.OCT.2011 09:53:05


Conducted Emission Plot between 1GHz ~ 3GHz

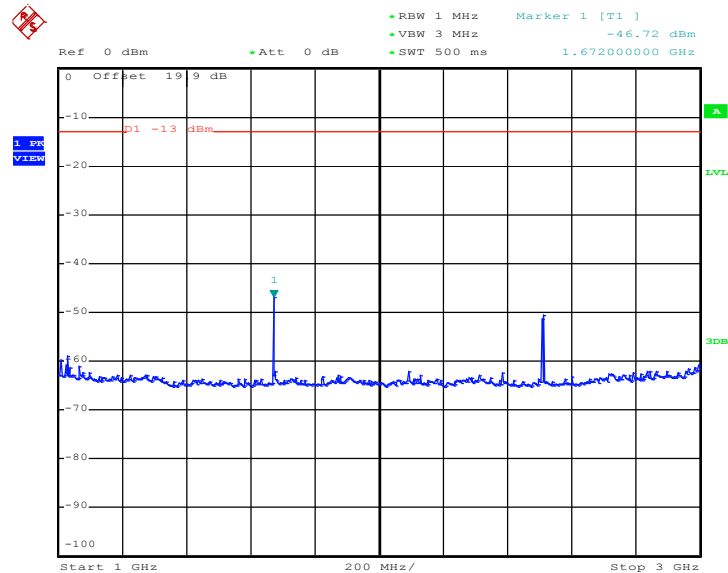

Date: 13.OCT.2011 09:53:22




Conducted Emission Plot between 3GHz ~ 7GHz

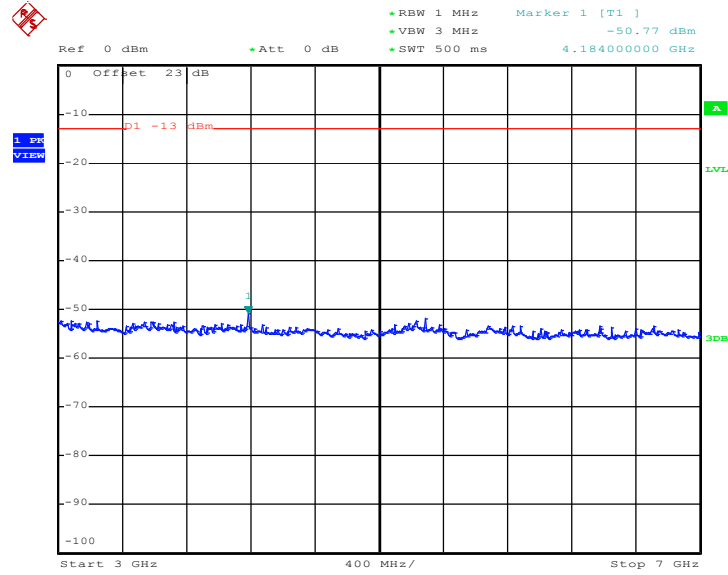

Date: 13.OCT.2011 09:53:35

Conducted Emission Plot between 7GHz ~ 9GHz

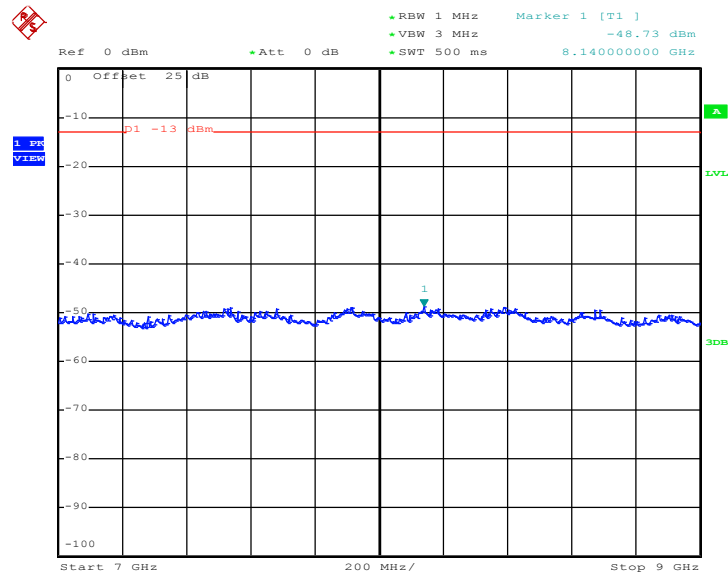


Date: 13.OCT.2011 09:53:48




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

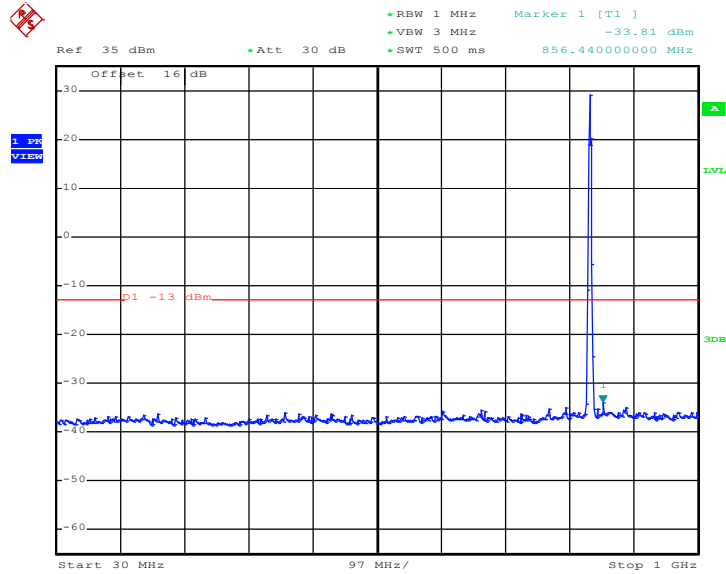

Date: 13.OCT.2011 10:36:49


Conducted Emission Plot between 1GHz ~ 3GHz

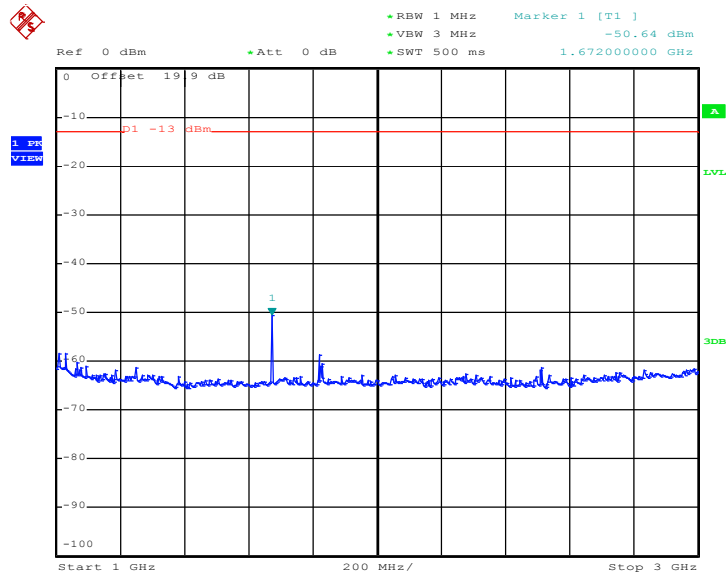

Date: 13.OCT.2011 10:38:53




Conducted Emission Plot between 3GHz ~ 7GHz

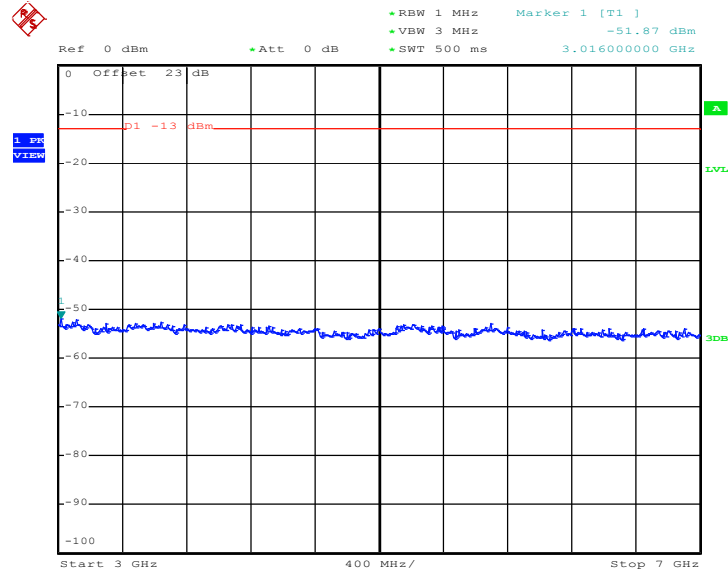

Date: 13.OCT.2011 10:39:06

Conducted Emission Plot between 7GHz ~ 9GHz

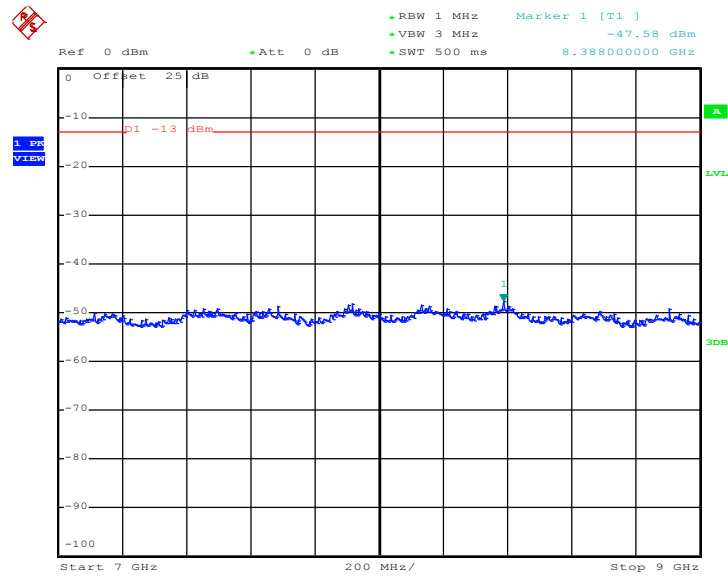


Date: 13.OCT.2011 10:39:19




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

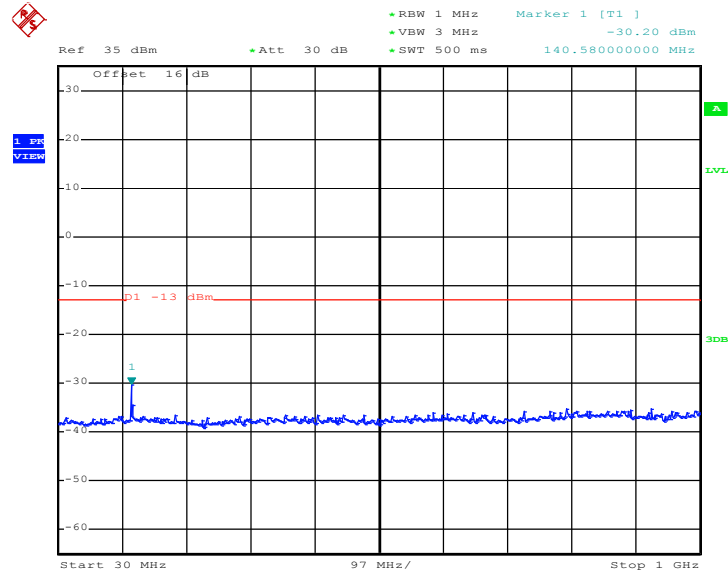

Date: 13.OCT.2011 09:58:36


Conducted Emission Plot between 1GHz ~ 3GHz

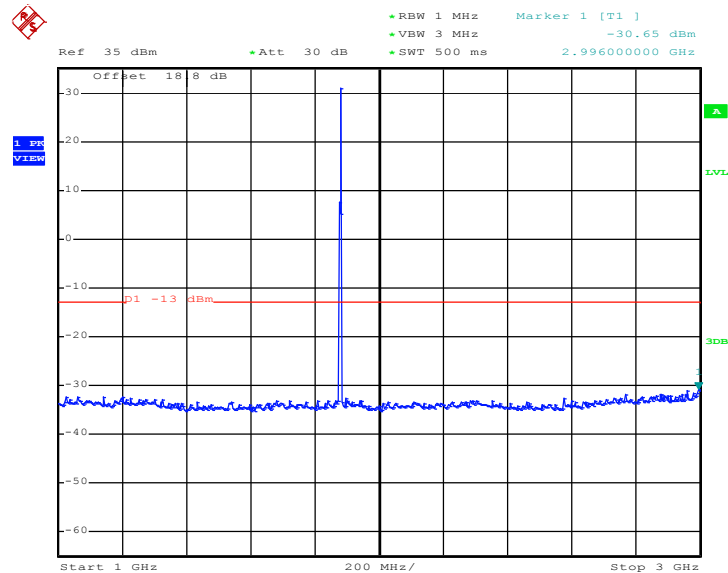

Date: 13.OCT.2011 09:58:50




Conducted Emission Plot between 3GHz ~ 7GHz

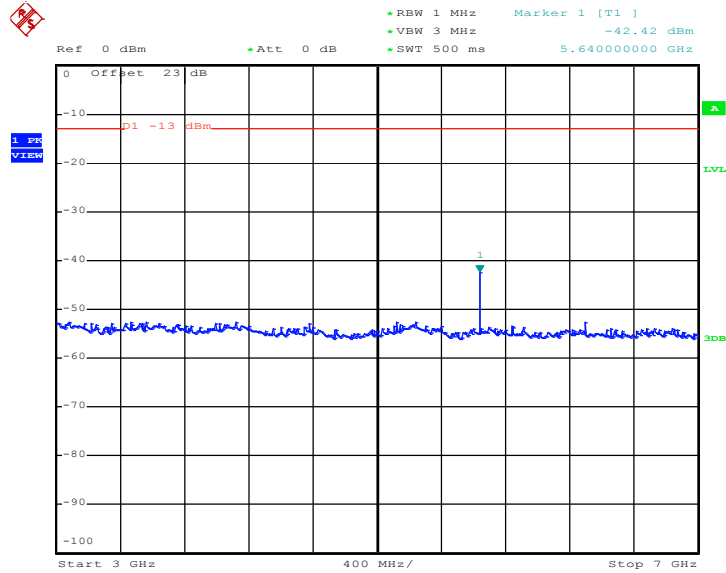

Date: 13.OCT.2011 09:59:06


Conducted Emission Plot between 7GHz ~ 13.6GHz

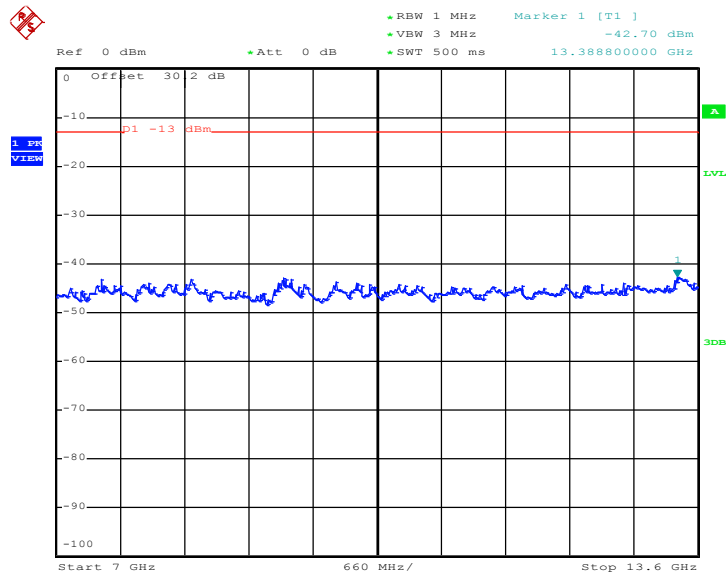

Date: 13.OCT.2011 09:59:20



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

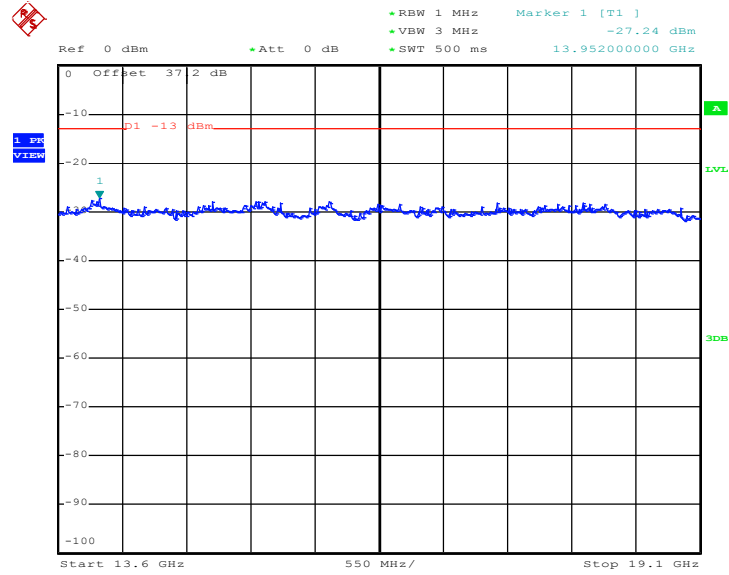


Date: 13.OCT.2011 09:59:32




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

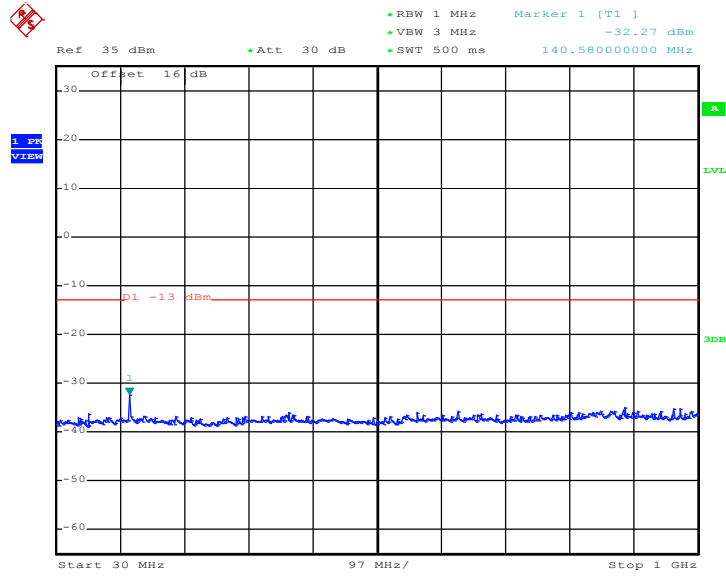

Date: 13.OCT.2011 10:16:20


Conducted Emission Plot between 1GHz ~ 3GHz

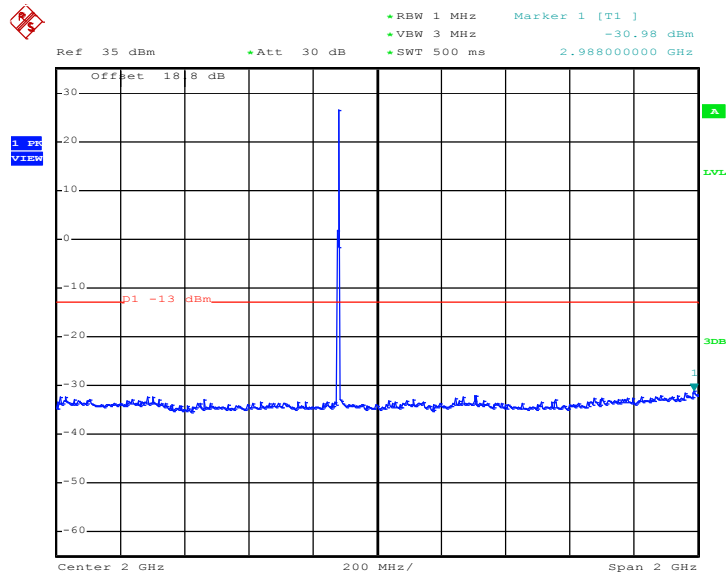

Date: 13.OCT.2011 10:17:16




Conducted Emission Plot between 3GHz ~ 7GHz

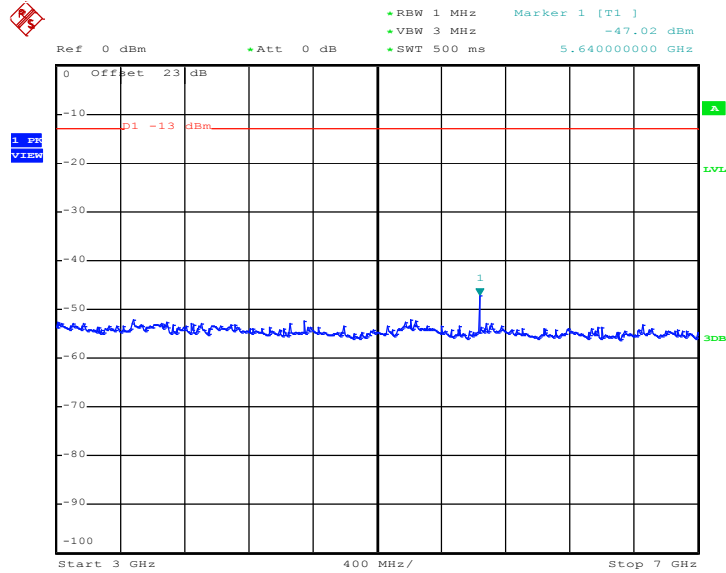

Date: 13.OCT.2011 10:17:51


Conducted Emission Plot between 7GHz ~ 13.6GHz

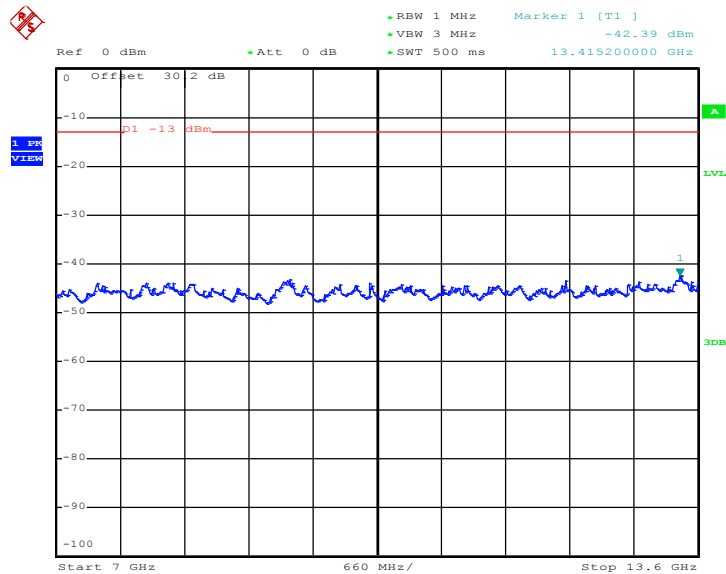

Date: 13.OCT.2011 10:18:05



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

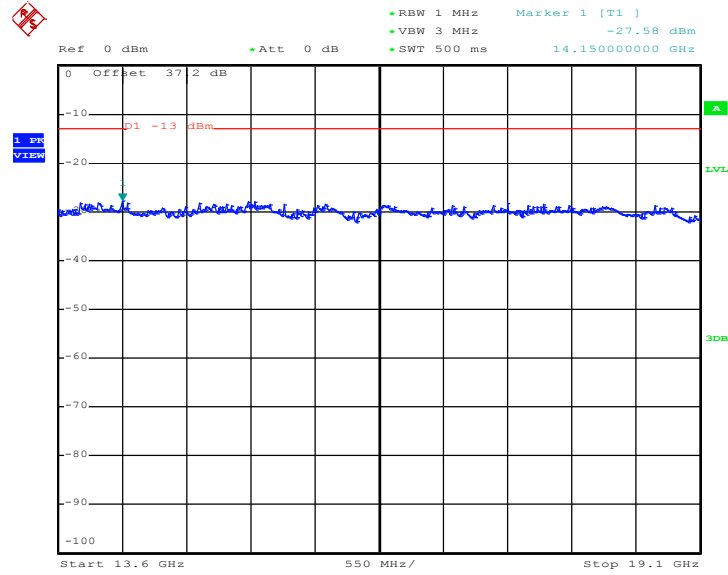


Date: 13.OCT.2011 10:18:18




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

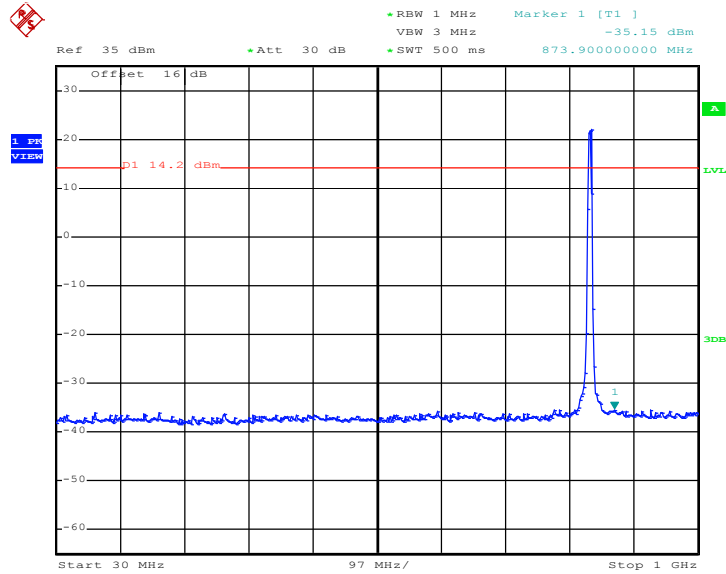

Date: 17.OCT.2011 10:06:54


Conducted Emission Plot between 1GHz ~ 3GHz

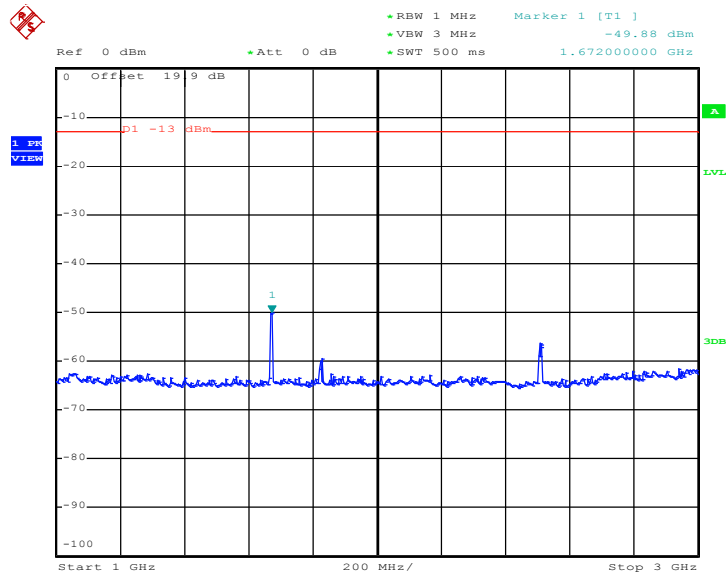

Date: 13.OCT.2011 11:10:13




Conducted Emission Plot between 3GHz ~ 7GHz

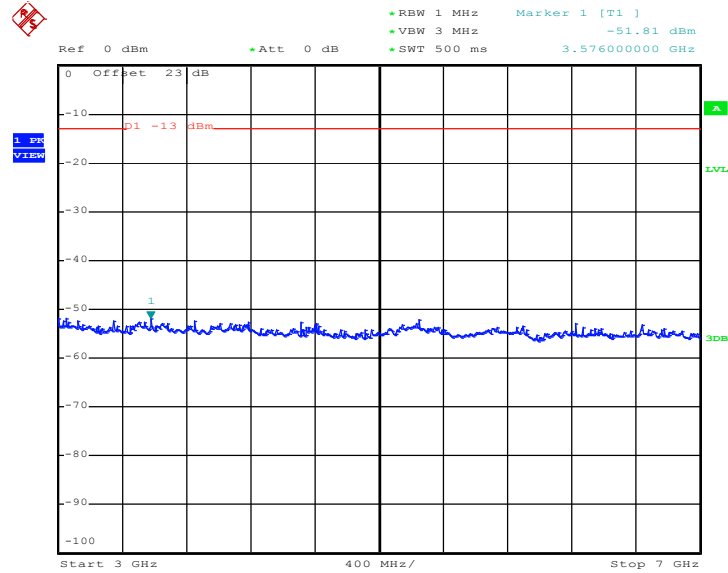

Date: 13.OCT.2011 11:10:26

Conducted Emission Plot between 7GHz ~ 9GHz

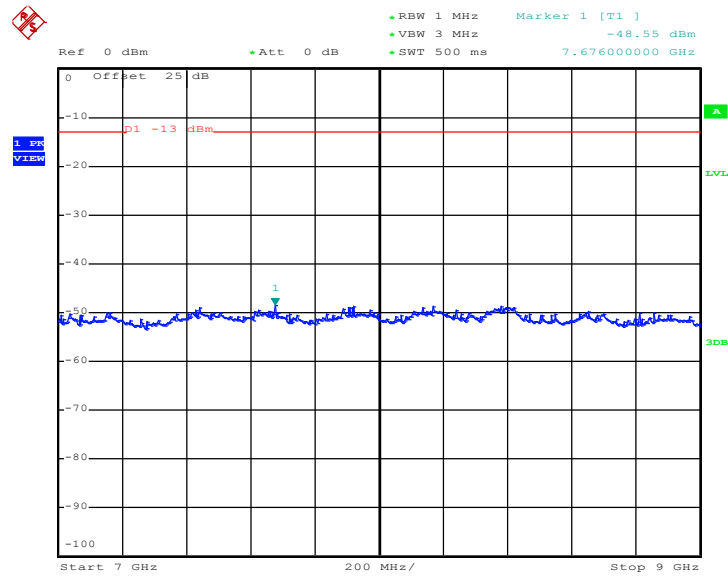


Date: 13.OCT.2011 11:10:39




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

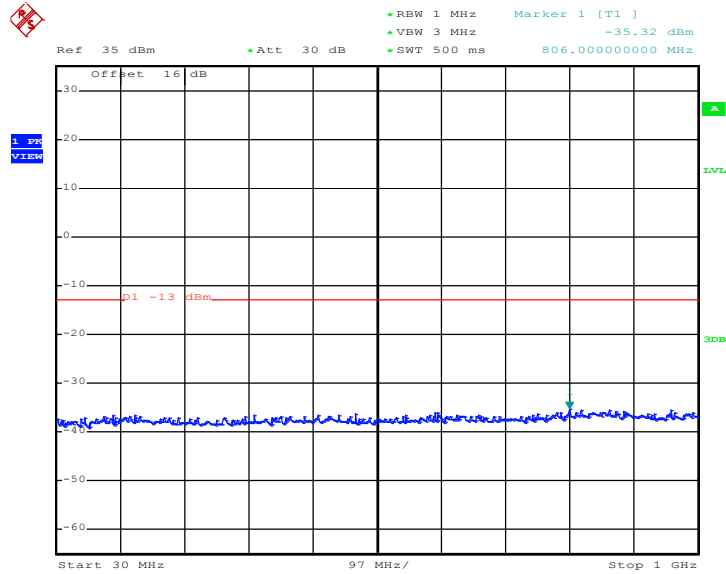

Date: 13.OCT.2011 10:59:12


Conducted Emission Plot between 1GHz ~ 3GHz

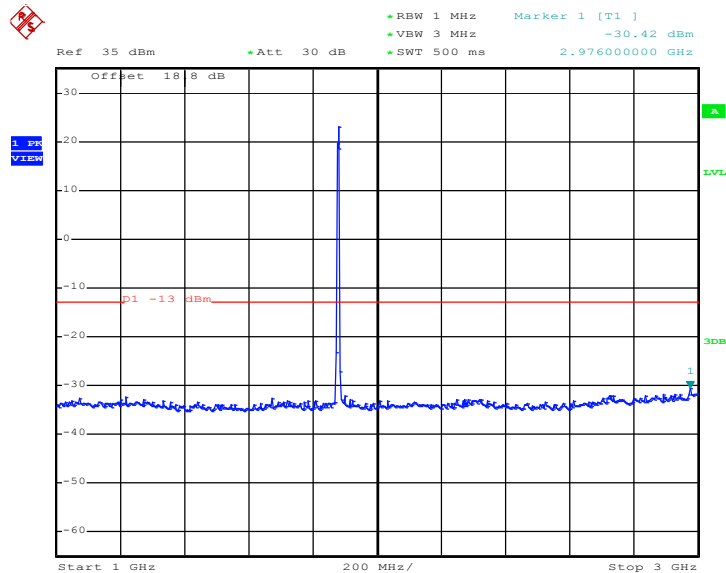

Date: 13.OCT.2011 10:59:25




Conducted Emission Plot between 3GHz ~ 7GHz

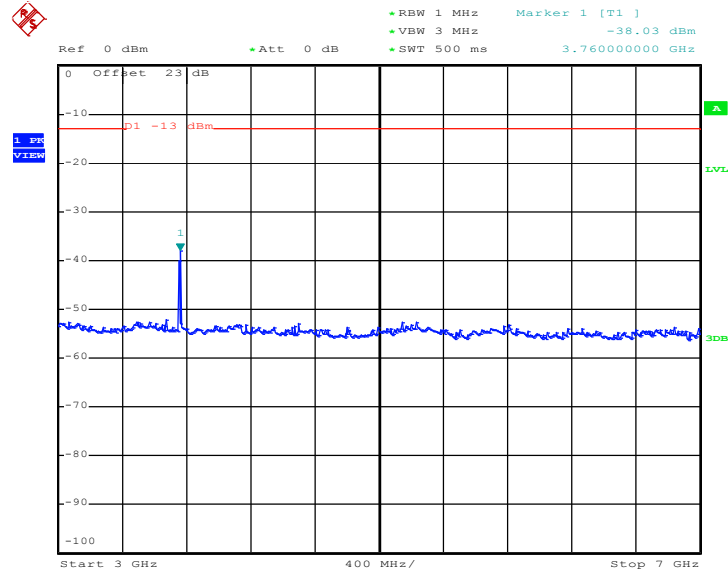

Date: 13.OCT.2011 10:59:52


Conducted Emission Plot between 7GHz ~ 13.6GHz

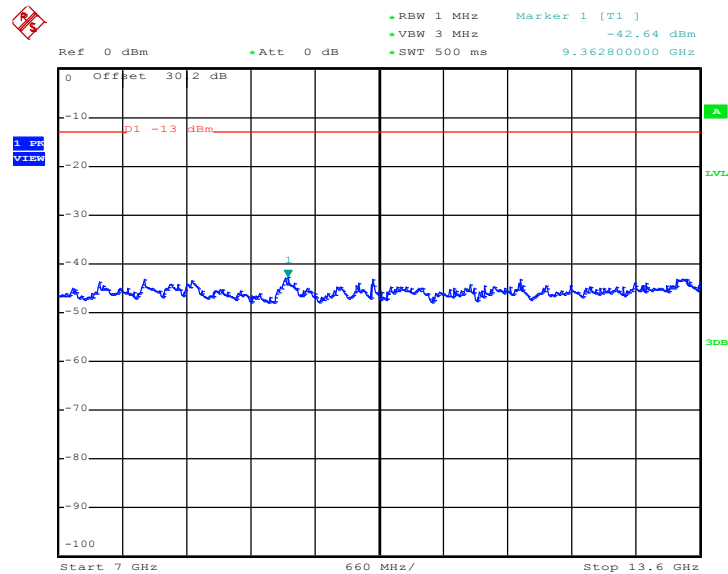

Date: 13.OCT.2011 11:00:06



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

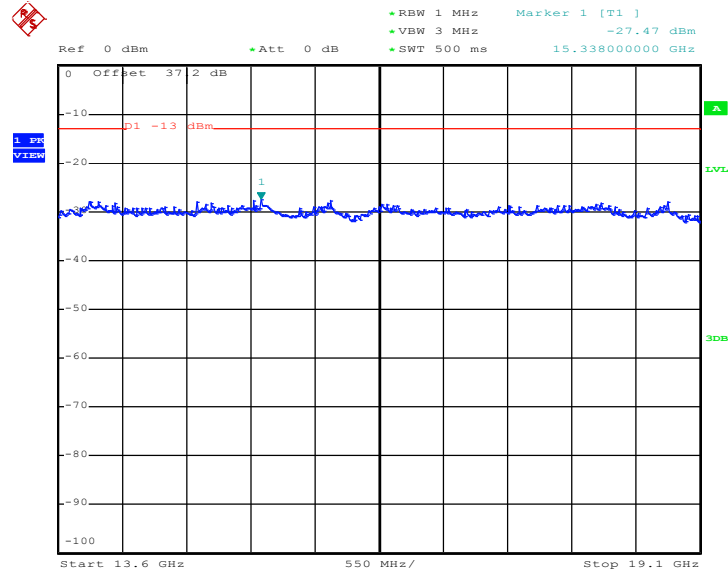


Date: 13.OCT.2011 11:00:18




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP 12288K		

Conducted Emission Plot between 30MHz ~ 1GHz

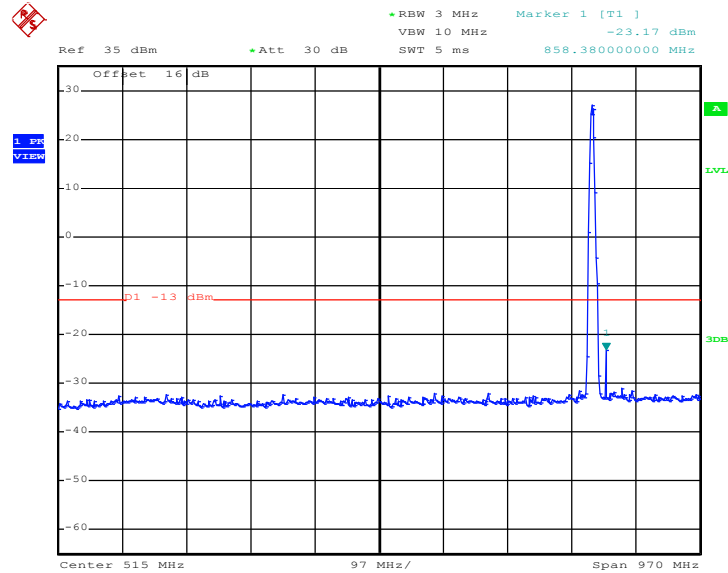

Date: 13.OCT.2011 15:03:25


Conducted Emission Plot between 1GHz ~ 3GHz

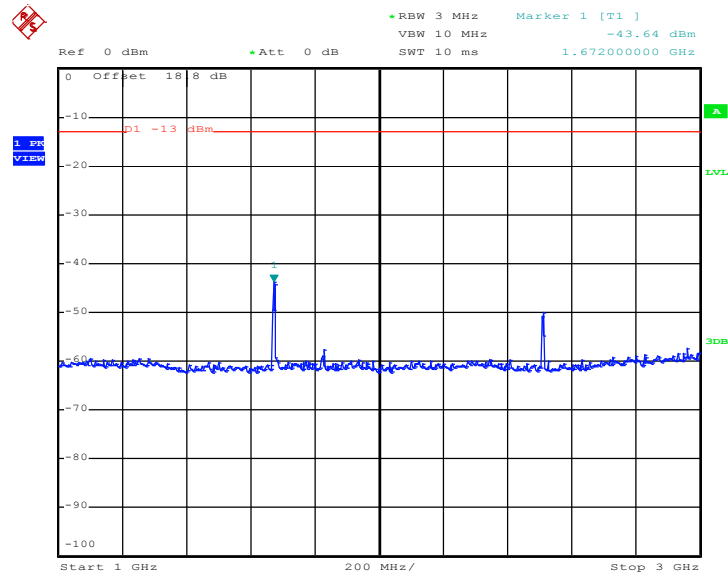

Date: 13.OCT.2011 15:03:43




Conducted Emission Plot between 3GHz ~ 7GHz

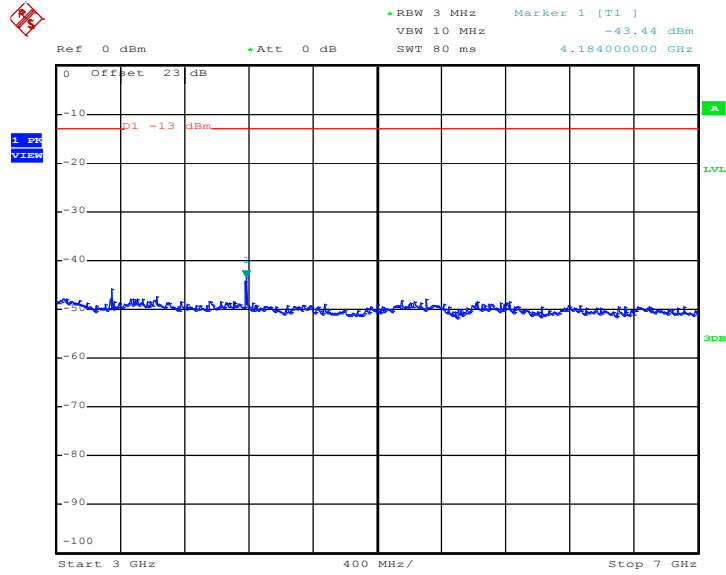

Date: 13.OCT.2011 15:03:57

Conducted Emission Plot between 7GHz ~ 9GHz

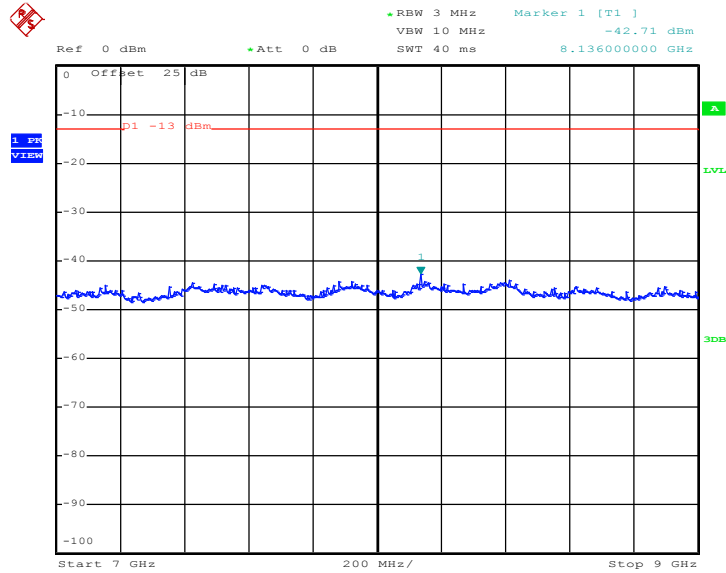


Date: 13.OCT.2011 15:04:11




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Conducted Emission Plot between 30MHz ~ 1GHz

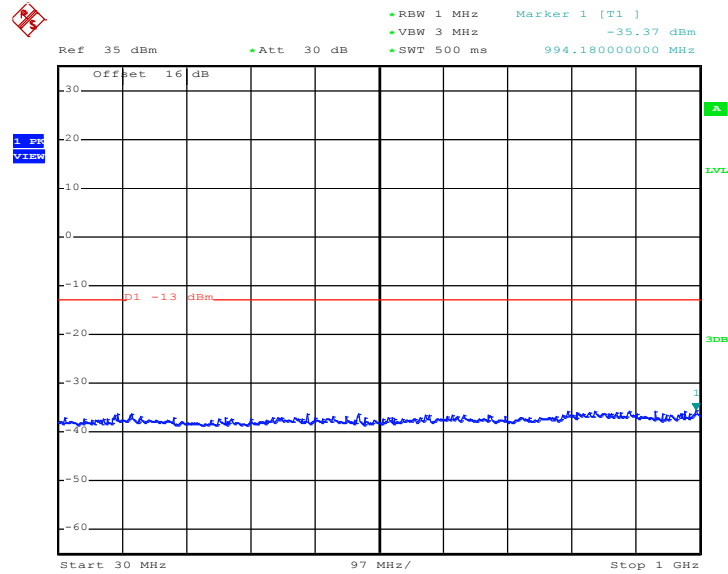

Date: 13.OCT.2011 13:57:23


Conducted Emission Plot between 1GHz ~ 3GHz

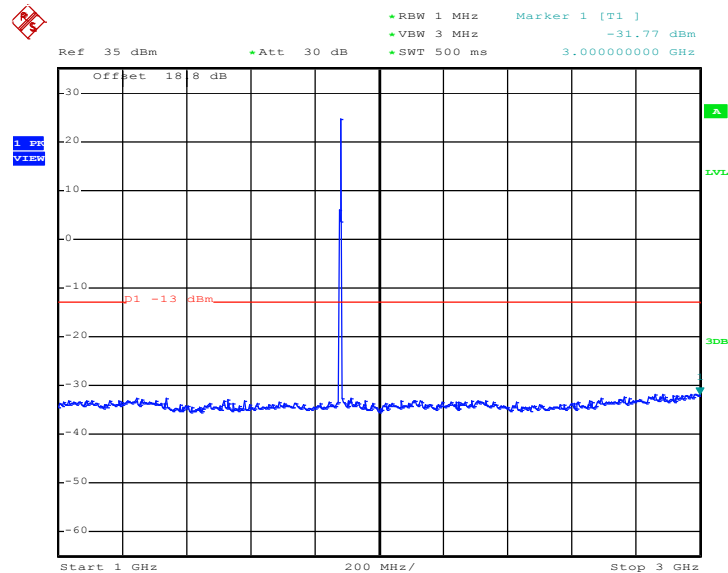

Date: 13.OCT.2011 13:57:37




Conducted Emission Plot between 3GHz ~ 7GHz

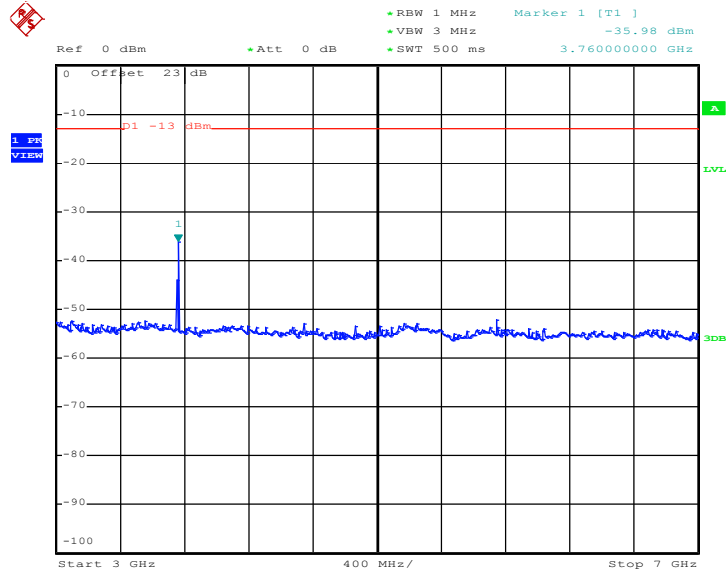

Date: 13.OCT.2011 13:57:55


Conducted Emission Plot between 7GHz ~ 13.6GHz

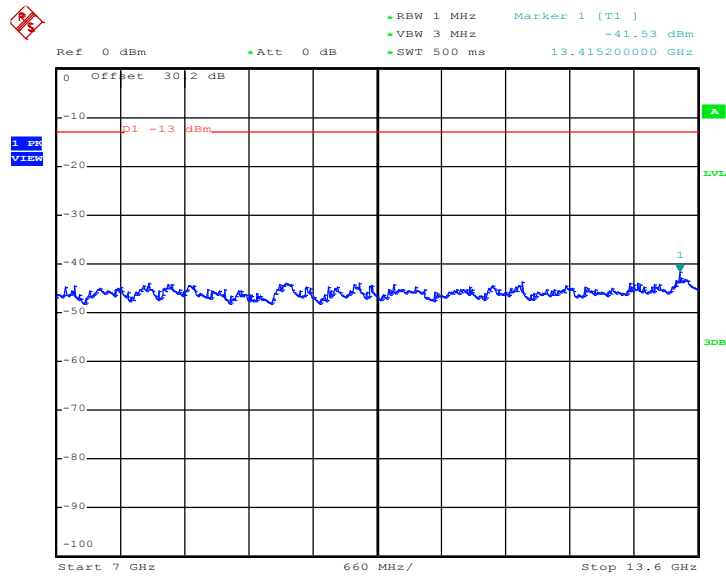

Date: 13.OCT.2011 13:58:08



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

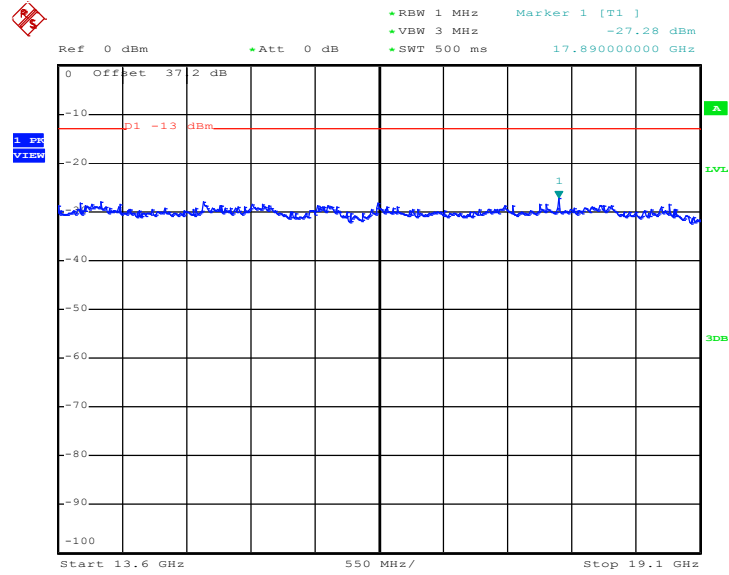

Date: 13.OCT.2011 13:58:21

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$


3.6.4 Test Setup

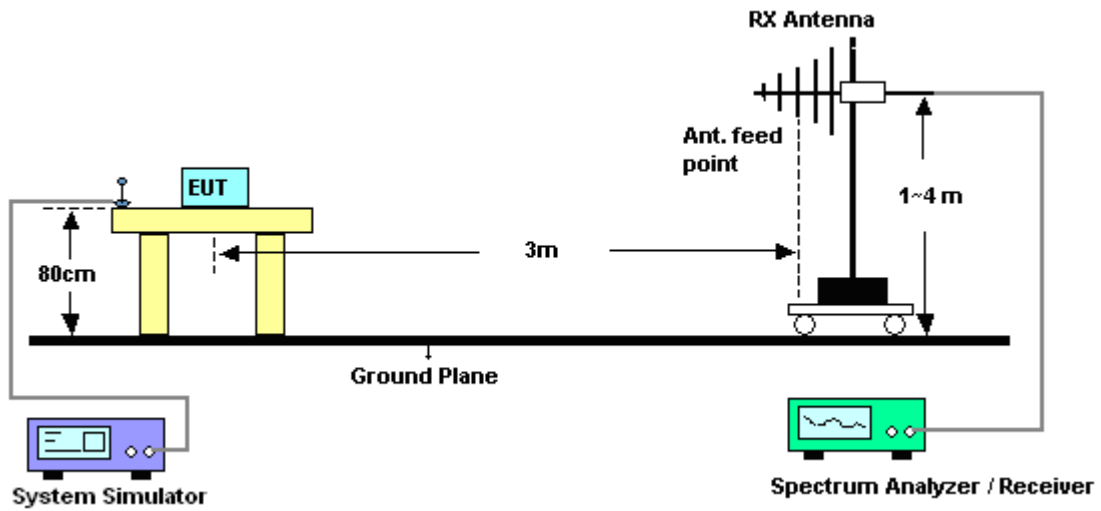



3.6.5 Test Result of Field Strength of Spurious Radiated


Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

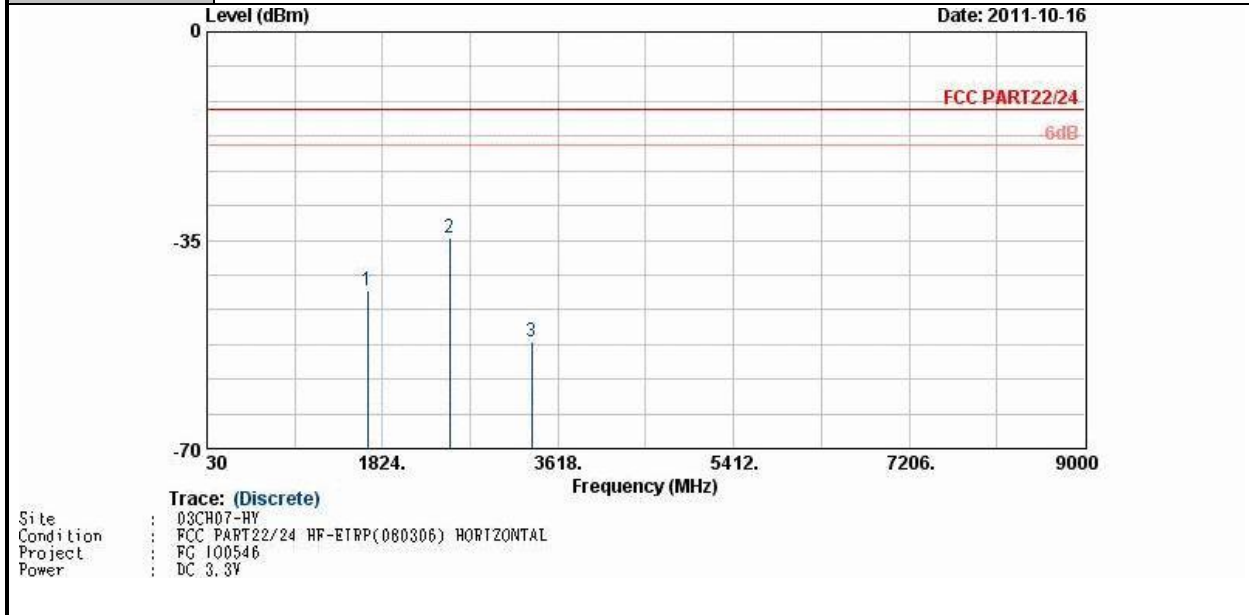

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-43.40	-13	-30.40	-52.9	-45.12	1.62	5.49	H	Pass
2509	-34.52	-13	-21.52	-48.72	-36.49	2.1	6.22	H	Pass
3345	-52.03	-13	-39.03	-67.08	-54.92	3.03	8.07	H	Pass



Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

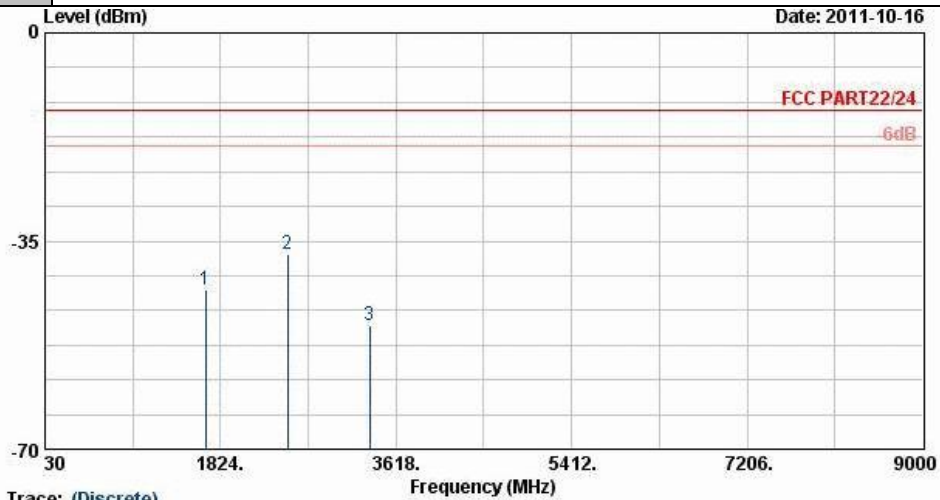


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-43.10	-13	-30.10	-54.59	-44.82	1.62	5.49	V	Pass
2509	-37.24	-13	-24.24	-51.8	-39.21	2.1	6.22	V	Pass
3345	-49.30	-13	-36.30	-66.36	-52.19	3.03	8.07	V	Pass



Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

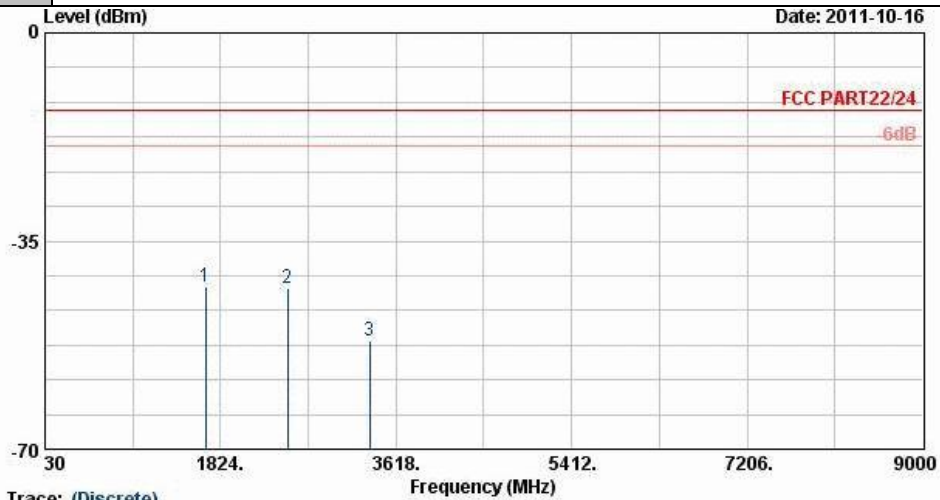


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-42.67	-13	-29.67	-52.66	-44.39	1.62	5.49	H	Pass
2509	-42.90	-13	-29.90	-56.7	-44.87	2.1	6.22	H	Pass
3345	-51.73	-13	-38.73	-66.67	-54.62	3.03	8.07	H	Pass



Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

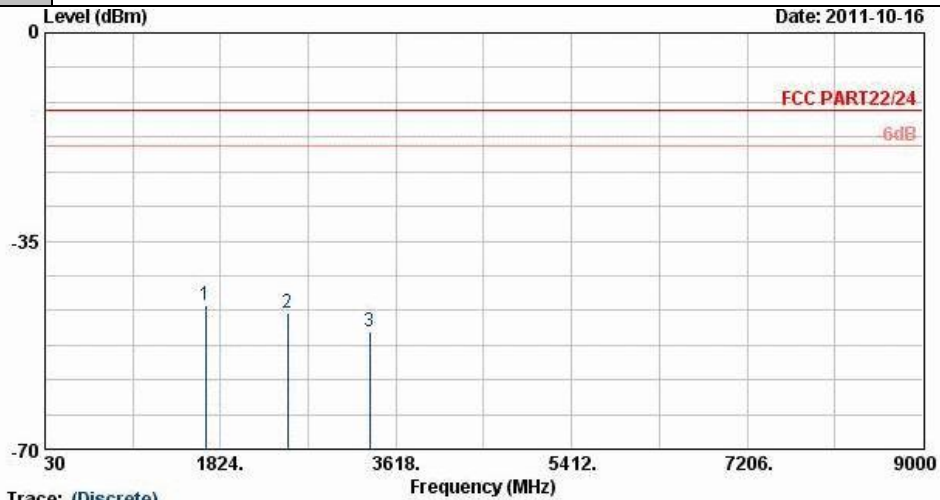


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-45.91	-13	-32.91	-57.49	-47.63	1.62	5.49	V	Pass
2509	-47.14	-13	-34.14	-61	-49.11	2.1	6.22	V	Pass
3345	-50.35	-13	-37.35	-66.73	-53.24	3.03	8.07	V	Pass



Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

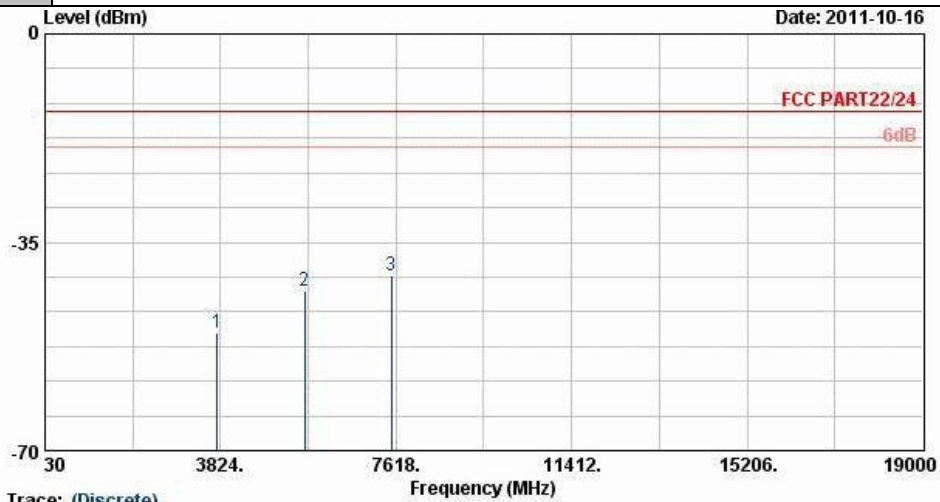


Trace: (Discrete)
 Site : 03CH07-RY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-50.33	-13	-37.33	-67.02	-56.63	2.51	8.81	H	Pass
5636	-43.16	-13	-30.16	-64.73	-50.87	2.99	10.70	H	Pass
7520	-40.59	-13	-27.59	-68.36	-49.12	3.59	12.12	H	Pass



Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

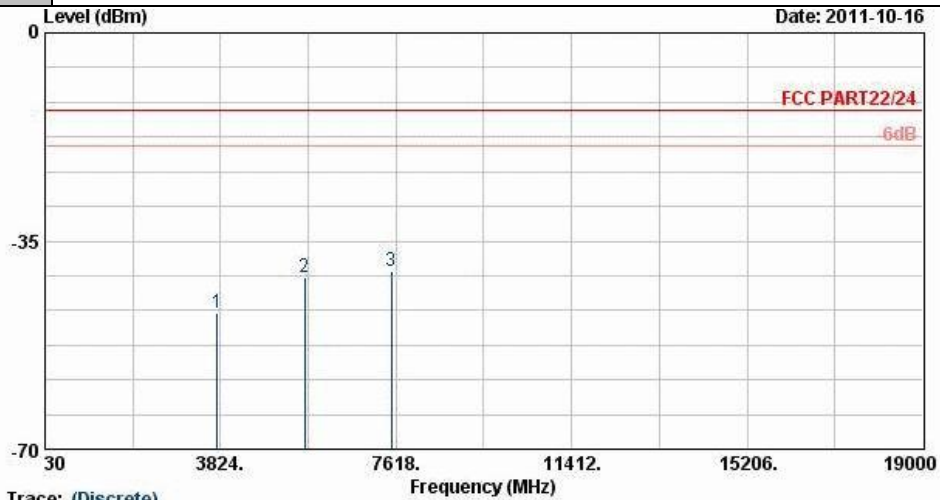


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-47.04	-13	-34.04	-63.5	-53.34	2.51	8.81	V	Pass
5636	-41.20	-13	-28.20	-62.87	-48.91	2.99	10.70	V	Pass
7520	-40.19	-13	-27.19	-68.55	-48.72	3.59	12.12	V	Pass



Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

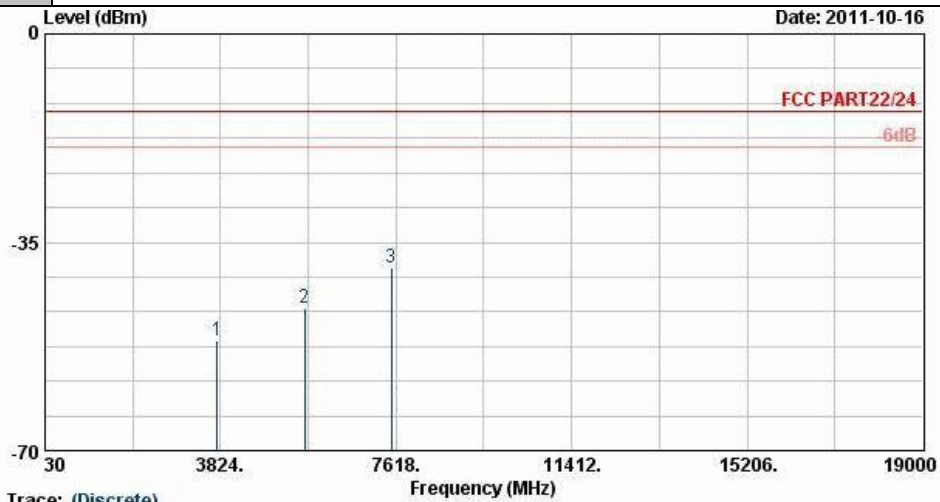


Trace: (Discrete)
 Site : 03CH07-RY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.52	-13	-38.52	-68.32	-57.82	2.51	8.81	H	Pass
5636	-45.93	-13	-32.93	-66.71	-53.64	2.99	10.70	H	Pass
7520	-39.26	-13	-26.26	-67.97	-47.79	3.59	12.12	H	Pass



Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE 8 Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

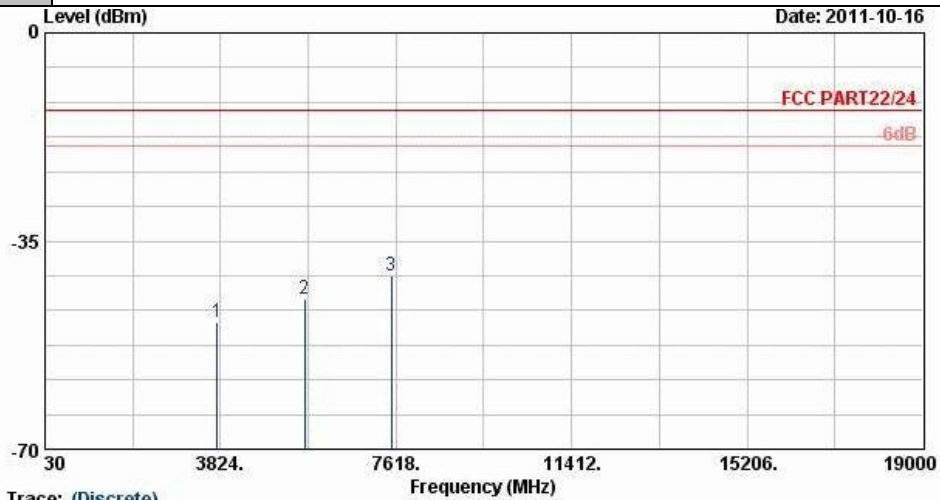


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.67	-13	-35.67	-65.15	-54.97	2.51	8.81	V	Pass
5636	-44.72	-13	-31.72	-65.88	-52.43	2.99	10.70	V	Pass
7520	-40.73	-13	-27.73	-68.44	-49.26	3.59	12.12	V	Pass



Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

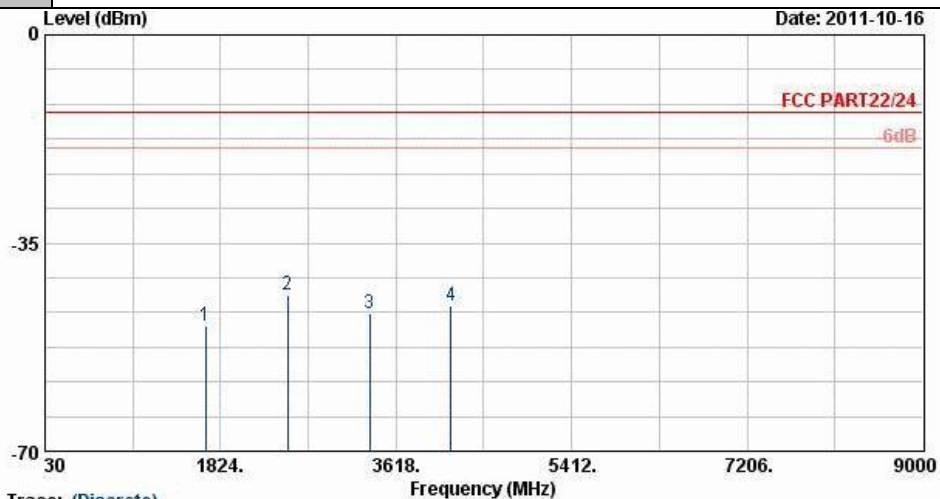


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-48.91	-13	-35.91	-58.74	-50.63	1.62	5.49	H	Pass
2509	-43.72	-13	-30.72	-58.01	-45.69	2.1	6.22	H	Pass
3345	-46.92	-13	-33.92	-62.13	-49.81	3.03	8.07	H	Pass
4182	-45.64	-13	-32.64	-61.86	-50.18	2.52	9.21	H	Pass



Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

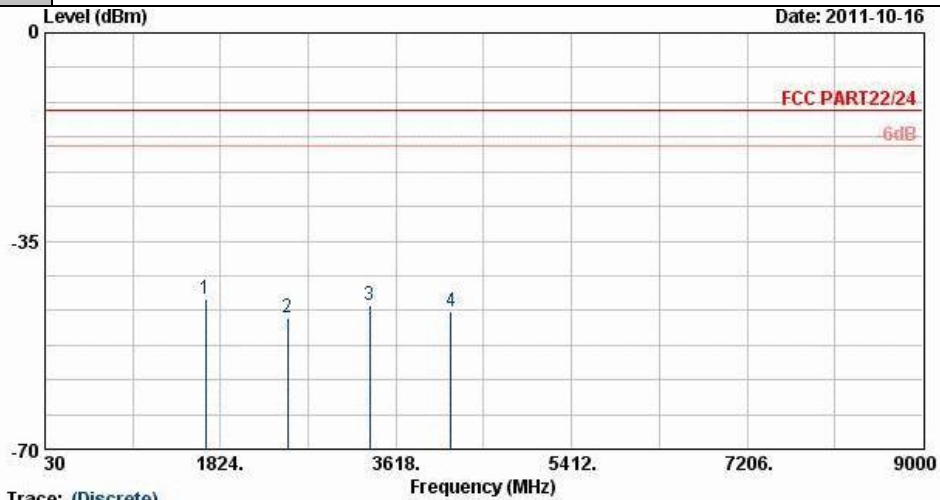


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-44.66	-13	-31.66	-56.75	-46.38	1.62	5.49	V	Pass
2509	-47.90	-13	-34.90	-61.91	-49.87	2.1	6.22	V	Pass
3345	-45.84	-13	-32.84	-61.6	-48.73	3.03	8.07	V	Pass
4182	-46.81	-13	-33.81	-64.14	-51.35	2.52	9.21	V	Pass



Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

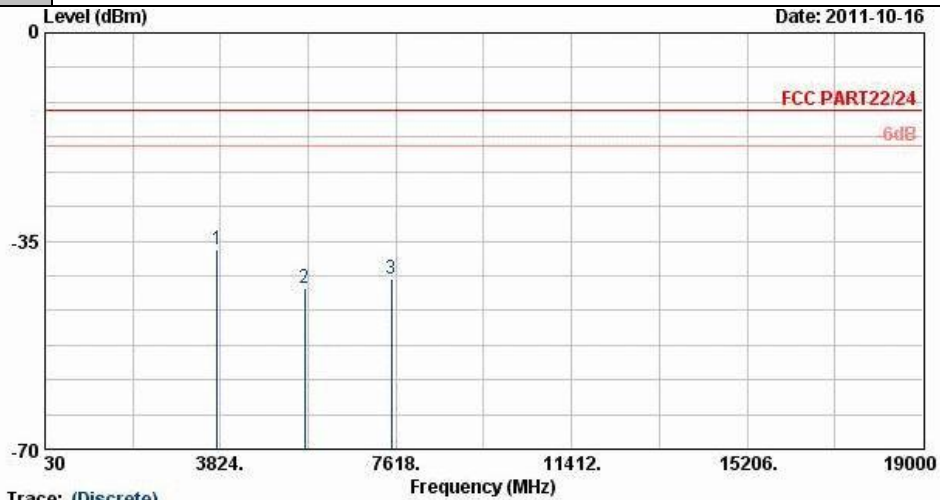


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-36.35	-13	-23.35	-51.69	-42.65	2.51	8.81	H	Pass
5636	-43.01	-13	-30.01	-64.36	-50.72	2.99	10.70	H	Pass
7520	-41.34	-13	-28.34	-68.8	-49.87	3.59	12.12	H	Pass



Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

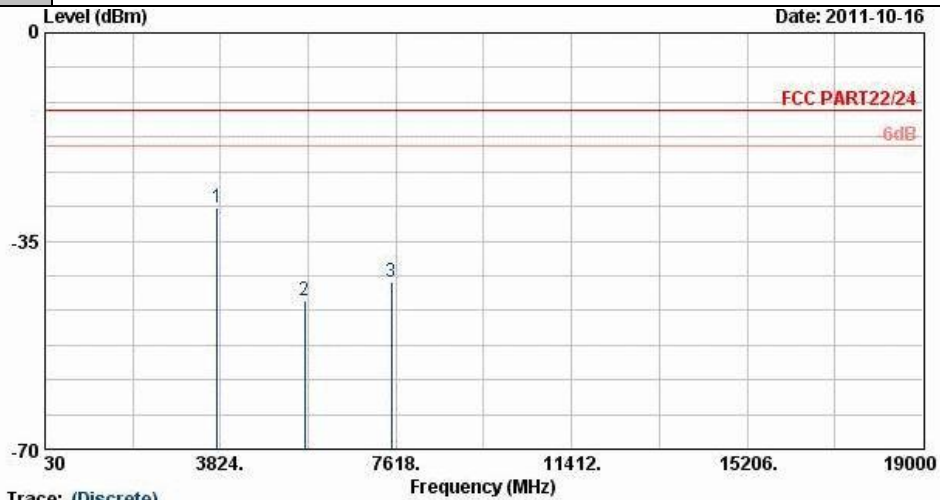


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-29.33	-13	-16.33	-45.94	-35.63	2.51	8.81	V	Pass
5636	-45.14	-13	-32.14	-66.24	-52.85	2.99	10.70	V	Pass
7520	-41.80	-13	-28.80	-68.18	-50.33	3.59	12.12	V	Pass



Band :	CDMA2000 BC0	Temperature :	21~23°C
Test Mode :	1xEV-DO Rev. A_RETAP 12288K	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

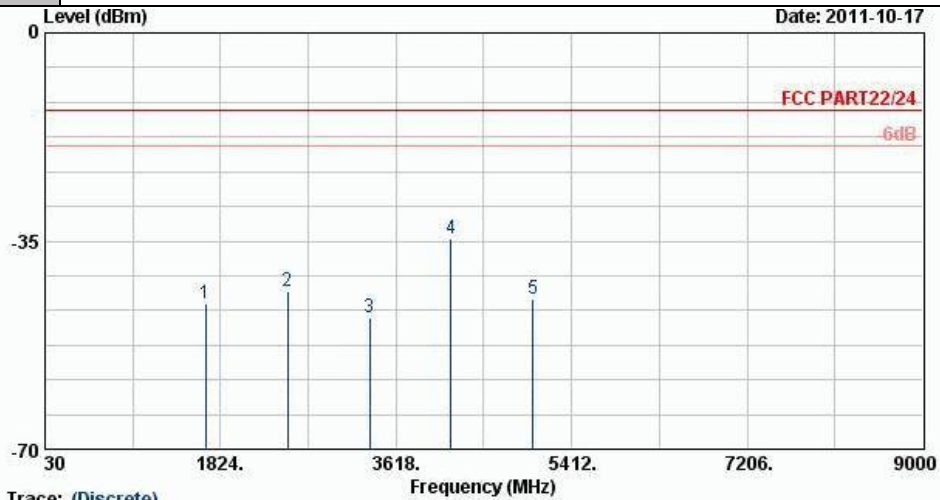


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-45.49	-13	-32.49	-53.88	-47.21	1.62	5.49	H	Pass
2509	-43.57	-13	-30.57	-56.38	-45.54	2.1	6.22	H	Pass
3345	-47.83	-13	-34.83	-61.64	-50.72	3.03	8.07	H	Pass
4182	-34.71	-13	-21.71	-51.17	-39.25	2.52	9.21	H	Pass
5018	-44.79	-13	-31.79	-62.37	-50.24	3.1	10.70	H	Pass



Band :	CDMA2000 BC0	Temperature :	21~23°C
Test Mode :	1xEV-DO Rev. A_RETAP 12288K	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

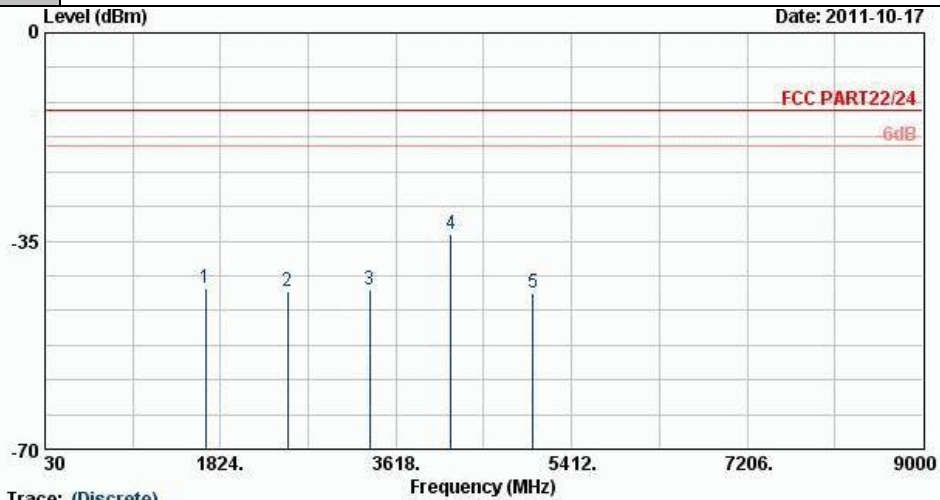


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-ETRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-42.89	-13	-29.89	-53.31	-44.61	1.62	5.49	V	Pass
2509	-43.57	-13	-30.57	-57.02	-45.54	2.1	6.22	V	Pass
3345	-43.32	-13	-30.32	-58.78	-46.21	3.03	8.07	V	Pass
4182	-33.70	-13	-20.70	-50.22	-38.24	2.52	9.21	V	Pass
5018	-43.79	-13	-30.79	-61.8	-49.24	3.1	10.70	V	Pass



Band :	CDMA2000 BC1	Temperature :	21~23°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

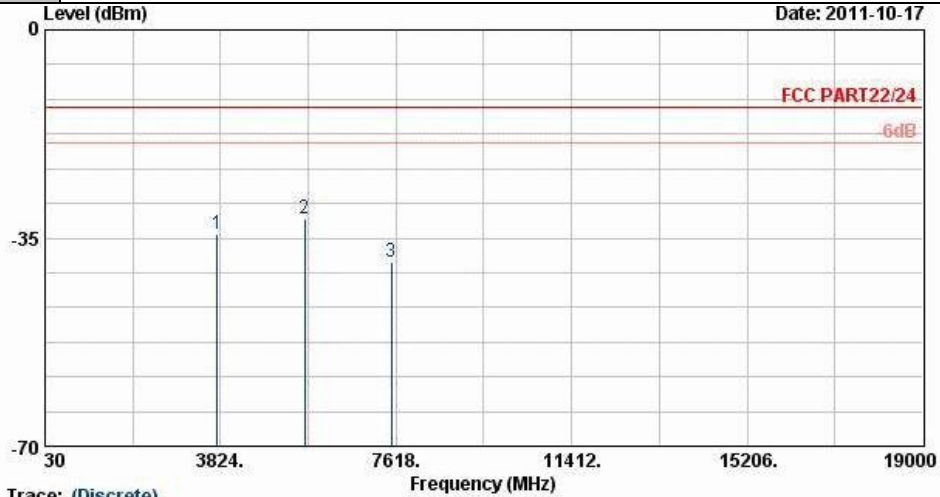


Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) HORIZONTAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-34.24	-13	-21.24	-49.56	-40.54	2.51	8.81	H	Pass
5636	-31.86	-13	-18.86	-52.43	-39.57	2.99	10.70	H	Pass
7520	-39.11	-13	-26.11	-66.2	-47.64	3.59	12.12	H	Pass



Band :	CDMA2000 BC1	Temperature :	21~23°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Relative Humidity :	49~50%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

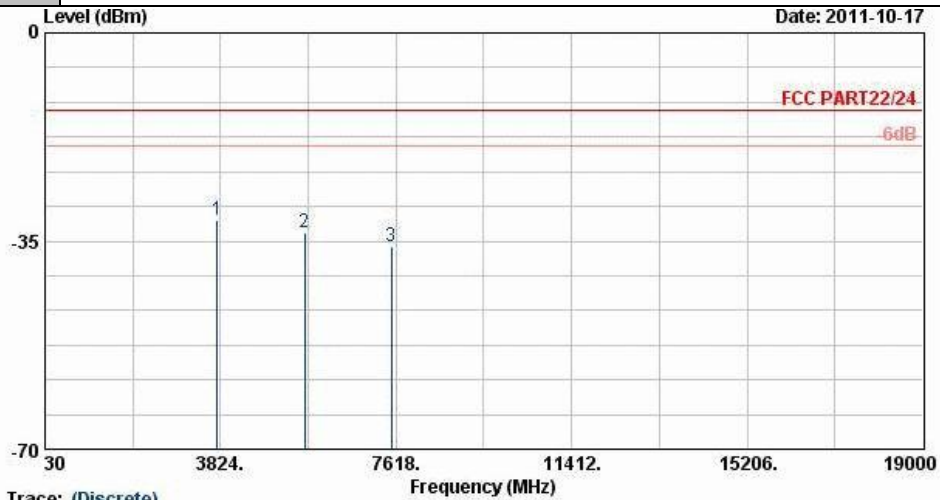

Trace: (Discrete)
 Site : 08CH07-HY
 Condition : FCC PART22/24 HF-EIRP(080306) VERTICAL
 Project : FG 100546
 Power : DC 3.3V

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-31.38	-13	-18.38	-46.99	-37.68	2.51	8.81	V	Pass
5636	-33.54	-13	-20.54	-54.01	-41.25	2.99	10.70	V	Pass
7520	-36.01	-13	-23.01	-62.2	-44.54	3.59	12.12	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

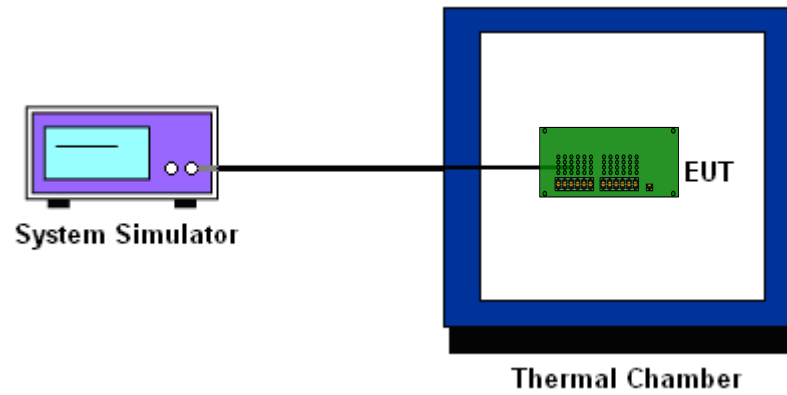



3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	29	0.03	-68	-0.08	
-10	27	0.03	-59	-0.07	
0	21	0.02	-52	-0.06	
10	18	0.02	-50	-0.06	
20	13	0.02	-47	-0.06	
30	7	0.01	-45	-0.05	
40	-13	-0.02	-39	-0.05	
50	-9	-0.01	-35	-0.04	
60	-16	-0.02	-30	-0.04	

Note:

- 1. The EUT stops transmitting at temperatures -30°C.
- 2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	-64	-0.03	98	0.05	
-10	-61	-0.03	-89	-0.05	
0	-59	-0.03	-82	-0.04	
10	-55	-0.03	-83	-0.04	
20	-51	-0.03	-81	-0.04	
30	-48	-0.03	-77	-0.04	
40	-43	-0.02	-73	-0.04	
50	-49	-0.03	-69	-0.04	
60	-45	-0.02	-72	-0.04	

Note:

1. The EUT stops transmitting at temperatures -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	-23	-0.03	
-10	-17	-0.02	
0	-15	-0.02	
10	-13	-0.02	
20	-16	-0.02	
30	-11	-0.01	
40	-8	-0.01	
50	-9	-0.01	
60	-12	-0.01	

Note:

1. The EUT stops transmitting at temperatures -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	-37	-0.02	
-10	-34	-0.02	
0	-36	-0.02	
10	-33	-0.02	
20	-31	-0.02	
30	-28	-0.01	
40	-33	-0.02	
50	-29	-0.02	
60	-30	-0.02	

Note:

1. The EUT stops transmitting at temperatures -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



Band :	CDMA2000 BC0	Channel :	384
Test Mode :	1xEV-DO Rev. A_RETAP 12288K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	-12	-0.01	
-10	-9	-0.01	
0	-7	-0.01	
10	-10	-0.01	
20	-8	-0.01	
30	-5	-0.01	
40	-4	0.00	
50	-7	-0.01	
60	-5	-0.01	

Note:

1. The EUT stops transmitting at temperatures -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



Band :	CDMA2000 BC1	Channel :	600
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	-15	-0.01	
-10	-13	-0.01	
0	-10	-0.01	
10	-12	-0.01	
20	-10	-0.01	
30	-9	0.00	
40	-7	0.00	
50	-8	0.00	
60	-9	0.00	

Note:

1. The EUT stops transmitting at temperatures -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.3	12	0.01	2.5	PASS
		3.0	-7	-0.01		
		3.6	15	0.02		
	EDGE 8	3.3	-47	-0.06		
		3.0	-45	-0.05		
		3.6	-49	-0.06		
GSM 1900 CH661	GPRS 8	3.3	47	0.02		
		3.0	43	0.02		
		3.6	50	0.03		
	EDGE 8	3.3	78	0.04		
		3.0	75	0.04		
		3.6	81	0.04		
WCDMA Band V CH4182	RMC 12.2Kbps	3.3	-16	-0.02		
		3.0	11	0.01		
		3.6	20	0.02		
WCDMA Band II CH9400	RMC 12.2Kbps	3.3	-36	-0.02		
		3.0	-28	-0.01		
		3.6	-42	-0.02		
CDMA2000 BC0 CH384	1xEV-DO Rev. A RETAP 12288K	3.3	-6	-0.01		
		3.0	-6	-0.01		
		3.6	-8	-0.01		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0 RTAP 153.6K	3.3	-9	0.00		
		3.0	-7	0.00		
		3.6	-11	-0.01		

Note: Normal Voltage = 3.3V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Jul. 26, 2012	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 30, 2010	Oct. 29, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Aug. 09, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB. GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
EMI TEST RECEIVER	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Aug. 21, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-1	159088	1GHz ~ 18GHz	Feb. 21, 2011	Feb. 20, 2012	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	112403	N/A	Feb. 22, 2011	Feb. 21, 2012	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP1O0546 as below.