

Global Product Compliance Laboratory  
600-700 Mountain Avenue  
Room 5B-108  
Murray Hill, New Jersey 07974-0636 USA



**TESTING**  
NVLAP LAB CODE: 100275-0

# Test Report

**Regulation:**  
FCC Part 15 and 27

**Client:**  
Nokia Mobility

**Product Evaluated:**  
TMO V1 SOHO B2B4 (B4 LTE) with NB-IoT Guard band

**Report Number:**  
TR-2018-0147-FCC15-27

**Date Issued:**  
September 04, 2018

This report shall not be reproduced, in whole or in part without the approval of Nokia Global Product Compliance Laboratory. This report must not be used by the recipient to claim product endorsement by NVLAP or any other agency of the U.S. Government.

# Table of Contents

<b>1. SYSTEM INFORMATION AND REQUIREMENTS .....</b>	<b>4</b>
1.1 INTRODUCTION .....	5
1.2 PURPOSE AND SCOPE.....	5
1.3 EUT DETAILS.....	5
1.3.1 <i>Test Requirements</i> .....	6
1.4 REFERENCE DOCUMENTS, TEST SPECIFICATIONS & PROCEDURES .....	6
1.4.1 <i>Test Specifications</i> .....	6
1.4.2 <i>Procedures</i> .....	7
1.4.3 <i>MEASUREMENT UNCERTAINTY</i> .....	7
1.5 EXECUTIVE SUMMARY.....	8
1.6 TEST CONFIGURATION FOR ALL ANTENNA PORT MEASUREMENTS.....	8
<b>2. FCC SECTION 2.1046 - RF POWER OUTPUT .....</b>	<b>9</b>
2.1 RF POWER OUTPUT .....	9
<b>3. FCC SECTION 2.1047 - MODULATION CHARACTERISTICS.....</b>	<b>11</b>
3.1 MODULATION CHARACTERISTICS.....	11
<b>4. FCC SECTION 2.1049 – OCCUPIED BANDWIDTH.....</b>	<b>12</b>
4.1 OCCUPIED BANDWIDTH.....	12
4.2 OCCUPIED BANDWIDTH/ EDGE OF BAND EMISSIONS .....	14
<b>4.2.1 <i>Occupied Bandwidth Results</i></b> .....	<b>14</b>
4.3 EDGE OF BAND EMISSIONS - SAMPLE PLOTS.....	15
<b>5. FCC SECTION 2.1051 - SPURIOUS EMISSIONS AT TRANSMIT ANTENNA PORT .....</b>	<b>16</b>
5.1 MEASUREMENT OF SPURIOUS EMISSIONS AT TRANSMIT ANTENNA PORT.....	16
5.1.1 <i>Spurious Emissions at Transmit Antenna Port Sample Plots</i> .....	17
5.1.2 <i>Spurious Emissions at Transmit Antenna Port - Photographs</i> .....	18
5.1.3 <i>Test Equipment</i> .....	18
<b>6. FCC SECTION 2.1053 AND PART 15.109 .....</b>	<b>19</b>
6.1 SECTION 2.1053 FIELD STRENGTH OF SPURIOUS EMISSIONS .....	19
<b>7. NVLAP CERTIFICATE OF ACCREDITATION .....</b>	<b>36</b>

**Revisions**

Date	Revision	Section	Change
8/31/2018	0		Initial Release

*Nokia Global Product Compliance Laboratory represents to the client that testing was done in accordance with standard procedures as applicable, and that reported test results are accurate within generally accepted commercial ranges of accuracy in accordance with the scope of our NVLAP Accreditation. Nokia Global Product Compliance reports only apply to the specific samples tested. This report is the property of the client. This report shall not be reproduced except in full without the written approval of the Nokia Global Product Compliance Laboratory.*


*Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA).*

*Nokia Global Product Compliance Laboratory represents to the client that the laboratory's accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.*

Prepared By:

Approved By:

Signed:  9/04/2018  
 Nilesch Patel  
 Compliance Engineer

Signed:  9/04/2018  
 Raymond Johnson  
 Technical Manager

Reviewed By:

Signed:  9/04/2018  
 Steve Gordon  
 Compliance Engineer

# 1. System Information and Requirements

<b>Equipment Under Test (EUT):</b>	TMO V1 SOHO B2B4 (B4 LTE) with NB-IoT Guard band
<b>Serial Number:</b>	Part 27 Testing: LBALLUASK 151807842 Part 15 Testing: LBALLUASK171100867
<b>Cell Name / Number</b>	Model: 9961 Home Cell V1
<b>FCC ID:</b>	H8N9961V1
<b>Company:</b>	NOKIA SOLUTIONS AND NETWORKS OY KARAPORTTI 3, FI-02610 ESPOO FINLAND
<b>Manufacturer:</b>	Askey Computer Corp 10F, No. 119, JIANKANG RD. ZHONGHE DIST. NEW TAIPEI CITY, 23585 Taiwan
<b>Test Requirement(s):</b>	47 CFR FCC Part 15 and Part 27
<b>Test Standard(s)</b>	<ul style="list-style-type: none"> <li>• 47 CFR FCC Parts 2, 27 and 15</li> <li>• KDB 971168 D01 Licensed DTS Guidance v02 June 4, 2013</li> <li>• KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013</li> </ul>
<b>Reference(s)</b>	<ul style="list-style-type: none"> <li>• ANSI C63.26 (2015)</li> <li>• ANSI C63.4 (2014)</li> </ul>
<b>Measurement Procedure(s):</b>	FCC-IC-OBSC – GPCL FCC and IC Occupied Bandwidth and Spurious Emission Test Procedure 3-15-2016 FCC-IC-OB - GPCL Occupied Bandwidth and Power Measurement Test Procedure 12-4-2017 FCC-IC-SE - GPCL Spurious Emissions Test Procedure 12-4-2017
<b>Test Date(s):</b>	July/August 2018
<b>Test Performed By:</b>	Nokia Global Product Compliance Laboratory 600-700 Mountain Ave. P.O. Box 636 Murray Hill, NJ 07974-0636
Nokia Global Product Compliance Laboratories is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP®) for specific services, listed on the Scope of Accreditation, for: Electromagnetic Compatibility and Telecommunications. This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009). <b>NVLAP LAB CODE:</b> 100275-0.	
<b>Product Engineer(s):</b>	Obi Okorie, Ron Remy
<b>Lead Engineer</b>	Steve Gordon
<b>Test Engineer (s):</b>	Jaideep Yadav, Eugene Mitchell, Mike Soli
<b>Test Results:</b> The TMO V1 SOHO B2B4 (B4 LTE) with NB-IoT Guard band, as <i>tested</i> met the above listed requirements. Report copies and other information not contained in this report are held by either the product engineer or in an identified file at the Global Product Compliance Laboratory in New Providence, NJ.	

### 1.1 Introduction


This Conformity Assessment Report applies to the TMO V1 SOHO B2B4 (B4 LTE) with NB-IoT Guard band, hereinafter referred to as the Equipment Under Test (EUT).

### 1.2 Purpose and Scope

The purpose of this document is to provide the testing data required for qualifying the EUT in compliance with FCC Parts 15 and 27, measured in accordance with the procedures set out in Section 2.1033 (c) (14) of the Rules.

The EUT was tested for Class II Permissive change to add NB-IoT Guard Band. Only 10, 15, and 20 MHz bandwidths were qualified during this testing.

### 1.3 EUT Details

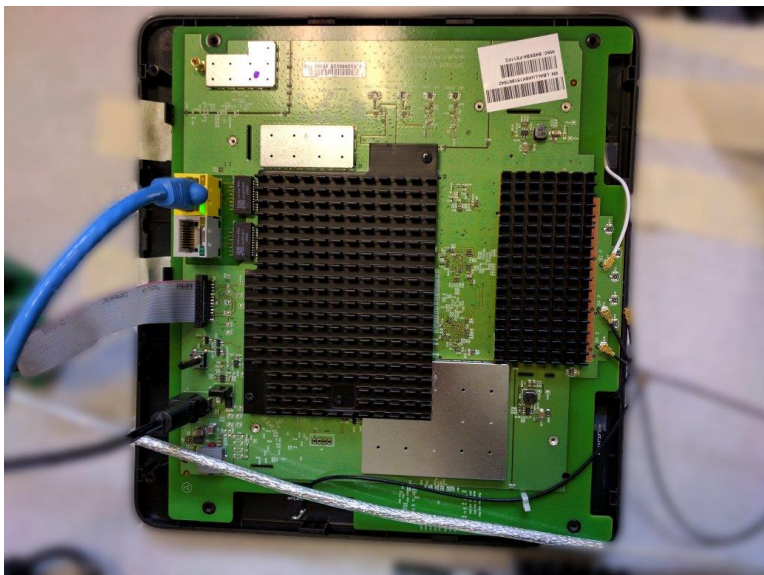

### 1.3.1 Test Requirements

Each required measurement is listed below:

47 CFR FCC Sections	Description of Tests	Test Required
2.1046	RF Power Output	Yes
2.1047	Modulation Characteristics	Yes
2.1049	(a) Occupied Bandwidth (b) Out-of-Band Emissions	Yes
2.1051	Spurious Emissions at Antenna Terminals	Yes
2.1053	Field Strength of Spurious Radiation	Yes

### 1.4 Reference Documents, Test Specifications & Procedures

A list of the applicable documents are provided in Section 1.0

#### 1.4.1 Test Specifications

- Title 47 Code of Federal Regulations, Federal Communications Commission Part 2
- Title 47 Code of Federal Regulations, Federal Communications Commission Part 15.
- Title 47 Code of Federal Regulations, Federal Communications Commission Part 27.

### 1.4.2 Procedures

1. FCC-IC-0B and FCC-IC-SE
2. ANSI C63.4 (2014) entitled: "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz", American National Standards Institute, Institute of Electrical and Electronic Engineers, Inc., New York, NY 10017-2394, USA.
3. FCC KDB 971168 D01 Power Measurement Digital Systems v02r02 Oct 2014  
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013

### 1.4.3 MEASUREMENT UNCERTAINTY

The results of the calculations to estimate uncertainties for the several test methods and standards are shown in the Table below. These are the worst-case values.

**Worst-Case Estimated Measurement Uncertainties**

Standard, Method or Procedure	Condition	Frequency MHz	Expanded Uncertainty (k=2)
a. Classical Emissions, (e.g., ANSI C63.4, CISPR 11, 14, 22, etc., using ESHS 30,	Conducted Emissions	0.009 - 30	±3.5 dB
	Radiated Emissions (AR-6 Semi-Anechoic Chamber)	30 MHz – 200MHz H 30 MHz – 200 MHz V 200 MHz – 1000 MHz H 200 MHz – 1000 MHz V 1 GHz - 18 GHz	±5.1 dB ±5.1 dB ±4.7 dB ±4.7 dB ±3.3 dB


Antenna Port Test	Signal Bandwidth	Frequency Range	Expanded Uncertainty (k=2), Amplitude
Occupied Bandwidth, Edge of Band, Conducted Spurious Emissions	10 Hz	9 kHz to 20 MHz	1.78 dB
	100 Hz	20 MHz to 1 GHz	
	10 kHz to 1 MHz	1 GHz to 10 GHz	
	1MHz	10 GHz to 40 GHz:	
RF Power	10 Hz to 20 MHz	50 MHz to 18 GHz	0.5 dB

### 1.5 Executive Summary

Requirement	Description	Result
47 CFR FCC Parts 2 and 27		
2.1046	RF Power Output Peak to Average Power Ratio	COMPLIES
2.1047	Modulation Characteristics	COMPLIES
2.1049	Occupied Bandwidth (a) Emissions Signal Bandwidth (b) Occupied Bandwidth/ Edge of Band Emissions	COMPLIES
2.1051	Spurious Emissions at Antenna Terminals	COMPLIES
2.1053	Field Strength of Spurious Radiation	COMPLIES

1. **COMPLIES** - Passed all applicable tests.
2. **N/A** – Not Applicable.
3. **NT** – Not Tested.

### 1.6 Test Configuration for all Antenna Port Measurements.

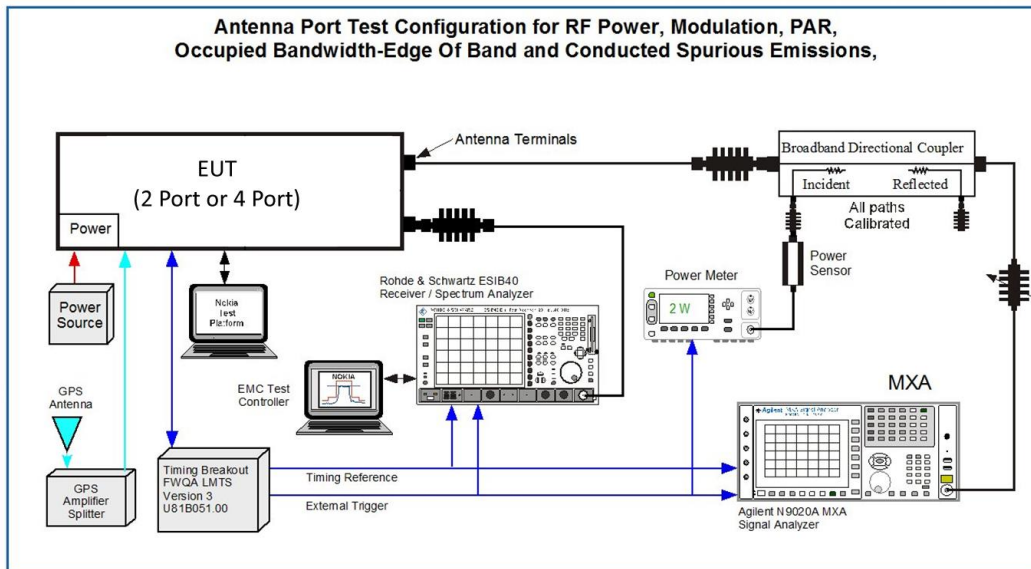



## 2. FCC Section 2.1046 - RF Power Output

### 2.1 RF Power Output

This test is a measurement of the total RF power level transmitted at the antenna-transmitting terminal. The product was configured for test as shown in Figure 1.6 above and allowed to warm up and stabilize per KDB 971168 D01 and ANSI C63.26.

Power measurements were made with a broadband Power Meter in the average mode. Before the testing was started, the Base Station was given a sufficient “warm-up” period as required.

The Data is within the parameters as previously filed.

NOTE: Only a sample of all the plots taken have been used in this report. The full suite of raw data resides at the MH, New Jersey location.

Tabular Data – Low Guard Band Channel RF Power

Modulation	Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Channel MHz	RF Power dBm	Channel MHz	RF Power dBm	Channel MHz	RF Power dBm
64QAM	2115	18.84	NT	NT	2120	19.46
	2132.5	18.91	NT	NT	2132.5	19.30
	2150	18.74	NT	NT	2145	18.94
QPSK+16QAM	2115	19.02	2117.5	18.66	2120	19.65
	2132.5	18.95	2132.5	18.50	2132.5	19.22
	2150	18.59	2147.5	18.34	2145	18.93







NT=Not Tested

Tabular Data – High Guard Band Channel RF Power

Modulation	Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Channel MHz	RF Power dBm	Channel MHz	RF Power dBm	Channel MHz	RF Power dBm
64QAM	2115	19.14	NT	NT	2120	19.34
	2132.5	18.96	NT	NT	2132.5	19.11
	2150	18.70	NT	NT	2145	18.87
QPSK+16QAM	2115	18.98	2117.5	18.88	2120	19.54
	2132.5	19.01	2132.5	18.49	2132.5	19.05
	2150	18.85	2147.5	18.46	2145	18.88

NT=Not Tested

Sample Plots – Channel RF Power

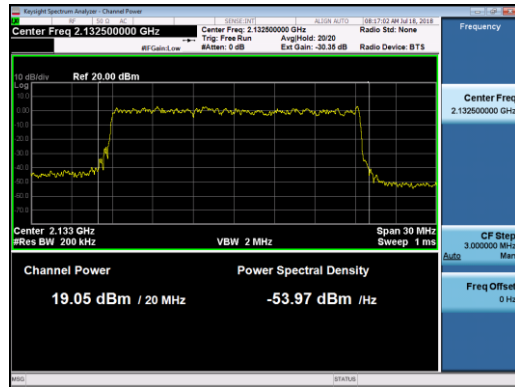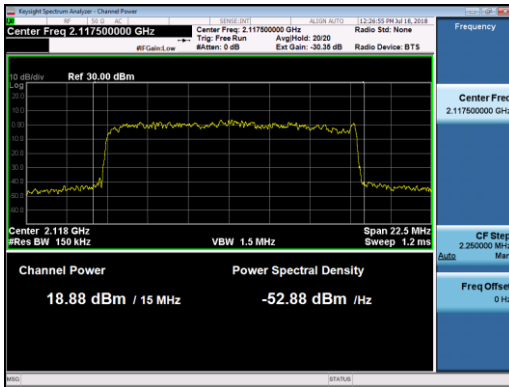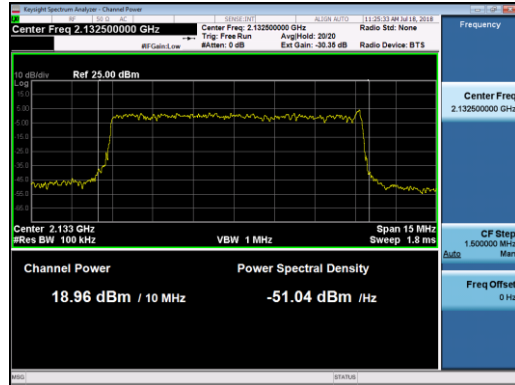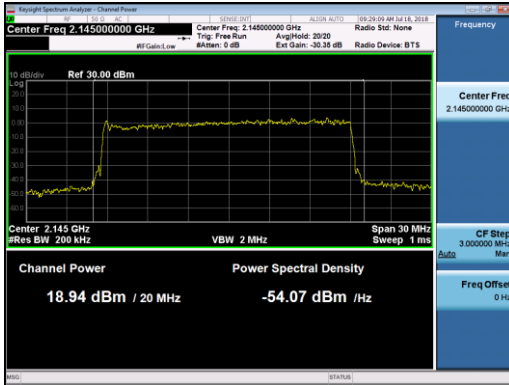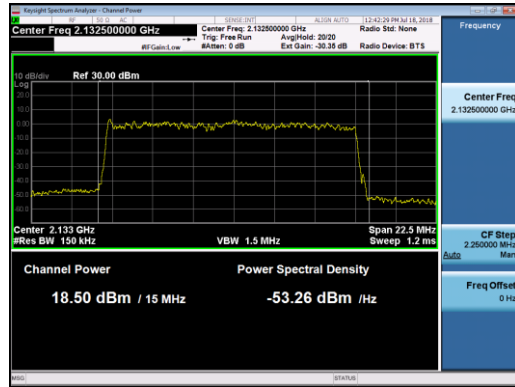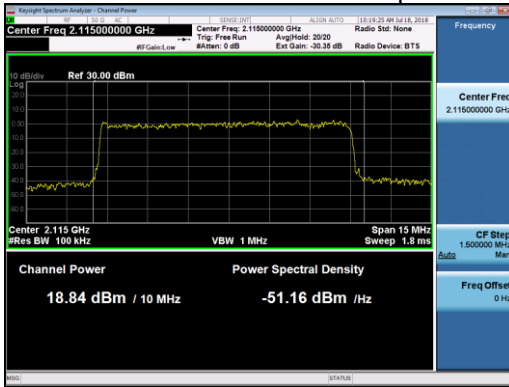

### 3. FCC Section 2.1047 - Modulation Characteristics

#### 3.1 Modulation Characteristics


The product supports LTE FDD technologies. LTE utilizes Orthogonal Frequency Division Multiplexing (OFDM) which splits the carrier frequency bandwidth into many small subcarriers. Each individual subcarrier can be modulated with a combined QPSK + 16QAM, or 64QAM digital modulation formats.

In QPSK, there are 4 possible symbol states and each symbol carries 2 bits of information. In 16QAM, there are 16 possible symbol states and each 16-QAM symbol carries 4 bits of information. In 64QAM, there are 64 possible symbol states and each 64-QAM symbol carries 6 bits of information. The higher-order modulations, where the constellations become more dense, are more sensitive to poor channel conditions than the lower-order modulation. The Narrow Band Internet of Things (NB-IoT) increases the power to a single data stream for a low data rate (Narrow Band) Internet of Things coverage. Spectrally it looks like a single peak at the edge of the transmit signal.

The RF signal at the antenna port was demodulated and verified for correctness of the modulation signal used before each test was performed. For these products the operation with QPSK+16QAM and 64QAM modulation with NB-IoT was evaluated and verified.

NOTE: Only a sample of all the data taken have been used in this report. The full suite of raw data resides at the MH, New Jersey location.

Sample Plots – Modulation Characteristics

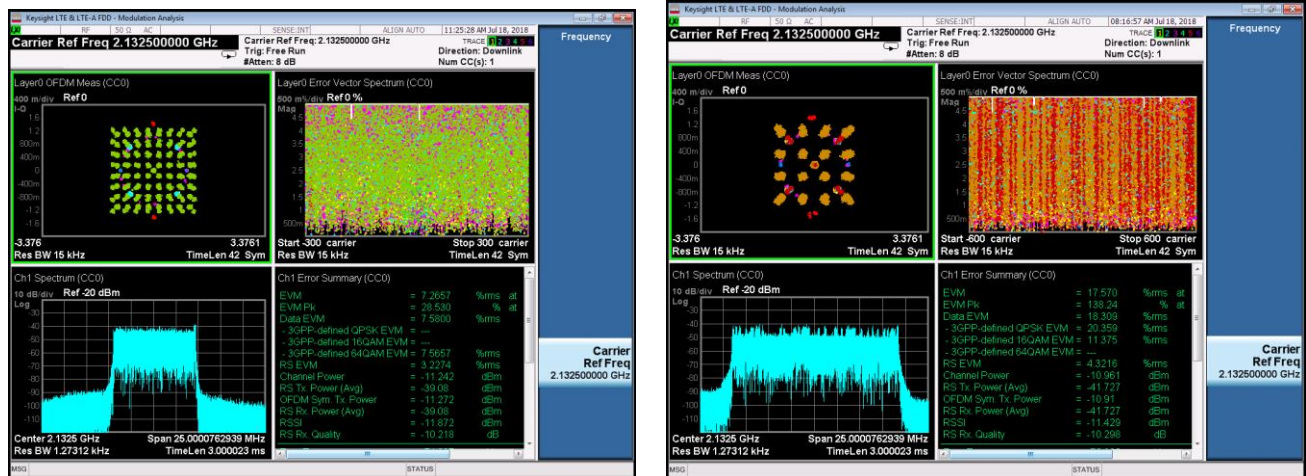

## 4. FCC Section 2.1049 – Occupied Bandwidth

### 4.1 Occupied Bandwidth

In 47CFR 2.1049 the FCC requires:

“The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.”

This required measurement is the 99% Occupied Bandwidth, also called the designated signal bandwidth and needs to be within the parameters of the products specified emissions designator. The -26 dB bandwidth values were also recorded.

During these measurements it is customary to evaluate the Edge of Band emissions at block/band edges.

The transmitted signal occupied bandwidth was measured using a Keysight MXA Signal Analyzer. All emissions were within the parameters as previously filed. Sample Charts are below.

Tabular Data – Low Guard Band Occupied Bandwidth

Modulation	Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Channel MHz	OBW MHz	Channel MHz	OBW MHz	Channel MHz	OBW MHz
64QAM	2115	9.1234	NT	NT	2120	19.954
	2132.5	9.1426	NT	NT	2132.5	18.065
	2150	9.1357	NT	NT	2145	18.069
QPSK+16QAM	2115	9.1192	2117.5	13.529	2120	17.916
	2132.5	9.1440	2132.5	13.579	2132.5	18.044
	2150	9.1399	2147.5	13.586	2145	18.031






NT=Not Tested

Tabular Data – High Guard Band Occupied Bandwidth

Modulation	Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Channel MHz	OBW MHz	Channel MHz	OBW MHz	Channel MHz	OBW MHz
64QAM	2115	9.1065	NT	NT	2120	17.987
	2132.5	9.1383	NT	NT	2132.5	18.077
	2150	9.1178	NT	NT	2145	17.993
QPSK+16QAM	2115	9.1026	2117.5	13.516	2120	18.006
	2132.5	9.1413	2132.5	13.611	2132.5	18.096
	2150	9.0964	2147.5	13.507	2145	17.977

NT=Not Tested

Sample Plots – Occupied Bandwidth

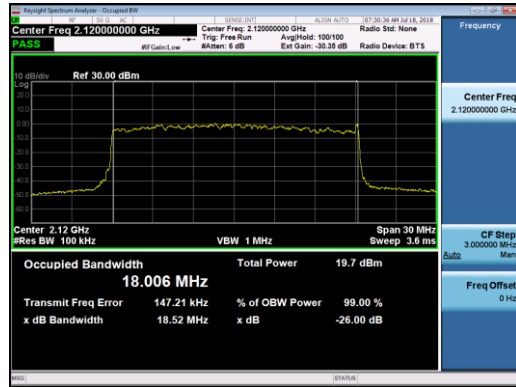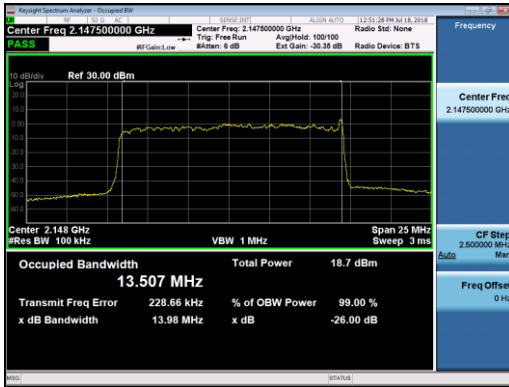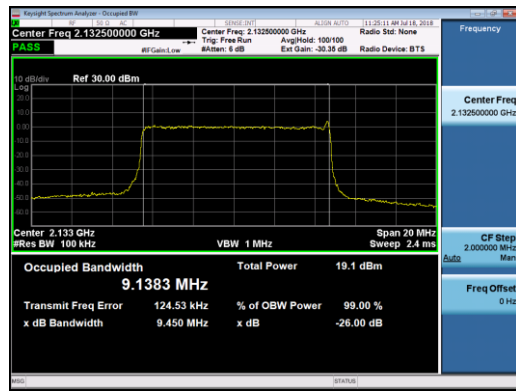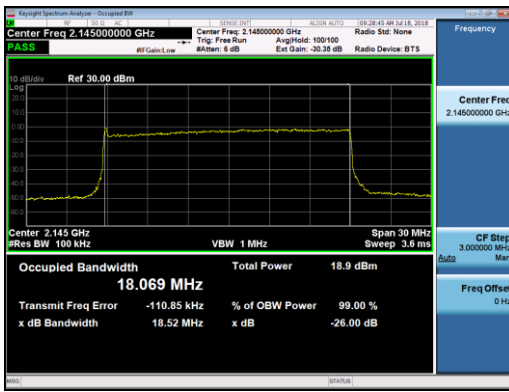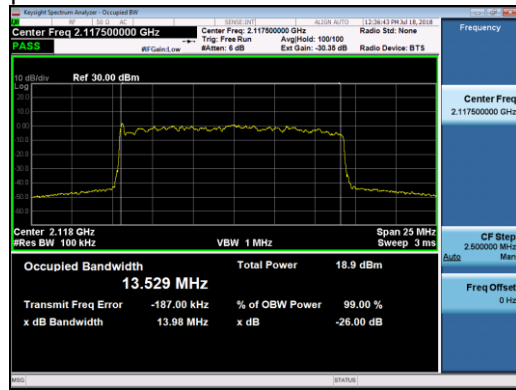

## 4.2 Occupied Bandwidth/ Edge of band Emissions

The Edge of Band emissions of the EUT at the external antenna connector (EAC) were measured using a Keysight MXA Signal Analyzer. The RF power level was continuously measured using a RF broadband power meter. The RF output from the EAC port to spectrum analyzer was reduced (to an amplitude usable by the spectrum analyzer) by using a calibrated attenuator and test coupler. The path attenuation was offset on the display and the signal for single carrier was adjusted to the corrected RF power level for the resolution bandwidth used for the transmit signal. All mask values were adjusted based upon the designated signal bandwidth and measurement bandwidths. The Top of Mask corresponds to the set rated power level as confirmed by the RF power meter.

### 4.2.1 Occupied Bandwidth Results.


The Occupied Bandwidth was measured for all three modulations, at each signal bandwidth and at left center and right side of band. The mask on the plots meet the Block Edge requirements as specified in 47CFR 27.53.

All of the measurements met the requirements of Part 27.53 when measured per Part 2-1049.


NOTE: Only a sample of all the data taken have been used in this report. The full suite of data resides at the MH, New Jersey location.

4.3 Edge of band Emissions - Sample Plots


10 MHz Left Side of Band (QPSK)

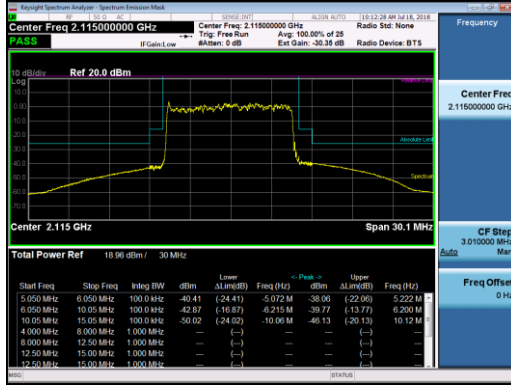


10 MHz Right Side of Band (QPSK)

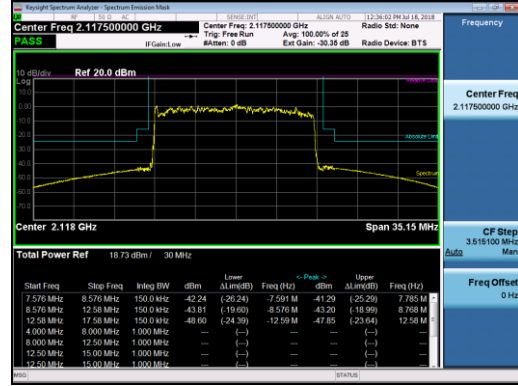


15 MHz Left Side of Band (QPSK+16QAM)

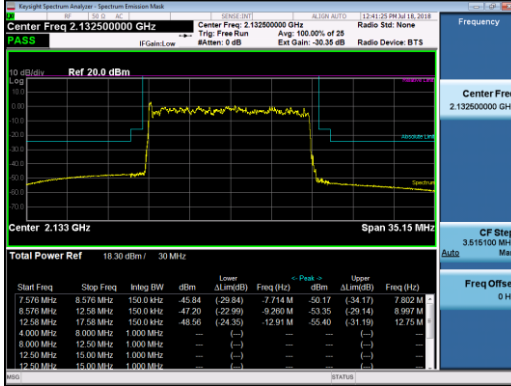


15 MHz Right Side of Band (QPSK+16QAM)

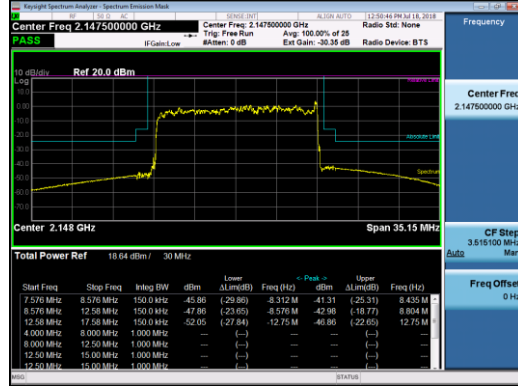

20 MHz Left Side of Band (QPSK)

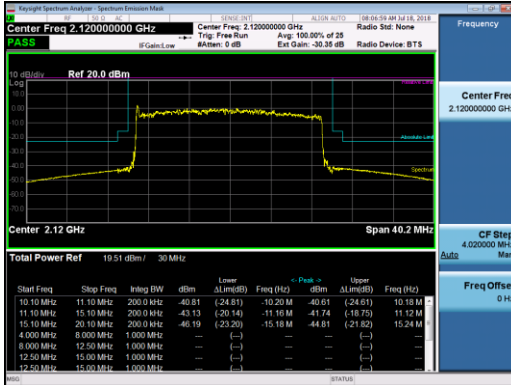

20 MHz Right Side of Band (QPSK+16QAM)

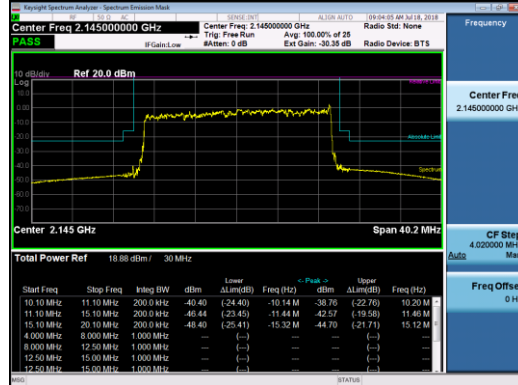

## 5. FCC Section 2.1051 - Spurious Emissions at Transmit Antenna Port

### 5.1 Measurement of Spurious Emissions at Transmit Antenna Port





Spurious Emissions at the transmit-antenna terminals were investigated over the frequency range of 10 MHz to beyond the 10<sup>th</sup> harmonic of the specific transmit band. For this band of operation, the measurements were performed up to 22 GHz. Measurements were made using a Keysight MXA Signal Analyzer. The RF output from the transmitter was reduced (to an amplitude usable by the receivers) using calibrated attenuators. The RF power level was continuously monitored via a coupled RF Power Meter.

The required emission limitation is specified as appropriate in 27.53. The measured spurious emission levels were plotted for the frequency range as specified in 2.1057. There were no reportable emissions. Data below documents performance up to 22 GHz.



NOTE: Only a sample of all the data taken have been used in this report. The full suite of raw data resides at the MH, New Jersey location.



### 5.1.1 Spurious Emissions at Transmit Antenna Port Sample Plots

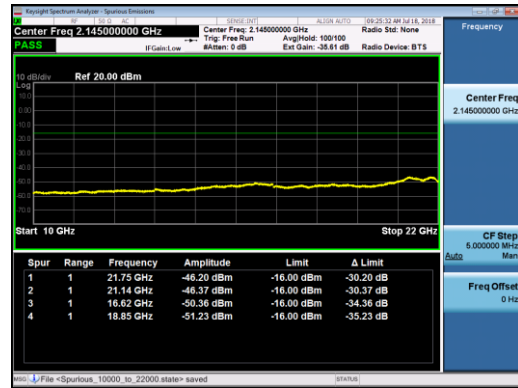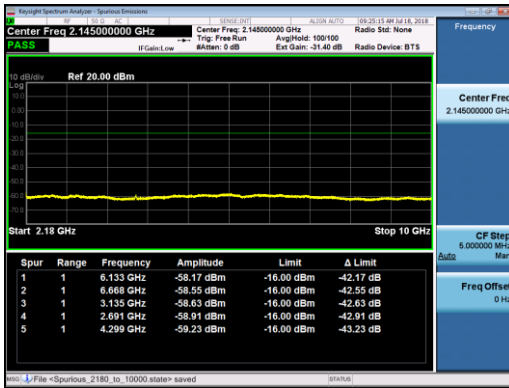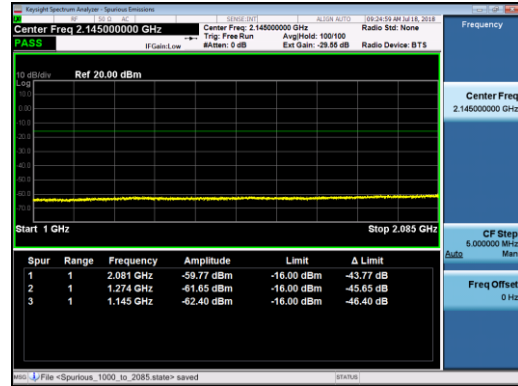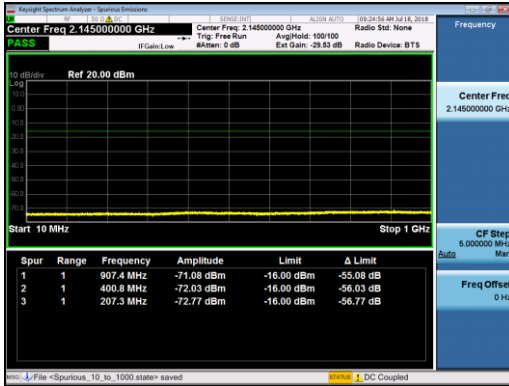

### 5.1.2 Spurious Emissions at Transmit Antenna Port - Photographs

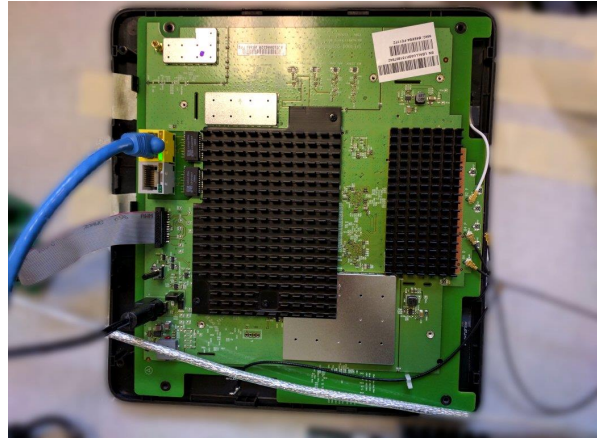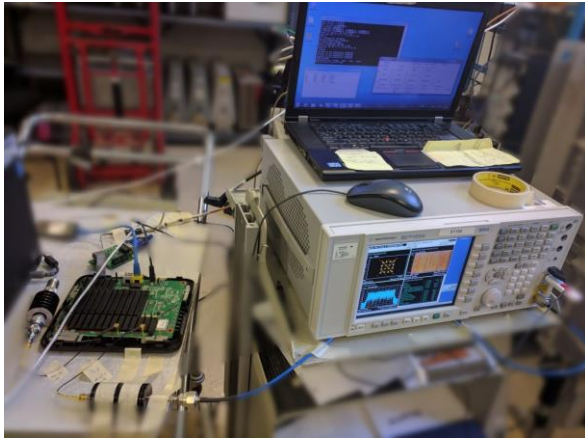

### 5.1.3 Test Equipment

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due	Calibration Type	Status
<a href="#">E1152</a>	Agilent Technologies	MXA Signal Analyzer	20Hz-26.5GHz Analyzer	N9020A	MY53420147	2017-03-13	2019-03-13	Requires Calibration	Active
<a href="#">E130</a>	Hewlett Packard	HP-IB Extender	HPIB Extender	37204	3212U23686			Calibration Not Required	Active

## 6. FCC Section 2.1053 and Part 15.109

### 6.1 Section 2.1053 Field Strength of Spurious Emissions

Field strength measurements of radiated spurious emissions were made in 3m Semi-Anechoic Chambers the of Global Product Compliance Laboratories of Nokia Bell Labs in Murray Hill NJ. A complete description and full measurement data for the site is on file with the Commission (FCC File 515091).

The spectrum from 30 MHz to beyond the tenth harmonic of the carrier, 26.5 GHz, was searched for spurious radiation. Measurements were made using both horizontally and vertically polarized broadband antennas. Per FCC regulations, the comparison of out of band spurious emissions directly to the limit is appropriately made using the substitution method. However, when the emissions are more than 20 dB below the specification limit, the use of field strength measurements for compliance determination is acceptable and those emissions are considered not reportable (Section 2.1053 and the FCC Interpretive database for 2.1053). For this case the evaluation of acceptable radiated field strength is as follows.

Sections 2.1053 and 27.53 contain the requirements for the levels of spurious radiation as a function of the level of the unmodulated carrier. The reference level for the unmodulated carrier is calculated as the field produced by an ideal dipole excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 676, 4<sup>th</sup> edition, IT&T Corp.

$$E = [(30 \cdot P)^{1/2}] / R$$

$$20 \log (E \cdot 10^6) - (43 + 10 \log P) = 82.23 \text{ dB}\mu\text{V/m}$$

Where:

E = Field Intensity in Volts/meter      P = Transmitted Power in Watts

R = Measurement distance in meters = 3 m

The Part 27 Limit is 62.23 dB $\mu$ V/m at 3m and 91.77 dB $\mu$ V/m at 1m

The Part 27 non-report level is 62.23 dB $\mu$ V/m at 3m.

The FCC Part 15 Class B limit is 54 dB $\mu$ V/m at 3m.


The calculated emission levels were found by:

$$\text{Measured level (dB}\mu\text{V)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB)} = \text{Field Strength (dB}\mu\text{V/m)}$$

#### RESULTS:

For compliance with 47CFR Parts 2 and 27, the field strength of any spurious radiation, measured at 3m, is required to be less than 82.23 dB $\mu$ V/meter (82.23 @ 3m). Emissions equal to or less than 62.23 dB $\mu$ V/meter at 3m are not reportable and may be verified using field strength measurements and broadband antennas. Over the out of band spectrum investigated from 30 MHz to beyond the tenth harmonic of the carrier (up to 26.5GHz), no reportable spurious emissions were detected. A representative set of measurement scans are included below.

T12 RE 30 MHz – 200 MHz FCCB\_64QAM

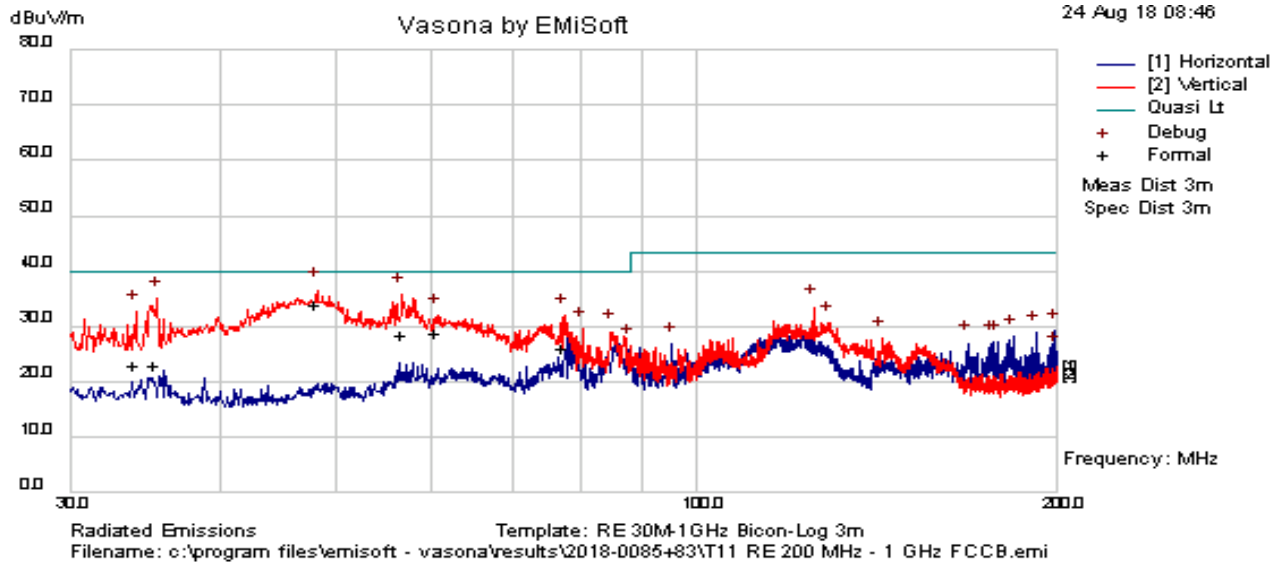

<b>Results Title:</b>	RE 30M-1GHz Bicon-Log 3m
<b>File Name:</b>	c:\program files\emisoft - vasona\results\2018-148\T12 RE 30 MHz - 200 MHz FCCB.emi
<b>Test Laboratory:</b>	GPCL AR6MH 23C 67%RH, 995mB
<b>Test Engineer:</b>	SEG
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	Nokia
<b>EUT Details:</b>	TMO V1 B@B\$ (B4 LTE) Model: 9961 Home Cell V1; P/N: 3JRO9051ABEC; S/N: LBALLUASK171100867 Rev:02; FCC ID:H8N9961V1. TX Output: 2115 MHz, 10 MHz BW, 64QAM, 20 dBm, NB-IOT, Guardband. TMO V2 SOHO B2B4 (B4 LTE) Part 15/Part 27 Also identified as 4G LTE Cell Spot V2V2 Model: SS2FII Femtocell Multiband SOHO [ S/N: LBALLUAK180306783]; FCC ID: H8NSS2FII; TX Output: 2150 MHz, 10 MHz BW, 64QAM, 21 dBm, NB-IOT, Guard band
<b>Configuration :</b>	Radiated Emissions 30MHz -200 MHz FCC Part 15 B Class B, RCVR E908, Preamp E512, 6dB pad(E889), Bicon Antenna E051, 3M Distance offset, ESI- Preview BW (30 kHz RBW/ 30 KHz VBW); Formal BW (default). Analyzer Reference Level: 100 dBuV, Internal Attenuation: 10 dB. Project 2018-0148 / 147
<b>Date:</b>	2018-08-24 11:11:49

FORMAL DATA

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
48.026	44.64	6.77	-21	30.45	Quasi Max	V	125	158	40	-9.55	Pass	
60.529	41.2	6.86	-22.8	25.25	Quasi Max	V	150	168	40	-14.75	Pass	
56.707	40.48	6.83	-22.3	24.99	Quasi Max	V	192	151	40	-15.01	Pass	
77.553	39.73	7.05	-24.3	22.47	Quasi Max	V	188	9	40	-17.53	Pass	
33.994	31.48	6.75	-18.7	19.56	Quasi Max	V	113	40	40	-20.44	Pass	
35.299	31.56	6.75	-18.9	19.44	Quasi Max	V	294	1	40	-20.56	Pass	

**PREVIEW  
 DATA**


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Poi (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margi n (dB)	Pass /Fail	Comments
48.0842	50.82	6.77	-21	36.61	Preview	V	105	90	40	-3.39	Pass	
56.6453	51.11	6.83	-22.3	35.64	Preview	V	205	0	40	-4.36	Pass	
35.3868	47.13	6.75	-18.9	35.01	Preview	V	10 5	45	40	-4.99	Pass	
33.9439	44.53	6.75	-18.7	32.62	Preview	V	10 5	45	40	-7.38	Pass	
77.4228	49.23	7.04	-24.3	32	Preview	V	20 5	0	40	-8	Pass	
60.5892	47.79	6.86	-22.8	31.82	Preview	V	105	270	40	-8.18	Pass	
125.038	45.89	7.51	-19.9	33.53	Preview	V	105	180	43.5	-9.97	Pass	
80.3086	47.23	7.09	-24.8	29.54	Preview	V	105	135	40	-10.46	Pass	
84.9259	46.52	7.16	-24.7	28.99	Preview	V	105	135	40	-11.01	Pass	
128.693	42.77	7.53	-19.7	30.64	Preview	V	105	135	43.5	-12.86	Pass	
199.218	39.3	7.83	-17.9	29.26	Preview	H	190	270	43.5	-14.24	Pass	
191.976	39.45	7.81	-18.3	28.93	Preview	H	105	270	43.5	-14.57	Pass	
183.535	39.37	7.78	-19.1	28.1	Preview	H	105	270	43.5	-15.4	Pass	
142.641	39.45	7.6	-19.3	27.78	Preview	V	105	45	43.5	-15.72	Pass	
177.96	38.8	7.75	-19.4	27.17	Preview	H	190	270	43.5	-16.33	Pass	
176.762	38.87	7.75	-19.5	27.16	Preview	H	105	270	43.5	-16.34	Pass	
168.517	38.96	7.72	-19.7	26.94	Preview	H	190	270	43.5	-16.56	Pass	
95.3146	42.9	7.29	-23.4	26.75	Preview	H	290	90	43.5	-16.75	Pass	
88.004	43.52	7.2	-24.3	26.4	Preview	V	105	180	43.5	-17.1	Pass	
199.896	34.94	7.84	-17.9	24.92	Preview	H	190	90	43.5	-18.58	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

FORMAL DATA

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
860.164	38.27	9.85	-8.35	39.77	Quasi Max	H	104	185	46	-6.23	Pass	
556.79	41.55	8.99	-12.8	37.77	Quasi Max	V	100	309	46	-8.23	Pass	
595.178	39.69	9.1	-12.2	36.58	Quasi Max	V	117	312	46	-9.42	Pass	
491.523	39.66	8.79	-12.6	35.83	Quasi Max	V	126	299	46	-10.17	Pass	
415.994	41.77	8.56	-15.5	34.86	Quasi Max	V	115	109	46	-11.14	Pass	
397.317	39.69	8.5	-15.7	32.44	Quasi Max	V	139	226	46	-13.56	Pass	

T11 RE 200 MHz 1 GHz FCCB\_64QAM

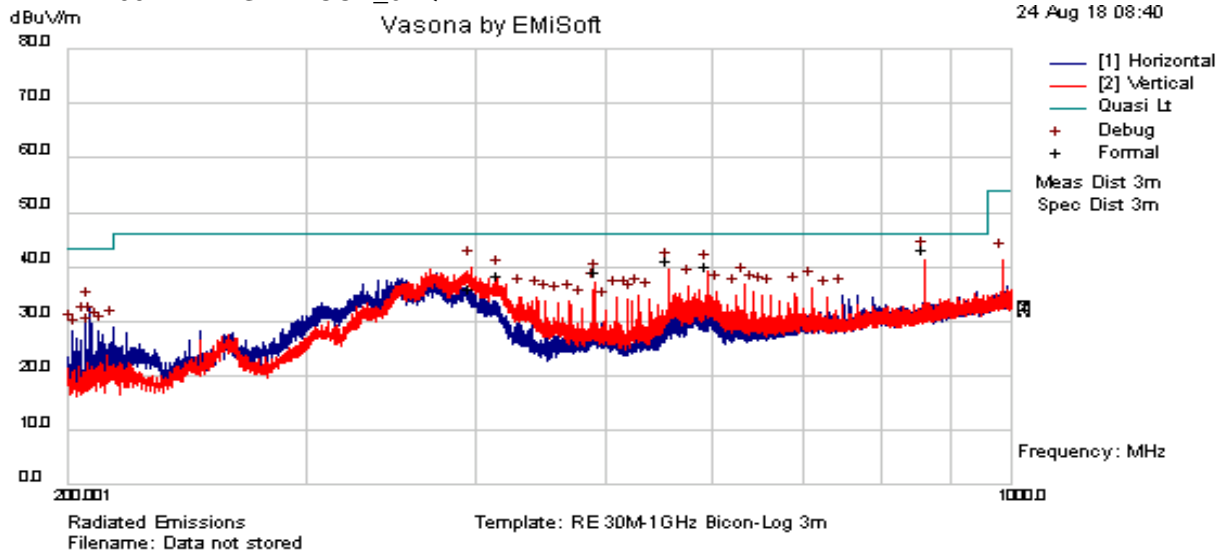


<b>Results Title:</b>	RE 30M-1GHz Bicon-Log 3m
<b>File Name:</b>	c:\program files\emisoft - vasona\results\2018-0148\T11 RE 200 MHz - 1 GHz FCCB.emi
<b>Test Laboratory:</b>	GPCL AR6MH 23C 67%RH, 995mB
<b>Test Engineer:</b>	MJS / SEG
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	Nokia
<b>EUT Details:</b>	TMO V1 B@B\$ (B4 LTE) Model: 9961 Home Cell VI; P/N: 3JRO9051ABEC; S/N: LBALLUASK171100867 Rev:02; FCC ID:H8N9961V1. TX Output: 2115 MHz, 10 MHz BW, 64QAM, 20 dBm, NB-IOT, Guardband. TMO V2 SOHO B2B4 (B4 LTE) Part 15/Part 27 Also identified as 4G LTE Cell Spot V2V2 Model: SS2FII Femtocell Multiband SOHO [ S/N: LBALLUAK180306783]; FCC ID: H8NSS2FII; TX Output: 2150 MHz, 10 MHz BW, 64QAM, 21 dBm, NB-IOT, Guard band
<b>Configuration :</b>	Radiated Emissions 200MHz -1GHz FCC Part 15 B Class B, RCVR E908, Preamp E512, 6dB pad(E889), Log-Periodic Antenna E060, 3M Distance offset, ESI- Preview BW (30 kHz RBW/ 30 KHz VBW); Formal BW (default). Analyzer Reference Level: 100 dBuV, Internal Attenuation: 10 dB. Project 2018-0148 / 147
<b>Date:</b>	2018-08-24 08:46:39

**PREVIEW DATA**

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
860.14	39.9	9.85	-8.35	41.39	Preview	H	105	180	46	-4.61	Pass	
397.359	46.99	8.5	-15.7	39.75	Preview	V	105	135	46	-6.25	Pass	
556.846	43.32	8.99	-12.8	39.55	Preview	V	105	315	46	-6.45	Pass	
595.323	42.17	9.1	-12.2	39.06	Preview	V	105	315	46	-6.94	Pass	
416.02	45.1	8.56	-15.5	38.18	Preview	V	105	90	46	-7.82	Pass	
491.531	41.06	8.79	-12.6	37.23	Preview	V	105	270	46	-8.77	Pass	
633.607	39.13	9.2	-11.6	36.73	Preview	V	105	135	46	-9.27	Pass	
576.084	39.92	9.04	-12.5	36.48	Preview	V	105	315	46	-9.52	Pass	
710.369	36.83	9.4	-10.1	36.09	Preview	V	105	0	46	-9.91	Pass	
489.703	39.61	8.78	-12.7	35.67	Preview	V	105	315	46	-10.33	Pass	
643.419	37.71	9.23	-11.5	35.48	Preview	V	105	0	46	-10.52	Pass	
604.749	38.2	9.12	-12.1	35.27	Preview	V	105	315	46	-10.73	Pass	
691.226	36.31	9.34	-10.6	35.1	Preview	V	105	0	46	-10.9	Pass	
652.846	36.89	9.25	-11.3	34.83	Preview	V	105	135	46	-11.17	Pass	
527.892	38.94	8.9	-13.1	34.75	Preview	V	105	315	46	-11.25	Pass	
748.846	35.03	9.52	-9.81	34.74	Preview	H	105	225	46	-11.26	Pass	
623.892	37.31	9.18	-11.8	34.73	Preview	V	105	180	46	-11.27	Pass	
662.561	36.57	9.27	-11.2	34.68	Preview	V	105	0	46	-11.32	Pass	
207.187	44.57	7.86	-20.3	32.17	Preview	H	105	270	43.5	-11.33	Pass	
431.988	41.06	8.61	-15.2	34.48	Preview	V	105	135	46	-11.52	Pass	
729.703	34.88	9.46	-9.88	34.46	Preview	V	105	0	46	-11.54	Pass	
444.974	40.85	8.65	-15.1	34.45	Preview	V	105	45	46	-11.55	Pass	
508.942	38.18	8.84	-12.6	34.42	Preview	V	105	315	46	-11.58	Pass	
518.369	38.19	8.87	-12.9	34.17	Preview	V	105	45	46	-11.83	Pass	
537.703	38.17	8.93	-13	34.07	Preview	V	105	135	46	-11.93	Pass	
451.323	39.9	8.67	-14.9	33.65	Preview	V	105	135	46	-12.35	Pass	
470.273	38.72	8.73	-13.8	33.65	Preview	V	105	135	46	-12.35	Pass	
522.024	37.65	8.88	-13	33.55	Preview	V	390	270	46	-12.45	Pass	
460.846	38.85	8.7	-14.3	33.21	Preview	V	105	90	46	-12.79	Pass	
983.074	37.16	10.16	-6.15	41.17	Preview	V	105	225	54	-12.83	Pass	
479.988	36.97	8.75	-13.3	32.47	Preview	V	105	225	46	-13.53	Pass	
205.776	42.04	7.86	-20.3	29.63	Preview	H	105	270	43.5	-13.87	Pass	
207.981	42.02	7.86	-20.3	29.63	Preview	H	105	90	43.5	-13.87	Pass	
499.226	35.46	8.81	-12.2	32.07	Preview	V	105	315	46	-13.93	Pass	
215.563	41.31	7.89	-20.3	28.93	Preview	H	105	90	43.5	-14.57	Pass	
210.273	40.76	7.87	-20.3	28.37	Preview	H	105	90	43.5	-15.13	Pass	
201.015	40.53	7.84	-20.3	28.1	Preview	H	190	270	43.5	-15.4	Pass	
211.948	40.01	7.88	-20.3	27.63	Preview	H	190	90	43.5	-15.87	Pass	
207.407	39.77	7.86	-20.3	27.38	Preview	H	105	270	43.5	-16.12	Pass	
202.778	39.4	7.85	-20.3	26.98	Preview	H	105	270	43.5	-16.52	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T2 RE 1G-3.5G V1

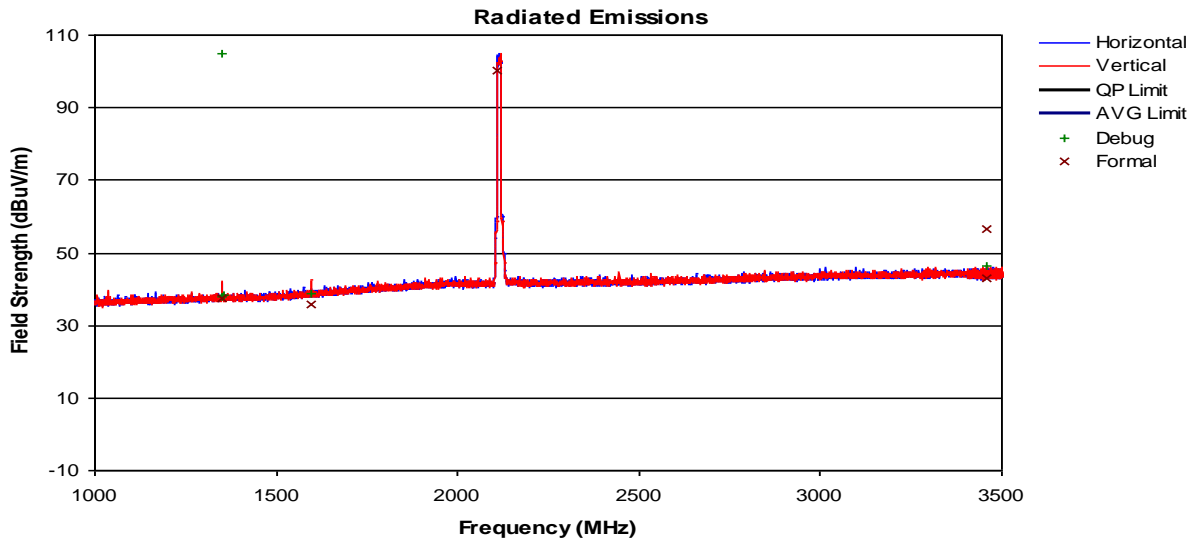

<b>Results Title:</b>	Radiated E 3m 1GHz-18GHz
<b>File Name:</b>	c:\program files\emisoft - vasona\results\femtocell_2018-0148_0147\RE 1- 3.5 GHz_V1.emi
<b>Test Laboratory:</b>	GPCL AR5-MH 22C, 67%RH, 996mB
<b>Test Engineer:</b>	EEM
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	
<b>EUT Details:</b>	TMO V1 B@B\$ (B4 LTE) Model:9961 Home Cell VI; P/N: 3JRO9051ABEC; S/N:LBALLUASK171100867 Rev:02 ; FCC ID:H8N9961V1. TX Output: 2115 MHz, 10 MHz BW, 256QAM, 21 dBm, NB-IOT, Guardband
<b>Configuration :</b>	Radiated Emissions 1 -3.5 GHz FCC Part 15 B Class B, RCVR E954, Preamp E1166, Attenuator: 10 dB (E568), Horn Antenna E0573, 3M Distance offset, ESU using Peak and Average Detector. Driver Modified to address overload condition; Preview BW (100 kHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW). Analyzer Reference Level: 115 dBuV, Internal Atten: 10 dB. Official Scan #1
<b>Date:</b>	2018-07-20 14:40:52

FORMAL DATA

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
2110.37	96.29	13.68	-9.85	100.12	AvgMax	H	173	129	54	46.12	Fail	Exempt
3457.56	36.34	14.54	-7.85	43.02	AvgMax	V	257	255	54	-10.98	Pass	
1351.66	38.58	13.02	-14.1	37.53	AvgMax	H	260	157	54	-16.47	Pass	
3457.56	49.95	14.54	-7.85	56.64	Quasi Max	V	257	255	74	-17.36	Pass	
1597.39	35.3	13.23	-12.8	35.73	AvgMax	H	113	106	54	-18.27	Pass	
1356.69	35.52	13.03	-14.1	34.49	AvgMax	V	240	256	54	-19.51	Pass	
1358.39	35.5	13.03	-14.1	34.47	AvgMax	H	359	97	54	-19.53	Pass	
1597.39	48.8	13.23	-12.8	49.23	Quasi Max	H	113	106	74	-24.77	Pass	
1351.66	50.1	13.02	-14.1	49.05	Quasi Max	H	260	157	74	-24.95	Pass	
1356.69	48.87	13.03	-14.1	47.84	Quasi Max	V	240	256	74	-26.16	Pass	



**FORMAL DATA**


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
1358.39	48.53	13.03	-14.1	47.5	Quasi Max	H	359	97	74	-26.5	Pass	
2110.37	-3.84	13.68	-9.85	0	Quasi Max	H	173	129	74	-74	Pass	

**PREVIEW DATA**

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
1351.66	106.04	13.02	-14.1	104.99	Debug	H	190	135	54	50.99	Fail	
3457.56	39.58	14.54	-7.85	46.27	Preview	V	202	315	54	-7.73	Pass	
1351.66	39.16	13.02	-14.1	38.11	Debug	H	100	322	54	-15.89	Pass	
1597.39	38.45	13.23	-12.8	38.87	Debug	H	100	322	54	-15.13	Pass	
1356.69	39.38	13.03	-14.1	38.35	Debug	V	100	322	54	-15.65	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T9b RE 3.5 GHz – 10 GHz FCC Class B\_64QAM

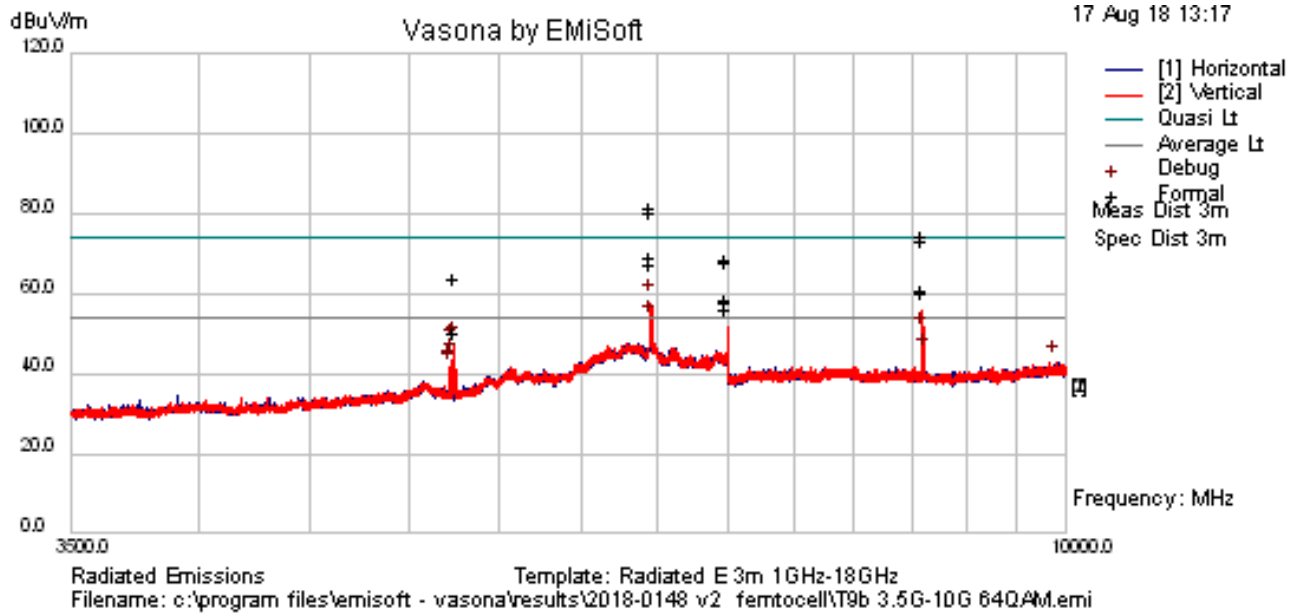

<b>Results Title:</b>	Radiated E 3m 1GHz-18GHz
<b>File Name:</b>	c:\program files\EMISoft - vasona\results\2018-0148 v2 femtocell\T9b 3.5G-10G 64QAM.emi
<b>Test Laboratory:</b>	GPCL AR5-MH 22C, 64%RH, 996mB
<b>Test Engineer:</b>	GM
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	Nokia
<b>EUT Details:</b>	TMO V2 SOHO B2B4 (B4 LTE) Part 15/Part 27 Also identified as 4G LTE Cell Spot V2V2 Model: SS2FII Femtocell Multiband SOHO [ S/N: LBALLUAK180306783]; FCC ID: H8NSS2FII; TX Output: 2150 MHz, 10 MHz BW, 64QAM, 21 dBm, NB-IOT , Guard band Mitigation: Split-Core Ferriter Material was added to the Ribbon Cable which interfaces Debug Board and the EU.T. Debug Cable and Debug Board was encapsulated with Copper Tape over insulating Material.
<b>Configuration:</b>	Radiated Emissions 3.5GHz -10GHz FCC Part 15 B Class B, RCVR E1190, Preamp E1166, HPF(E986), Horn Antenna E0573, 3M Distance offset, ESU using Peak and Average Detector. Preview BW (100 kHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW). Analyzer Reference Level: 100 dBuV, Internal Attenuation: 20 dB. Non-Official Scan, Project 2018-0148
<b>Date:</b>	2018-08-17 13:17:33


FORMAL DATA												
Conformity Assessment Report No.:	Raw	Cable	Factor	Level	Emission	Pol	Ht	Az	Limit	Margin	Pass	Comments
(MHz)	(dBuV)	(dB)	(dB)	(dBuV/m)	Type	(H/V)	(cm)	(deg)	(dBuV/m)	(dB)	/Fail	
6450.93	60.46	6.6	-2.67	64.39	AvgMax	V	101	350	54	10.39	Fail	Exempt
6449.44	58.73	6.6	-2.67	62.66	AvgMax	V	198	343	54	8.66	Fail	Exempt
6449.44	73.25	6.6	-2.67	77.17	Quasi Max	V	198	343	74	3.17	Fail	Exempt
8600.01	50.69	6.73	-1.16	56.26	AvgMax	V	123	203	54	2.26	Fail	Exempt
6450.93	72.01	6.6	-2.67	75.95	Quasi Max	V	101	350	74	1.95	Fail	Exempt
8599.96	50.28	6.73	-1.16	55.85	AvgMax	V	128	202	54	1.85	Fail	Exempt
8602.65	50.14	6.72	-1.15	55.71	AvgMax	V	211	189	54	1.71	Fail	Exempt
7000	48.59	7.17	-1.85	53.91	AvgMax	V	118	350	54	-0.09	Pass	
8602.65	64.01	6.72	-1.15	69.58	Quasi Max	V	211	189	74	-4.42	Pass	
8599.96	62.92	6.73	-1.16	68.49	Quasi Max	V	128	202	74	-5.51	Pass	
8600.01	62.92	6.73	-1.16	68.49	Quasi Max	V	123	203	74	-5.51	Pass	
5245.39	45.07	5.21	-4.4	45.88	AvgMax	V	254	301	54	-8.12	Pass	
7000	58.79	7.17	-1.85	64.11	Quasi Max	V	118	350	74	-9.89	Pass	
5245.39	58.4	5.21	-4.4	59.21	Quasi Max	V	254	301	74	-14.79	Pass	
7000	58.4	7.17	-1.85	63.72	Quasi Max	V	109	352	74	-10.28	Pass	
7000	46.26	7.17	-1.85	51.58	AvgMax	V	109	352	54	-2.42	Pass	
7000.02	58.14	7.17	-1.85	63.46	Quasi Max	V	102	352	74	-10.54	Pass	
7000.02	46.26	7.17	-1.85	51.58	AvgMax	V	102	352	54	-2.42	Pass	
7000.22	58.79	7.17	-1.85	64.11	Quasi Max	V	101	346	74	-9.89	Pass	
7000.22	47.88	7.17	-1.85	53.2	AvgMax	V	101	346	54	-0.8	Pass	

**PREVIEW DATA**

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
6448.6	53.81	6.6	-2.67	57.73	Preview	V	102	352	54	3.73	Fail	
8600.24	50.24	6.73	-1.16	55.81	Preview	V	102	198	54	1.81	Fail	
6459.86	48.57	6.61	-2.67	52.52	Preview	V	102	0	54	-1.48	Pass	
6999.98	46.22	7.17	-1.85	51.54	Preview	V	102	330	54	-2.46	Pass	
8602.65	44.31	6.72	-1.15	49.88	Preview	V	102	198	54	-4.12	Pass	
5245.39	46.52	5.21	-4.4	47.33	Preview	V	102	44	54	-6.67	Pass	
5238.96	46.14	5.2	-4.41	46.94	Preview	V	102	198	54	-7.06	Pass	
8613.9	38.92	6.71	-1.14	44.48	Preview	V	102	198	54	-9.52	Pass	
5230.12	42.7	5.19	-4.42	43.48	Preview	V	102	198	54	-10.52	Pass	
9891.44	36.28	6.55	-0.17	42.66	Preview	V	390	176	54	-11.34	Pass	
5218.87	40.87	5.18	-4.44	41.62	Preview	V	102	44	54	-12.38	Pass	
5225.3	40.81	5.19	-4.43	41.57	Preview	V	102	44	54	-12.43	Pass	
5221.28	39.85	5.19	-4.44	40.6	Preview	V	102	66	54	-13.4	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

T10 RE 10 GHz – 18 GHz FCC B\_64QAM

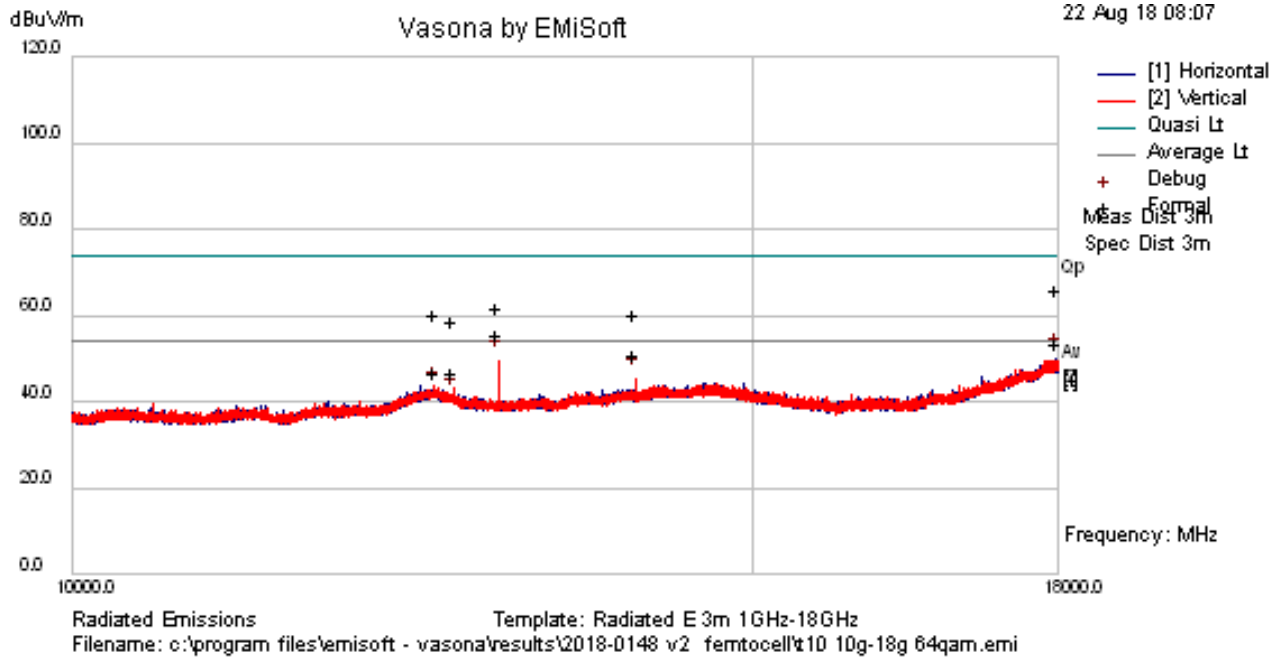

<b>Results Title:</b>	Radiated E 3m 1GHz-18GHz
<b>File Name:</b>	c:\program files\emisoft - vasona\results\2018-0148 v2 femtocell\t10 10g-18g 64qam.emi
<b>Test Laboratory:</b>	GPCL AR5-MH 22C, 64%RH, 996mB
<b>Test Engineer:</b>	SEG / MJS
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	Nokia
<b>EUT Details:</b>	TMO V2 SOHO B2B4 (B4 LTE) Part 15/Part 27 Also identified as 4G LTE Cell Spot V2V2 Model: SS2FII Femtocell Multiband SOHO [ S/N: LBALLUAK180306783]; FCC ID: H8NSS2FII; TX Output: 2150 MHz, 10 MHz BW, 64QAM, 21 dBm, NB-IOT, Guard band Mitigation: Split-Core Ferrite Material was added to the Ribbon Cable which interfaces Debug Board and the EU.T. Debug Cable and Debug Board was encapsulated with Copper Tape over insulating Material.
<b>Configuration :</b>	Radiated Emissions 10GHz -18GHz FCC Part 15 B Class B, RCVR E1190, Preamp E1166, HPF(E988), Horn Antenna E393, 3M Distance offset, ESI-1G using Peak and Average Detector. Preview BW (30 kHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW). Analyzer Reference Level: 100 dBuV, Internal Attenuation: 10 dB. Project 2018-0148
<b>Date:</b>	2018-08-22 08:07:43

FORMAL DATA

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
17993.7	40.93	10.11	10	61.04	Peak	H	148	206	74	-12.96	Pass	
12900	46.02	8.32	2.41	56.75	Peak	V	227	161	74	-17.25	Pass	
13999.9	40.52	8.6	5.92	55.04	Peak	V	209	176	74	-18.96	Pass	
12419.2	45.63	8.15	1.29	55.07	Peak	H	284	252	74	-18.93	Pass	
12562.2	43.65	8.2	1.5	53.35	Peak	H	134	347	74	-20.65	Pass	
17993.7	28.41	10.11	10	48.52	AvgMax	H	148	206	54	-5.48	Pass	

**FORMAL DATA**


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
12900	39.7	8.32	2.41	50.44	AvgMax	V	227	161	54	-3.56	Pass	
13999.9	31	8.6	5.92	45.52	AvgMax	V	209	176	54	-8.48	Pass	
12419.2	32.32	8.15	1.29	41.76	AvgMax	H	284	252	54	-12.24	Pass	
12562.2	31.71	8.2	1.5	41.41	AvgMax	H	134	347	54	-12.59	Pass	

**PREVIEW DATA**

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
17984.8	29.9	10.1	9.94	49.95	Preview	H	190	242	54	-4.05	Pass	
12900.3	38.51	8.32	2.42	49.24	Preview	V	202	154	54	-4.76	Pass	
13999.8	30.73	8.6	5.92	45.25	Preview	V	202	176	54	-8.75	Pass	
12419.2	32.56	8.15	1.29	42	Debug	H	100	355	54	-12	Pass	
12562.2	30.68	8.2	1.5	40.38	Debug	H	100	355	54	-13.62	Pass	

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

RE 18 GHz – 26.5 GHz

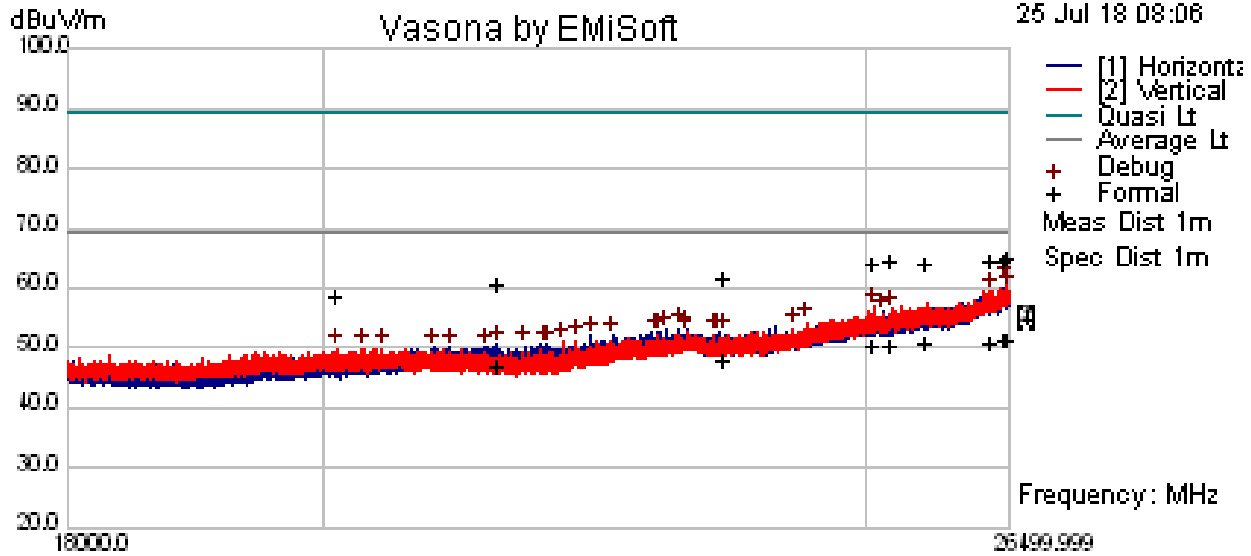

Radiated Emissions Template: Radiated E 1m 18GHz-26.5GHz  
 Filename: c:\program files\emisoft - vasona\results\femtocell\_2018-0148\_0147\RE18-26.5GHz

<b>Results Title:</b>	Radiated E 1m 18GHz-26.5GHz
<b>File Name:</b>	c:\program files\emisoft - vasona\results\2018-0148 v2 femtocell\RE18-26.5GHz V2.emi
<b>Test Laboratory:</b>	GPCL AR5-MH 22C, 67%RH, 996mB
<b>Test Engineer:</b>	EEM
<b>Test Software:</b>	Vasona by EMISoft, version 2.161
<b>Equipment:</b>	Nokia
<b>EUT Details:</b>	TMO V2 SOHO B2B4 (B4 LTE) Part 15/Part 27 Also identified as 4G LTE Cell Spot V2V2 Model: SS2FII Femtocell Multiband SOHO [ S/N: LBALLUAK180306783]; FCC ID: H8NSS2FII; TX Output: 2150 MHz, 10 MHz BW, 256QAM, 21 dBm, NB-IOT , Guardband "Upper" [Project 2018-0148]
<b>Configuration :</b>	Radiated Emissions 1 -3.5 GHz FCC Part 15 B Class B, RCVR E954, Preamp E1166, HPF(E1235), Horn Antenna E0573, 3M Distance offset, ESU using Peak and Average Detector. Driver Modified to address overload condition; Preview BW (100 kHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW). Analyzer Reference Level: 115 dBuV, Internal Atten: 10 dB. Official Scan #1 Project 2018-0148
<b>Date:</b>	2018-07-25 10:59:57

FORMAL DATA

Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
26470.1	25.17	12.79	11.08	49.03	AvgMax	V	129	255	69.5	-20.47	Pass	
26487.3	25.06	12.83	11.12	49.02	AvgMax	V	163	81	69.5	-20.48	Pass	
26299.7	25.67	12.36	10.59	48.62	AvgMax	V	195	142	69.5	-20.88	Pass	
25622.9	27.76	11.29	9.36	48.41	AvgMax	V	192	147	69.5	-21.09	Pass	
25254.6	28.24	11.03	8.97	48.24	AvgMax	V	99	247	69.5	-21.26	Pass	
25072.1	28.19	10.91	8.76	47.86	AvgMax	V	167	328	69.5	-21.64	Pass	
23579	27.8	9.93	7.96	45.7	AvgMax	H	157	51	69.5	-23.8	Pass	
21480.4	27.82	8.48	8.21	44.52	AvgMax	H	123	25	69.5	-24.98	Pass	
26487.3	38.89	12.83	11.12	62.85	Peak	V	163	81	89.5	-26.65	Pass	
26299.7	39.48	12.36	10.59	62.43	Peak	V	195	142	89.5	-27.07	Pass	

**FORMAL DATA**


Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
25254.6	42.13	11.03	8.97	62.13	Peak	V	99	247	89.5	-27.37	Pass	
26470.1	38.13	12.79	11.08	61.99	Peak	V	129	255	89.5	-27.51	Pass	
25622.9	41.24	11.29	9.36	61.89	Peak	V	192	147	89.5	-27.61	Pass	
25072.1	41.82	10.91	8.76	61.49	Peak	V	167	328	89.5	-28.01	Pass	
23579	41.19	9.93	7.96	59.08	Peak	H	157	51	89.5	-30.42	Pass	
21480.4	41.64	8.48	8.21	58.33	Peak	H	123	25	89.5	-31.17	Pass	
20109.5	40.25	8	8.02	56.27	Peak	V	193	245	89.5	-33.23	Pass	
20109.5	-16.02	8	8.02	0	AvgMax	V	193	245	69.5	-69.5	Pass	

**PREVIEW DATA**



Freq. (MHz)	Raw (dBuV)	Cable (dB)	Factor (dB)	Level (dBuV/m)	Emission Type	Pol (H/V)	Ht (cm)	Az (deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail	Comments
26470.1	37.46	12.79	11.08	61.32	Preview	V	152	135	69.5	-8.18	Pass	
26487.3	35.71	12.83	11.12	59.67	Preview	V	102	45	69.5	-9.83	Pass	
26299.7	36.5	12.36	10.59	59.45	Preview	V	200	180	69.5	-10.05	Pass	
25072.1	37.32	10.91	8.76	56.99	Preview	V	200	352	69.5	-12.51	Pass	
25254.6	36.32	11.03	8.97	56.32	Preview	V	200	90	69.5	-13.18	Pass	
25156.9	36.19	10.97	8.86	56.02	Preview	H	200	270	69.5	-13.48	Pass	
24394.6	35.99	10.18	8	54.17	Preview	V	102	270	69.5	-15.33	Pass	
23143.9	35.11	10.17	8.05	53.33	Preview	H	200	0	69.5	-16.17	Pass	
24258.4	35.31	10.03	7.9	53.24	Preview	V	102	180	69.5	-16.26	Pass	
23026.9	34.8	10.24	8.07	53.1	Preview	H	200	270	69.5	-16.4	Pass	
23222.3	34.73	10.13	8.04	52.9	Preview	H	200	135	69.5	-16.6	Pass	
23206.2	34.46	10.14	8.04	52.64	Preview	V	152	0	69.5	-16.86	Pass	
22962.6	34.29	10.2	8.08	52.58	Preview	H	200	270	69.5	-16.92	Pass	
22933.7	34.31	10.16	8.09	52.56	Preview	H	200	270	69.5	-16.94	Pass	
23519.2	34.47	9.97	7.99	52.43	Preview	H	200	0	69.5	-17.07	Pass	
22940.1	34.09	10.17	8.09	52.35	Preview	H	150	135	69.5	-17.15	Pass	
23496.7	34.24	9.98	8.01	52.23	Preview	H	102	0	69.5	-17.27	Pass	
23579	34.32	9.93	7.96	52.22	Preview	H	200	90	69.5	-17.28	Pass	
22522.3	34.29	9.48	8.23	52.01	Preview	H	150	270	69.5	-17.49	Pass	
22320.5	34.6	9.15	8.17	51.91	Preview	H	150	45	69.5	-17.59	Pass	
22191.3	34.19	8.94	8.11	51.24	Preview	V	102	315	69.5	-18.26	Pass	
22074.3	34.14	8.74	8.06	50.94	Preview	V	102	352	69.5	-18.56	Pass	
21924.6	34.05	8.6	8.06	50.7	Preview	H	102	225	69.5	-18.8	Pass	
21909.1	34.04	8.6	8.06	50.69	Preview	H	200	135	69.5	-18.81	Pass	
21480.4	33.88	8.48	8.21	50.57	Preview	H	102	352	69.5	-18.93	Pass	
21733	33.72	8.55	8.12	50.39	Preview	H	200	225	69.5	-19.11	Pass	
21377.6	33.48	8.45	8.26	50.2	Preview	H	200	0	69.5	-19.3	Pass	
21398.2	33.43	8.46	8.25	50.15	Preview	H	150	352	69.5	-19.35	Pass	
20928.3	33.38	8.32	8.4	50.09	Preview	H	102	315	69.5	-19.41	Pass	
21067.2	33.24	8.37	8.42	50.03	Preview	H	150	90	69.5	-19.47	Pass	
20333.1	33.8	8.09	8.05	49.93	Preview	V	200	45	69.5	-19.57	Pass	
20109.5	33.87	8	8.02	49.89	Preview	V	152	90	69.5	-19.61	Pass	
20496.4	33.66	8.15	8.07	49.87	Preview	V	152	135	69.5	-19.63	Pass	


Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

### Radiated Emissions Photographs

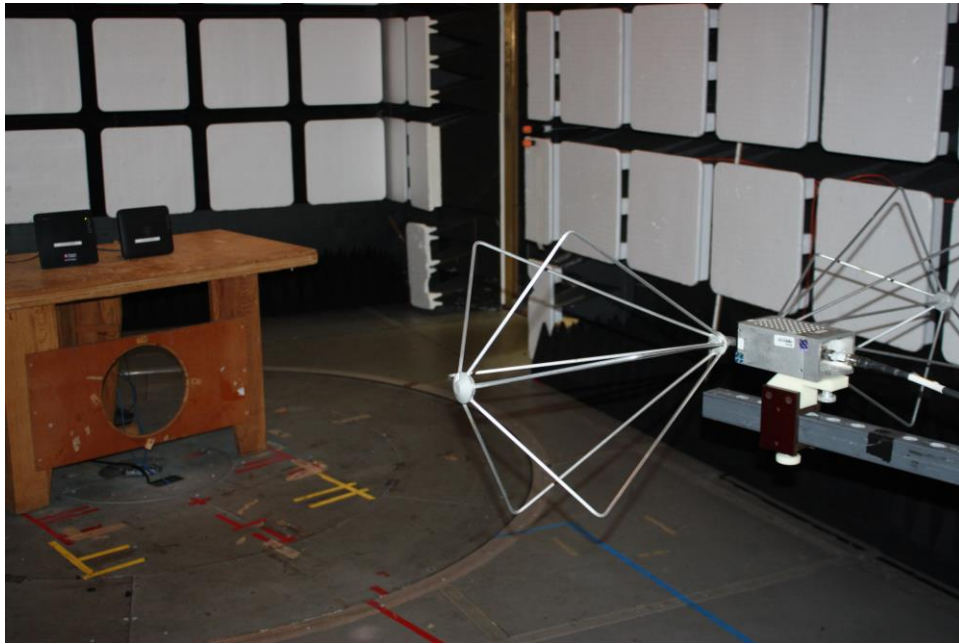



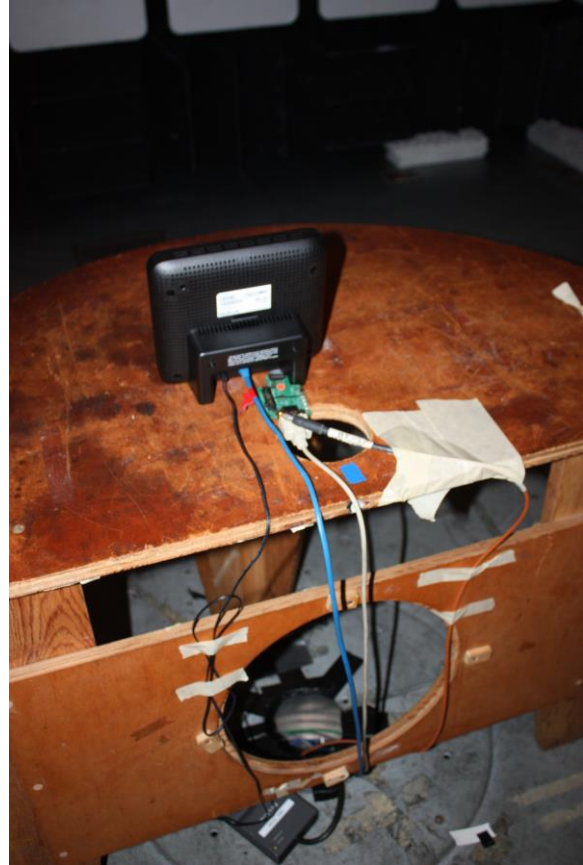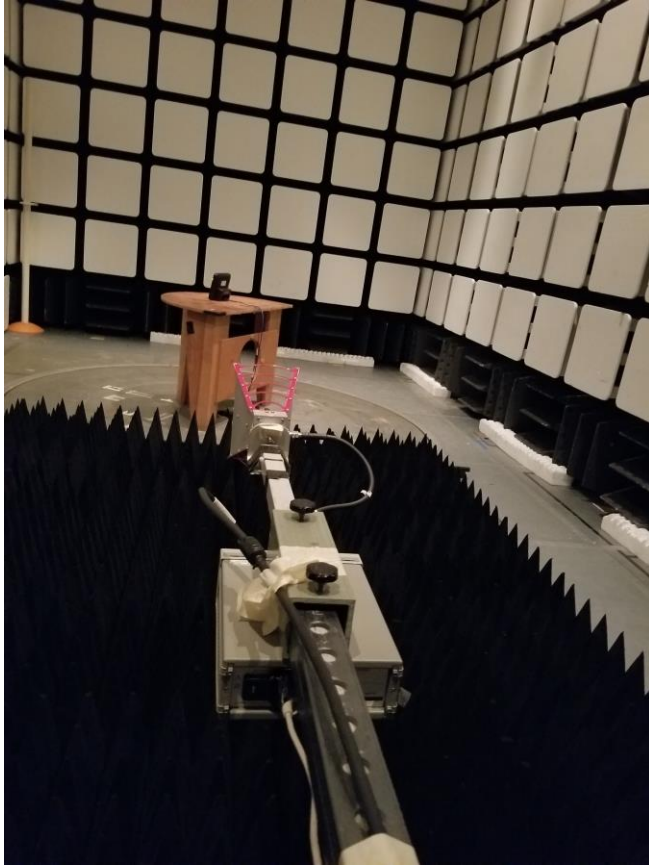

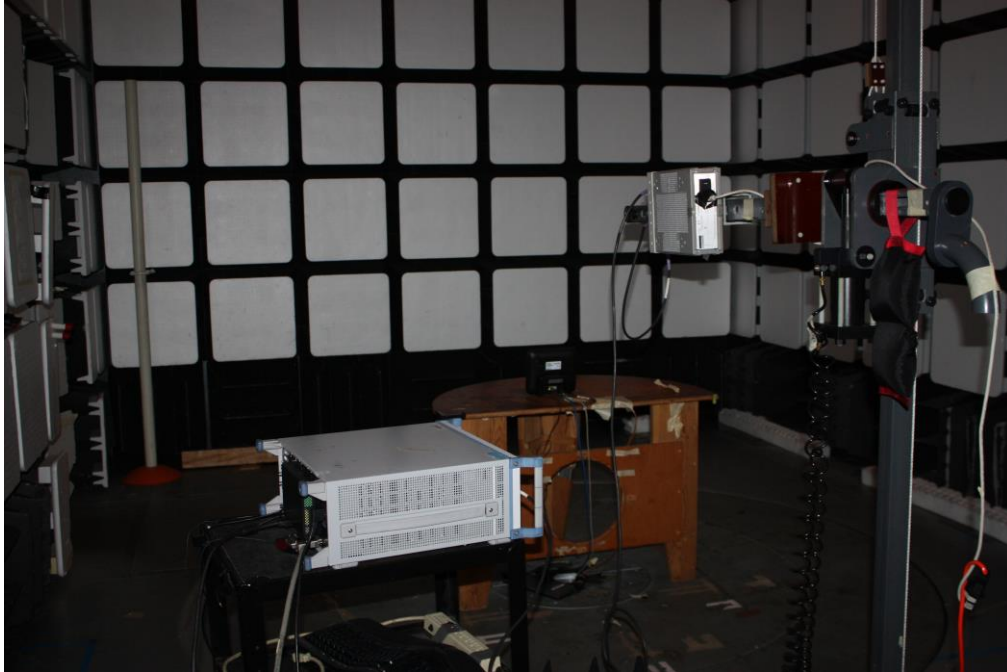

## Radiated Emissions Test Equipment

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due	Calibration Type	Status
<a href="#">E1105</a>	EMC Test Systems	Multi-Device Controller		2090	1600			Calibration Not Required	Active
<a href="#">E051</a>	EMCO	Biconical Antenna		3109	2187	2016-12-01	2018-12-01	Requires Calibration	Active
<a href="#">E060</a>	EMCO	Log Periodic Antenna	Log periodic antenna	3146	1458	2016-12-06	2018-12-06	Requires Calibration	Active
<a href="#">E1321</a>	Extech	Data Logger	Barometric Pressure/Humidity/Temperature Datalogger	SD700	A075782				Active
<a href="#">E908</a>	Rohde & Schwarz	Test Receiver	EMI (20Hz to 40 GHz)-150 +30dBm	ESIB40	100100	2018-03-12	2020-03-12	Requires Calibration	Active
<a href="#">E512</a>	Sonoma Instrument Co.	Amplifier	9KHz-1GHz	310N	185826	2018-03-27	2020-03-27	Requires Calibration	Active
<a href="#">E889</a>	Weinschel	Attenuator	6 dB DC-18GHz 5 Watt	2-6	BX3438	2018-05-23	2020-05-23	Requires Calibration	Active
<a href="#">E1166</a>	Agilent Technologies	Amplifier	Pre-Amplifier 1-26.5GHz	8449B	3008A01740	2016-02-25	2018-08-25	Requires Calibration	Active
<a href="#">E555</a>	EMC Test Systems	Multi-Device Controller		2090	1577			Calibration Not Required	Active
<a href="#">E057</a>	EMCO	Horn Antenna	Double Ridged Horn 1-18 GHz	3115	9006-3460	2017-05-24	2019-05-24	Requires Calibration	Active
<a href="#">E1235</a>	RLC Electronics Inc	High Pass Filter	High Pass filter 5GHz to 26GHz	F-19413	1446-006			Calibration Not Required, Must Be Verified	Active
<a href="#">E954</a>	Rohde & Schwarz	Test Receiver	EMI 20Hz - 40GHz -155 dBm +30 dBm	ESU40	100246	2016-12-05	2018-12-05	Requires Calibration	Active
<a href="#">E583</a>	Weinschel	Attenuator	10dB 25W DC-18 GHz	46-10-34	BL7552	2018-05-23	2020-05-23	Requires Calibration	Active

## 7. NVLAP Certificate of Accreditation

United States Department of Commerce  
National Institute of Standards and Technology



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 100275-0

**Nokia, Global Product Compliance Lab**  
Murray Hill, NJ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2017-08-17 through 2018-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*