

FCC Test Report

FCC ID : H8NGRYPHONAX
Equipment : WIFI Tri-band Mesh
Brand Name : Gryphon
Model Name : GRYPHON AX
Applicant : ASKEY COMPUTER CORPORATION
10F, No. 119, Jiankang Road, Zhonghe Dist., New Taipei City, Taiwan
Manufacturer : ASKEY COMPUTER CORPORATION
10F, No. 119, Jiankang Road, Zhonghe Dist., New Taipei City, Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on Sep. 07, 2020, and testing was started from Sep. 07, 2020 and completed on Oct. 13, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards8

1.3 Testing Location Information8

1.4 Measurement Uncertainty9

2 TEST CONFIGURATION OF EUT.....10

2.1 Test Condition10

2.2 Test Channel Mode10

2.3 The Worst Case Measurement Configuration.....11

2.4 Accessories12

2.5 Support Equipment.....12

2.6 Test Setup Diagram13

3 TRANSMITTER TEST RESULT15

3.1 AC Power-line Conducted Emissions15

3.2 DTS Bandwidth.....17

3.3 Maximum Conducted Output Power18

3.4 Power Spectral Density20

3.5 Emissions in Non-restricted Frequency Bands21

3.6 Emissions in Restricted Frequency Bands.....22

4 TEST EQUIPMENT AND CALIBRATION DATA.....27

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF DTS BANDWIDTH

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY

APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



History of this test report

Report No.	Version	Description	Issued Date
FR091021AL	01	Initial issue of report	Jan. 11, 2021



Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and explanations:
None

Reviewed by: **Sam Tsai**
Report Producer: **Debby Hung**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector
1-7	Askey	AP5660W	PCB antenna	I-PEX

<Non-Beamforming>

Ant.	Gain (dBi)								
	2.4G			5G		BT			
	2400	2450	2500	U-NII-1	U-NII-3	2400	2450	2500	
1-2	4.13	4.05	3.94	3.46	4.11	-	-	-	
3-6	-	-	-	3.46	4.11	-	-	-	
7	-	-	-	-	-	3.25	3.40	2.52	

<Beamforming>

Ant.	Gain (dBi)					
	2.4G			5G		
	2400	2450	2500	U-NII-1	U-NII-3	
1-2	3.36	4.46	4.85	6.05	4.79	
3-6	-	-	-	6.05	4.79	

Note 1: The EUT has seven antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 7 could transmit/receive.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax mode (4TX/4RX)

Ant. 1, Ant. 2 , Ant. 3 and Ant. 4 could transmit/receive simultaneously.



1.1.3 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter		
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Point-to-point	
Type of EUT			
<input checked="" type="checkbox"/>	Stand-alone		
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.: ...		
<input type="checkbox"/>	Other:		

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.641	1.93	412.813u	3k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		
<input checked="" type="checkbox"/>	Wen Shan	ADD : No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL : 886-3-318-0787 FAX : 886-3-318-0287
Test site Designation No. TW1097 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward	24.6~24.9°C / 54~60%	13/Oct/2020
RF Conducted	TH06-HY	Alan	20.1~26.9°C / 50~60%	09/Sep/2020~16/Sep/2020
Radiated	03CH09-HY	Lego	23.2~25.1°C / 56~60%	07/Sep/2020~17/Sep/2020



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	0.9 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.0 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode


Test Software	QRCT3
---------------	-------

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	default
2440MHz	default
2480MHz	default

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
1	Adapter mode
Operating Mode > 1GHz	CTX
Orthogonal Planes of EUT	Y Plane
	

2.4 Accessories


Accessories				
AC Adapter 1 (US Plug)	Brand Name	FLYPOWER	Model Name	PS24L120K2000UD
	Power Rating	I/P:100 - 240Vac, 0.8A, O/P: 12.0 Vdc, 2.0A		
	Power Cord	1.5 meter, non-shielded cable, w/o ferrite core		
AC Adapter 2 (US Plug)	Brand Name	APD	Model Name	WB-24J12FU
	Power Rating	I/P: 100 - 240Vac, 0.7A, O/P: 12Vdc, 2 A		
	Power Cord	1.5 meter, non-shielded cable, w/o ferrite core		

Reminder: Regarding to more detail and other information, please refer to user manual.


2.5 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

2.6 Test Setup Diagram

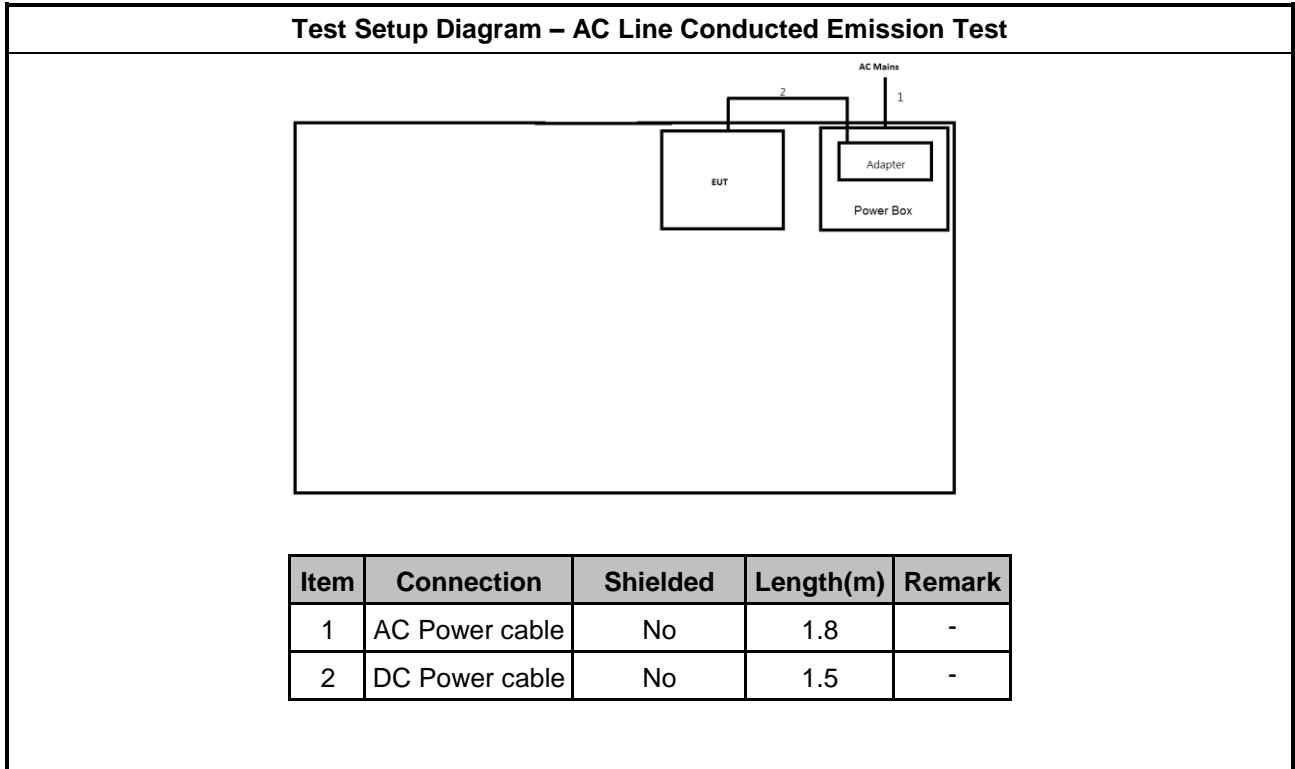

Test Setup Diagram - Radiated Test

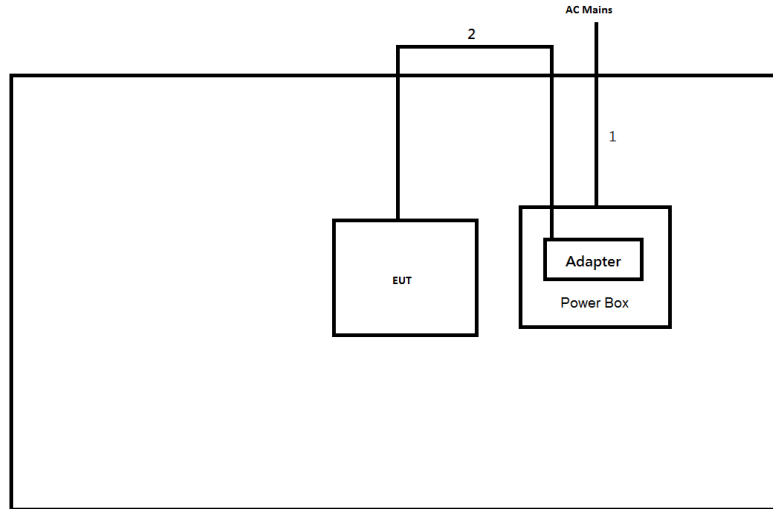

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable	No	1.5	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

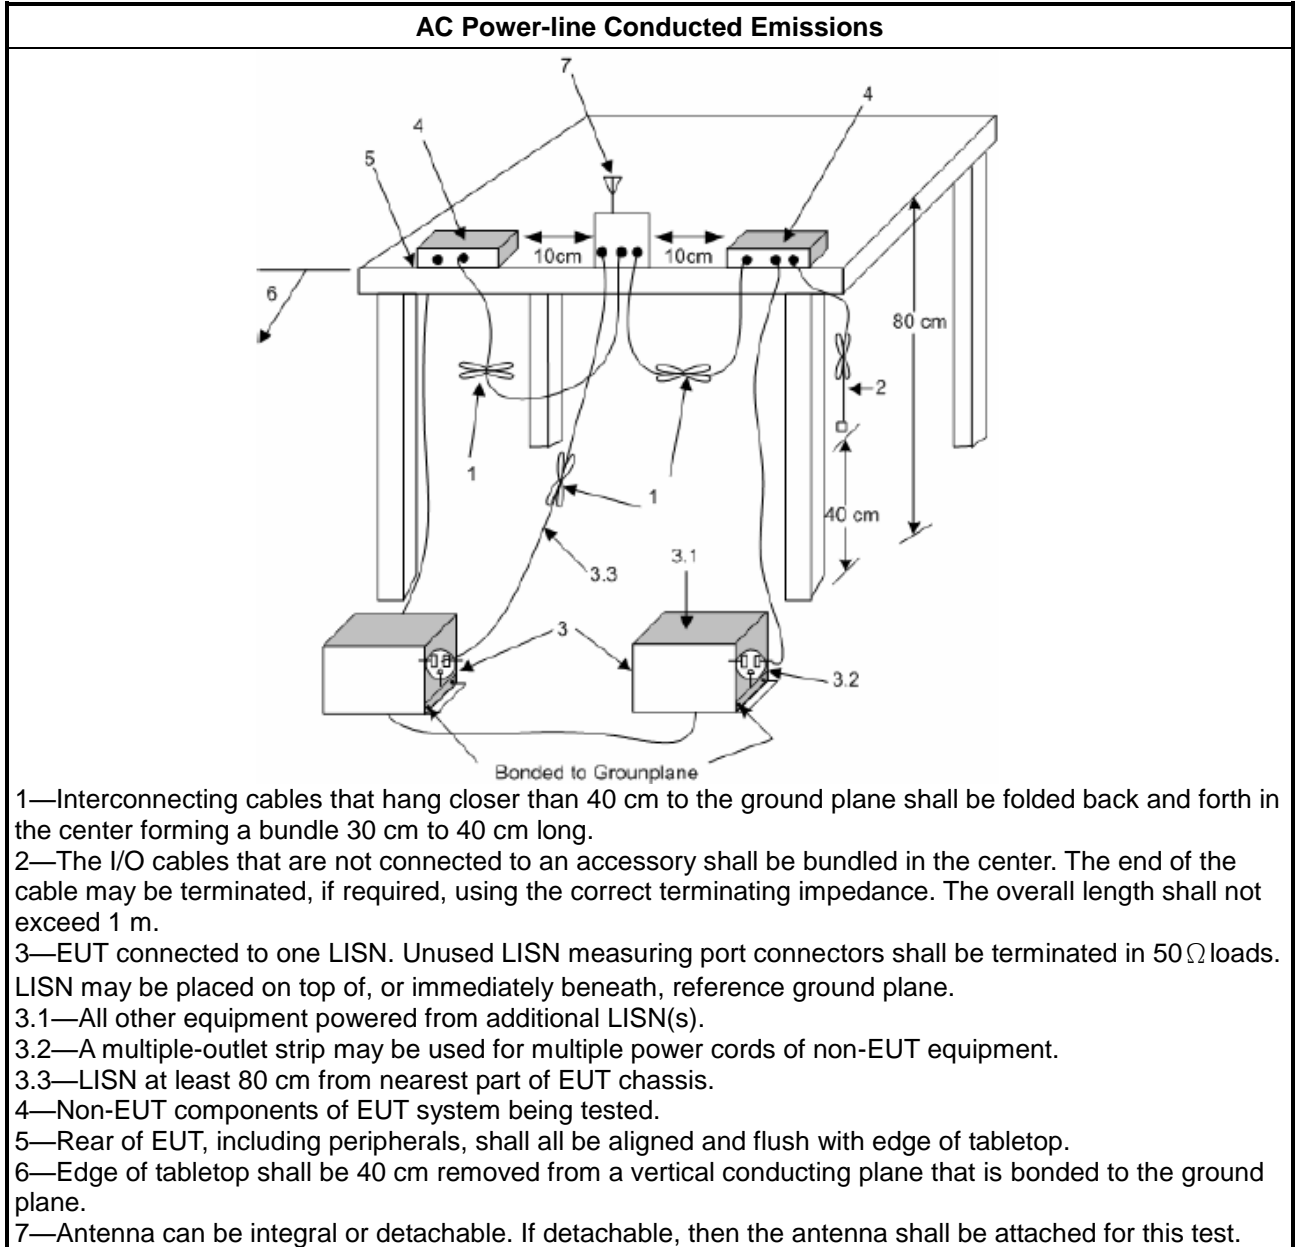

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

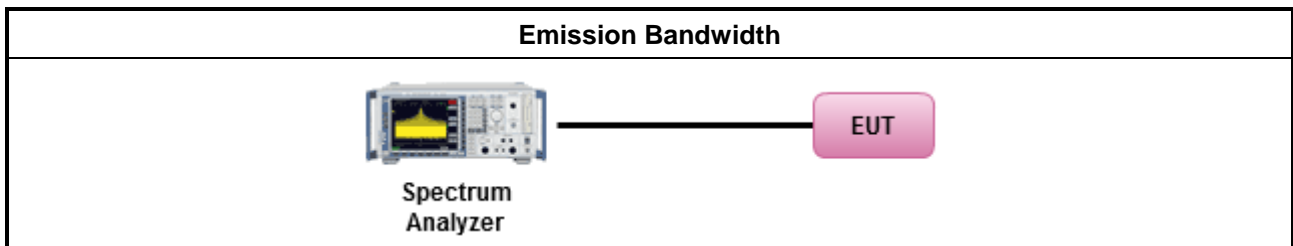

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS)
	<ul style="list-style-type: none"> - Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> ▪ Maximum Average Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

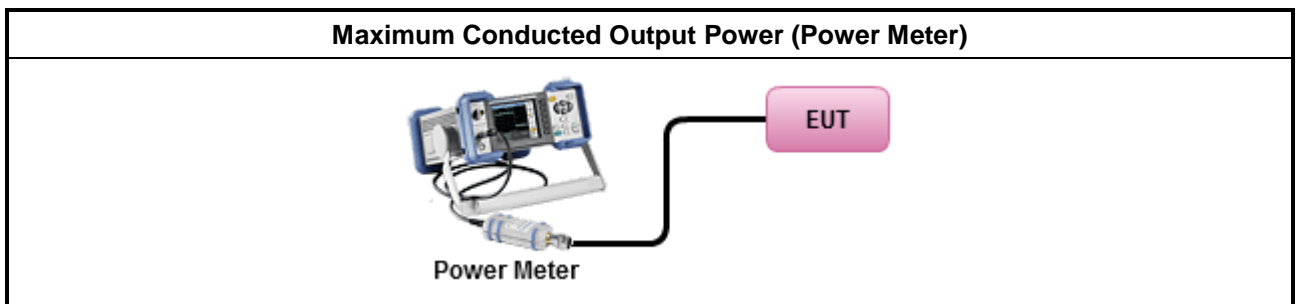

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> ▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
	<ul style="list-style-type: none"> ▪ For conducted measurement.
	<ul style="list-style-type: none"> ▪ If The EUT supports multiple transmit chains using options given below:
	<ul style="list-style-type: none"> ▪ Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

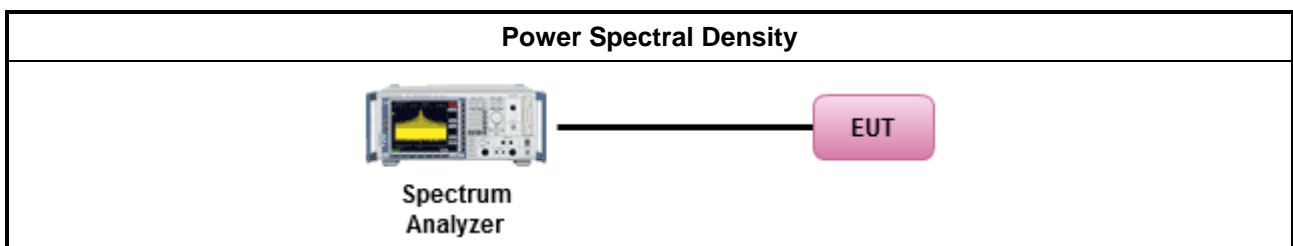

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

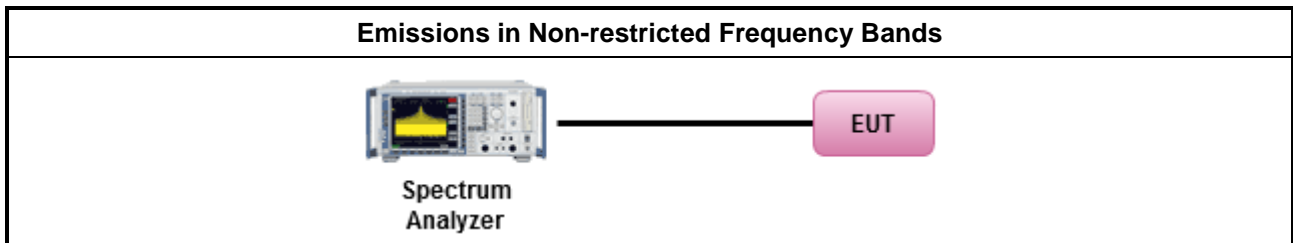

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Test Method	
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
	<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below: <ul style="list-style-type: none"> ▪ Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. ▪ Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements. ▪ Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
	<ul style="list-style-type: none"> ▪ Use the following spectrum analyzer settings: <ul style="list-style-type: none"> ▪ Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold. ▪ Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
	<ul style="list-style-type: none"> ▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification. <ul style="list-style-type: none"> ▪ Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field. ▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.6.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.6.5 Test Setup

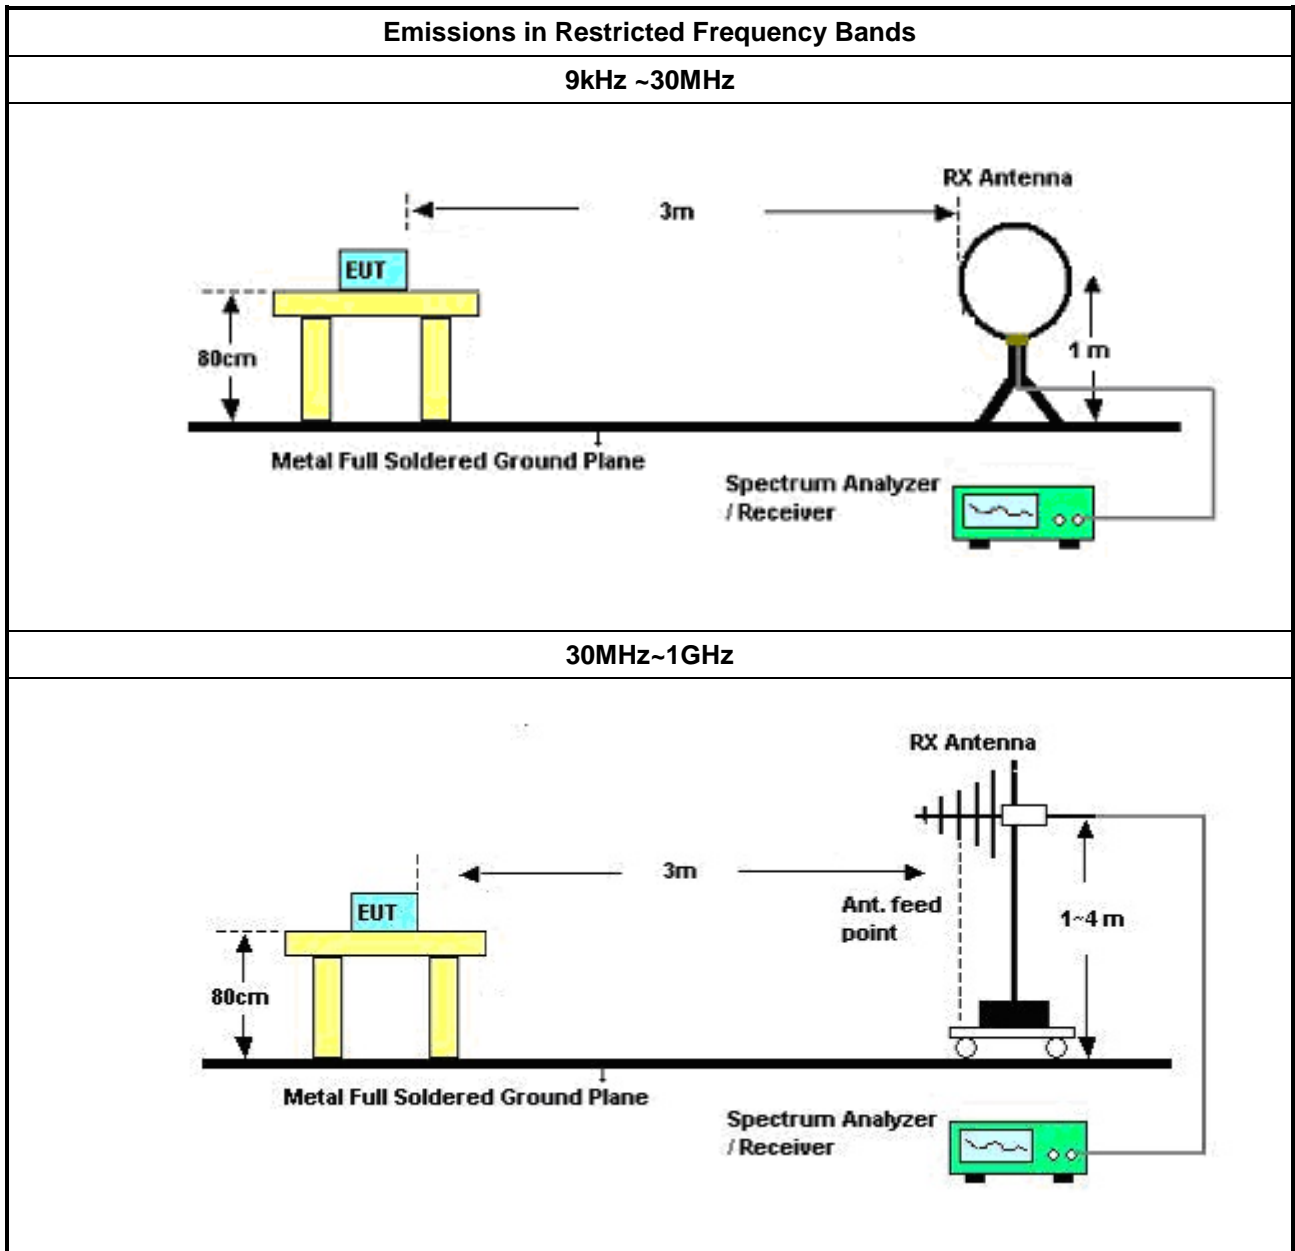

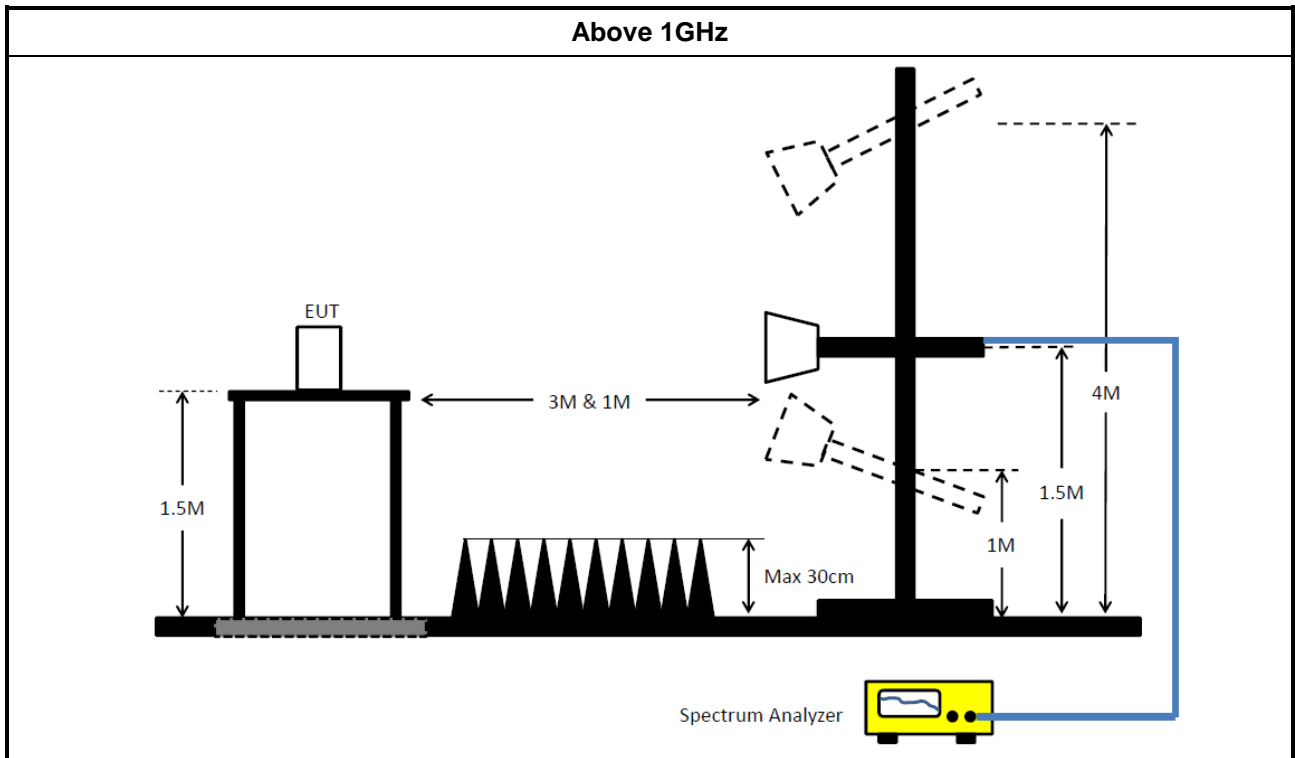

3.6.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR3	102051	9kHz ~ 3.6GHz	29/May/2020	28/May/2021
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	05/Nov/2019	04/Nov/2020
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	31/Aug/2020	30/Aug/2021
Impuls Begrenzer Pulse Limiter	SCHWARZBEC K	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	21/Sep/2020	20/Sep/2021

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10KHz ~ 40GHz	01/Oct/2019	30/Sep/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	11/Nov/2020
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	18/Mar/2020	17/Mar/2021
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	18/Mar/2020	17/Mar/2021



Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz~1GHz 3m	27/Mar/2020	26/Mar/2021
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz~18GHz 3m	19/Mar/2020	18/Mar/2021
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz~44GHz	17/Aug/2020	16/Aug/2021
Amplifier	EMC	EMC9135	980232	9kHz~1GHz	14/Apr/2020	13/Apr/2021
Microwave Preamplifier	Agilent	8449B	3008A02096	1GHz~26.5GHz	24/Jul/2020	23/Jul/2021
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D&MTJ 6102-05	35418 & 3	30MHz~1GHz	06/Sep/2020	05/Sep/2021
Double Ridged Guide Horn Antenna	SCHWARZBEC K	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	28/May/2020	27/May/2021
RF Cable-low	Jye Bao	RG142	CB031+324530/ 4	9kHz~30MHz	03/Sep/2020	02/Sep/2021
RF Cable-low	Jye Bao	RG142	CB031+324530/ 4	30MHz~1GHz	12/Feb/2020	11/Feb/2021
RF CABLE 5m+3m+1m	HUBER+SUHN ER	SUCOFLEX104	SN MY25918/4+ SN MY39478/4 + SN 324530/4	1GHz~40GHz	15/Aug/2020	14/Aug/2021
Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA 9170221	18GHz~40GHz	13/Mar/2020	12/Mar/2021
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz~40GHz	10/Mar/2020	09/Mar/2021
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2020	15/Mar/2021
EMI Test Receiver	R&S	ESR3	102051	9kHz~3.6GHz	29/May/2020	28/May/2021




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	447.846k	33.66	46.92	-13.26	Neutral

Mode Configure


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	157.361k	49.87	65.60	-15.73	Line	-
Mode 1	Pass	AV	157.361k	35.52	55.60	-20.08	Line	-
Mode 1	Pass	QP	442.514k	38.53	57.01	-18.48	Line	-
Mode 1	Pass	AV	442.514k	32.33	47.01	-14.68	Line	"Worst"
Mode 1	Pass	QP	566.784k	38.69	56.00	-17.31	Line	-
Mode 1	Pass	AV	566.784k	30.29	46.00	-15.71	Line	-
Mode 1	Pass	QP	1.326M	28.57	56.00	-27.43	Line	-
Mode 1	Pass	AV	1.326M	23.57	46.00	-22.43	Line	-
Mode 1	Pass	QP	4.073M	38.52	56.00	-17.48	Line	-
Mode 1	Pass	AV	4.073M	28.16	46.00	-17.84	Line	-
Mode 1	Pass	QP	13.543M	39.54	60.00	-20.46	Line	-
Mode 1	Pass	AV	13.543M	28.84	50.00	-21.16	Line	-
Mode 1	Pass	QP	151.807k	50.33	65.90	-15.57	Neutral	-
Mode 1	Pass	AV	151.807k	38.05	55.90	-17.85	Neutral	-
Mode 1	Pass	QP	447.846k	39.21	56.92	-17.71	Neutral	-
Mode 1	Pass	AV	447.846k	33.66	46.92	-13.26	Neutral	"Worst"
Mode 1	Pass	QP	571.327k	38.56	56.00	-17.44	Neutral	-
Mode 1	Pass	AV	571.327k	31.65	46.00	-14.35	Neutral	-
Mode 1	Pass	QP	1.84M	28.45	56.00	-27.55	Neutral	-
Mode 1	Pass	AV	1.84M	23.26	46.00	-22.74	Neutral	-
Mode 1	Pass	QP	4.188M	39.13	56.00	-16.87	Neutral	-
Mode 1	Pass	AV	4.188M	27.43	46.00	-18.57	Neutral	-
Mode 1	Pass	QP	13.489M	31.40	60.00	-28.60	Neutral	-
Mode 1	Pass	AV	13.489M	25.54	50.00	-24.46	Neutral	-

Conducted Emissions at Powerline_Mode 1

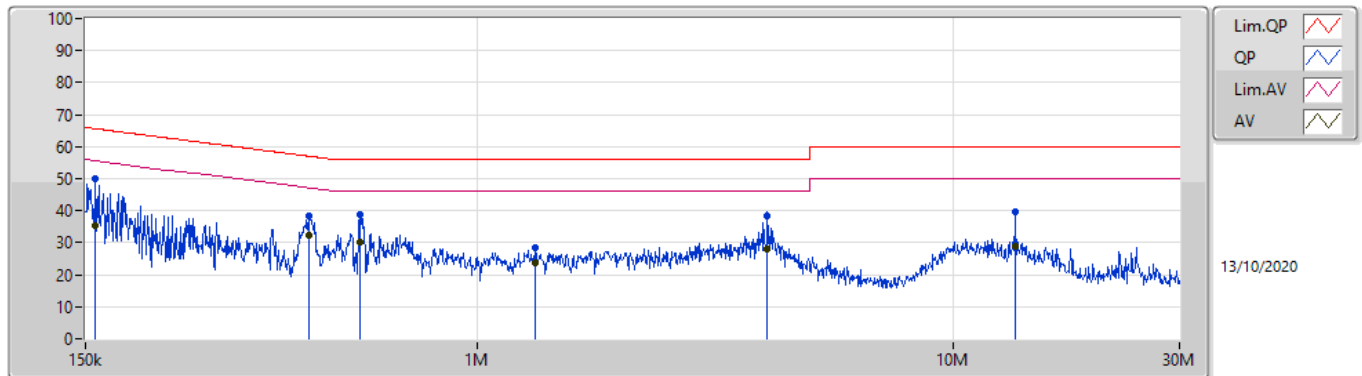

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	157.361k	49.87	65.60	-15.73	19.57	Line	-	30.30	9.66	0.01	9.90
AV	157.361k	35.52	55.60	-20.08	19.57	Line	-	15.95	9.66	0.01	9.90
QP	442.514k	38.53	57.01	-18.48	19.55	Line	-	18.98	9.64	0.02	9.89
AV	442.514k	32.33	47.01	-14.68	19.55	Line	"Worst"	12.78	9.64	0.02	9.89
QP	566.784k	38.69	56.00	-17.31	19.53	Line	-	19.16	9.64	0.03	9.86
AV	566.784k	30.29	46.00	-15.71	19.53	Line	-	10.76	9.64	0.03	9.86
QP	1.326M	28.57	56.00	-27.43	19.50	Line	-	9.07	9.64	0.06	9.80
AV	1.326M	23.57	46.00	-22.43	19.50	Line	-	4.07	9.64	0.06	9.80
QP	4.073M	38.52	56.00	-17.48	19.68	Line	-	18.84	9.66	0.12	9.90
AV	4.073M	28.16	46.00	-17.84	19.68	Line	-	8.48	9.66	0.12	9.90
QP	13.543M	39.54	60.00	-20.46	19.81	Line	-	19.73	9.67	0.24	9.90
AV	13.543M	28.84	50.00	-21.16	19.81	Line	-	9.03	9.67	0.24	9.90

Conducted Emissions at Powerline_Mode 1

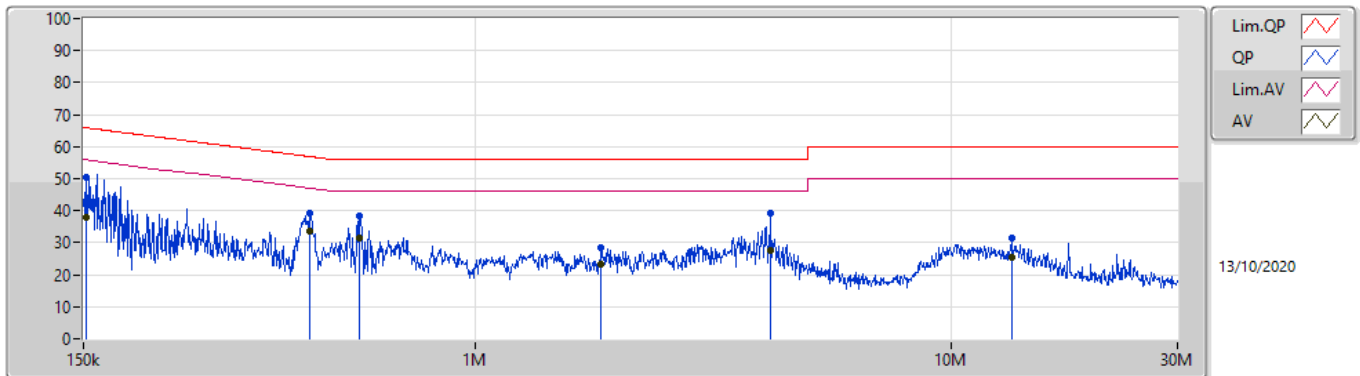

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	151.807k	50.33	65.90	-15.57	19.56	Neutral	-	30.77	9.65	0.01	9.90
AV	151.807k	38.05	55.90	-17.85	19.56	Neutral	-	18.49	9.65	0.01	9.90
QP	447.846k	39.21	56.92	-17.71	19.54	Neutral	-	19.67	9.63	0.02	9.89
AV	447.846k	33.66	46.92	-13.26	19.54	Neutral	"Worst"	14.12	9.63	0.02	9.89
QP	571.327k	38.56	56.00	-17.44	19.52	Neutral	-	19.04	9.63	0.03	9.86
AV	571.327k	31.65	46.00	-14.35	19.52	Neutral	-	12.13	9.63	0.03	9.86
QP	1.84M	28.45	56.00	-27.55	19.53	Neutral	-	8.92	9.65	0.08	9.80
AV	1.84M	23.26	46.00	-22.74	19.53	Neutral	-	3.73	9.65	0.08	9.80
QP	4.188M	39.13	56.00	-16.87	19.68	Neutral	-	19.45	9.66	0.12	9.90
AV	4.188M	27.43	46.00	-18.57	19.68	Neutral	-	7.75	9.66	0.12	9.90
QP	13.489M	31.40	60.00	-28.60	19.85	Neutral	-	11.55	9.71	0.24	9.90
AV	13.489M	25.54	50.00	-24.46	19.85	Neutral	-	5.69	9.71	0.24	9.90



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	702.5k	1.027M	1M03F1D	698.75k	1.024M



Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth




Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	698.75k	1.024M
2440MHz	Pass	500k	702.5k	1.026M
2480MHz	Pass	500k	702.5k	1.027M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

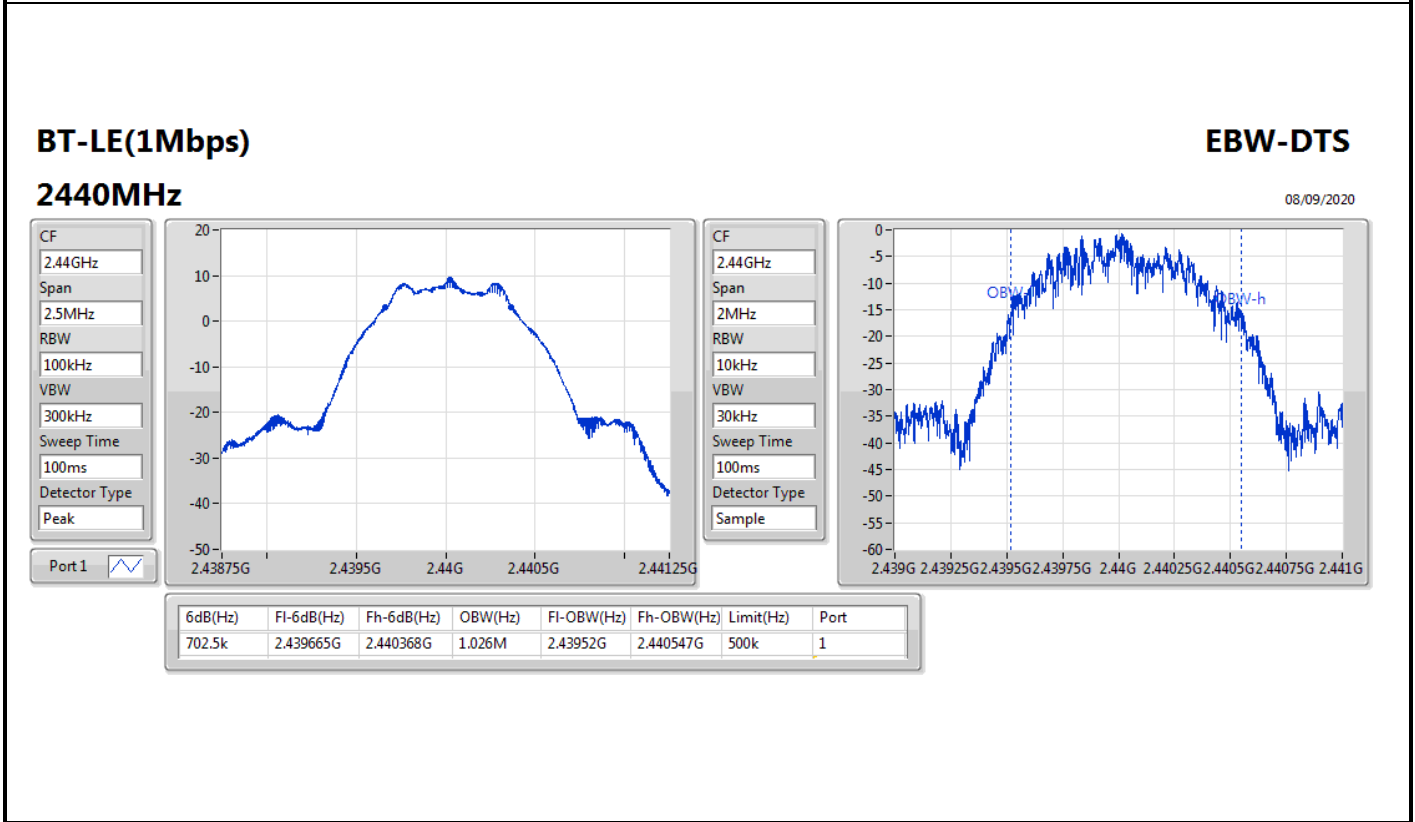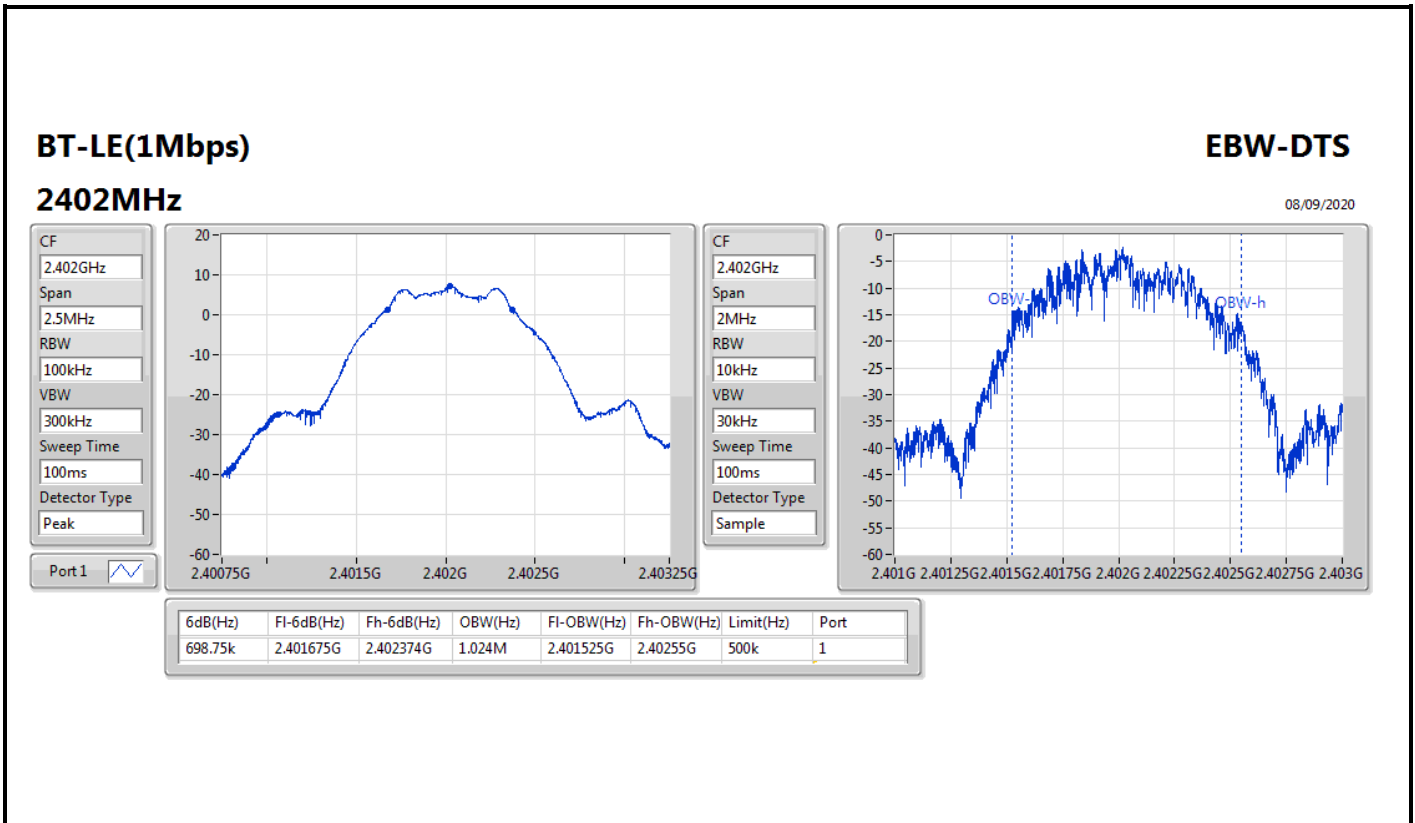

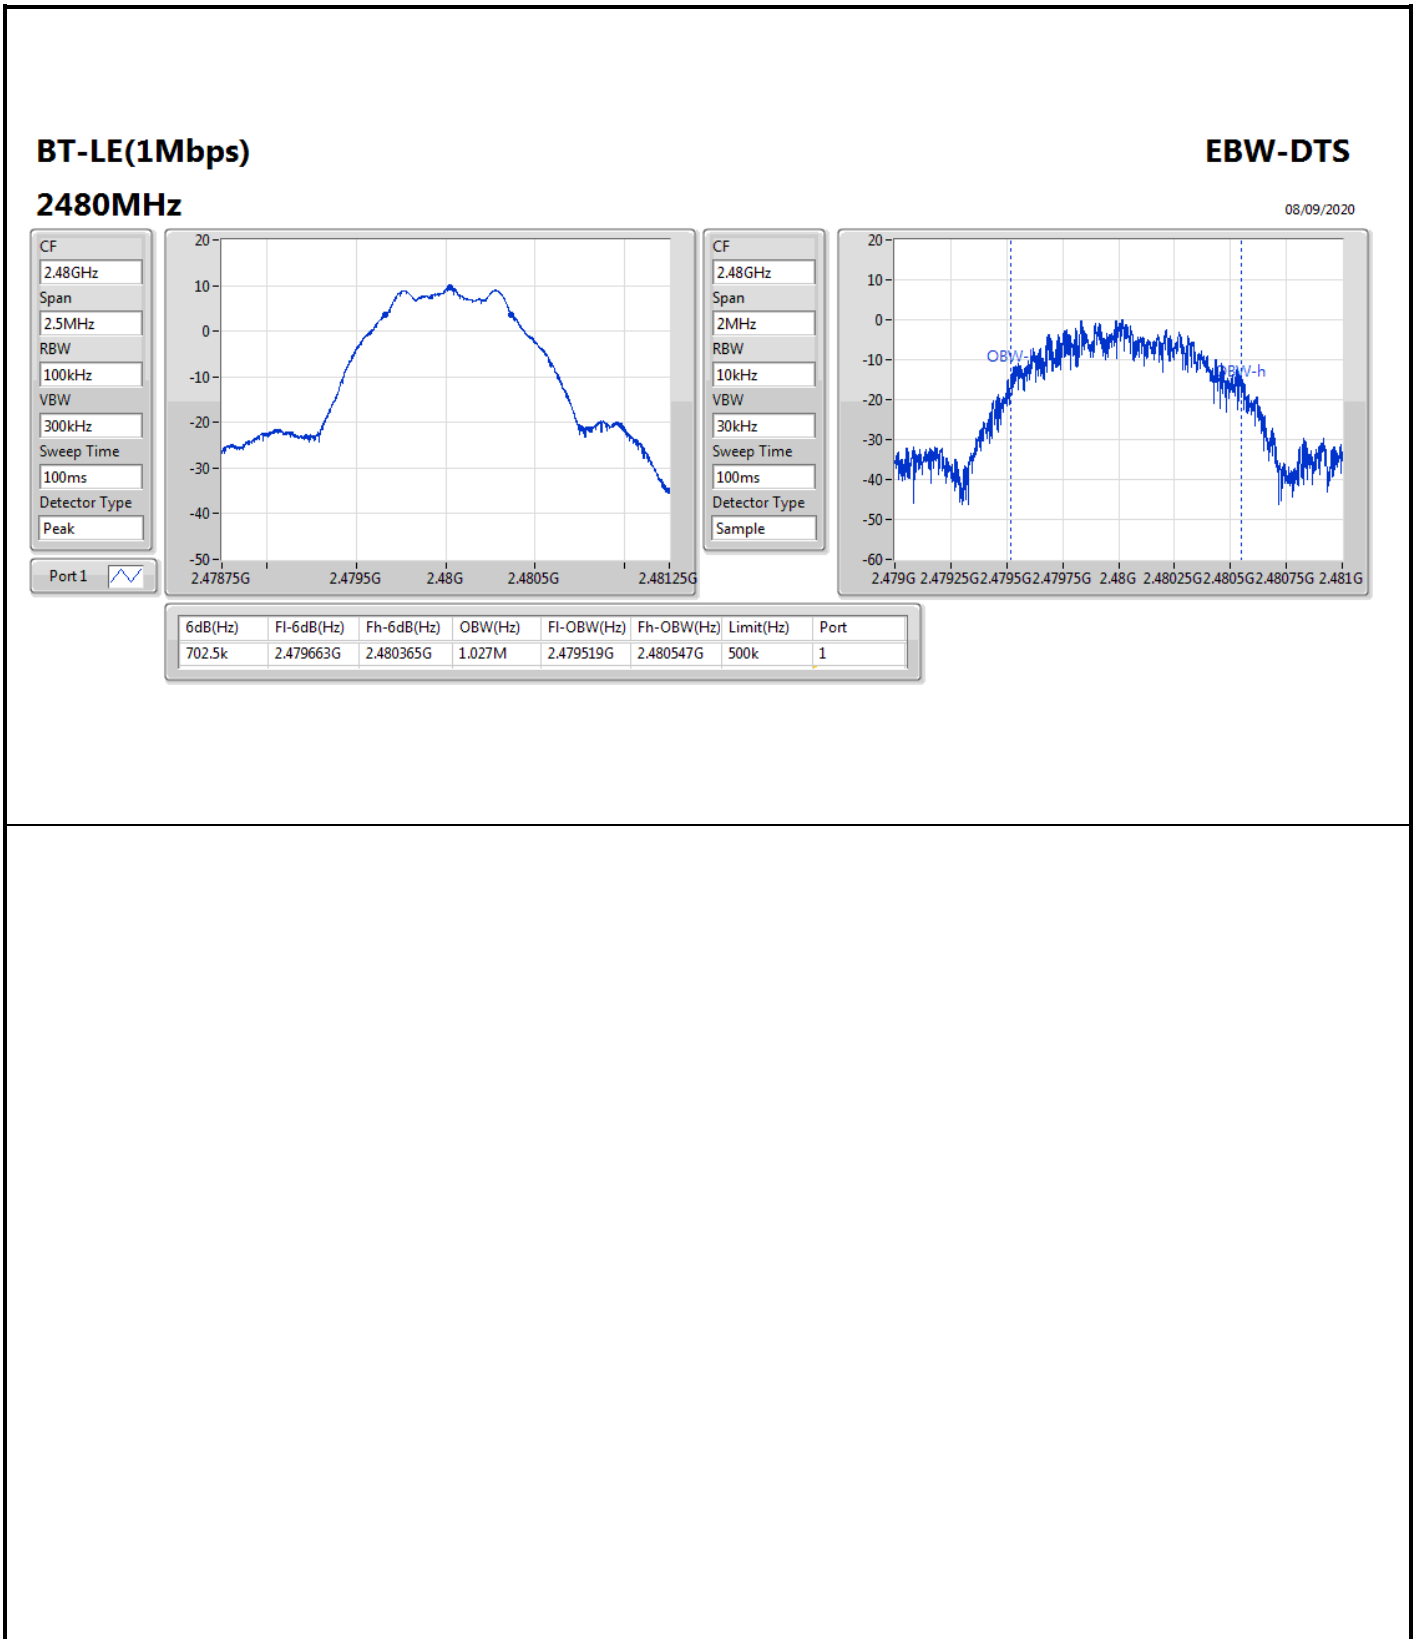



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.85	0.00966



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.25	7.42	30.00
2440MHz	Pass	3.40	9.16	30.00
2480MHz	Pass	2.52	9.85	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-6.13

RBW = 3kHz;



Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.25	-8.81	8.00
2440MHz	Pass	3.40	-6.90	8.00
2480MHz	Pass	2.52	-6.13	8.00


DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

BT-LE(1Mbps)

PSD

2402MHz

08/09/2020

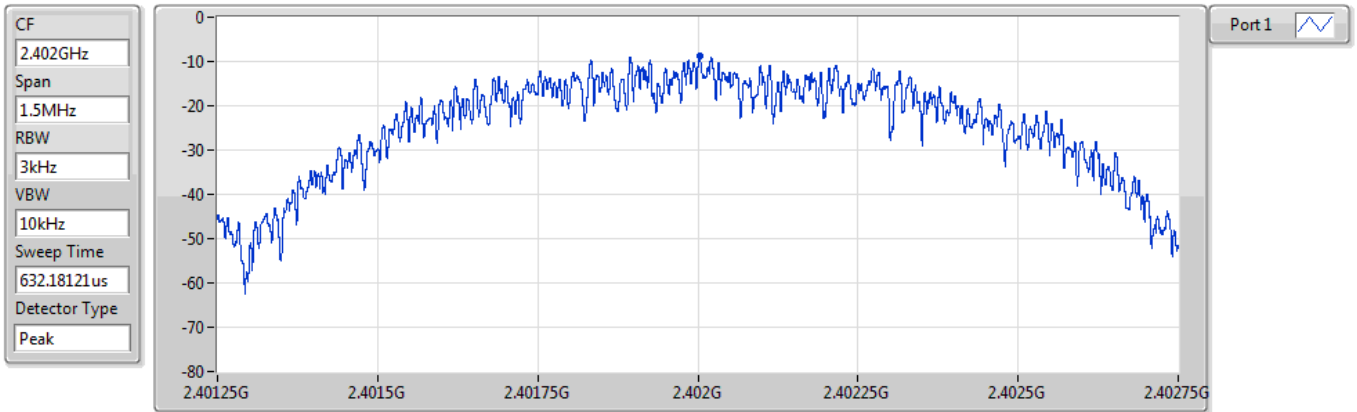


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.81	-8.81	-8.81

BT-LE(1Mbps)

PSD

2440MHz

08/09/2020

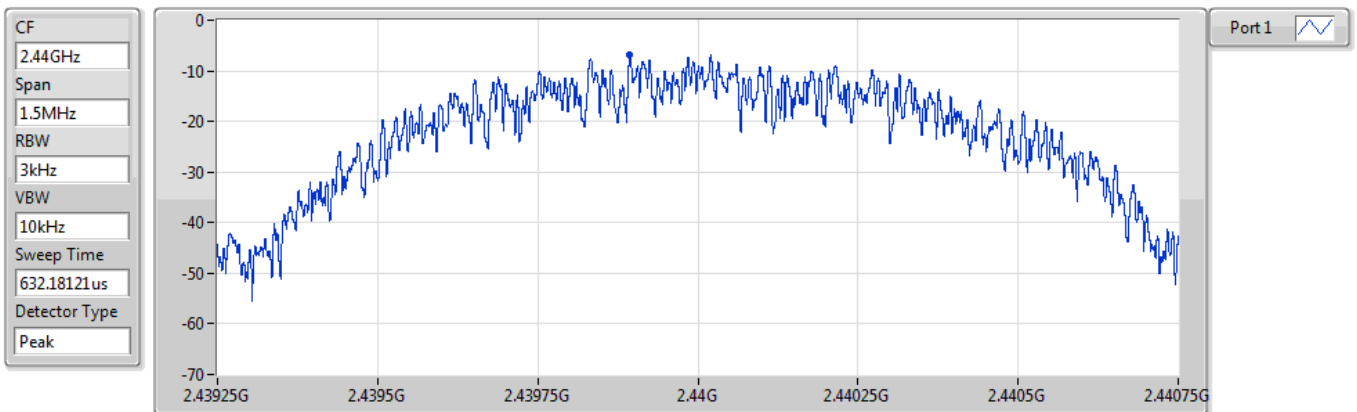

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.90	-6.90	-6.90

BT-LE(1Mbps)

PSD

2480MHz

08/09/2020

CF
2.48GHz


Span
1.5MHz


RBW
3kHz

VBW
10kHz

Sweep Time
632.18121us

Detector Type
Peak

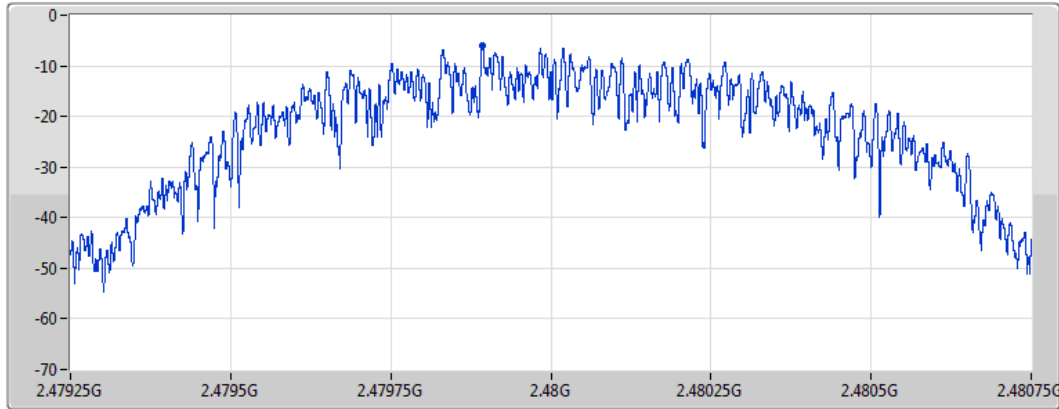

Port 1 

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.13	-6.13	-6.13





Summary


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.44G	8.99	-21.01	2.15528G	-55.38	2.39999G	-42.06	2.4G	-40.96	2.49008G	-52.26	24.00734G	-42.54	1



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.44G	8.99	-21.01	2.15528G	-55.38	2.39999G	-42.06	2.4G	-40.96	2.49008G	-52.26	24.00734G	-42.54	1
2440MHz	Pass	2.44G	8.99	-21.01	2.08273G	-55.07	2.39898G	-53.07	2.4835G	-55.42	2.50322G	-53.01	24.66818G	-42.45	1
2480MHz	Pass	2.44G	8.99	-21.01	2.13208G	-54.63	2.39129G	-54.16	2.4835G	-44.24	2.4835G	-45.93	21.41181G	-40.56	1

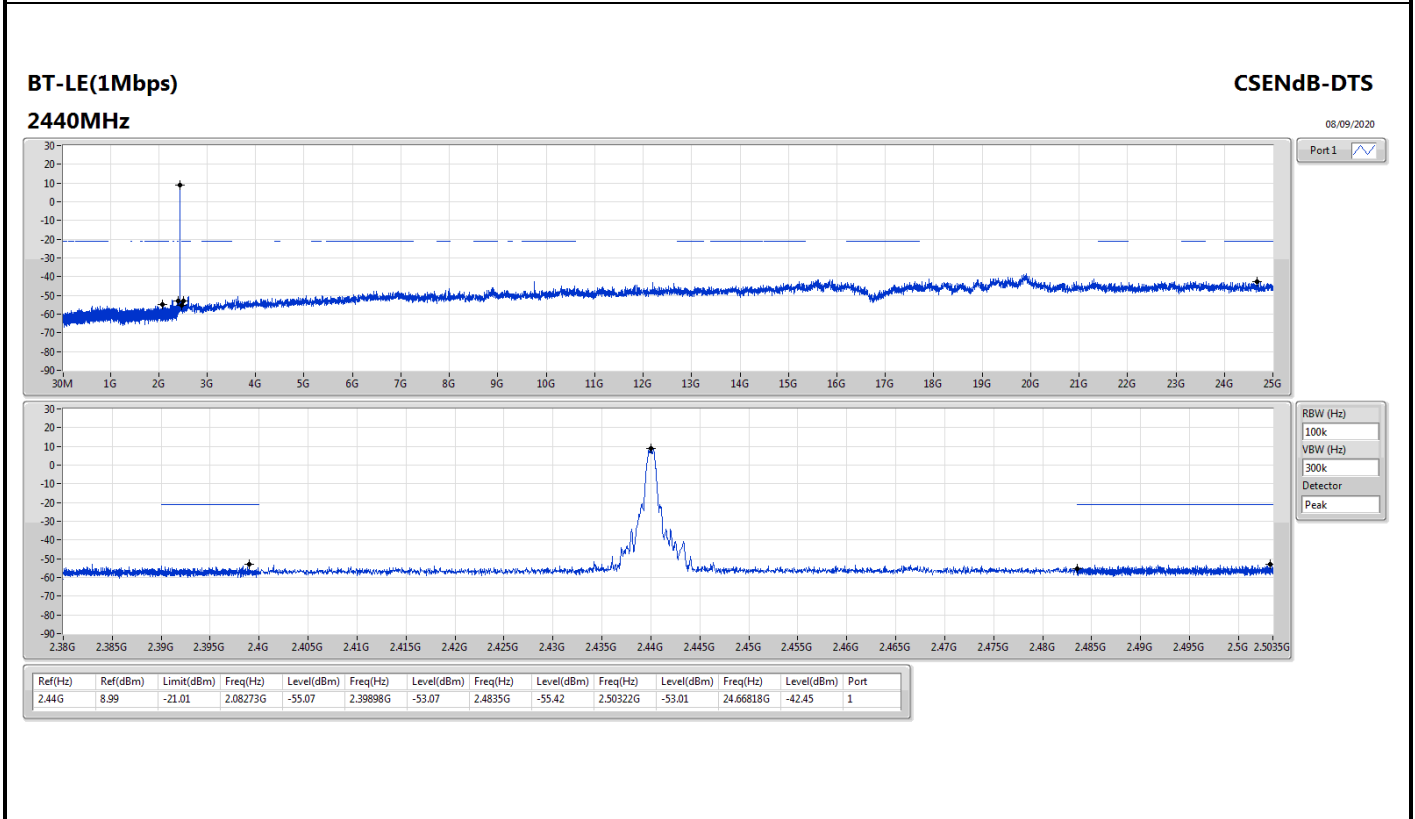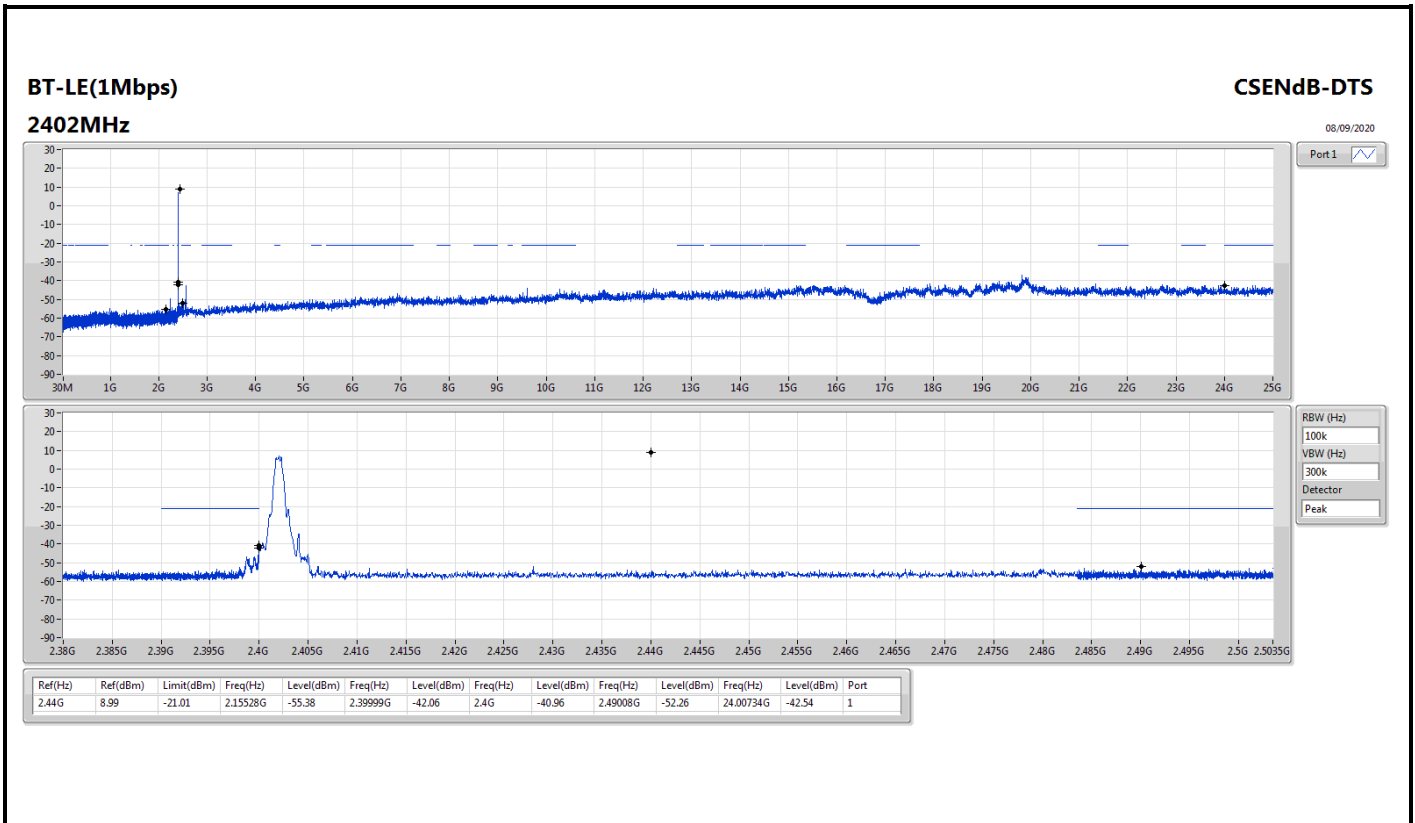

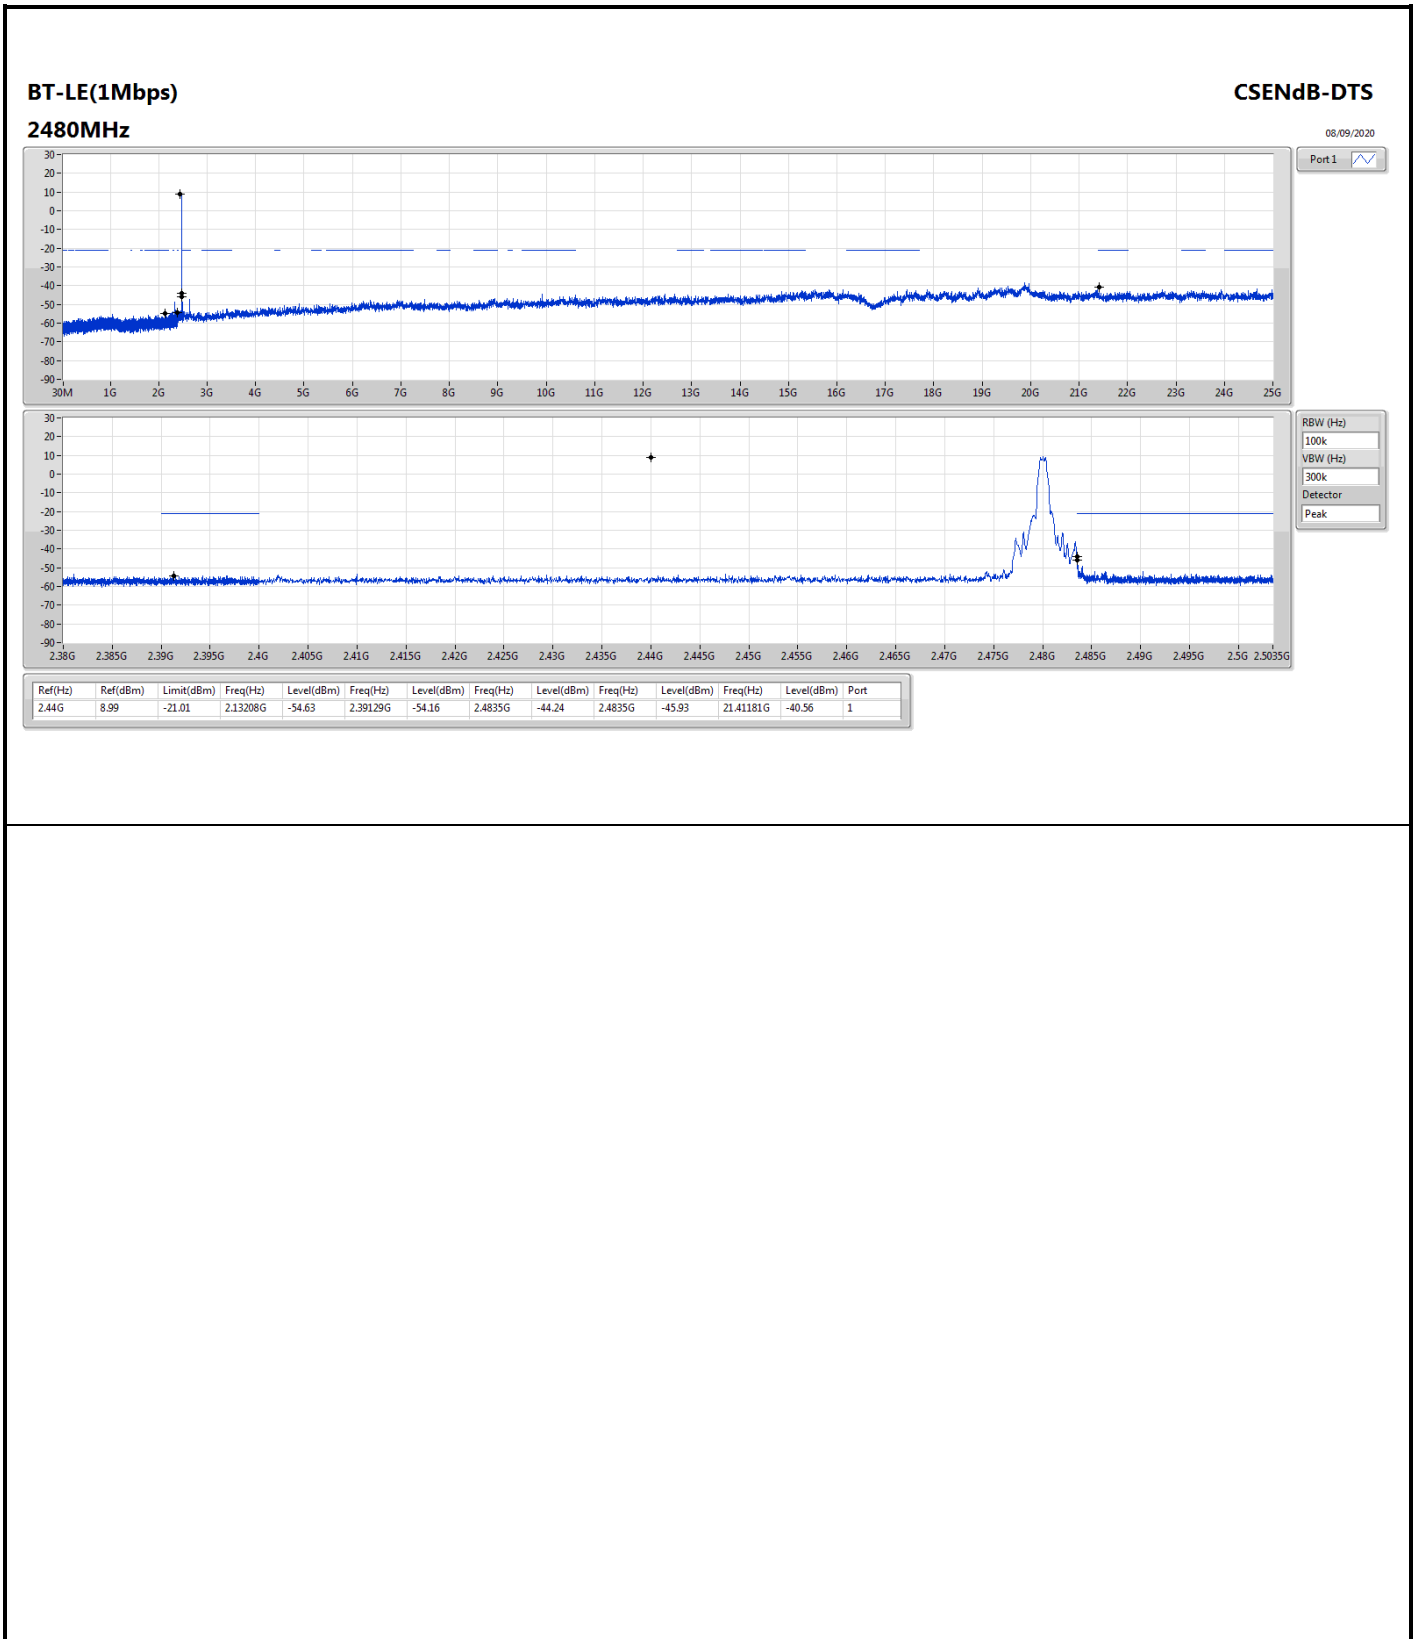



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	672.14M	37.86	46.00	-8.14	3	Horizontal	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	61.04M	28.92	40.00	-11.08	3	Vertical	0	1.00	-
2440MHz	Pass	PK	128.94M	26.63	43.50	-16.87	3	Vertical	0	1.00	-
2440MHz	Pass	PK	272.5M	27.08	46.00	-18.92	3	Vertical	0	1.00	-
2440MHz	Pass	PK	326.82M	32.55	46.00	-13.45	3	Vertical	0	1.00	-
2440MHz	Pass	PK	672.14M	33.56	46.00	-12.44	3	Vertical	0	1.00	-
2440MHz	Pass	PK	774.96M	36.74	46.00	-9.26	3	Vertical	0	1.00	-
2440MHz	Pass	PK	128.94M	29.06	43.50	-14.44	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	210.42M	27.71	43.50	-15.79	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	288.02M	30.34	46.00	-15.66	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	326.82M	36.90	46.00	-9.10	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	672.14M	37.86	46.00	-8.14	3	Horizontal	360	1.00	-
2440MHz	Pass	PK	774.96M	36.56	46.00	-9.44	3	Horizontal	360	1.00	-

BT-LE(1Mbps)
2440MHz_Adapter


08/09/2020

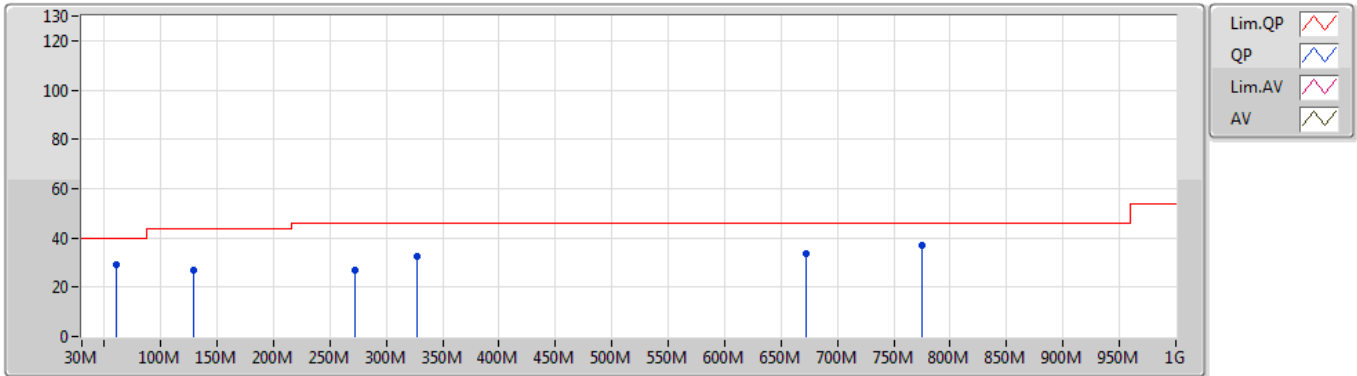





Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	61.04M	28.92	40.00	-11.08	-25.52	3	Vertical	0	1.00	-	54.44	10.86	0.60	36.98
PK	128.94M	26.63	43.50	-16.87	-18.82	3	Vertical	0	1.00	-	45.45	16.77	0.84	36.43
PK	272.5M	27.08	46.00	-18.92	-17.07	3	Vertical	0	1.00	-	44.15	17.98	1.34	36.39
PK	326.82M	32.55	46.00	-13.45	-16.10	3	Vertical	0	1.00	-	48.65	18.88	1.45	36.43
PK	672.14M	33.56	46.00	-12.44	-9.22	3	Vertical	0	1.00	-	42.78	25.60	2.29	37.11
PK	774.96M	36.74	46.00	-9.26	-7.44	3	Vertical	0	1.00	-	44.18	27.36	2.55	37.35

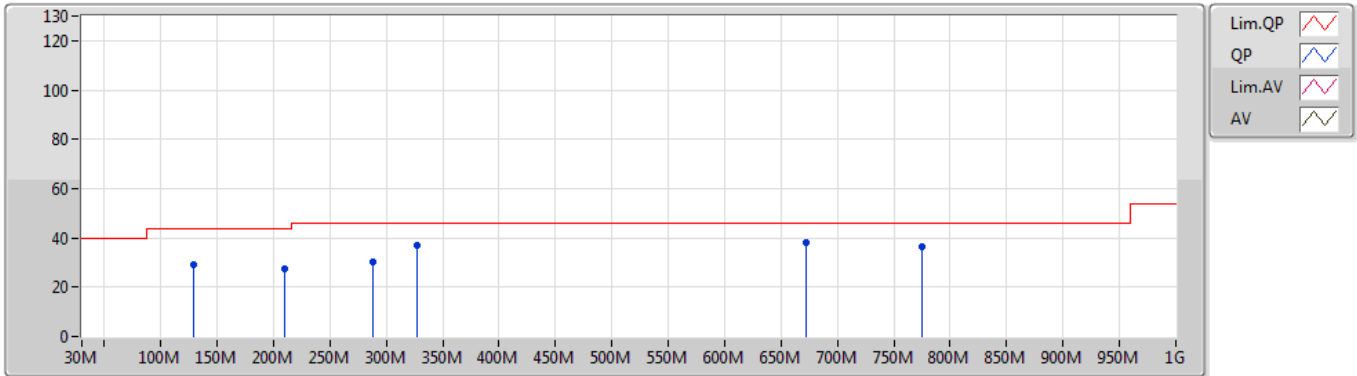BT-LE(1Mbps)
2440MHz_Adapter

08/09/2020



Lim.QP 
 QP 
 Lim.AV 
 AV 

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	128.94M	29.06	43.50	-14.44	-18.82	3	Horizontal	360	1.00	-	47.88	16.77	0.84	36.43
PK	210.42M	27.71	43.50	-15.79	-20.87	3	Horizontal	360	1.00	-	48.58	14.22	1.14	36.23
PK	288.02M	30.34	46.00	-15.66	-16.90	3	Horizontal	360	1.00	-	47.24	18.09	1.38	36.37
PK	326.82M	36.90	46.00	-9.10	-16.10	3	Horizontal	360	1.00	-	53.00	18.88	1.45	36.43
PK	672.14M	37.86	46.00	-8.14	-9.22	3	Horizontal	360	1.00	-	47.08	25.60	2.29	37.11
PK	774.96M	36.56	46.00	-9.44	-7.44	3	Horizontal	360	1.00	-	44.00	27.36	2.55	37.35



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	53.83	54.00	-0.17	3	Horizontal	57	2.23	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2402MHz_TX	Pass	AV	2.3832G	45.18	54.00	-8.82	3	Vertical	74	2.75	-
2402MHz_TX	Pass	AV	2.402G	102.86	Inf	-Inf	3	Vertical	74	2.75	-
2402MHz_TX	Pass	PK	2.375G	57.42	74.00	-16.58	3	Vertical	74	2.75	-
2402MHz_TX	Pass	PK	2.4022G	103.85	Inf	-Inf	3	Vertical	74	2.75	-
2402MHz_TX	Pass	AV	2.3608G	45.19	54.00	-8.81	3	Horizontal	61	2.39	-
2402MHz_TX	Pass	AV	2.402G	105.62	Inf	-Inf	3	Horizontal	61	2.39	-
2402MHz_TX	Pass	PK	2.39G	57.28	74.00	-16.72	3	Horizontal	61	2.39	-
2402MHz_TX	Pass	PK	2.4022G	106.61	Inf	-Inf	3	Horizontal	61	2.39	-
2402MHz_TX	Pass	AV	4.80412G	40.71	54.00	-13.29	3	Vertical	54	1.00	-
2402MHz_TX	Pass	PK	4.80358G	48.85	74.00	-25.15	3	Vertical	54	1.00	-
2402MHz_TX	Pass	AV	4.80418G	37.68	54.00	-16.32	3	Horizontal	40	1.22	-
2402MHz_TX	Pass	PK	4.80364G	46.83	74.00	-27.17	3	Horizontal	40	1.22	-
2440MHz_TX	Pass	AV	2.3448G	45.35	54.00	-8.65	3	Vertical	66	2.00	-
2440MHz_TX	Pass	AV	2.44G	105.65	Inf	-Inf	3	Vertical	66	2.00	-
2440MHz_TX	Pass	AV	2.4924G	45.80	54.00	-8.20	3	Vertical	66	2.00	-
2440MHz_TX	Pass	PK	2.3736G	57.24	74.00	-16.76	3	Vertical	66	2.00	-
2440MHz_TX	Pass	PK	2.4396G	106.63	Inf	-Inf	3	Vertical	66	2.00	-
2440MHz_TX	Pass	PK	2.4916G	56.70	74.00	-17.30	3	Vertical	66	2.00	-
2440MHz_TX	Pass	AV	2.39G	45.05	54.00	-8.95	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	AV	2.44G	108.19	Inf	-Inf	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	AV	2.4876G	45.38	54.00	-8.62	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	PK	2.3488G	56.56	74.00	-17.44	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	PK	2.4396G	109.18	Inf	-Inf	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	PK	2.4896G	57.09	74.00	-16.91	3	Horizontal	55	2.30	-
2440MHz_TX	Pass	AV	4.87982G	34.29	54.00	-19.71	3	Vertical	41	1.29	-
2440MHz_TX	Pass	PK	4.87964G	44.62	74.00	-29.38	3	Vertical	41	1.29	-
2440MHz_TX	Pass	AV	4.87988G	33.69	54.00	-20.31	3	Horizontal	32	1.56	-
2440MHz_TX	Pass	PK	4.88G	44.60	74.00	-29.40	3	Horizontal	32	1.56	-
2480MHz_TX	Pass	AV	2.48G	104.14	Inf	-Inf	3	Vertical	72	2.10	-
2480MHz_TX	Pass	AV	2.4835G	50.80	54.00	-3.20	3	Vertical	72	2.10	-
2480MHz_TX	Pass	PK	2.4798G	105.20	Inf	-Inf	3	Vertical	72	2.10	-
2480MHz_TX	Pass	PK	2.4835G	62.04	74.00	-11.96	3	Vertical	72	2.10	-
2480MHz_TX	Pass	AV	2.48G	108.59	Inf	-Inf	3	Horizontal	57	2.23	-
2480MHz_TX	Pass	AV	2.4835G	53.83	54.00	-0.17	3	Horizontal	57	2.23	-
2480MHz_TX	Pass	PK	2.4798G	109.64	Inf	-Inf	3	Horizontal	57	2.23	-
2480MHz_TX	Pass	PK	2.4835G	65.30	74.00	-8.70	3	Horizontal	57	2.23	-
2480MHz_TX	Pass	AV	4.95984G	40.18	54.00	-13.82	3	Vertical	67	1.00	-
2480MHz_TX	Pass	PK	4.95959G	47.65	74.00	-26.35	3	Vertical	67	1.00	-
2480MHz_TX	Pass	AV	4.96044G	36.15	54.00	-17.85	3	Horizontal	122	1.85	-
2480MHz_TX	Pass	PK	4.95943G	44.69	74.00	-29.31	3	Horizontal	122	1.85	-

BT-LE(1Mbps)

08/09/2020

2402MHz_TX

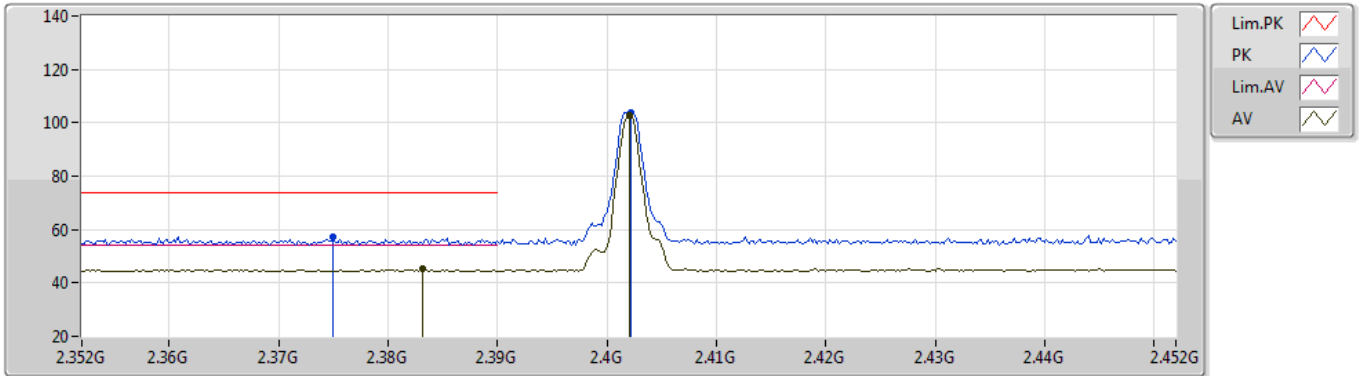


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3832G	45.18	54.00	-8.82	31.54	3	Vertical	74	2.75	-	13.64	27.67	3.87	-
AV	2.402G	102.86	Inf	-Inf	31.50	3	Vertical	74	2.75	-	71.36	27.60	3.90	-
PK	2.375G	57.42	74.00	-16.58	31.56	3	Vertical	74	2.75	-	25.86	27.70	3.86	-
PK	2.4022G	103.85	Inf	-Inf	31.50	3	Vertical	74	2.75	-	72.35	27.60	3.90	-

BT-LE(1Mbps)

08/09/2020

2402MHz_TX

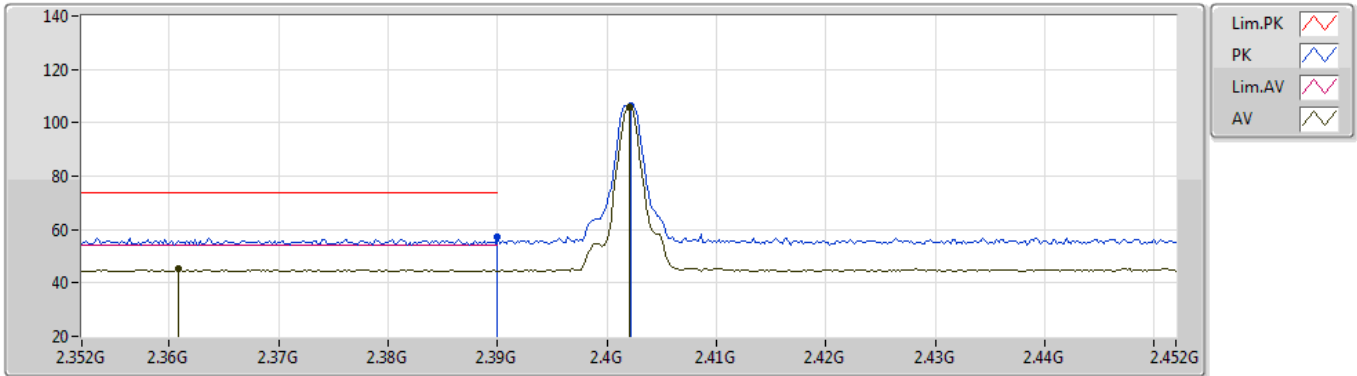


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3608G	45.19	54.00	-8.81	31.60	3	Horizontal	61	2.39	-	13.59	27.76	3.84	-
AV	2.402G	105.62	Inf	-Inf	31.50	3	Horizontal	61	2.39	-	74.12	27.60	3.90	-
PK	2.39G	57.28	74.00	-16.72	31.52	3	Horizontal	61	2.39	-	25.76	27.64	3.88	-
PK	2.4022G	106.61	Inf	-Inf	31.50	3	Horizontal	61	2.39	-	75.11	27.60	3.90	-

BT-LE(1Mbps)

08/09/2020

2402MHz_TX

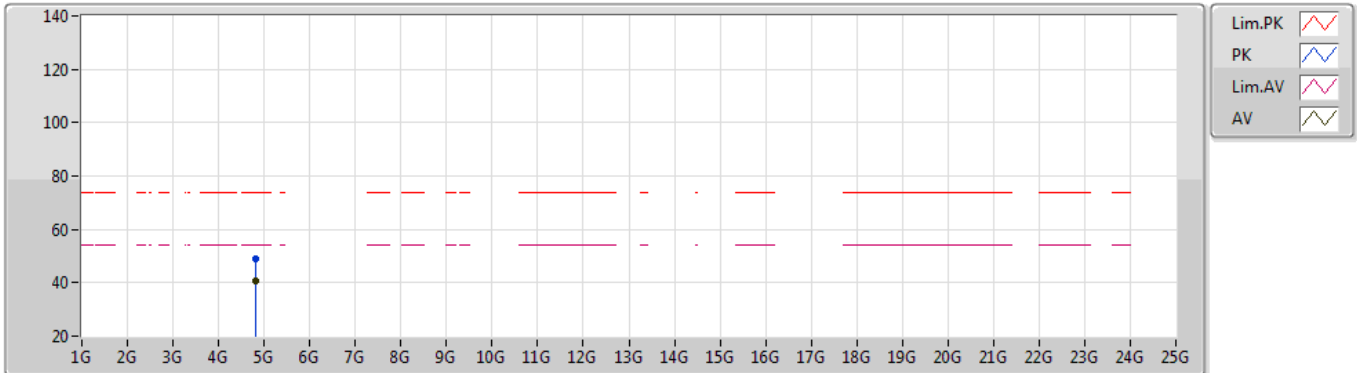


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80412G	40.71	54.00	-13.29	1.49	3	Vertical	54	1.00	-	39.22	31.12	5.30	34.93
PK	4.80358G	48.85	74.00	-25.15	1.48	3	Vertical	54	1.00	-	47.37	31.11	5.30	34.93

BT-LE(1Mbps)

08/09/2020

2402MHz_TX

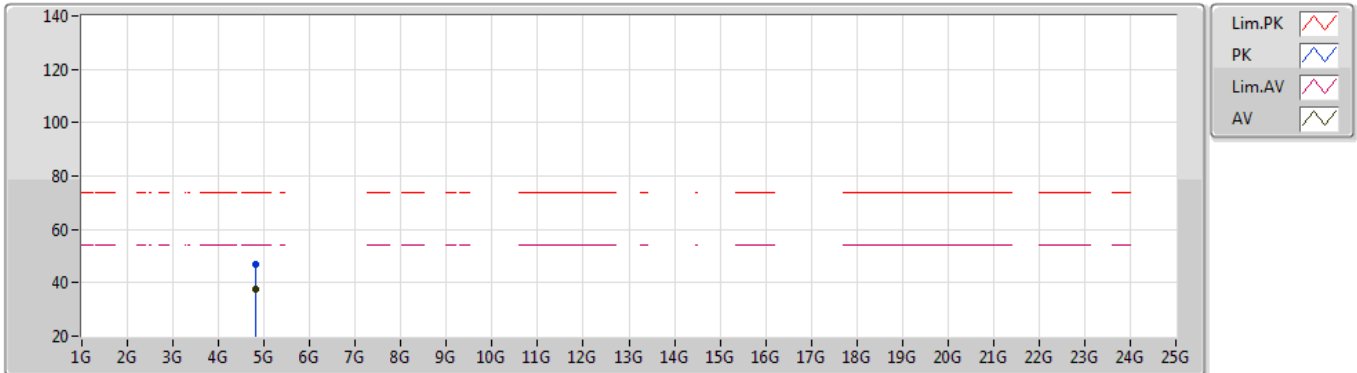


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.80418G	37.68	54.00	-16.32	1.49	3	Horizontal	40	1.22	-	36.19	31.12	5.30	34.93
PK	4.80364G	46.83	74.00	-27.17	1.48	3	Horizontal	40	1.22	-	45.35	31.11	5.30	34.93

BT-LE(1Mbps)

08/09/2020

2440MHz_TX

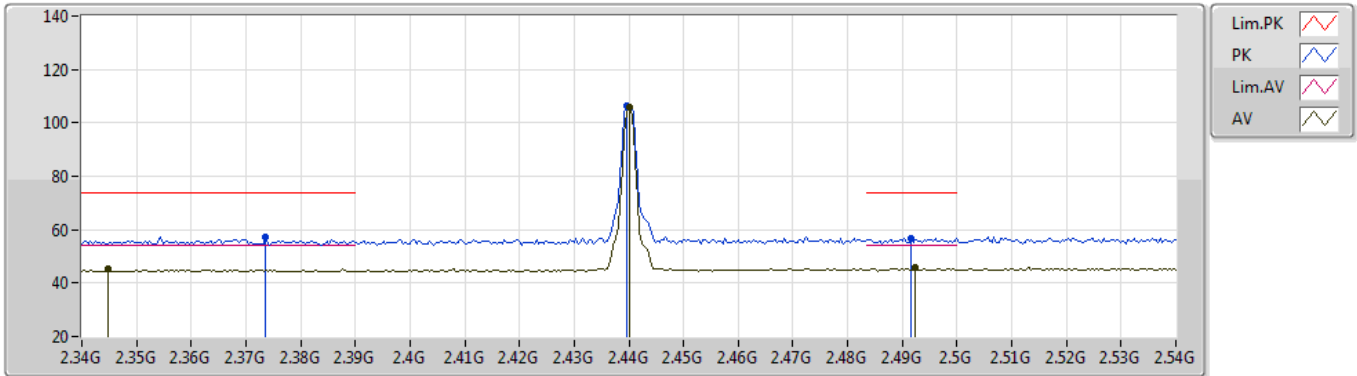


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3448G	45.35	54.00	-8.65	31.63	3	Vertical	66	2.00	-	13.72	27.81	3.82	-
AV	2.44G	105.65	Inf	-Inf	31.56	3	Vertical	66	2.00	-	74.09	27.60	3.96	-
AV	2.4924G	45.80	54.00	-8.20	31.64	3	Vertical	66	2.00	-	14.16	27.60	4.04	-
PK	2.3736G	57.24	74.00	-16.76	31.57	3	Vertical	66	2.00	-	25.67	27.71	3.86	-
PK	2.4396G	106.63	Inf	-Inf	31.56	3	Vertical	66	2.00	-	75.07	27.60	3.96	-
PK	2.4916G	56.70	74.00	-17.30	31.64	3	Vertical	66	2.00	-	25.06	27.60	4.04	-

BT-LE(1Mbps)

08/09/2020

2440MHz_TX

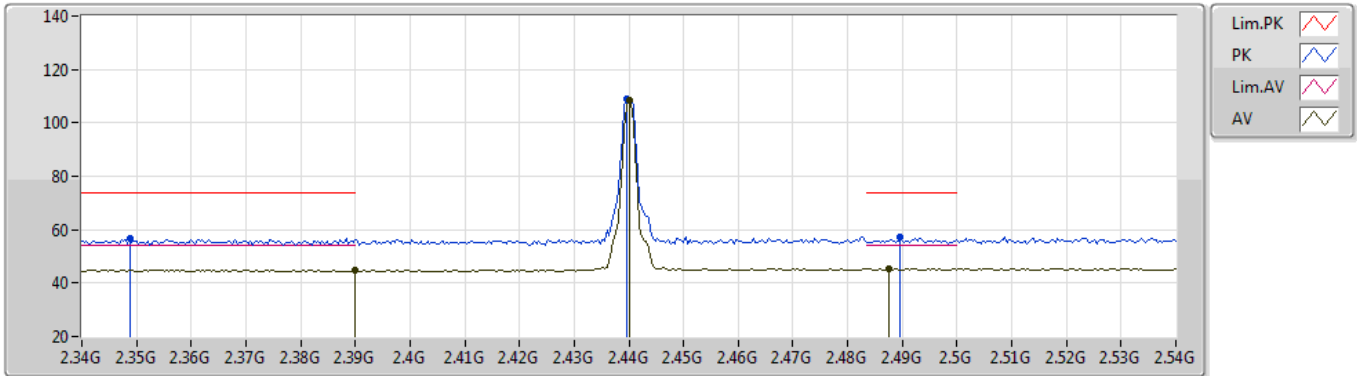


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.39G	45.05	54.00	-8.95	31.52	3	Horizontal	55	2.30	-	13.53	27.64	3.88	-
AV	2.44G	108.19	Inf	-Inf	31.56	3	Horizontal	55	2.30	-	76.63	27.60	3.96	-
AV	2.4876G	45.38	54.00	-8.62	31.63	3	Horizontal	55	2.30	-	13.75	27.60	4.03	-
PK	2.3488G	56.56	74.00	-17.44	31.62	3	Horizontal	55	2.30	-	24.94	27.80	3.82	-
PK	2.4396G	109.18	Inf	-Inf	31.56	3	Horizontal	55	2.30	-	77.62	27.60	3.96	-
PK	2.4896G	57.09	74.00	-16.91	31.63	3	Horizontal	55	2.30	-	25.46	27.60	4.03	-

BT-LE(1Mbps)

08/09/2020

2440MHz_TX

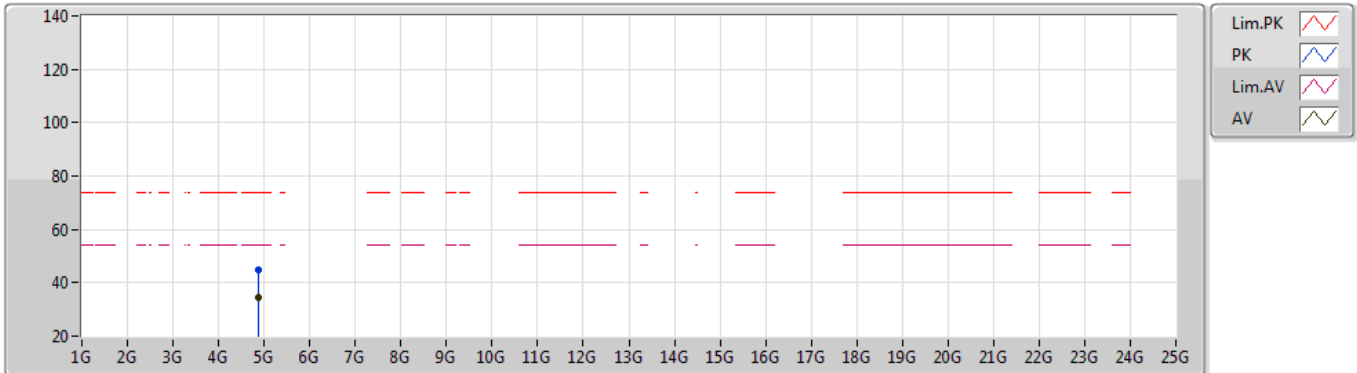


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87982G	34.29	54.00	-19.71	1.65	3	Vertical	41	1.29	-	32.64	31.24	5.34	34.93
PK	4.87964G	44.62	74.00	-29.38	1.65	3	Vertical	41	1.29	-	42.97	31.24	5.34	34.93

BT-LE(1Mbps)

08/09/2020

2440MHz_TX

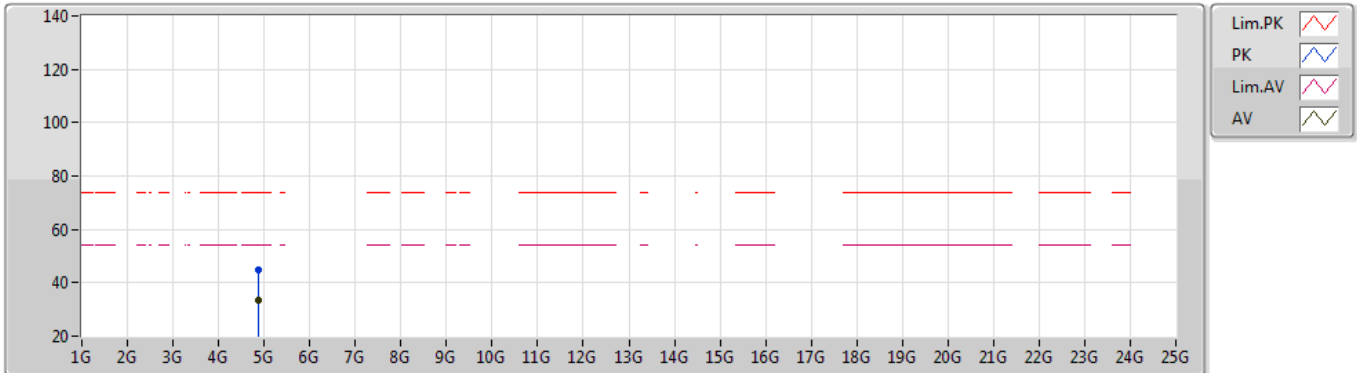


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.87988G	33.69	54.00	-20.31	1.65	3	Horizontal	32	1.56	-	32.04	31.24	5.34	34.93
PK	4.88G	44.60	74.00	-29.40	1.65	3	Horizontal	32	1.56	-	42.95	31.24	5.34	34.93

BT-LE(1Mbps)

08/09/2020

2480MHz_TX

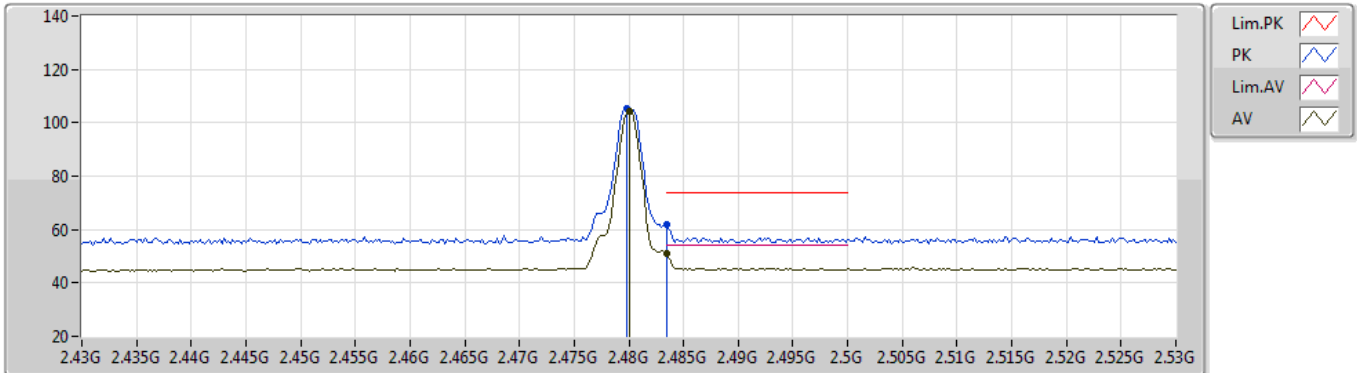


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	104.14	Inf	-Inf	31.62	3	Vertical	72	2.10	-	72.52	27.60	4.02	-
AV	2.4835G	50.80	54.00	-3.20	31.63	3	Vertical	72	2.10	-	19.17	27.60	4.03	-
PK	2.4798G	105.20	Inf	-Inf	31.62	3	Vertical	72	2.10	-	73.58	27.60	4.02	-
PK	2.4835G	62.04	74.00	-11.96	31.63	3	Vertical	72	2.10	-	30.41	27.60	4.03	-

BT-LE(1Mbps)

08/09/2020

2480MHz_TX

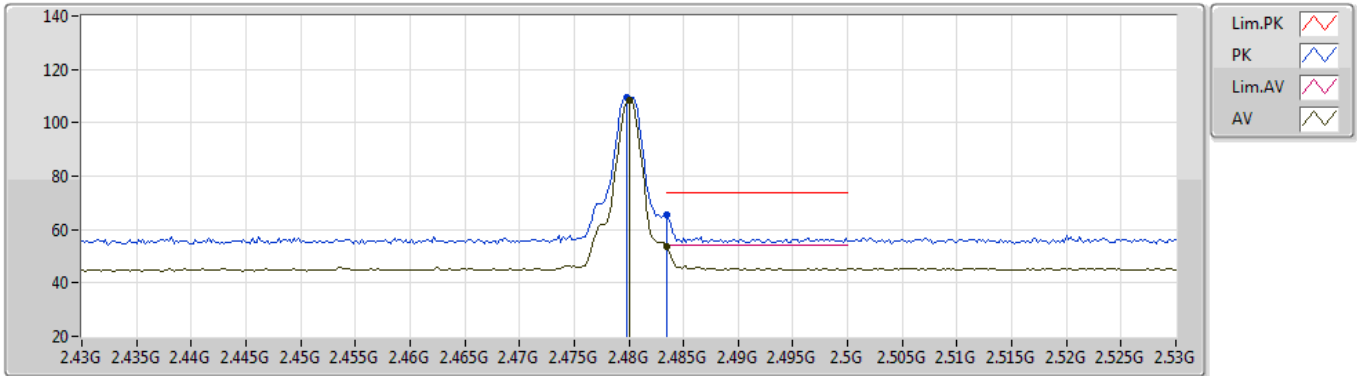


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	108.59	Inf	-Inf	31.62	3	Horizontal	57	2.23	-	76.97	27.60	4.02	-
AV	2.4835G	53.83	54.00	-0.17	31.63	3	Horizontal	57	2.23	-	22.20	27.60	4.03	-
PK	2.4798G	109.64	Inf	-Inf	31.62	3	Horizontal	57	2.23	-	78.02	27.60	4.02	-
PK	2.4835G	65.30	74.00	-8.70	31.63	3	Horizontal	57	2.23	-	33.67	27.60	4.03	-

BT-LE(1Mbps)

07/09/2020

2480MHz_TX

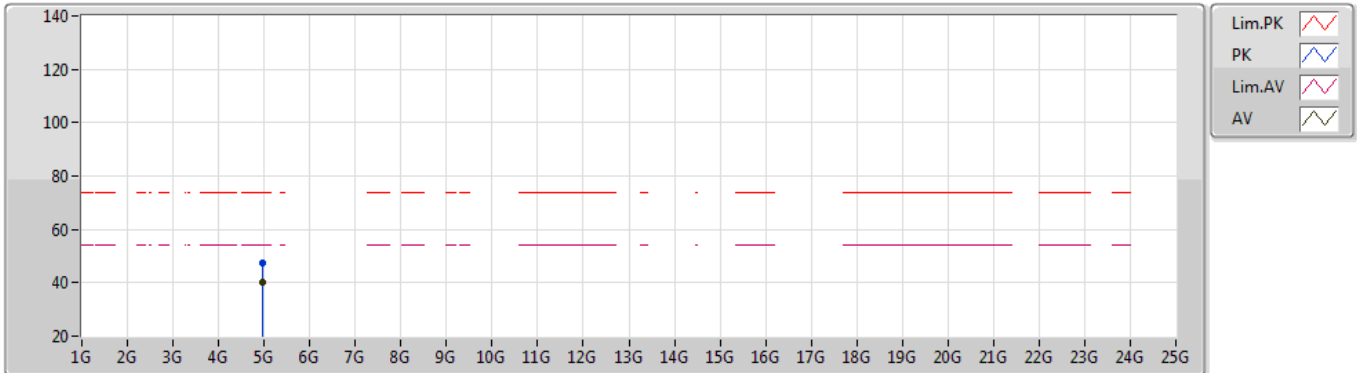


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.95984G	40.18	54.00	-13.82	1.86	3	Vertical	67	1.00	-	38.32	31.42	5.38	34.94
PK	4.95959G	47.65	74.00	-26.35	1.86	3	Vertical	67	1.00	-	45.79	31.42	5.38	34.94

BT-LE(1Mbps)

07/09/2020

2480MHz_TX

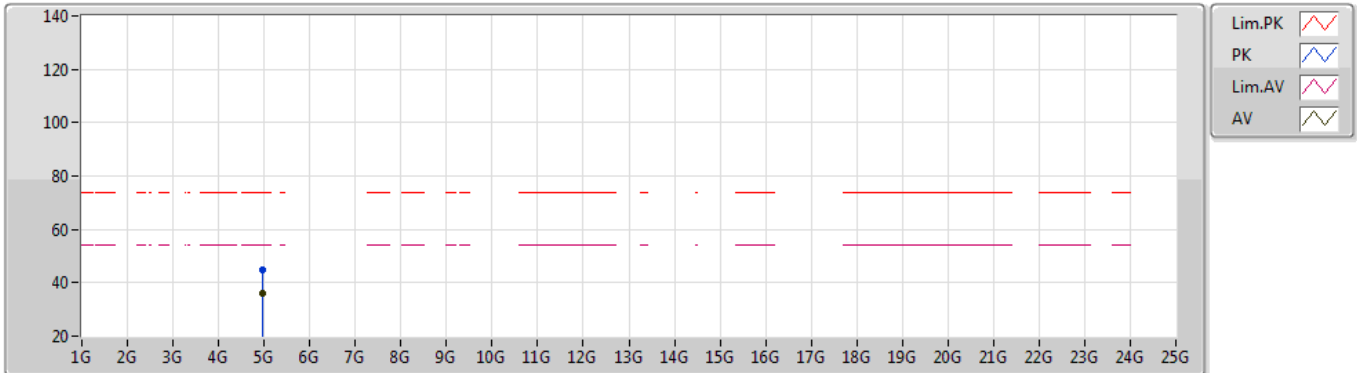

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	4.96044G	36.15	54.00	-17.85	1.86	3	Horizontal	122	1.85	-	34.29	31.42	5.38	34.94
PK	4.95943G	44.69	74.00	-29.31	1.86	3	Horizontal	122	1.85	-	42.83	31.42	5.38	34.94