

## Appendix C for KSCR221000198201

### Calibration Certificate

Object	Apply	No	Model	SN	Calibration Date
Dipole	<input checked="" type="checkbox"/>	1	D3500V2	1101	2021/09/09
	<input checked="" type="checkbox"/>	2	D3700V2	1103	2021/09/09
	<input checked="" type="checkbox"/>	3	D3900V2	1080	2021/09/13
DAE	<input checked="" type="checkbox"/>	4	DAE4	1245	2022/05/30
	<input checked="" type="checkbox"/>	5	DAE4	1245	2023/04/25
Probe	<input checked="" type="checkbox"/>	6	EX3DV4	7767	2022/10/28



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

## 1 Dipole

### 1.1 D3500V2 - SN 1101


<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zuglhauserstrasse 45, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Auden)</b> Certificate No: <b>D3500V2-1101_Sep21</b></p> <h4>CALIBRATION CERTIFICATE</h4> <p>Object: <b>D3500V2 - SN:1101</b></p> <p>Calibration procedure(s): <b>QA CAL-22 v6 Calibration Procedure for SAR Validation Sources between 3-10 GHz</b></p> <p>Calibration date: <b>September 09, 2021</b></p> <p>This calibration certificate documents the traceability in national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 0.1°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal. Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter NRP</td> <td>SN: 104778</td> <td>09-Apr-21 (No. 217-02091)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP291</td> <td>SN: 103244</td> <td>09-Apr-21 (No. 217-02091)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP 291</td> <td>SN: 103245</td> <td>09-Apr-21 (No. 217-02092)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: B91284 (20)</td> <td>08-Apr-21 (No. 217-03343)</td> <td>Apr-22</td> </tr> <tr> <td>Type-N termination combinator</td> <td>SN: 310882 / 05037</td> <td>08-Apr-21 (No. 217-03344)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe EXD1V4</td> <td>SN: 3503</td> <td>30-Oct-20 (No. EX-3503_Dec20)</td> <td>Dec-21</td> </tr> <tr> <td>DAZ4</td> <td>SN: 601</td> <td>02-Nov-20 (No. DA6-401_Nov20)</td> <td>Nov-21</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter S4145B</td> <td>SN: 0639512415</td> <td>30-Oct-19 (in house check Oct-20)</td> <td>in house check: Oct-22</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>SN: US37292763</td> <td>07-Oct-19 (in house check Oct-20)</td> <td>in house check: Oct-22</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>SN: M74198217</td> <td>07-Oct-19 (in house check Oct-20)</td> <td>in house check: Oct-22</td> </tr> <tr> <td>RF generator N85 S87-08</td> <td>SN: 100872</td> <td>15-Jun-19 (in house check Oct-20)</td> <td>in house check: Oct-22</td> </tr> <tr> <td>Network Analyzer Agilent E8363A</td> <td>SN: US4106477</td> <td>31-Mar-14 (in house check Oct-20)</td> <td>in house check: Oct-21</td> </tr> </tbody> </table> <p>Calibrated by: <b>Leif Klyener</b> (Laboratory Technician) Signature: <i>[Signature]</i></p> <p>Approved by: <b>Korpi Potvick</b> (Technical Manager) Signature: <i>[Signature]</i></p> <p>Issued: September 10, 2021</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: D3500V2-1101_Sep21 Page 1 of 7</p>	Primary Standards	ID #	Cal. Date (Certificate No.)	Scheduled Calibration	Power meter NRP	SN: 104778	09-Apr-21 (No. 217-02091)	Apr-22	Power sensor NRP291	SN: 103244	09-Apr-21 (No. 217-02091)	Apr-22	Power sensor NRP 291	SN: 103245	09-Apr-21 (No. 217-02092)	Apr-22	Reference 20 dB Attenuator	SN: B91284 (20)	08-Apr-21 (No. 217-03343)	Apr-22	Type-N termination combinator	SN: 310882 / 05037	08-Apr-21 (No. 217-03344)	Apr-22	Reference Probe EXD1V4	SN: 3503	30-Oct-20 (No. EX-3503_Dec20)	Dec-21	DAZ4	SN: 601	02-Nov-20 (No. DA6-401_Nov20)	Nov-21	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power meter S4145B	SN: 0639512415	30-Oct-19 (in house check Oct-20)	in house check: Oct-22	Power sensor HP 8481A	SN: US37292763	07-Oct-19 (in house check Oct-20)	in house check: Oct-22	Power sensor HP 8481A	SN: M74198217	07-Oct-19 (in house check Oct-20)	in house check: Oct-22	RF generator N85 S87-08	SN: 100872	15-Jun-19 (in house check Oct-20)	in house check: Oct-22	Network Analyzer Agilent E8363A	SN: US4106477	31-Mar-14 (in house check Oct-20)	in house check: Oct-21	<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zuglhauserstrasse 45, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Accreditation No.: <b>SCS 0108</b></p> <p>Glossary: TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORM x,y,z N/A: not applicable or not measured</p> <p>Calibration is Performed According to the Following Standards: a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020. b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p>Additional Documentation: c) DASY System Handbook</p> <p>Methods Applied and Interpretation of Parameters:  <ul style="list-style-type: none"> <li>Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>Antenna Parameters with TSL: The source is mounted in a touch configuration below the center marking of the flat phantom.</li> <li>Return Loss: This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.</li> <li>SAR measured: SAR measured at the stated antenna input power.</li> <li>SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> </p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: D3500V2-1101_Sep21 Page 2 of 7</p>																																																		
Primary Standards	ID #	Cal. Date (Certificate No.)	Scheduled Calibration																																																																																																								
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-02091)	Apr-22																																																																																																								
Power sensor NRP291	SN: 103244	09-Apr-21 (No. 217-02091)	Apr-22																																																																																																								
Power sensor NRP 291	SN: 103245	09-Apr-21 (No. 217-02092)	Apr-22																																																																																																								
Reference 20 dB Attenuator	SN: B91284 (20)	08-Apr-21 (No. 217-03343)	Apr-22																																																																																																								
Type-N termination combinator	SN: 310882 / 05037	08-Apr-21 (No. 217-03344)	Apr-22																																																																																																								
Reference Probe EXD1V4	SN: 3503	30-Oct-20 (No. EX-3503_Dec20)	Dec-21																																																																																																								
DAZ4	SN: 601	02-Nov-20 (No. DA6-401_Nov20)	Nov-21																																																																																																								
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																																																																								
Power meter S4145B	SN: 0639512415	30-Oct-19 (in house check Oct-20)	in house check: Oct-22																																																																																																								
Power sensor HP 8481A	SN: US37292763	07-Oct-19 (in house check Oct-20)	in house check: Oct-22																																																																																																								
Power sensor HP 8481A	SN: M74198217	07-Oct-19 (in house check Oct-20)	in house check: Oct-22																																																																																																								
RF generator N85 S87-08	SN: 100872	15-Jun-19 (in house check Oct-20)	in house check: Oct-22																																																																																																								
Network Analyzer Agilent E8363A	SN: US4106477	31-Mar-14 (in house check Oct-20)	in house check: Oct-21																																																																																																								
<p>Measurement Conditions DASY system configuration, as far as not given on page 1.</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY2</th> <th>V52.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Modular Flat Phantom VS.0</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy = 4.0 mm, dz = 1.4 mm</td> <td>Graded Ratio = 1.4 (Z direction)</td> </tr> <tr> <td>Frequency</td> <td>3400 MHz ± 1 MHz 3500 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p>Head TSL parameters at 3400 MHz The following parameters and calculations were applied:</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>38.0</td> <td>2.81 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>38.1 ± 6 %</td> <td>2.86 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt; 0.5 °C</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>SAR result with Head TSL at 3400 MHz</p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>2</sup> (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>6.89 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><b>68.5 W/kg ± 19.9 % (k=2)</b></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>SAR averaged over 10 cm<sup>2</sup> (10 g) of Head TSL</th> <th>condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.57 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><b>25.6 W/kg ± 19.5 % (k=2)</b></td> </tr> </tbody> </table> <p>Head TSL parameters at 3500 MHz The following parameters and calculations were applied:</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>37.9</td> <td>2.91 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>37.9 ± 6 %</td> <td>2.96 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt; 0.5 °C</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>SAR result with Head TSL at 3500 MHz</p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>2</sup> (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>6.71 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><b>66.9 W/kg ± 19.9 % (k=2)</b></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>SAR averaged over 10 cm<sup>2</sup> (10 g) of Head TSL</th> <th>condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.52 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><b>25.2 W/kg ± 19.5 % (k=2)</b></td> </tr> </tbody> </table> <p>Certificate No: D3500V2-1101_Sep21 Page 3 of 7</p>	DASY Version	DASY2	V52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Modular Flat Phantom VS.0		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)	Frequency	3400 MHz ± 1 MHz 3500 MHz ± 1 MHz		Parameter	Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	38.0	2.81 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	38.1 ± 6 %	2.86 mho/m ± 6 %	Head TSL temperature change during test	< 0.5 °C	---	---	SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition		SAR measured	100 mW input power	6.89 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<b>68.5 W/kg ± 19.9 % (k=2)</b>	SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition		SAR measured	100 mW input power	2.57 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<b>25.6 W/kg ± 19.5 % (k=2)</b>	Parameter	Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	37.9	2.91 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	37.9 ± 6 %	2.96 mho/m ± 6 %	Head TSL temperature change during test	< 0.5 °C	---	---	SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition		SAR measured	100 mW input power	6.71 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<b>66.9 W/kg ± 19.9 % (k=2)</b>	SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition		SAR measured	100 mW input power	2.52 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<b>25.2 W/kg ± 19.5 % (k=2)</b>	<p>Appendix (Additional assessments outside the scope of SCS 0108)</p> <p>Antenna Parameters with Head TSL at 3400 MHz</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Impedance, transformed to feed point</td> <td>44.9 Ω - 5.8 jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-21.9 dB</td> </tr> </tbody> </table> <p>Antenna Parameters with Head TSL at 3500 MHz</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Impedance, transformed to feed point</td> <td>53.4 Ω - 3.8 jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-26.1 dB</td> </tr> </tbody> </table> <p>General Antenna Parameters and Design</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Electrical Delay (one direction)</td> <td>1.132 ns</td> </tr> </tbody> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.</p> <p>No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.</p> <p>Additional EUT Data</p> <table border="1"> <thead> <tr> <th>Parameter</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </tbody> </table> <p>Certificate No: D3500V2-1101_Sep21 Page 4 of 7</p>	Parameter	Value	Impedance, transformed to feed point	44.9 Ω - 5.8 jΩ	Return Loss	-21.9 dB	Parameter	Value	Impedance, transformed to feed point	53.4 Ω - 3.8 jΩ	Return Loss	-26.1 dB	Parameter	Value	Electrical Delay (one direction)	1.132 ns	Parameter	Value	Manufactured by	SPEAG
DASY Version	DASY2	V52.10.4																																																																																																									
Extrapolation	Advanced Extrapolation																																																																																																										
Phantom	Modular Flat Phantom VS.0																																																																																																										
Distance Dipole Center - TSL	10 mm	with Spacer																																																																																																									
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)																																																																																																									
Frequency	3400 MHz ± 1 MHz 3500 MHz ± 1 MHz																																																																																																										
Parameter	Temperature	Permittivity	Conductivity																																																																																																								
Nominal Head TSL parameters	22.0 °C	38.0	2.81 mho/m																																																																																																								
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.1 ± 6 %	2.86 mho/m ± 6 %																																																																																																								
Head TSL temperature change during test	< 0.5 °C	---	---																																																																																																								
SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition																																																																																																										
SAR measured	100 mW input power	6.89 W/kg																																																																																																									
SAR for nominal Head TSL parameters	normalized to 1W	<b>68.5 W/kg ± 19.9 % (k=2)</b>																																																																																																									
SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition																																																																																																										
SAR measured	100 mW input power	2.57 W/kg																																																																																																									
SAR for nominal Head TSL parameters	normalized to 1W	<b>25.6 W/kg ± 19.5 % (k=2)</b>																																																																																																									
Parameter	Temperature	Permittivity	Conductivity																																																																																																								
Nominal Head TSL parameters	22.0 °C	37.9	2.91 mho/m																																																																																																								
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.9 ± 6 %	2.96 mho/m ± 6 %																																																																																																								
Head TSL temperature change during test	< 0.5 °C	---	---																																																																																																								
SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL	Condition																																																																																																										
SAR measured	100 mW input power	6.71 W/kg																																																																																																									
SAR for nominal Head TSL parameters	normalized to 1W	<b>66.9 W/kg ± 19.9 % (k=2)</b>																																																																																																									
SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL	condition																																																																																																										
SAR measured	100 mW input power	2.52 W/kg																																																																																																									
SAR for nominal Head TSL parameters	normalized to 1W	<b>25.2 W/kg ± 19.5 % (k=2)</b>																																																																																																									
Parameter	Value																																																																																																										
Impedance, transformed to feed point	44.9 Ω - 5.8 jΩ																																																																																																										
Return Loss	-21.9 dB																																																																																																										
Parameter	Value																																																																																																										
Impedance, transformed to feed point	53.4 Ω - 3.8 jΩ																																																																																																										
Return Loss	-26.1 dB																																																																																																										
Parameter	Value																																																																																																										
Electrical Delay (one direction)	1.132 ns																																																																																																										
Parameter	Value																																																																																																										
Manufactured by	SPEAG																																																																																																										



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com

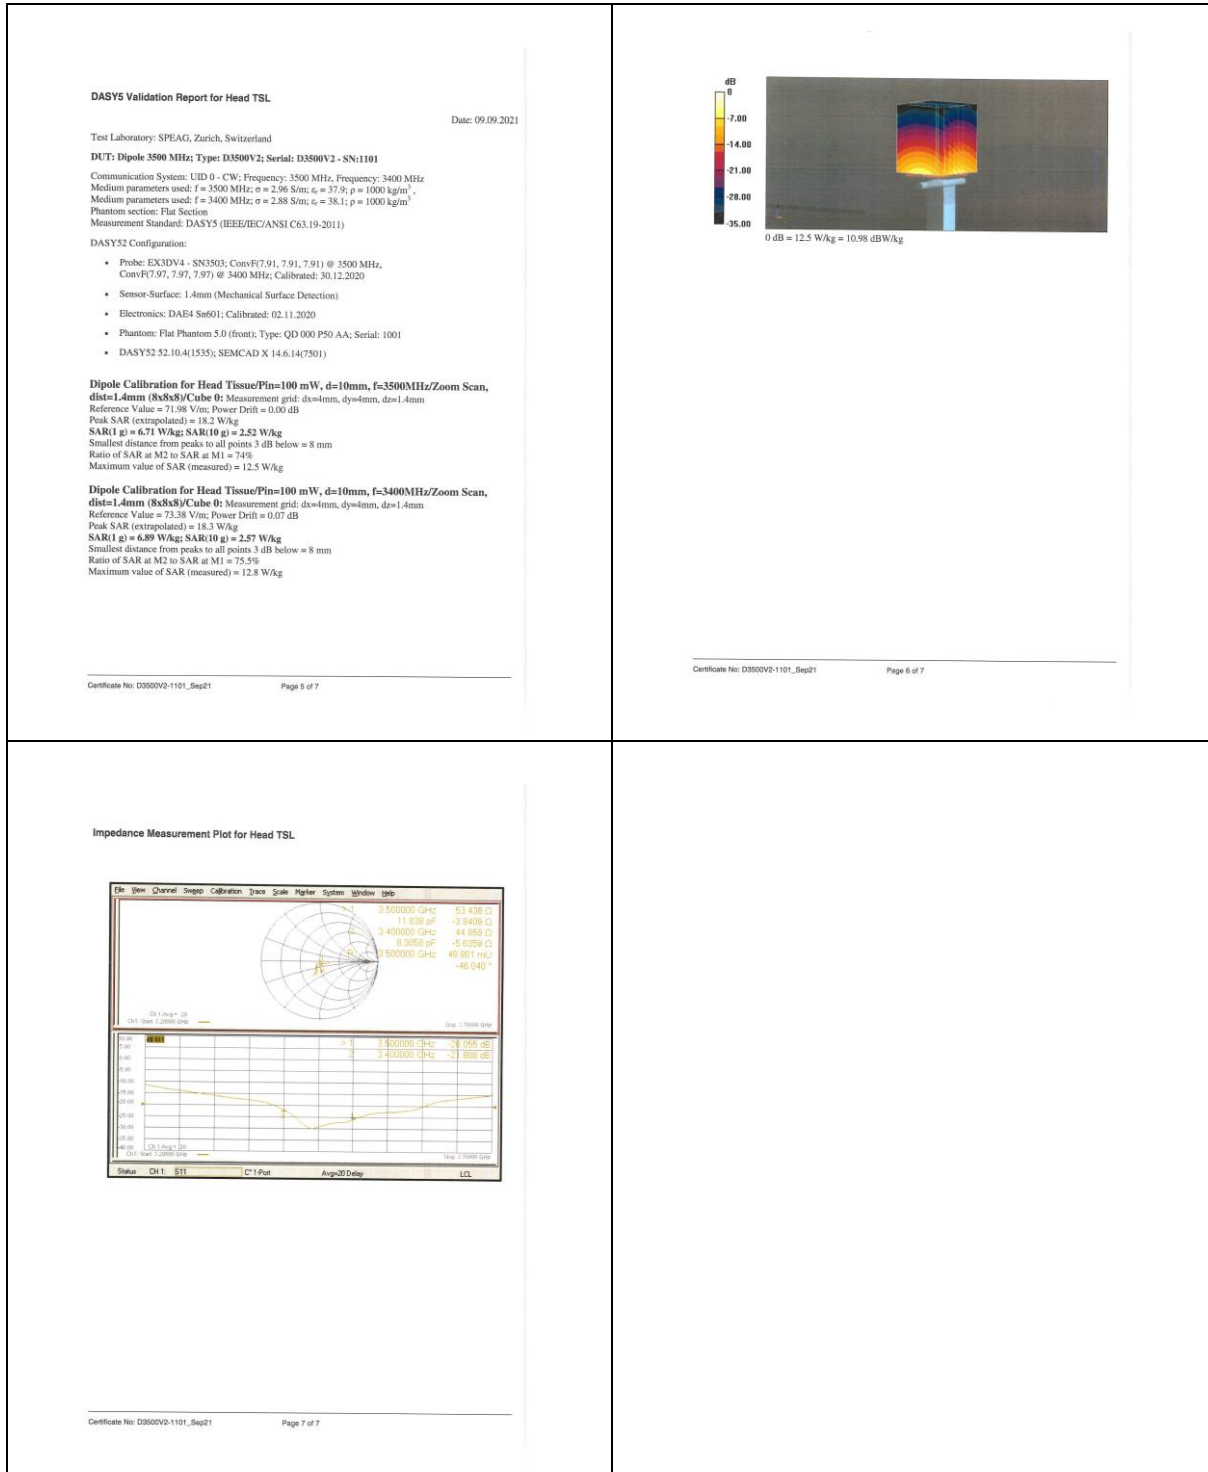

## 1.2 D3700V2 - SN 1103



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com

**Calibration Laboratory of Schmid & Partner Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland

**Schweizerischer Kalibrierdienst**  
 Service suisse d'étalonnage  
 Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SGS-CN (Audem)** Certificate No.: **D3700V2-1103\_Sep21**

**CALIBRATION CERTIFICATE**

Object: **D3700V2 - SN-1103**

Calibration procedure(s): **QA CAL-22-V6  
 Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **September 09, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the dosed laboratory facility: environment temperature (2 ± 3°C and humidity < 70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Data (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291-03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BHS04 (20)	09-Apr-21 (No. 217-03243)	Apr-22
Type-N Impedance Comparator	SN: 31062 (6037)	09-Apr-21 (No. 217-03244)	Apr-22
Reference Probe EX30V4	SN: 3803	30-Dec-20 (No. EX3-3003_Doc20)	Dec-21
DAE4	SN: 601	03-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter S4118B	SN: 083851475	20-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-19 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US10202817	07-Oct-19 (in house check Oct-20)	In house check: Oct-22
RF generator RLS BMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8364A	SN: US4180477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Lutz Klyner** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Knutz Pokras** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: September 10, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D3700V2-1103\_Sep21 Page 1 of 6

**Calibration Laboratory of Schmid & Partner Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland

**Schweizerischer Kalibrierdienst**  
 Service suisse d'étalonnage  
 Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SGS-CN (Audem)** Certificate No.: **D3700V2-1103\_Sep21**

**Glossary:**

TSL: tissue simulating liquid  
 ConvF: sensitivity in TSL / NORM x,y,z  
 N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEC/IEEE 62209-1:2018, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1:2018: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The source is mounted in a touch configuration below the center marking of the flat phantom.
- Return Loss:** This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D3700V2-1103\_Sep21 Page 2 of 6

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY32	V52 10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	3700 MHz ± 1 MHz	

**Head TSL parameters at 3700 MHz**

The following parameters and calculations were applied:

Parameter	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	37.7	3.12 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	3.12 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

**SAR result with Head TSL at 3700 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	6.75 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	67.5 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.44 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg ± 19.5 % (k=2)

Certificate No: D3700V2-1103\_Sep21 Page 3 of 6

**Appendix (Additional assessments outside the scope of SCS 0108)**

**Antenna Parameters with Head TSL at 3700 MHz**

Parameter	Value
Impedance, transformed to feed point	45.1 Ω + j 1.8 jΩ
Return Loss	-25.3 dB

**General Antenna Parameters and Design**

Parameter	Value
Electrical Delay (one direction)	1.133 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Parameter	Value
Manufactured by	SPEAG

Certificate No: D3700V2-1103\_Sep21 Page 4 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com

**DASY5 Validation Report for Head TSL**

Date: 09.09.2021

Test Laboratory: SPEAG, Zurich, Switzerland


DUT: Dipole 3700 MHz; Type: D3700V2; Serial: D3700V2 - SN:1103

Communication System: UID 0 - CW; Frequency: 3700 MHz  
 Medium parameters used:  $f = 3700 \text{ MHz}$ ;  $\sigma = 3.12 \text{ S/m}$ ;  $\epsilon_r = 37.7$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN3503; ConvF(7.73, 7.73) @ 3700 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52: 52.10.4(1535); SEMCAD X 14.6.14(7501)

**Dipole Calibration for Head Tissue/Pins=100 mW, d=10mm, f=3700MHz/Zoom Scan, dist=1.4mm (8x8x8)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm**  
 Reference Value = 72.82 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 19.2 W/kg  
 SAR(1 g) = 6.75 W/kg; SAR(10 g) = 2.44 W/kg  
 Smallest distance from peaks to all points 3 dB below = 8 mm  
 Ratio of SAR at M2 to SAR at M1 = 74%  
 Maximum value of SAR (measured) = 13.2 W/kg

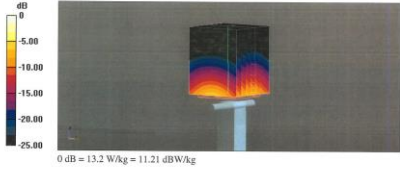

Certificate No: D3700V2-1103\_Sep21 Page 5 of 6

**Impedance Measurement Plot for Head TSL**

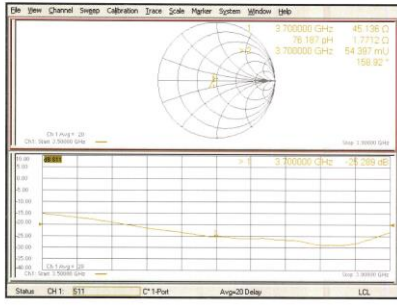

Certificate No: D3700V2-1103\_Sep21 Page 6 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

## 1.3 D3900V2 - SN 1080

<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zughohestrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Audien)</b> Certificate No: <b>D3900V2-1080_Sep21</b></p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>D3900V2 - SN 1080</b></p> <p>Calibration procedure(s): <b>QA CAL-22-V6 Calibration Procedure for SAR Validation Sources between 3-10 GHz</b></p> <p>Calibration date: <b>September 13, 2021</b></p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability <math>p=95\%</math> are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature <math>22 \pm 3^\circ\text{C}</math> and humidity <math>&lt; 70\%</math>.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power meter NRP</td><td>SN: 104778</td><td>09-Apr-21 (No. 217-03291-03292)</td><td>Apr-22</td></tr><tr><td>Power sensor NRP-Z91</td><td>SN: 103244</td><td>09-Apr-21 (No. 217-03291)</td><td>Apr-22</td></tr><tr><td>Power sensor NRP-Z91</td><td>SN: 103245</td><td>09-Apr-21 (No. 217-03292)</td><td>Apr-22</td></tr><tr><td>Reference 20 dB Attenuator</td><td>SN: B19364 (20k)</td><td>09-Apr-21 (No. 217-03243)</td><td>Apr-22</td></tr><tr><td>Type-N mini-coax connector</td><td>SN: 31082 (6337)</td><td>09-Apr-21 (No. 217-03244)</td><td>Apr-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN: 3003</td><td>30-Dec-20 (No. E43-3803_Doc20)</td><td>Dec-21</td></tr><tr><td>DNA1</td><td>SN: 601</td><td>02-Nov-20 (No. DNA4-601_NoV20)</td><td>Nov-21</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>SN</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Power meter S4116B</td><td>SN: 0839512478</td><td>30-Oct-14 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Power sensor HP 8481A</td><td>SN: US3706783</td><td>07-Oct-19 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Power sensor HP 8481A</td><td>SN: HV1062617</td><td>07-Oct-19 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>RF generator SAS SMT-06</td><td>SN: 100672</td><td>15-Jun-15 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Network Analyzer Agilent E8368A</td><td>SN: US4108477</td><td>31-Mar-14 (in house check Oct-20)</td><td>In house check: Oct-21</td></tr></tbody></table> <p>Calibrated by: <b>Leaf Kijener</b> Laboratory Technician Approved by: <b>Krisz Polocsek</b> Technical Manager</p> <p>Issued: September 15, 2021</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: D3900V2-1080_Sep21 Page 1 of 7</p>	Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291-03292)	Apr-22	Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22	Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22	Reference 20 dB Attenuator	SN: B19364 (20k)	09-Apr-21 (No. 217-03243)	Apr-22	Type-N mini-coax connector	SN: 31082 (6337)	09-Apr-21 (No. 217-03244)	Apr-22	Reference Probe EX3DV4	SN: 3003	30-Dec-20 (No. E43-3803_Doc20)	Dec-21	DNA1	SN: 601	02-Nov-20 (No. DNA4-601_NoV20)	Nov-21	Secondary Standards	SN	Check Date (in house)	Scheduled Check	Power meter S4116B	SN: 0839512478	30-Oct-14 (in house check Oct-20)	In house check: Oct-22	Power sensor HP 8481A	SN: US3706783	07-Oct-19 (in house check Oct-20)	In house check: Oct-22	Power sensor HP 8481A	SN: HV1062617	07-Oct-19 (in house check Oct-20)	In house check: Oct-22	RF generator SAS SMT-06	SN: 100672	15-Jun-15 (in house check Oct-20)	In house check: Oct-22	Network Analyzer Agilent E8368A	SN: US4108477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21	<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zughohestrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Audien)</b> Certificate No: <b>D3900V2-1080_Sep21</b></p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>D3900V2 - SN 1080</b></p> <p>Calibration procedure(s): <b>QA CAL-22-V6 Calibration Procedure for SAR Validation Sources between 3-10 GHz</b></p> <p>Calibration date: <b>September 13, 2021</b></p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability <math>p=95\%</math> are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature <math>22 \pm 3^\circ\text{C}</math> and humidity <math>&lt; 70\%</math>.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power meter NRP</td><td>SN: 104778</td><td>09-Apr-21 (No. 217-03291-03292)</td><td>Apr-22</td></tr><tr><td>Power sensor NRP-Z91</td><td>SN: 103244</td><td>09-Apr-21 (No. 217-03291)</td><td>Apr-22</td></tr><tr><td>Power sensor NRP-Z91</td><td>SN: 103245</td><td>09-Apr-21 (No. 217-03292)</td><td>Apr-22</td></tr><tr><td>Reference 20 dB Attenuator</td><td>SN: B19364 (20k)</td><td>09-Apr-21 (No. 217-03243)</td><td>Apr-22</td></tr><tr><td>Type-N mini-coax connector</td><td>SN: 31082 (6337)</td><td>09-Apr-21 (No. 217-03244)</td><td>Apr-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN: 3003</td><td>30-Dec-20 (No. E43-3803_Doc20)</td><td>Dec-21</td></tr><tr><td>DNA1</td><td>SN: 601</td><td>02-Nov-20 (No. DNA4-601_NoV20)</td><td>Nov-21</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>SN</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Power meter S4116B</td><td>SN: 0839512478</td><td>30-Oct-14 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Power sensor HP 8481A</td><td>SN: US3706783</td><td>07-Oct-19 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Power sensor HP 8481A</td><td>SN: HV1062617</td><td>07-Oct-19 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>RF generator SAS SMT-06</td><td>SN: 100672</td><td>15-Jun-15 (in house check Oct-20)</td><td>In house check: Oct-22</td></tr><tr><td>Network Analyzer Agilent E8368A</td><td>SN: US4108477</td><td>31-Mar-14 (in house check Oct-20)</td><td>In house check: Oct-21</td></tr></tbody></table> <p>Calibrated by: <b>Leaf Kijener</b> Laboratory Technician Approved by: <b>Krisz Polocsek</b> Technical Manager</p> <p>Issued: September 15, 2021</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: D3900V2-1080_Sep21 Page 2 of 7</p>	Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291-03292)	Apr-22	Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22	Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22	Reference 20 dB Attenuator	SN: B19364 (20k)	09-Apr-21 (No. 217-03243)	Apr-22	Type-N mini-coax connector	SN: 31082 (6337)	09-Apr-21 (No. 217-03244)	Apr-22	Reference Probe EX3DV4	SN: 3003	30-Dec-20 (No. E43-3803_Doc20)	Dec-21	DNA1	SN: 601	02-Nov-20 (No. DNA4-601_NoV20)	Nov-21	Secondary Standards	SN	Check Date (in house)	Scheduled Check	Power meter S4116B	SN: 0839512478	30-Oct-14 (in house check Oct-20)	In house check: Oct-22	Power sensor HP 8481A	SN: US3706783	07-Oct-19 (in house check Oct-20)	In house check: Oct-22	Power sensor HP 8481A	SN: HV1062617	07-Oct-19 (in house check Oct-20)	In house check: Oct-22	RF generator SAS SMT-06	SN: 100672	15-Jun-15 (in house check Oct-20)	In house check: Oct-22	Network Analyzer Agilent E8368A	SN: US4108477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																																																																														
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291-03292)	Apr-22																																																																																																														
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22																																																																																																														
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22																																																																																																														
Reference 20 dB Attenuator	SN: B19364 (20k)	09-Apr-21 (No. 217-03243)	Apr-22																																																																																																														
Type-N mini-coax connector	SN: 31082 (6337)	09-Apr-21 (No. 217-03244)	Apr-22																																																																																																														
Reference Probe EX3DV4	SN: 3003	30-Dec-20 (No. E43-3803_Doc20)	Dec-21																																																																																																														
DNA1	SN: 601	02-Nov-20 (No. DNA4-601_NoV20)	Nov-21																																																																																																														
Secondary Standards	SN	Check Date (in house)	Scheduled Check																																																																																																														
Power meter S4116B	SN: 0839512478	30-Oct-14 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Power sensor HP 8481A	SN: US3706783	07-Oct-19 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Power sensor HP 8481A	SN: HV1062617	07-Oct-19 (in house check Oct-20)	In house check: Oct-22																																																																																																														
RF generator SAS SMT-06	SN: 100672	15-Jun-15 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Network Analyzer Agilent E8368A	SN: US4108477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21																																																																																																														
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																																																																														
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291-03292)	Apr-22																																																																																																														
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22																																																																																																														
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22																																																																																																														
Reference 20 dB Attenuator	SN: B19364 (20k)	09-Apr-21 (No. 217-03243)	Apr-22																																																																																																														
Type-N mini-coax connector	SN: 31082 (6337)	09-Apr-21 (No. 217-03244)	Apr-22																																																																																																														
Reference Probe EX3DV4	SN: 3003	30-Dec-20 (No. E43-3803_Doc20)	Dec-21																																																																																																														
DNA1	SN: 601	02-Nov-20 (No. DNA4-601_NoV20)	Nov-21																																																																																																														
Secondary Standards	SN	Check Date (in house)	Scheduled Check																																																																																																														
Power meter S4116B	SN: 0839512478	30-Oct-14 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Power sensor HP 8481A	SN: US3706783	07-Oct-19 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Power sensor HP 8481A	SN: HV1062617	07-Oct-19 (in house check Oct-20)	In house check: Oct-22																																																																																																														
RF generator SAS SMT-06	SN: 100672	15-Jun-15 (in house check Oct-20)	In house check: Oct-22																																																																																																														
Network Analyzer Agilent E8368A	SN: US4108477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21																																																																																																														
<p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"><thead><tr><th>DASY Version</th><th>DASY32</th><th>V52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Modular Flat Phantom V5.0</td><td>with Spacer</td></tr><tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td></td></tr><tr><td>Zoom Scan Resolution</td><td>dx, dy = 4.0 mm, dz = 1.4 mm</td><td>Grided Ratio = 1.4 (Z direction)</td></tr><tr><td>Frequency</td><td>3900 MHz <math>\pm</math> 1 MHz 4100 MHz <math>\pm</math> 1 MHz</td><td></td></tr></tbody></table> <p><b>Head TSL parameters at 3900 MHz</b> The following parameters and calculations were applied:</p> <table border="1"><thead><tr><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters (22.0 <math>\pm</math> 0.2) <math>^\circ\text{C}</math></td><td>37.5</td><td>3.32 mho/m</td></tr><tr><td>Measured Head TSL parameters (22.0 <math>\pm</math> 0.2) <math>^\circ\text{C}</math></td><td>37.4 <math>\pm</math> 6 %</td><td>3.28 mho/m <math>\pm</math> 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>&lt; 0.5 <math>^\circ\text{C}</math></td><td>---</td></tr></tbody></table> <p><b>SAR result with Head TSL at 3900 MHz</b></p> <table border="1"><thead><tr><th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th><th>Condition</th><th>Result</th></tr></thead><tbody><tr><td>SAR measured</td><td>100 mW input power</td><td>7.88 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>79.6 W/kg <math>\pm</math> 19.9 % (k=2)</td></tr></tbody></table> <table border="1"><thead><tr><th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th><th>Condition</th><th>Result</th></tr></thead><tbody><tr><td>SAR measured</td><td>100 mW input power</td><td>2.44 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>24.4 W/kg <math>\pm</math> 19.5 % (k=2)</td></tr></tbody></table> <p><b>Head TSL parameters at 4100 MHz</b> The following parameters and calculations were applied:</p> <table border="1"><thead><tr><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters (22.0 <math>\pm</math> 0.2) <math>^\circ\text{C}</math></td><td>37.2</td><td>3.53 mho/m</td></tr><tr><td>Measured Head TSL parameters (22.0 <math>\pm</math> 0.2) <math>^\circ\text{C}</math></td><td>37.2 <math>\pm</math> 6 %</td><td>3.46 mho/m <math>\pm</math> 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>&lt; 0.5 <math>^\circ\text{C}</math></td><td>---</td></tr></tbody></table> <p><b>SAR result with Head TSL at 4100 MHz</b></p> <table border="1"><thead><tr><th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th><th>Condition</th><th>Result</th></tr></thead><tbody><tr><td>SAR measured</td><td>100 mW input power</td><td>6.93 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>69.4 W/kg <math>\pm</math> 19.9 % (k=2)</td></tr></tbody></table> <table border="1"><thead><tr><th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th><th>Condition</th><th>Result</th></tr></thead><tbody><tr><td>SAR measured</td><td>100 mW input power</td><td>2.40 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>24.0 W/kg <math>\pm</math> 19.5 % (k=2)</td></tr></tbody></table> <p>Certificate No: D3900V2-1080_Sep21 Page 3 of 7</p>	DASY Version	DASY32	V52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Modular Flat Phantom V5.0	with Spacer	Distance Dipole Center - TSL	10 mm		Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Grided Ratio = 1.4 (Z direction)	Frequency	3900 MHz $\pm$ 1 MHz 4100 MHz $\pm$ 1 MHz		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.5	3.32 mho/m	Measured Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.4 $\pm$ 6 %	3.28 mho/m $\pm$ 6 %	Head TSL temperature change during test	< 0.5 $^\circ\text{C}$	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	Result	SAR measured	100 mW input power	7.88 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	79.6 W/kg $\pm$ 19.9 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	Result	SAR measured	100 mW input power	2.44 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg $\pm$ 19.5 % (k=2)	Temperature	Permittivity	Conductivity	Nominal Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.2	3.53 mho/m	Measured Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.2 $\pm$ 6 %	3.46 mho/m $\pm$ 6 %	Head TSL temperature change during test	< 0.5 $^\circ\text{C}$	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	Result	SAR measured	100 mW input power	6.93 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	69.4 W/kg $\pm$ 19.9 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	Result	SAR measured	100 mW input power	2.40 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 19.5 % (k=2)	<p><b>Appendix (Additional assessments outside the scope of SCS 0108)</b></p> <p><b>Antenna Parameters with Head TSL at 3900 MHz</b></p> <table border="1"><thead><tr><th>Impedance, transformed to feed point</th><th>47.0 <math>\Omega</math> - 5.1 j<math>\Omega</math></th></tr></thead><tbody><tr><td>Return Loss</td><td>-24.2 dB</td></tr></tbody></table> <p><b>Antenna Parameters with Head TSL at 4100 MHz</b></p> <table border="1"><thead><tr><th>Impedance, transformed to feed point</th><th>56.5 <math>\Omega</math> - 2.1 j<math>\Omega</math></th></tr></thead><tbody><tr><td>Return Loss</td><td>-23.9 dB</td></tr></tbody></table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"><thead><tr><th>Electrical Delay (one direction)</th><th>1.104 ns</th></tr></thead><tbody></tbody></table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead><tbody></tbody></table> <p>Certificate No: D3900V2-1080_Sep21 Page 4 of 7</p>	Impedance, transformed to feed point	47.0 $\Omega$ - 5.1 j $\Omega$	Return Loss	-24.2 dB	Impedance, transformed to feed point	56.5 $\Omega$ - 2.1 j $\Omega$	Return Loss	-23.9 dB	Electrical Delay (one direction)	1.104 ns	Manufactured by	SPEAG																						
DASY Version	DASY32	V52.10.4																																																																																																															
Extrapolation	Advanced Extrapolation																																																																																																																
Phantom	Modular Flat Phantom V5.0	with Spacer																																																																																																															
Distance Dipole Center - TSL	10 mm																																																																																																																
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Grided Ratio = 1.4 (Z direction)																																																																																																															
Frequency	3900 MHz $\pm$ 1 MHz 4100 MHz $\pm$ 1 MHz																																																																																																																
Temperature	Permittivity	Conductivity																																																																																																															
Nominal Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.5	3.32 mho/m																																																																																																															
Measured Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.4 $\pm$ 6 %	3.28 mho/m $\pm$ 6 %																																																																																																															
Head TSL temperature change during test	< 0.5 $^\circ\text{C}$	---																																																																																																															
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	Result																																																																																																															
SAR measured	100 mW input power	7.88 W/kg																																																																																																															
SAR for nominal Head TSL parameters	normalized to 1W	79.6 W/kg $\pm$ 19.9 % (k=2)																																																																																																															
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	Result																																																																																																															
SAR measured	100 mW input power	2.44 W/kg																																																																																																															
SAR for nominal Head TSL parameters	normalized to 1W	24.4 W/kg $\pm$ 19.5 % (k=2)																																																																																																															
Temperature	Permittivity	Conductivity																																																																																																															
Nominal Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.2	3.53 mho/m																																																																																																															
Measured Head TSL parameters (22.0 $\pm$ 0.2) $^\circ\text{C}$	37.2 $\pm$ 6 %	3.46 mho/m $\pm$ 6 %																																																																																																															
Head TSL temperature change during test	< 0.5 $^\circ\text{C}$	---																																																																																																															
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	Result																																																																																																															
SAR measured	100 mW input power	6.93 W/kg																																																																																																															
SAR for nominal Head TSL parameters	normalized to 1W	69.4 W/kg $\pm$ 19.9 % (k=2)																																																																																																															
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	Result																																																																																																															
SAR measured	100 mW input power	2.40 W/kg																																																																																																															
SAR for nominal Head TSL parameters	normalized to 1W	24.0 W/kg $\pm$ 19.5 % (k=2)																																																																																																															
Impedance, transformed to feed point	47.0 $\Omega$ - 5.1 j $\Omega$																																																																																																																
Return Loss	-24.2 dB																																																																																																																
Impedance, transformed to feed point	56.5 $\Omega$ - 2.1 j $\Omega$																																																																																																																
Return Loss	-23.9 dB																																																																																																																
Electrical Delay (one direction)	1.104 ns																																																																																																																
Manufactured by	SPEAG																																																																																																																



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No. 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | [www.sgs.com.cn](http://www.sgs.com.cn)  
中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

<p><b>DASYS Validation Report for Head TSL</b></p> <p>Date: 13.09.2021</p> <p>Test Laboratory: SPEAG, Zurich, Switzerland</p> <p><b>DUT: Dipole 3900 MHz; Type: D3900V2; Serial: D3900V2 - SN:1080</b></p> <p>Communication System: UID 0 - CW; Frequency: 3900 MHz; Frequency: 4100 MHz          Medium parameters used: <math>f = 3900</math> MHz; <math>\sigma = 3.28</math> S/m; <math>\epsilon = 37.4</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>,          Medium parameters used: <math>f = 4100</math> MHz; <math>\sigma = 3.46</math> S/m; <math>\epsilon = 37.2</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>          Phantom section: Flat Section          Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)</p> <p>DASY52 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3503; ConvF(7.39, 7.39, 7.39) @ 3900 MHz, ConvF(7.26, 7.26, 7.26) @ 4100 MHz; Calibrated: 30.12.2020</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sef601; Calibrated: 02.11.2020</li> <li>Phantom: Flat Phantom 5.0 (front); Type: QD 090 P50 AA; Serial: 1001</li> <li>DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)</li> </ul> <p><b>Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm 3900/Zoom Scan, dist=1.4mm (8x8x8)Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=1.4mm          Reference Value = 74.67 V/m; Power Drift = 0.03 dB          Peak SAR (extrapolated) = 20.5 W/kg          SAR(1g) = 7.65 W/kg; SAR(10g) = 2.44 W/kg          Smallest distance from peaks to all points 3 dB below = 8 mm          Ratio of SAR at M2 to SAR at M1 = 72.4%          Maximum value of SAR (measured) = 13.8 W/kg</p> <p><b>Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm 4100/Zoom Scan, dist=1.4mm (8x8x8)Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=1.4mm          Reference Value = 72.33 V/m; Power Drift = 0.07 dB          Peak SAR (extrapolated) = 20.1 W/kg          SAR(1g) = 6.93 W/kg; SAR(10g) = 2.4 W/kg          Smallest distance from peaks to all points 3 dB below = 8 mm          Ratio of SAR at M2 to SAR at M1 = 73%          Maximum value of SAR (measured) = 13.8 W/kg</p> <p>Certificate No: D3900V2-1080_Sep21 Page 5 of 7</p>	<p>Certificate No: D3900V2-1080_Sep21 Page 6 of 7</p>
<p><b>Impedance Measurement Plot for Head TSL</b></p> <p>Certificate No: D3900V2-1080_Sep21 Page 7 of 7</p>	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300    t(86-512) 5735 5888    f(86-512) 57370818    www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号    邮编: 215300    t(86-512) 57355888    f(86-512) 57370818    sgs.china@sgs.com

## 2 DAE4 - SN 1245

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 8px;"> <p>Schmid &amp; Partner Engineering AG Zughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 248 9700, Fax +41 44 248 9770 www.sgs.com, info@sgs.com</p> </div> <div style="text-align: center; font-weight: bold; font-size: 12px;">s p e a g</div> <div style="font-size: 8px;"> <p>S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage S Servizio svizzero di taratura S Swiss Calibration Service</p> </div> </div> <p style="text-align: center; color: red; font-weight: bold; margin-top: 10px;">IMPORTANT NOTICE</p> <p><b>USAGE OF THE DAE4</b></p> <p>The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:</p> <p><b>Battery Exchange:</b> The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.</p> <p><b>Shipping of the DAE:</b> Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an anti-static bag. This anti-static bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.</p> <p><b>E-Stop Failures:</b> Touch handling may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.</p> <p><b>Repair:</b> Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.</p> <p><b>DASY Configuration Files:</b> Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.</p> <div style="border: 1px solid red; padding: 2px; margin-top: 5px;"> <p><b>Important Note:</b> Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.</p> </div> <div style="border: 1px solid red; padding: 2px; margin-top: 5px;"> <p><b>Important Note:</b> Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.</p> </div> <div style="border: 1px solid red; padding: 2px; margin-top: 5px;"> <p><b>Important Note:</b> To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.</p> </div> <p style="font-size: 8px; margin-top: 10px;">TN_EH160306AE DAE4.docx <span style="float: right;">07.03.2019</span></p>	<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 8px;"> <p>Schmid &amp; Partner Engineering AG Zughausstrasse 43, 8004 Zurich, Switzerland</p> </div> <div style="text-align: center; font-weight: bold; font-size: 12px;">s p e a g</div> <div style="font-size: 8px;"> <p>S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage S Servizio svizzero di taratura S Swiss Calibration Service</p> </div> </div> <p style="text-align: center; font-size: 8px;">Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p style="text-align: right; font-size: 8px;">Accreditation No.: SCS 0108</p> <p style="font-size: 8px;">Client: <b>SGS-CN (Auden)</b> Certificate No.: <b>DAE4-1245_May22</b></p> <div style="border: 1px solid black; padding: 5px; margin-top: 5px;"> <p style="text-align: center; font-weight: bold; font-size: 10px;">CALIBRATION CERTIFICATE</p> <p>Object: <b>DAE4 - SD 000 D04 BM - SN: 1245</b></p> <p>Calibration procedure(s): <b>QA CAL-06 v30 Calibration procedure for the data acquisition electronics (DAE)</b></p> <p>Calibration date: <b>May 30, 2022</b></p> <p style="font-size: 8px; margin-top: 5px;">This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p style="font-size: 8px;">Calibration Equipment used (M&amp;E critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Exp. Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Ketby Multimeter Type 2001</td> <td>SN: 0810276</td> <td>31-Aug-21 (No:31368)</td> <td>Aug-22</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Auto DAE Calibration Unit</td> <td>SE LWS 003 AA 1001</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> <tr> <td>Calibrator class V0.1</td> <td>SE LWS 100 AA 1002</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> </tbody> </table> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="font-size: 8px;"> <p>Calibrated by: <b>Dominique Shelten</b> Function: <b>Laboratory Technician</b></p> </div> <div style="font-size: 8px;"> <p>Approved by: <b>Steven Kuhn</b> Technical Manager</p> </div> </div> <p style="font-size: 8px; text-align: right;">Issued: May 30, 2022</p> <p style="font-size: 8px;">This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> </div>	Primary Standards	ID #	Exp. Date (Certificate No.)	Scheduled Calibration	Ketby Multimeter Type 2001	SN: 0810276	31-Aug-21 (No:31368)	Aug-22	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE LWS 003 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23	Calibrator class V0.1	SE LWS 100 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23
Primary Standards	ID #	Exp. Date (Certificate No.)	Scheduled Calibration																		
Ketby Multimeter Type 2001	SN: 0810276	31-Aug-21 (No:31368)	Aug-22																		
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																		
Auto DAE Calibration Unit	SE LWS 003 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23																		
Calibrator class V0.1	SE LWS 100 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23																		
<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="font-size: 8px;"> <p>Schmid &amp; Partner Engineering AG Zughausstrasse 43, 8004 Zurich, Switzerland</p> </div> <div style="text-align: center; font-weight: bold; font-size: 12px;">s p e a g</div> <div style="font-size: 8px;"> <p>S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage S Servizio svizzero di taratura S Swiss Calibration Service</p> </div> </div> <p style="text-align: center; font-size: 8px;">Accreditation No.: SCS 0108</p> <p style="font-size: 8px;">The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Glossary</b></p> <p>DAE: data acquisition electronics Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.</p> <p><b>Methods Applied and Interpretation of Parameters</b></p> <ul style="list-style-type: none"> <li><b>DC Voltage Measurement:</b> Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.</li> <li><b>Connector angle:</b> The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.</li> <li>The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.             <ul style="list-style-type: none"> <li><b>DC Voltage Measurement Linearity:</b> Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.</li> <li><b>Common mode sensitivity:</b> Influence of a positive or negative common mode voltage on the differential measurement.</li> <li><b>Channel separation:</b> Influence of a voltage on the neighbor channels not subject to an input voltage.</li> <li><b>AD Converter Values with inputs shorted:</b> Values on the internal AD converter corresponding to zero input voltage</li> <li><b>Input Offset Measurement:</b> Output voltage and statistical results over a large number of zero voltage measurements.</li> <li><b>Input Offset Current:</b> Typical value for information; Maximum channel input offset current, not considering the input resistance.</li> <li><b>Input resistance:</b> Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.</li> <li><b>Low Battery Alarm Voltage:</b> Typical value for information. Below this voltage, a battery alarm signal is generated.</li> <li><b>Power consumption:</b> Typical value for information. Supply currents in various operating modes.</li> </ul> </li> </ul> <p style="font-size: 8px; margin-top: 10px;">Certificate No.: DAE4-1245_May22 <span style="float: right;">Page 2 of 5</span></p>	<p><b>DC Voltage Measurement</b></p> <p>AD - Converter Resolution nominal High Range: 1LSB = 6.1µV, full range = -100...+320 mV Low Range: 1LSB = 61µV, full range = -1...+3mV DASY measurement parameters: Auto Zero-Time: 3 sec; Measuring time: 3 sec</p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <thead> <tr> <th>Calibration Factors</th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>High Range</td> <td>405.265 ± 0.02% (k=2)</td> <td>403.974 ± 0.02% (k=2)</td> <td>406.092 ± 0.02% (k=2)</td> </tr> <tr> <td>Low Range</td> <td>3.99534 ± 1.50% (k=2)</td> <td>3.99508 ± 1.50% (k=2)</td> <td>4.01015 ± 1.50% (k=2)</td> </tr> </tbody> </table> <p><b>Connector Angle</b></p> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>Connector Angle to be used in DASY system</td> <td>30.0° ± 1°</td> </tr> </table> <p style="font-size: 8px; margin-top: 10px;">Certificate No.: DAE4-1245_May22 <span style="float: right;">Page 3 of 5</span></p>	Calibration Factors	X	Y	Z	High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)	Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)	Connector Angle to be used in DASY system	30.0° ± 1°						
Calibration Factors	X	Y	Z																		
High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)																		
Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)																		
Connector Angle to be used in DASY system	30.0° ± 1°																				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1444, or email: CN.Doccheck@sgs.com

No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com



Appendix (Additional assessments outside the scope of SCS0108)			
<b>1. DC Voltage Linearity</b>			
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec			
High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	19994.45	1.52	0.00
Channel X - Input	20004.58	2.22	0.01
Channel X + Input	-20000.14	1.12	-0.01
Channel Y + Input	199994.72	1.58	0.00
Channel Y - Input	20001.22	-1.00	-0.00
Channel Y + Input	-20003.05	-1.57	0.01
Channel Z + Input	199992.84	0.19	0.00
Channel Z - Input	20003.09	0.58	0.00
Channel Z + Input	-20001.73	-0.27	0.00
Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.91	0.41	0.22
Channel X - Input	202.54	0.65	0.32
Channel X + Input	-197.86	0.07	-0.04
Channel Y + Input	2002.05	0.58	0.03
Channel Y - Input	201.27	-0.57	-0.28
Channel Y + Input	-199.23	-0.06	0.03
Channel Z + Input	2001.36	0.08	0.00
Channel Z - Input	200.09	-1.53	-0.76
Channel Z + Input	-199.85	-1.57	0.79
<b>2. Common mode sensitivity</b>			
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec			
Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)	
Channel X 200	-3.87	-7.69	
-200	9.12	7.79	
Channel Y 200	-8.68	-9.28	
-200	8.52	6.36	
Channel Z 200	-5.36	-5.80	
-200	3.58	3.08	
<b>3. Channel separation</b>			
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec			
Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X 200	-	4.07	-3.14
Channel Y 200	9.36	-	4.27
Channel Z 200	10.11	7.14	-

Certificate No: DAE4-1245\_May22

Page 4 of 5

**4. AD-Converter Values with inputs shorted**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15984	17040
Channel Y	16562	16768
Channel Z	16035	15668

**5. Input Offset Measurement**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.00	-0.15	1.93	0.45
Channel Y	-0.18	-1.28	0.94	0.45
Channel Z	-0.58	-2.61	0.58	0.60

**6. Input Offset Current**

Nominal input circuitry offset current on all channels: <250A

**7. Input Resistance (Typical values for information)**

	Zeroing (Ω/Ohm)	Measuring (MΩ/Ohm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

**8. Low Battery Alarm Voltage (Typical values for information)**

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

**9. Power Consumption (Typical values for information)**

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+8	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1245\_May22

Page 5 of 5

## 3 DAE4 - SN 1245

**IMPORTANT NOTICE**

**USAGE OF THE DAE4**

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

**Battery Exchange:** The battery cover of the DAE4 unit is fixed using a screw, cover tightening the screw may cause the threads inside the DAE to wear out.

**Shipping of the DAE:** Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. The antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

**E-Stop Failures:** Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of accumulated in the E-stop. To prevent E-stop failures, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

**Repair:** Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

**DASY Configuration Files:** Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MΩ/Ohm is given in the corresponding configuration file.

**Important Note:**  
Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

**Important Note:**  
Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

**Important Note:**  
To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

TN\_EH190306AE DAE4.docx 07.03.2019

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zoostrasse 63, 8064 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAC)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client: **SGS**  
Kunshan City, China

Certificate No: **DAE4-1245\_Apr23**

**CALIBRATION CERTIFICATE**

Client: **DAE4 - SD 000 D04 BM - SN: 1245**

Calibration procedure(s): **QA CAL-06.v30**  
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **April 25, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (MPE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Kelvin Multimeter Type 2001	201 2012219	29-Aug-22 (In-house)	Aug-23

Secondary Standards

ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UMS 053 AA 1001 27-Jan-23 (in house check)	In house check: Jan-24
Calibrator Unit VZ.1	SE UMS 001 AA 1002 27-Jan-23 (in house check)	In house check: Jan-24

Calibrated by: **Deminggu Suifer** (Function: Laboratory Technician) **Signature**

Approved by: **Sven Kuhn** (Function: Technical Manager) **Signature**

Issued: April 25, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1245\_Apr23 Page 1 of 5





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com

**Calibration Laboratory of Schmid & Partner Engineering AG**  
 Zeughausstrasse 42, 8001 Zurich, Switzerland  
 Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

S Schweizerischer Kalibrierdienst  
 C Service suisse d'étalonnage  
 S Service suisse de taratura  
 S Swiss Calibration Service  
 Accreditation No.: SCS 0108

**Glossary**  
 DAE data acquisition electronics  
 Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters**

- DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption:** Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1245\_Apr23 Page 2 of 5

**DC Voltage Measurement**  
 A/D - Converter Resolution nominal  
 High Range: 1LSB = 6.1µV, full range = -100...+300 mV  
 Low Range: 1LSB = 61µV, full range = -1...+3mV  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 0 sec

Calibration Factors	X	Y	Z
High Range	405.243 ± 0.02% (k=2)	403.938 ± 0.02% (k=2)	405.064 ± 0.02% (k=2)
Low Range	3.89474 ± 1.50% (k=2)	3.89478 ± 1.50% (k=2)	4.00994 ± 1.50% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	
	32.0° ± 1°

Certificate No: DAE4-1245\_Apr23 Page 3 of 5

**Appendix (Additional assessments outside the scope of SCS0108)**

**1. DC Voltage Linearity**  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	199986.00	2.90	0.00
Channel X - Input	20005.77	2.75	0.01
Channel X + Input	-19998.65	2.19	-0.01
Channel Y + Input	199996.00	1.08	0.00
Channel Y - Input	20003.12	0.26	0.00
Channel Y + Input	-20000.51	0.53	-0.00
Channel Z + Input	199994.62	-1.05	-0.00
Channel Z - Input	20002.17	-0.70	-0.00
Channel Z + Input	-20001.94	-0.91	0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2002.91	0.81	0.04
Channel X - Input	203.06	0.73	0.36
Channel X + Input	-195.56	0.88	-0.45
Channel Y + Input	2002.33	3.29	0.01
Channel Y - Input	201.91	-0.29	-0.19
Channel Y + Input	-198.22	-0.79	0.40
Channel Z + Input	2002.20	0.24	0.01
Channel Z - Input	201.28	-0.88	-0.44
Channel Z + Input	-198.93	-1.36	0.69

**2. Common mode sensitivity**  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-6.42
-200	8.81	6.00
Channel Y	200	7.04
-200	14.70	15.29
Channel Z	200	4.52
-200	3.50	3.52

**3. Channel separation**  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
200	3.29	3.29	4.00
200	9.00	-	-
200	10.03	7.20	-

Certificate No: DAE4-1245\_Apr23 Page 4 of 5

**4. AD-Converter Values with inputs shorted**  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec; Input 10kΩ

	High Range (LSB)	Low Range (LSB)
Channel X	16001	16100
Channel Y	16079	16051
Channel Z	16040	15991

**5. Input Offset Measurement**  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec; Input 10kΩ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.77	-0.63	1.89	0.49
Channel Y	-0.24	-1.72	1.19	0.52
Channel Z	-0.85	-2.62	0.59	0.61

**6. Input Offset Current**  
 Nominal input circuitry offset current on all channels: <25A

**7. Input Resistance** (Typical values for information)

	Zeroing (MΩms)	Measuring (MΩms)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

**8. Low Battery Alarm Voltage** (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

**9. Power Consumption** (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1245\_Apr23 Page 5 of 5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 57370818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 | 邮编: 215300 | (86-512) 57355888 | (86-512) 57370818 | sgs.china@sgs.com

## 4 EX3DV4 - SN 7767





<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Auden)</b> Certificate No: <b>EX-7767_Oct22</b></p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>EX3DV4 - SN-7767</b></p> <p>Calibration procedure(s): <b>QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7</b> Calibration procedure for dosimetric E-field probes</p> <p>Calibration date: <b>October 28, 2022</b></p> <p>This calibration certificate documents the traceability to national standards which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 0.3) °C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATEC report for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter NRP</td> <td>SN 102798</td> <td>14-Apr-22 (No. 217388848994)</td> <td>Apr-23</td> </tr> <tr> <td>Power sensor NRP291</td> <td>SN 102844</td> <td>04-Apr-22 (No. 217328254)</td> <td>Apr-23</td> </tr> <tr> <td>DCP DAKS-3 (imp/Hz)</td> <td>SN 1246</td> <td>28-Dec-22 (DCP-DAKS-1246_Oct22)</td> <td>Oct-23</td> </tr> <tr> <td>DCP DAK-12</td> <td>SN 1018</td> <td>28-Dec-22 (DCP-DAK12-1018_Oct22)</td> <td>Oct-23</td> </tr> <tr> <td>Reference 25 dB Attenuator</td> <td>SN 020882 (20)</td> <td>04-Apr-22 (No. 217328254)</td> <td>Apr-23</td> </tr> <tr> <td>DAK4</td> <td>SN 166</td> <td>19-Dec-22 (No. 24624489_Oct22)</td> <td>Oct-23</td> </tr> <tr> <td>Reference Probe E833V2</td> <td>SN 3013</td> <td>27-Dec-21 (No. E833013_Dec21)</td> <td>Dec-22</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter E4418B</td> <td>SN 081493914</td> <td>05-Apr-18 (in house check Jun-20)</td> <td>In house check Jun-24</td> </tr> <tr> <td>Power sensor E4418A</td> <td>SN J4V4486687</td> <td>05-Apr-18 (in house check Jun-20)</td> <td>In house check Jun-24</td> </tr> <tr> <td>Power sensor E4415A</td> <td>SN 00112910</td> <td>05-Apr-18 (in house check Jun-20)</td> <td>In house check Jun-24</td> </tr> <tr> <td>RF generator HP 8648C</td> <td>SN UB84G101793</td> <td>04-Aug-09 (in house check Jun-20)</td> <td>In house check Jun-24</td> </tr> <tr> <td>Network Analyser E8398A</td> <td>SN US41084477</td> <td>31-Mar-14 (in house check Oct-22)</td> <td>In house check Oct-24</td> </tr> </tbody> </table> <p>Calibrated by: <b>Alexia Georgiadou</b> Laboratory Technician</p> <p>Approved by: <b>Evan Kijhn</b> Technical Manager</p> <p>Issued: October 21, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: EX-7767_Oct22 Page 1 of 9</p>	Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration	Power meter NRP	SN 102798	14-Apr-22 (No. 217388848994)	Apr-23	Power sensor NRP291	SN 102844	04-Apr-22 (No. 217328254)	Apr-23	DCP DAKS-3 (imp/Hz)	SN 1246	28-Dec-22 (DCP-DAKS-1246_Oct22)	Oct-23	DCP DAK-12	SN 1018	28-Dec-22 (DCP-DAK12-1018_Oct22)	Oct-23	Reference 25 dB Attenuator	SN 020882 (20)	04-Apr-22 (No. 217328254)	Apr-23	DAK4	SN 166	19-Dec-22 (No. 24624489_Oct22)	Oct-23	Reference Probe E833V2	SN 3013	27-Dec-21 (No. E833013_Dec21)	Dec-22	Secondary Standards	ID	Check Date (in house)	Scheduled Check	Power meter E4418B	SN 081493914	05-Apr-18 (in house check Jun-20)	In house check Jun-24	Power sensor E4418A	SN J4V4486687	05-Apr-18 (in house check Jun-20)	In house check Jun-24	Power sensor E4415A	SN 00112910	05-Apr-18 (in house check Jun-20)	In house check Jun-24	RF generator HP 8648C	SN UB84G101793	04-Aug-09 (in house check Jun-20)	In house check Jun-24	Network Analyser E8398A	SN US41084477	31-Mar-14 (in house check Oct-22)	In house check Oct-24	<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Accreditation No: <b>SCS 0108</b></p> <p><b>Glossary</b></p> <p>TSL: Issue simulating liquid sensitivity in time space</p> <p>NORM<sub>x,y,z</sub>: sensitivity in TSL / NORM<sub>x,y,z</sub></p> <p>DCP: diode compression point</p> <p>ConF: crest factor (1 duty cycle) of the RF signal</p> <p>A, B, C, D: modulation dependent linearization parameters</p> <p>Polarization φ: φ rotation around probe axis</p> <p>Polarization θ: θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., θ = 0 is normal to probe axis</p> <p>Connector Angle: information used in DASY system to align probe sensor X to the robot coordinate system</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 0.1MHz to 6GHz)", October 2020.</p> <p>b) KDB 865864, "SAR Measurement Requirements for 100MHz to 6 GHz"</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>NORM<sub>x,y,z</sub>: Assessed for E-field polarization θ = 0 (f = 900MHz in TEM-cell; f = 1800MHz: RSI waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> do not affect the E-field uncertainty inside TSL (see below ConF).</li> <li>NORM<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> * Frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConF.</li> <li>DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor mode.</li> <li>PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.</li> <li>A, B, C, D: A, B, C, D are numerical linearization parameters assessed based on the data of calibration power sweep for specific modulation signal. The parameters do not depend on frequency nor mode. V<sub>0</sub> is the maximum power sweep for specific modulation signal. The parameters do not depend on frequency nor mode. V<sub>0</sub> is the maximum calibration range expressed in RMS voltage across the diode.</li> <li>ConF and Boundary Effect Parameters: Assessed in full phantom using E-field (or Temperature Transfer Standard for f &gt; 800MHz) and inside waveguide using analytical field distributions based on power measurements for f &gt; 800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> * ConF whereby the uncertainty corresponds to that given for ConF. A frequency dependent ConF is used in DASY version 4.4 and higher which allows extending the validity from 0.1MHz to 1100 MHz.</li> <li>Spherical isotropy (SD deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.</li> <li>Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.</li> <li>Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x,y,z</sub> (no uncertainty required).</li> </ul> <p>Certificate No: EX-7767_Oct22 Page 2 of 9</p>																						
Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration																																																																												
Power meter NRP	SN 102798	14-Apr-22 (No. 217388848994)	Apr-23																																																																												
Power sensor NRP291	SN 102844	04-Apr-22 (No. 217328254)	Apr-23																																																																												
DCP DAKS-3 (imp/Hz)	SN 1246	28-Dec-22 (DCP-DAKS-1246_Oct22)	Oct-23																																																																												
DCP DAK-12	SN 1018	28-Dec-22 (DCP-DAK12-1018_Oct22)	Oct-23																																																																												
Reference 25 dB Attenuator	SN 020882 (20)	04-Apr-22 (No. 217328254)	Apr-23																																																																												
DAK4	SN 166	19-Dec-22 (No. 24624489_Oct22)	Oct-23																																																																												
Reference Probe E833V2	SN 3013	27-Dec-21 (No. E833013_Dec21)	Dec-22																																																																												
Secondary Standards	ID	Check Date (in house)	Scheduled Check																																																																												
Power meter E4418B	SN 081493914	05-Apr-18 (in house check Jun-20)	In house check Jun-24																																																																												
Power sensor E4418A	SN J4V4486687	05-Apr-18 (in house check Jun-20)	In house check Jun-24																																																																												
Power sensor E4415A	SN 00112910	05-Apr-18 (in house check Jun-20)	In house check Jun-24																																																																												
RF generator HP 8648C	SN UB84G101793	04-Aug-09 (in house check Jun-20)	In house check Jun-24																																																																												
Network Analyser E8398A	SN US41084477	31-Mar-14 (in house check Oct-22)	In house check Oct-24																																																																												
<p>EX3DV4 - SN-7767 October 28, 2022</p> <p><b>Parameters of Probe: EX3DV4 - SN-7767</b></p> <p><b>Basic Calibration Parameters</b></p> <table border="1"> <thead> <tr> <th>North (μV/m)<sup>2</sup> A</th> <th>Sensor X</th> <th>Sensor Y</th> <th>Sensor Z</th> <th>Unc (k = 2)</th> </tr> </thead> <tbody> <tr> <td>0.87</td> <td>5.89</td> <td>0.56</td> <td>10.1%</td> <td></td> </tr> <tr> <td>DCP (mV)<sup>2</sup> B</td> <td>103.4</td> <td>107.3</td> <td>105.7</td> <td>±4.7%</td> </tr> </tbody> </table> <p><b>Calibration Results for Modulation Responses</b></p> <table border="1"> <thead> <tr> <th>Mod</th> <th>Communication System Name</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>V<sub>0</sub></th> <th>Max dev.</th> <th>Max Unc<sup>2</sup></th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CW</td> <td>X</td> <td>0.00</td> <td>0.00</td> <td>1.00</td> <td>0.30</td> <td>184.7</td> <td>±3.3%</td> <td>±4.7%</td> </tr> <tr> <td></td> <td></td> <td>Y</td> <td>0.00</td> <td>0.00</td> <td>1.00</td> <td>0.30</td> <td>184.7</td> <td>±3.3%</td> <td>±4.7%</td> </tr> <tr> <td></td> <td></td> <td>Z</td> <td>0.00</td> <td>0.00</td> <td>1.00</td> <td>0.30</td> <td>179.5</td> <td>±3.3%</td> <td>±4.7%</td> </tr> </tbody> </table> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>A: The uncertainties of Norm X,Y,Z do not affect the E-field uncertainty inside TSL (see Page 1).</p> <p>B: Uncertainty for specific sensitivity for maximum specified field strength.</p> <p>C: Uncertainty is determined using the max. deviation from three responses applying rectangular distribution and is expressed for the square of the field value.</p> <p>Certificate No: EX-7767_Oct22 Page 3 of 9</p>	North (μV/m) <sup>2</sup> A	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)	0.87	5.89	0.56	10.1%		DCP (mV) <sup>2</sup> B	103.4	107.3	105.7	±4.7%	Mod	Communication System Name	A	B	C	D	V <sub>0</sub>	Max dev.	Max Unc <sup>2</sup>	0	CW	X	0.00	0.00	1.00	0.30	184.7	±3.3%	±4.7%			Y	0.00	0.00	1.00	0.30	184.7	±3.3%	±4.7%			Z	0.00	0.00	1.00	0.30	179.5	±3.3%	±4.7%	<p>EX3DV4 - SN-7767 October 28, 2022</p> <p><b>Parameters of Probe: EX3DV4 - SN-7767</b></p> <p><b>Other Probe Parameters</b></p> <table border="1"> <thead> <tr> <th>Sensor Arrangement</th> <th>Connector Angle</th> <th>Mechanical Surface Detection Mode</th> <th>Optical Surface Detection Mode</th> <th>Probe Overall Length</th> <th>Probe Body Diameter</th> <th>Tip Length</th> <th>Tip Diameter</th> <th>Probe Tip to Sensor X Calibration Point</th> <th>Probe Tip to Sensor Y Calibration Point</th> <th>Probe Tip to Sensor Z Calibration Point</th> <th>Recommended Measurement Distance from Surface</th> </tr> </thead> <tbody> <tr> <td>Flange</td> <td>144.8°</td> <td>enabled</td> <td>disabled</td> <td>337 mm</td> <td>9 mm</td> <td>2.5 mm</td> <td>1 mm</td> <td>1 mm</td> <td>1 mm</td> <td>1 mm</td> <td>1.4 mm</td> </tr> </tbody> </table> <p>Note: Measurement distance from surface can be increased to 3-4 mm for UN-Axx-Zxx-xx.</p> <p>Certificate No: EX-7767_Oct22 Page 4 of 9</p>	Sensor Arrangement	Connector Angle	Mechanical Surface Detection Mode	Optical Surface Detection Mode	Probe Overall Length	Probe Body Diameter	Tip Length	Tip Diameter	Probe Tip to Sensor X Calibration Point	Probe Tip to Sensor Y Calibration Point	Probe Tip to Sensor Z Calibration Point	Recommended Measurement Distance from Surface	Flange	144.8°	enabled	disabled	337 mm	9 mm	2.5 mm	1 mm	1 mm	1 mm	1 mm	1.4 mm
North (μV/m) <sup>2</sup> A	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)																																																																											
0.87	5.89	0.56	10.1%																																																																												
DCP (mV) <sup>2</sup> B	103.4	107.3	105.7	±4.7%																																																																											
Mod	Communication System Name	A	B	C	D	V <sub>0</sub>	Max dev.	Max Unc <sup>2</sup>																																																																							
0	CW	X	0.00	0.00	1.00	0.30	184.7	±3.3%	±4.7%																																																																						
		Y	0.00	0.00	1.00	0.30	184.7	±3.3%	±4.7%																																																																						
		Z	0.00	0.00	1.00	0.30	179.5	±3.3%	±4.7%																																																																						
Sensor Arrangement	Connector Angle	Mechanical Surface Detection Mode	Optical Surface Detection Mode	Probe Overall Length	Probe Body Diameter	Tip Length	Tip Diameter	Probe Tip to Sensor X Calibration Point	Probe Tip to Sensor Y Calibration Point	Probe Tip to Sensor Z Calibration Point	Recommended Measurement Distance from Surface																																																																				
Flange	144.8°	enabled	disabled	337 mm	9 mm	2.5 mm	1 mm	1 mm	1 mm	1 mm	1.4 mm																																																																				




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China 215300 | (86-512) 5735 5888 | (86-512) 5737 0818 | www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号 邮编: 215300 | (86-512) 5735 5888 | (86-512) 5737 0818 | sgs.china@sgs.com

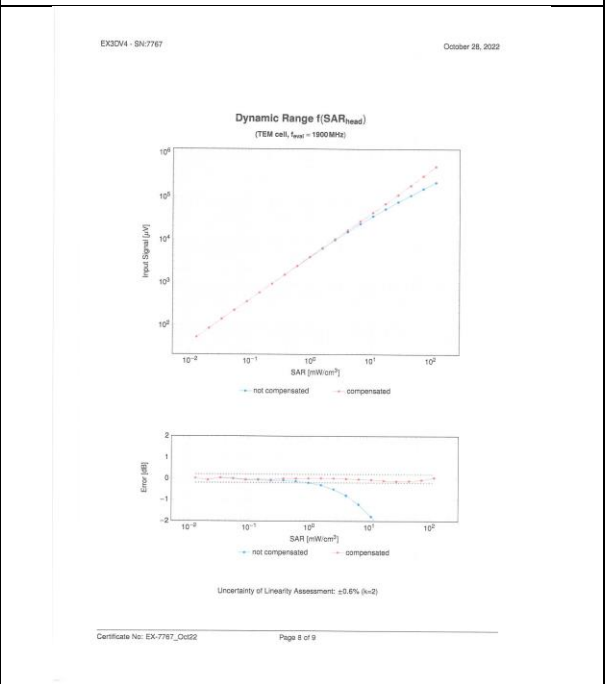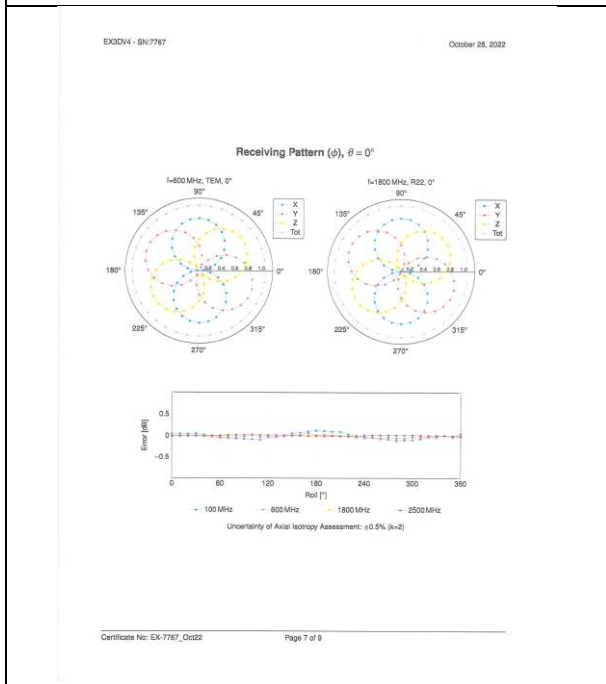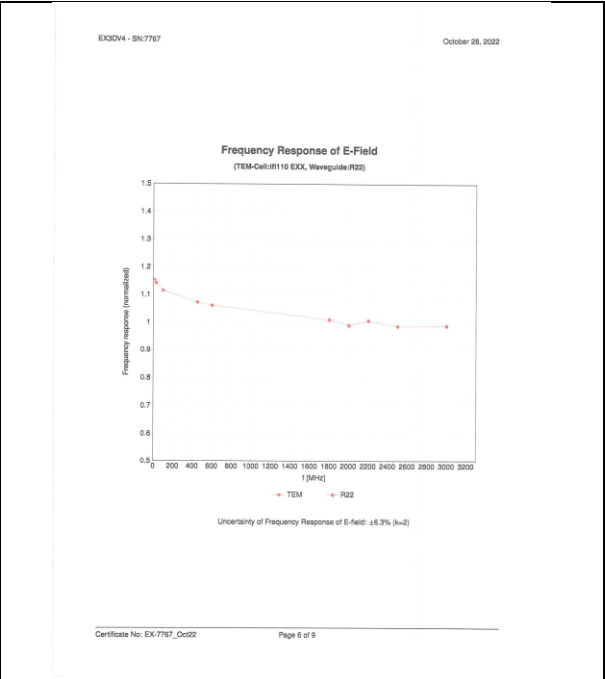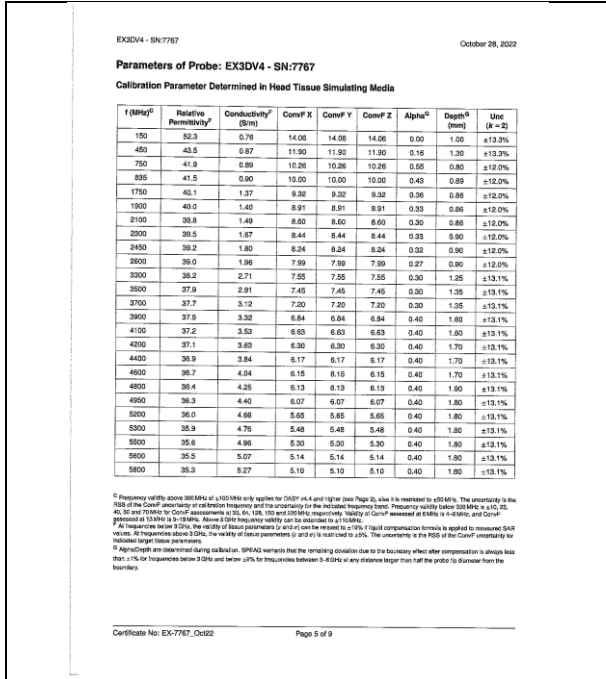

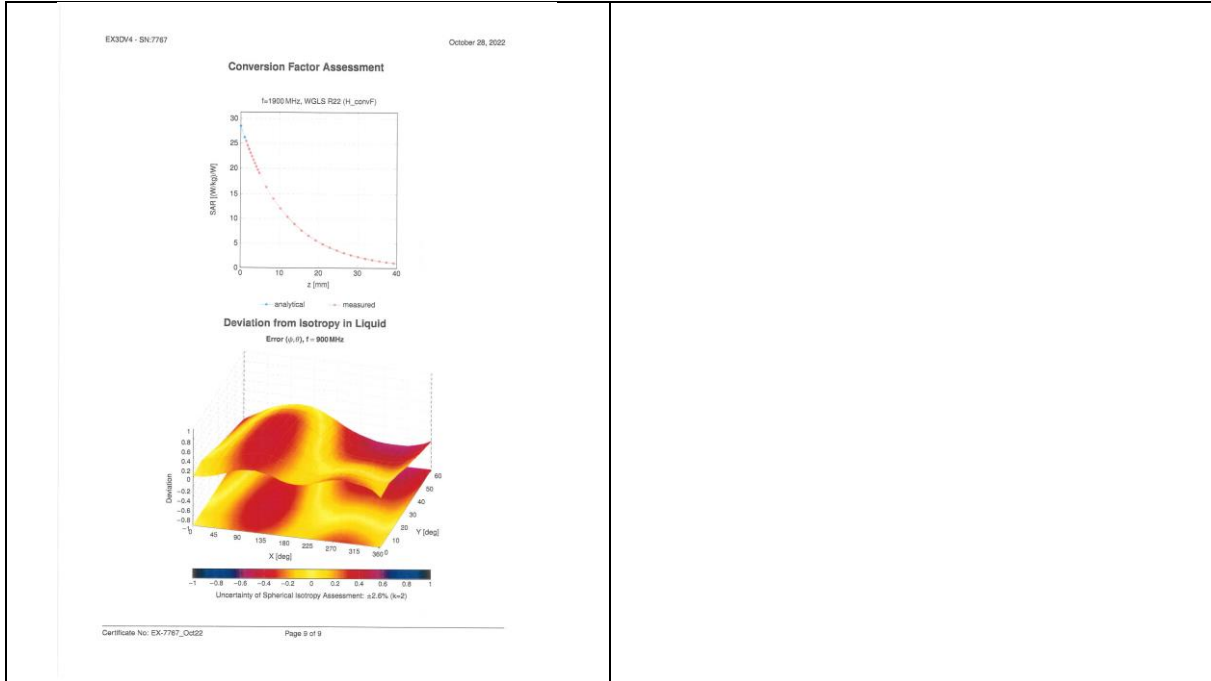

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300    t(86-512)5735 5888    f(86-512) 57370818    www.sgsgroup.com.cn  
 中国·江苏·昆山开发区伟业路10号    邮编: 215300    t(86-512)57355888    f(86-512)57370818    sgs.china@sgs.com

**5 Impedance and return loss**

Dipole D3500V2 SN 1101 for 3400MHz				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/09/09	-21.908	/	44.859	/
2022/09/09	-22.037	0.59%	45.114	0.255 $\Omega$
Dipole D3500V2 SN 1101 for 3500MHz				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/09/09	-26.055	/	53.438	/
2022/09/09	-25.972	-0.32%	53.881	0.443
Dipole D3700V2 SN 1103				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/09/09	-25.289	/	45.136	/
2022/09/09	-24.992	-1.17%	53.806	0.368
Dipole D3900V2 SN 1080 for 3900MHz				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/09/13	-24.246	/	46.969	/
2022/09/13	-24.035	-0.87%	47.122	0.153
Dipole D3900V2 SN 1080 for 4100MHz				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/09/13	-23.890	/	56.485	/
2022/09/13	-24.023	0.56%	56.976	0.491



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No. 10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300    t:(86-512) 5735 5888    f:(86-512) 57370818    www.sgs.com.cn  
 中国·江苏·昆山开发区伟业路10号    邮编: 215300    t:(86-512) 57355888    f:(86-512) 57370818    sgs.china@sgs.com