



# FCC TEST REPORT

**REPORT NO.:** RF920828R01B

**MODEL NO.:** Gigaset PCI Card 54

**RECEIVED:** NA

**TESTED:** Sept. 6 ~ Sept. 25, 2003

**APPLICANT:** ASKEY COMPUTER CORP.

**ADDRESS:** 10F, NO.119, CHIENKANG RD., CHUNG-HO,  
TAIPEI, TAIWAN, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan,  
R.O.C.

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST .....	9
4	TEST TYPES AND RESULTS.....	10
4.1	CONDUCTED EMISSION MEASUREMENT .....	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	10
4.1.2	TEST INSTRUMENTS .....	10
4.1.3	TEST PROCEDURES.....	11
4.1.4	DEVIATION FROM TEST STANDARD .....	11
4.1.5	TEST SETUP .....	12
4.1.6	EUT OPERATING CONDITIONS .....	12
4.1.7	TEST RESULTS.....	13
4.2	RADIATED EMISSION MEASUREMENT.....	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
4.2.2	TEST INSTRUMENTS .....	20
4.2.3	TEST PROCEDURES.....	21
4.2.4	DEVIATION FROM TEST STANDARD .....	21
4.2.5	TEST SETUP .....	22
4.2.6	EUT OPERATING CONDITIONS .....	22
4.2.7	TEST RESULTS.....	23
4.2.8	TEST RESULTS (A).....	25
4.2.9	TEST RESULTS (B).....	28
4.3	6dB BANDWIDTH MEASUREMENT .....	31
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	31
4.3.2	TEST INSTRUMENTS .....	31
4.3.3	TEST PROCEDURE .....	31
4.3.4	DEVIATION FROM TEST STANDARD .....	32
4.3.5	TEST SETUP .....	32
4.3.6	EUT OPERATING CONDITIONS .....	32
4.3.7	TEST RESULTS (A).....	33
4.3.8	TEST RESULTS (B).....	37
4.4	MAXIMUM PEAK OUTPUT POWER.....	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	41
4.4.2	TEST INSTRUMENTS .....	41
4.4.3	TEST PROCEDURES.....	42
4.4.4	DEVIATION FROM TEST STANDARD.....	42
4.4.5	TEST SETUP .....	42
4.4.6	EUT OPERATING CONDITIONS .....	42
4.4.7	TEST RESULTS (A).....	43
4.4.8	TEST RESULTS (B).....	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	45



4.5.2	TEST INSTRUMENTS .....	45
4.5.3	TEST PROCEDURE .....	45
4.5.4	DEVIATION FROM TEST STANDARD .....	46
4.5.5	TEST SETUP .....	46
4.5.6	EUT OPERATING CONDITIONS .....	46
4.5.7	TEST RESULTS (A) .....	47
4.5.8	TEST RESULTS (B) .....	51
4.6	BAND EDGES MEASUREMENT .....	55
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	55
4.6.2	TEST INSTRUMENTS .....	55
4.6.3	TEST PROCEDURE .....	55
4.6.4	DEVIATION FROM TEST STANDARD .....	55
4.6.5	EUT OPERATING CONDITION .....	56
4.6.6	TEST RESULTS (A) .....	56
4.6.7	TEST RESULTS (B) .....	61
4.7	ANTENNA REQUIREMENT .....	66
4.7.1	STANDARD APPLICABLE .....	66
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	66
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	67
6	INFORMATION ON THE TESTING LABORATORIES .....	69




## 1 CERTIFICATION

**PRODUCT :** PCI Wireless LAN Card  
**BRAND NAME :** SIEMENS  
**MODEL NO. :** Gigaset PCI Card 54  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT :** ASKEY COMPUTER CORP.  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Sept. 6 ~ Sept. 25, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:**  , **DATE:** February 2, 2004  
Stephanie Hung

**APPROVED BY:**  , **DATE:** February 2, 2004  
Ellis Wu /  
Technical Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -17.29dB at 2.041MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.50dB at 768.68MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

**NOTE:** The information of measurement uncertainty is available upon the customer's request.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	PCI Wireless LAN Card
<b>MODEL NO.</b>	Gigaset PCI Card 54
<b>POWER SUPPLY</b>	3.3Vdc from host equipment
<b>MODULATION TYPE</b>	DBPSK, DQPSK, CCK, 16QAM, 64QAM
<b>RADIO TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	15dBm
<b>ANTENNA TYPE</b>	Dipole antenna
<b>ANTENNA GAIN</b>	1.8dBi
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	NA
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. This is a duplicate report of RF920828R01 and the difference is changing the applicant, brand name, model name, product name and FCC ID.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
4. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Data rate 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, was chosen for final test.
4. Two test results were presented in the following sections, the test result A is for CCK technique and the test result B is for OFDM technique.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a PCI Wireless LAN Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**  
**ANSI C63.4 : 1992**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	HP	DTPC 27	SG21103587	FCC DoC Approved
2	MONITOR	HP	D2842A	KR93473113	BEJCB910
3	PS/2 KEYBOARD	BTC	5200T	F24800238	E5XKB5122WTH01 10
4	PS/2 MOUSE	BTC	M851	N/A	E5XMSM860
5	PRINTER	EPSON	LQ-300+	DCGY017076	FCC DoC Approved
6	MODEM	ACEEX	1414	980020520	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.6 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
4	1.5 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.
5	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
6	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).



### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

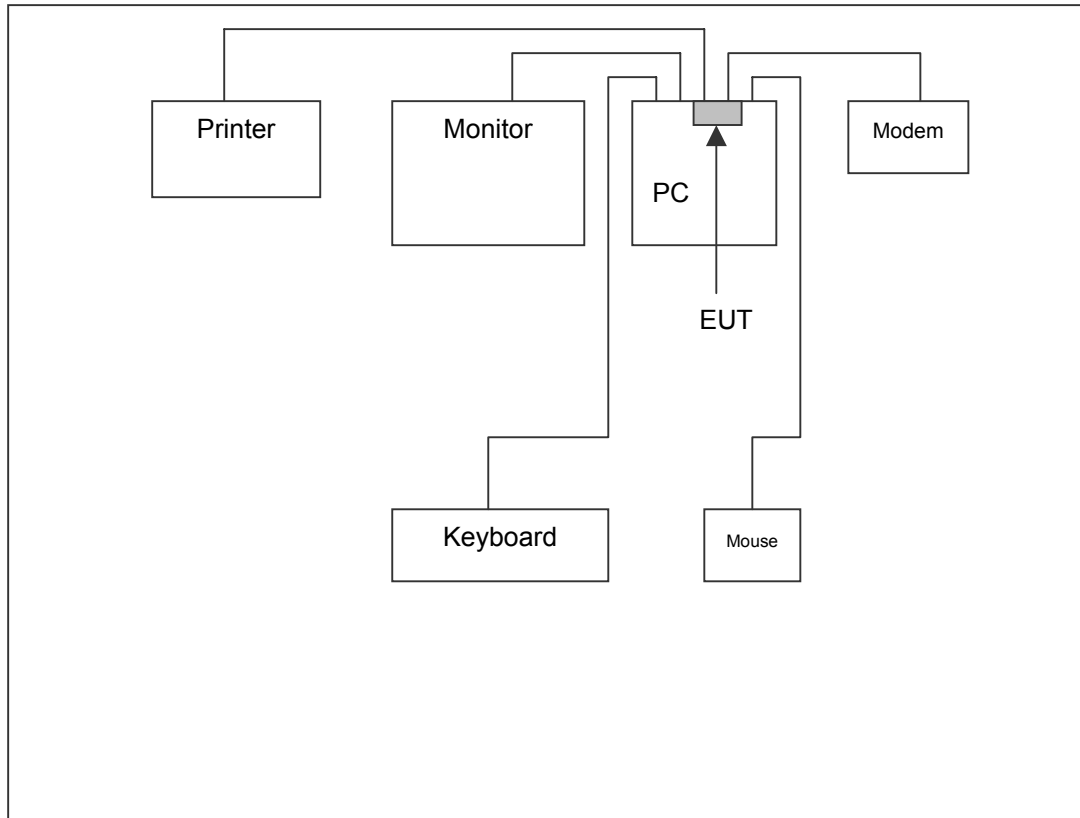



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	828765/002	July 15, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	Apr. 28, 2004
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Apr. 28, 2004
ROHDE & SCHWARZ 4-wire ISN	ENY41	935154/007	Apr. 30 2004
ROHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	Apr. 30, 2004
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	May 23, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	Jun. 04, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 9.
  4. The VCCI Site Registration No. is C-1312.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under limit 20dB of the prescribed limits could not be reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

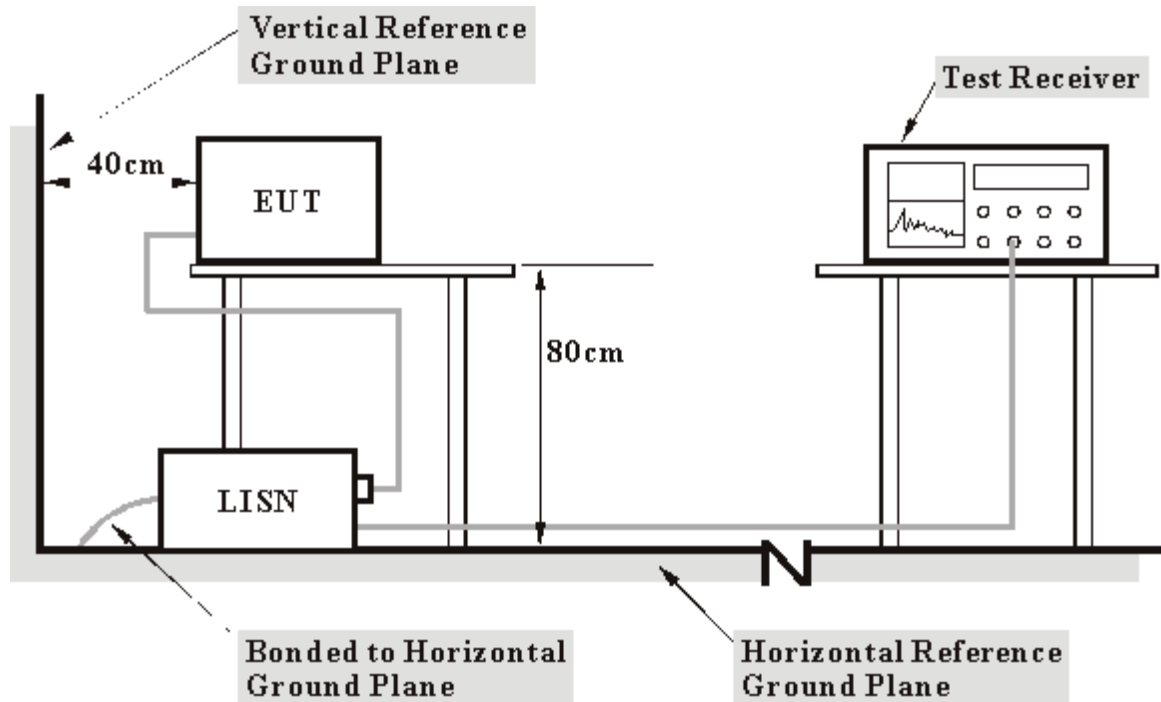

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT a notebook computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Steps c~e were repeated.




4.1.7 TEST RESULTS

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.183	0.10	41.57	-	41.67	-	64.35
2	0.354	0.18	29.58	-	29.76	-	58.87	48.87	-29.11	-
3	0.714	0.20	29.73	-	29.93	-	56.00	46.00	-26.07	-
4	1.375	0.20	32.95	-	33.15	-	56.00	46.00	-22.85	-
5	1.921	0.20	35.44	-	35.64	-	56.00	46.00	-20.36	-
6	12.725	0.76	28.21	-	28.97	-	60.00	50.00	-31.03	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

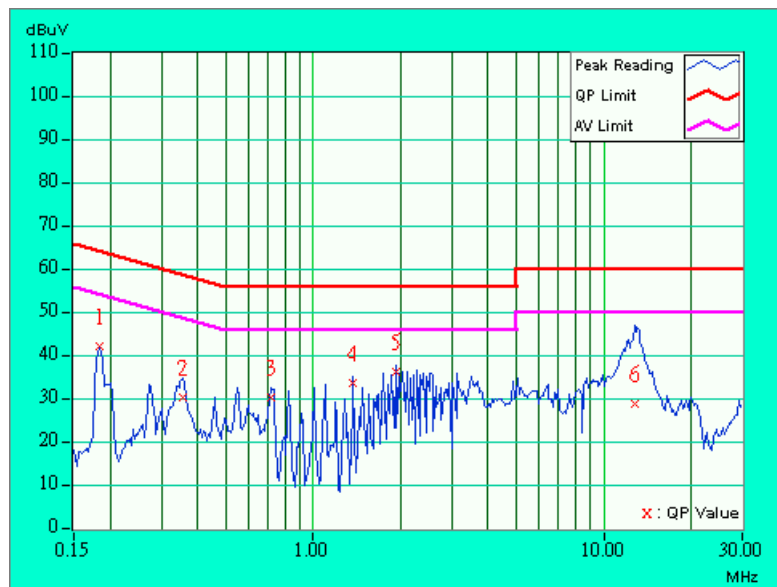




<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.183	0.10	45.85	-	45.95	-	64.35	54.35	-18.40
2	0.459	0.20	36.60	-	36.80	-	56.71	46.71	-19.91	-
3	0.732	0.20	34.06	-	34.26	-	56.00	46.00	-21.74	-
4	1.375	0.20	35.43	-	35.63	-	56.00	46.00	-20.37	-
5	1.921	0.20	38.38	-	38.58	-	56.00	46.00	-17.42	-
6	13.448	0.71	38.91	-	39.62	-	60.00	50.00	-20.38	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

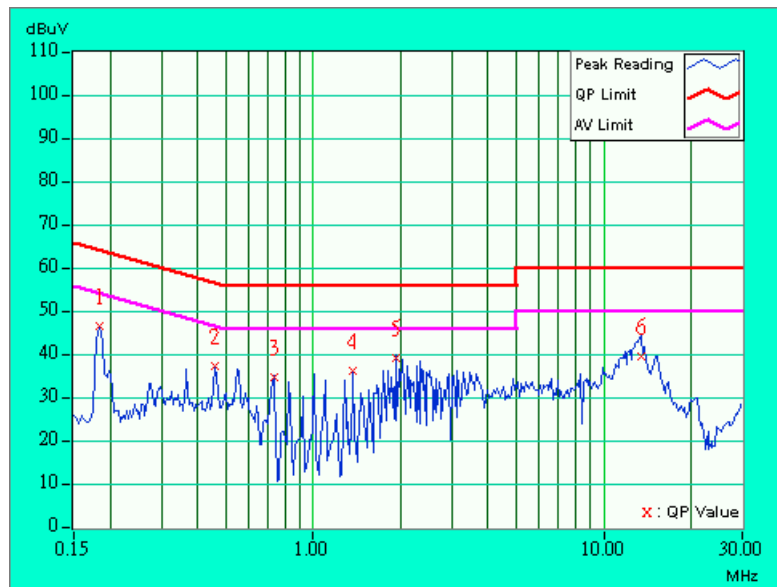




<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.183	0.10	41.45	-	41.55	-	64.35	54.35	-22.80
2	0.273	0.14	32.14	-	32.28	-	61.03	51.03	-28.75	-
3	0.459	0.20	32.72	-	32.92	-	56.71	46.71	-23.79	-
4	1.099	0.20	32.39	-	32.59	-	56.00	46.00	-23.41	-
5	1.921	0.20	35.68	-	35.88	-	56.00	46.00	-20.12	-
6	13.148	0.79	37.91	-	38.70	-	60.00	50.00	-21.30	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

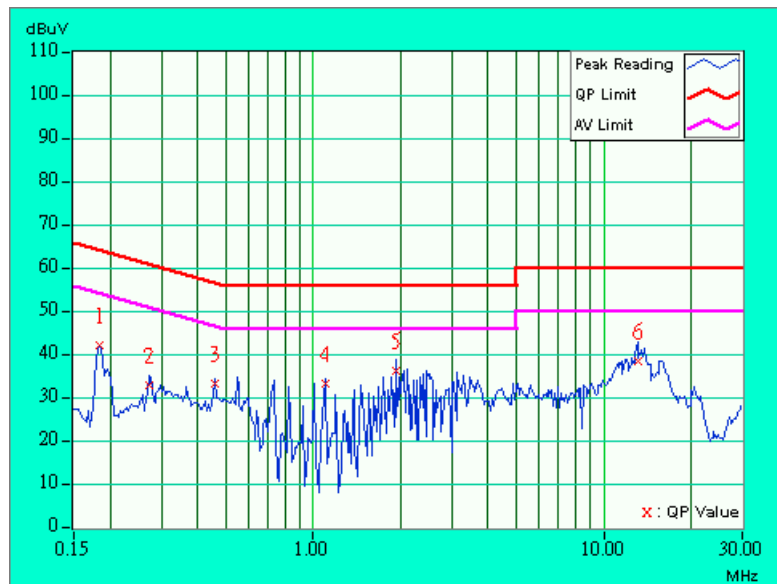




<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.183	0.10	45.69	-	45.79	-	64.35	54.35	-18.56
2	0.459	0.20	36.62	-	36.82	-	56.71	46.71	-19.89	-
3	1.006	0.20	34.35	-	34.55	-	56.00	46.00	-21.45	-
4	2.041	0.20	38.51	-	38.71	-	56.00	46.00	-17.29	-
5	13.145	0.69	38.07	-	38.76	-	60.00	50.00	-21.24	-
6	15.548	0.81	35.85	-	36.66	-	60.00	50.00	-23.34	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

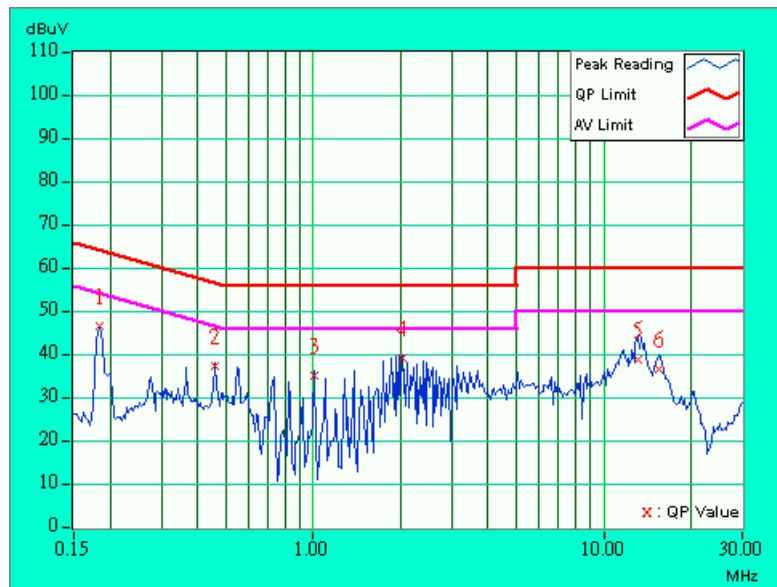






<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.183	0.10	41.61	-	41.71	-	64.35	54.35	-22.64
2	0.276	0.14	32.86	-	33.00	-	60.94	50.94	-27.94	-
3	0.549	0.20	31.67	-	31.87	-	56.00	46.00	-24.13	-
4	1.921	0.20	38.38	-	38.58	-	56.00	46.00	-17.42	-
5	13.148	0.79	37.61	-	38.40	-	60.00	50.00	-21.60	-
6	16.388	0.96	35.51	-	36.47	-	60.00	50.00	-23.53	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

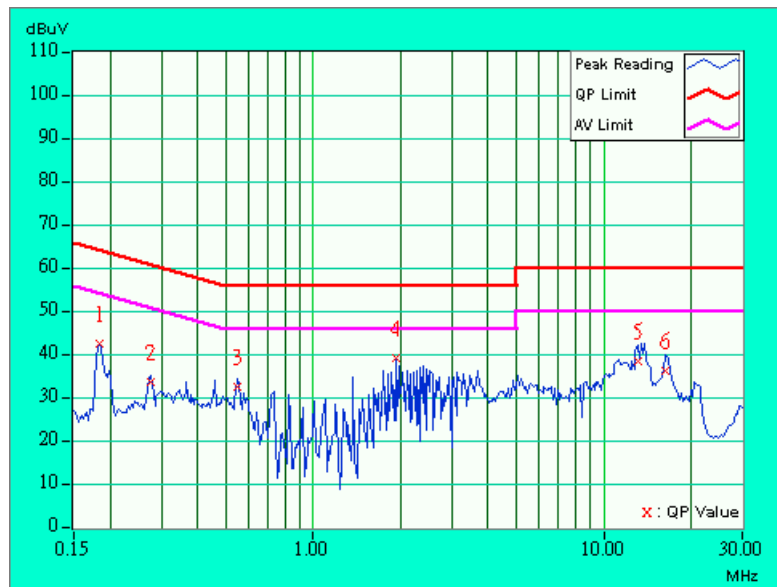




<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	32deg. C, 50%RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.183	0.10	45.73	-	45.83	-	64.35	54.35	-18.52
2	0.459	0.20	36.80	-	37.00	-	56.71	46.71	-19.71	-
3	1.006	0.20	34.27	-	34.47	-	56.00	46.00	-21.53	-
4	1.921	0.20	37.78	-	37.98	-	56.00	46.00	-18.02	-
5	13.746	0.72	39.59	-	40.31	-	60.00	50.00	-19.69	-
6	16.628	0.83	37.53	-	38.36	-	60.00	50.00	-21.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

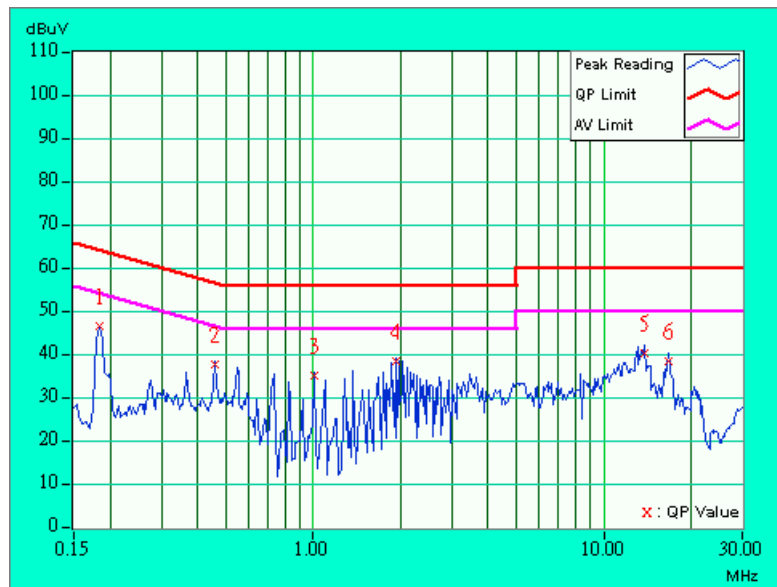



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8593E	3911A07465	July 07, 2004
* HP Preamplifier	8447D	2432A03504	June 10, 2004
* HP Preamplifier	8449B	3008A01201	Nov. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Jun. 26, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 12, 2005
*Schwarzbeck Antenna	VULB9168	137	Apr. 03, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	June 30, 2004
ADT. Turn Table	TT100	0306	NA
*ADT. Tower	AT100	0306	NA
*Software	ADT_Radiated_V 5.14	NA	NA
*TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. "\*" = These equipment are used for the final measurement.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The test was performed in ADT Chamber No. 6.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

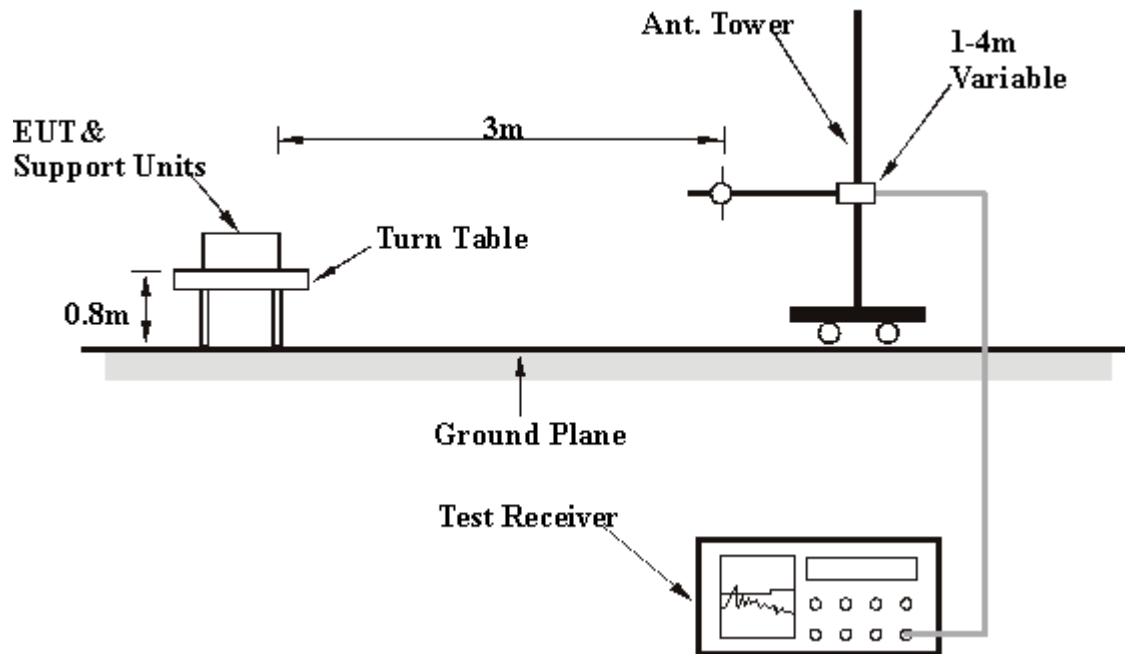

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.71	33.6 QP	40.00	-6.40	2.50 H	205	22.90	10.70
2	383.79	29.2 QP	46.00	-16.80	1.50 H	232	11.90	17.30
3	479.04	32.7 QP	46.00	-13.30	1.75 H	268	12.90	19.70
4	576.23	39.6 QP	46.00	-6.40	1.50 H	157	17.70	21.90
5	720.08	34.2 QP	46.00	-11.80	1.25 H	169	9.70	24.50
6	768.68	43.5 QP	46.00	-2.50	1.00 H	163	18.00	25.50
7	807.56	37.9 QP	46.00	-8.10	1.25 H	73	12.20	25.70
8	865.87	29.7 QP	46.00	-16.30	1.25 H	241	3.30	26.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Steven Lu	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	28.9 QP	40.00	-11.10	1.00 V	262	14.40	14.50
2	74.71	34.0 QP	40.00	-6.00	1.00 V	208	23.30	10.70
3	383.79	33.3 QP	46.00	-12.70	1.50 V	331	16.00	17.30
4	479.04	37.0 QP	46.00	-9.00	1.75 V	10	17.20	19.70
5	576.23	38.3 QP	46.00	-7.70	1.50 V	214	16.40	21.90
6	720.08	32.4 QP	46.00	-13.60	1.75 V	322	7.80	24.50
7	768.68	41.1 QP	46.00	-4.90	1.75 V	208	15.70	25.50
8	803.67	36.6 QP	46.00	-9.40	1.75 V	169	10.90	25.70
9	834.77	34.4 QP	46.00	-11.60	1.00 V	352	8.50	26.00
10	931.96	33.5 QP	46.00	-12.50	2.00 V	334	6.00	27.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





4.2.8 TEST RESULTS (A)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.2 PK	74.00	-21.80	1.00 H	38	22.60	29.60
1	2390.00	38.3 AV	54.00	-15.70	1.00 H	38	8.70	29.60
2	*2412.00	99.1 PK			1.00 H	38	69.40	29.70
2	*2412.00	85.2 AV			1.00 H	38	55.50	29.70
3	4824.00	46.1 PK	74.00	-27.90	1.27 H	241	10.90	35.30

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.00	-9.40	1.05 V	320	35.00	29.60
1	2390.00	50.7 AV	54.00	-3.30	1.05 V	320	21.10	29.60
2	*2412.00	111.5 PK			1.05 V	320	81.80	29.70
2	*2412.00	97.6 AV			1.05 V	320	67.90	29.70
3	4824.00	55.4 PK	74.00	-18.60	1.00 V	247	20.10	35.30
3	4824.00	38.9 AV	54.00	-15.10	1.00 V	247	3.70	35.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.0 PK			1.24 H	37	68.30	29.70
1	*2437.00	84.8 AV			1.24 H	37	55.10	29.70
2	4874.00	51.2 PK	74.00	-22.80	1.37 H	287	15.70	35.50
2	4874.00	36.5 AV	54.00	-17.50	1.37 H	287	1.00	35.50

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.5 PK			1.18 V	200	80.80	29.70
1	*2437.00	96.6 AV			1.18 V	200	66.90	29.70
2	4874.00	58.2 PK	74.00	-15.80	1.11 V	189	22.70	35.50
2	4874.00	43.0 AV	54.00	-11.00	1.11 V	189	7.50	35.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency



<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.5 PK			1.00 H	357	65.60	29.80
1	*2462.00	82.3 AV			1.00 H	357	52.40	29.80
2	2483.50	48.7 PK	74.00	-25.30	1.00 H	357	18.80	29.90
3	4924.00	48.8 PK	74.00	-25.20	1.00 H	357	13.10	35.70

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.1 PK			1.00 V	321	80.30	29.80
1	*2462.00	95.4 AV			1.00 V	321	65.50	29.80
2	2483.50	63.3 PK	74.00	-10.70	1.00 V	321	33.40	29.90
2	2483.50	48.6 AV	54.00	-5.40	1.00 V	321	18.70	29.90
3	4924.00	51.1 PK	74.00	-22.90	1.00 V	37	15.50	35.70
3	4924.00	36.3 AV	54.00	-17.70	1.00 V	37	0.60	35.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



4.2.9 TEST RESULTS (B)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.4 PK	74.00	-6.60	1.03 H	37	37.80	29.60
1	2390.00	43.2 AV	54.00	-10.80	1.03 H	37	13.60	29.60
2	*2412.00	100.2 PK			1.03 H	37	70.50	29.70
2	*2412.00	87.0 AV			1.03 H	37	57.30	29.70
3	4824.00	45.6 PK	74.00	-28.40	1.37 H	24	10.30	35.30

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.00	-9.60	1.04 V	160	34.80	29.60
1	2390.00	50.5 AV	54.00	-3.50	1.04 V	160	20.90	29.60
2	*2412.00	108.2 PK			1.04 V	160	78.60	29.70
2	*2412.00	94.3 AV			1.04 V	160	64.60	29.70
3	4824.00	53.9 PK	74.00	-20.10	1.34 V	339	18.70	35.30
3	4824.00	37.6 AV	54.00	-16.40	1.34 V	339	2.40	35.30
4	7236.00	54.0 PK	74.00	-20.00	1.48 V	25	12.90	41.10
4	7236.00	38.3 AV	54.00	-15.70	1.48 V	25	-2.80	41.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	96.6 PK			1.00 H	245	66.90	29.70
1	*2437.00	83.2 AV			1.00 H	245	53.50	29.70
2	4874.00	49.1 PK	74.00	-24.90	1.45 H	321	13.60	35.50

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.0 PK			1.31 V	320	79.20	29.70
1	*2437.00	95.1 AV			1.31 V	320	65.30	29.70
2	4874.00	53.9 PK	74.00	-20.10	1.08 V	321	18.40	35.50
2	4874.00	38.3 AV	54.00	-15.70	1.08 V	321	2.80	35.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	30 deg. C, 60 % RH, 991 hPa	<b>TESTED BY:</b> Martin Lee	

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.4 PK			1.53 H	343	69.60	29.80
1	*2462.00	86.9 AV			1.53 H	343	57.10	29.80
2	2483.50	55.0 PK	74.00	-19.00	1.53 H	343	25.10	29.90
2	2483.50	42.5 AV	54.00	-11.50	1.53 H	343	12.60	29.90
3	4924.00	48.0 PK	74.00	-26.00	1.72 H	352	12.30	35.70

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.7 PK			1.05 V	360	77.80	29.80
1	*2462.00	94.5 AV			1.05 V	360	64.70	29.80
2	2483.50	63.3 PK	74.00	-10.70	1.05 V	360	33.40	29.90
2	2483.50	50.1 AV	54.00	-3.90	1.05 V	360	20.20	29.90
3	4924.00	52.2 PK	74.00	-21.80	1.54 V	62	16.60	35.70
3	4924.00	37.4 AV	54.00	-16.60	1.54 V	62	1.70	35.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

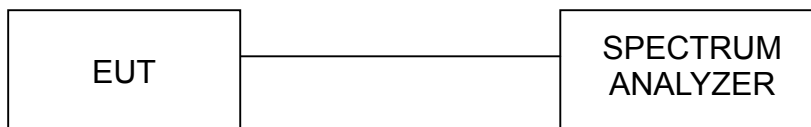

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.






4.3.7 TEST RESULTS (A)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	11.04	0.5	PASS
6	2437	11.16	0.5	PASS
11	2462	10.92	0.5	PASS




CH1

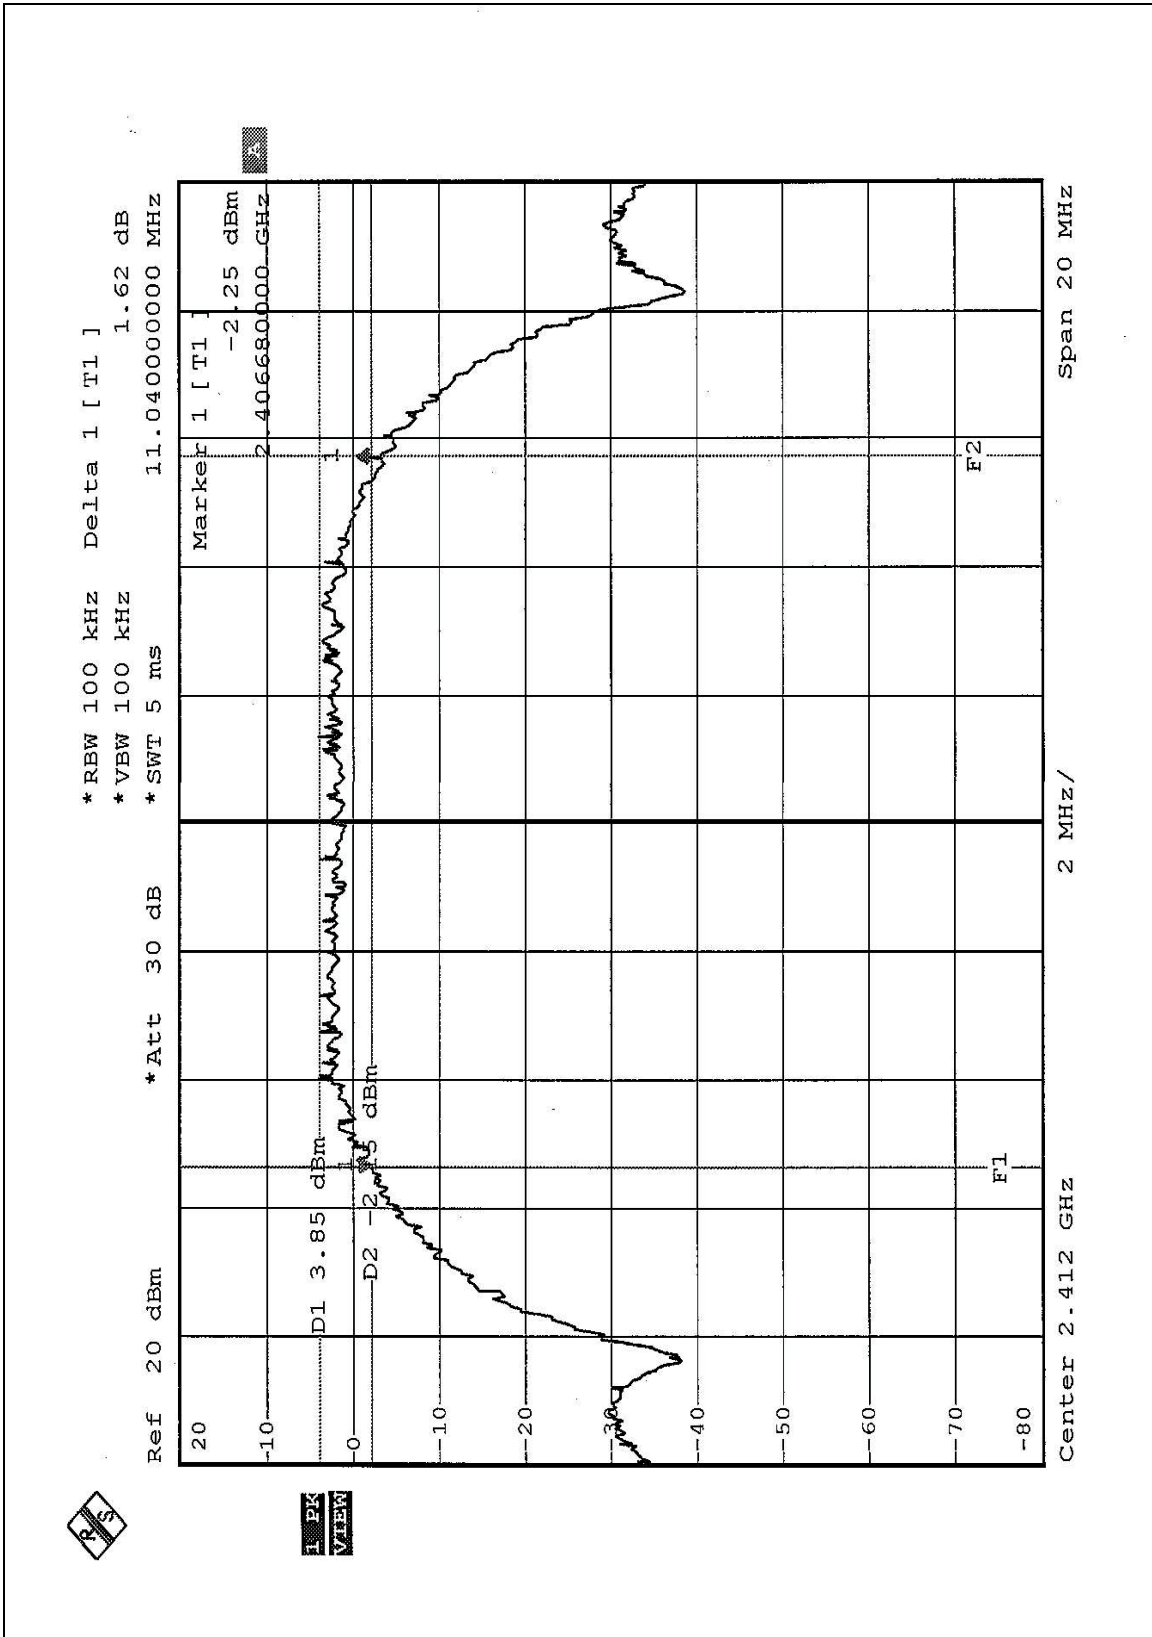




CH6

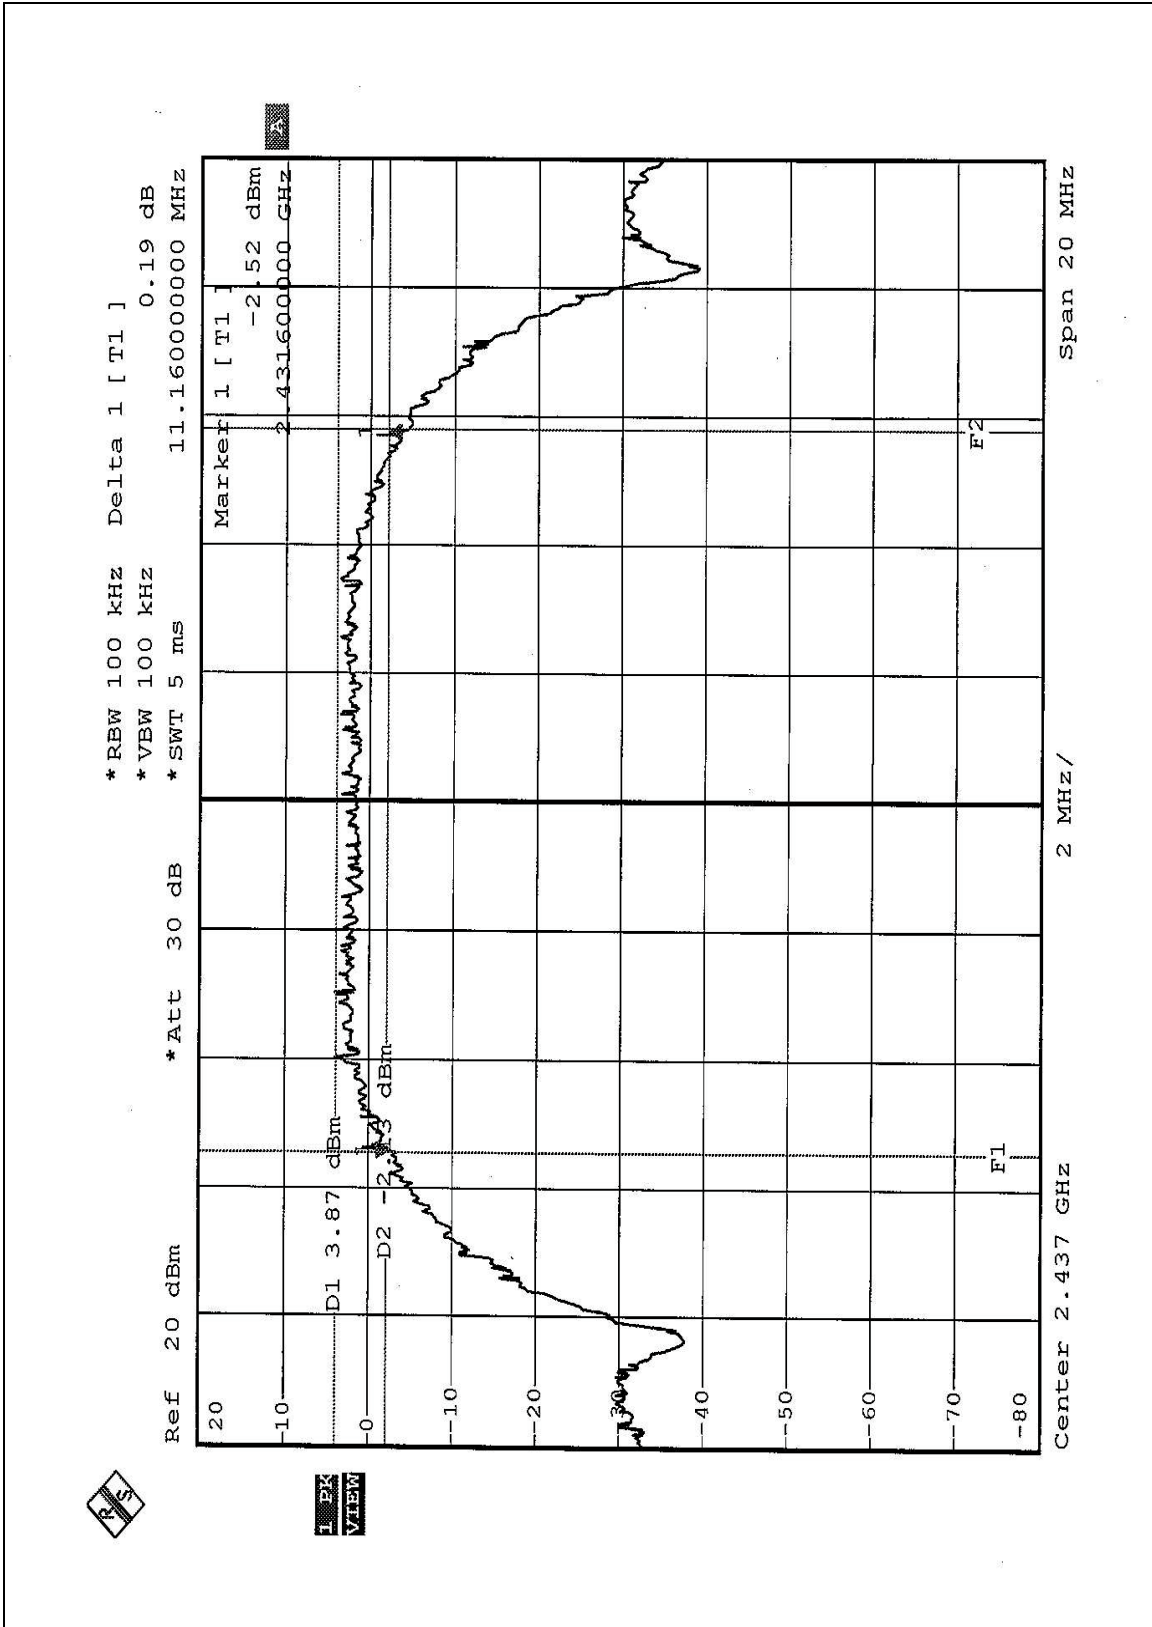



CH11

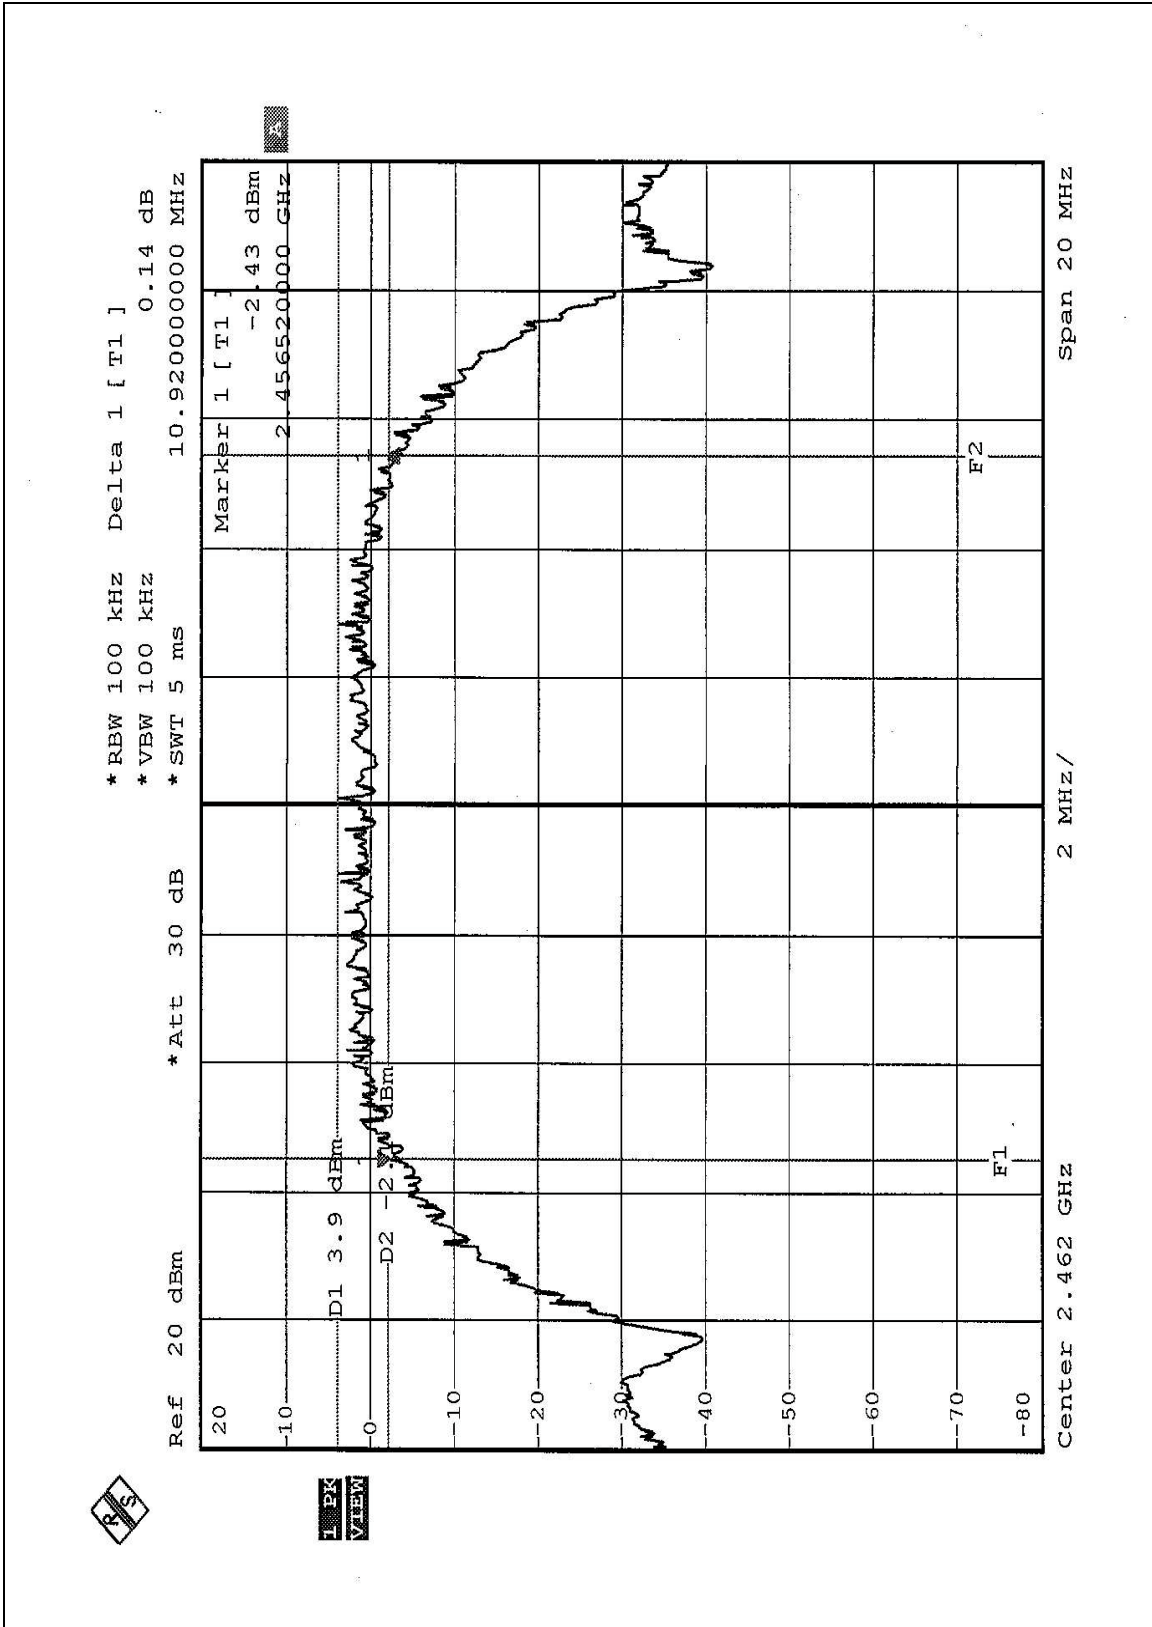




## 4.3.8 TEST RESULTS (B)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.40	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS




CH1

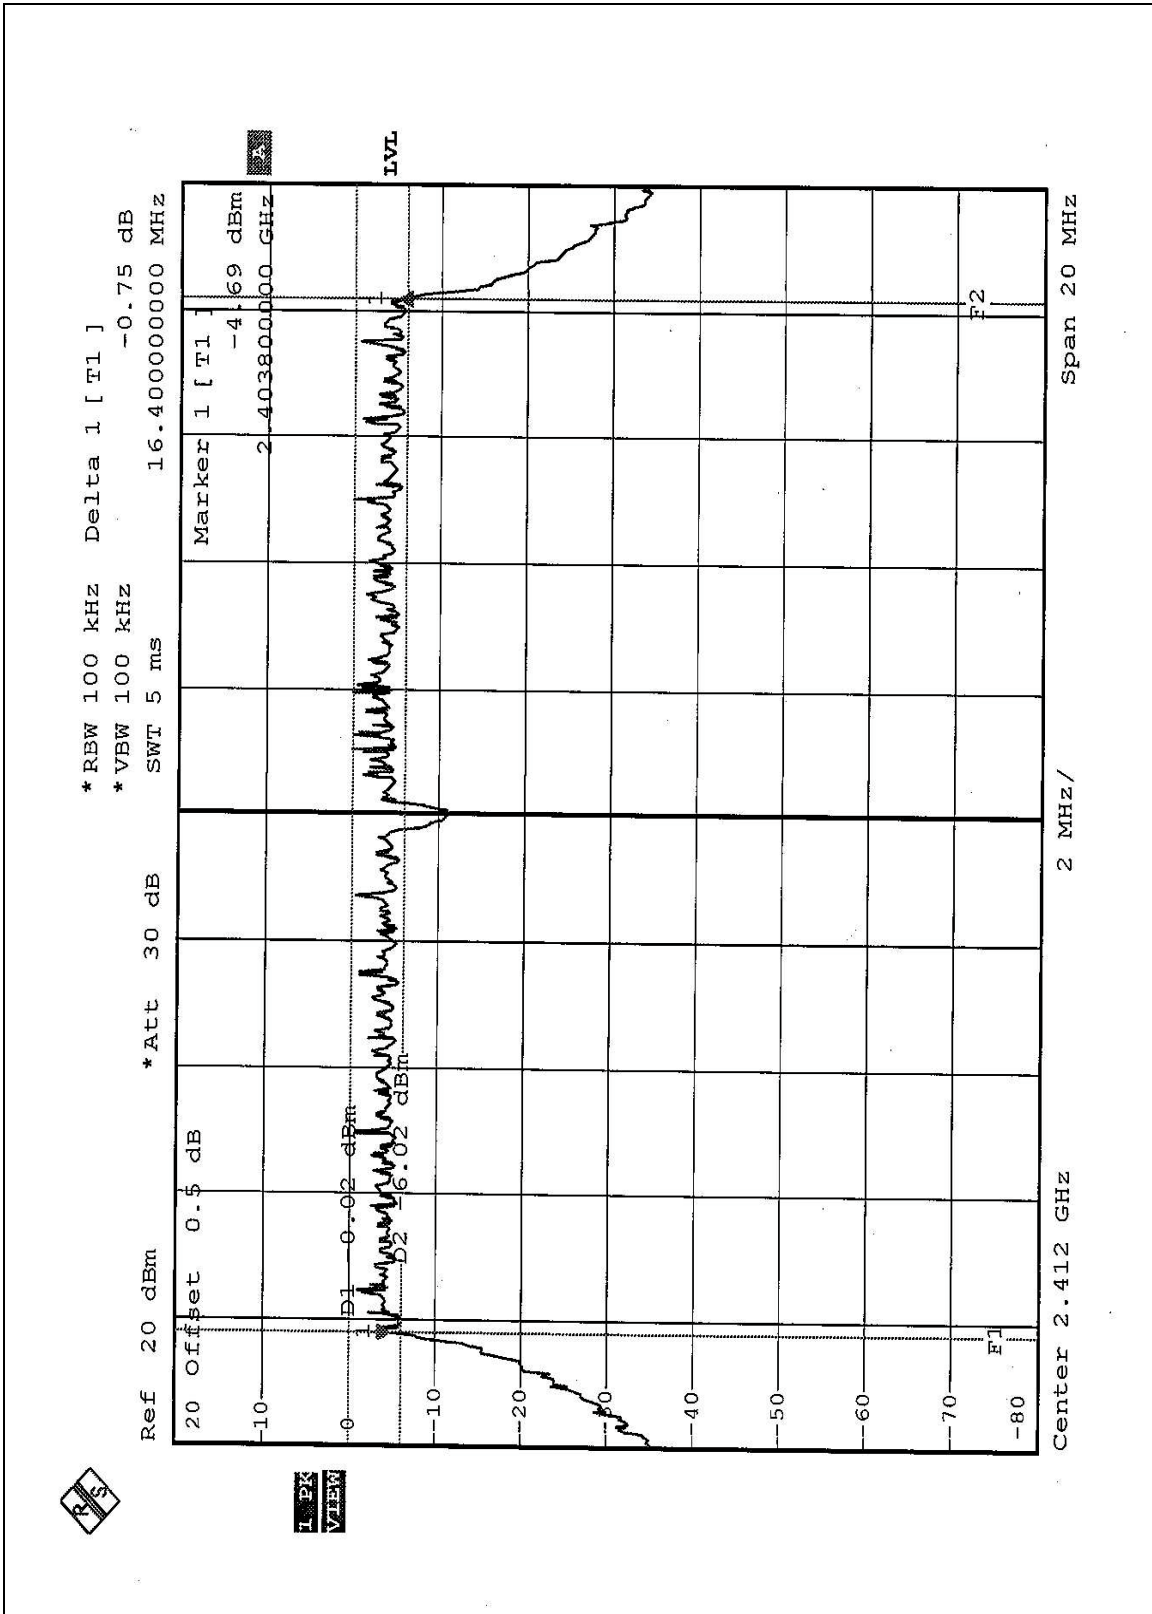




CH6

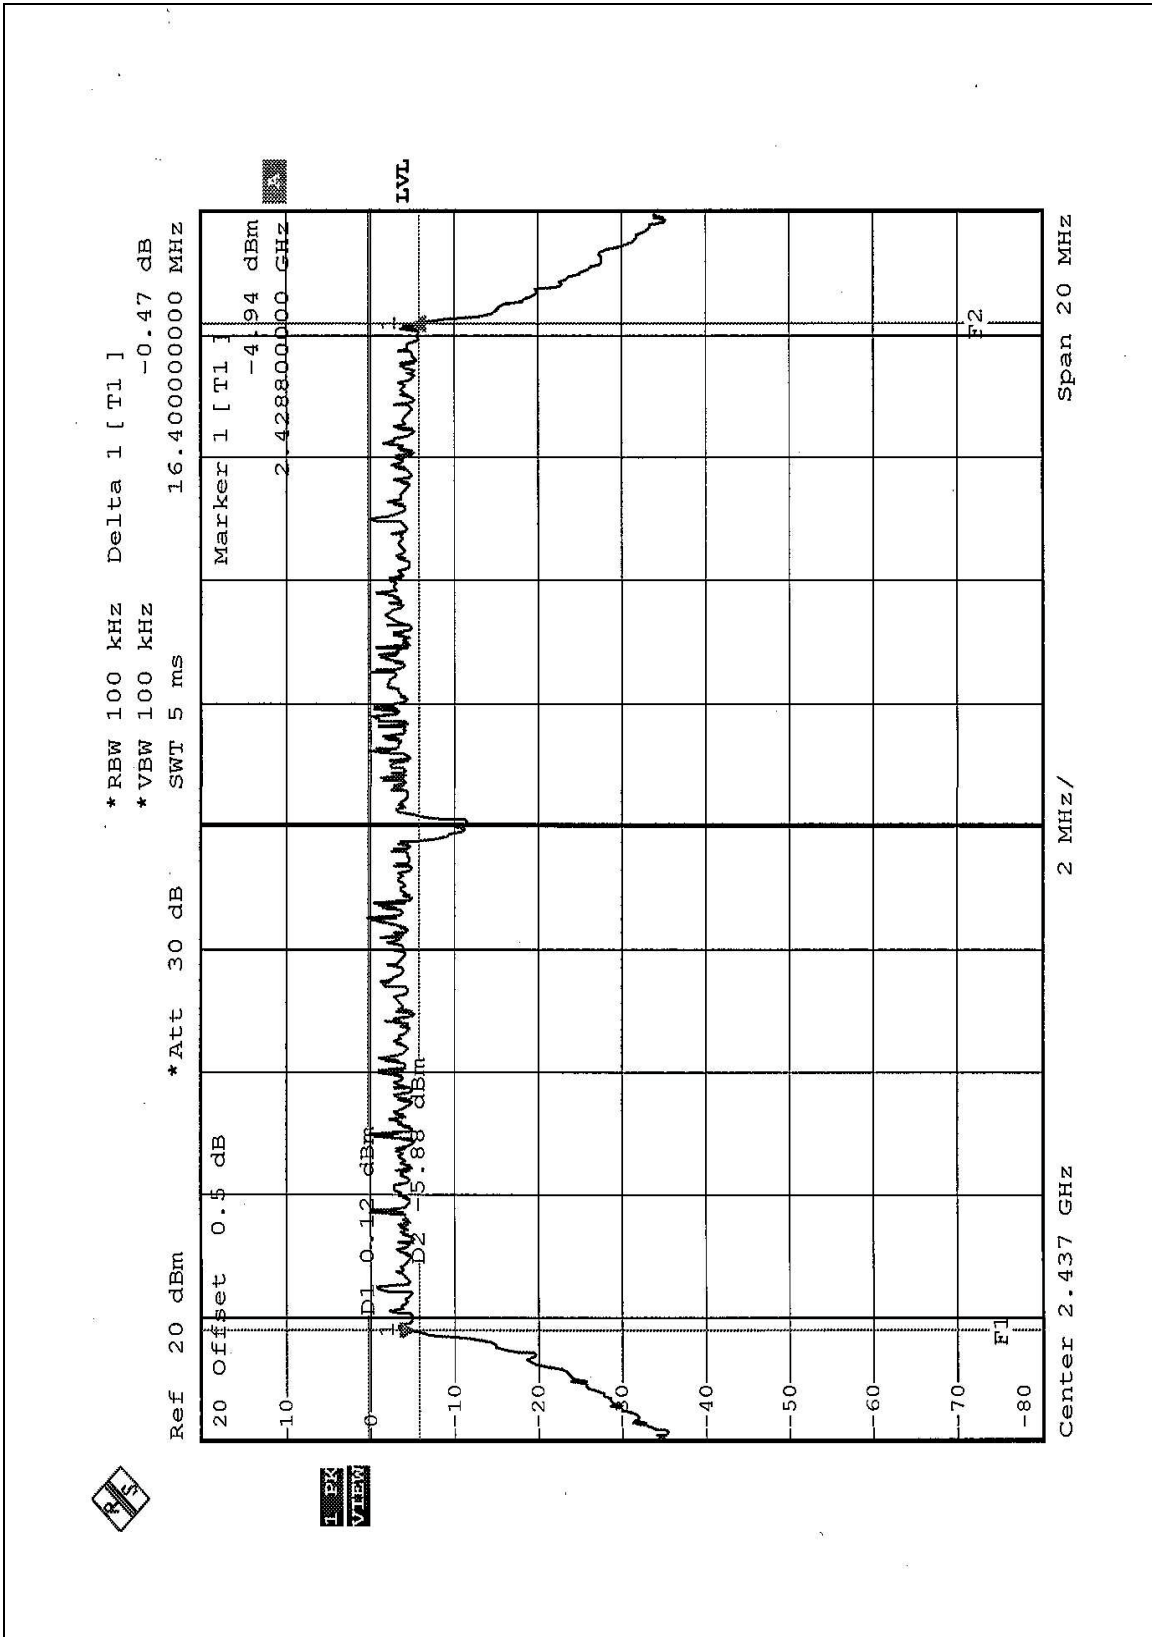



CH11

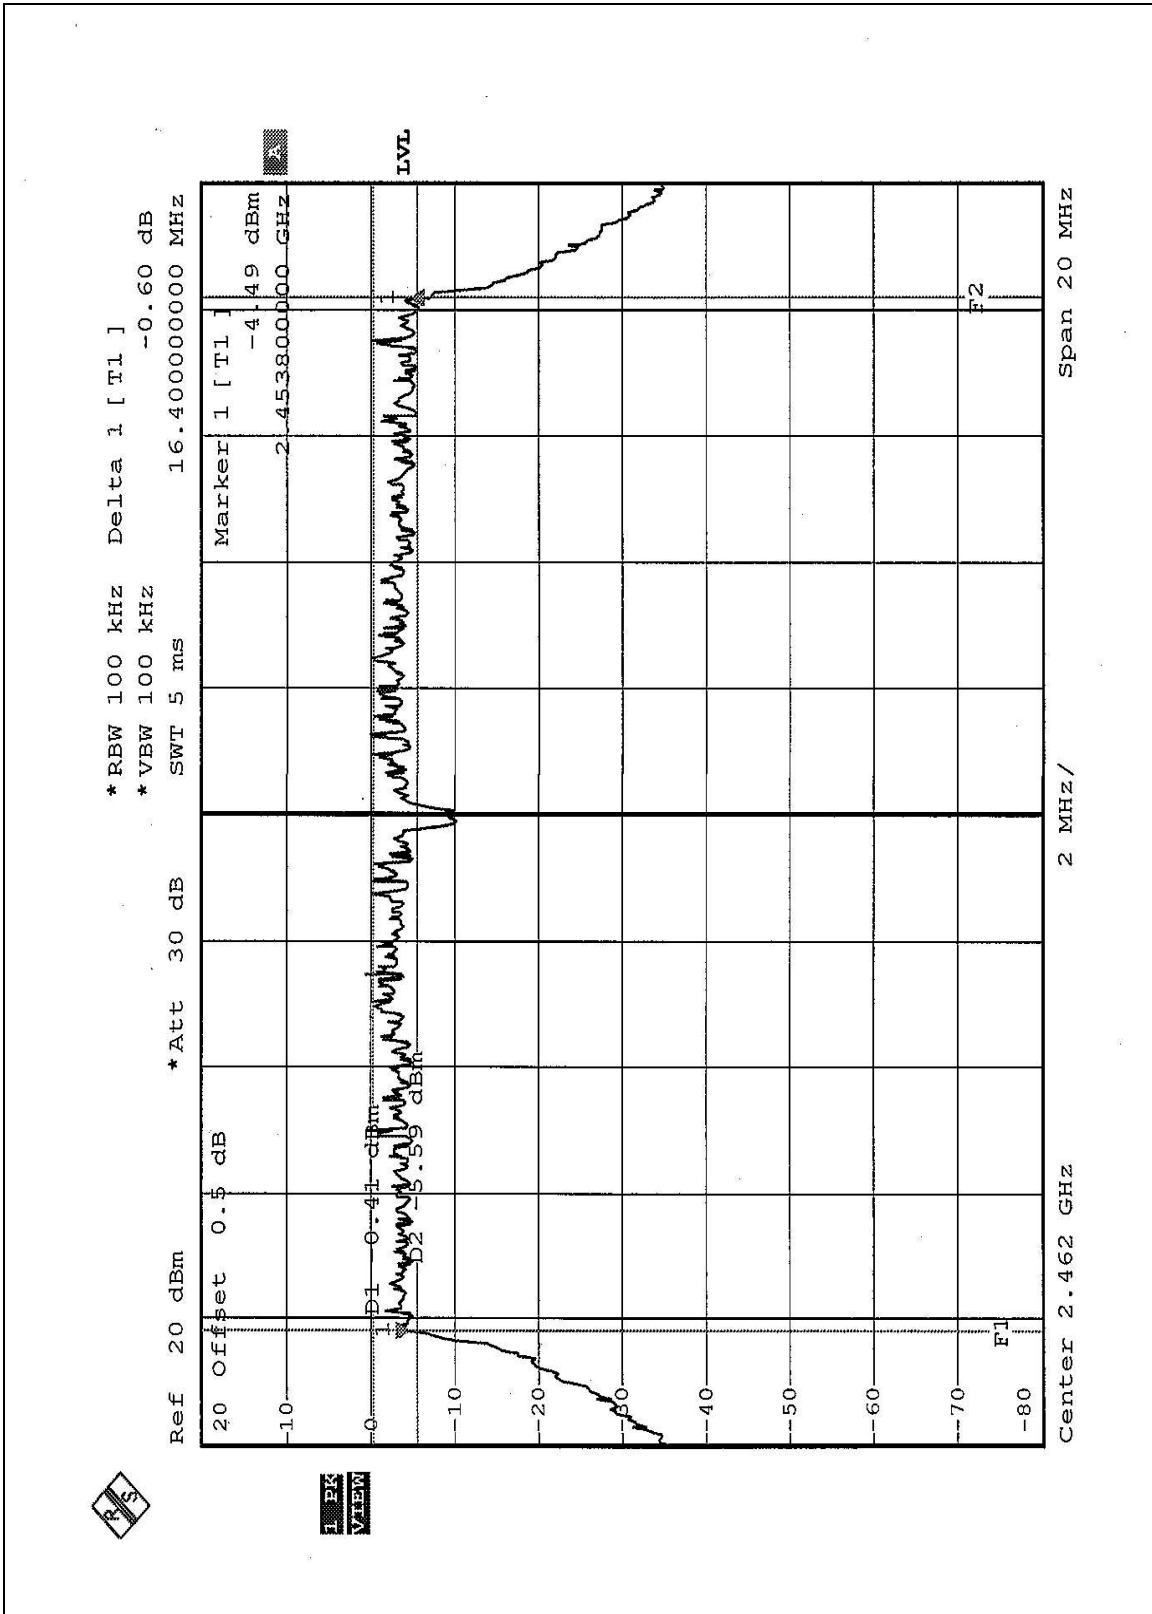

1 PK VIEW





#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..



#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



## 4.4.7 TEST RESULTS (A)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	15.00	30	PASS
6	2437	14.90	30	PASS
11	2462	15.00	30	PASS



## 4.4.8 TEST RESULTS (B)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>PEAK POWER OUTPUT (dBm)</b>	<b>PEAK POWER LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	14.90	30	PASS
6	2437	14.80	30	PASS
11	2462	15.00	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.



#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP

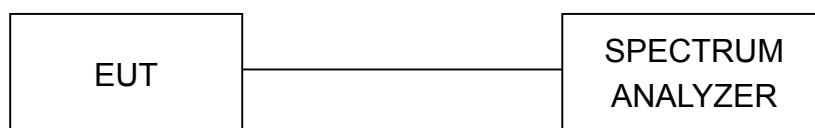

#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




## 4.5.7 TEST RESULTS (A)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-10.56	8	PASS
6	2437	-9.66	8	PASS
11	2462	-10.25	8	PASS




CH1

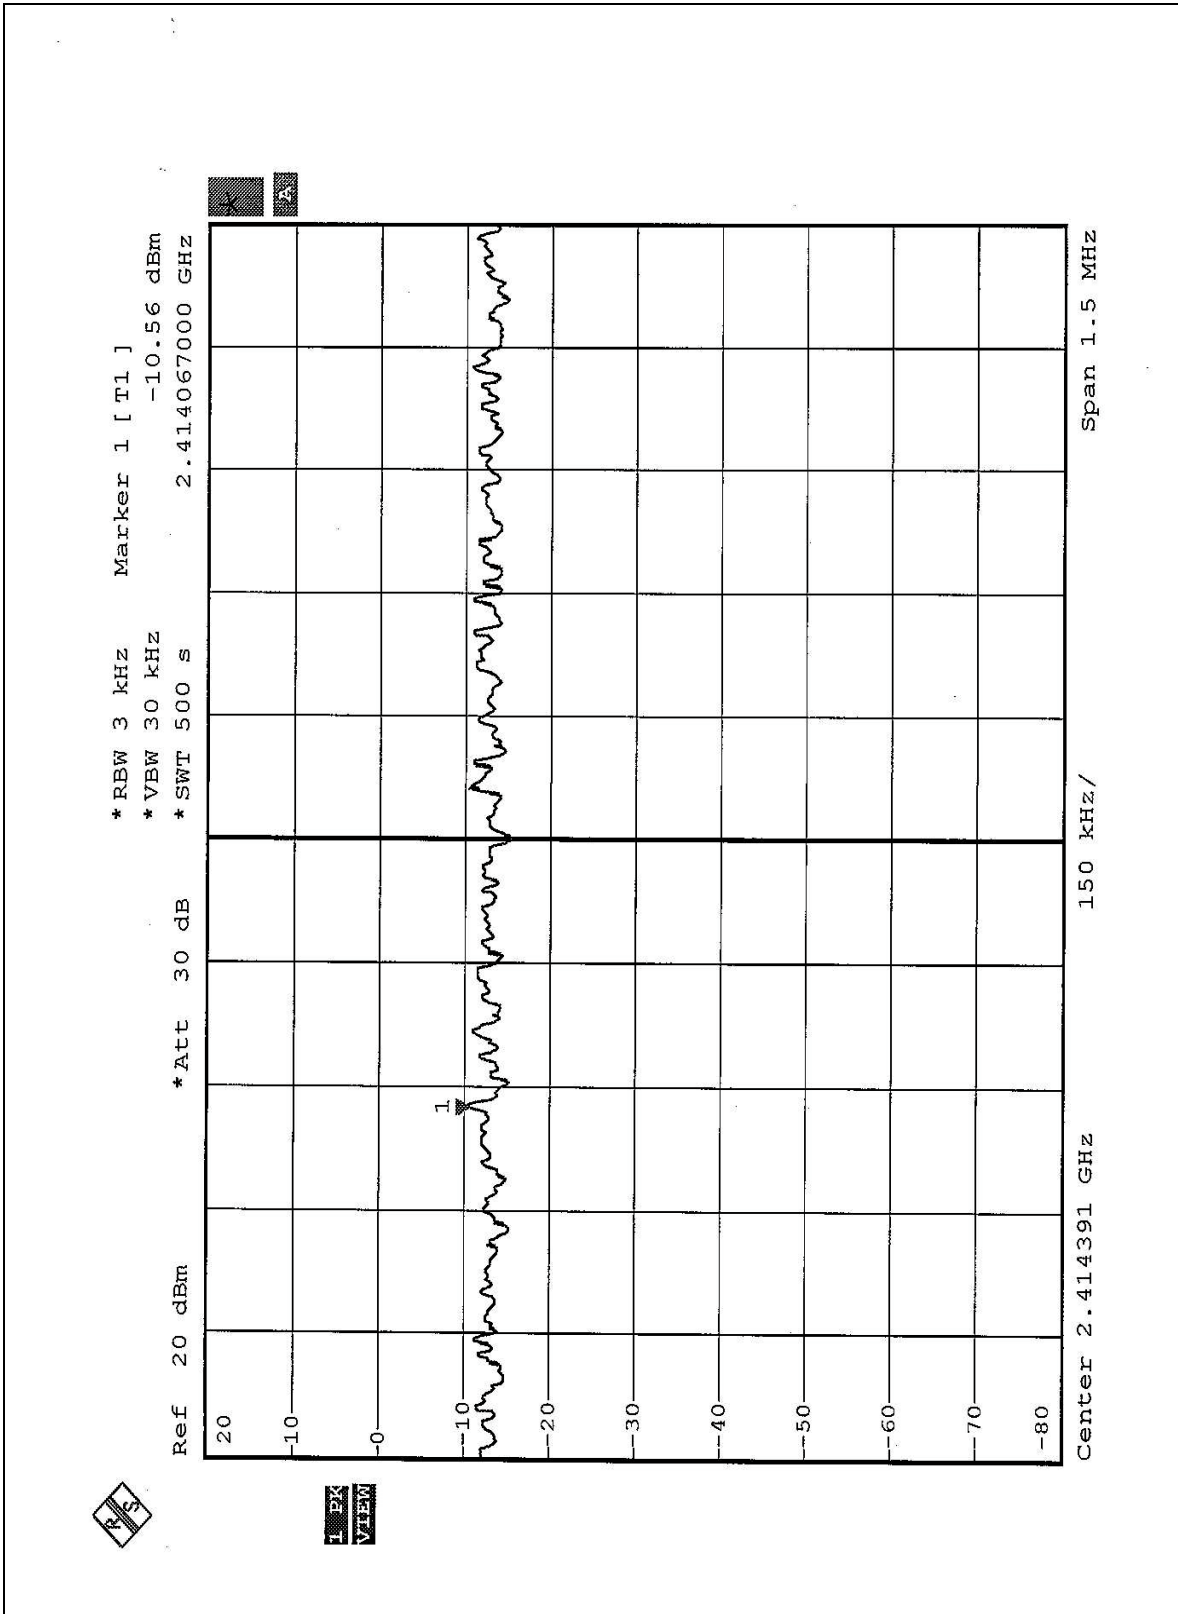






CH6

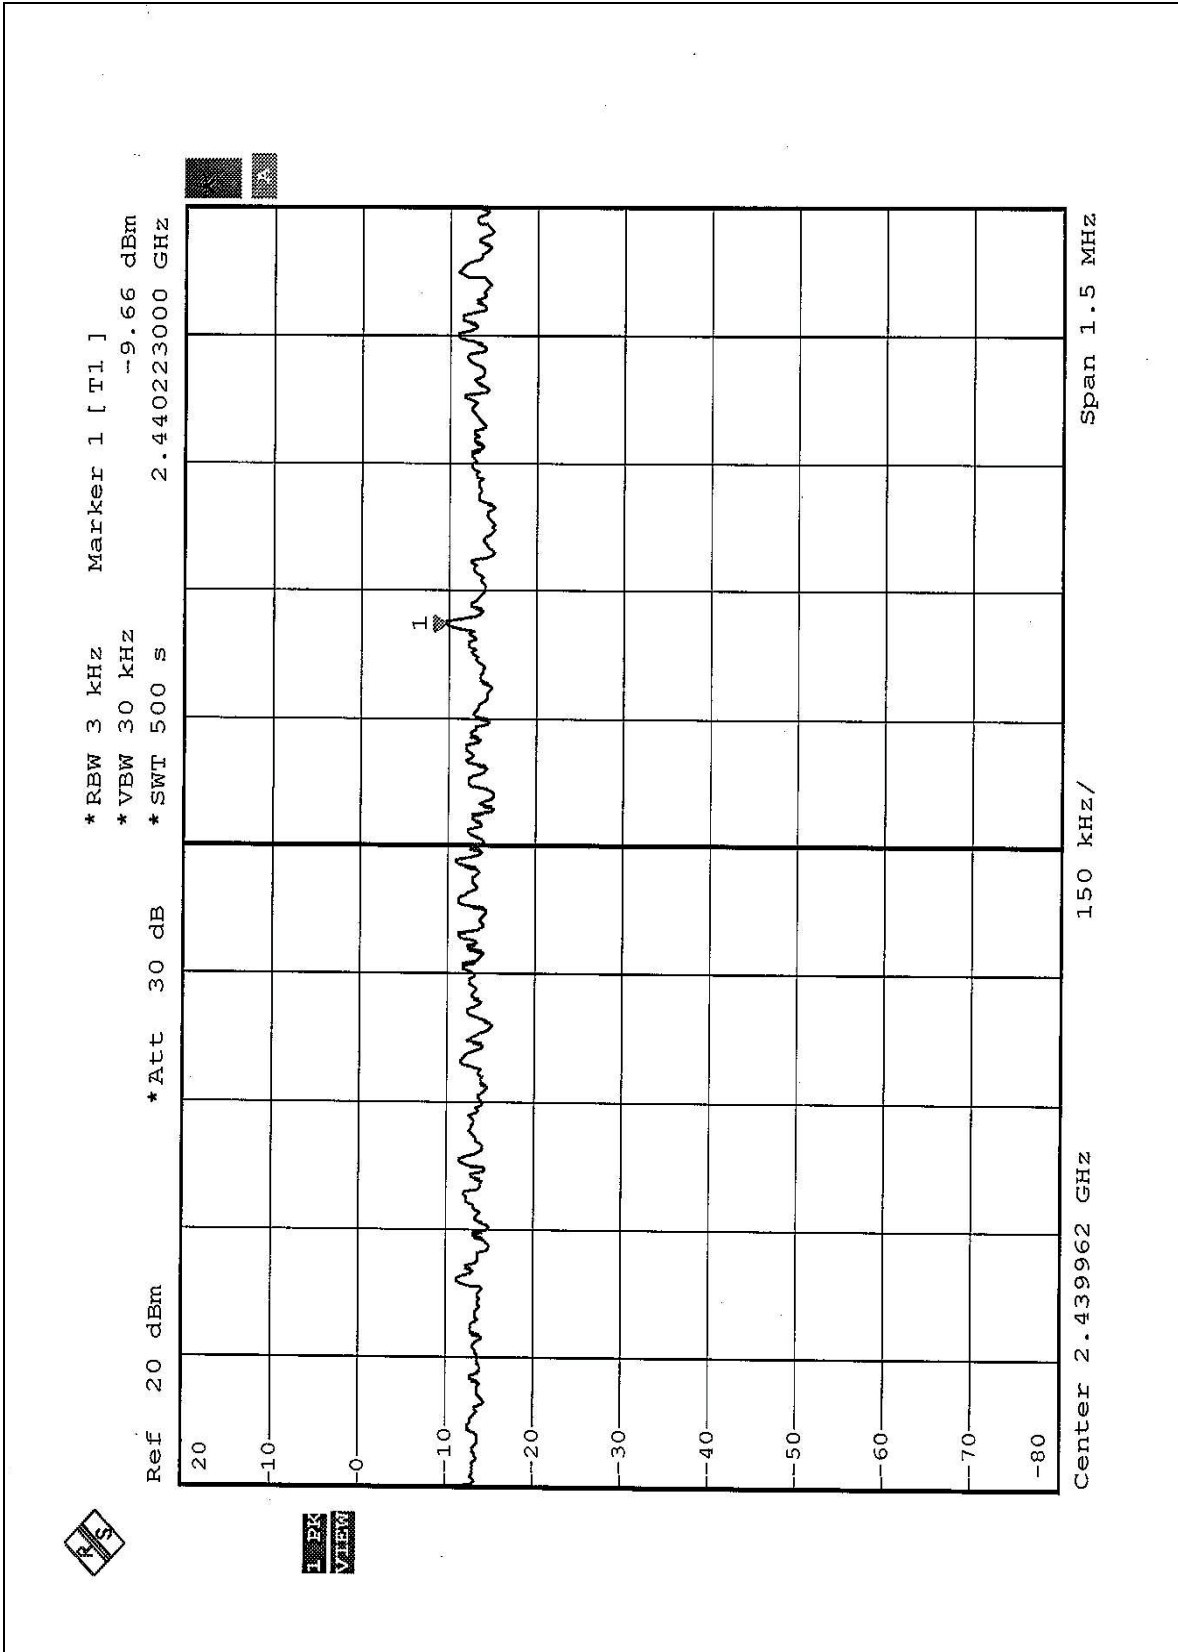



CH11

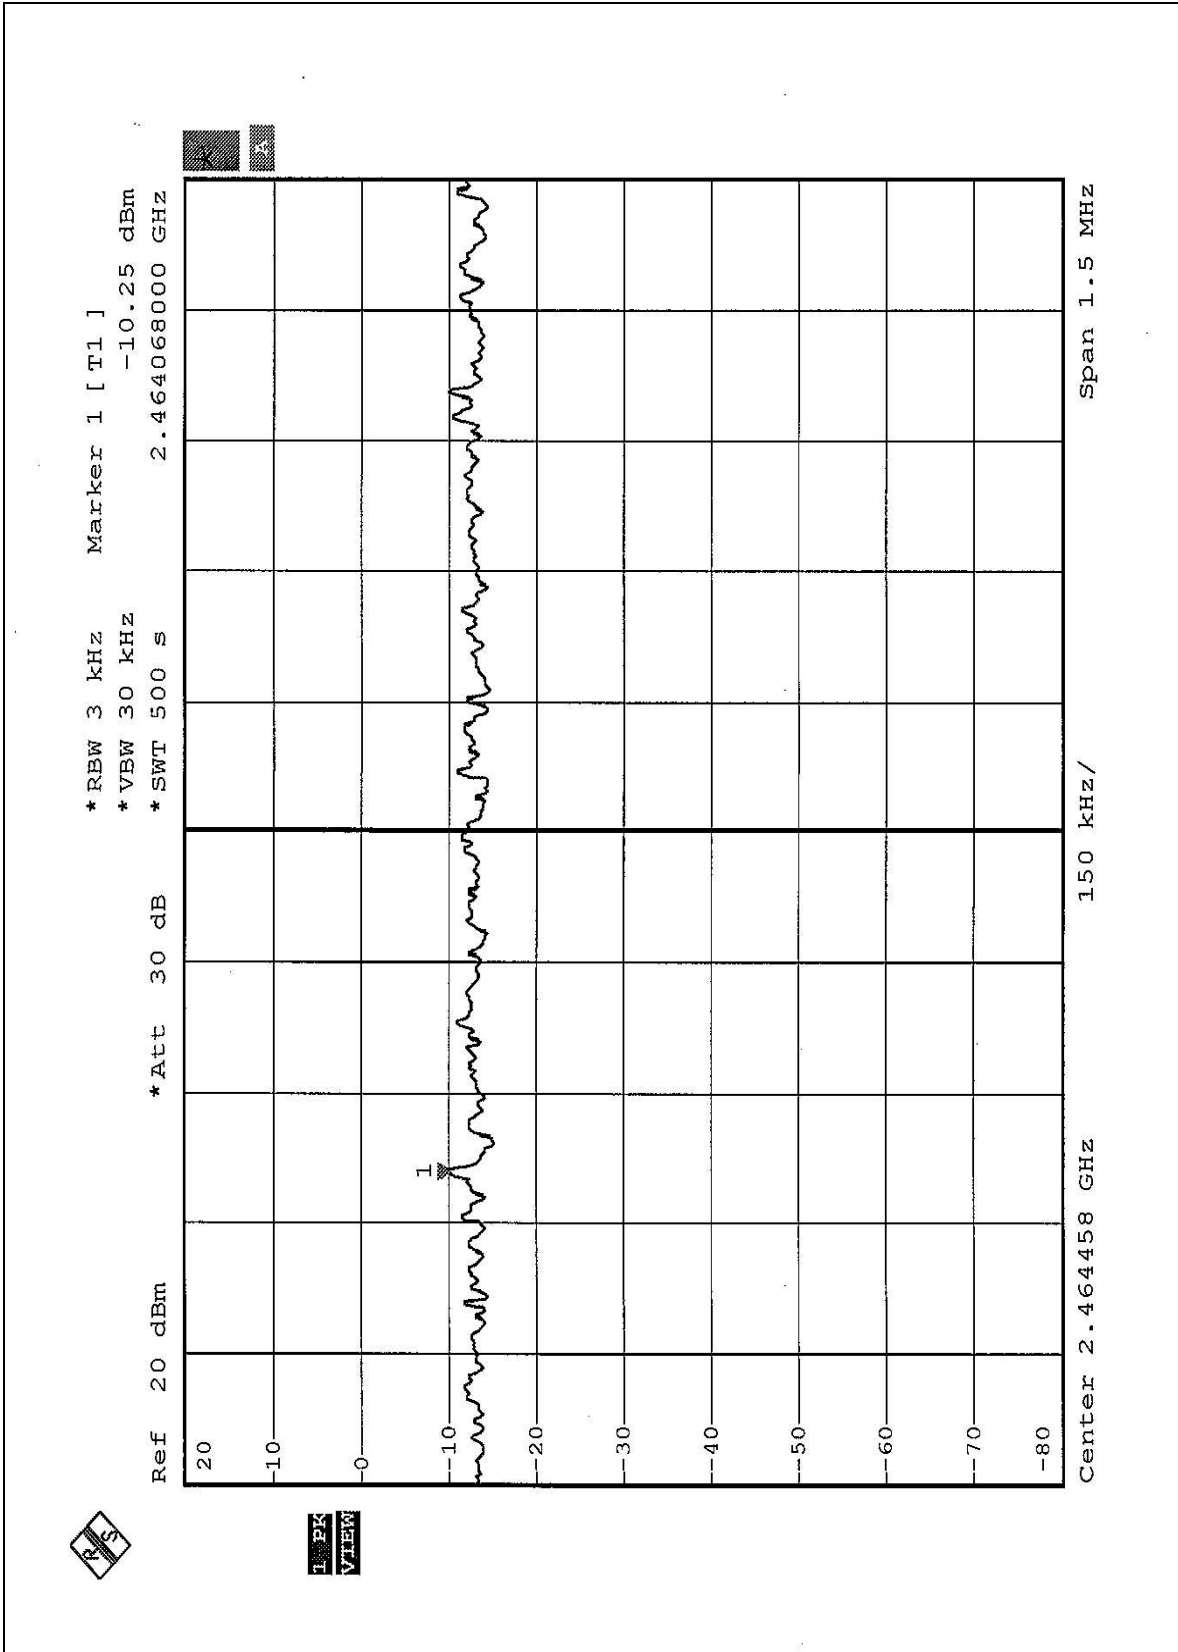




## 4.5.8 TEST RESULTS (B)

<b>EUT</b>	PCI Wireless LAN Card	<b>MODEL</b>	Gigaset PCI Card 54
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	24deg. C, 63%RH, 991 hPa
<b>TESTED BY:</b> Cody Chang			

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-12.87	8	PASS
6	2437	-12.29	8	PASS
11	2462	-12.84	8	PASS




CH1

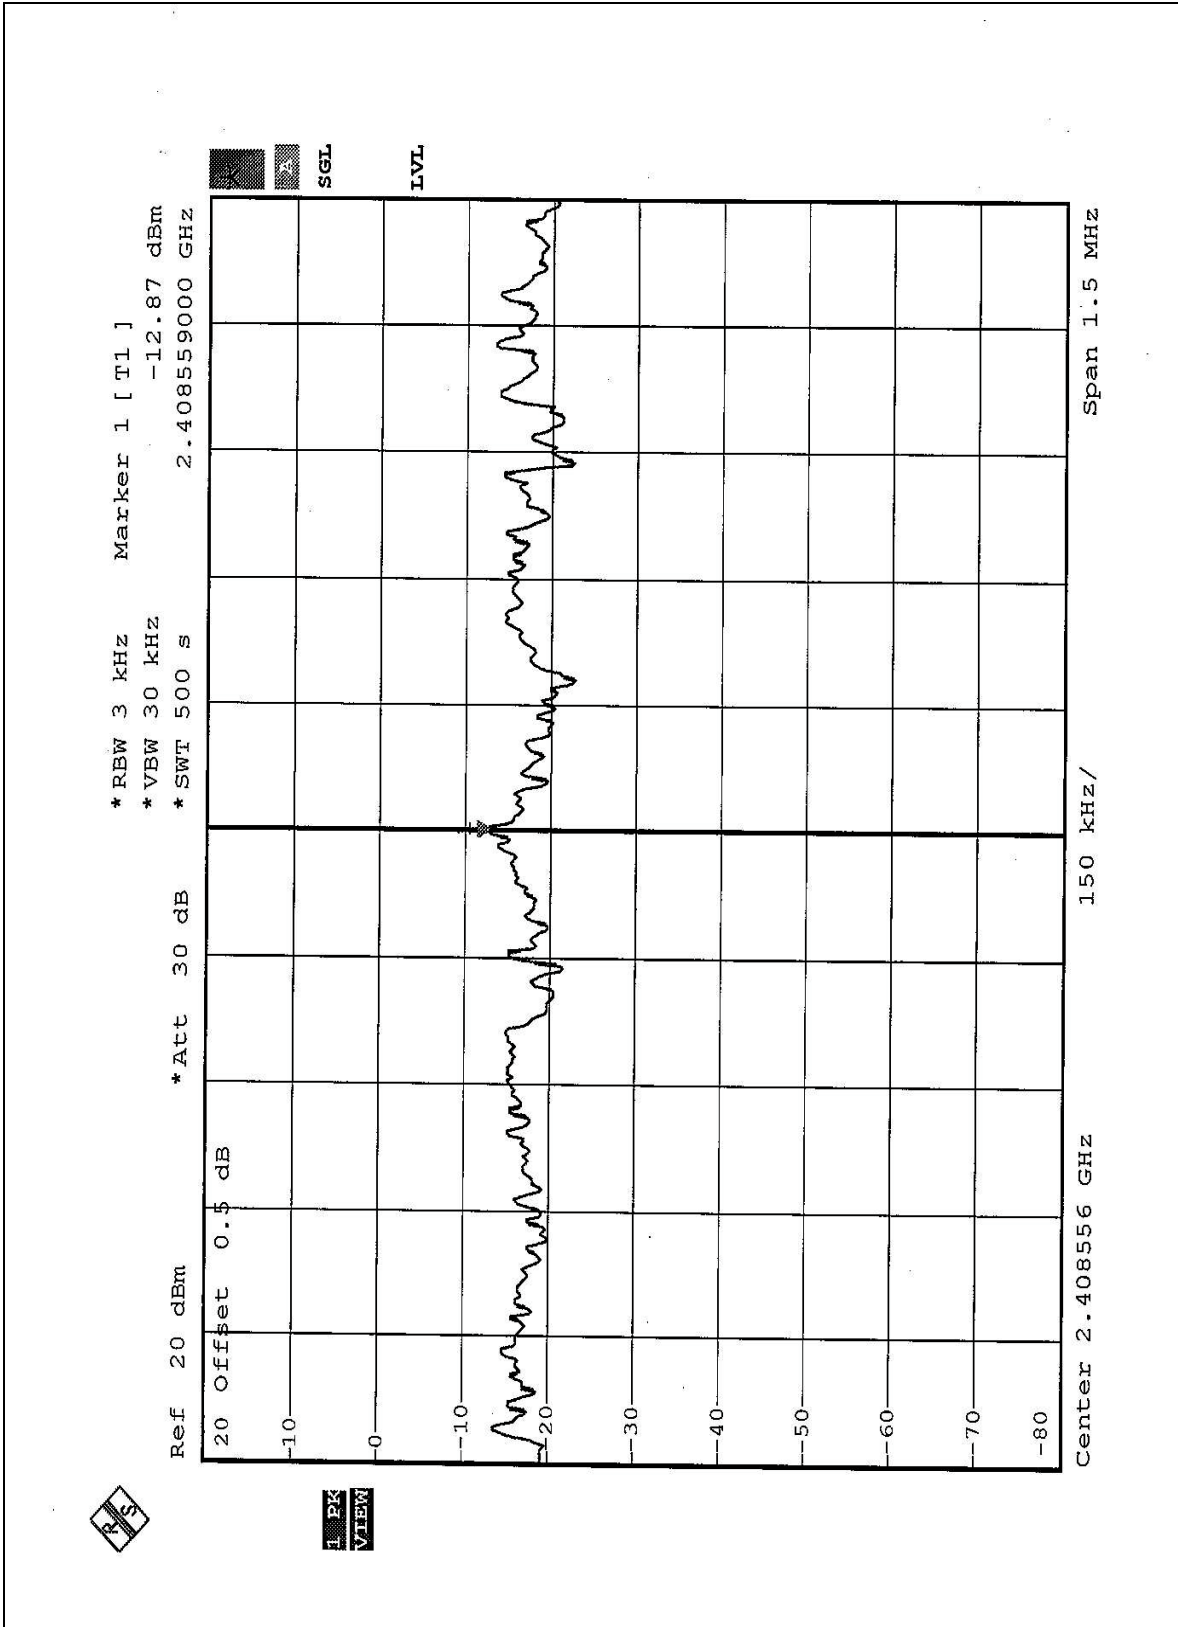




CH6

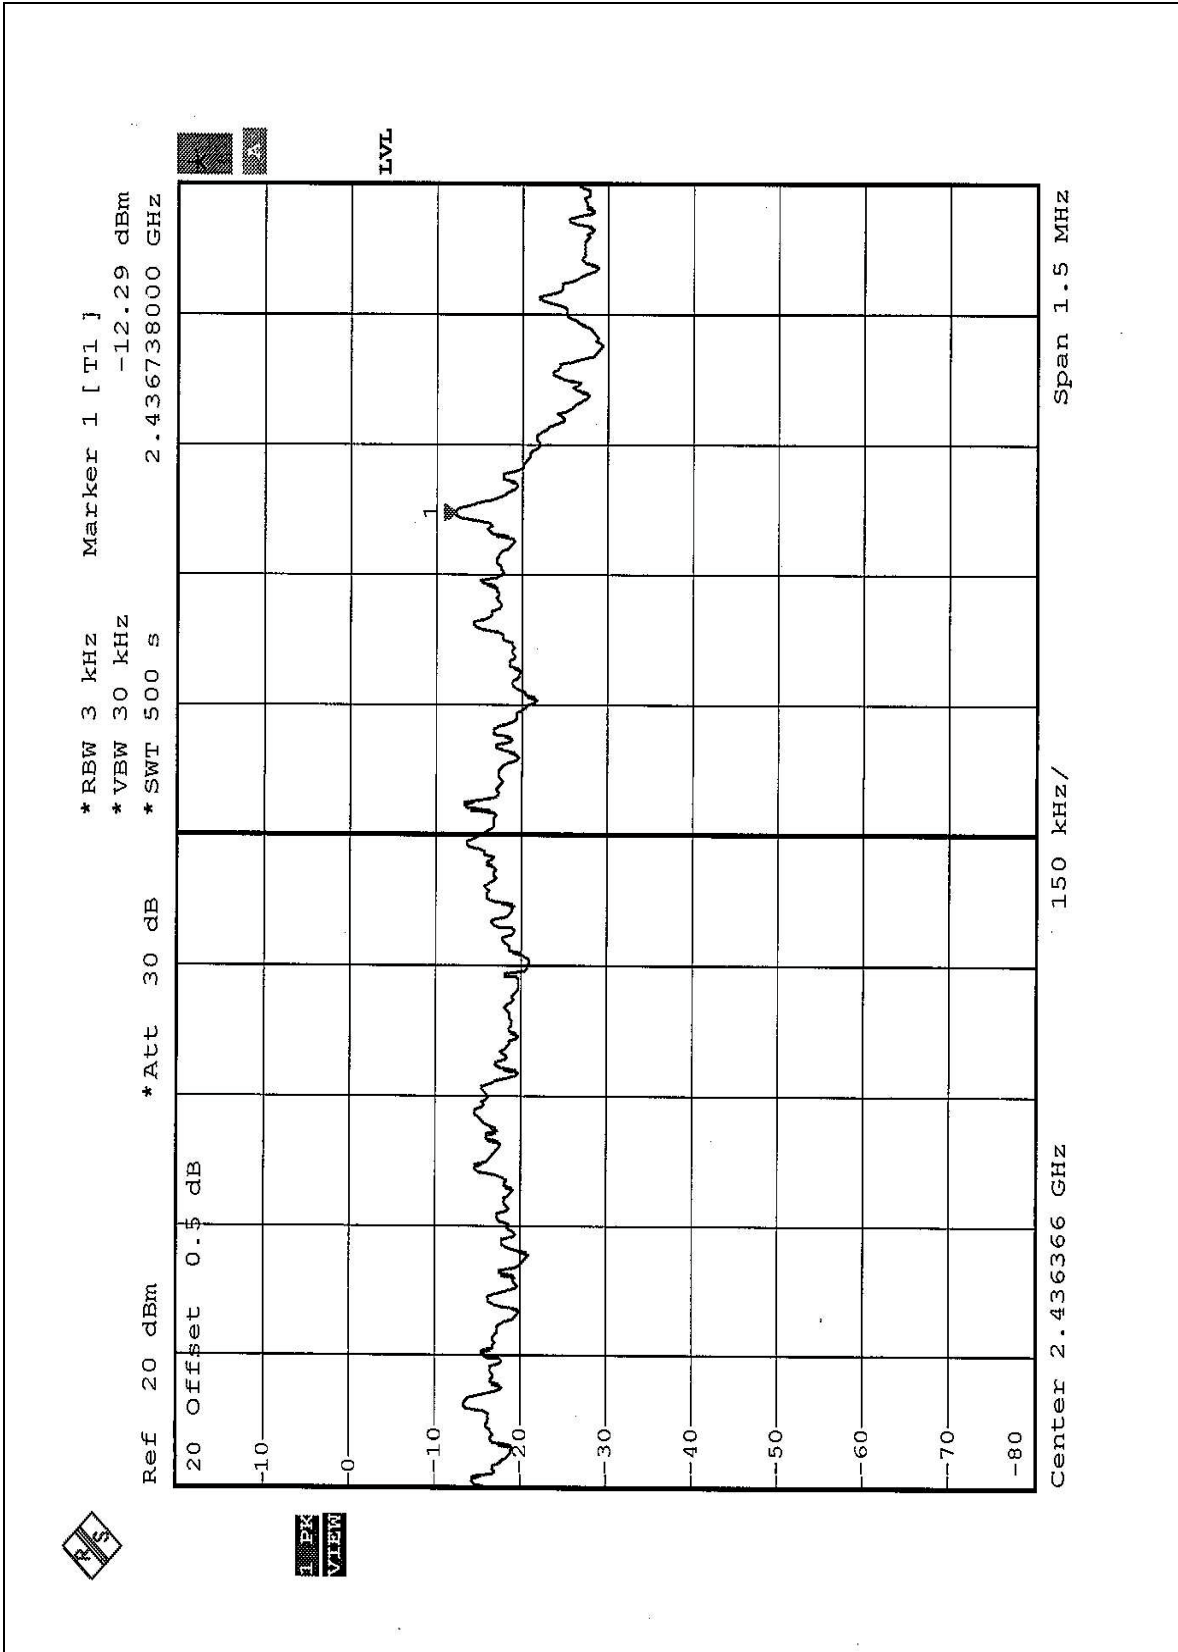



CH11

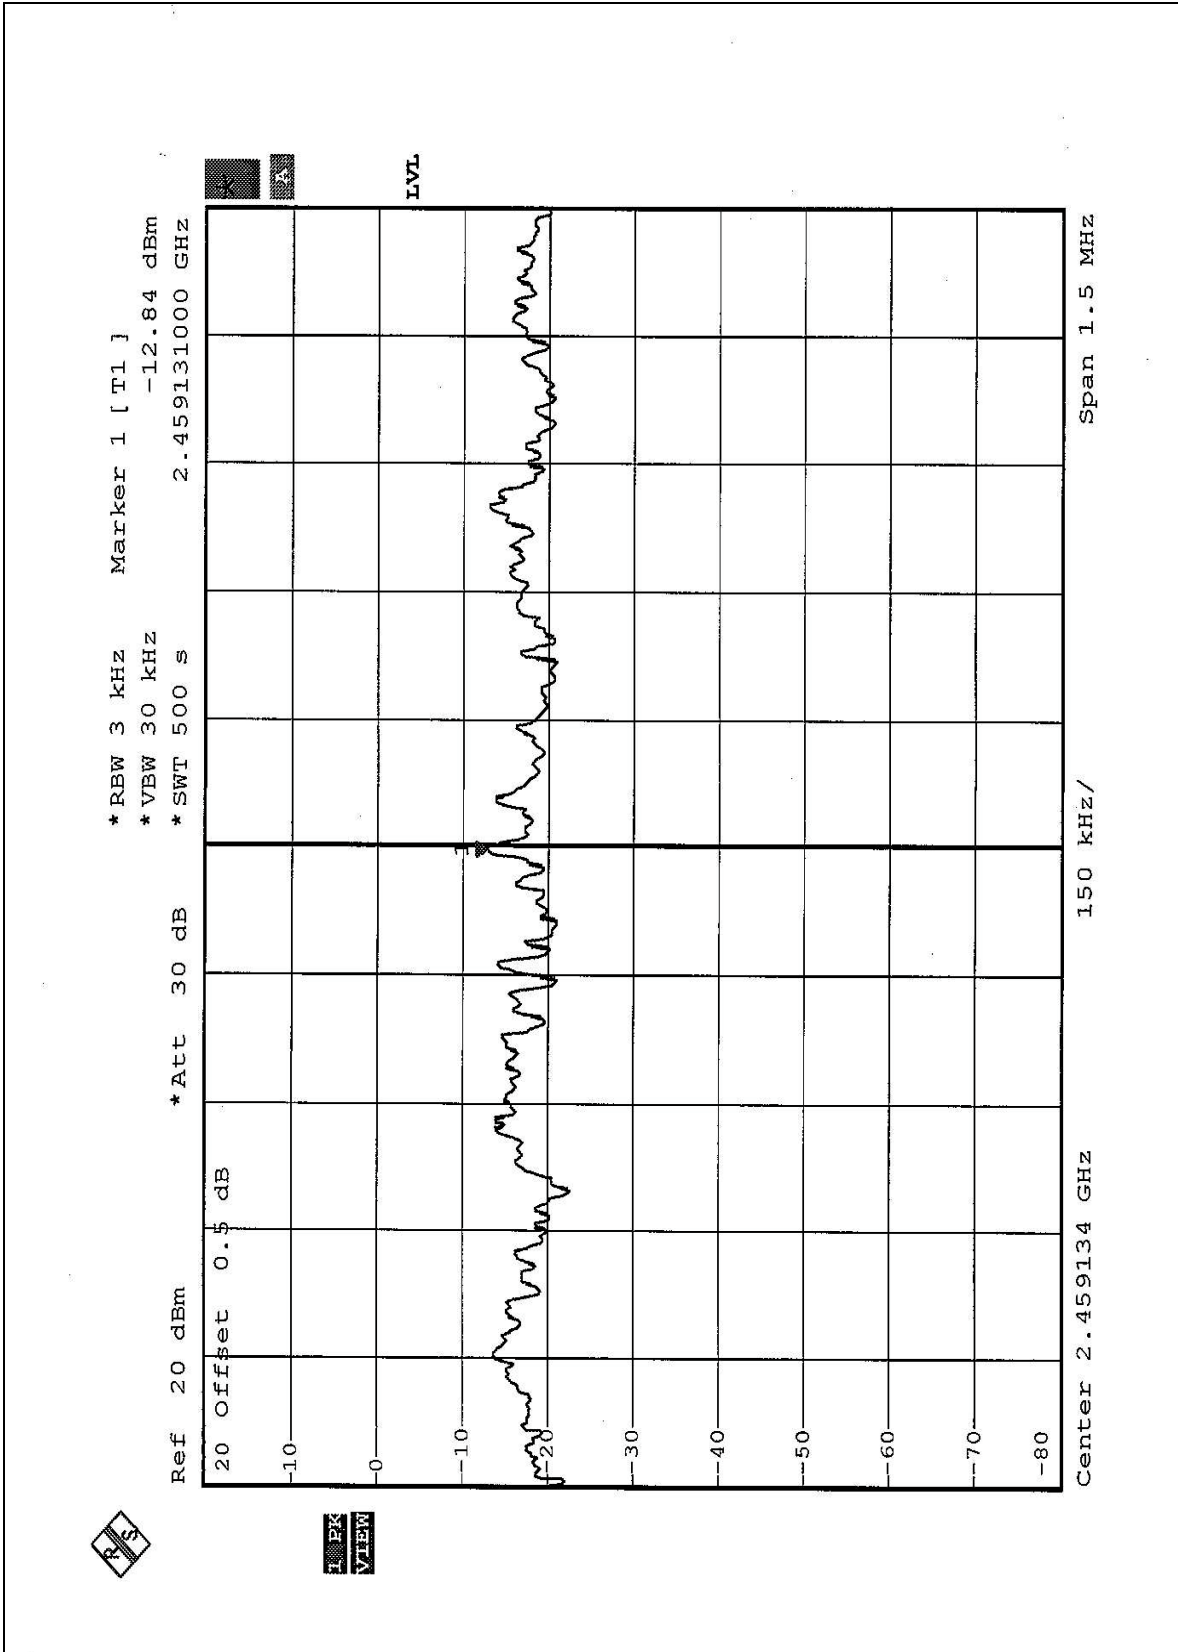



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS (A)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


#### **NOTE:**


The band edge emission plot on the following first page shows 50.76dB delta between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 (pages 25) is 97.6dBuV/m, so the maximum field strength in restrict band is  $97.6 - 50.76 = 46.84$ dBuV/m which is under 54 dBuV/m limit.


The band edge emission plot on the following third page shows 48.98dB delta between carrier maximum power and local maximum emission in restrict band (2.4835Hz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 (pages 27) is 95.4dBuV/m, so the maximum field strength in restrict band is  $95.4 - 48.98 = 46.42$ dBuV/m which is under 54 dBuV/m limit.



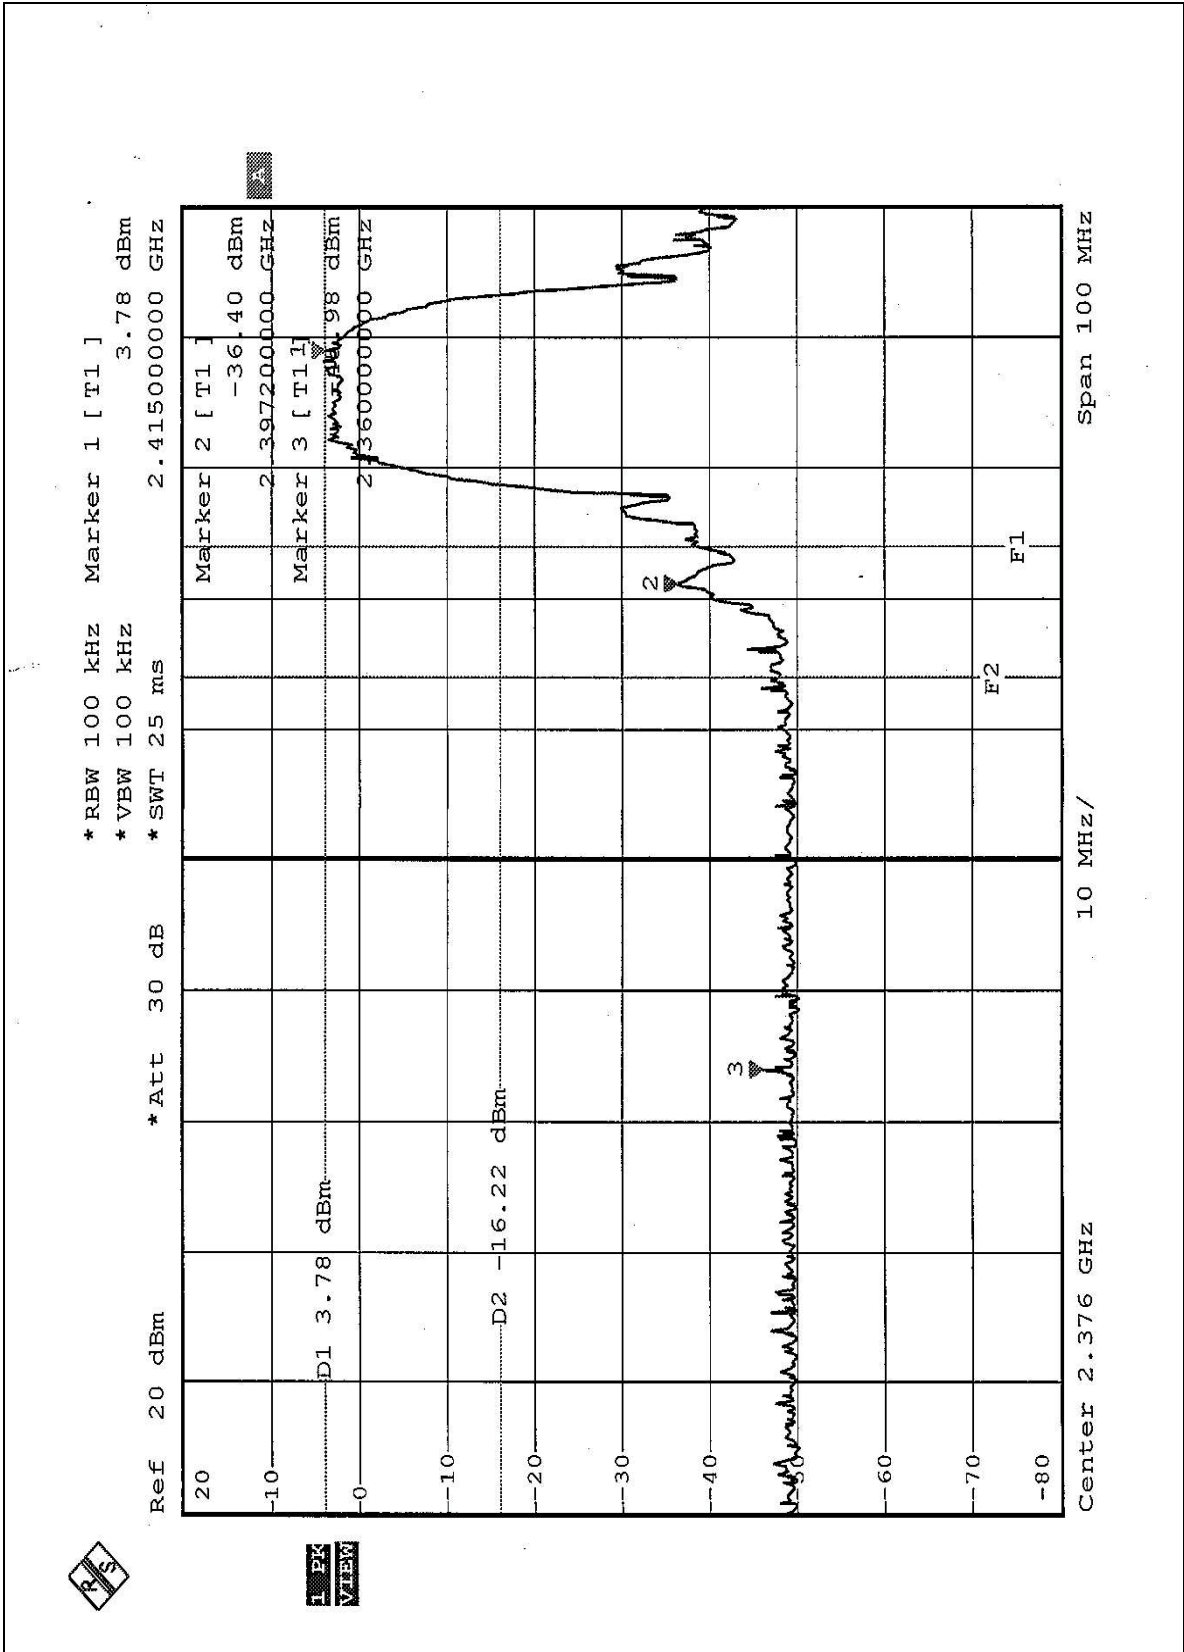

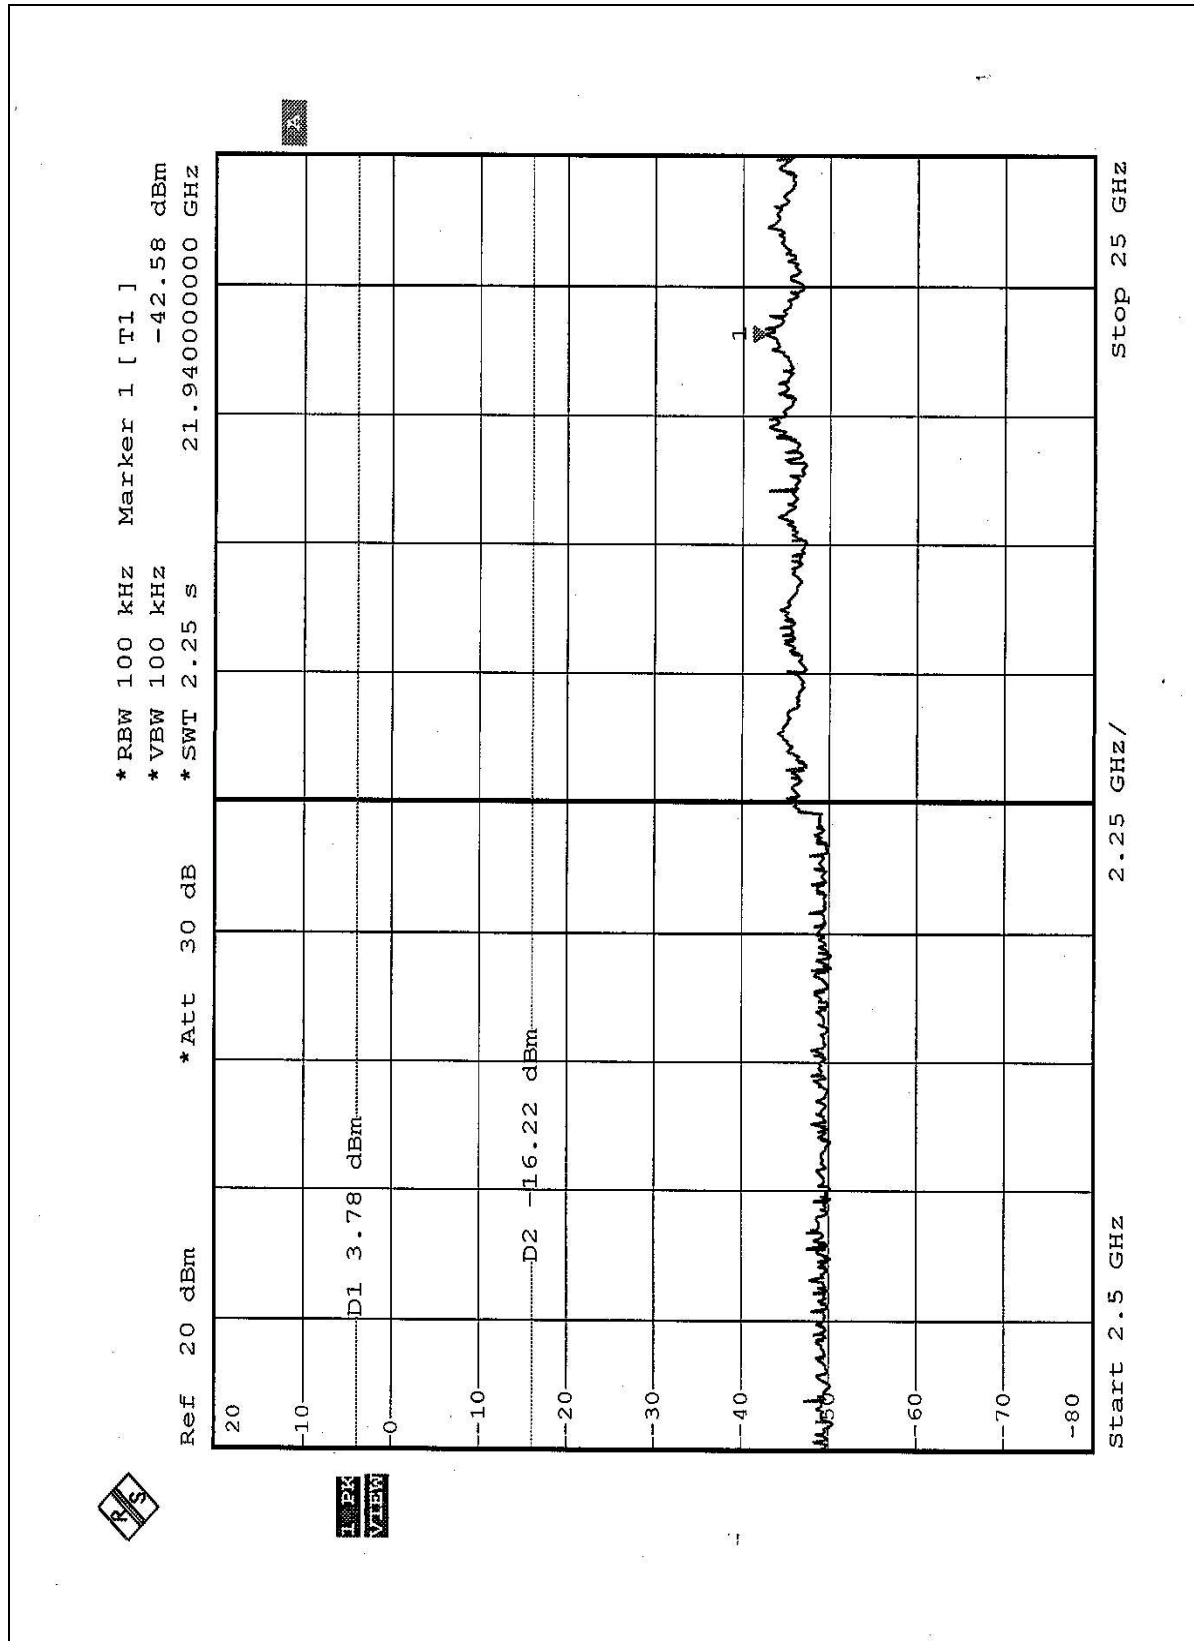

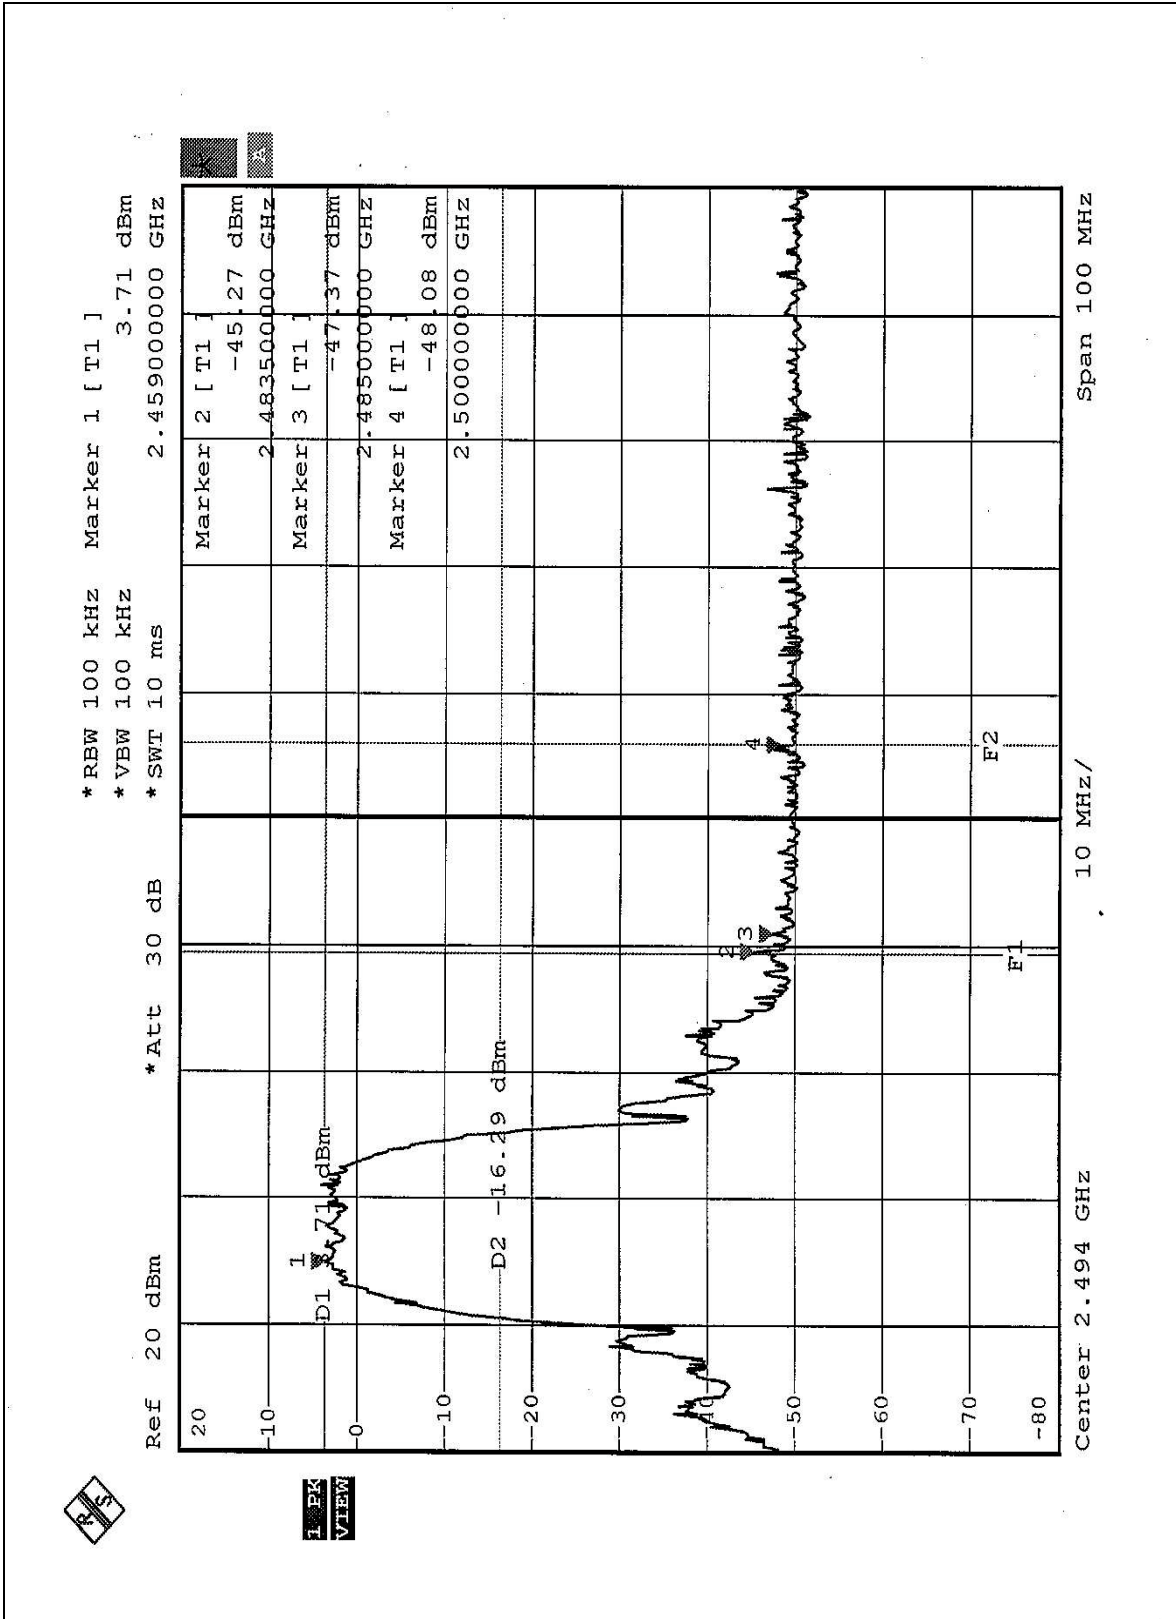

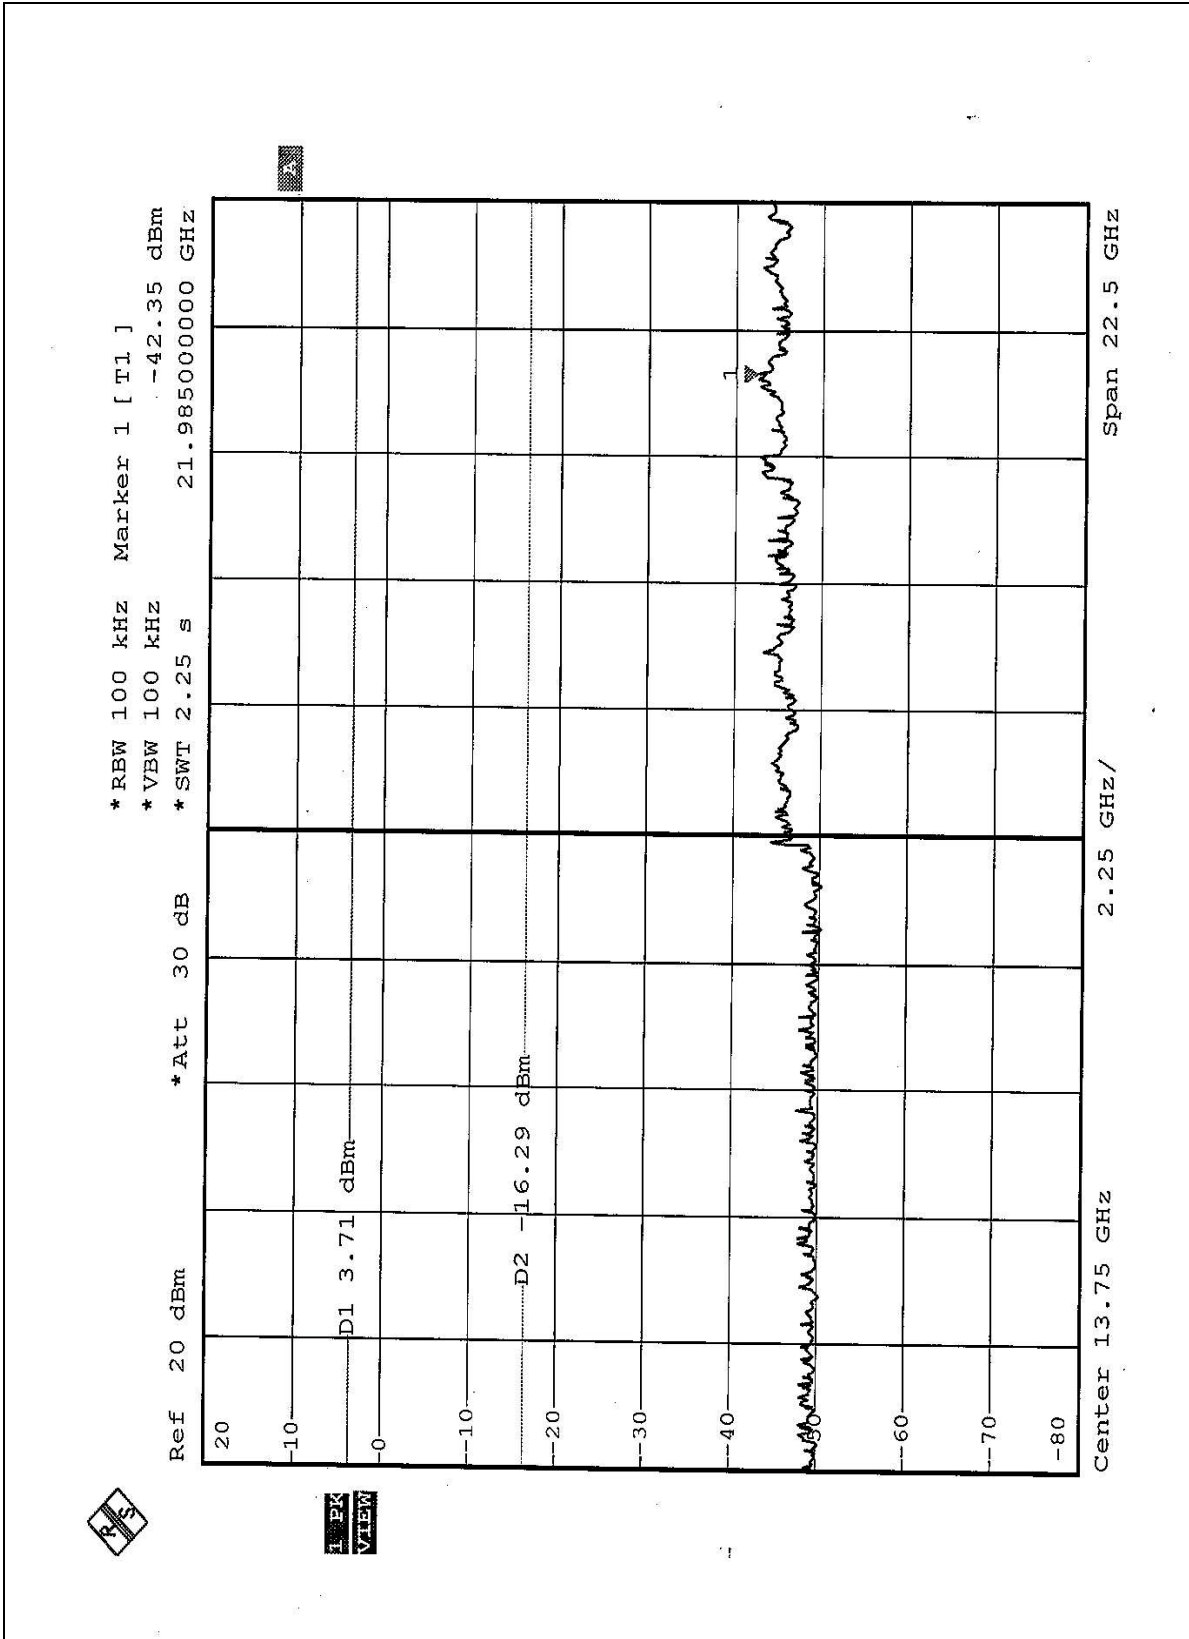




#### 4.6.7 TEST RESULTS (B)


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


**NOTE:**

The band edge emission plot on the following first page shows 45.70dB delta between carrier maximum power and local maximum emission in restrict band (2.3888GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 (pages 28) is 94.30dBuV/m, so the maximum field strength in restrict band is  $94.30 - 45.70 = 48.60$ uV/m which is under 54 dBuV/m limit.


The band edge emission plot on the following third page shows 46.01dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 (pages 30) is 94.50dBuV/m, so the maximum field strength in restrict band is  $94.50 - 46.01 = 48.49$ dBuV/m which is under 54 dBuV/m limit.

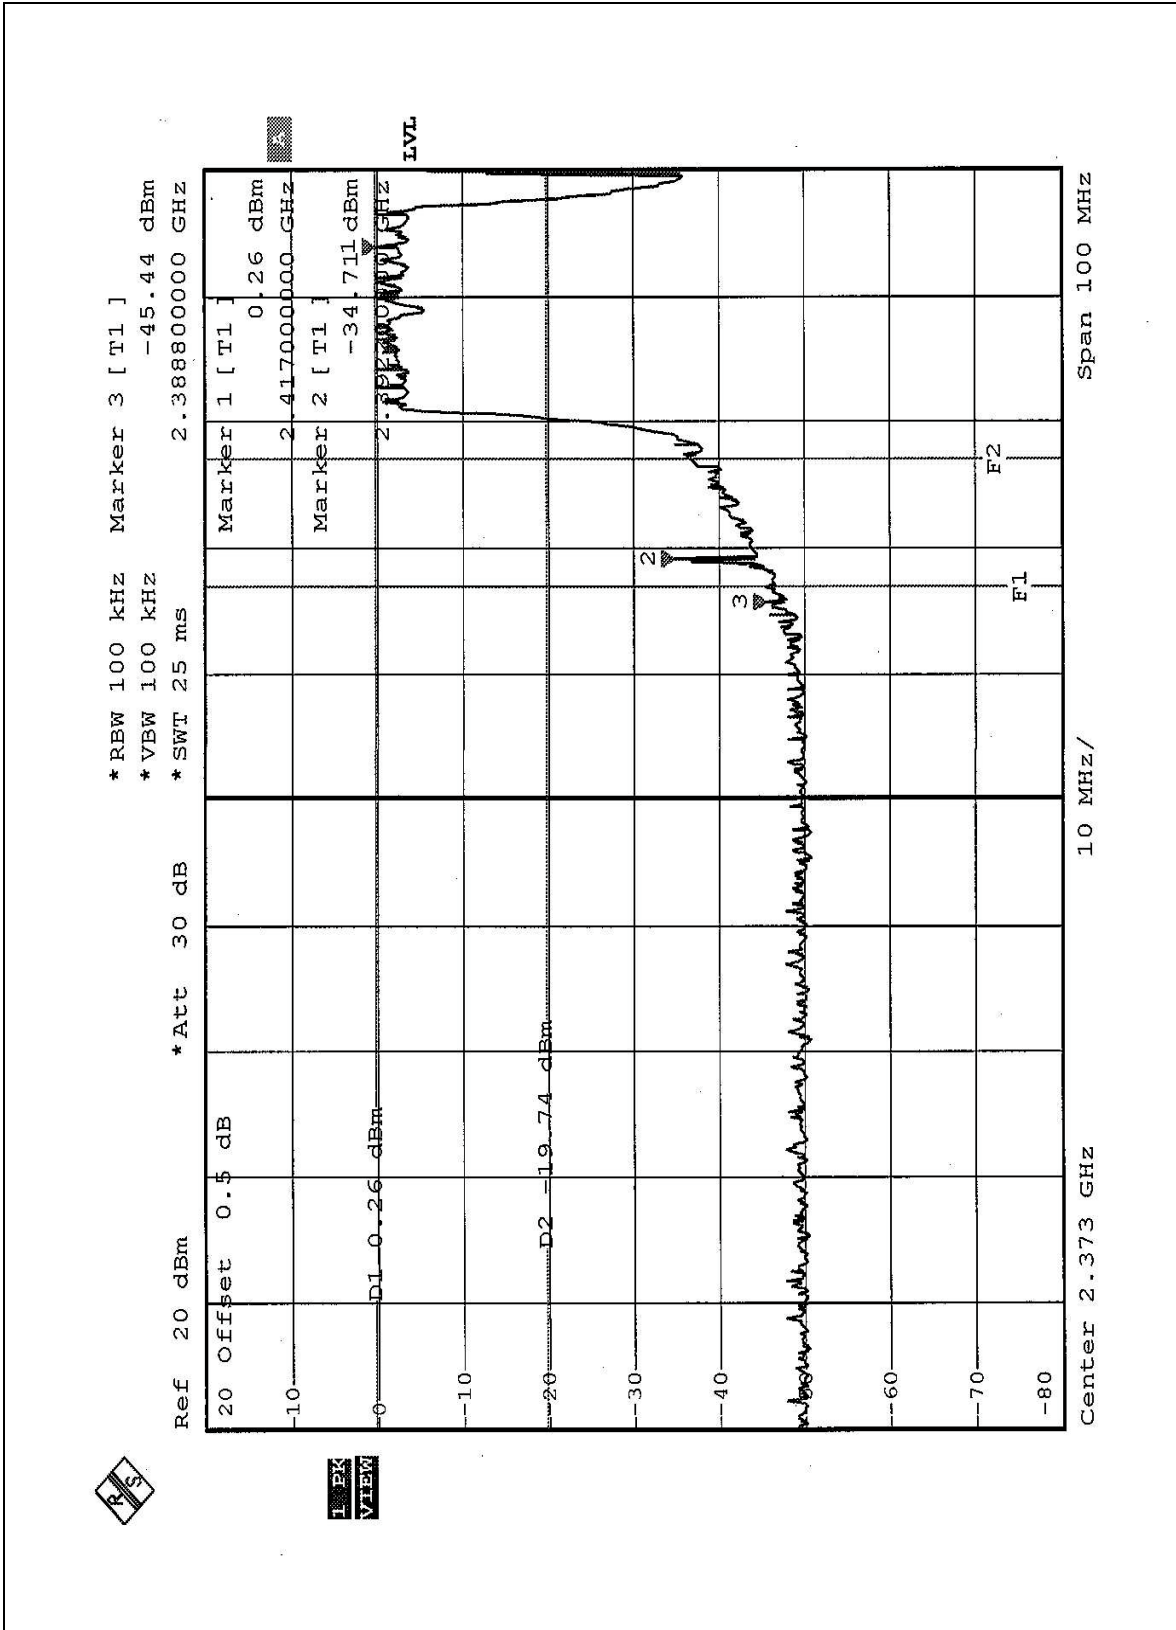

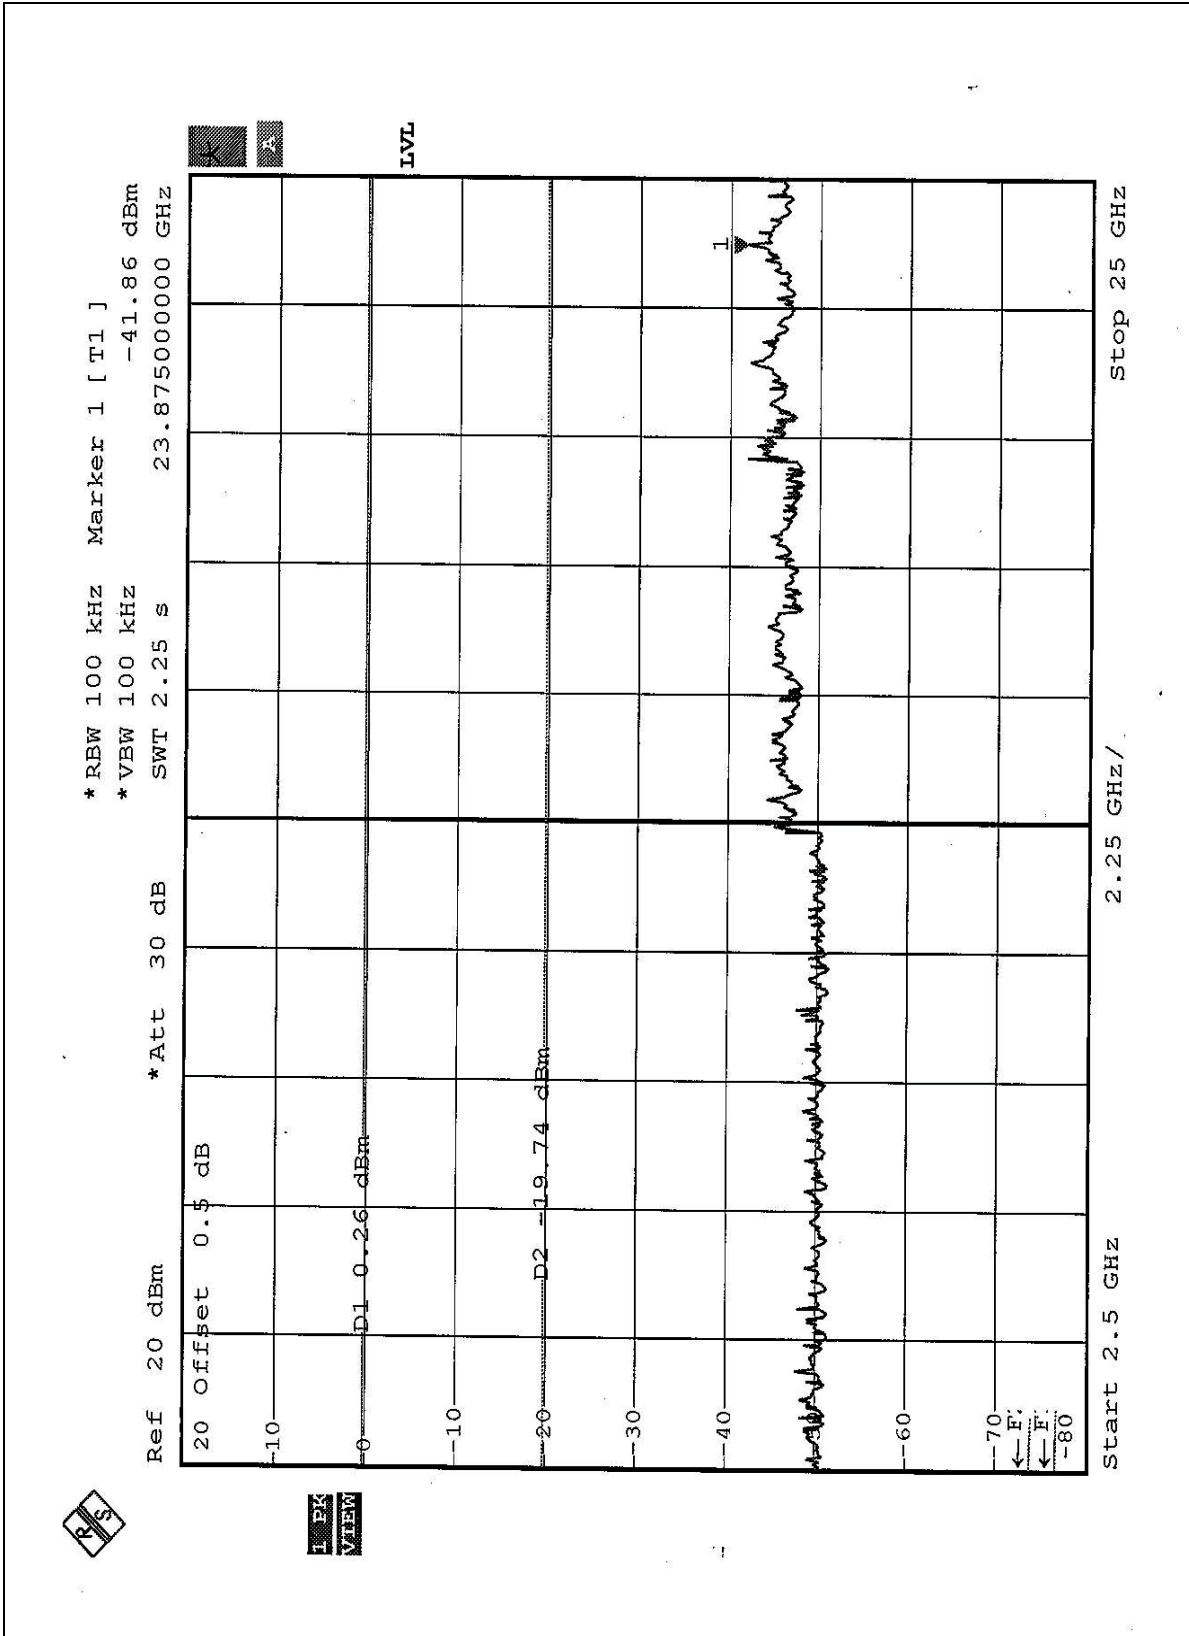

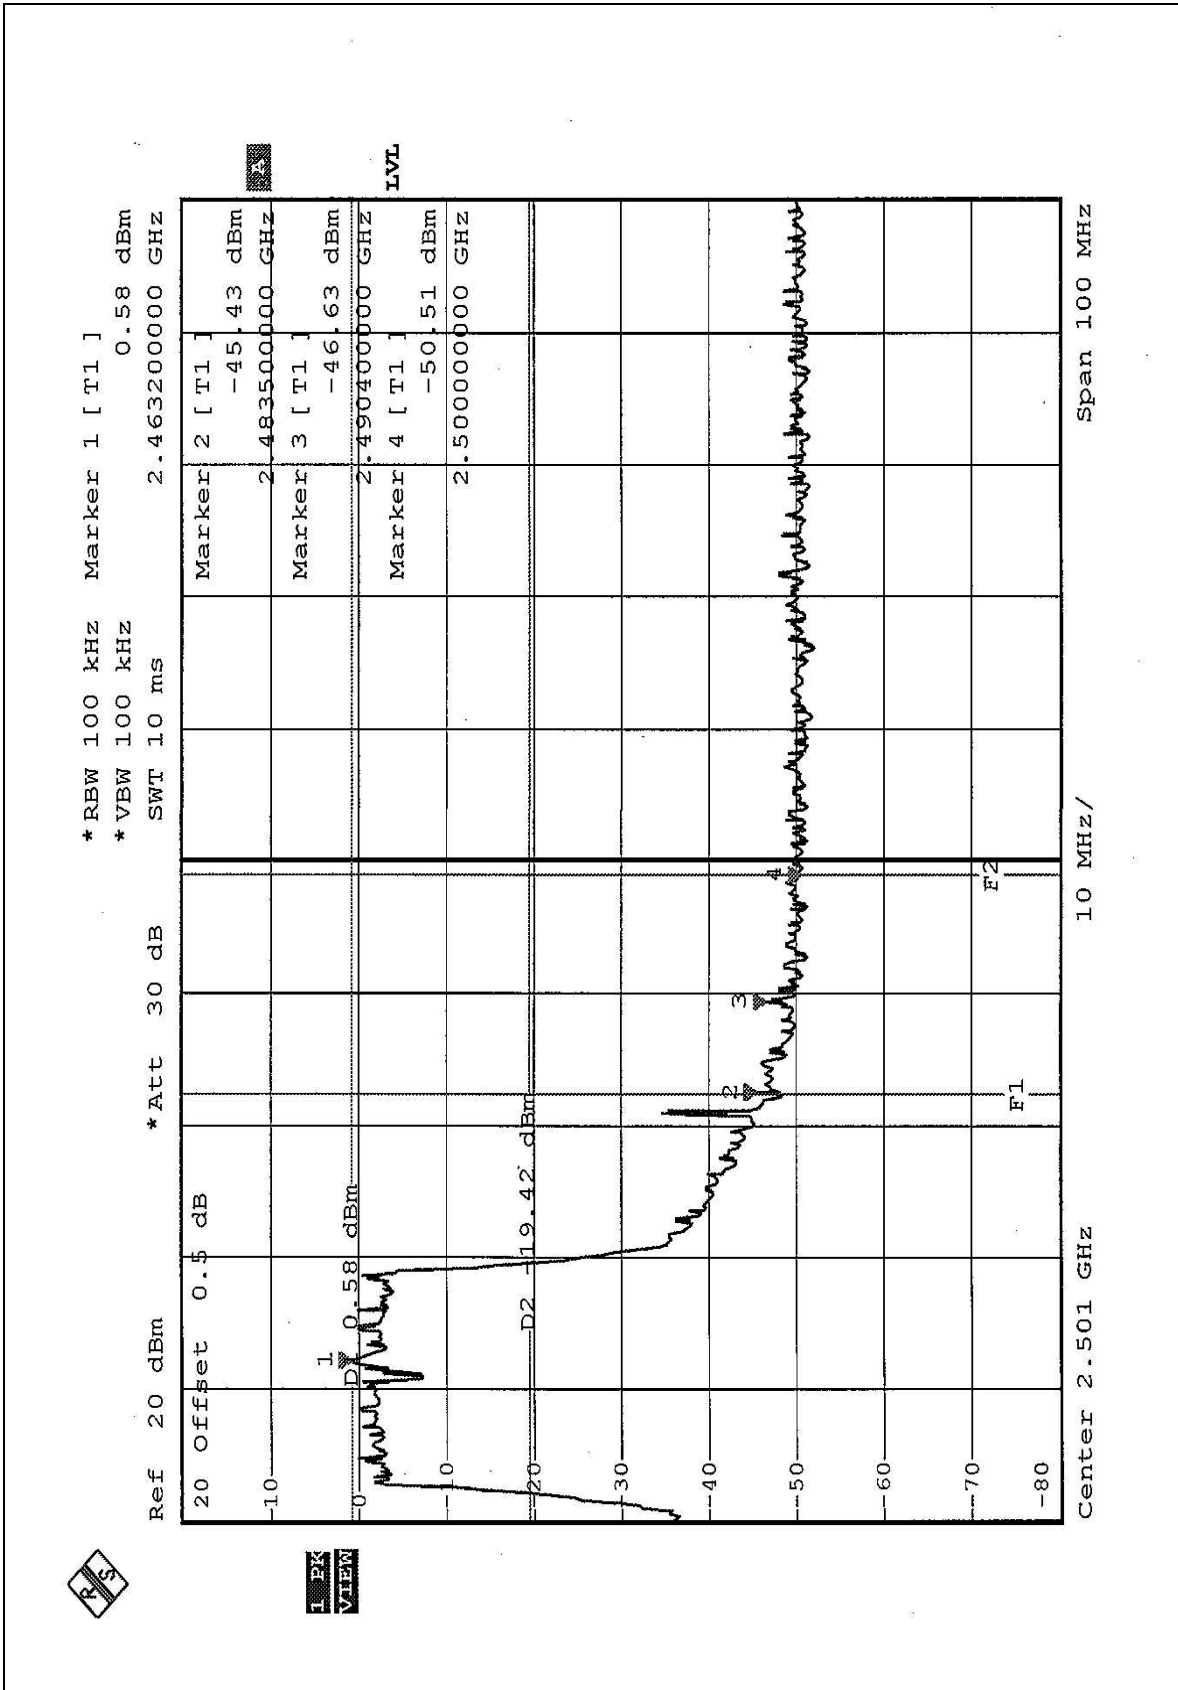



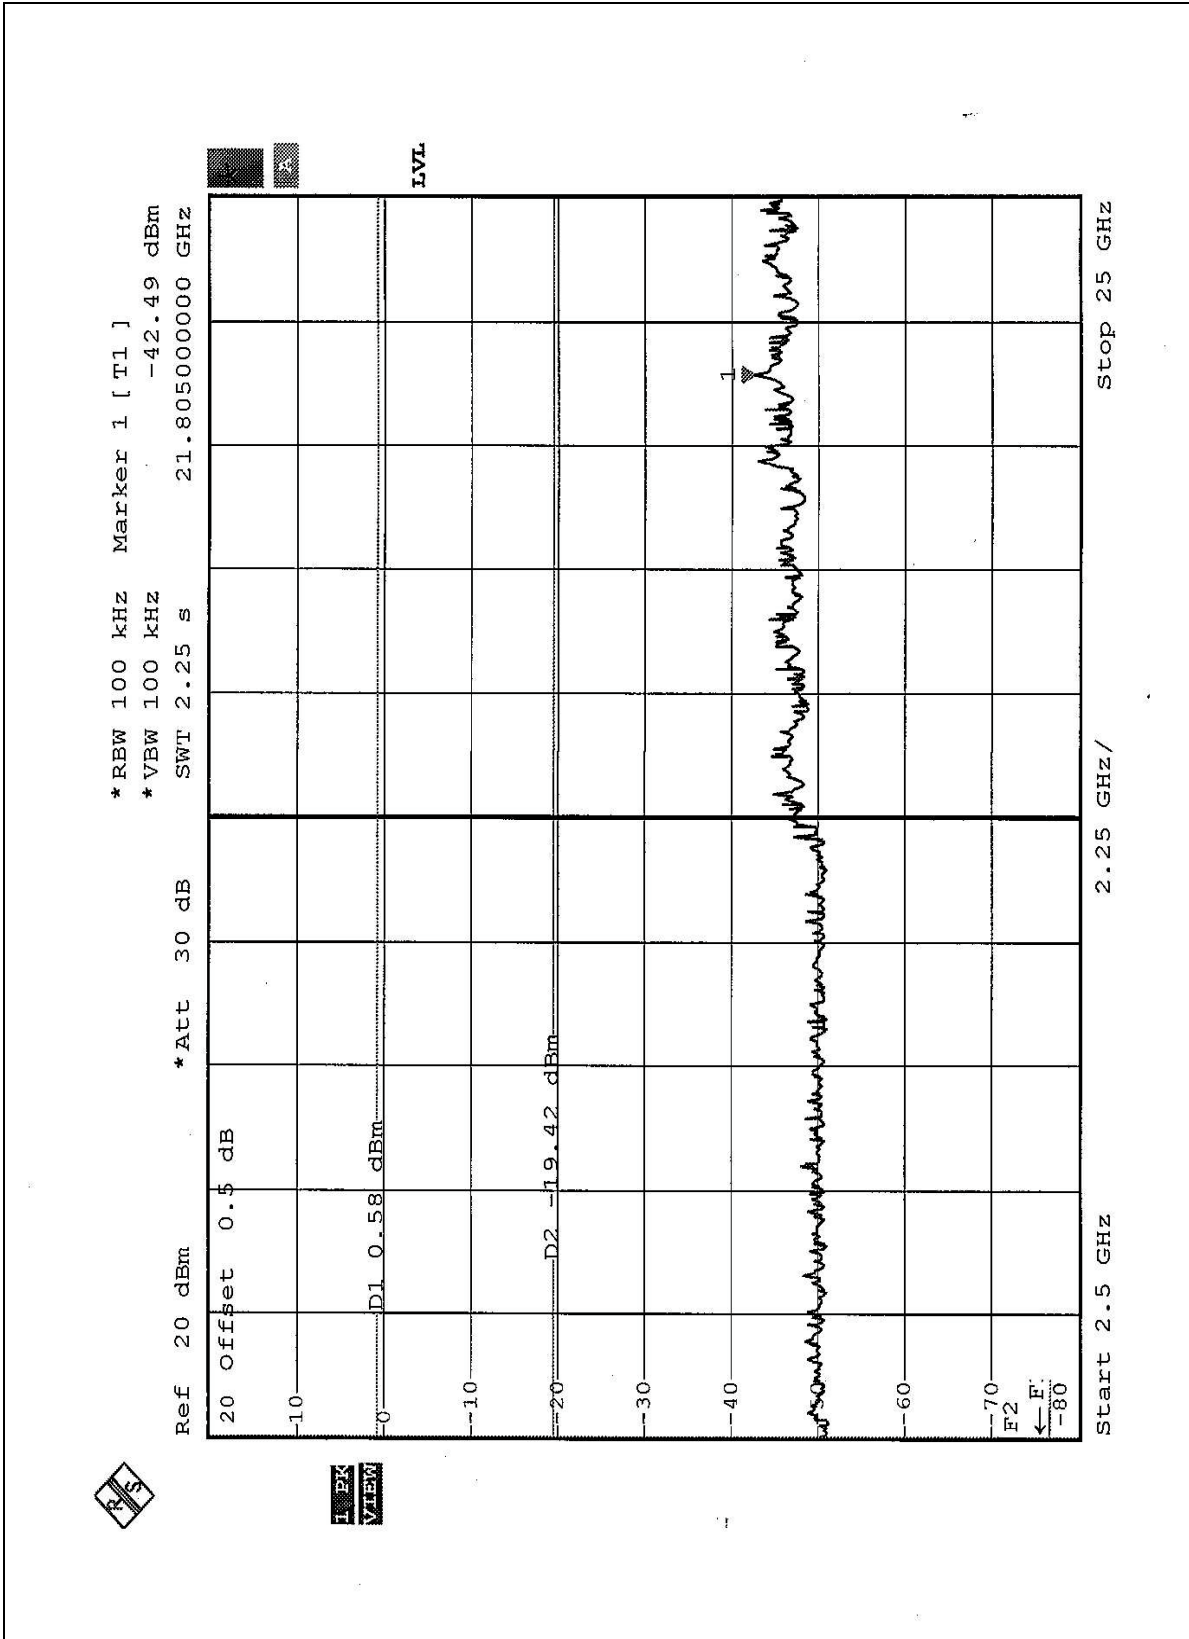



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The maximum Gain antenna used in this product is Dipole antenna with Reversed SMA antenna connector. And the maximum Gain of these antennas is 1.8dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.