

FCC Test Report

Report No.: RF170320E01

FCC ID: H8NTEG310

Test Model: TCG310

Series Model: TCG310XXXXXX (X=0-9,A-Z,a-z," -" ," ." or blank for marketing)

Received Date: Mar. 20, 2017

Test Date: Apr. 06 to 18, 2017

Issued Date: Apr. 27, 2017

Applicant: ASKEY COMPUTER CORP.

Address: 10F, NO.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY 23585,
TAIWAN, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Conditions	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup	36
4.2.6 EUT Operating Conditions	36
4.2.7 Test Results (Mode 1)	37
4.2.8 Test Results (Mode 2)	39
4.3 6dB Bandwidth Measurement	41
4.3.1 Limits of 6dB Bandwidth Measurement	41
4.3.2 Test Setup	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions	41
4.3.7 Test Result	42
4.4 Conducted Output Power Measurement	44
4.4.1 Limits of Conducted Output Power Measurement	44
4.4.2 Test Setup	44
4.4.3 Test Instruments	44
4.4.4 Test Procedures	44
4.4.5 Deviation from Test Standard	44
4.4.6 EUT Operating Conditions	44
4.4.7 Test Results	45
4.5 Power Spectral Density Measurement	47
4.5.1 Limits of Power Spectral Density Measurement	47
4.5.2 Test Setup	47
4.5.3 Test Instruments	47
4.5.4 Test Procedure	47
4.5.5 Deviation from Test Standard	47

4.5.6 EUT Operating Condition	47
4.5.7 Test Results	48
4.6 Conducted Out of Band Emission Measurement	51
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
5 Pictures of Test Arrangements.....	62
Appendix – Information on the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RF170320E01	Original release.	Apr. 27, 2017

1 Certificate of Conformity

Product: Access Point

Brand: ASKEY

Test Model: TCG310

Series Model: TCG310XXXXXX (X=0~9,A-Z,a-z,"-","."or blank for marketing)

Sample Status: ENGINEERING SAMPLE

Applicant: ASKEY COMPUTER CORP.

Test Date: Apr. 06 to 18, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Apr. 27, 2017
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Apr. 27, 2017
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.09dB at 0.36875MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 7386.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.78 dB
	6GHz ~ 18GHz	4.52 dB
	18GHz ~ 40GHz	5.08 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Access Point
Brand	ASKEY
Test Model	TCG310
Series Model	TCG310XXXXXX (X=0~9,A-Z,a-z," -" ," ." or blank for marketing)
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS,OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 208.93mW Beamforming Mode: 176.796mW 5.18 ~ 5.24GHz: CDD Mode: 545.676mW Beamforming Mode: 375.409mW 5.745 ~ 5.825GHz: CDD Mode: 550.995mW Beamforming Mode: 350.489mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT has below model names, which are identical to each other in all aspects except for the following:

Brand	Model No.	Different
ASKEY	TCG310	For Marketing request
	TCG310XXXXXX (X=0~9,A-Z,a-z," -" ," ." or blank for marketing)	

From the above models, model: **TCG310** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No	Brand Name	Model No.	Spec.
1	LEI	MU42-3120350-A1	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 3.5A DC output cable: 1.5m, unshielded
2	Sunny	SYS1570-4212-W2	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 3.5A DC output cable: 1.5m, unshielded

Note: From the above adapters, the worst radiated test was found in **Adapter 1**. Therefore only the test data of the modes were recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	PCB Chain No.	Ant. Gain(dBi)	Frequency range (GHz)	Antenna Type	Connecter Type	Cable Length (mm)
1	5G-chain 0 2.4G-chain 2	3.52	2.4~2.4835	PCB	none	-
		3.11	5.15~5.35			
		3.24	5.47~5.725			
		3.56	5.725~5.85			
2	5G-chain 1	3.89	5.15~5.35	PCB	i-pex(MHF)	300
		4.16	5.47~5.725			
		4.04	5.725~5.85			
3	5G-chain 2 2.4G-chain 1	2.8	2.4~2.4835	PCB	i-pex(MHF)	75
		5.44	5.15~5.35			
		5.8	5.47~5.725			
		5.71	5.725~5.85			
4	5G-chain 3 2.4G-chain 0	3.26	2.4~2.4835	PCB	i-pex(MHF)	90
		3.9	5.15~5.35			
		3.92	5.47~5.725			
		4.49	5.725~5.85			

5. The EUT incorporates a MIMO function.

For 2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX Fixed Chain 0	1RX Fixed Chain 0
802.11g	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
	MCS 0~7	4TX	4RX
802.11n (HT40)	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
	MCS 0~8, Nss=1	4TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~8, Nss=4	4TX	4RX
	MCS 0~9, Nss=1	4TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
	MCS 0~9, Nss=1	4TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	√	√	√	√	With Adapter 1
2	-	-	√	-	With Adapter 2

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE $<$ 1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	22deg. C, 64%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	23deg. C, 66%RH	120Vac, 60Hz	Terry Huang
PLC	22deg. C, 62%RH	120Vac, 60Hz	Bear Lee
APCM	23deg. C, 66%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.595/8.636 = 0.995$

802.11g: Duty cycle = $1.427/1.475 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.14$

802.11n (HT20): Duty cycle = $1.334/1.366 = 0.977$, Duty factor = $10 * \log(1/0.977) = 0.10$

802.11n (HT40): Duty cycle = $0.663/0.693 = 0.957$, Duty factor = $10 * \log(1/0.957) = 0.19$

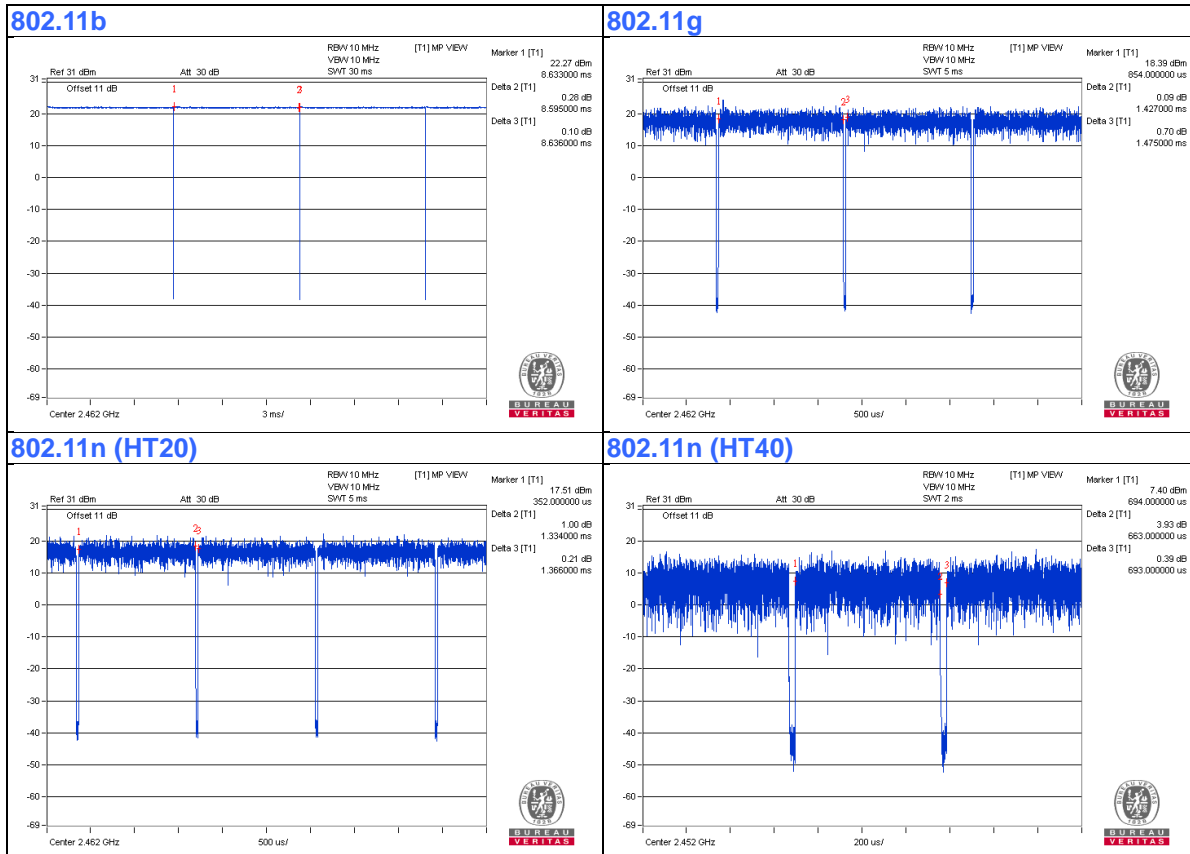

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Telephone	WONDER	WD-303	7C17KA 04011	NA	Provided by Lab
B.	Laptop	HP	Pavilion 14-ab023TU	5CD5340WXZ	NA	Provided by Lab
C.	USB 3.0 Disk	Transcend	NA	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-11 Cable	1	1.8	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Coaxial Cable	1	10	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

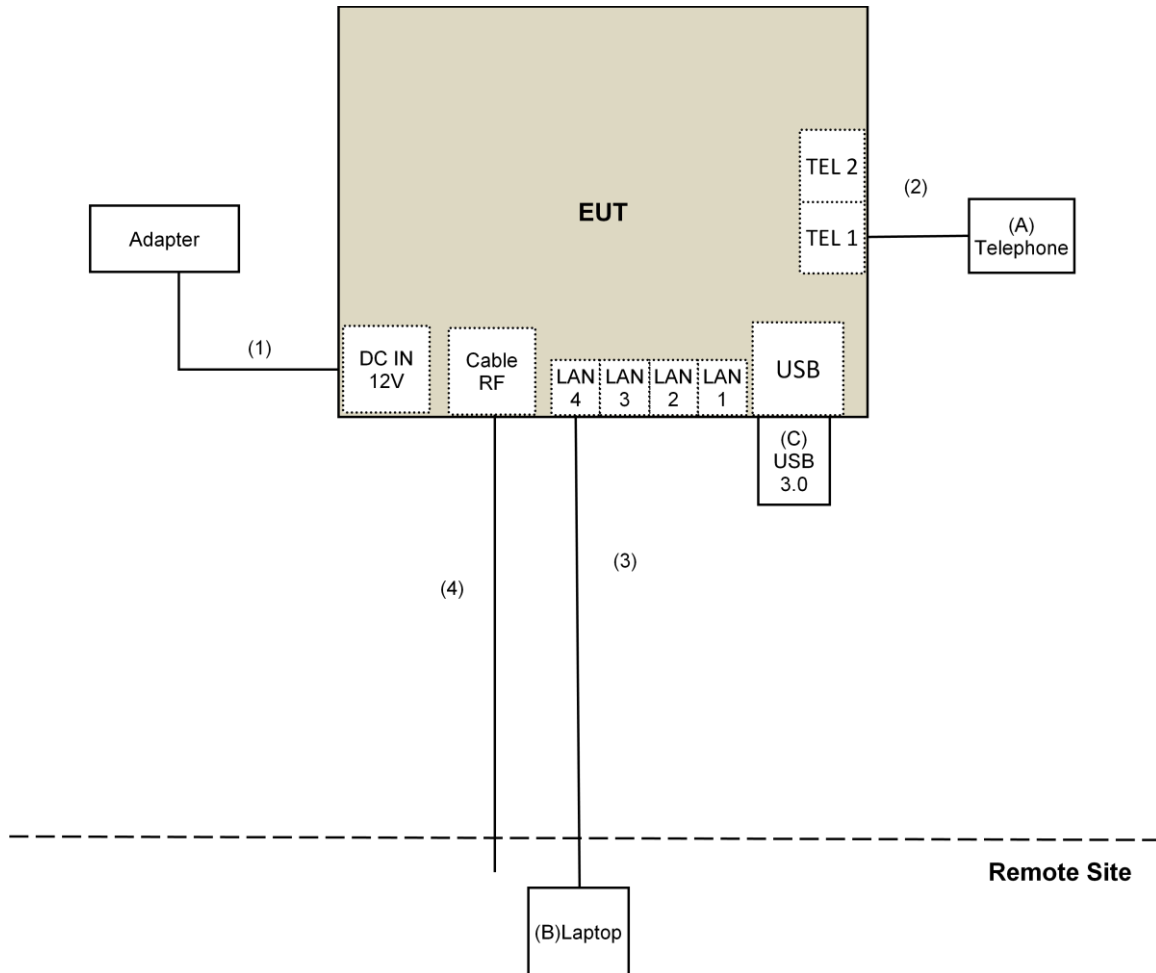

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160923 150318 150323	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	1014008	May 5, 2016	May 4, 2017
Power sensor Anritsu	MA2411B	0917122	May 5, 2016	May 4, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Apr. 08 to 18, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

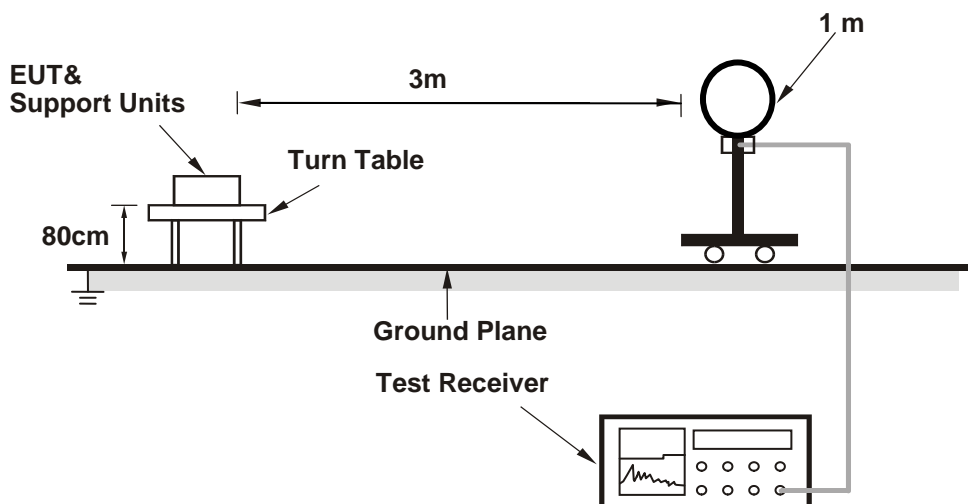

For Radiated emission 30MHz to 1GHz

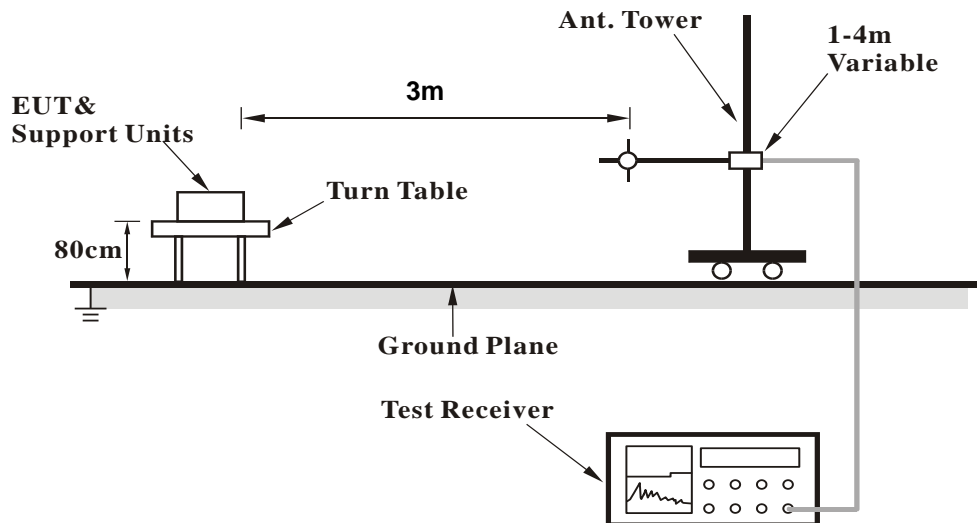

For Radiated emission above 1GHz

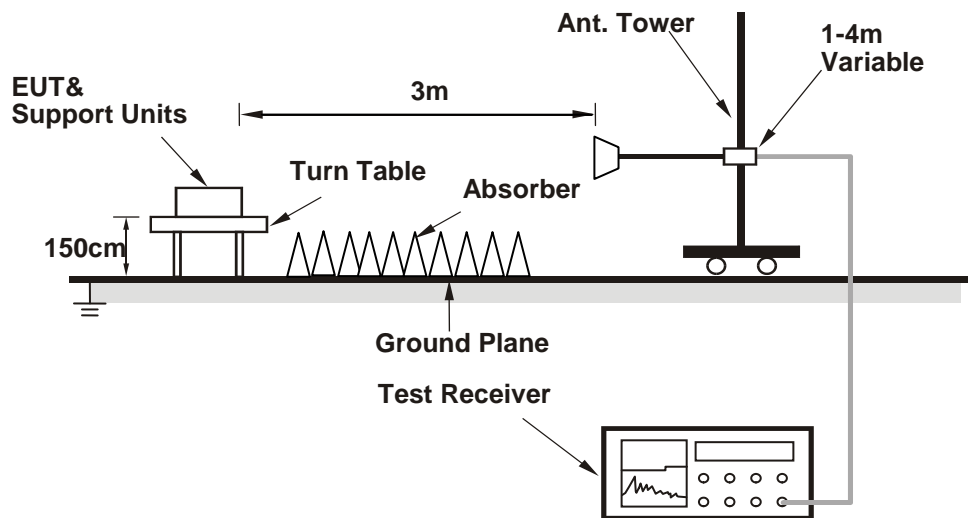

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (Telnet paste "4366_2.4G & 5G_wl command") has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	2.18 H	346	61.0	-1.3
2	2390.00	53.7 AV	54.0	-0.3	2.18 H	346	55.0	-1.3
3	*2412.00	112.9 PK			2.18 H	346	114.0	-1.1
4	*2412.00	110.9 AV			2.18 H	346	112.0	-1.1
5	4824.00	53.3 PK	74.0	-20.7	1.03 H	197	50.1	3.2
6	4824.00	52.2 AV	54.0	-1.8	1.03 H	197	49.0	3.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	3.91 V	223	55.7	-1.3
2	2390.00	48.6 AV	54.0	-5.4	3.91 V	223	49.9	-1.3
3	*2412.00	104.4 PK			3.91 V	223	105.5	-1.1
4	*2412.00	102.4 AV			3.91 V	223	103.5	-1.1
5	4824.00	51.6 PK	74.0	-22.4	2.30 V	250	48.4	3.2
6	4824.00	50.6 AV	54.0	-3.4	2.30 V	250	47.4	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.4 PK	74.0	-25.6	2.17 H	346	49.7	-1.3
2	2390.00	37.2 AV	54.0	-16.8	2.17 H	346	38.5	-1.3
3	*2437.00	109.2 PK			2.17 H	346	110.4	-1.2
4	*2437.00	106.9 AV			2.17 H	346	108.1	-1.2
5	2483.50	47.5 PK	74.0	-26.5	2.17 H	346	48.5	-1.0
6	2483.50	35.9 AV	54.0	-18.1	2.17 H	346	36.9	-1.0
7	4874.00	47.5 PK	74.0	-26.5	1.70 H	353	44.2	3.3
8	4874.00	44.7 AV	54.0	-9.3	1.70 H	353	41.4	3.3
9	7311.00	55.6 PK	74.0	-18.4	4.00 H	239	45.8	9.8
10	7311.00	52.4 AV	54.0	-1.6	4.00 H	239	42.6	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.3 PK	74.0	-27.7	3.88 V	221	47.6	-1.3
2	2390.00	35.1 AV	54.0	-18.9	3.88 V	221	36.4	-1.3
3	*2437.00	98.6 PK			3.88 V	221	99.8	-1.2
4	*2437.00	96.4 AV			3.88 V	221	97.6	-1.2
5	2483.50	44.7 PK	74.0	-29.3	3.88 V	221	45.7	-1.0
6	2483.50	33.1 AV	54.0	-20.9	3.88 V	221	34.1	-1.0
7	4874.00	48.9 PK	74.0	-25.1	1.71 V	141	45.6	3.3
8	4874.00	47.1 AV	54.0	-6.9	1.71 V	141	43.8	3.3
9	7311.00	56.8 PK	74.0	-17.2	3.95 V	230	47.0	9.8
10	7311.00	53.8 AV	54.0	-0.2	3.95 V	230	44.0	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.2 PK			2.14 H	341	110.3	-1.1
2	*2462.00	107.0 AV			2.14 H	341	108.1	-1.1
3	2483.50	54.8 PK	74.0	-19.2	2.14 H	341	55.8	-1.0
4	2483.50	44.7 AV	54.0	-9.3	2.14 H	341	45.7	-1.0
5	4924.00	46.8 PK	74.0	-27.2	1.70 H	353	43.3	3.5
6	4924.00	44.3 AV	54.0	-9.7	1.70 H	353	40.8	3.5
7	7386.00	55.7 PK	74.0	-18.3	3.90 H	200	45.8	9.9
8	7386.00	52.9 AV	54.0	-1.1	3.90 H	200	43.0	9.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.4 PK			3.27 V	226	99.5	-1.1
2	*2462.00	96.2 AV			3.27 V	226	97.3	-1.1
3	2483.50	46.9 PK	74.0	-27.1	3.27 V	226	47.9	-1.0
4	2483.50	36.6 AV	54.0	-17.4	3.27 V	226	37.6	-1.0
5	4924.00	48.4 PK	74.0	-25.6	1.76 V	244	44.9	3.5
6	4924.00	46.8 AV	54.0	-7.2	1.76 V	244	43.3	3.5
7	7386.00	56.5 PK	74.0	-17.5	3.87 V	227	46.6	9.9
8	7386.00	53.7 AV	54.0	-0.3	3.87 V	227	43.8	9.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	3.04 H	337	68.4	-1.3
2	2390.00	52.9 AV	54.0	-1.1	3.04 H	337	54.2	-1.3
3	*2412.00	113.7 PK			3.03 H	308	114.8	-1.1
4	*2412.00	103.7 AV			3.03 H	308	104.8	-1.1
5	4824.00	51.2 PK	74.0	-22.8	3.43 H	330	48.0	3.2
6	4824.00	40.8 AV	54.0	-13.2	3.43 H	330	37.6	3.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.54 V	72	68.9	-1.3
2	2390.00	53.7 AV	54.0	-0.3	1.54 V	72	55.0	-1.3
3	*2412.00	111.5 PK			1.54 V	72	112.6	-1.1
4	*2412.00	99.7 AV			1.54 V	72	100.8	-1.1
5	4824.00	58.1 PK	74.0	-15.9	2.45 V	263	54.9	3.2
6	4824.00	48.0 AV	54.0	-6.0	2.45 V	263	44.8	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.8 PK	74.0	-19.2	3.12 H	326	56.1	-1.3
2	2390.00	42.1 AV	54.0	-11.9	3.12 H	326	43.4	-1.3
3	*2437.00	112.8 PK			3.12 H	326	114.0	-1.2
4	*2437.00	102.6 AV			3.12 H	326	103.8	-1.2
5	2483.50	56.3 PK	74.0	-17.7	3.12 H	326	57.3	-1.0
6	2483.50	42.8 AV	54.0	-11.2	3.12 H	326	43.8	-1.0
7	4874.00	50.6 PK	74.0	-23.4	3.17 H	204	47.3	3.3
8	4874.00	39.7 AV	54.0	-14.3	3.17 H	204	36.4	3.3
9	7311.00	60.2 PK	74.0	-13.8	1.51 H	198	50.4	9.8
10	7311.00	48.7 AV	54.0	-5.3	1.51 H	198	38.9	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.8 PK	74.0	-19.2	1.45 V	65	56.1	-1.3
2	2390.00	42.2 AV	54.0	-11.8	1.45 V	65	43.5	-1.3
3	*2437.00	110.5 PK			1.45 V	65	111.7	-1.2
4	*2437.00	99.0 AV			1.45 V	65	100.2	-1.2
5	2483.50	55.1 PK	74.0	-18.9	1.45 V	65	56.1	-1.0
6	2483.50	42.3 AV	54.0	-11.7	1.45 V	65	43.3	-1.0
7	4874.00	56.5 PK	74.0	-17.5	2.25 V	256	53.2	3.3
8	4874.00	45.9 AV	54.0	-8.1	2.25 V	256	42.6	3.3
9	7311.00	67.6 PK	74.0	-6.4	2.40 V	303	57.8	9.8
10	7311.00	53.7 AV	54.0	-0.3	2.40 V	303	43.9	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.9 PK			3.11 H	321	113.0	-1.1
2	*2462.00	102.3 AV			3.11 H	321	103.4	-1.1
3	2490.00	63.6 PK	74.0	-10.4	3.11 H	321	64.6	-1.0
4	2490.00	48.0 AV	54.0	-6.0	3.11 H	321	49.0	-1.0
5	4924.00	50.3 PK	74.0	-23.7	3.11 H	199	46.8	3.5
6	4924.00	39.6 AV	54.0	-14.4	3.11 H	199	36.1	3.5
7	7386.00	60.0 PK	74.0	-14.0	1.55 H	193	50.1	9.9
8	7386.00	48.5 AV	54.0	-5.5	1.55 H	193	38.6	9.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.1 PK			1.39 V	62	111.2	-1.1
2	*2462.00	98.6 AV			1.39 V	62	99.7	-1.1
3	2490.00	66.4 PK	74.0	-7.6	1.39 V	62	67.4	-1.0
4	2490.00	46.7 AV	54.0	-7.3	1.39 V	62	47.7	-1.0
5	4924.00	56.6 PK	74.0	-17.4	2.19 V	258	53.1	3.5
6	4924.00	46.0 AV	54.0	-8.0	2.19 V	258	42.5	3.5
7	7386.00	62.7 PK	74.0	-11.3	2.51 V	298	52.8	9.9
8	7386.00	53.9 AV	54.0	-0.1	2.51 V	298	44.0	9.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	3.00 H	323	68.8	-1.3
2	2390.00	53.0 AV	54.0	-1.0	3.00 H	323	54.3	-1.3
3	*2412.00	113.7 PK			3.00 H	323	114.8	-1.1
4	*2412.00	103.5 AV			3.00 H	323	104.6	-1.1
5	4824.00	52.2 PK	74.0	-21.8	3.21 H	199	49.0	3.2
6	4824.00	41.1 AV	54.0	-12.9	3.21 H	199	37.9	3.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.53 V	64	68.5	-1.3
2	2390.00	53.9 AV	54.0	-0.1	1.53 V	64	55.2	-1.3
3	*2412.00	111.6 PK			1.53 V	64	112.7	-1.1
4	*2412.00	99.6 AV			1.53 V	64	100.7	-1.1
5	4824.00	58.2 PK	74.0	-15.8	2.32 V	246	55.0	3.2
6	4824.00	47.7 AV	54.0	-6.3	2.32 V	246	44.5	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	3.06 H	315	56.6	-1.3
2	2390.00	42.6 AV	54.0	-11.4	3.06 H	315	43.9	-1.3
3	*2437.00	112.4 PK			3.06 H	315	113.6	-1.2
4	*2437.00	102.2 AV			3.06 H	315	103.4	-1.2
5	2483.50	56.3 PK	74.0	-17.7	3.06 H	315	57.3	-1.0
6	2483.50	43.1 AV	54.0	-10.9	3.06 H	315	44.1	-1.0
7	4874.00	50.5 PK	74.0	-23.5	3.19 H	196	47.2	3.3
8	4874.00	39.5 AV	54.0	-14.5	3.19 H	196	36.2	3.3
9	7311.00	60.4 PK	74.0	-13.6	1.46 H	210	50.6	9.8
10	7311.00	48.9 AV	54.0	-5.1	1.46 H	210	39.1	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	1.49 V	51	55.6	-1.3
2	2390.00	41.7 AV	54.0	-12.3	1.49 V	51	43.0	-1.3
3	*2437.00	110.2 PK			1.45 V	71	111.4	-1.2
4	*2437.00	98.6 AV			1.45 V	71	99.8	-1.2
5	2483.50	54.8 PK	74.0	-19.2	1.49 V	70	55.8	-1.0
6	2483.50	41.9 AV	54.0	-12.1	1.49 V	70	42.9	-1.0
7	4874.00	56.7 PK	74.0	-17.3	2.30 V	244	53.4	3.3
8	4874.00	46.2 AV	54.0	-7.8	2.30 V	244	42.9	3.3
9	7311.00	64.7 PK	74.0	-9.3	2.47 V	304	54.9	9.8
10	7311.00	53.6 AV	54.0	-0.4	2.47 V	304	43.8	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.2 PK			3.00 H	316	113.3	-1.1
2	*2462.00	102.1 AV			3.00 H	316	103.2	-1.1
3	2483.50	65.3 PK	74.0	-8.7	3.00 H	316	66.3	-1.0
4	2483.50	47.8 AV	54.0	-6.2	3.00 H	316	48.8	-1.0
5	4924.00	50.1 PK	74.0	-23.9	3.21 H	205	46.6	3.5
6	4924.00	39.3 AV	54.0	-14.7	3.21 H	205	35.8	3.5
7	7386.00	60.1 PK	74.0	-13.9	1.47 H	219	50.2	9.9
8	7386.00	48.4 AV	54.0	-5.6	1.47 H	219	38.5	9.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.6 PK			1.37 V	49	110.7	-1.1
2	*2462.00	98.3 AV			1.37 V	49	99.4	-1.1
3	2483.50	66.1 PK	74.0	-7.9	1.37 V	49	67.1	-1.0
4	2483.50	46.6 AV	54.0	-7.4	1.37 V	49	47.6	-1.0
5	4924.00	56.9 PK	74.0	-17.1	2.20 V	241	53.4	3.5
6	4924.00	46.2 AV	54.0	-7.8	2.20 V	241	42.7	3.5
7	7386.00	66.4 PK	74.0	-7.6	2.38 V	306	56.5	9.9
8	7386.00	53.6 AV	54.0	-0.4	2.38 V	306	43.7	9.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	3.05 H	316	64.5	-1.3
2	2390.00	51.0 AV	54.0	-3.0	3.05 H	316	52.3	-1.3
3	*2422.00	107.3 PK			3.05 H	316	108.6	-1.3
4	*2422.00	95.1 AV			3.05 H	316	96.4	-1.3
5	4844.00	47.9 PK	74.0	-26.1	3.15 H	204	44.6	3.3
6	4844.00	37.8 AV	54.0	-16.2	3.15 H	204	34.5	3.3
7	7266.00	57.3 PK	74.0	-16.7	1.48 H	201	47.5	9.8
8	7266.00	46.1 AV	54.0	-7.9	1.48 H	201	36.3	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.96 V	62	69.4	-1.3
2	2390.00	53.9 AV	54.0	-0.1	1.96 V	62	55.2	-1.3
3	*2422.00	104.4 PK			1.96 V	62	105.7	-1.3
4	*2422.00	92.4 AV			1.96 V	62	93.7	-1.3
5	4844.00	48.0 PK	74.0	-26.0	2.40 V	262	44.7	3.3
6	4844.00	34.7 AV	54.0	-19.3	2.40 V	262	31.4	3.3
7	7266.00	51.2 PK	74.0	-22.8	2.66 V	306	41.4	9.8
8	7266.00	38.5 AV	54.0	-15.5	2.66 V	306	28.7	9.8

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	3.03 H	315	61.4	-1.3
2	2390.00	52.2 AV	54.0	-1.8	3.03 H	315	53.5	-1.3
3	*2437.00	108.6 PK			3.03 H	315	109.8	-1.2
4	*2437.00	97.2 AV			3.03 H	315	98.4	-1.2
5	2483.50	59.3 PK	74.0	-14.7	3.03 H	315	60.3	-1.0
6	2483.50	45.2 AV	54.0	-8.8	3.03 H	315	46.2	-1.0
7	4874.00	50.3 PK	74.0	-23.7	3.18 H	210	47.0	3.3
8	4874.00	39.7 AV	54.0	-14.3	3.18 H	210	36.4	3.3
9	7311.00	59.7 PK	74.0	-14.3	1.45 H	193	49.9	9.8
10	7311.00	48.4 AV	54.0	-5.6	1.45 H	193	38.6	9.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.86 V	63	68.8	-1.3
2	2390.00	53.6 AV	54.0	-0.4	1.86 V	63	54.9	-1.3
3	*2437.00	105.7 PK			1.86 V	63	106.9	-1.2
4	*2437.00	94.5 AV			1.86 V	63	95.7	-1.2
5	2483.50	63.8 PK	74.0	-10.2	1.86 V	63	64.8	-1.0
6	2483.50	46.7 AV	54.0	-7.3	1.86 V	63	47.7	-1.0
7	4874.00	50.8 PK	74.0	-23.2	2.44 V	278	47.5	3.3
8	4874.00	37.5 AV	54.0	-16.5	2.44 V	278	34.2	3.3
9	7311.00	54.0 PK	74.0	-20.0	2.65 V	321	44.2	9.8
10	7311.00	41.3 AV	54.0	-12.7	2.65 V	321	31.5	9.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.6 PK			3.01 H	307	110.7	-1.1
2	*2452.00	96.8 AV			3.01 H	307	97.9	-1.1
3	2483.50	72.9 PK	74.0	-1.1	3.01 H	307	73.9	-1.0
4	2483.50	46.5 AV	54.0	-7.5	3.01 H	307	47.5	-1.0
5	4904.00	49.7 PK	74.0	-24.3	3.21 H	220	46.2	3.5
6	4904.00	39.1 AV	54.0	-14.9	3.21 H	220	35.6	3.5
7	7356.00	58.8 PK	74.0	-15.2	1.40 H	209	48.9	9.9
8	7356.00	47.6 AV	54.0	-6.4	1.40 H	209	37.7	9.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.7 PK			1.69 V	76	107.8	-1.1
2	*2452.00	94.1 AV			1.69 V	76	95.2	-1.1
3	2483.50	73.7 PK	74.0	-0.3	1.69 V	76	74.7	-1.0
4	2483.50	47.7 AV	54.0	-6.3	1.69 V	76	48.7	-1.0
5	4904.00	50.1 PK	74.0	-23.9	2.36 V	248	46.6	3.5
6	4904.00	37.0 AV	54.0	-17.0	2.36 V	248	33.5	3.5
7	7356.00	53.3 PK	74.0	-20.7	2.62 V	305	43.4	9.9
8	7356.00	40.6 AV	54.0	-13.4	2.62 V	305	30.7	9.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.84	30.8 QP	40.0	-9.2	1.00 H	49	38.7	-7.9
2	108.55	30.4 QP	43.5	-13.1	2.00 H	73	41.5	-11.1
3	148.63	32.9 QP	43.5	-10.6	2.00 H	95	41.0	-8.1
4	158.96	34.1 QP	43.5	-9.4	2.00 H	80	41.8	-7.7
5	205.74	38.2 QP	43.5	-5.3	1.50 H	288	49.6	-11.4
6	478.92	34.7 QP	46.0	-11.3	2.00 H	0	37.7	-3.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	56.67	34.6 QP	40.0	-5.4	1.00 V	274	43.0	-8.4
2	109.47	34.0 QP	43.5	-9.5	1.50 V	0	45.1	-11.1
3	204.89	31.9 QP	43.5	-11.6	1.00 V	181	43.3	-11.4
4	469.99	40.3 QP	46.0	-5.7	1.00 V	73	43.6	-3.3
5	520.19	40.4 QP	46.0	-5.6	1.00 V	289	42.7	-2.3
6	931.74	34.5 QP	46.0	-11.5	1.00 V	72	30.0	4.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-523	Oct. 11, 2016	Oct. 10, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
RF Cable	5D-FB	COACAB-001	May 24, 2016	May 23, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-001	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	50	3	Oct. 26, 2016	Oct. 25, 2017
50 ohms Terminator	N/A	EMC-04	Nov. 02, 2016	Nov. 01, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. D.
3. The VCCI Con D Registration No. is C-20005.
4. Tested Date: Apr. 06, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

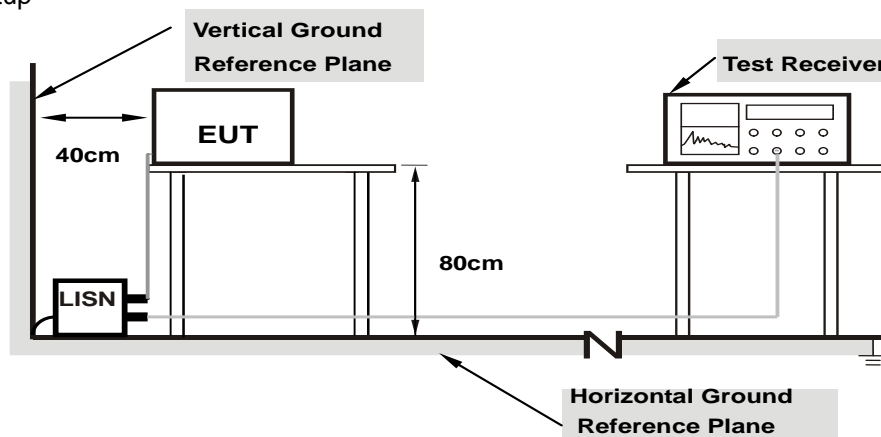

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.39	38.11	24.66	48.50	35.05	66.00	56.00	-17.50	-20.95
2	0.17344	10.39	35.76	23.02	46.15	33.41	64.79	54.79	-18.64	-21.38
3	0.32578	10.44	29.44	25.13	39.88	35.57	59.56	49.56	-19.68	-13.99
4	2.65234	10.61	25.94	16.58	36.55	27.19	56.00	46.00	-19.45	-18.81
5	6.89063	10.84	29.38	24.48	40.22	35.32	60.00	50.00	-19.78	-14.68
6	10.15625	11.00	29.54	24.98	40.54	35.98	60.00	50.00	-19.46	-14.02

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

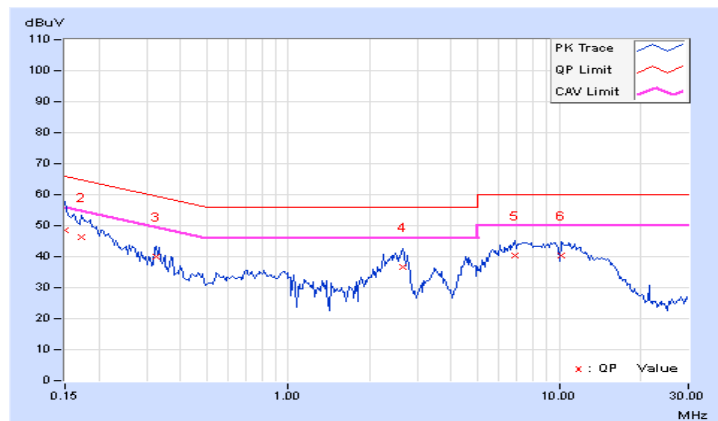


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.42	37.95	24.66	48.37	35.08	66.00	56.00	-17.63	-20.92
2	0.18125	10.43	33.43	20.93	43.86	31.36	64.43	54.43	-20.57	-23.07
3	0.32969	10.50	28.32	21.25	38.82	31.75	59.46	49.46	-20.64	-17.71
4	2.41797	10.77	27.39	18.83	38.16	29.60	56.00	46.00	-17.84	-16.40
5	5.54688	10.87	27.13	21.48	38.00	32.35	60.00	50.00	-22.00	-17.65
6	6.80469	10.91	29.48	24.56	40.39	35.47	60.00	50.00	-19.61	-14.53
7	10.39844	11.02	29.42	24.82	40.44	35.84	60.00	50.00	-19.56	-14.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

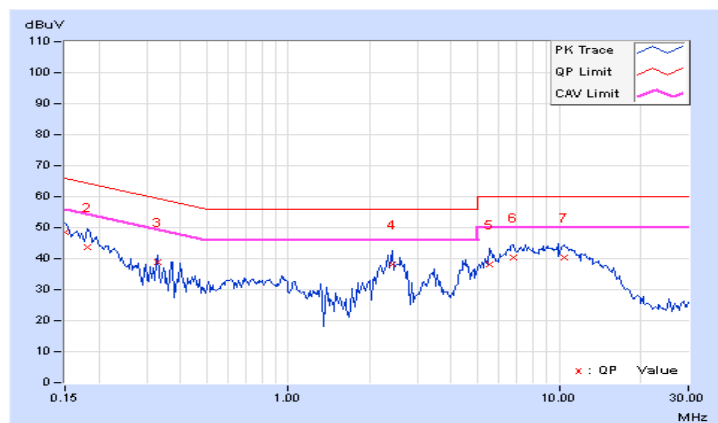


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.21641	10.40	36.64	28.77	47.04	39.17	62.96	52.96	-15.92
2	0.23594	10.40	36.29	30.43	46.69	40.83	62.24	52.24	-15.55	-11.41
3	0.28672	10.42	33.95	26.80	44.37	37.22	60.62	50.62	-16.25	-13.40
4	0.36875	10.46	38.56	34.98	49.02	45.44	58.53	48.53	-9.51	-3.09
5	0.43516	10.48	32.22	27.62	42.70	38.10	57.15	47.15	-14.45	-9.05
6	1.37500	10.61	28.72	22.13	39.33	32.74	56.00	46.00	-16.67	-13.26
7	3.02734	10.63	30.15	19.70	40.78	30.33	56.00	46.00	-15.22	-15.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

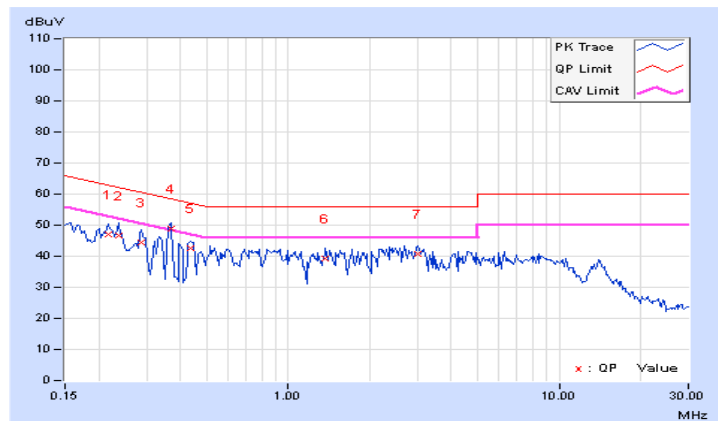


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.43	35.76	26.88	46.19	37.31	65.18	55.18	-18.99	-17.87
2	0.23594	10.46	34.60	26.84	45.06	37.30	62.24	52.24	-17.18	-14.94
3	0.36875	10.52	36.97	34.11	47.49	44.63	58.53	48.53	-11.04	-3.90
4	0.43516	10.55	30.19	25.22	40.74	35.77	57.15	47.15	-16.41	-11.38
5	1.88281	10.75	28.70	19.30	39.45	30.05	56.00	46.00	-16.55	-15.95
6	3.00781	10.79	28.93	18.42	39.72	29.21	56.00	46.00	-16.28	-16.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

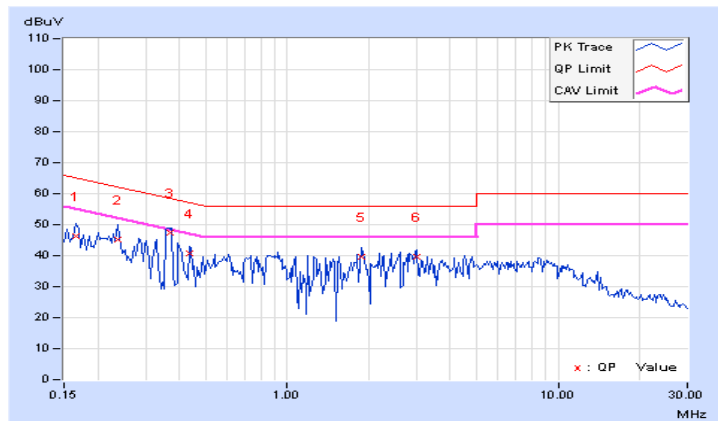


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.11	0.5	PASS
6	2437	8.07	0.5	PASS
11	2462	7.62	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	15.17	15.19	15.18	0.5	PASS
6	2437	15.16	15.17	15.18	0.5	PASS
11	2462	15.17	15.18	15.17	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
1	2412	15.20	15.75	15.17	0.5	Pass
6	2437	15.72	16.34	15.22	0.5	Pass
11	2462	15.19	15.75	15.20	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
3	2422	36.41	36.50	36.44	0.5	Pass
6	2437	36.54	36.53	36.50	0.5	Pass
9	2452	36.49	36.52	36.51	0.5	Pass

Spectrum Plot of Worst Value


802.11b : CH11

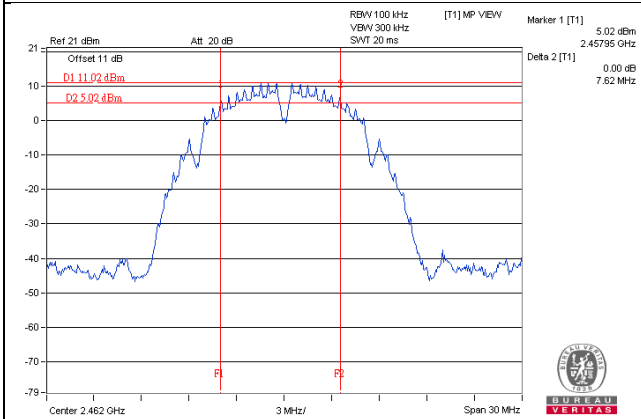


802.11g / Chain 0 : CH6

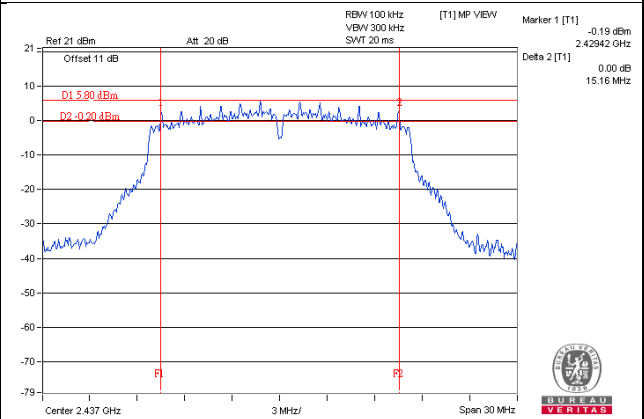

802.11n (HT20) / Chain 2 : CH1

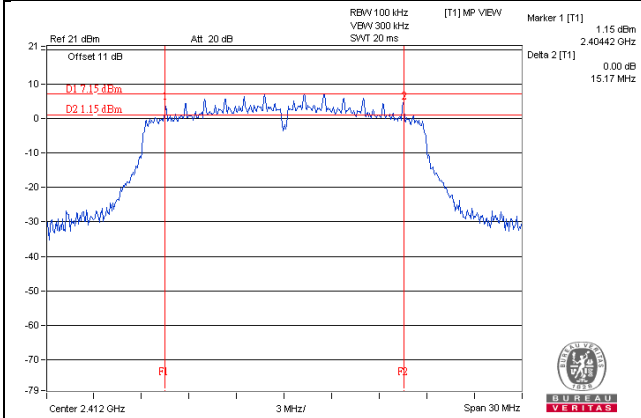

802.11n (HT40) / Chain 0 : CH3

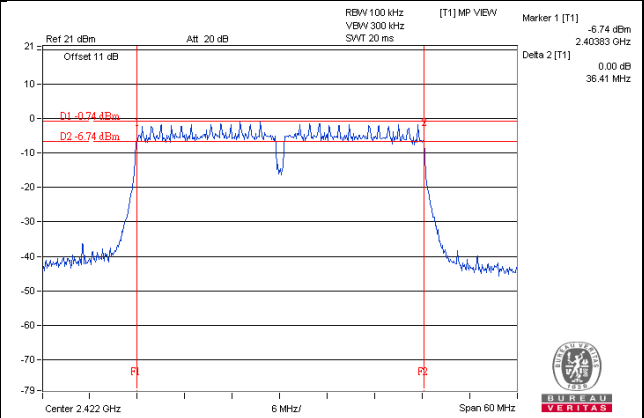

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	208.93	23.20	30	Pass
6	2437	93.756	19.72	30	Pass
11	2462	86.099	19.35	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.85	17.38	18.05	179.482	22.54	30	Pass
6	2437	16.58	15.95	16.49	129.42	21.12	30	Pass
11	2462	16.32	16.15	16.92	133.269	21.25	30	Pass

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.88	17.27	17.93	176.796	22.47	30	Pass
6	2437	15.81	15.91	17.13	128.743	21.10	30	Pass
11	2462	16.04	15.41	15.97	114.47	20.59	30	Pass

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	13.56	13.17	13.74	67.107	18.27	30	Pass
6	2437	16.22	15.90	16.32	123.639	20.92	30	Pass
9	2452	15.54	15.37	15.74	107.742	20.32	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
1	2412	17.88	17.27	17.93	176.796	22.47	28.03	Pass
6	2437	15.81	15.91	17.13	128.743	21.10	28.03	Pass
11	2462	16.04	15.41	15.97	114.47	20.59	28.03	Pass

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 7.97\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.97 - 6) = 28.03\text{dBm}$.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
3	2422	13.56	13.17	13.74	67.107	18.27	28.03	Pass
6	2437	16.22	15.90	16.32	123.639	20.92	28.03	Pass
9	2452	15.54	15.37	15.74	107.742	20.32	28.03	Pass


Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 7.97\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.97 - 6) = 28.03\text{dBm}$.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11g, 802.11n (HT20), 802.11n (HT40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-6.76	8	Pass
6	2437	-10.93	8	Pass
11	2462	-11.69	8	Pass

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.65	4.77	0.14	-6.74	6.03	Pass
	6	2437	-12.88	4.77	0.14	-7.97	6.03	Pass
	11	2462	-14.45	4.77	0.14	-9.54	6.03	Pass
1	1	2412	-13.50	4.77	0.14	-8.59	6.03	Pass
	6	2437	-14.77	4.77	0.14	-9.86	6.03	Pass
	11	2462	-14.15	4.77	0.14	-9.24	6.03	Pass
2	1	2412	-12.75	4.77	0.14	-7.84	6.03	Pass
	6	2437	-12.92	4.77	0.14	-8.01	6.03	Pass
	11	2462	-12.62	4.77	0.14	-7.71	6.03	Pass

- Note:** 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 7.97\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.97 - 6) = 6.03\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.18	4.77	0.10	-10.31	6.03	Pass
	6	2437	-17.47	4.77	0.10	-12.60	6.03	Pass
	11	2462	-16.81	4.77	0.10	-11.94	6.03	Pass
1	1	2412	-14.72	4.77	0.10	-9.85	6.03	Pass
	6	2437	-17.14	4.77	0.10	-12.27	6.03	Pass
	11	2462	-16.19	4.77	0.10	-11.32	6.03	Pass
2	1	2412	-13.89	4.77	0.10	-9.02	6.03	Pass
	6	2437	-15.86	4.77	0.10	-10.99	6.03	Pass
	11	2462	-16.43	4.77	0.10	-11.56	6.03	Pass

- Note:** 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 7.97\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.97 - 6) = 6.03\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.


802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-22.51	4.77	0.19	-17.55	6.03	Pass
	6	2437	-19.13	4.77	0.19	-14.17	6.03	Pass
	9	2452	-20.79	4.77	0.19	-15.83	6.03	Pass
1	3	2422	-22.69	4.77	0.19	-17.73	6.03	Pass
	6	2437	-19.66	4.77	0.19	-14.70	6.03	Pass
	9	2452	-20.69	4.77	0.19	-15.73	6.03	Pass
2	3	2422	-21.40	4.77	0.19	-16.44	6.03	Pass
	6	2437	-19.57	4.77	0.19	-14.61	6.03	Pass
	9	2452	-19.83	4.77	0.19	-14.87	6.03	Pass


- Note:** 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 7.97\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (7.97 - 6) = 6.03\text{dBm}$.
2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b : CH1

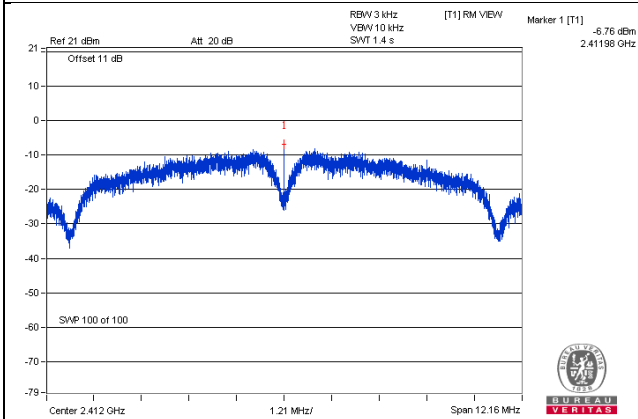


802.11g / Chain 0 : CH1

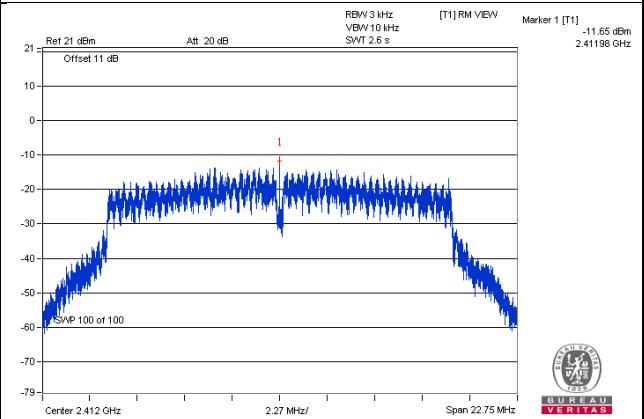

802.11n (HT20) / Chain 2 : CH1

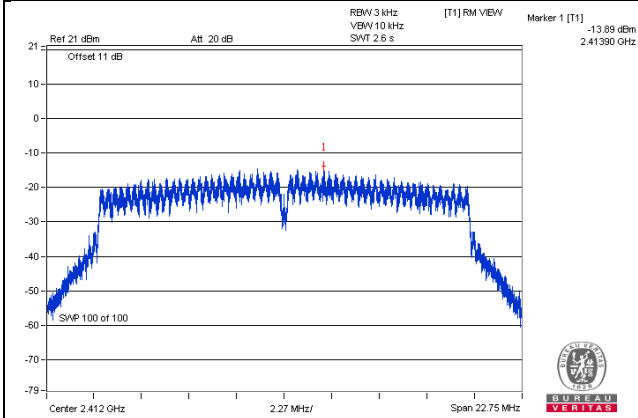

802.11n (HT40) / Chain 0 : CH6

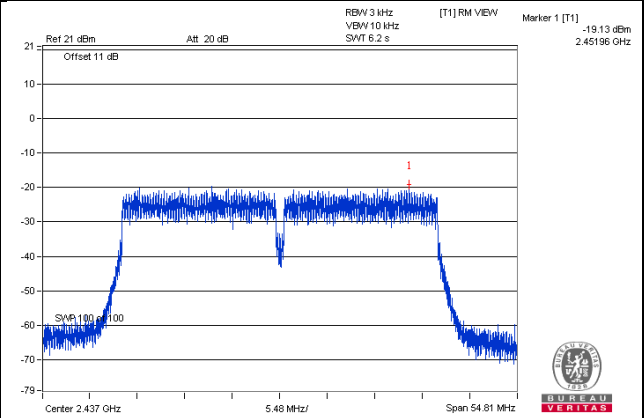


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.








4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.




802.11b

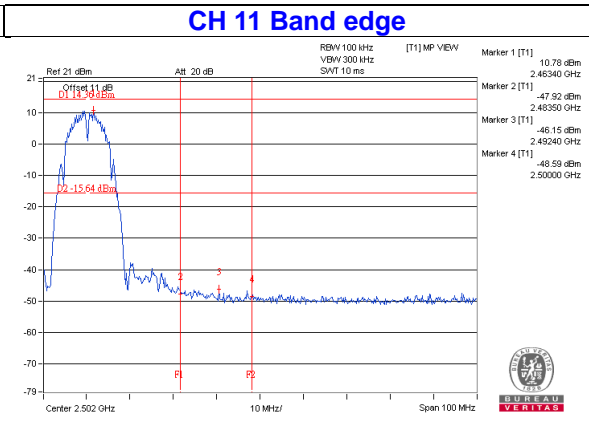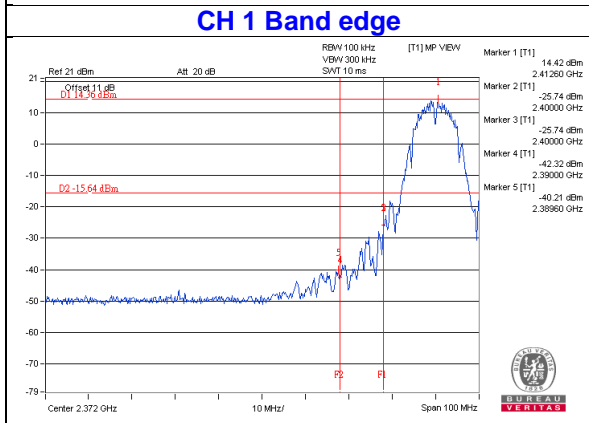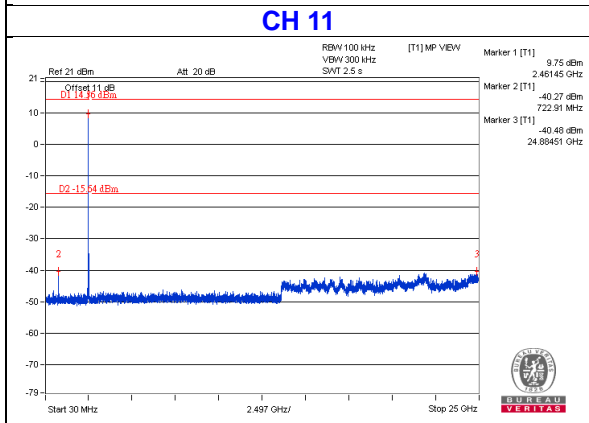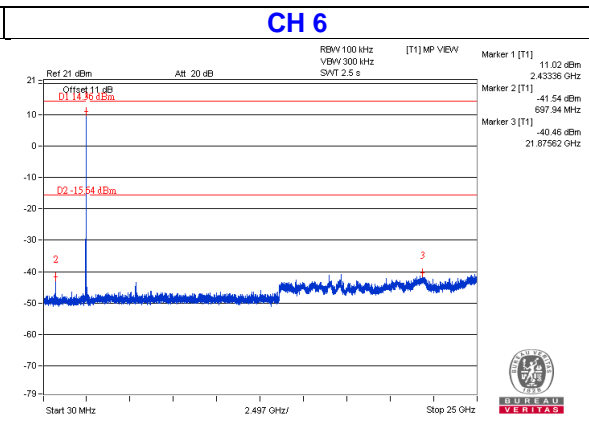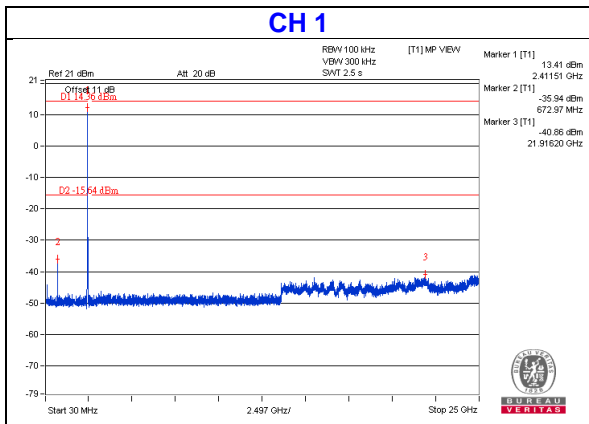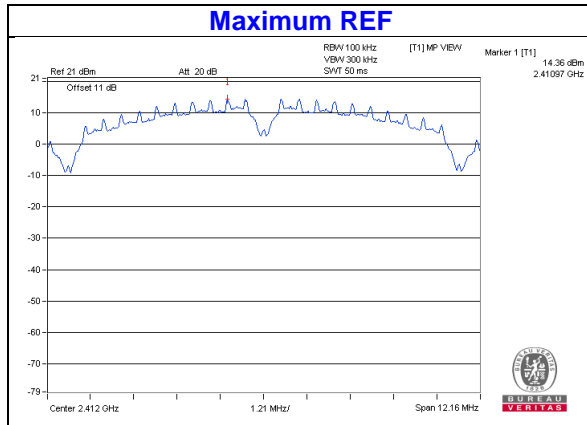




802.11g

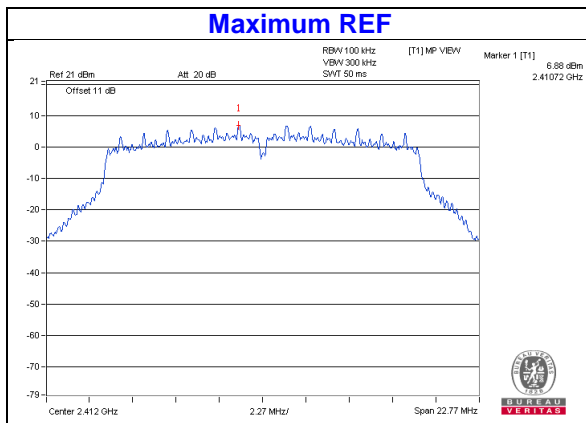




CHAIN 0

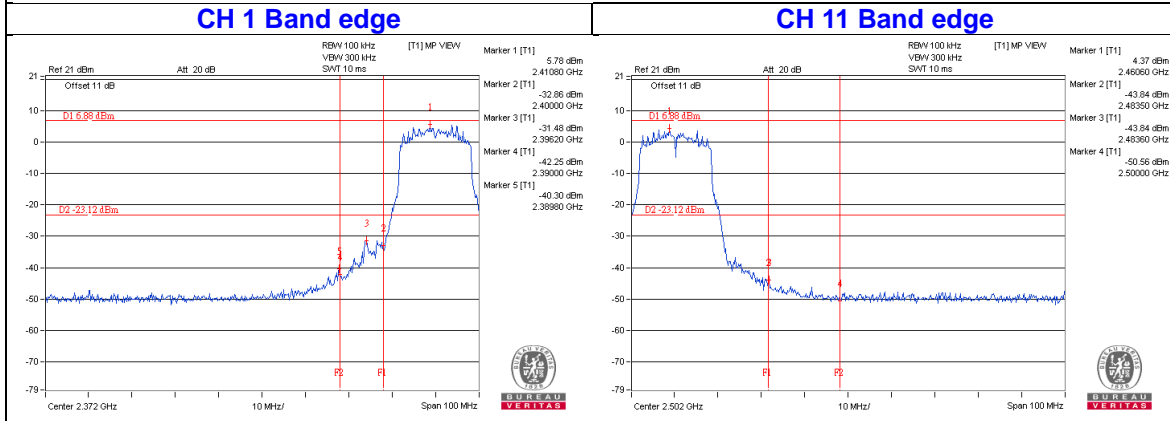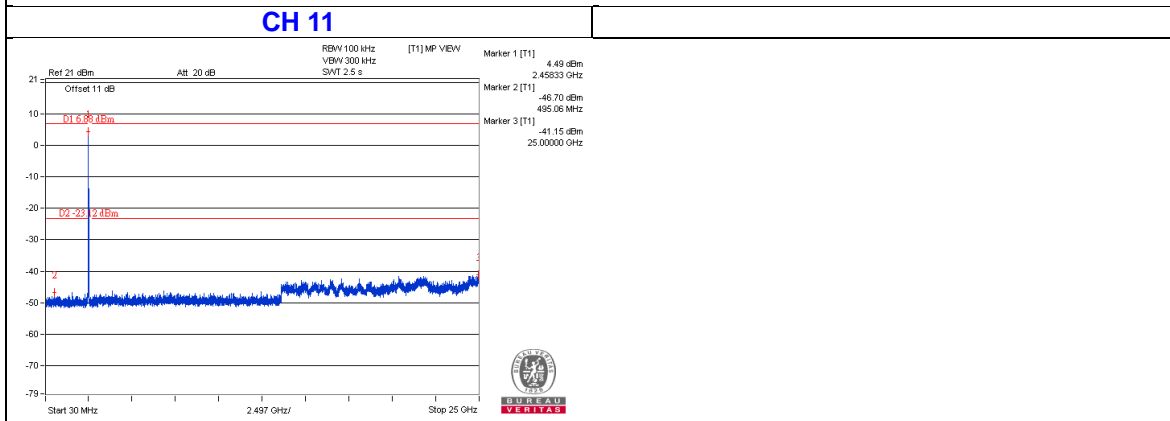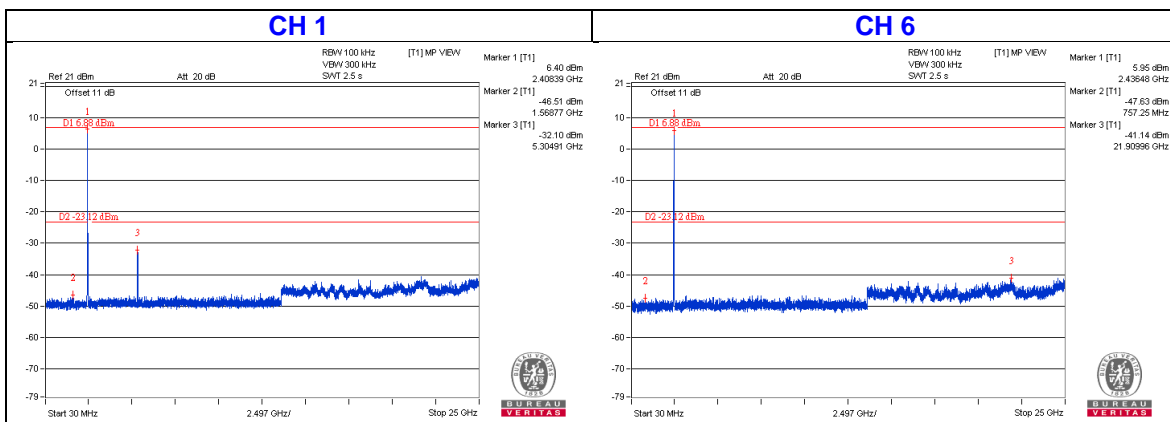


CHAIN 1

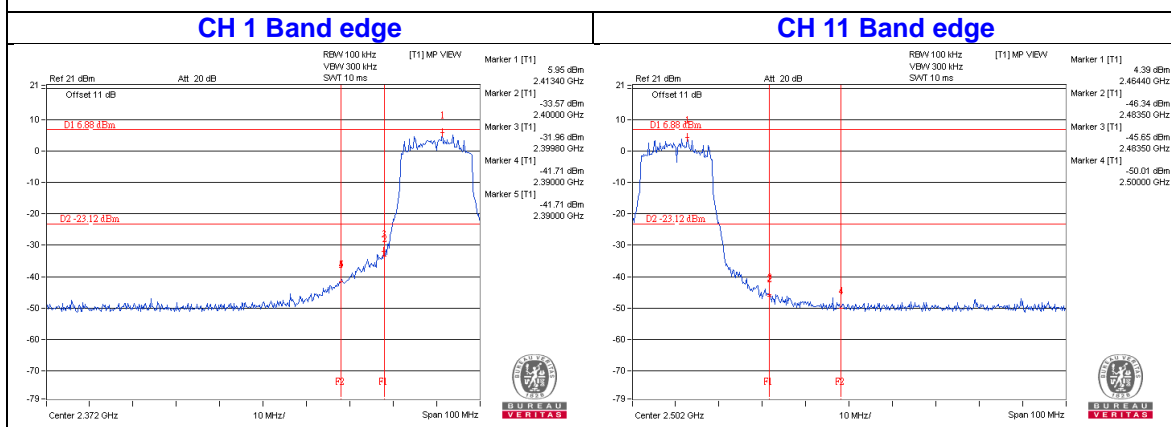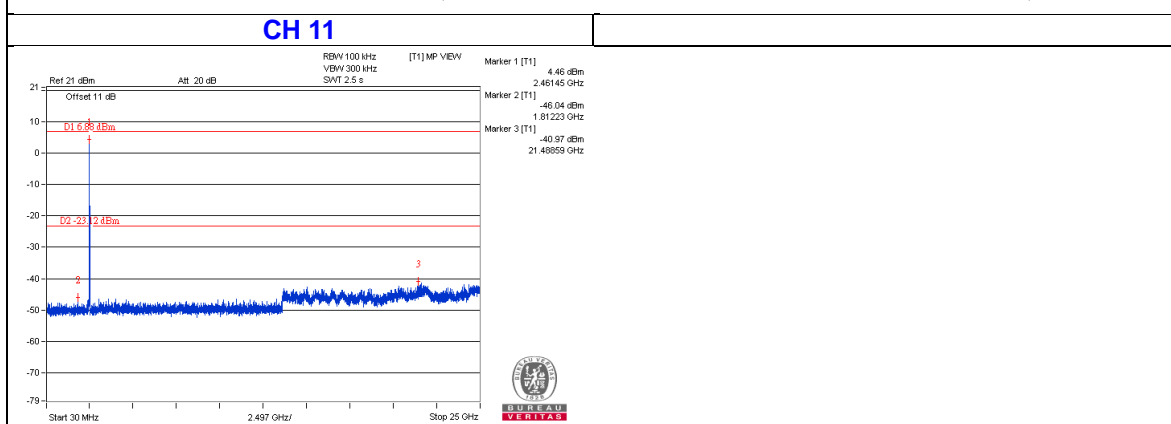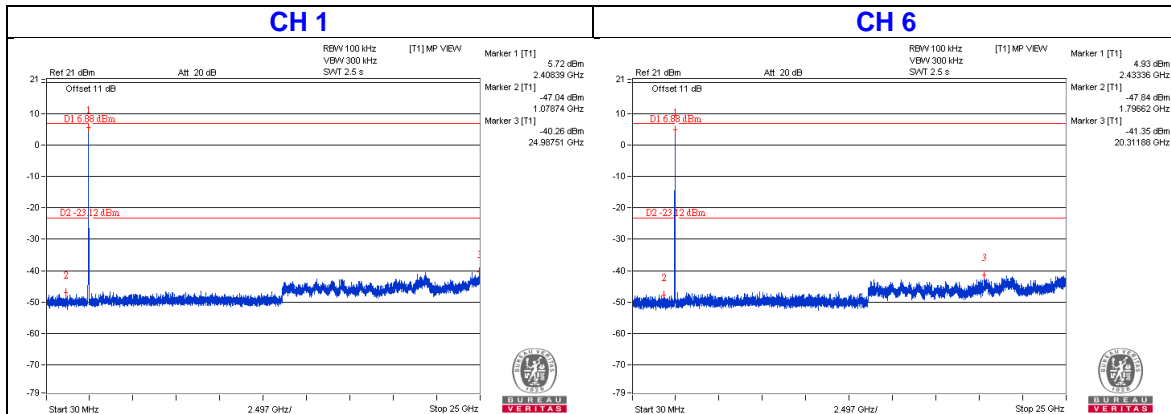

CHAIN 2

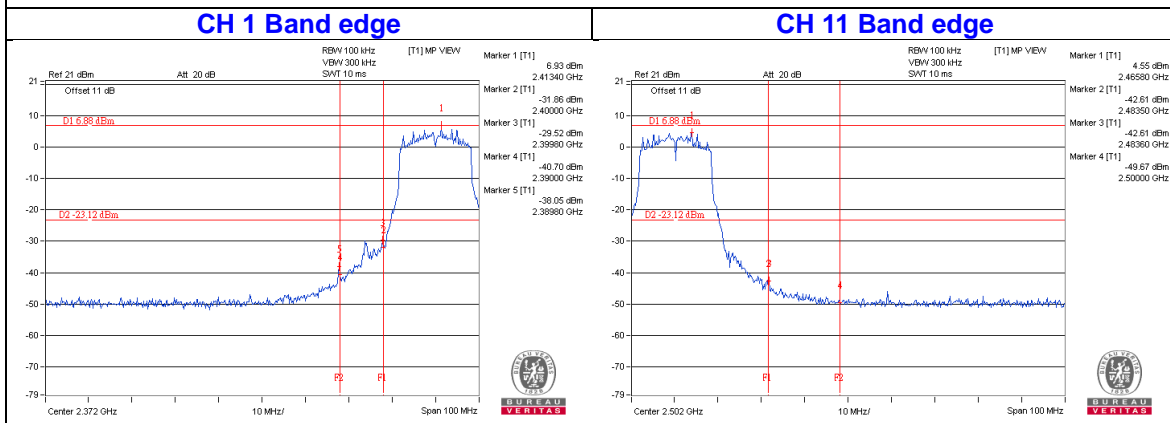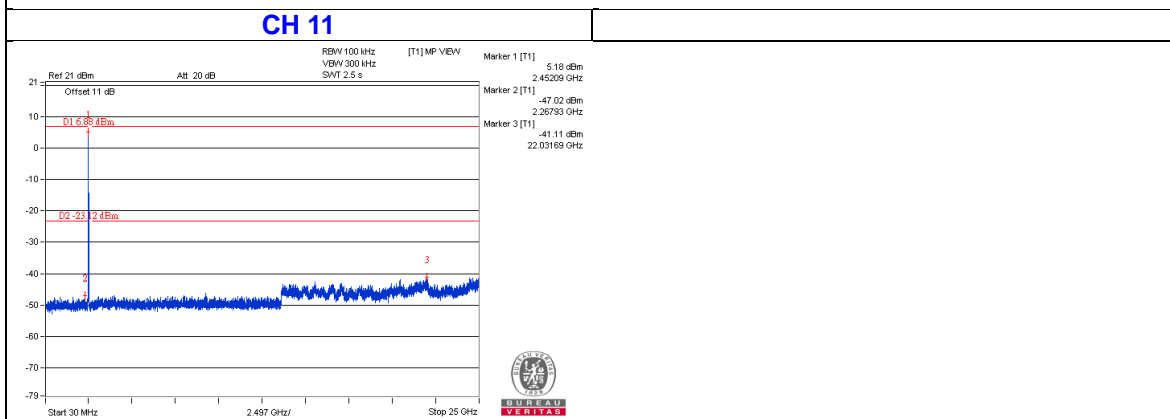
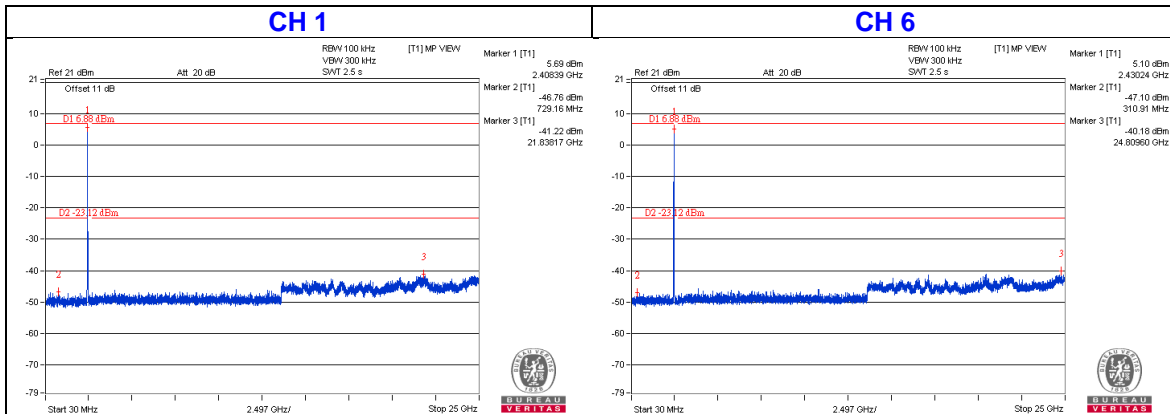


802.11n (HT20)


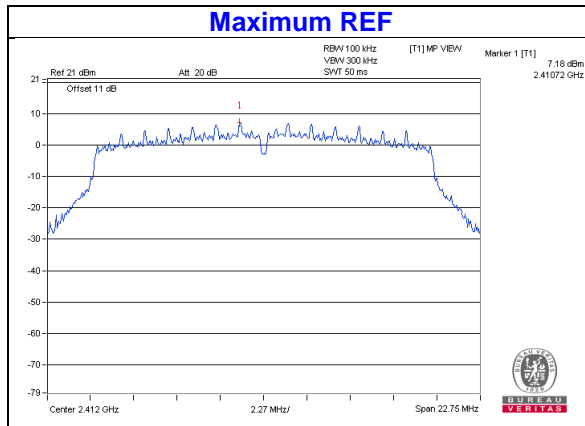


CHAIN 0



CH 1 CH 6

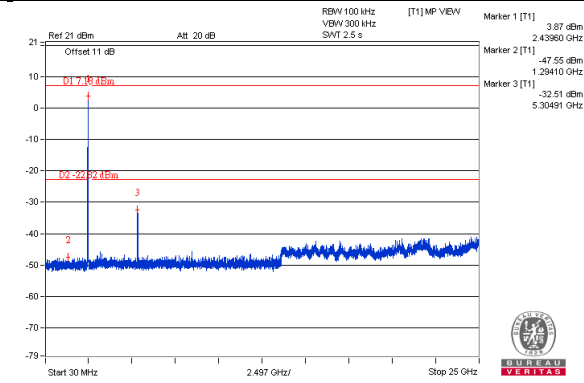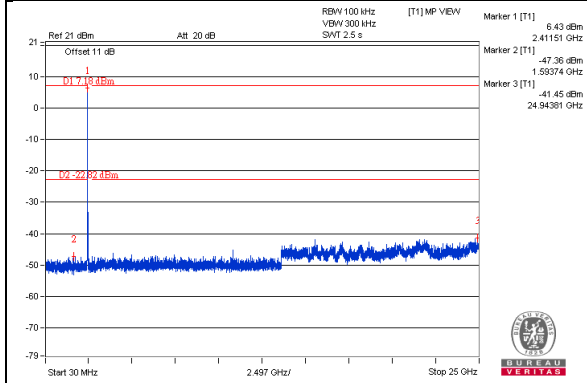




CH 11

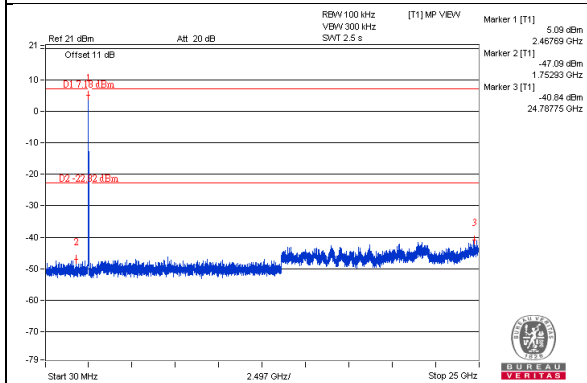




CH 1 Band edge CH 11 Band edge

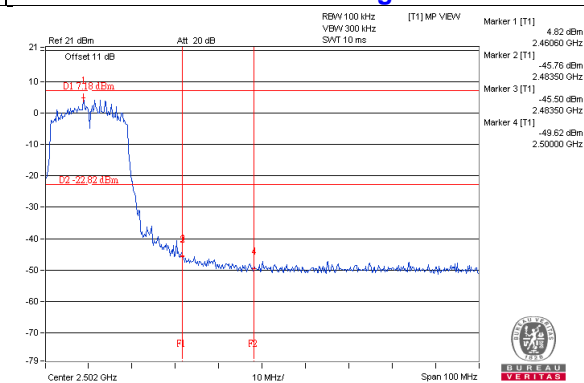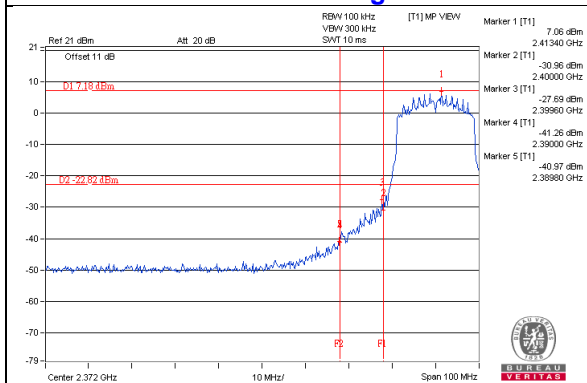


CHAIN 1

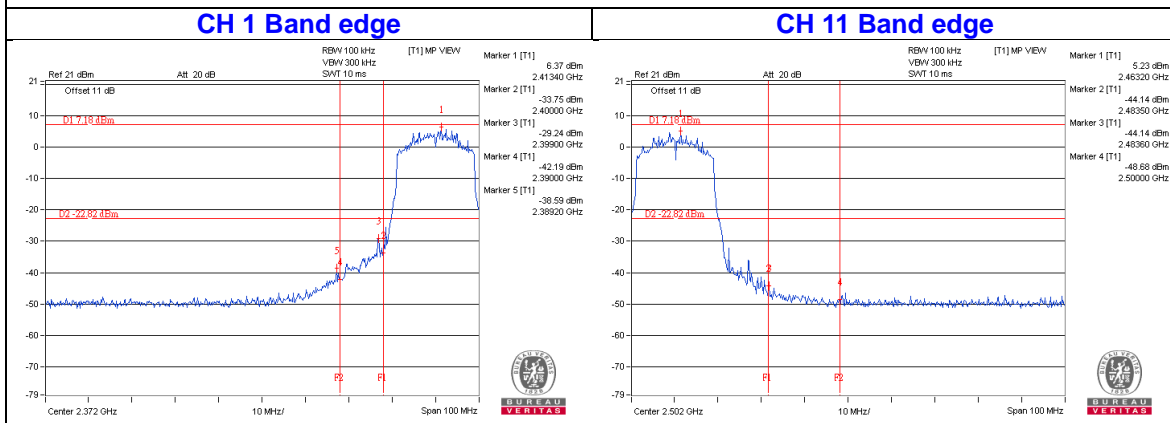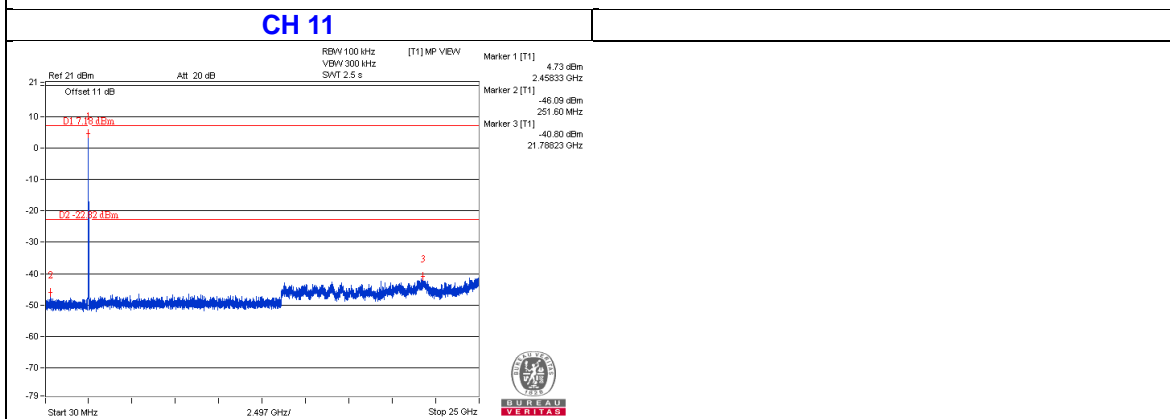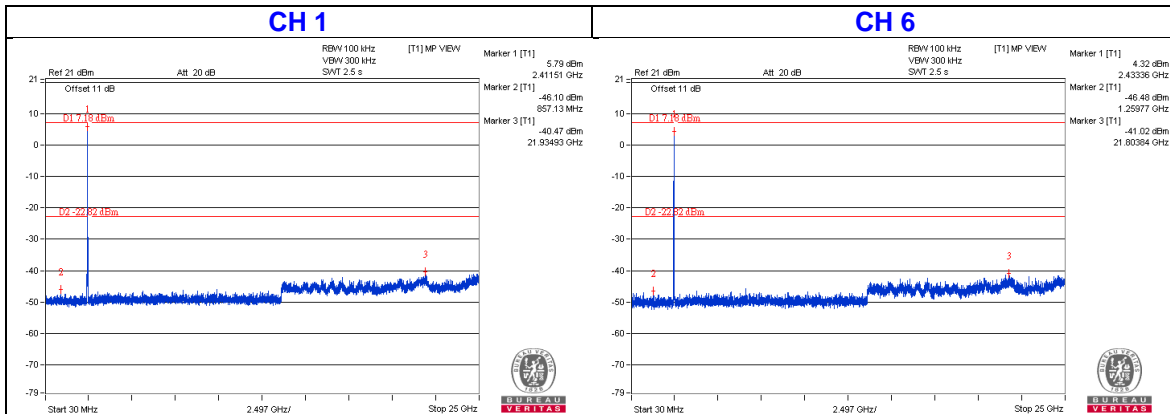




CHAIN 2

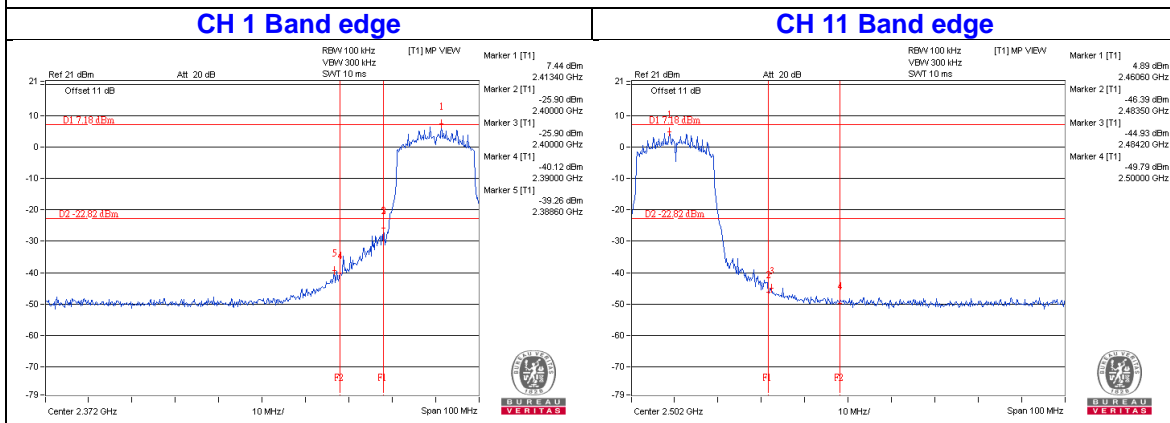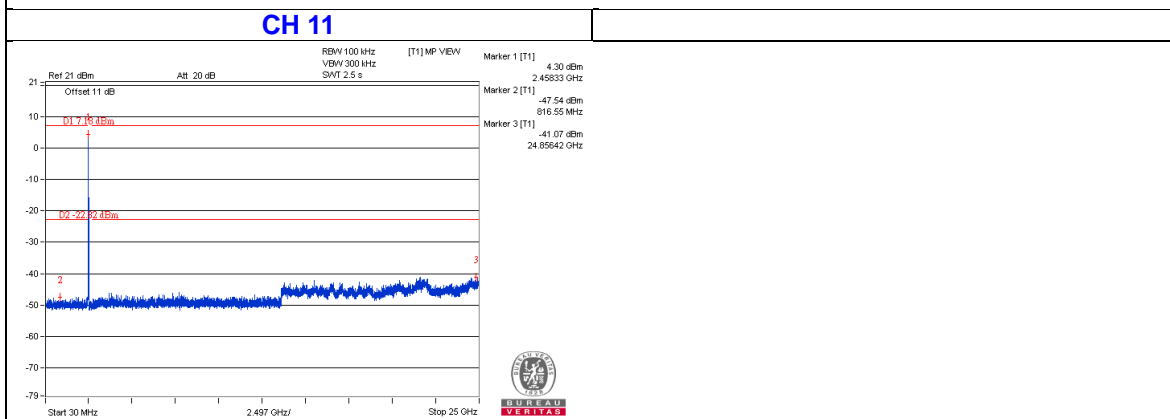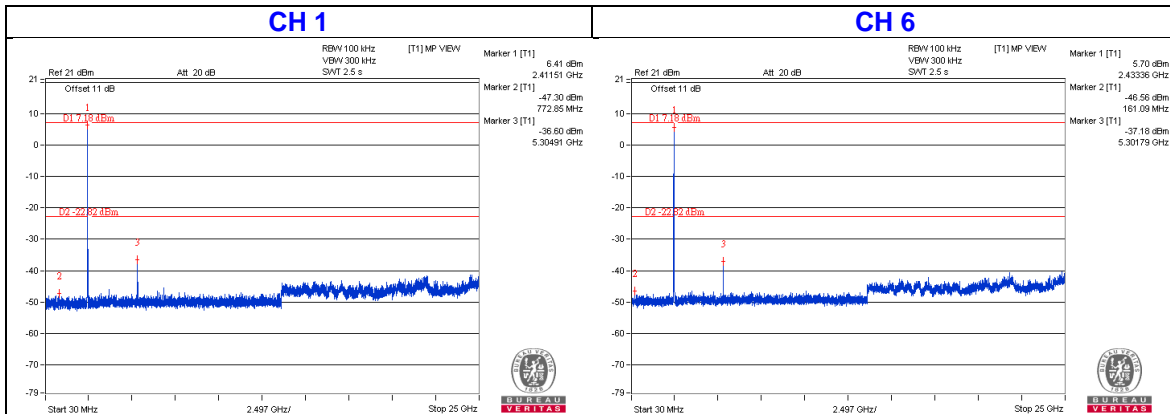




802.11n (HT40)

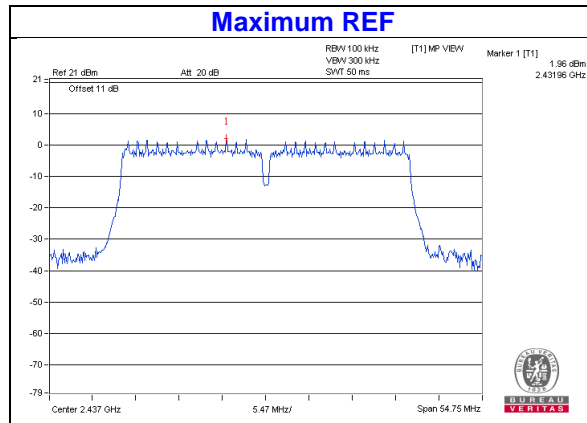


CHAIN 0

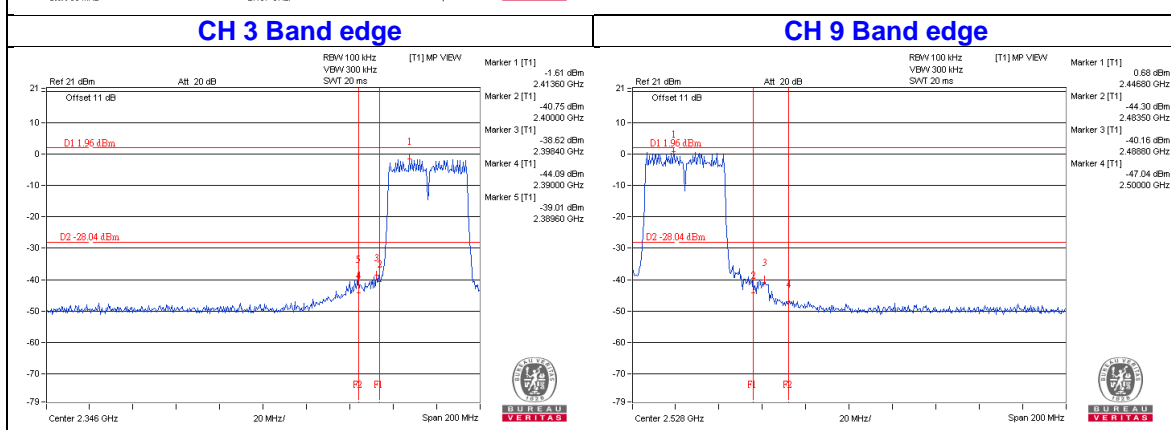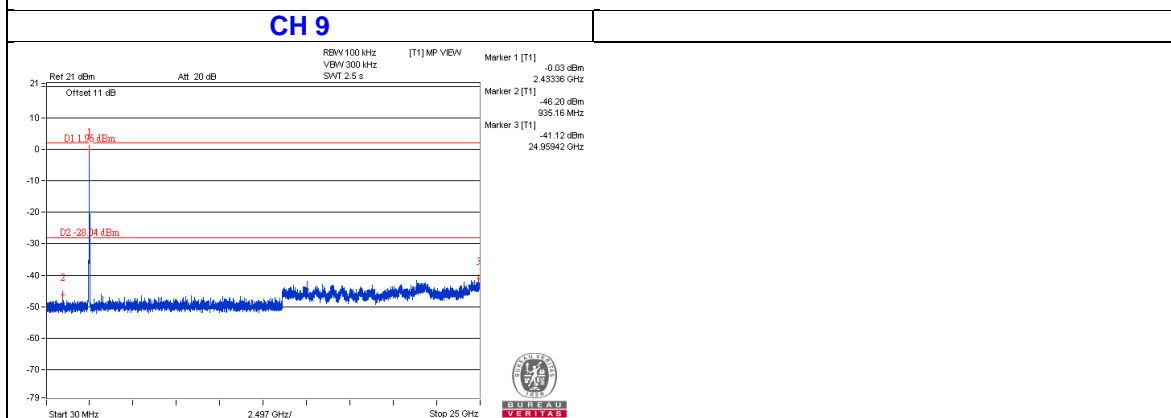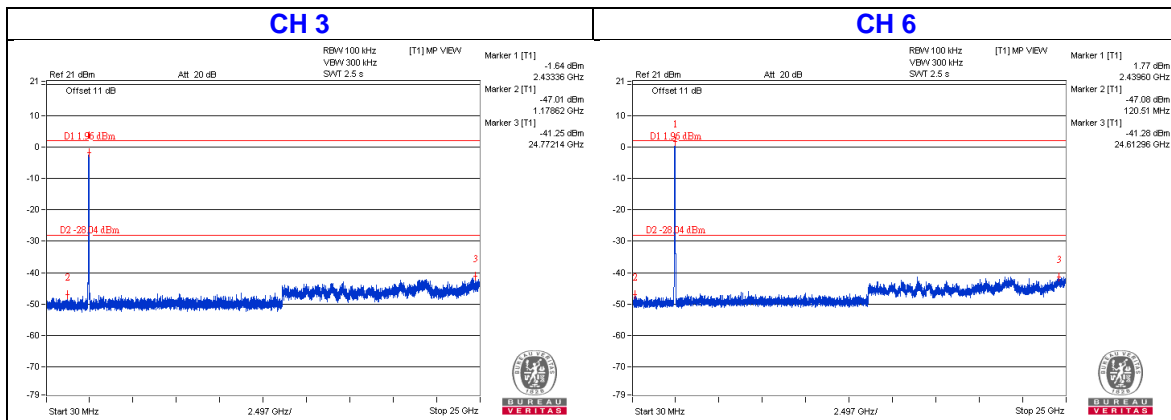

CHAIN 1

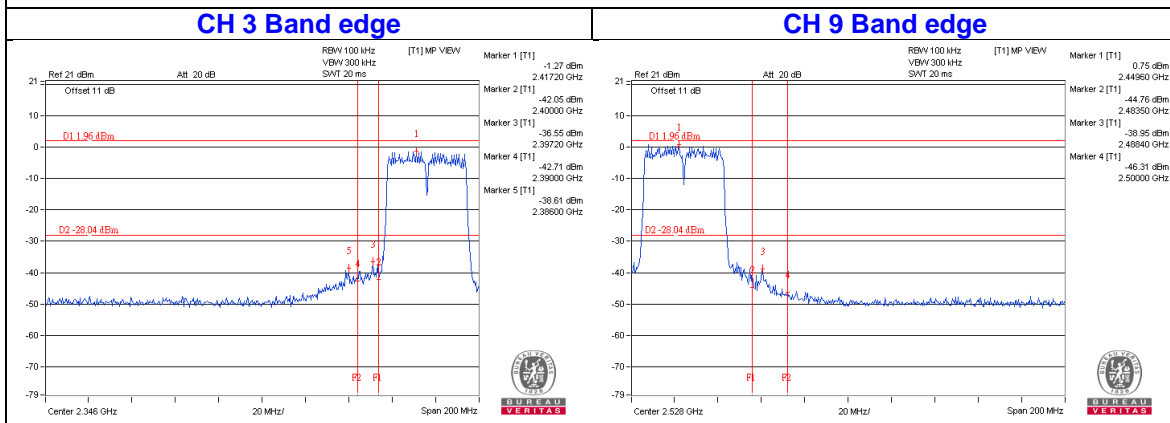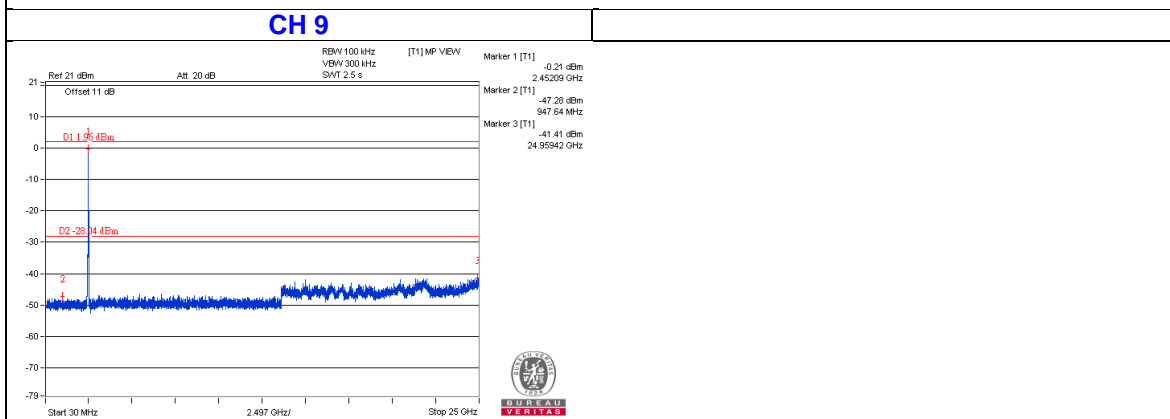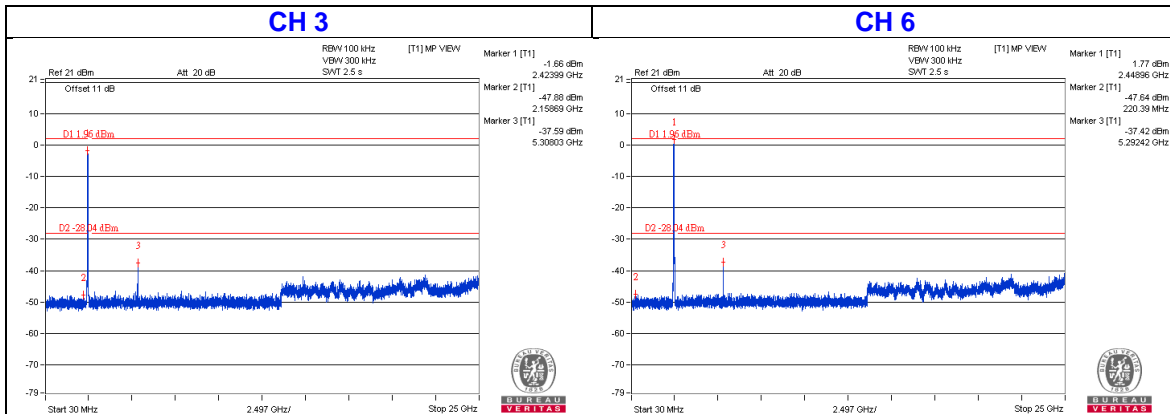

CHAIN 2

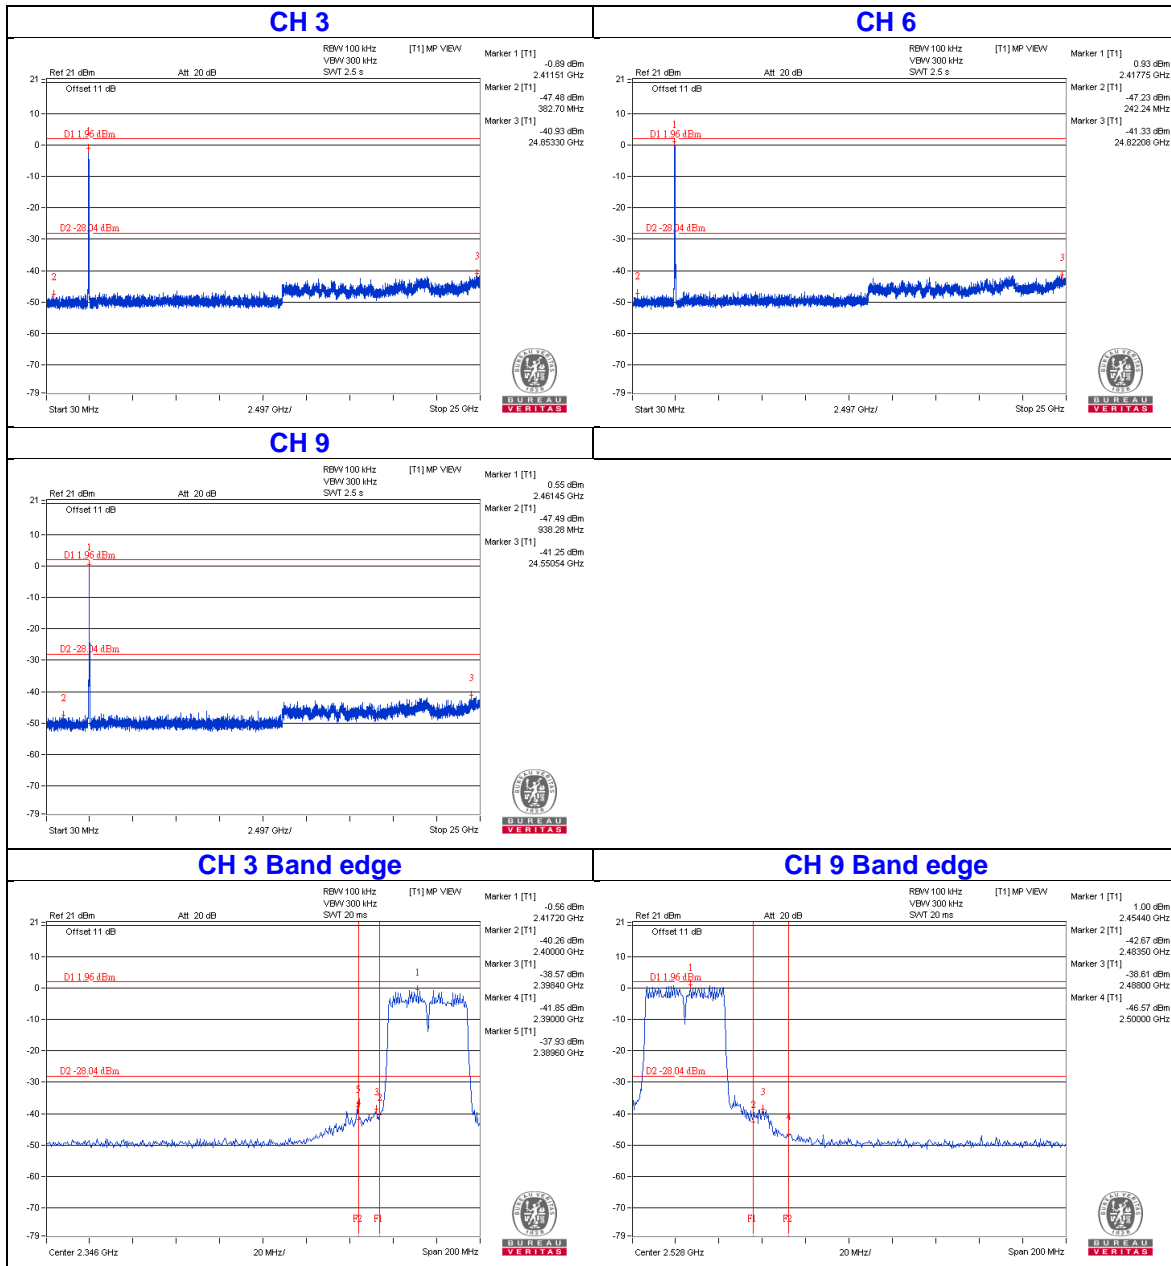

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---