

## FCC Test Report

**Report No.:** RF200615C06

**FCC ID:** H8NTN502A1

**Test Model:** TN502A1

**Series Model:** TN502A1(WOS), access, access(WOS) (refer to item 3.1 for more details)

**Received Date:** Apr. 04, 2020

**Test Date:** Apr. 30 ~ Oct. 23, 2020

**Issued Date:** Oct. 27, 2020

**Applicant:** ASKEY COMPUTER CORP.

**Address:** 10F, NO.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY  
23585, TAIWAN, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards and References.....	14
<b>4 Test Types and Results</b> .....	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	36
4.2.1 Limits of Conducted Emission Measurement.....	36
4.2.2 Test Instruments.....	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard.....	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results.....	38
4.3 6dB Bandwidth Measurement.....	44
4.3.1 Limits of 6dB Bandwidth Measurement.....	44
4.3.2 Test Setup.....	44
4.3.3 Test Instruments.....	44
4.3.4 Test Procedure.....	44
4.3.5 Deviation from Test Standard.....	44
4.3.6 EUT Operating Conditions.....	44
4.3.7 Test Result.....	45
4.4 Conducted Output Power Measurement.....	47
4.4.1 Limits of Conducted Output Power Measurement.....	47
4.4.2 Test Setup.....	47
4.4.3 Test Instruments.....	47
4.4.4 Test Procedures.....	47
4.4.5 Deviation from Test Standard.....	47
4.4.6 EUT Operating Conditions.....	47
4.4.7 Test Results.....	48
4.5 Power Spectral Density Measurement.....	50
4.5.1 Limits of Power Spectral Density Measurement.....	50
4.5.2 Test Setup.....	50
4.5.3 Test Instruments.....	50
4.5.4 Test Procedure.....	50
4.5.5 Deviation from Test Standard.....	50
4.5.6 EUT Operating Condition.....	50

4.5.7 Test Results .....	51
4.6 Conducted Out of Band Emission Measurement.....	53
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments .....	53
4.6.4 Test Procedure .....	53
4.6.5 Deviation from Test Standard .....	53
4.6.6 EUT Operating Condition .....	53
4.6.7 Test Results .....	53
<b>5 Pictures of Test Arrangements.....</b>	<b>58</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>59</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200615C06	Original release	Oct. 27, 2020

## 1 Certificate of Conformity

**Product:** TurboFon E4 / Handheld Device (refer to item 3.1 for more details)

**Brand:** TURBONET / Copernic (refer to item 3.1 for more details)

**Test Model:** TN502A1

**Series Model:** TN502A1(WOS), access, access(WOS) (refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** ASKEY COMPUTER CORP.

**Test Date:** Apr. 30 ~ Oct. 23, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Oct. 27, 2020  
Polly Chen / Specialist

**Approved by :**  , **Date:** Oct. 27, 2020  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -16.05dB at 0.39135MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is Spring not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	TurboFon E4 / Handheld Device (Refer to Note)
Brand	TURBONET / Coppernic (Refer to Note)
Test Model	TN502A1
Series Model	TN502A1(WOS), access, access(WOS)
Model Difference	Refer to Note
Sample Status	Engineering sample
Power Supply Rating	3.85Vdc (from battery) 5.0Vdc / 9.0Vdc / 12.0Vdc (from adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7
Output Power	196.336mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	0.95m shielded USB cable without core

Note:

1. All models are listed as below. Model TN502A1 is the representative for final test.

Brand	Product name	Model	Difference	
TURBONET	TurboFon E4	TN502A1	With scanner	-
		TN502A1(WOS)	Without scanner	-
Coppernic	Handheld Device	access	With scanner	Model: access is electrically identical to TN502A1, different brands and model names are for marketing purpose.
		access(WOS)	Without scanner	Model: access(WOS) is electrically identical to TN502A1(WOS), different brands and model names are for marketing purpose.

2. The EUT provide 1 completed transmitter and 1 receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX
802.11n (HT40)	1TX

3. The EUT consumes power from the following accessory devices.

Battery	
Brand	ETI
Model	BP19-002710
Rating	3.85Vdc, 4000mAh, 15.4Wh

Adapter	
Brand	CHANNEL WELL TECHNOLOGY
Model	2ACP0183C
Input Power	100-240Vac~0.5A , 50/60Hz
Output Power	5.0Vdc / 3.0A 15.0W / 9.0Vdc / 2.0A 18.0W / 12.0Vdc / 1.5A 18.0W

Item	Brand	Model	Description
Docking Station 1 (optional)	TURBONET	DS12310	The models and brand names of docking station are electrically identical, different models and brand names are for marketing purpose. The docking station 1 was chosen for final test.
Docking Station 2 (optional)	COPPERNIC	DS-ACCESS	
Data Cable Supplied	0.95m shielding USB cable without core		
Adapter (For docking use)			
Brand	Sunny ELECTRONICS CORP.		
Model	SYS1541-2412		
Input Power	100-240Vac, 1.0A, 50/60Hz		
Output Power	+12Vdc, 2A		
Power line	1.5m power cable without core		

4. The EUT uses following antennas.

Ant. Type	PIFA						
Ant. Connector	Spring						
Ant. 1 (WLAN)							
Frequency (MHz)	2400	2450	2500	5150	5350	5725	5825
Peak Gain (dBi)	0.76	1.31	1.46	1.07	1.46	2.23	1.65

\* The max. gain was chosen for final tests.

5. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT with Adapter
B	-	-	√	-	EUT with Notebook
C	-	√	√	-	EUT with Docking Station

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane for mode A, B.**
- "-": Means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, C	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B, C	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu
RE<1G	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu
PLC	23 deg. C, 67% RH 25 deg. C, 69% RH	120Vac, 60Hz	Adair Peng, Luis Lee
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Gavin Wu

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.


Duty cycle of test signal is  $< 98\%$ , duty factor shall be considered.

802.11b: Duty cycle =  $12.425/12.539 = 0.991$

802.11g: Duty cycle =  $2.064/2.172 = 0.950$ , Duty factor =  $10 * \log(1/0.950) = 0.22$

802.11n (HT20): Duty cycle =  $1.921/2.029 = 0.947$ , Duty factor =  $10 * \log(1/0.947) = 0.24$

802.11n (HT40): Duty cycle =  $0.946/1.053 = 0.898$ , Duty factor =  $10 * \log(1/0.898) = 0.47$

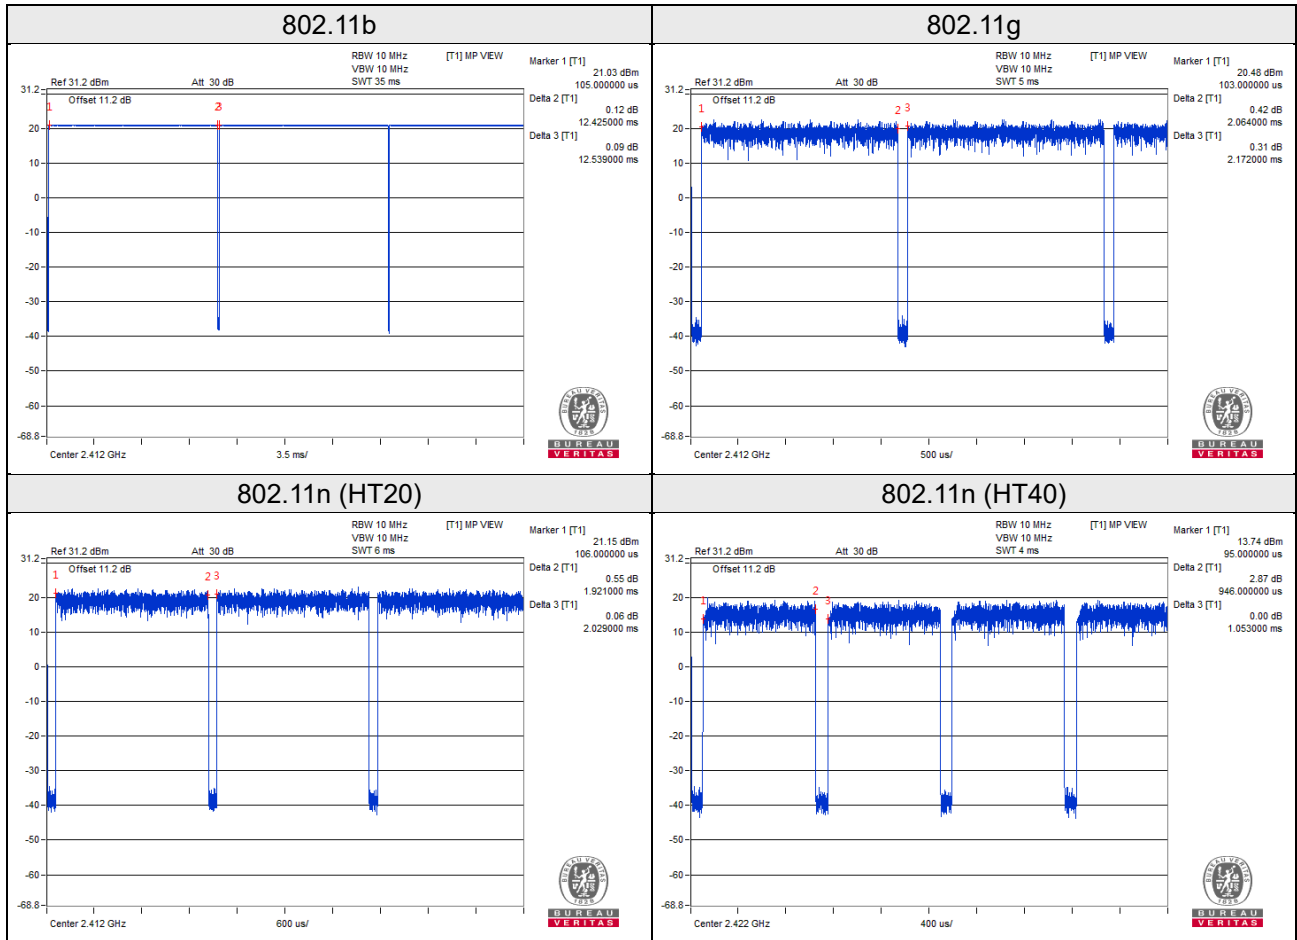

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	80Q7	PF0KUGU6	FCC DoC Approved	-
B.	Docking Station	TURBONET	DS12310	NA	NA	Provided by client
C.	Adapter	Sunny ELECTRONICS CORP.	SYS1541-2412	NA	NA	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	0.95	Y	0	Accessory
2.	Power cable	1	1.5	-	0	Provided by client
3.	USB cable	1	0.95	Y	0	Accessory of cradle

#### 3.4.1 Configuration of System under Test


Mode A

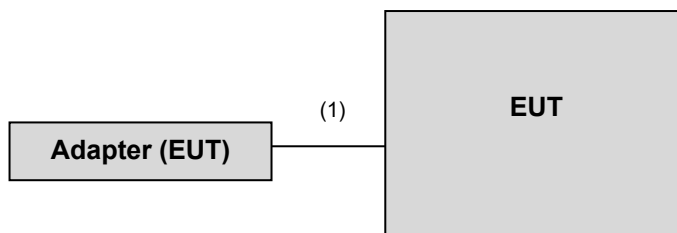

Mode B

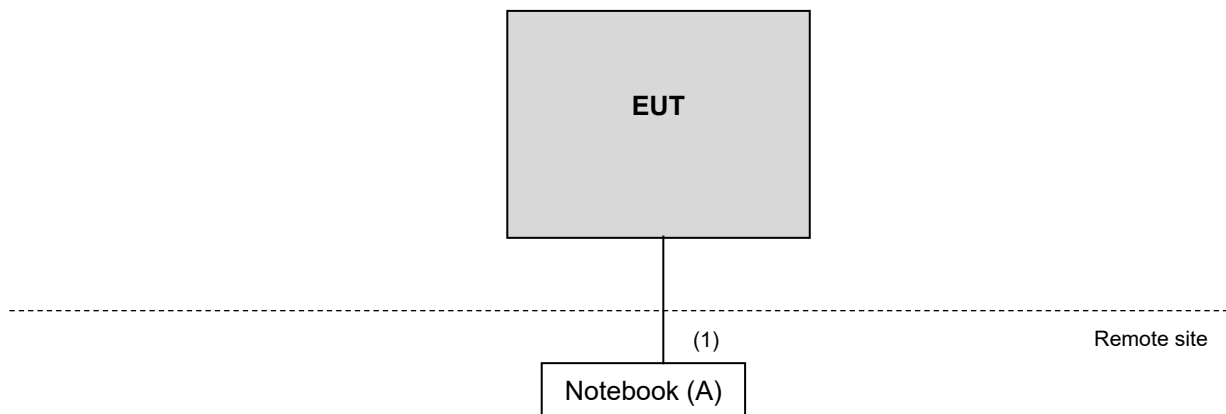

Mode C

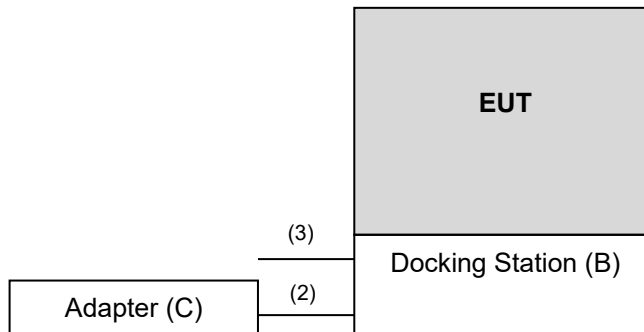

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2019	Dec. 30, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 04, 2019	Jun. 03, 2020
			Jun. 09, 2020	Jun. 08, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 11, 2019	Nov. 10, 2020
HORN Antenna SCHWARZBECK	9120D	209	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
			Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 23, 2020	Mar. 22, 2021
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Aug. 20, 2019	Aug. 19, 2020
			Aug. 16, 2020	Aug. 15, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190 004/MY55190007/MY55 210005	Jul. 15, 2019	Jul. 14, 2020
			Jul. 13, 2020	Jul. 12, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.



### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.  
(802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g: RBW = 1MHz, VBW = 1kHz; 802.11n (HT20): RBW = 1MHz, VBW = 1kHz; 802.11n (HT40): RBW = 1MHz, VBW = 3kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

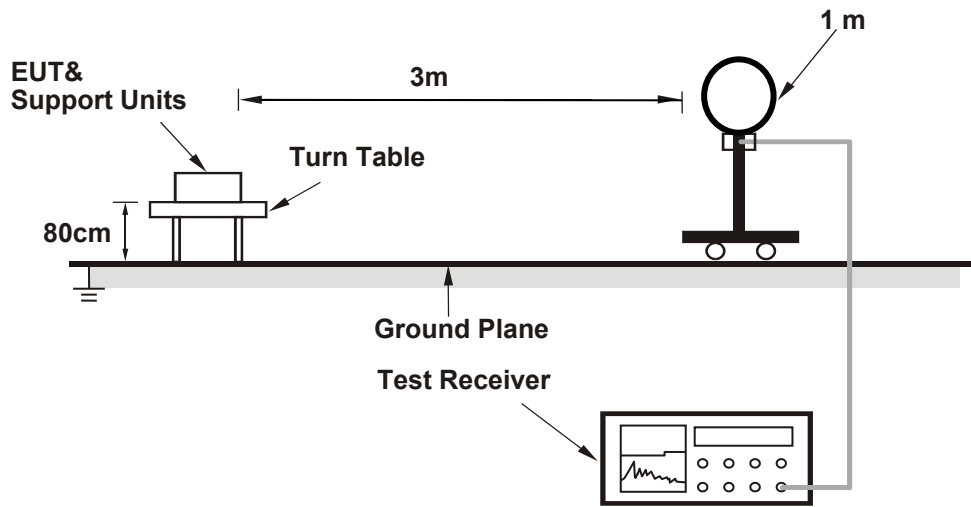

##### For Radiated emission 30MHz to 1GHz

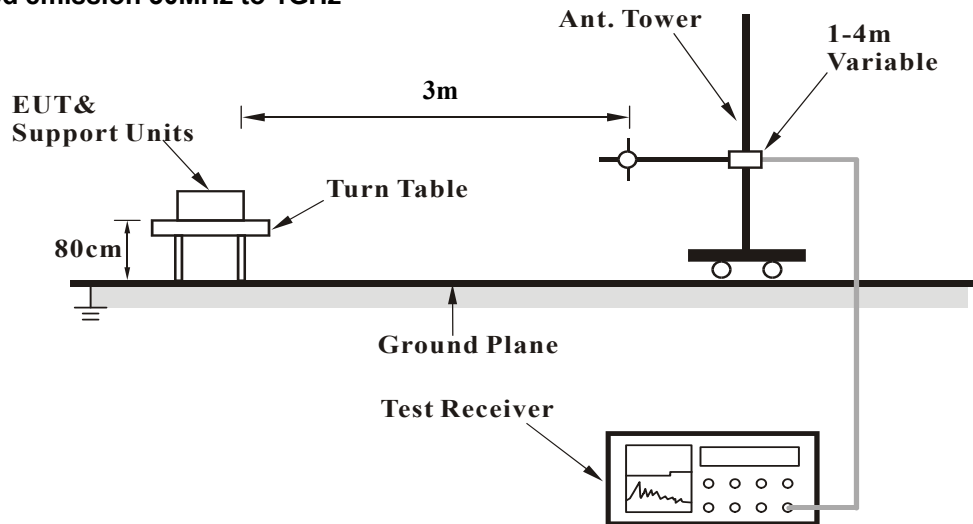

**For Radiated emission above 1GHz**

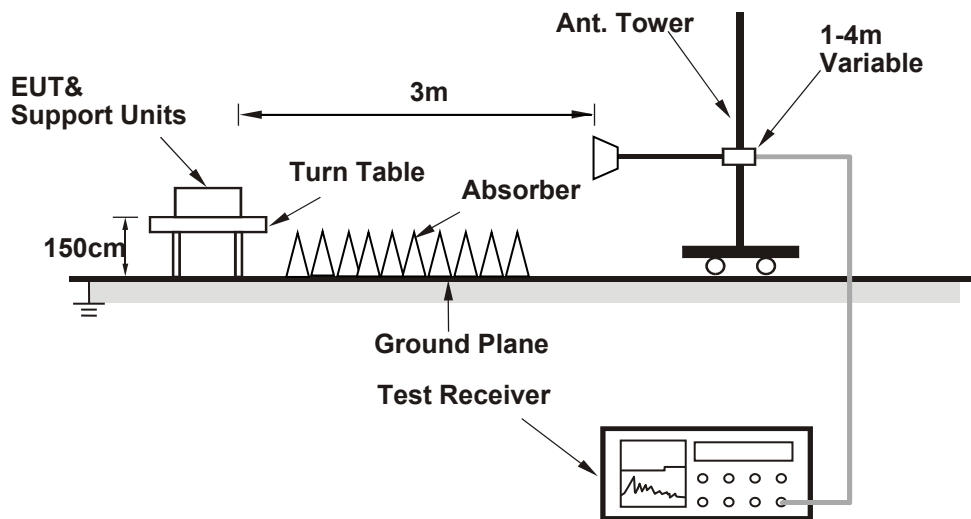

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.1.6 EUT Operating Conditions**

- a. Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	2.14 H	13	23.1	32.3
2	2390.00	49.2 AV	54.0	-4.8	2.14 H	13	16.9	32.3
3	*2412.00	112.8 PK			2.14 H	13	80.5	32.3
4	*2412.00	110.3 AV			2.14 H	13	78.0	32.3
5	4824.00	49.2 PK	74.0	-24.8	2.01 H	231	45.8	3.4
6	4824.00	45.7 AV	54.0	-8.3	2.01 H	231	42.3	3.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.3 PK	74.0	-20.7	1.08 V	351	21.0	32.3
2	2390.00	43.8 AV	54.0	-10.2	1.08 V	351	11.5	32.3
3	*2412.00	105.2 PK			1.08 V	351	72.9	32.3
4	*2412.00	102.9 AV			1.08 V	351	70.6	32.3
5	4824.00	50.7 PK	74.0	-23.3	1.37 V	0	47.3	3.4
6	4824.00	47.9 AV	54.0	-6.1	1.37 V	0	44.5	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.5 PK			1.64 H	14	81.2	32.3
2	*2437.00	111.0 AV			1.64 H	14	78.7	32.3
3	4874.00	47.7 PK	74.0	-26.3	2.01 H	231	44.0	3.7
4	4874.00	44.3 AV	54.0	-9.7	2.01 H	231	40.6	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			1.06 V	332	74.8	32.3
2	*2437.00	105.0 AV			1.06 V	332	72.7	32.3
3	4874.00	50.1 PK	74.0	-23.9	1.91 V	176	46.4	3.7
4	4874.00	47.3 AV	54.0	-6.7	1.91 V	176	43.6	3.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.8 PK			1.59 H	14	79.4	32.4
2	*2462.00	109.2 AV			1.59 H	14	76.8	32.4
3	2483.50	60.1 PK	74.0	-13.9	1.59 H	14	27.7	32.4
4	2483.50	52.9 AV	54.0	-1.1	1.59 H	14	20.5	32.4
5	4924.00	49.0 PK	74.0	-25.0	2.01 H	231	45.2	3.8
6	4924.00	45.2 AV	54.0	-8.8	2.01 H	231	41.4	3.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.6 PK			1.01 V	349	71.2	32.4
2	*2462.00	101.6 AV			1.01 V	349	69.2	32.4
3	2483.50	53.6 PK	74.0	-20.4	1.01 V	349	21.2	32.4
4	2483.50	46.0 AV	54.0	-8.0	1.01 V	349	13.6	32.4
5	4924.00	50.4 PK	74.0	-23.6	1.00 V	320	46.6	3.8
6	4924.00	46.4 AV	54.0	-7.6	1.00 V	320	42.6	3.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	2.14 H	13	29.6	32.3
2	2390.00	51.5 AV	54.0	-2.5	2.14 H	13	19.2	32.3
3	*2412.00	111.3 PK			2.14 H	13	79.0	32.3
4	*2412.00	103.8 AV			2.14 H	13	71.5	32.3
5	4824.00	48.3 PK	74.0	-25.7	1.55 H	244	44.9	3.4
6	4824.00	40.7 AV	54.0	-13.3	1.55 H	244	37.3	3.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	1.08 V	351	23.6	32.3
2	2390.00	45.6 AV	54.0	-8.4	1.08 V	351	13.3	32.3
3	*2412.00	103.4 PK			1.08 V	351	71.1	32.3
4	*2412.00	96.4 AV			1.08 V	351	64.1	32.3
5	4824.00	48.0 PK	74.0	-26.0	1.57 V	334	44.6	3.4
6	4824.00	40.7 AV	54.0	-13.3	1.57 V	334	37.3	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.7 PK			2.14 H	13	81.4	32.3
2	*2437.00	106.3 AV			2.14 H	13	74.0	32.3
3	4874.00	47.0 PK	74.0	-27.0	1.47 H	206	43.3	3.7
4	4874.00	40.5 AV	54.0	-13.5	1.47 H	206	36.8	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.0 PK			1.06 V	332	76.7	32.3
2	*2437.00	101.6 AV			1.06 V	332	69.3	32.3
3	4874.00	46.4 PK	74.0	-27.6	1.78 V	208	42.7	3.7
4	4874.00	40.6 AV	54.0	-13.4	1.78 V	208	36.9	3.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.1 PK			1.59 H	14	73.7	32.4
2	*2462.00	99.1 AV			1.59 H	14	66.7	32.4
3	2483.50	63.8 PK	74.0	-10.2	1.59 H	14	31.4	32.4
4	2483.50	52.9 AV	54.0	-1.1	1.59 H	14	20.5	32.4
5	4874.00	46.2 PK	74.0	-27.8	1.95 H	33	42.5	3.7
6	4874.00	40.8 AV	54.0	-13.2	1.95 H	33	37.1	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.9 PK			1.01 V	349	68.5	32.4
2	*2462.00	94.0 AV			1.01 V	349	61.6	32.4
3	2483.50	58.8 PK	74.0	-15.2	1.01 V	349	26.4	32.4
4	2483.50	48.1 AV	54.0	-5.9	1.01 V	349	15.7	32.4
5	4874.00	47.5 PK	74.0	-26.5	1.34 V	206	43.8	3.7
6	4874.00	40.7 AV	54.0	-13.3	1.34 V	206	37.0	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	2.14 H	13	31.0	32.3
2	2390.00	52.0 AV	54.0	-2.0	2.14 H	13	19.7	32.3
3	*2412.00	110.1 PK			2.14 H	13	77.8	32.3
4	*2412.00	102.8 AV			2.14 H	13	70.5	32.3
5	4824.00	47.3 PK	74.0	-26.7	1.85 H	5	43.9	3.4
6	4824.00	40.8 AV	54.0	-13.2	1.85 H	5	37.4	3.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.08 V	351	23.8	32.3
2	2390.00	46.0 AV	54.0	-8.0	1.08 V	351	13.7	32.3
3	*2412.00	102.7 PK			1.08 V	351	70.4	32.3
4	*2412.00	95.7 AV			1.08 V	351	63.4	32.3
5	4824.00	47.3 PK	74.0	-26.7	1.47 V	306	43.9	3.4
6	4824.00	40.6 AV	54.0	-13.4	1.47 V	306	37.2	3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.8 PK			1.64 H	14	83.5	32.3
2	*2437.00	107.6 AV			1.64 H	14	75.3	32.3
3	4874.00	46.7 PK	74.0	-27.3	1.74 H	108	43.0	3.7
4	4874.00	40.6 AV	54.0	-13.4	1.74 H	108	36.9	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.8 PK			1.06 V	332	76.5	32.3
2	*2437.00	101.2 AV			1.06 V	332	68.9	32.3
3	4874.00	46.6 PK	74.0	-27.4	1.36 V	320	42.9	3.7
4	4874.00	40.8 AV	54.0	-13.2	1.36 V	320	37.1	3.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.9 PK			1.59 H	14	72.5	32.4
2	*2462.00	97.5 AV			1.59 H	14	65.1	32.4
3	2483.50	63.5 PK	74.0	-10.5	1.59 H	14	31.1	32.4
4	2483.50	52.2 AV	54.0	-1.8	1.59 H	14	19.8	32.4
5	4924.00	47.5 PK	74.0	-26.5	1.88 H	5	43.7	3.8
6	4924.00	40.8 AV	54.0	-13.2	1.88 H	5	37.0	3.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.5 PK			1.01 V	349	67.1	32.4
2	*2462.00	92.3 AV			1.01 V	349	59.9	32.4
3	2483.50	57.2 PK	74.0	-16.8	1.01 V	349	24.8	32.4
4	2483.50	47.0 AV	54.0	-7.0	1.01 V	349	14.6	32.4
5	4924.00	47.7 PK	74.0	-26.3	1.34 V	185	43.9	3.8
6	4924.00	40.9 AV	54.0	-13.1	1.34 V	185	37.1	3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	2.14 H	13	28.4	32.3
2	2390.00	52.2 AV	54.0	-1.8	2.14 H	13	19.9	32.3
3	*2422.00	106.9 PK			2.14 H	13	74.6	32.3
4	*2422.00	99.8 AV			2.14 H	13	67.5	32.3
5	4844.00	47.2 PK	74.0	-26.8	1.74 H	25	43.7	3.5
6	4844.00	40.6 AV	54.0	-13.4	1.74 H	25	37.1	3.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.2 PK	74.0	-18.8	1.08 V	332	22.9	32.3
2	2390.00	47.3 AV	54.0	-6.7	1.08 V	332	15.0	32.3
3	*2422.00	99.6 PK			1.08 V	322	67.3	32.3
4	*2422.00	92.8 AV			1.08 V	322	60.5	32.3
5	4844.00	47.0 PK	74.0	-27.0	1.48 V	244	43.5	3.5
6	4844.00	40.5 AV	54.0	-13.5	1.48 V	244	37.0	3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.9 PK			2.14 H	13	72.6	32.3
2	*2437.00	97.8 AV			2.14 H	13	65.5	32.3
3	2483.50	63.7 PK	74.0	-10.3	2.14 H	13	31.3	32.4
<b>4</b>	<b>2483.50</b>	<b>53.0 AV</b>	<b>54.0</b>	<b>-1.0</b>	<b>2.14 H</b>	<b>13</b>	<b>20.6</b>	<b>32.4</b>
5	4874.00	46.8 PK	74.0	-27.2	1.85 H	247	43.1	3.7
6	4874.00	40.6 AV	54.0	-13.4	1.85 H	247	36.9	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.7 PK			1.06 V	332	67.4	32.3
2	*2437.00	92.5 AV			1.06 V	332	60.2	32.3
3	2483.50	57.9 PK	74.0	-16.1	1.06 V	332	25.5	32.4
4	2483.50	46.0 AV	54.0	-8.0	1.06 V	332	13.6	32.4
5	4874.00	46.9 PK	74.0	-27.1	1.65 V	322	43.2	3.7
6	4874.00	40.7 AV	54.0	-13.3	1.65 V	322	37.0	3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.9 PK			2.29 H	55	68.5	32.4
2	*2452.00	94.2 AV			2.29 H	55	61.8	32.4
3	2483.50	62.4 PK	74.0	-11.6	2.29 H	55	30.0	32.4
4	2483.50	52.4 AV	54.0	-1.6	2.29 H	55	20.0	32.4
5	4904.00	47.5 PK	74.0	-26.5	1.63 H	333	43.8	3.7
6	4904.00	40.7 AV	54.0	-13.3	1.63 H	333	37.0	3.7

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.7 PK			1.01 V	349	63.3	32.4
2	*2452.00	88.7 AV			1.01 V	349	56.3	32.4
3	2483.50	58.0 PK	74.0	-16.0	1.01 V	349	25.6	32.4
4	2483.50	47.8 AV	54.0	-6.2	1.01 V	349	15.4	32.4
5	4904.00	47.2 PK	74.0	-26.8	1.57 V	7	43.5	3.7
6	4904.00	40.6 AV	54.0	-13.4	1.57 V	7	36.9	3.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

Below 1GHz worst-case data:


802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.68	25.8 QP	40.0	-14.2	1.49 H	271	34.6	-8.8
2	76.39	22.3 QP	40.0	-17.7	1.49 H	156	34.7	-12.4
3	104.51	21.0 QP	43.5	-22.5	1.50 H	323	33.4	-12.4
4	132.62	27.7 QP	43.5	-15.8	1.49 H	72	37.4	-9.7
5	153.71	29.3 QP	43.5	-14.2	1.49 H	98	37.9	-8.6
6	202.91	31.1 QP	43.5	-12.4	1.00 H	73	42.8	-11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

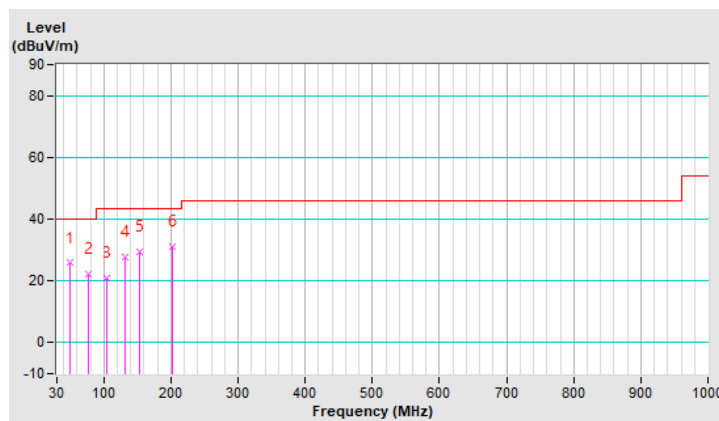




CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	33.9 QP	40.0	-6.1	1.49 V	281	44.3	-10.4
2	50.42	31.0 QP	40.0	-9.0	1.48 V	82	39.7	-8.7
3	104.51	27.4 QP	43.5	-16.1	1.00 V	162	39.8	-12.4
4	138.25	27.5 QP	43.5	-16.0	1.00 V	354	36.7	-9.2
5	153.71	28.6 QP	43.5	-14.9	1.00 V	264	37.2	-8.6
6	585.29	28.9 QP	46.0	-17.1	1.49 V	307	28.3	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

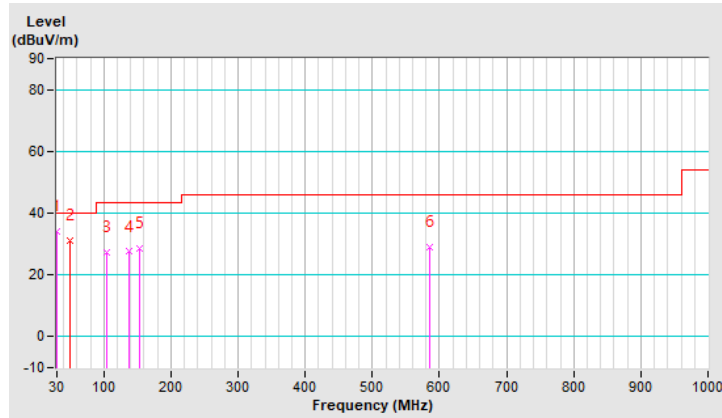


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	25.2 QP	40.0	-14.8	1.00 H	258	35.8	-10.6
2	49.68	25.5 QP	40.0	-14.5	2.00 H	232	34.6	-9.1
3	111.54	24.5 QP	43.5	-19.0	2.00 H	118	36.3	-11.8
4	138.25	23.6 QP	43.5	-19.9	1.50 H	6	32.7	-9.1
5	474.23	27.7 QP	46.0	-18.3	1.00 H	302	30.3	-2.6
6	710.41	33.7 QP	46.0	-12.3	1.50 H	4	31.9	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

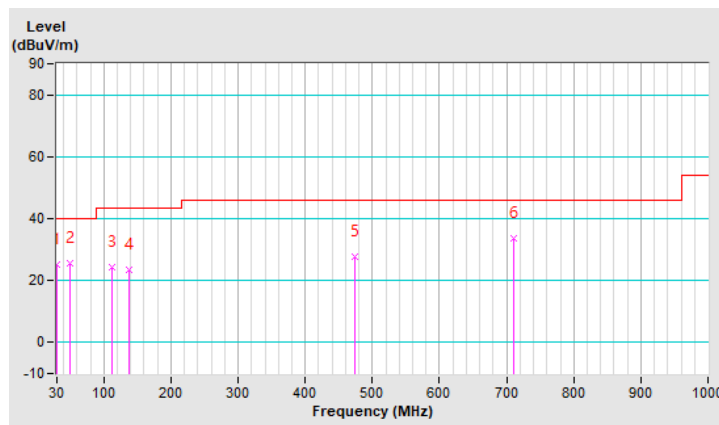


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	36.6 QP	40.0	-3.4	1.49 V	338	47.2	-10.6
2	83.42	25.6 QP	40.0	-14.4	1.00 V	124	39.6	-14.0
3	104.51	29.2 QP	43.5	-14.3	1.00 V	188	41.6	-12.4
4	138.25	29.8 QP	43.5	-13.7	1.00 V	135	38.9	-9.1
5	157.93	27.9 QP	43.5	-15.6	2.00 V	46	36.2	-8.3
6	242.28	21.7 QP	46.0	-24.3	1.49 V	8	30.9	-9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

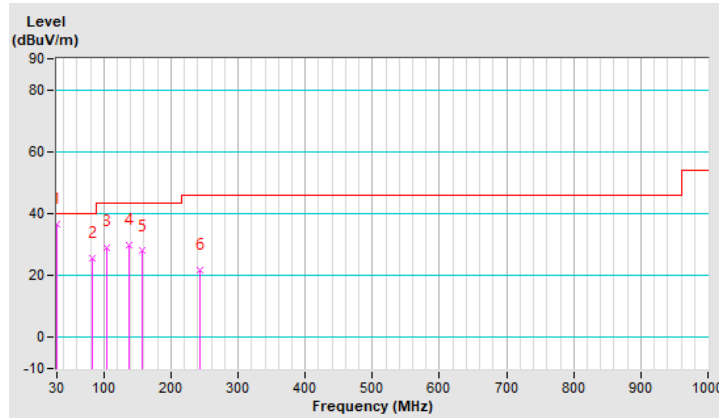

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Tested date: Apr. 30 ~ Oct. 23, 2020

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 11, 2019	Dec. 10, 2020
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2019	Sep. 04, 2020
			Sep. 04, 2020	Sep. 03, 2021
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 20, 2020	Feb. 19, 2021
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 22, 2019	Aug. 21, 2020
			Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).

3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

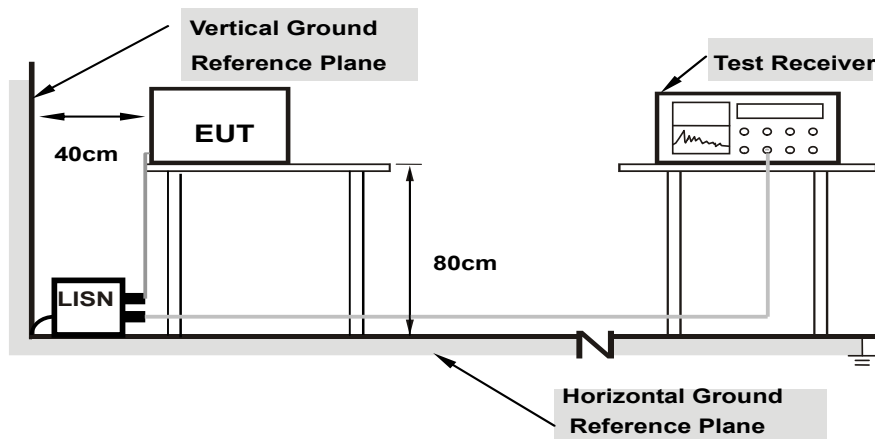

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results

Worst-case data:


802.11n (HT20)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.63	29.56	18.95	39.19	28.58	64.96
2	0.19215	9.62	28.36	15.88	37.98	25.50	63.94	53.94	-25.96	-28.44
3	0.63379	9.66	27.06	19.20	36.72	28.86	56.00	46.00	-19.28	-17.14
4	0.87000	9.67	21.67	12.50	31.34	22.17	56.00	46.00	-24.66	-23.83
5	1.57400	9.71	19.49	11.16	29.20	20.87	56.00	46.00	-26.80	-25.13
6	8.75800	9.85	17.95	9.18	27.80	19.03	60.00	50.00	-32.20	-30.97

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

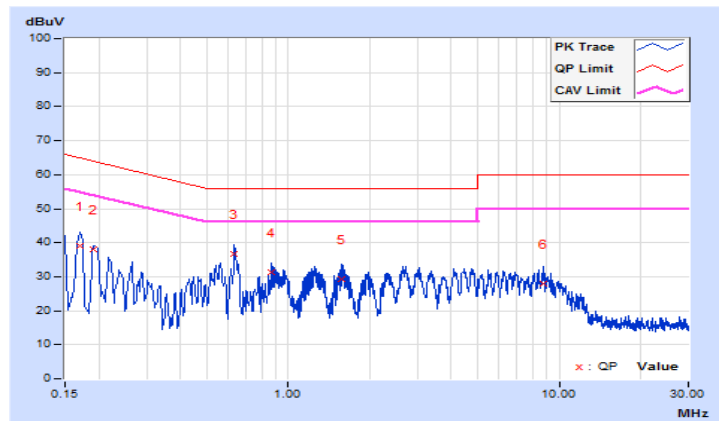


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.65	28.18	13.81	37.83	23.46	64.96
2	0.19400	9.64	27.07	12.58	36.71	22.22	63.86	53.86	-27.15	-31.64
3	0.63714	9.68	17.95	9.13	27.63	18.81	56.00	46.00	-28.37	-27.19
4	1.32200	9.72	11.09	2.95	20.81	12.67	56.00	46.00	-35.19	-33.33
5	3.10200	9.79	10.21	2.63	20.00	12.42	56.00	46.00	-36.00	-33.58
6	4.67000	9.83	17.74	5.30	27.57	15.13	56.00	46.00	-28.43	-30.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

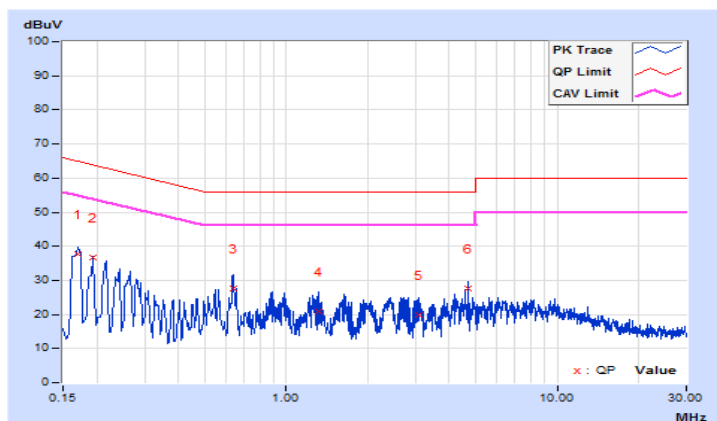


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.63	36.19	20.37	45.82	30.00	64.96
2	0.19780	9.62	31.97	14.78	41.59	24.40	63.70	53.70	-22.11	-29.30
3	0.52984	9.66	20.08	11.00	29.74	20.66	56.00	46.00	-26.26	-25.34
4	2.33000	9.74	18.22	13.86	27.96	23.60	56.00	46.00	-28.04	-22.40
5	13.73400	9.89	13.14	8.30	23.03	18.19	60.00	50.00	-36.97	-31.81
6	18.22987	9.91	17.68	12.51	27.59	22.42	60.00	50.00	-32.41	-27.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

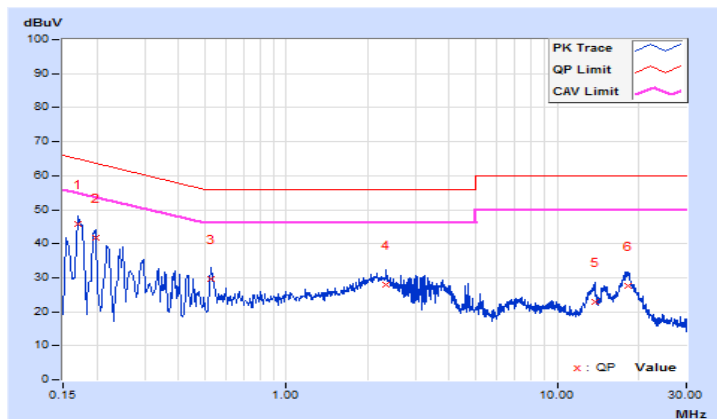




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16600	9.65	36.47	20.56	46.12	30.21	65.16
2	0.19400	9.64	32.37	17.83	42.01	27.47	63.86	53.86	-21.85	-26.39
3	0.53800	9.68	21.23	11.69	30.91	21.37	56.00	46.00	-25.09	-24.63
4	2.36200	9.77	19.94	15.41	29.71	25.18	56.00	46.00	-26.29	-20.82
5	13.28200	9.96	17.06	10.37	27.02	20.33	60.00	50.00	-32.98	-29.67
6	17.98600	10.01	15.83	10.65	25.84	20.66	60.00	50.00	-34.16	-29.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

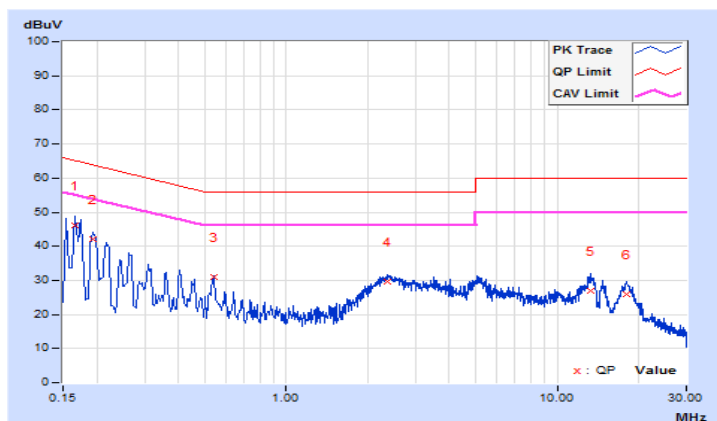


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.82	36.28	19.96	46.10	29.78	66.00
2	0.16200	9.83	32.58	15.92	42.41	25.75	65.36	55.36	-22.95	-29.61
3	0.18600	9.84	29.22	12.81	39.06	22.65	64.21	54.21	-25.15	-31.56
4	0.21000	9.85	25.47	10.19	35.32	20.04	63.21	53.21	-27.89	-33.17
5	0.23785	9.85	21.88	7.48	31.73	17.33	62.17	52.17	-30.44	-34.84
<b>6</b>	<b>0.39135</b>	<b>9.87</b>	<b>27.12</b>	<b>22.11</b>	<b>36.99</b>	<b>31.98</b>	<b>58.03</b>	<b>48.03</b>	<b>-21.04</b>	<b>-16.05</b>

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

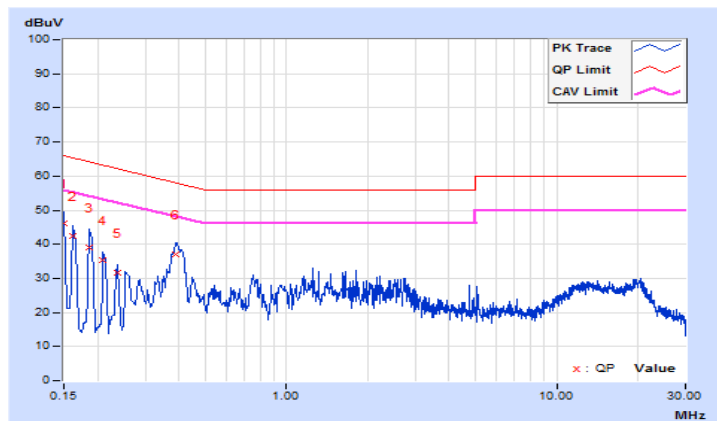


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.84	35.44	20.38	45.28	30.22	65.78
2	0.16600	9.84	31.59	16.35	41.43	26.19	65.16	55.16	-23.73	-28.97
3	0.19400	9.85	27.92	13.08	37.77	22.93	63.86	53.86	-26.09	-30.93
4	0.23785	9.86	22.72	10.35	32.58	20.21	62.17	52.17	-29.59	-31.96
5	0.37800	9.89	26.86	19.81	36.75	29.70	58.32	48.32	-21.57	-18.62
6	0.54200	9.91	19.42	12.82	29.33	22.73	56.00	46.00	-26.67	-23.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

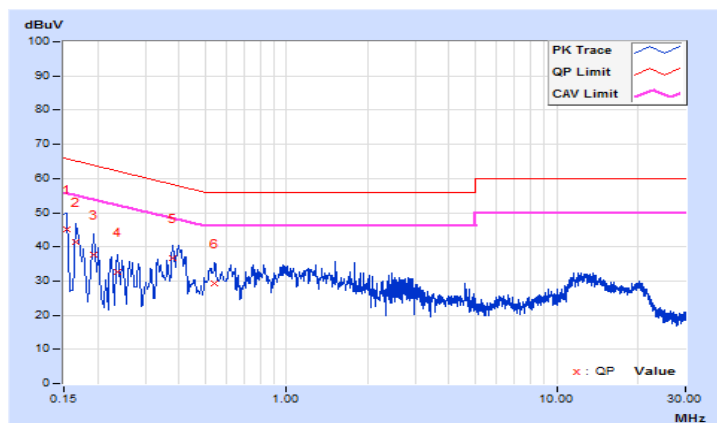


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

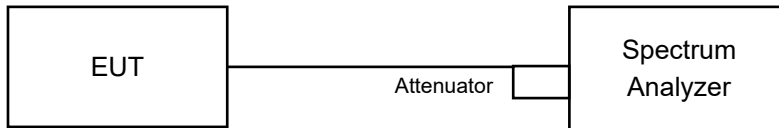

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	7.57	0.5	Pass
6	2437	8.06	0.5	Pass
11	2462	7.59	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.45	0.5	Pass
6	2437	15.36	0.5	Pass
11	2462	15.19	0.5	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.01	0.5	Pass
6	2437	15.47	0.5	Pass
11	2462	15.14	0.5	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
3	2422	35.32	0.5	Pass
6	2437	35.38	0.5	Pass
9	2452	35.45	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

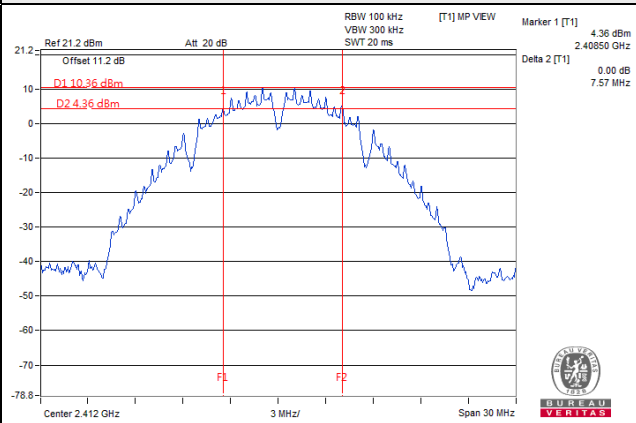


#### 802.11g

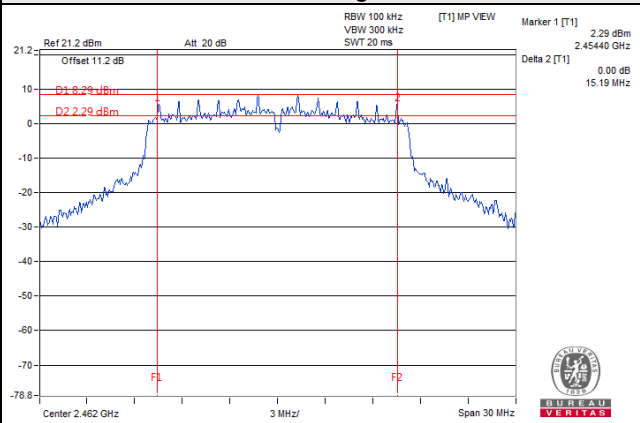

#### 802.11n (HT20)

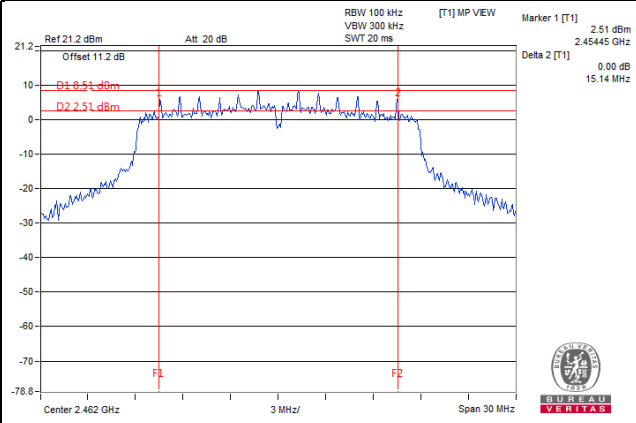

#### 802.11n (HT40)

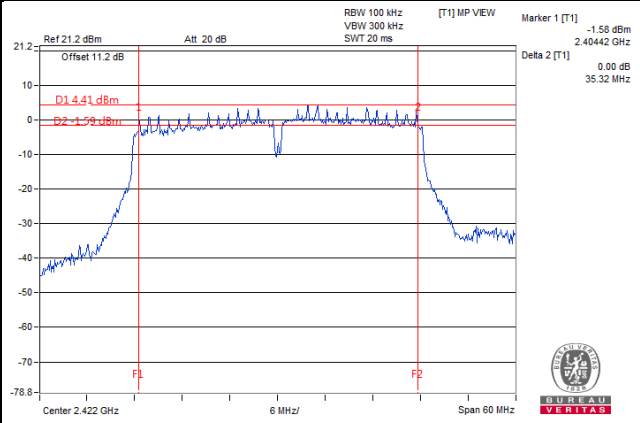


## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup

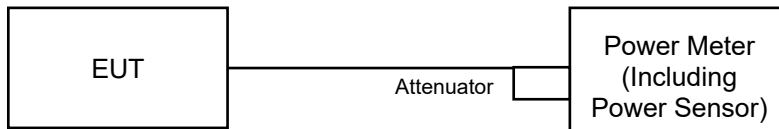

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

#### Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

#### Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### Peak Power

###### 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	121.899	20.86	30.00	Pass
6	2437	114.025	20.57	30.00	Pass
11	2462	120.781	20.82	30.00	Pass

###### 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	178.649	22.52	30.00	Pass
6	2437	183.654	22.64	30.00	Pass
11	2462	181.134	22.58	30.00	Pass

###### 802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	177.011	22.48	30.00	Pass
6	2437	173.780	22.40	30.00	Pass
11	2462	184.077	22.65	30.00	Pass

###### 802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
3	2422	192.752	22.85	30.00	Pass
6	2437	190.985	22.81	30.00	Pass
9	2452	<b>196.336</b>	22.93	30.00	Pass



## Average Power

### 802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	62.806	17.98
6	2437	58.884	17.70
11	2462	61.802	17.91

### 802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	60.814	17.84
6	2437	62.661	17.97
11	2462	61.660	17.90

### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	60.256	17.80
6	2437	59.841	17.77
11	2462	61.660	17.90

### 802.11n (HT40)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	55.335	17.43
6	2437	54.954	17.40
9	2452	55.590	17.45

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm per 3kHz.

### 4.5.2 Test Setup

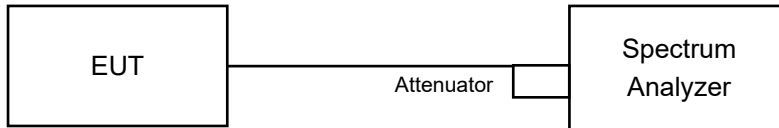

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6

#### 4.5.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-8.17	8.00	Pass
6	2437	-7.81	8.00	Pass
11	2462	-7.49	8.00	Pass

##### 802.11g

Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-9.76	8.00	Pass
6	2437	-9.26	8.00	Pass
11	2462	-9.38	8.00	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
1	2412	-9.50	8.00	Pass
6	2437	-9.20	8.00	Pass
11	2462	-8.37	8.00	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
3	2422	-12.73	8.00	Pass
6	2437	-10.96	8.00	Pass
9	2452	-11.69	8.00	Pass

### Spectrum Plot of Worst Value


#### 802.11b

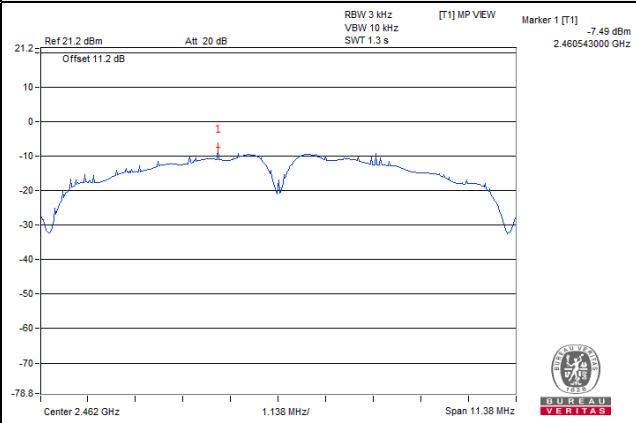


#### 802.11g

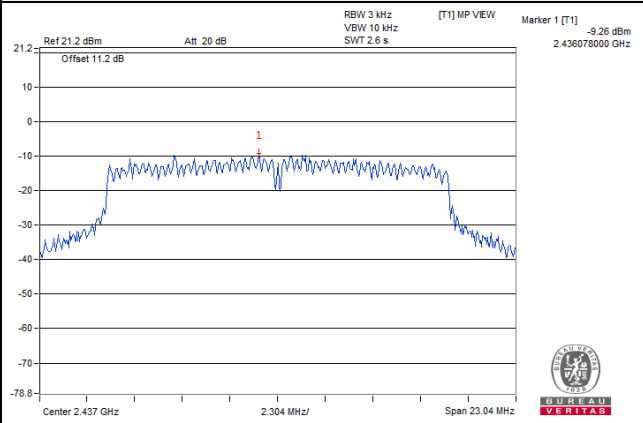

#### 802.11n (HT20)

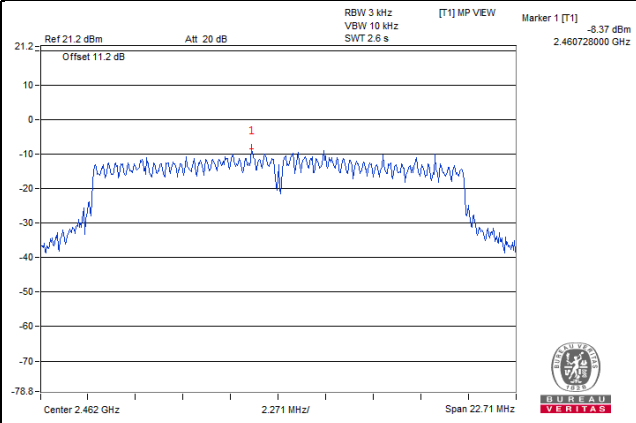

#### 802.11n (HT40)

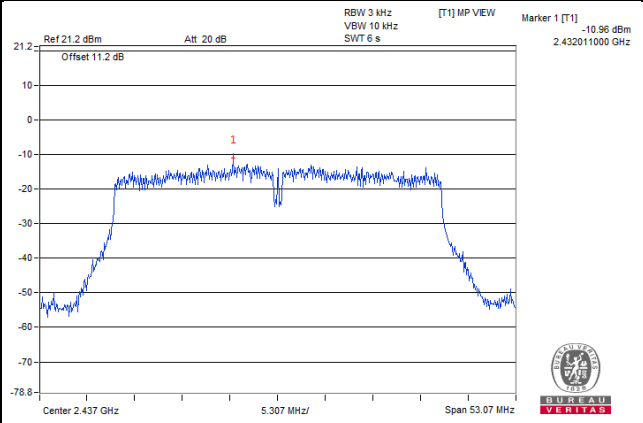


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup

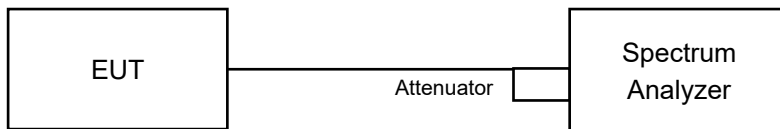

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq$  300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition



Same as item 4.3.6

### 4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

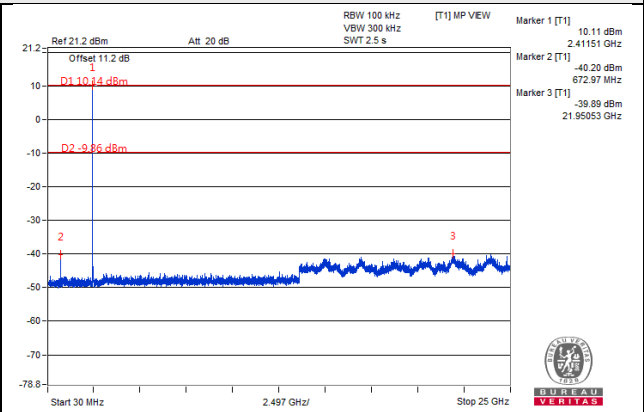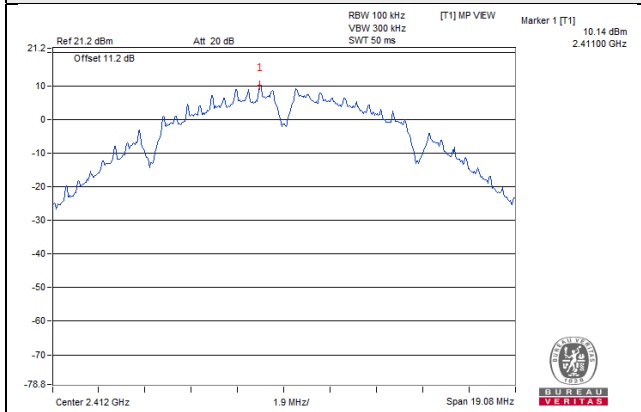


CH 6

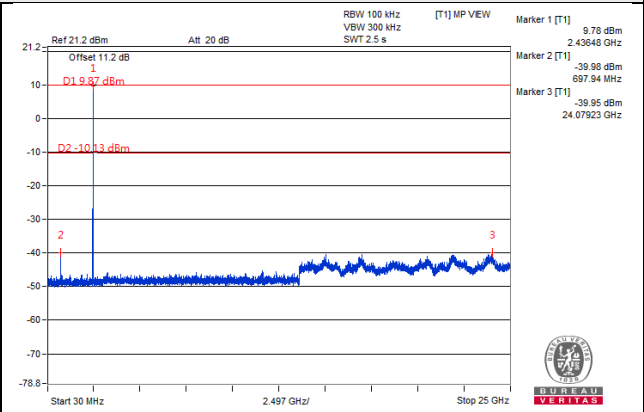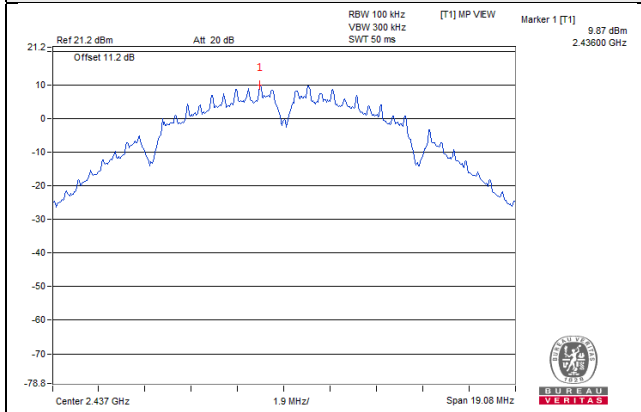


CH 11

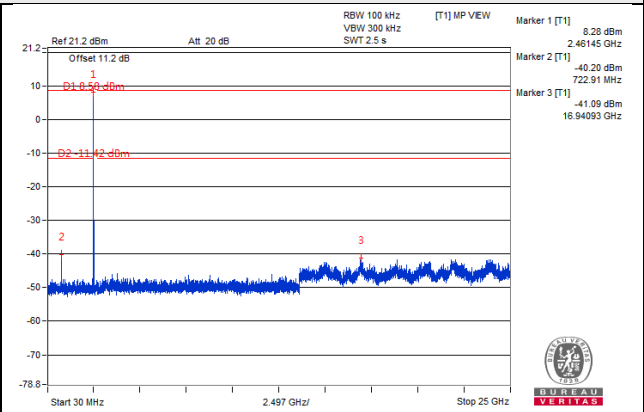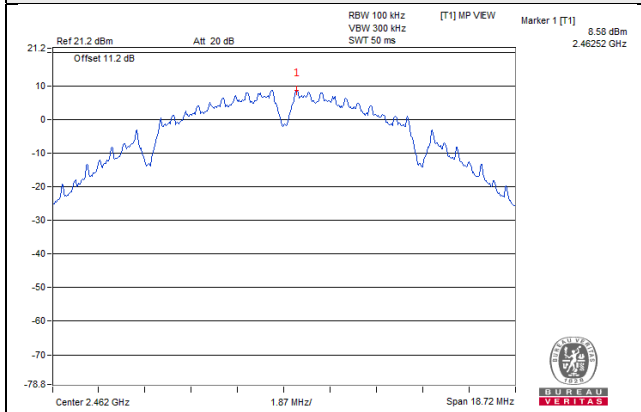

CH 1 Band edge


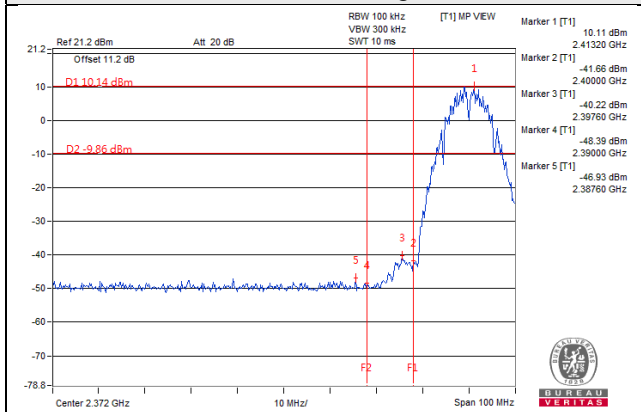


CH 11 Band edge


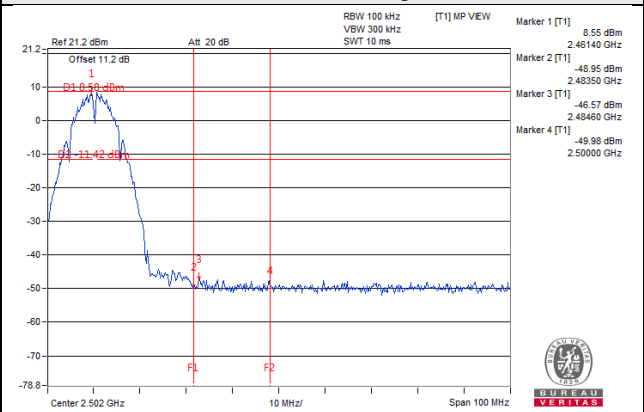


802.11g



CH 1

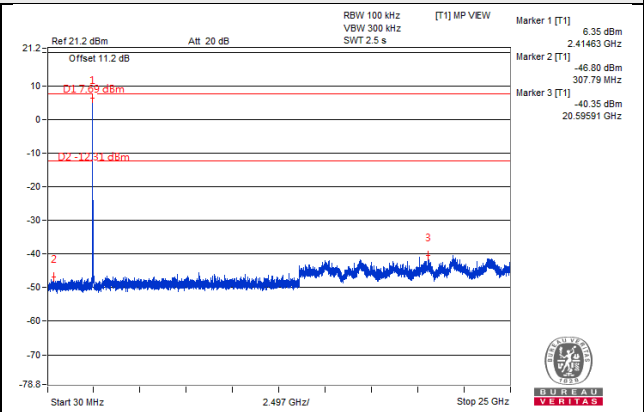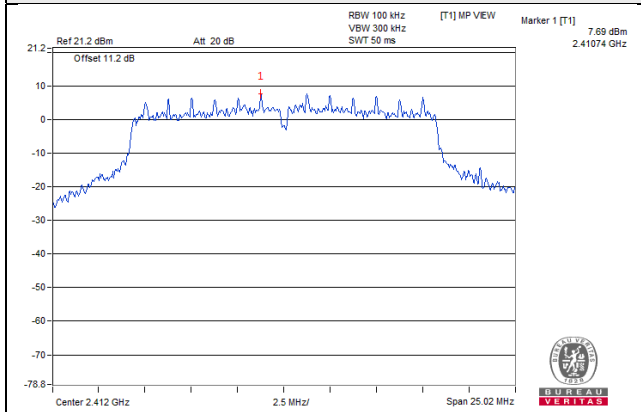


CH 6

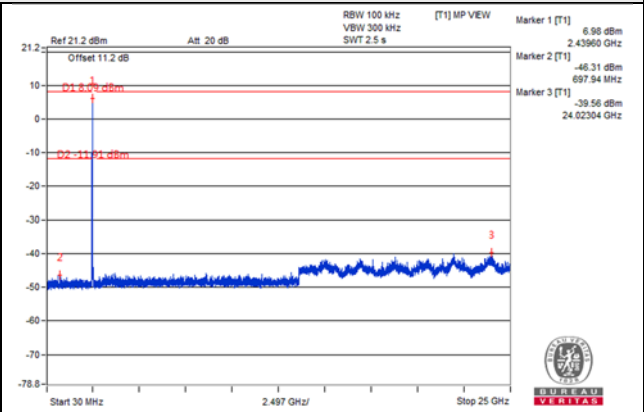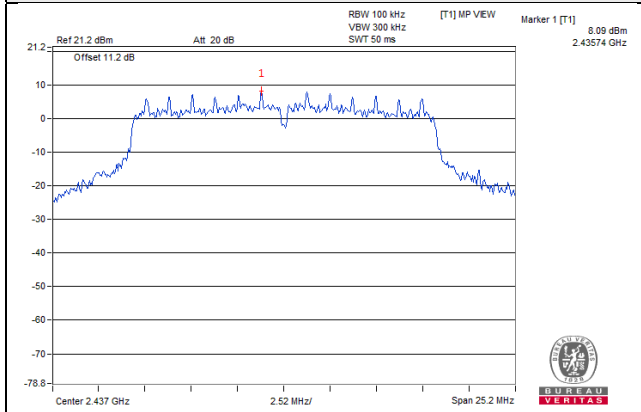


CH 11

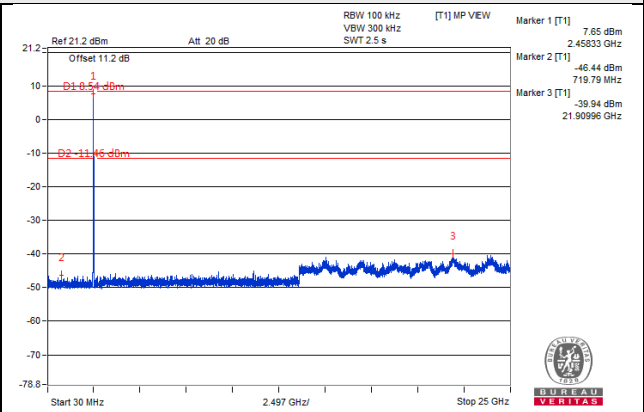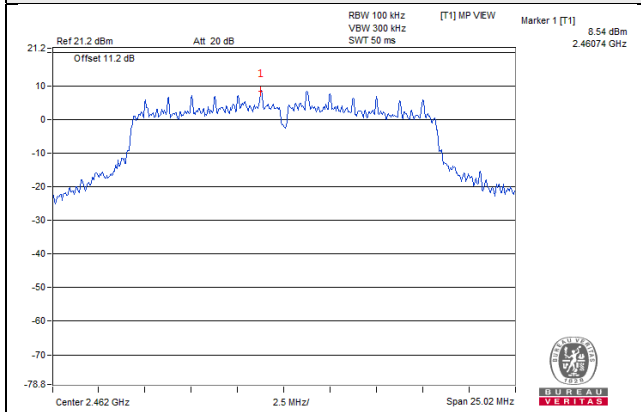

CH 1 Band edge


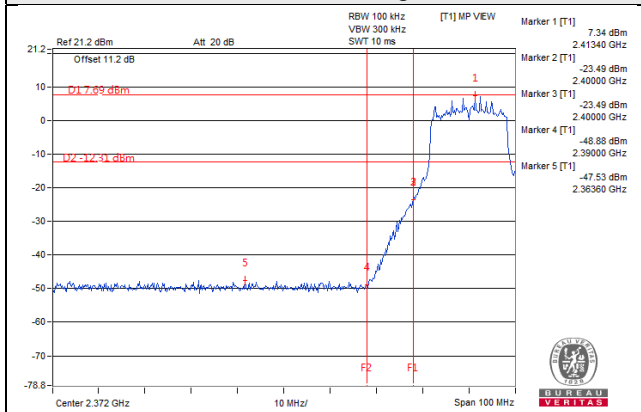


CH 11 Band edge


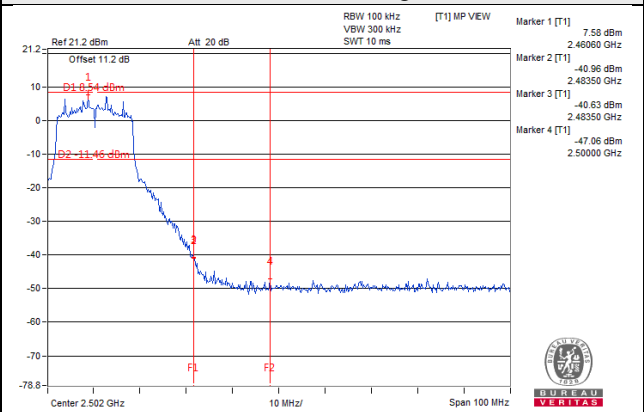


# 802.11n (HT20)



## CH 1

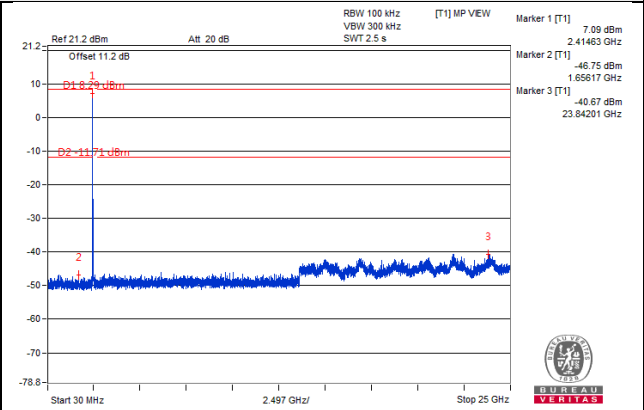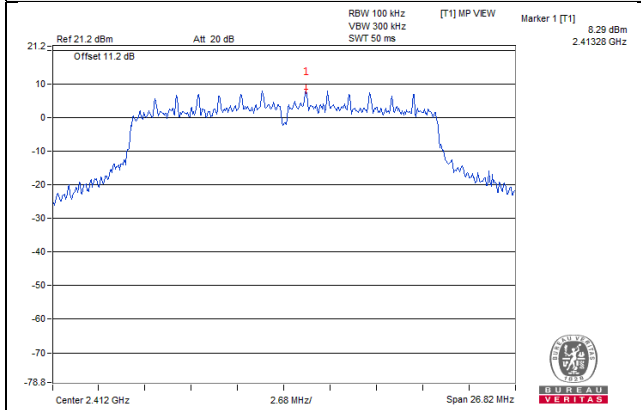


## CH 6

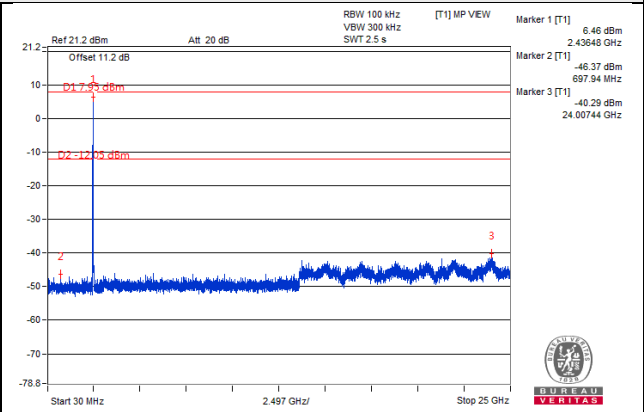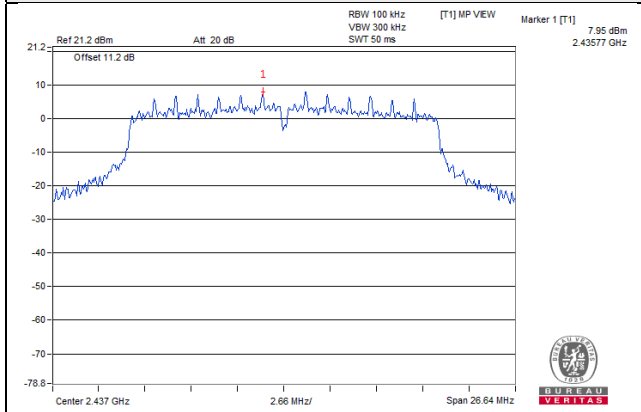


## CH 11

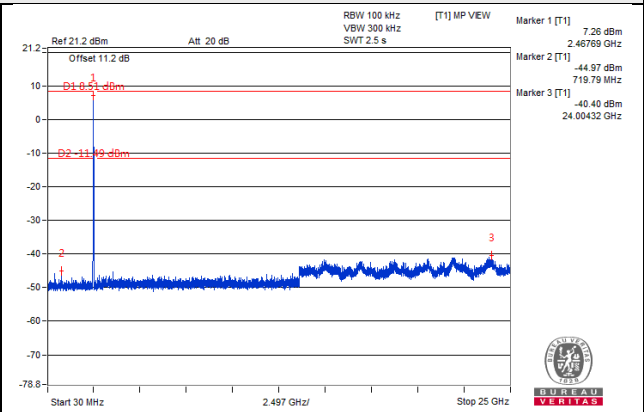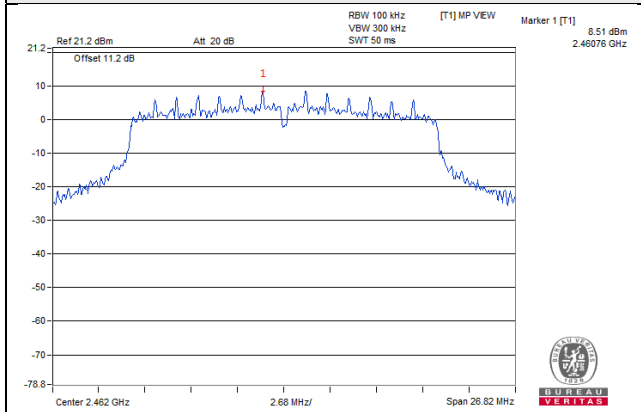

## CH 1 Band edge

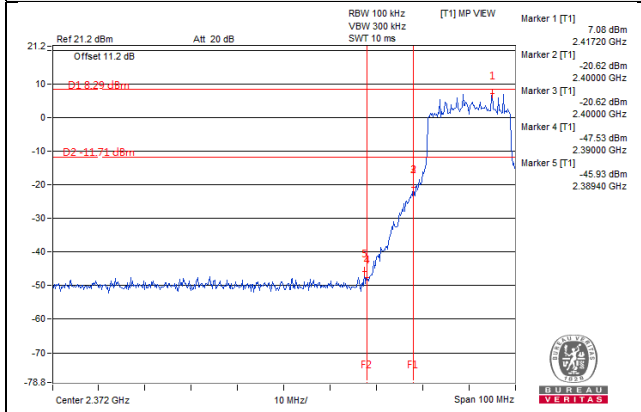



## CH 11 Band edge

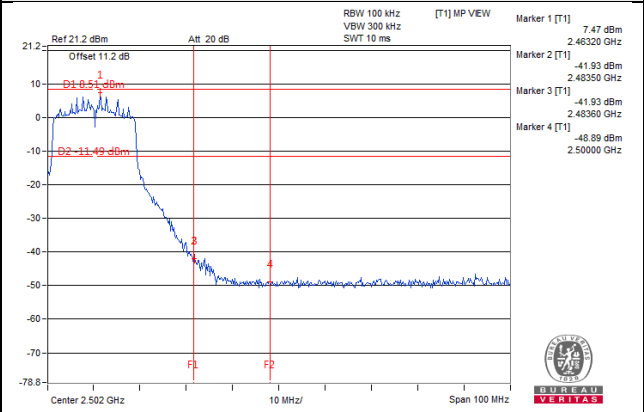





# 802.11n (HT40)



## CH 3

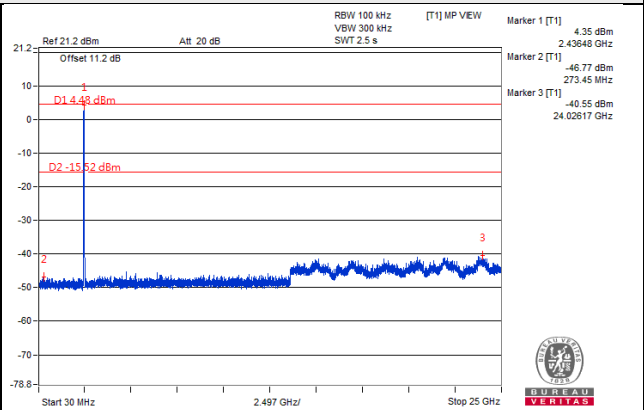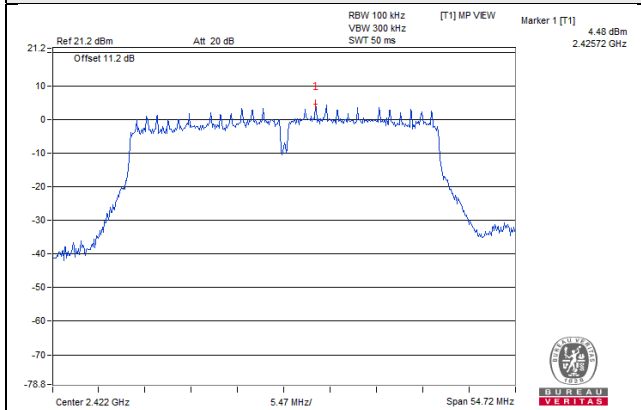


## CH 6

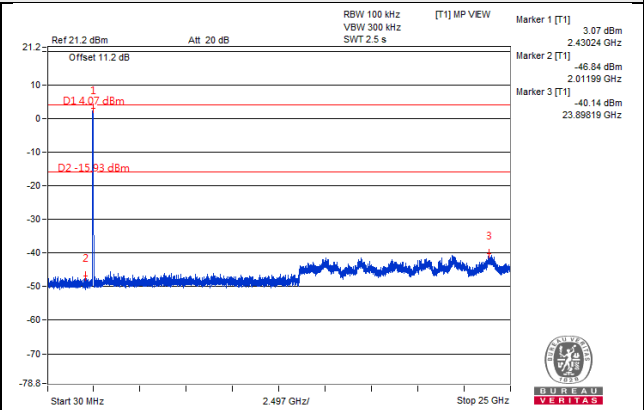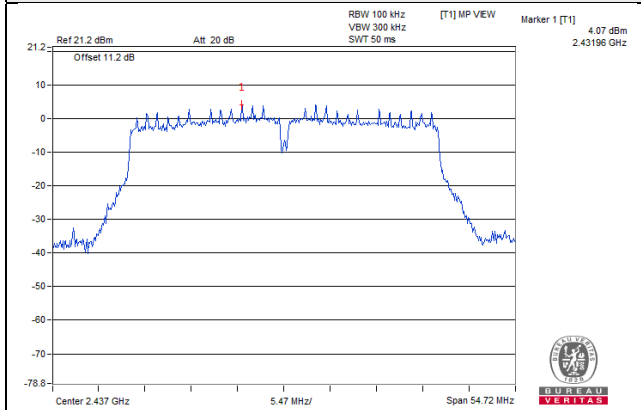


## CH 9

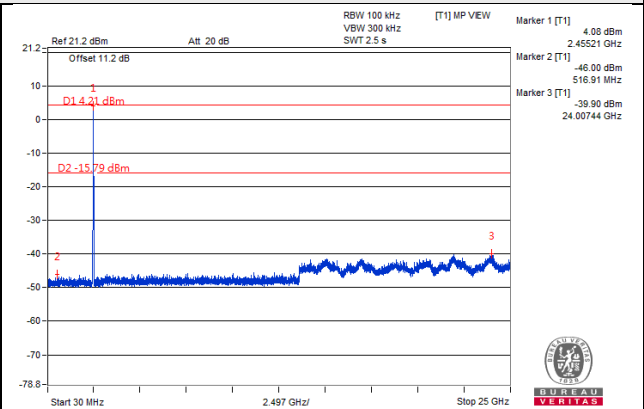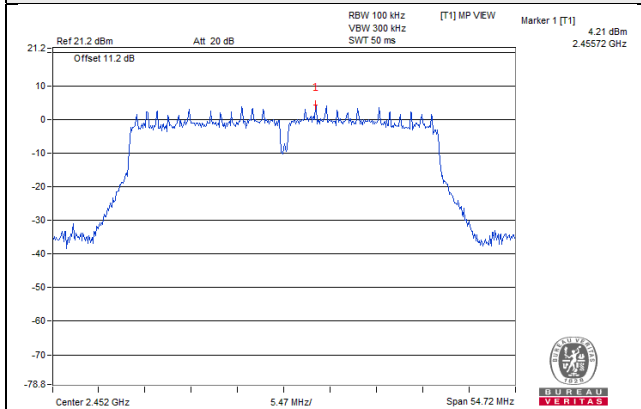

## CH 3 Band edge

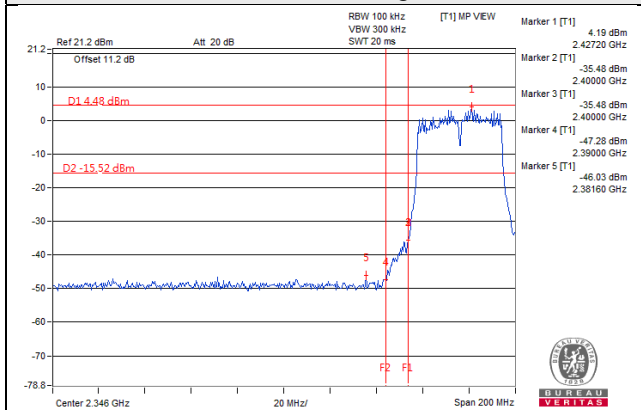

## CH 9 Band edge

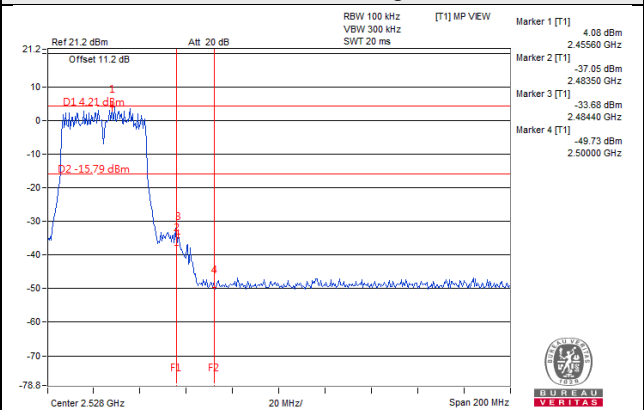

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---