





CHANNEL 5



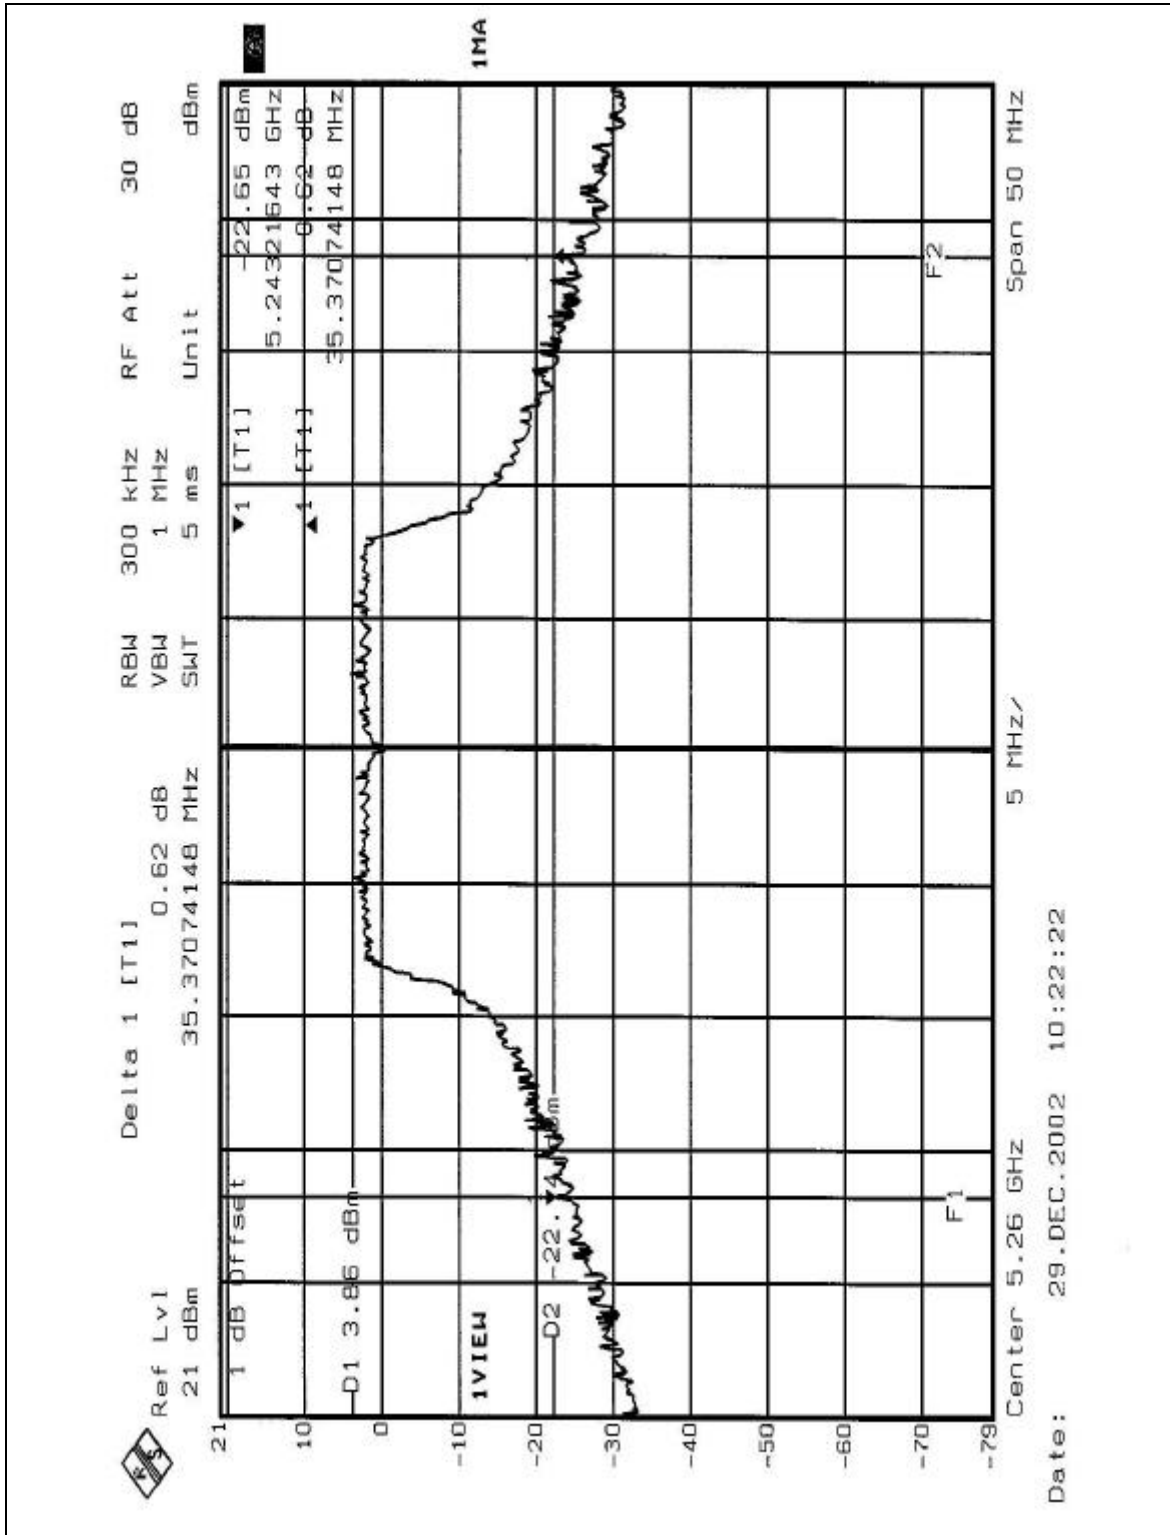


CHANNEL 8

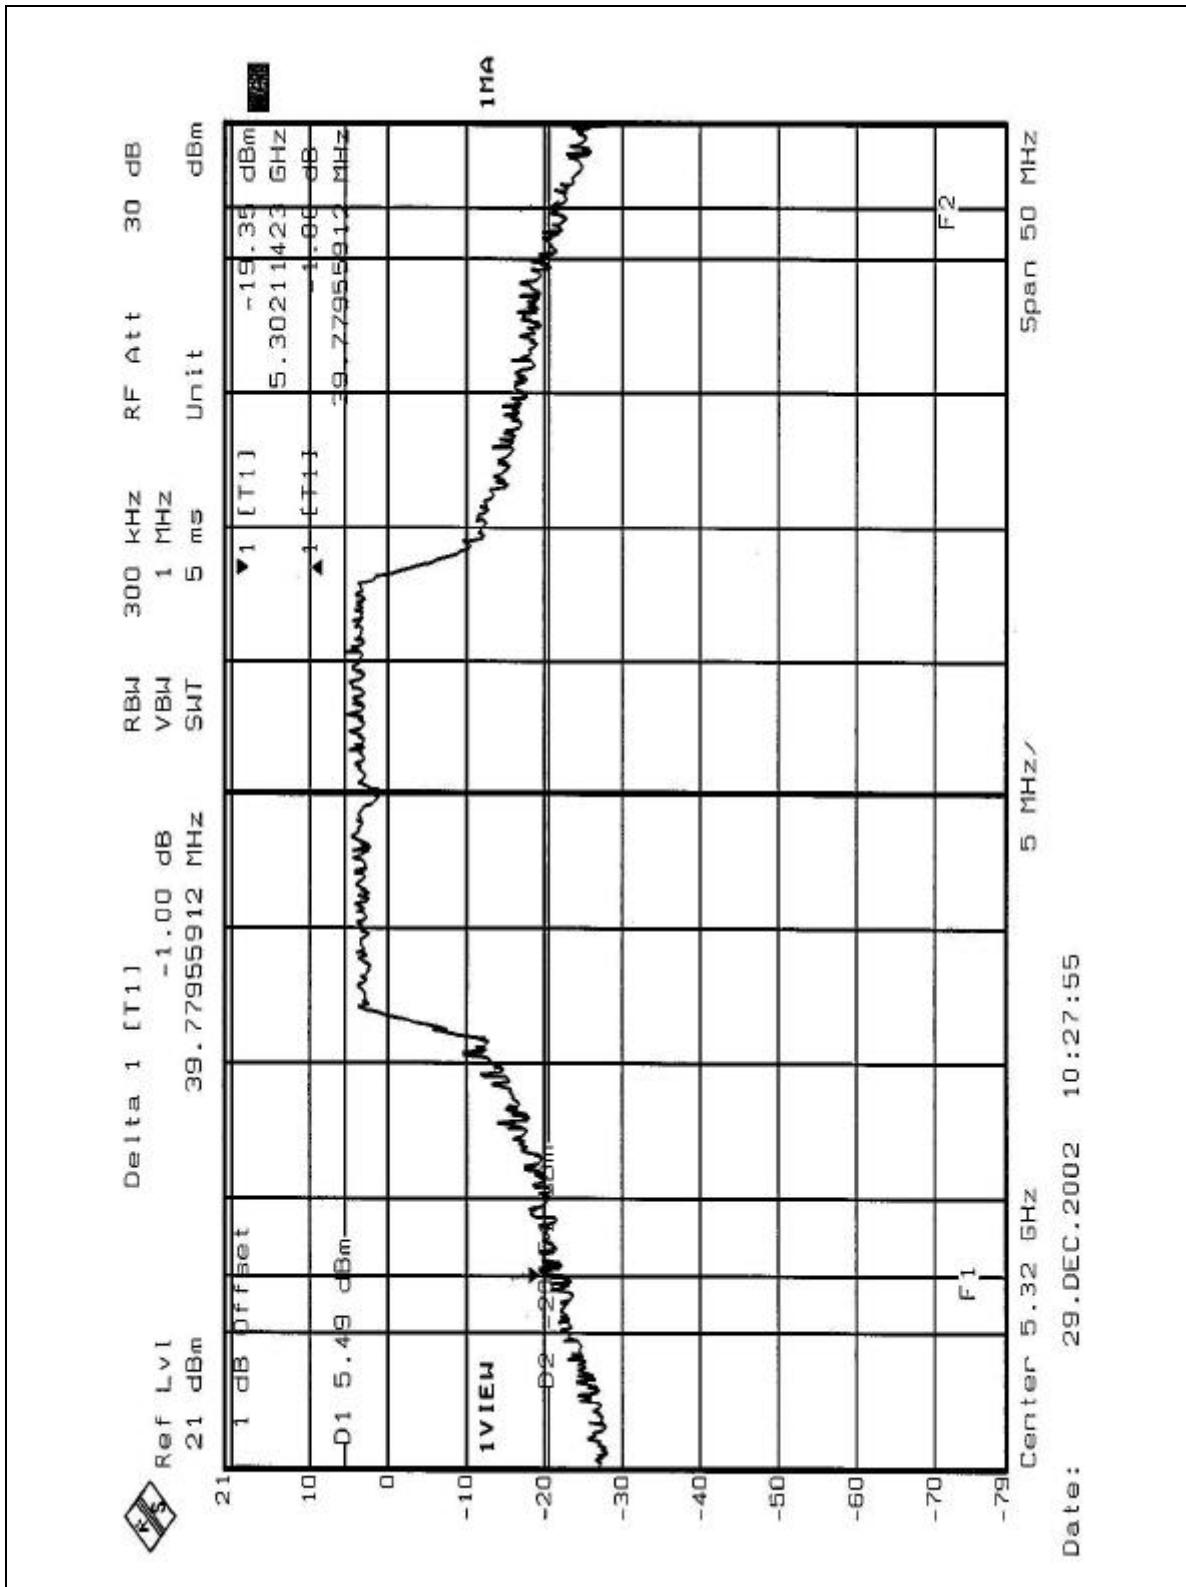




CHANNEL9

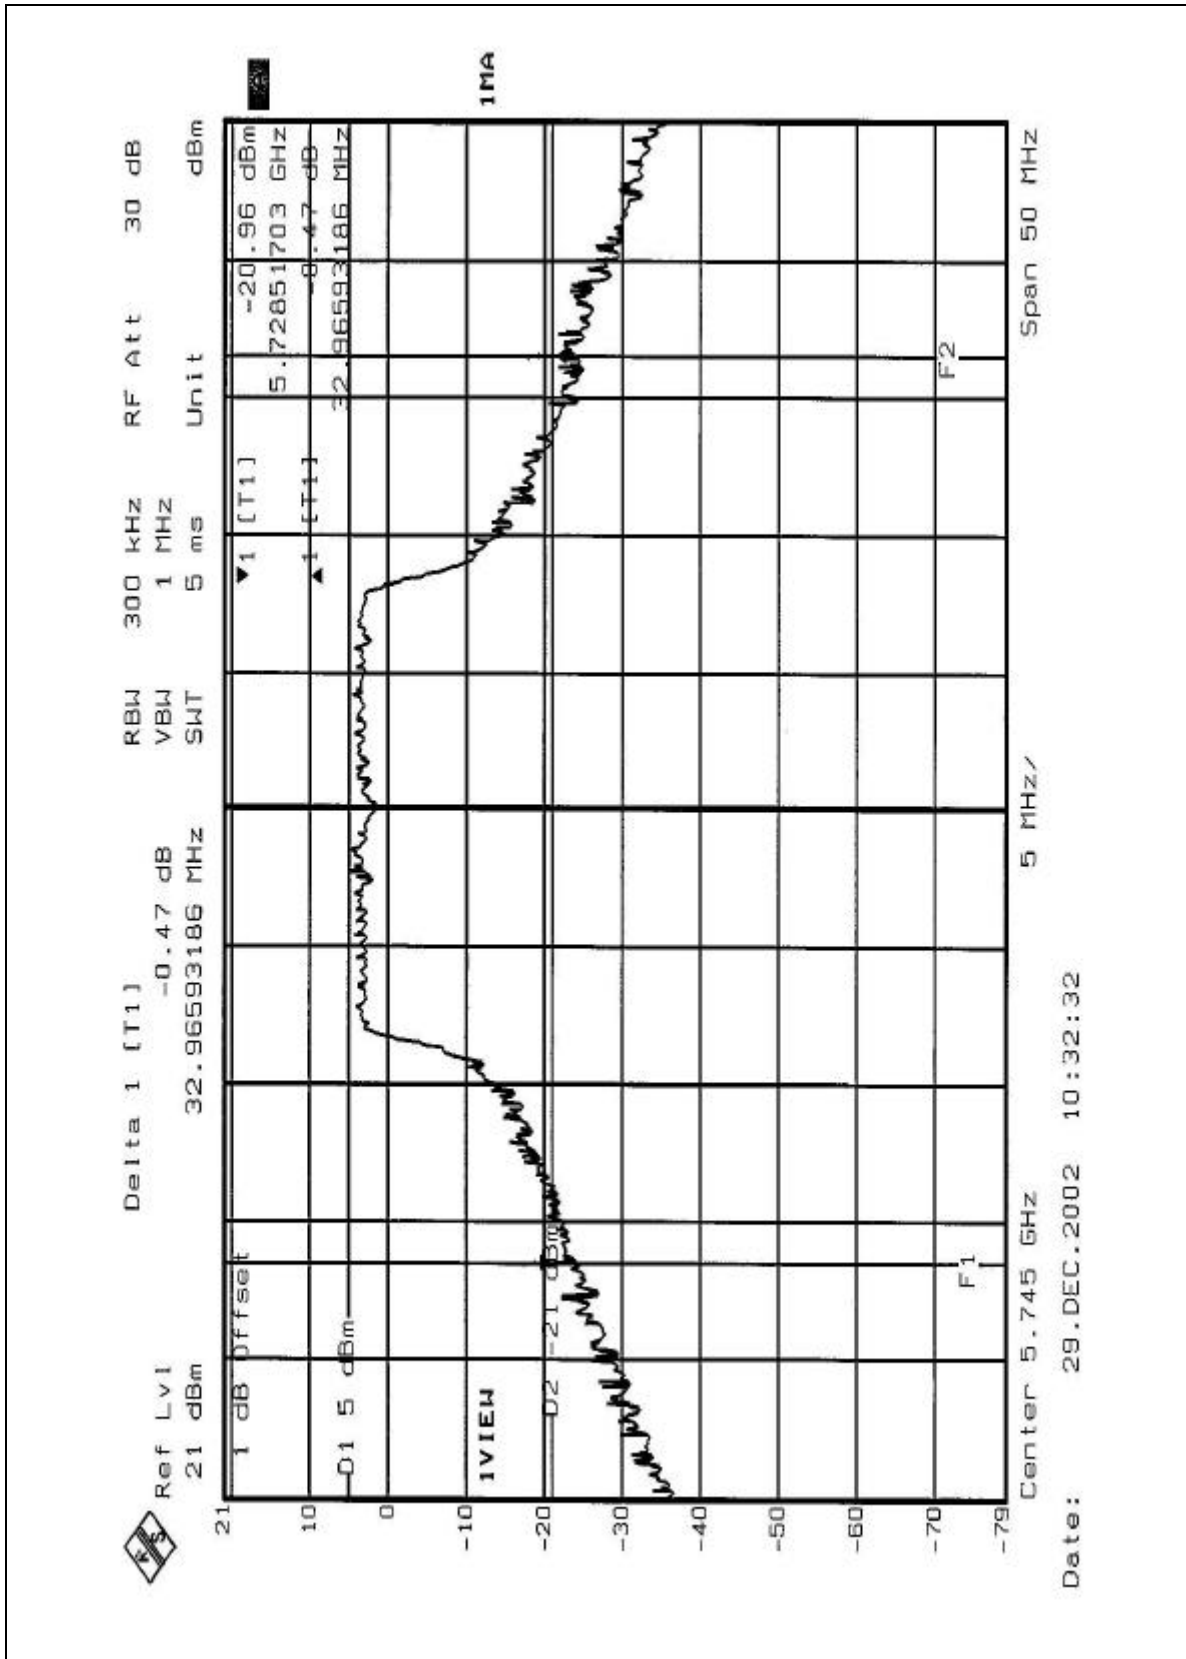



CHANNEL 12

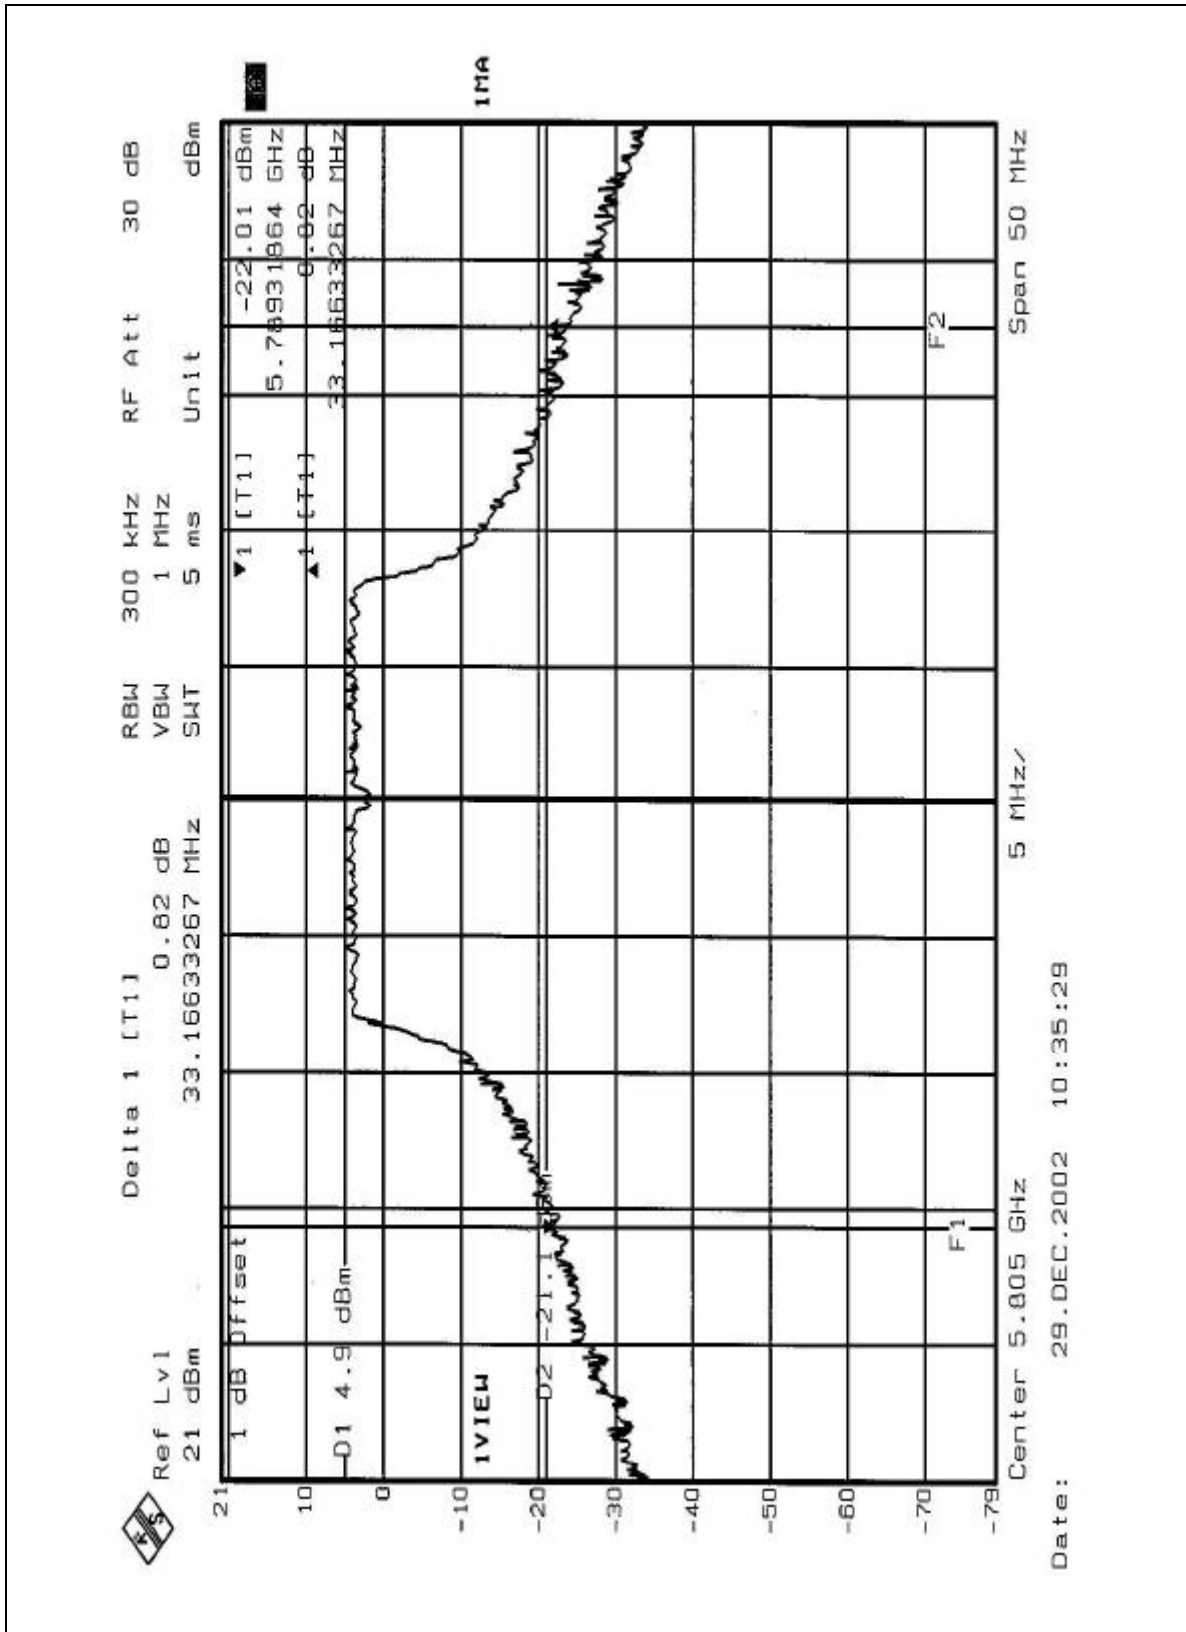




EUT	2.4GHz/5GHz Mini - PCI Card	MODEL	WLL220
MODE	Turbo	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20eg. C, 60RH, 1005 hPa	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5210	16.78	17.00	71.82	PASS
2	5250	16.64	24.00	65.58	PASS
3	5290	16.50	24.00	70.86	PASS
4	5760	16.62	30.00	51.90	PASS
5	5800	14.26	30.00	46.57	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.




CHANNEL 1

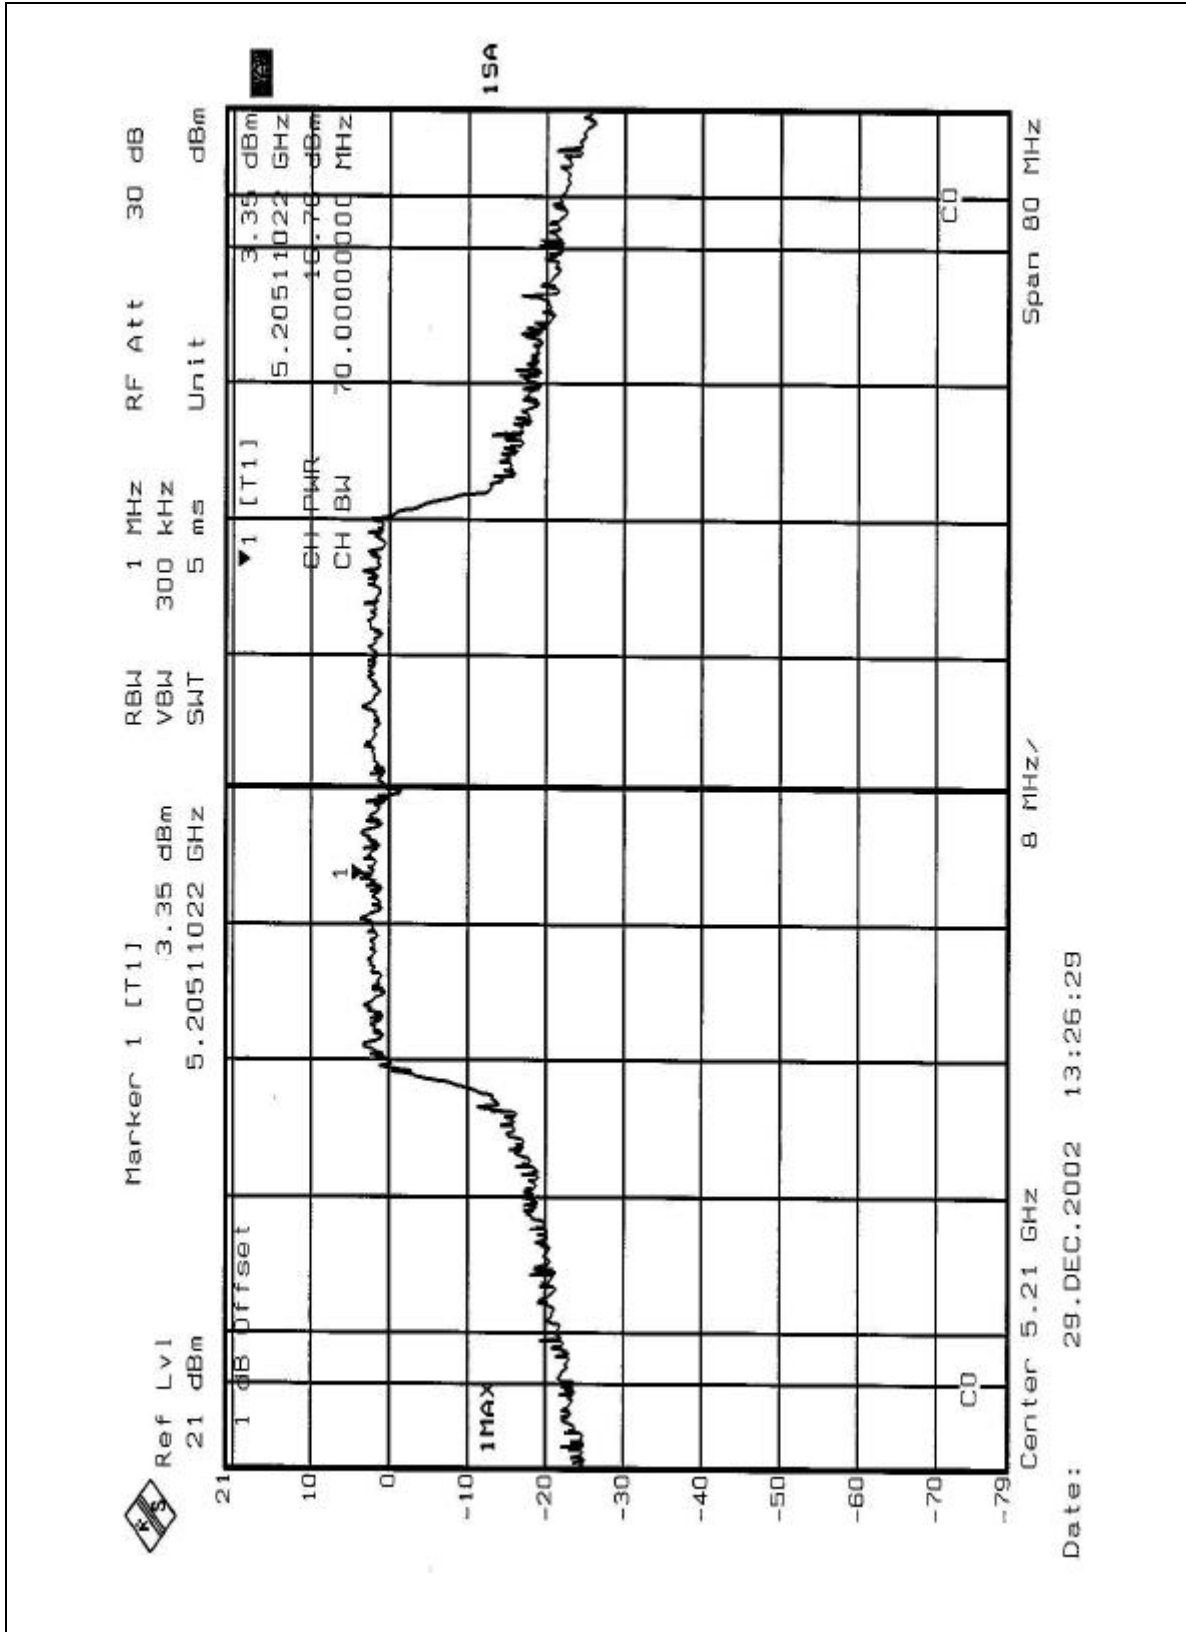




CHANNEL 2

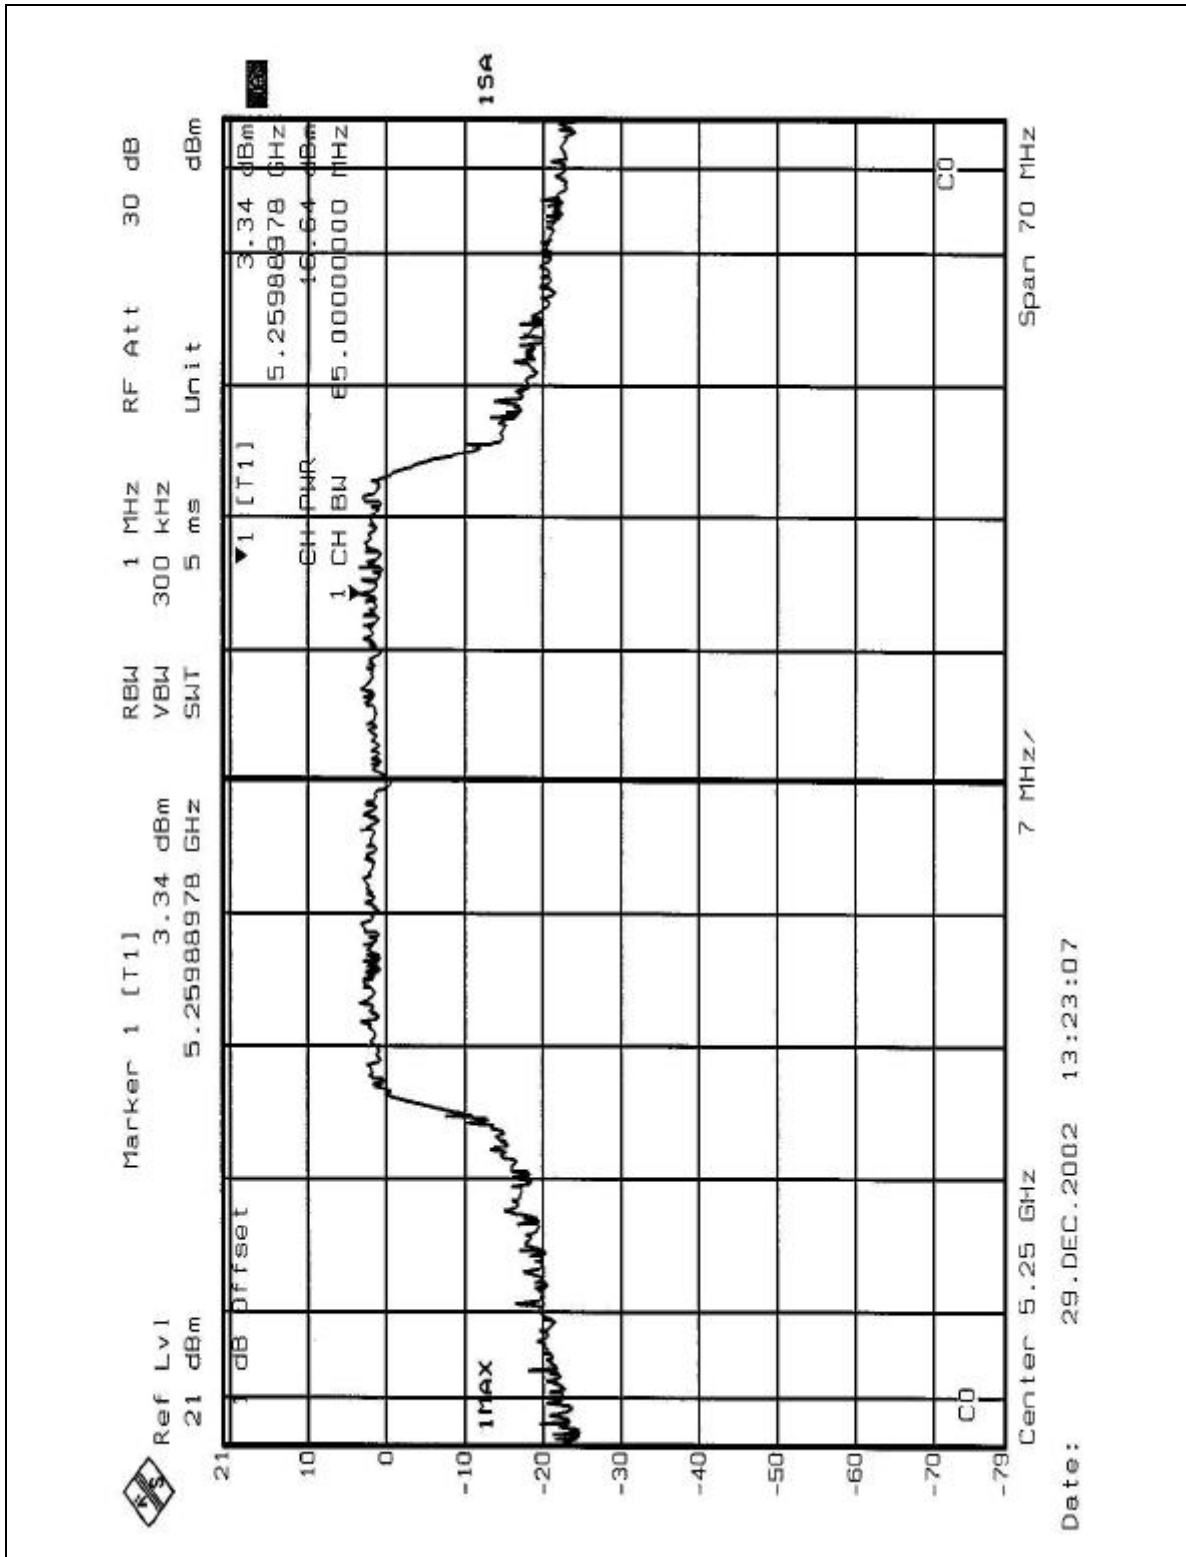




CHANNEL 3

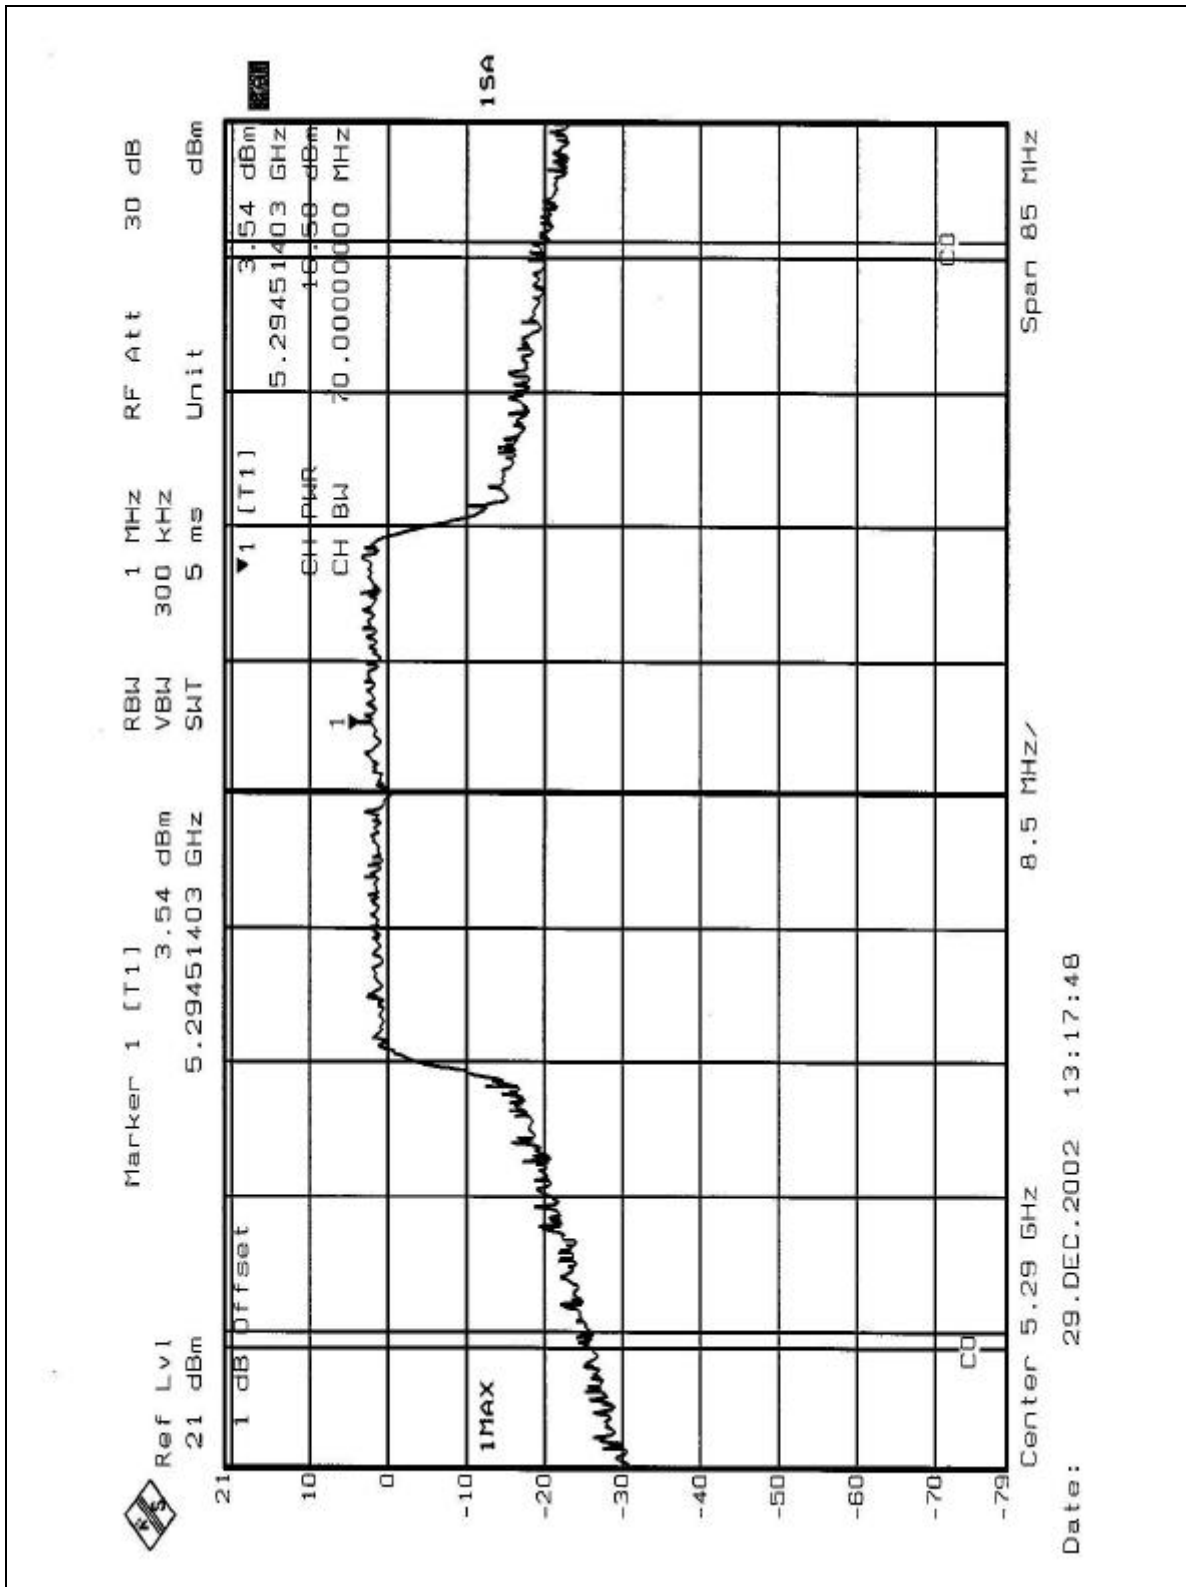




CHANNEL 4

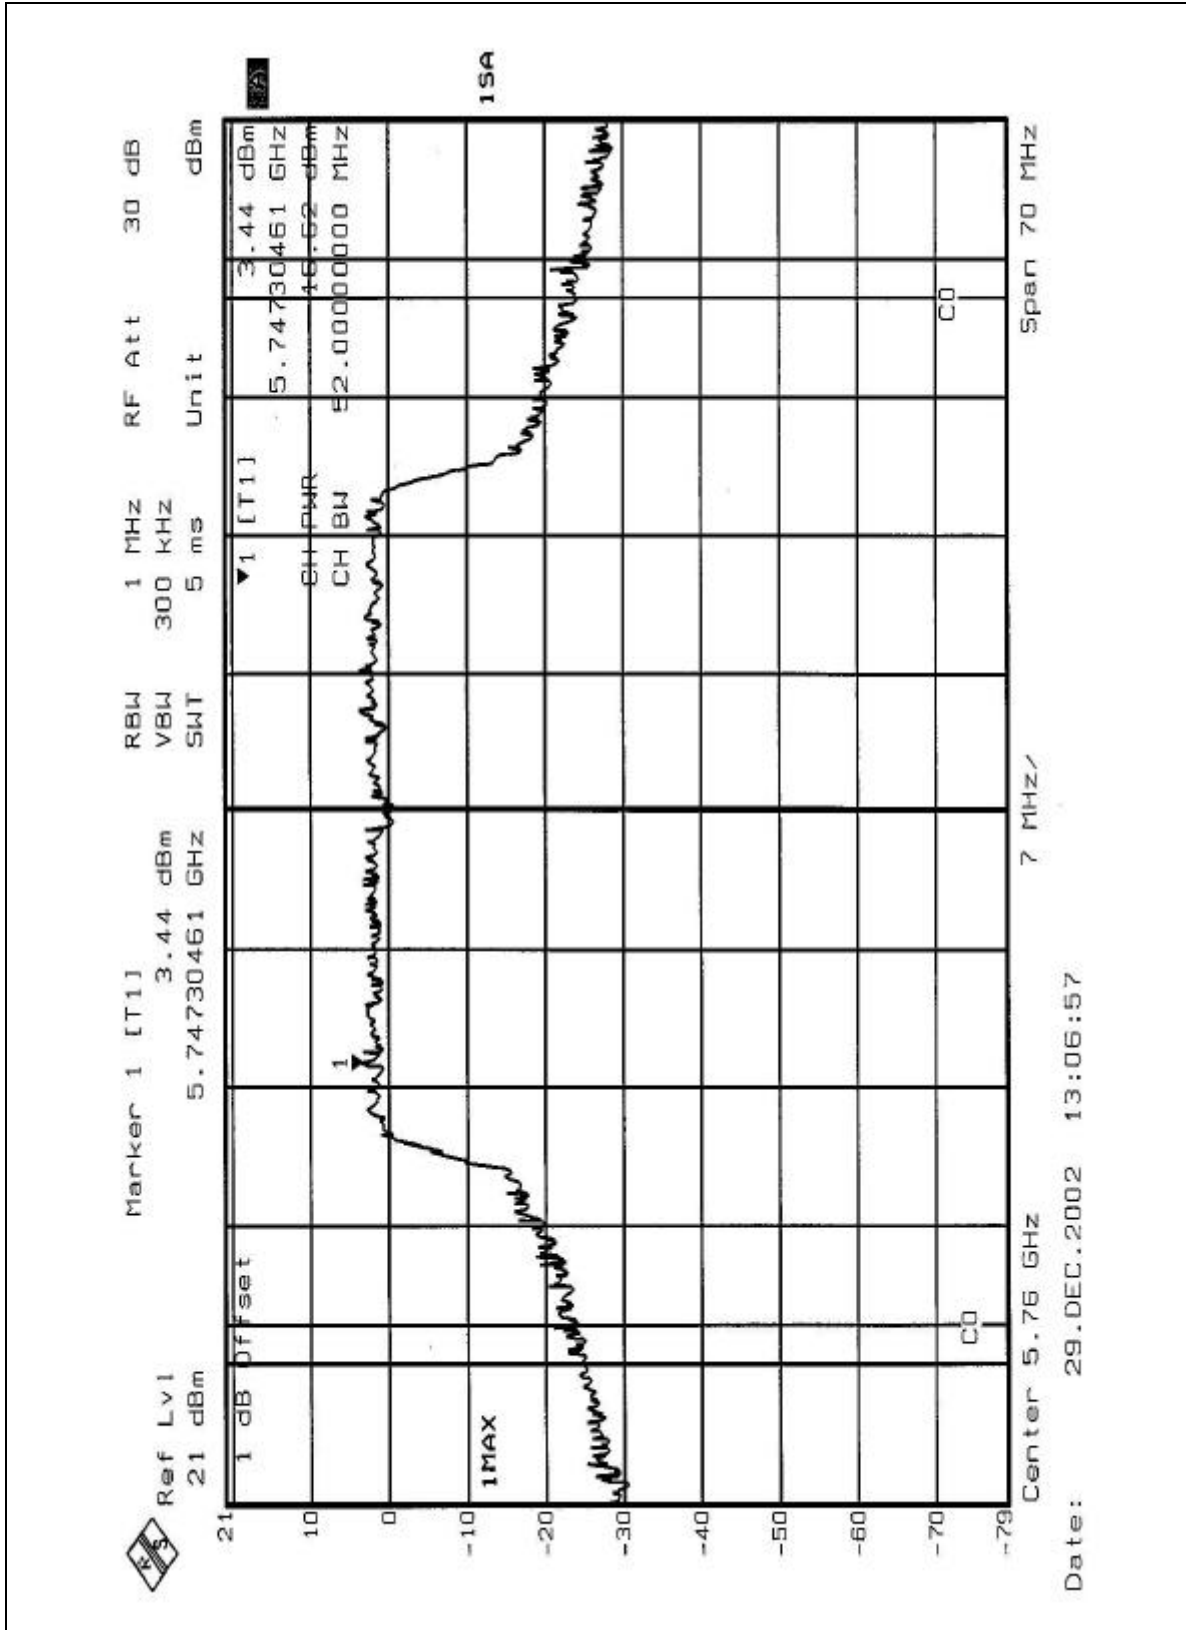




CHANNEL 5

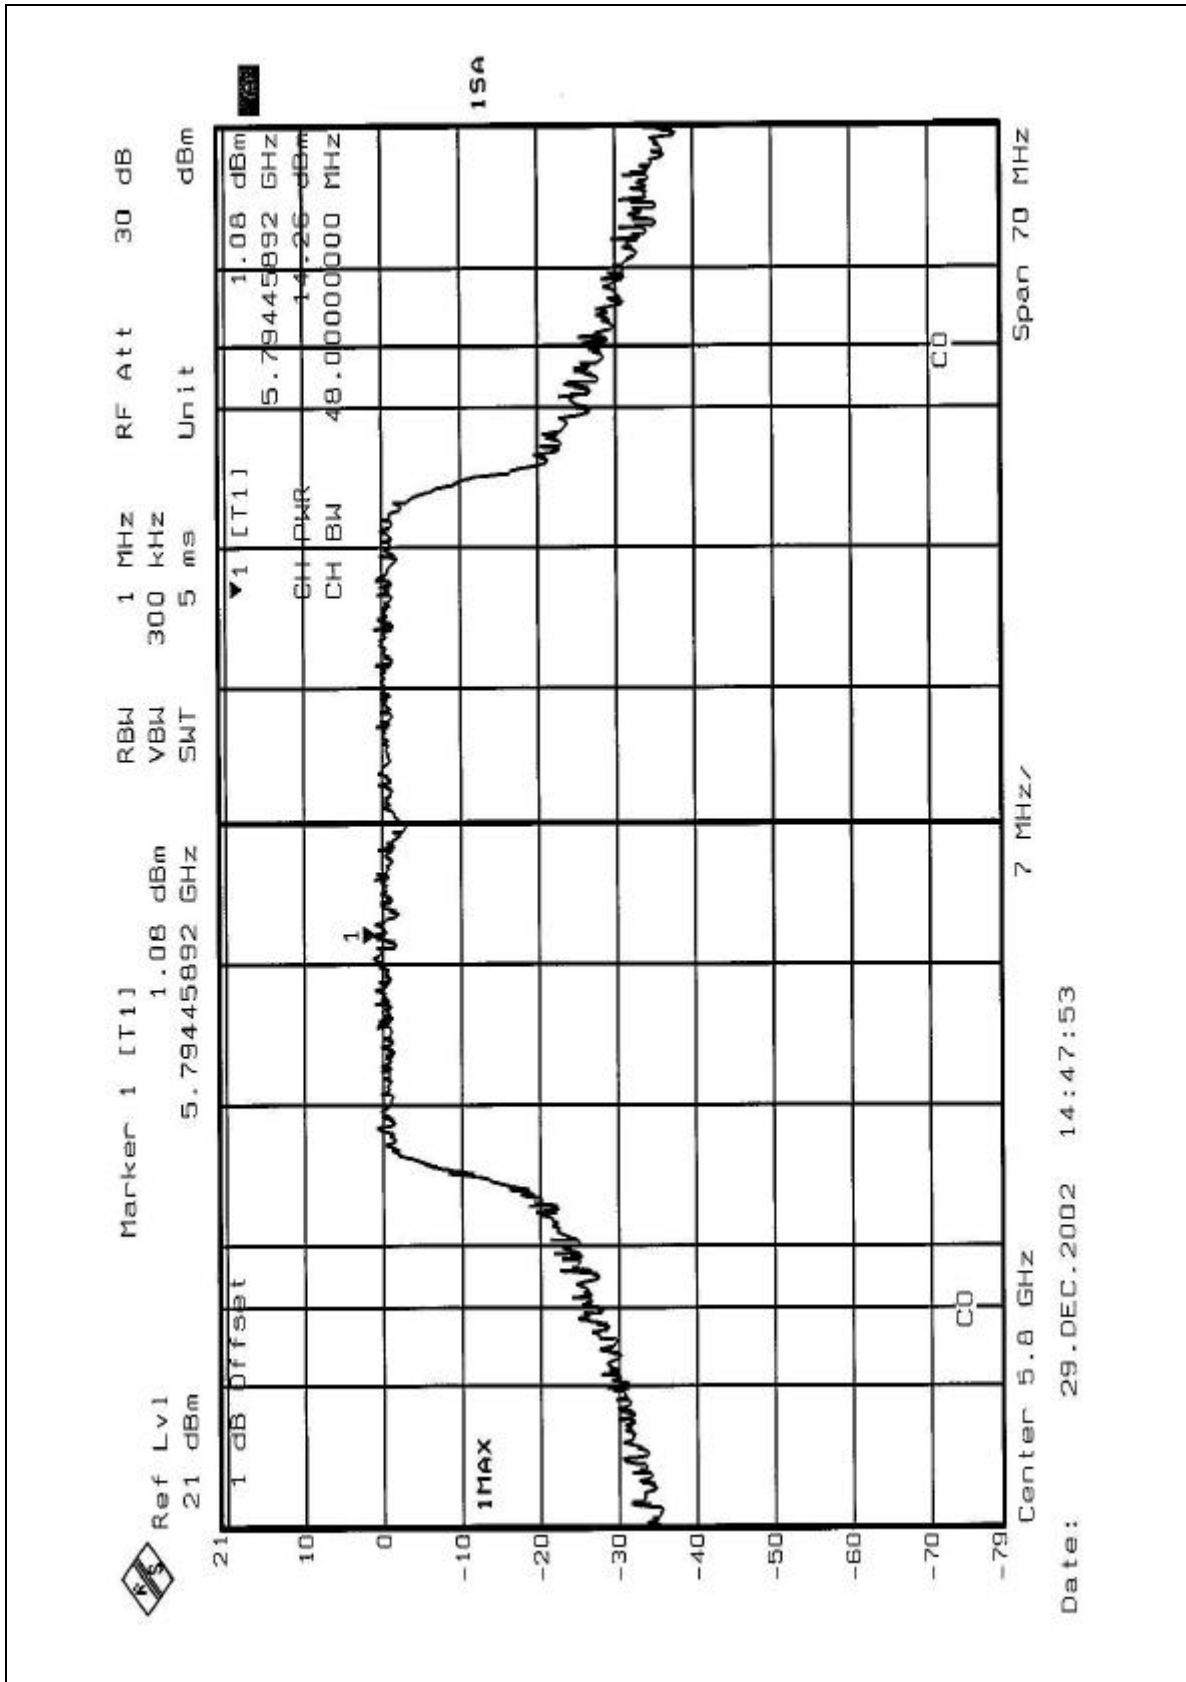




CHANNEL 1

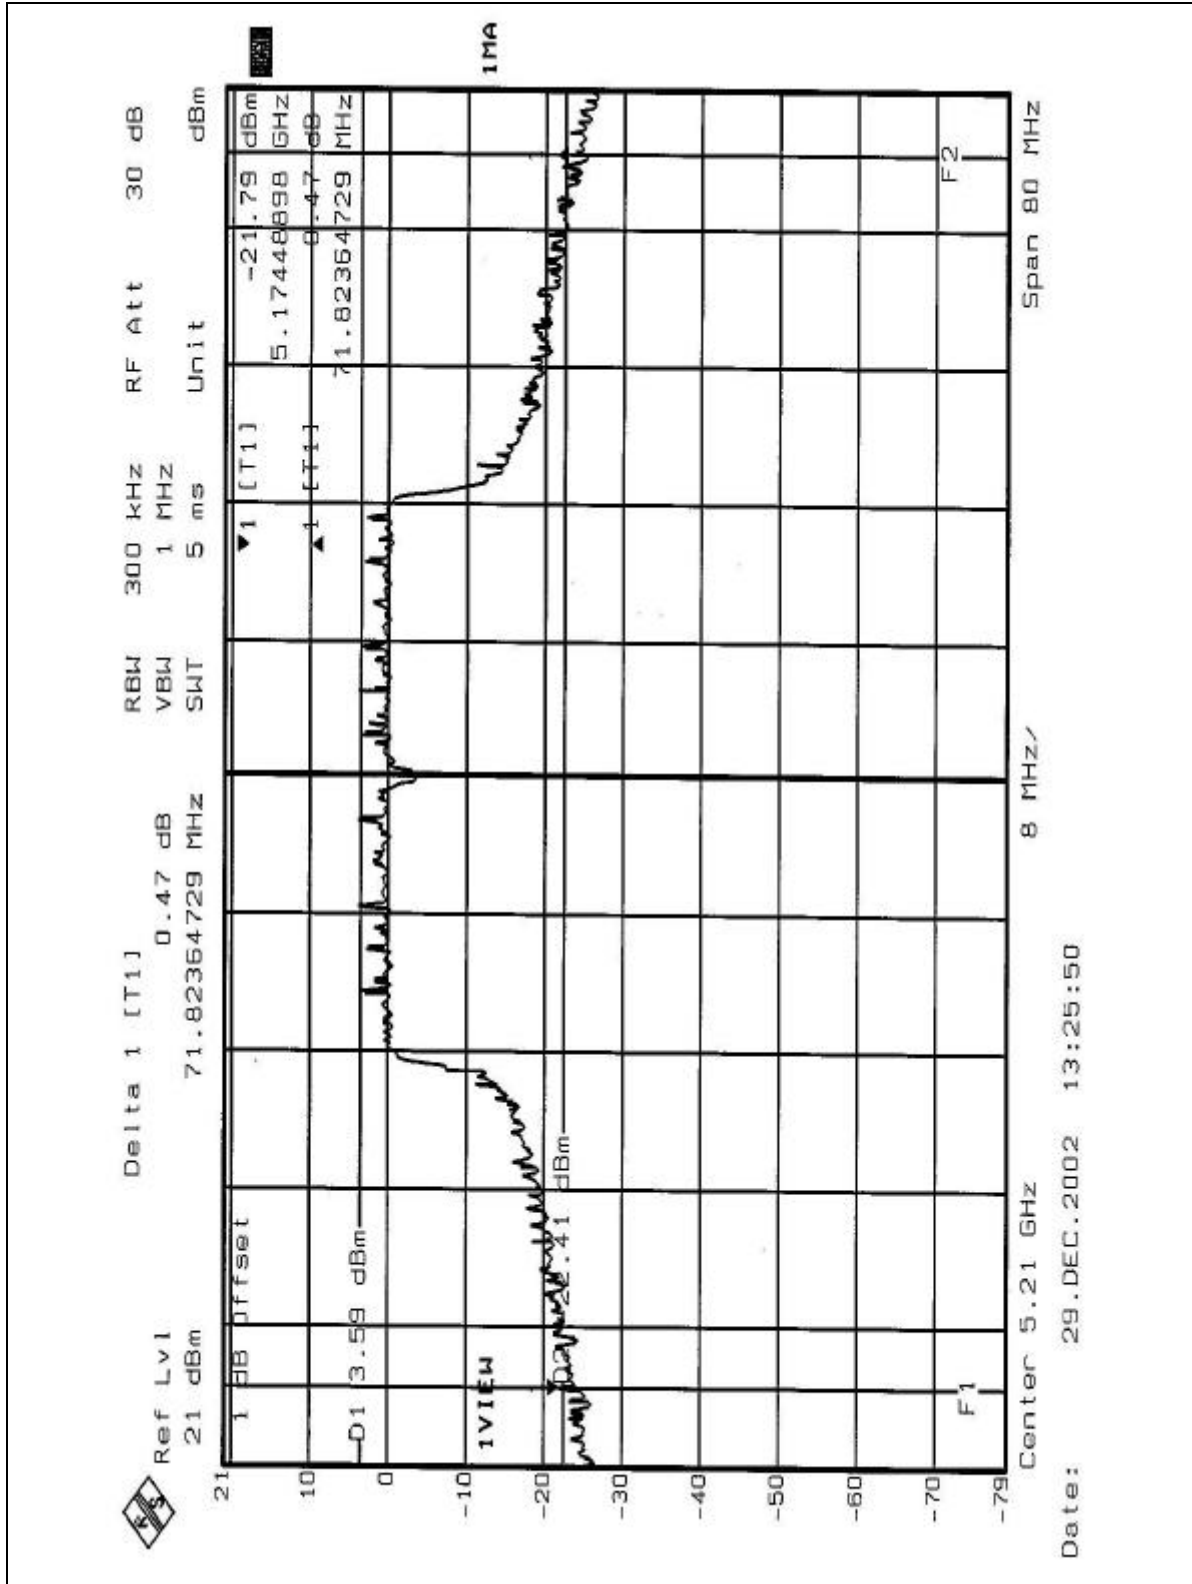




CHANNEL 2

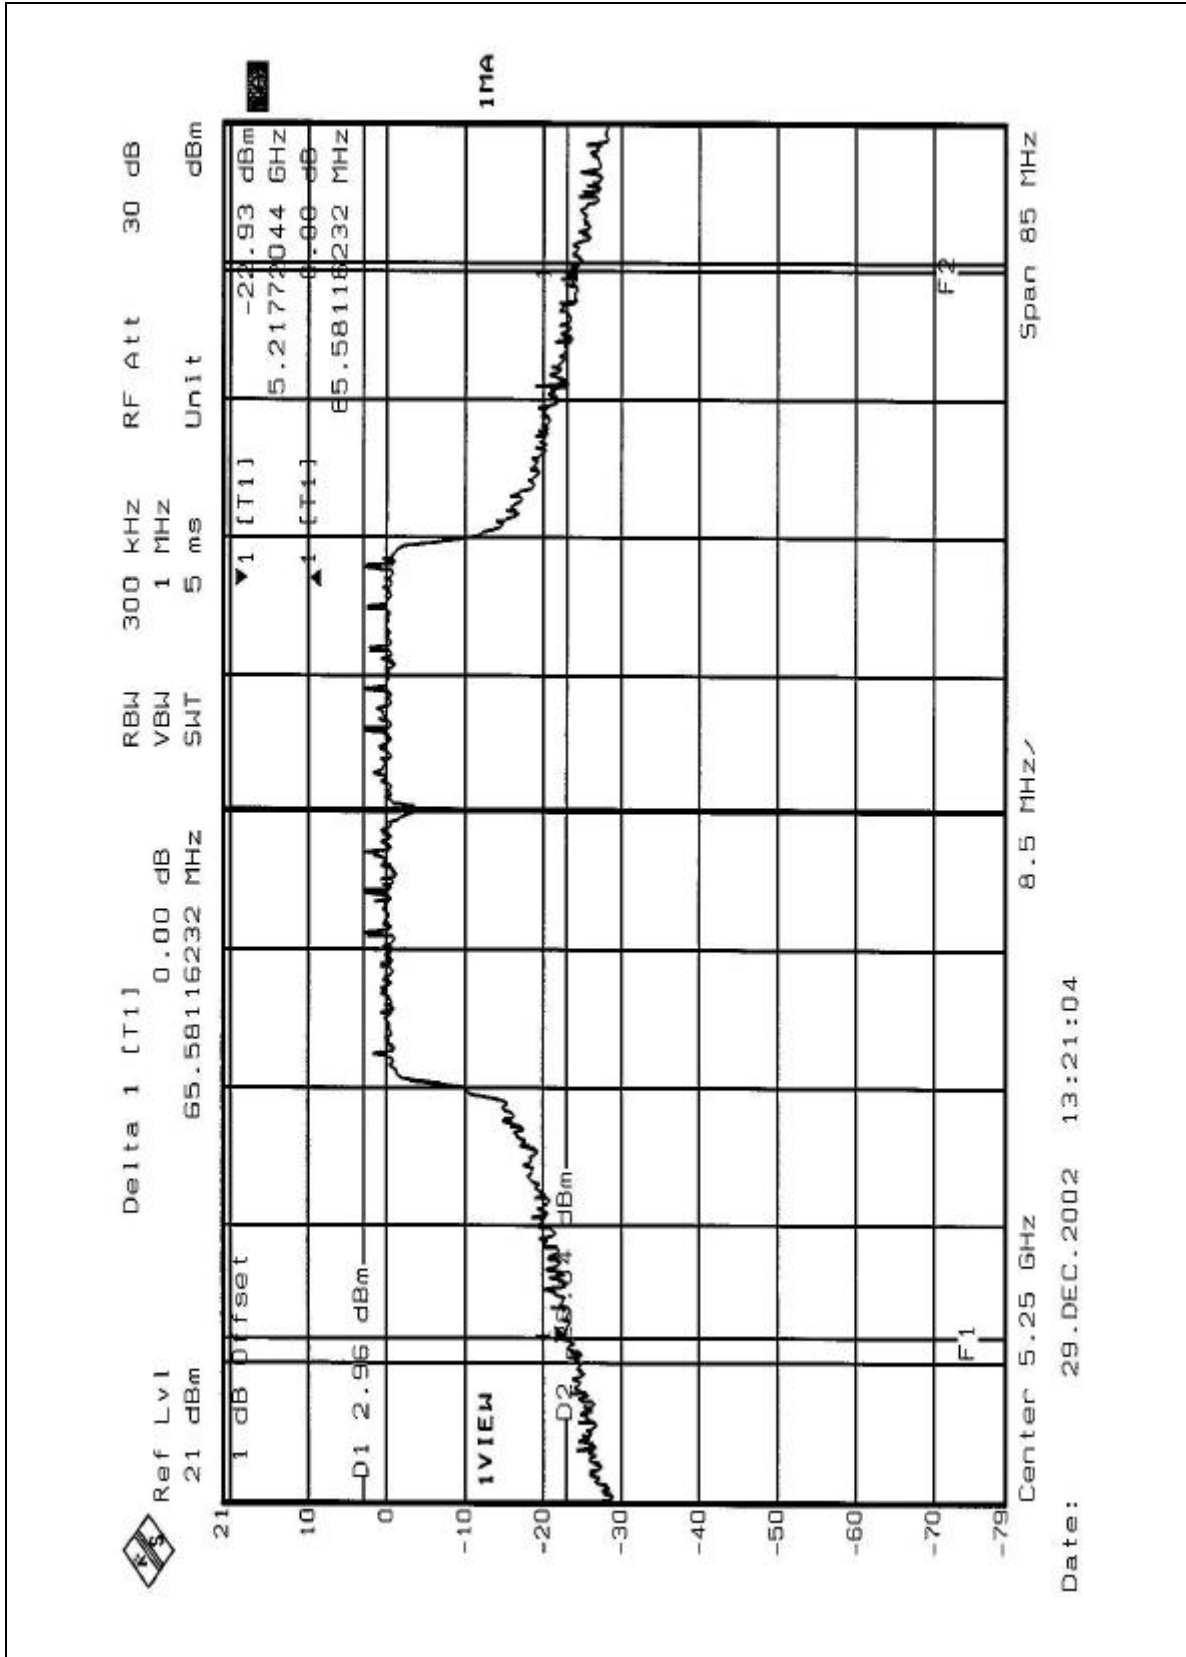




CHANNEL 3

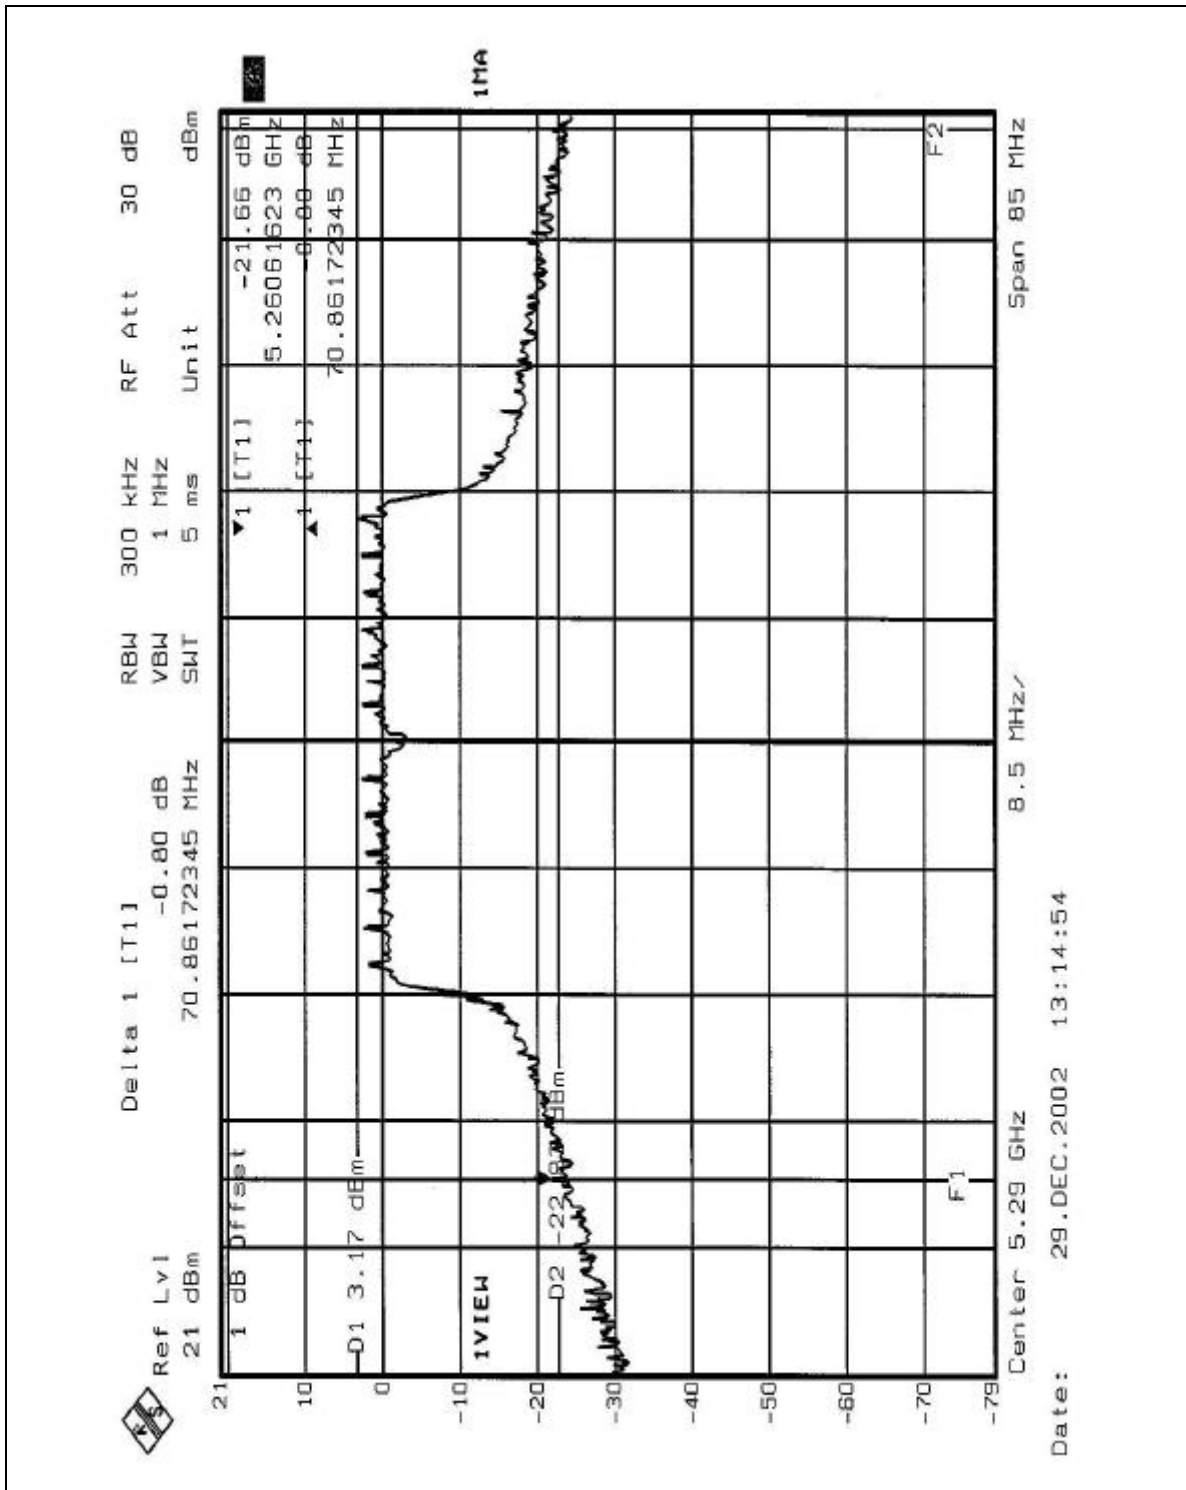




CHANNEL 4

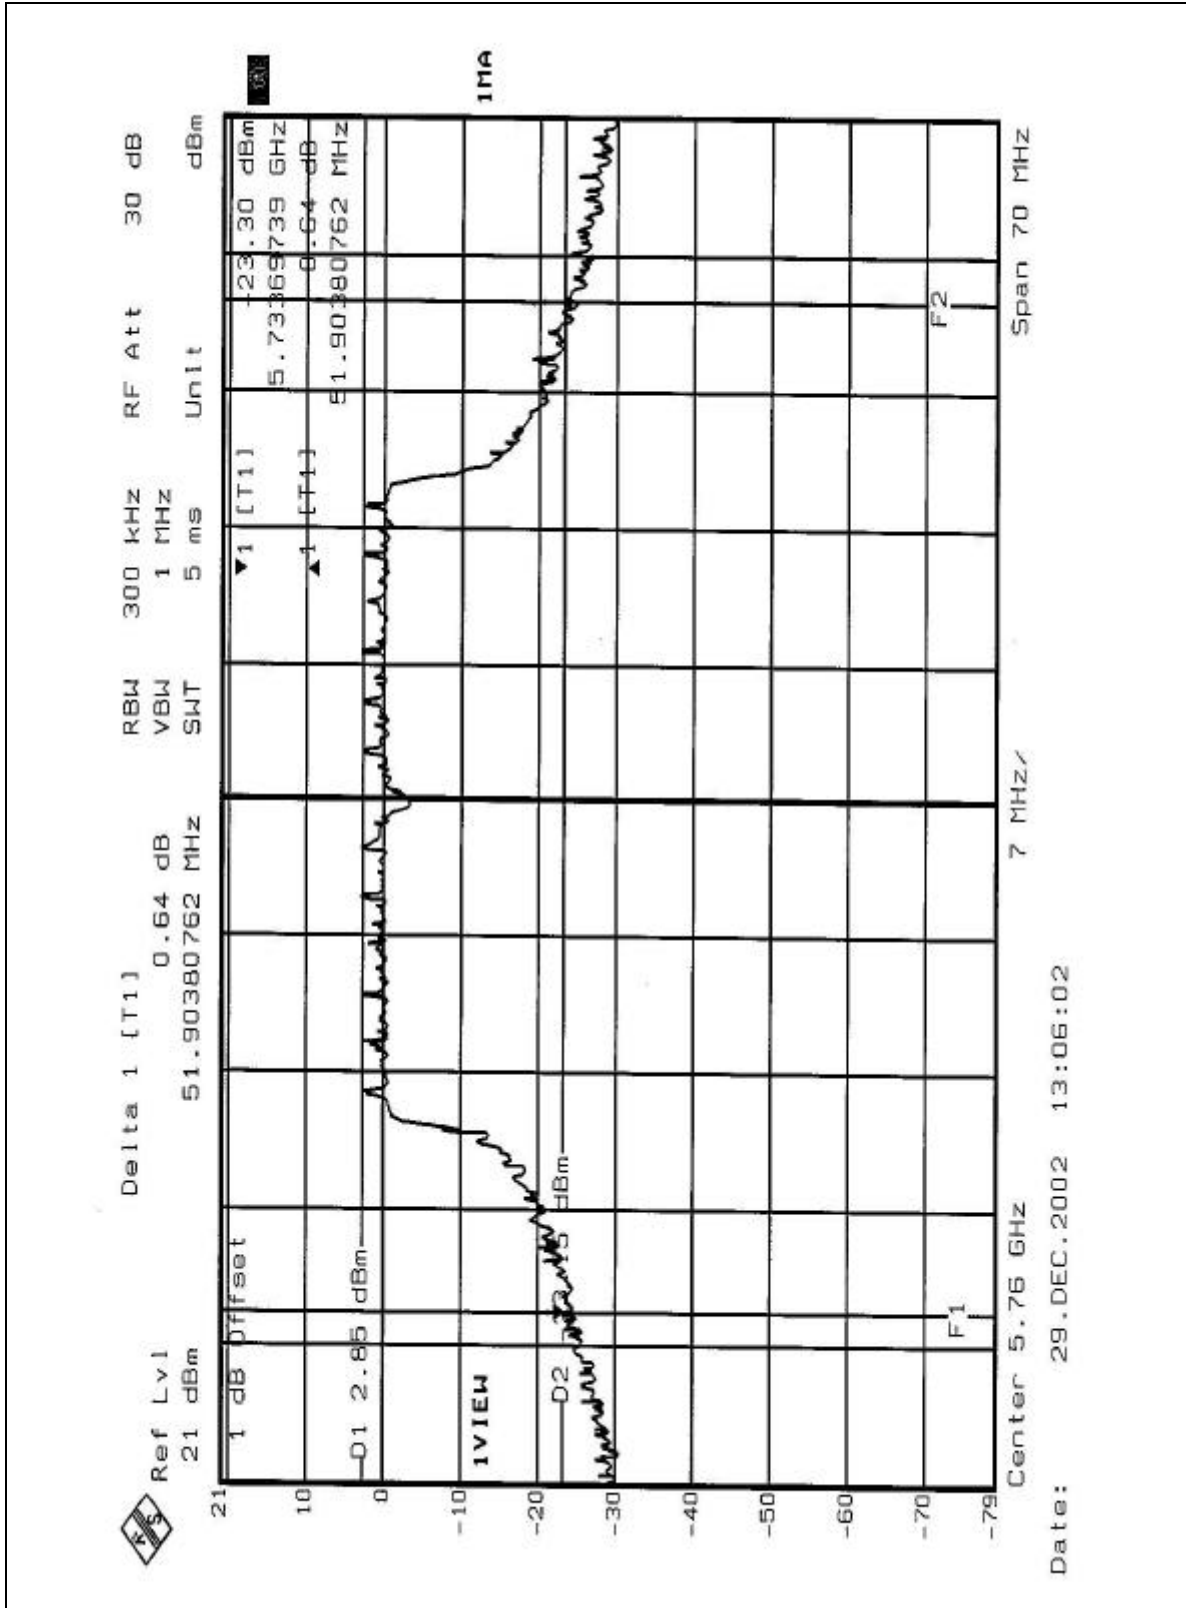



CHANNEL 5

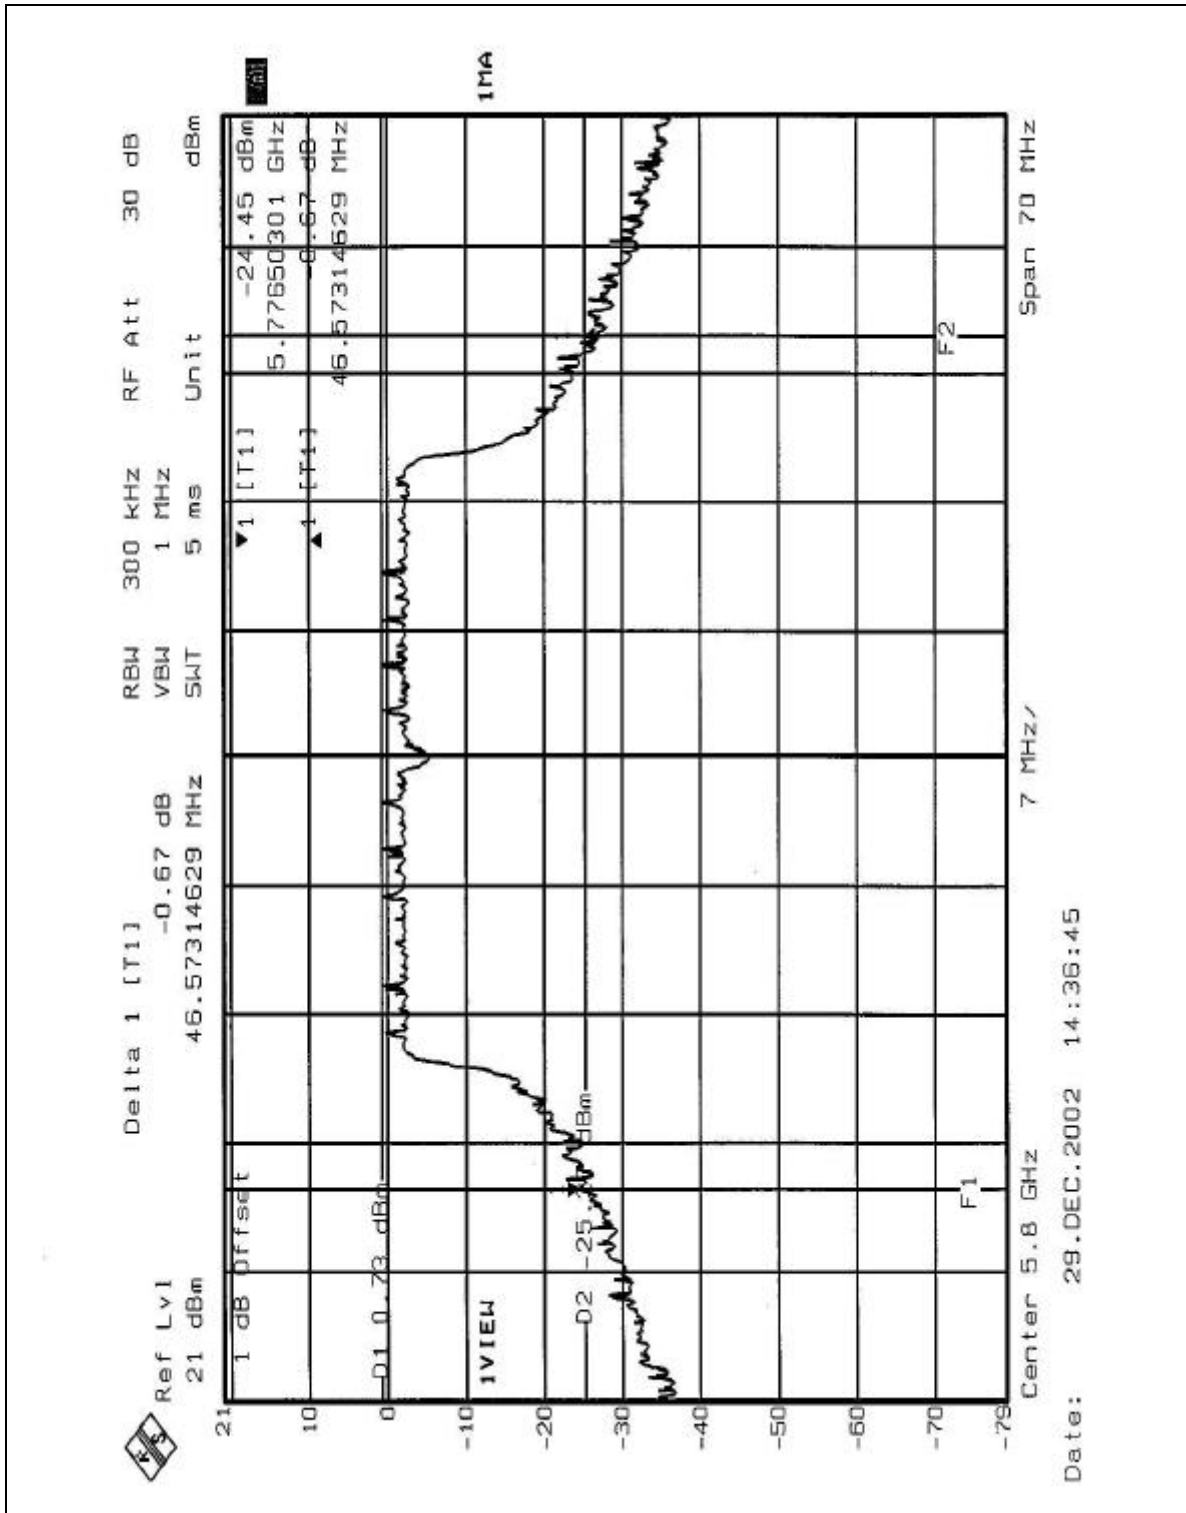



5.4 PEAK POWER EXCURSION MEASUREMENT

5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.725 – 5.825 GHz	13dB

5.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE&SCHWARZ SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




5.4.7 TEST RESULTS

EUT	2.4GHz/5GHz Mini - PCI Card	MODEL	WLL220
MODE	Normal	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20eg. C, 60RH, 1005 hPa	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	6.99	13	PASS
4	5240	5.63	13	PASS
5	5260	5.99	13	PASS
8	5320	6.55	13	PASS
9	5745	5.11	13	PASS
12	5805	6.51	13	PASS




CHANNEL 1

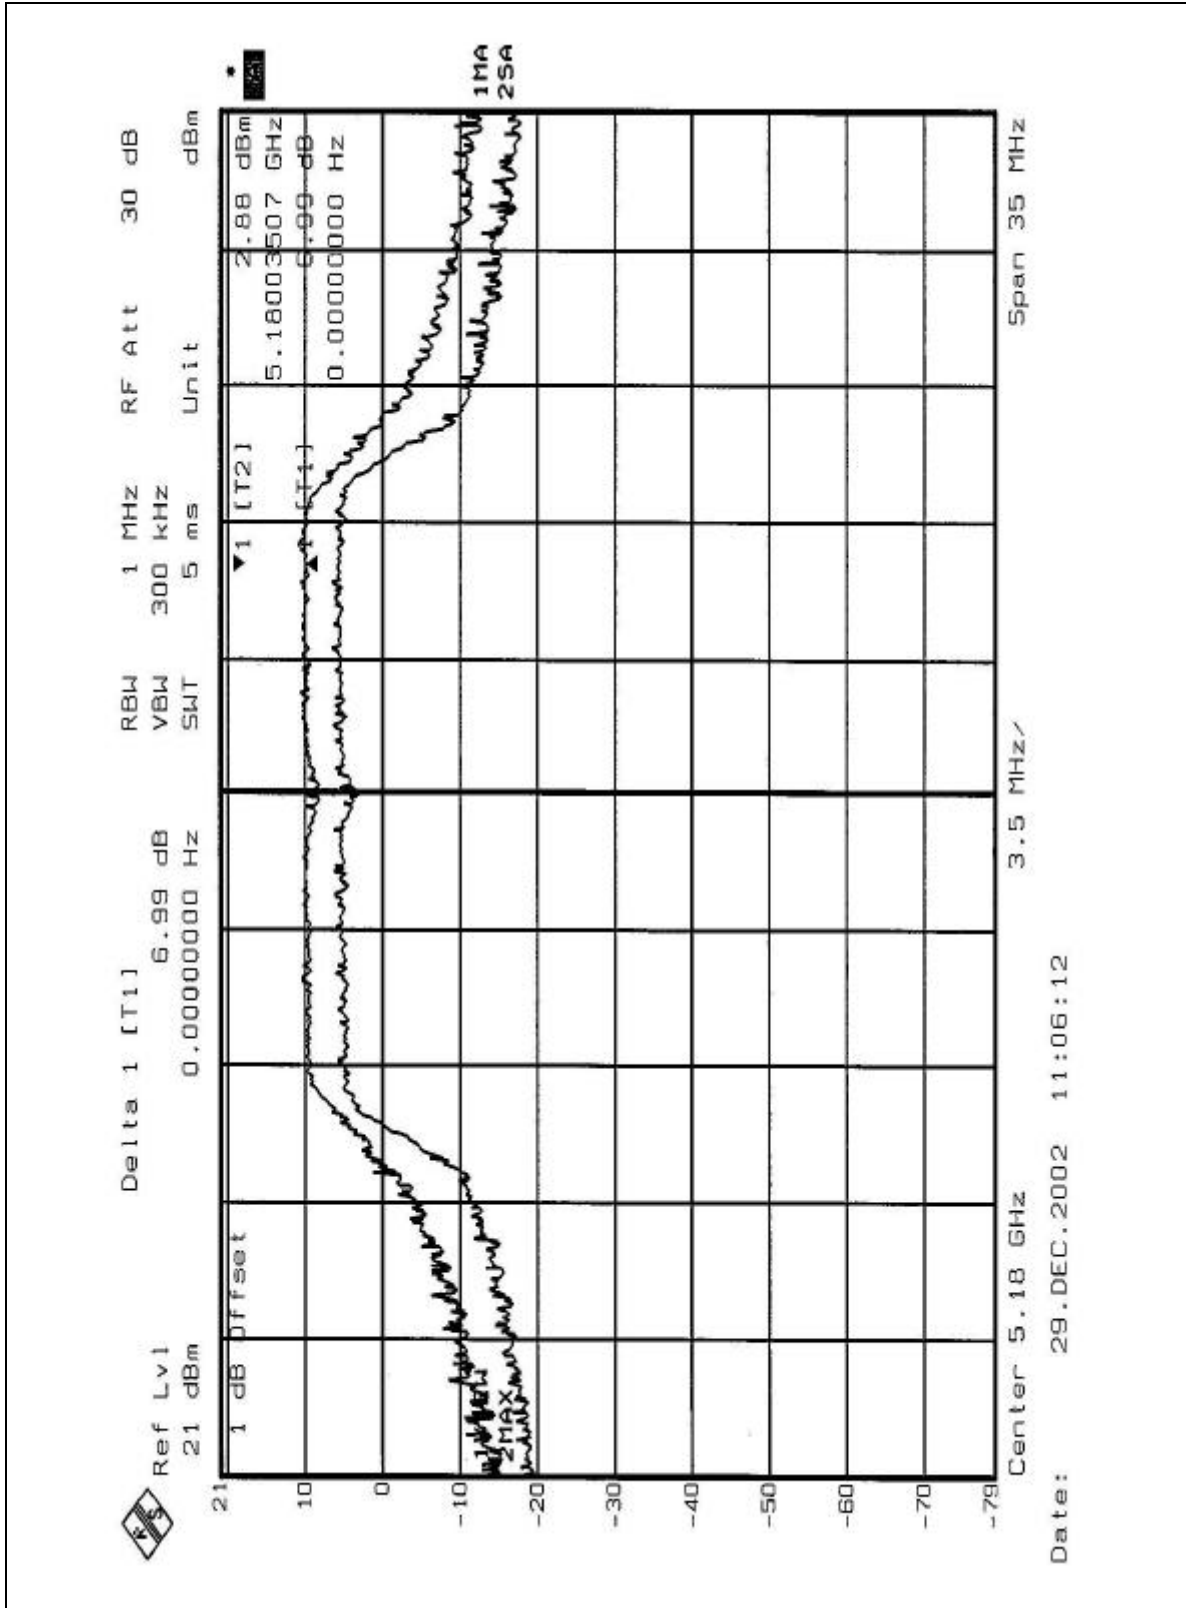



CHANNEL 4

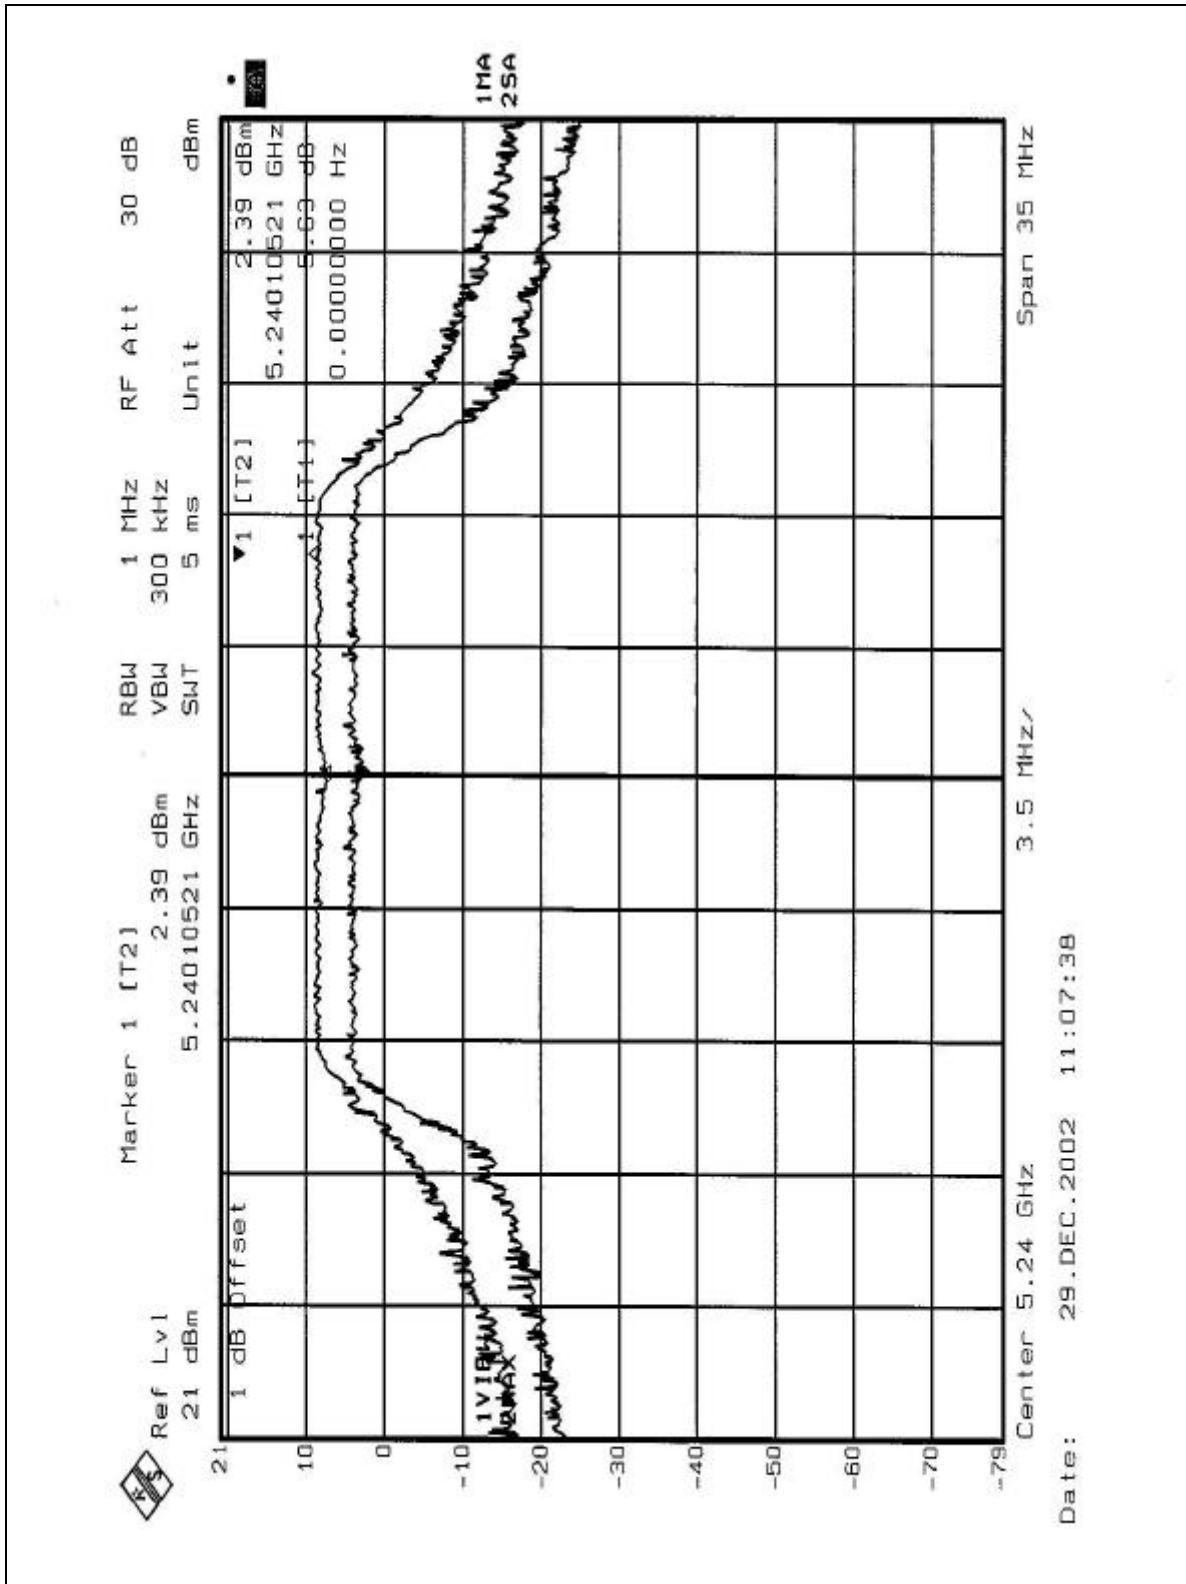



CHANNEL 5

