



FCC TEST REPORT

CATEGORY : Module for Portable Host
PRODUCT NAME : 802.11a/b/g RLAN module
FCC ID. : H9P2121160
FILING TYPE : Certification – Class II Permissive Change
BRAND NAME : SYMBOL
TYPE NO. : 21-21160
MODEL OF HOST : MC3090 (with 11a/b/g module)
APPLICANT : **SYMBOL Technologies, Inc.**
One Symbol Plaza Holtsville, New York, 11742-1300 U.S.A
MANUFACTURER : **Universal Scientific Industrial Co., Ltd.**
141, Lane 351, Taiping Road, Sec.1, Tsao Yuen,
Nan-Tou, Taiwan, R.O.C.
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

This test report is only for the 802.11b/g part of the product, test result of 802.11a is in another separate test report.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON, the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.

Dr. Alan Lane
Vice General Manager
Sporton International Inc.



Lab Code: 200079-0



Table of Contents

| | |
|--|------------------|
| History of this test report..... | ii |
| 1. General Description of Equipment under Test..... | 3 |
| 1.1. Applicant..... | 3 |
| 1.2. Manufacturer | 3 |
| 1.3. Basic Description of Equipment under Test | 3 |
| 1.4. Features of Equipment under Test..... | 3 |
| 1.5. Table for Carrier Frequencies | 4 |
| 2. Test Configuration of the Equipment under Test..... | 5 |
| 2.1. Description of the Test | 5 |
| 2.2. Frequency Range Investigated | 5 |
| 2.3. Test Modes..... | 5 |
| 2.4. Description of Test Supporting Units..... | 6 |
| 2.5. Connection Diagram of Test System | 6 |
| 2.6. Test Software | 7 |
| 3. Test Location and Standards | 8 |
| 3.1. Test Location..... | 8 |
| 3.2. Test Conditions | 8 |
| 3.3. Standards for Methods of Measurement..... | 8 |
| 3.4. DoC Statement..... | 8 |
| 4. List of Measurements..... | 9 |
| 4.1. Summary of the Test Results | 9 |
| 5. Test Result | 10 |
| 5.1. Test of Spectrum Bandwidth of a Direct Sequence Spread Spectrum System (6 dB Bandwidth) | 10 |
| 5.2. Test of Maximum Peak Output Power | 15 |
| 5.3. Test of Peak Power Spectral Density..... | 17 |
| 5.4. Test of Band Edges of the Operating Frequency..... | 22 |
| 5.5. Test of AC Power Line Conducted Emission | 27 |
| 5.6. Test of Spurious Radiated Emission | 32 |
| 5.7. Antenna Requirements | 43 |
| 6. List of Measuring Equipments Used | 44 |
| Appendix A. Photographs of EUT..... | A1 ~ A113 |



History of this test report

No additional attachment.

Additional attachment were issued as following record:

| Attachment No. | Issue Date | Description |
|----------------|------------|-------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |



1. General Description of Equipment under Test

1.1. Applicant

SYMBOL Technologies, Inc.

One Symbol Plaza Holtsville, New York, 11742-1300 U.S.A.

1.2. Manufacturer

Universal Scientific Industrial Co., Ltd.

141, Lane 351, Taiping, Sec. 1, Tsao Yuen, Nan-Tou, Taiwan, R.O.C.

1.3. Basic Description of Equipment under Test

The device supplied for testing was a 21-21160 RF Module which offers 2.4GHz and 5GHz wireless local area network connectivity employing IEEE 802.11 a/b/g technologies intended to be installed in mobile computer which is classified as portable device. The technical data has been listed on section " Features of Equipment under Test ". Accessories for RS232 or USB are available for connection with the computer.

1.4. Features of Equipment under Test

| ITEMS | DESCRIPTION |
|-------------------------------|---|
| Type of Modulation | DSSS (CCK / QPSK / BPSK), OFDM (16, 64 QAM) |
| Number of Channel | 11 |
| Frequency Band | 2400 ~ 2483.5 MHz |
| Carrier Frequencies | Please reference section 1.5. |
| Output Power | CCK :19.30dBm (peak) OFDM : 19.62dBm (peak) |
| Channel Bandwidth | 16 MHz |
| Function Type | Transceiver |
| Antenna / Gain | PIFA Antenna / 1dBi |
| Power Rating (DC/AC, Voltage) | 3.3 VDC |
| Temperature Range (Operating) | -20 ~ +55 |



1.5. Table for Carrier Frequencies

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 5 | 2432 MHz | 9 | 2452 MHz | | |
| 2 | 2417 MHz | 6 | 2437 MHz | 10 | 2457 MHz | | |
| 3 | 2422 MHz | 7 | 2442 MHz | 11 | 2462 MHz | | |
| 4 | 2427 MHz | 8 | 2447 MHz | | | | |



2. Test Configuration of the Equipment under Test

2.1. Description of the Test

- Spurious emission below 1GHz is independent of channel selection, so only channel 11 was tested.
- For spurious emission above 1GHz, DSSS with 11Mbps data rate was tested, OFDM with 54Mbps data rate was tested.
- The EUT has been programmed to continuously transmit or receive during testing. The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2001.
- Please see section 2.3 for the verified test modes.
- 3 meters measurement distance of semi-anechoic chamber was used in this test.

2.2. Frequency Range Investigated

- Conducted power line test: from 150 kHz to 30 MHz
- Radiated emission test: from 30 MHz to 25000 MHz

2.3. Test Modes

The following are the configuration of host MC3090.

| Test Mode | Model 1 | Model 2 |
|-------------|--------------------------------------|--------------------------------------|
| Mechanical | Straight Shooter - Brick | Straight Shooter - Brick |
| Processor | Intel Bulverde 520MHz | Intel Bulverde 416MHz |
| Flash | 64MB | 32MB |
| SDRAM | 64MB | 32MB |
| LCD Panel | Sharp LQ030B7DD01 (Color) | Sharp LQ030B7DD01 (Color) |
| Touch Panel | Liyitec TR4-030F-14G | NA |
| Keypad | 48 Key | 38 Key |
| Scanning | Symbol PICO Imager (20-60000-XX) | Symbol SE800hp |
| WLAN | Symbol Photon 802.11b/g/a (21-21160) | Symbol Photon 802.11b/g/a (21-21160) |
| Battery | Symbol 55-060112-86 3.7V 4400mAh | Symbol 55-060114-86 3.7V 2600mAh |

| Test Mode | Model 3 | Model 4 |
|-------------|--------------------------------------|--------------------------------------|
| Mechanical | Rotating Head – Brick | Rotating Head – Brick |
| Processor | Intel Bulverde 520MHz | Intel Bulverde 416MHz |
| Flash | 64MB | 32MB |
| SDRAM | 64MB | 32MB |
| LCD Panel | EDT ES50512FLWP (Mono) | EDT ES50512FLWP (Mono) |
| Touch Panel | Liyitec TR4-030F-14G | NA |
| Keypad | 28 Key | 38 Key |
| Scanning | Symbol SE800hp | Symbol SE800hp |
| WLAN | Symbol Photon 802.11b/g/a (21-21160) | Symbol Photon 802.11b/g/a (21-21160) |
| Battery | Symbol 55-060112-86 3.7V 4400mAh | Symbol 55-060114-86 3.7V 2600mAh |

The above 4 models have been verified. Model 1 with RS232 accessory was found to be the worst case. So, only this model will be shown in this test report.

2.4. Description of Test Supporting Units


Support Unit 1. – Notebook (DELL)

FCC ID : N/A
Model No. : PP10L
Serial No. : SP0031
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity.

Support Unit 2. – Printer (EPSON)

FCC ID : N/A
Model No. : Stylus Color 680
Serial No. : SP0016
Remark : This support device was tested to comply with FCC standards and authorized under Declaration of Conformity and data cable is 1.35m of the shielded.

2.5. Connection Diagram of Test System

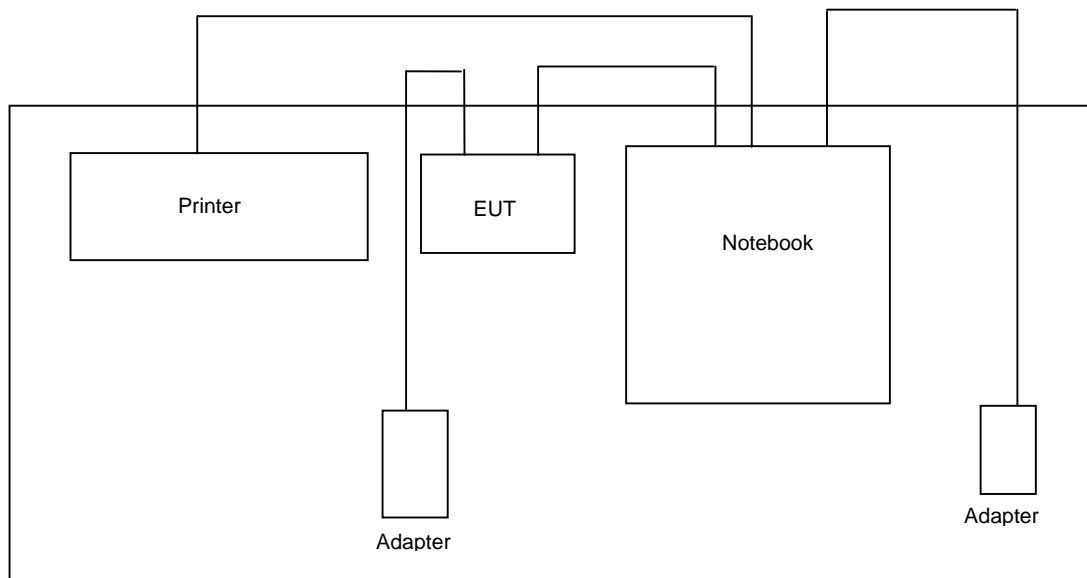



2.6. Test Software

Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.



3. Test Location and Standards

3.1. Test Location

Test Location : Sporton Hwa Ya Testing Building
Address : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Tel: +886 3 327 3456 Fax: +886 3 318 0055
Test Site No. : CO04-HY, 03CH03-HY

3.2. Test Conditions

Normal Voltage : 120V/60Hz (power adapter)
Extreme Voltage : 138V and 102V (power adapter)
Normal Temperature : 20
Extreme Temperature : -20 and 50

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2001

47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.



4. List of Measurements

4.1. Summary of the Test Results

| Applied Standard: 47 CFR Part 15 and Part 2 | | | |
|---|------------------|--|--------|
| Paragraph | FCC Rule | Description of Test | Result |
| 5.1 | 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System(6 dB Bandwidth) | Pass |
| 5.2 | 15.247(b) | Maximum Peak Output Power | Pass |
| 5.3 | 15.247(d) | Peak Power Spectral Density | Pass |
| 5.4 | 15.247(c) | Band Edges of the Operating Frequency | Pass |
| 5.5 | 15.107/15.207 | AC Power Line Conducted Emission | Pass |
| 5.6 | 15.209/15.247(c) | Spurious Radiated Emission | Pass |
| 5.7 | 15.203 | Antenna Requirement | Pass |

5. Test Result

5.1. Test of Spectrum Bandwidth of a Direct Sequence Spread Spectrum System (6 dB Bandwidth)


5.1.1 Measuring Instruments

Item 9 of the table on section 6.

5.1.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6dB bandwidth is defined as the spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.1.3 Test Setup Layout

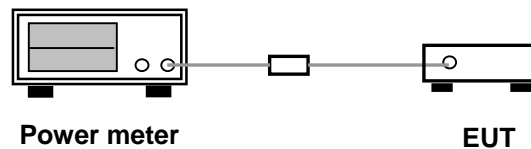


5.1.4 Test Result: See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 24°C
- Relative humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Min. Limit (MHz) |
|---------|--------------------|------------------------|---------------------|
| 01 | 2412 | 11.52 | 0.5 |
| 06 | 2437 | 11.52 | 0.5 |
| 11 | 2462 | 11.42 | 0.5 |




CCK (Channel 01) :

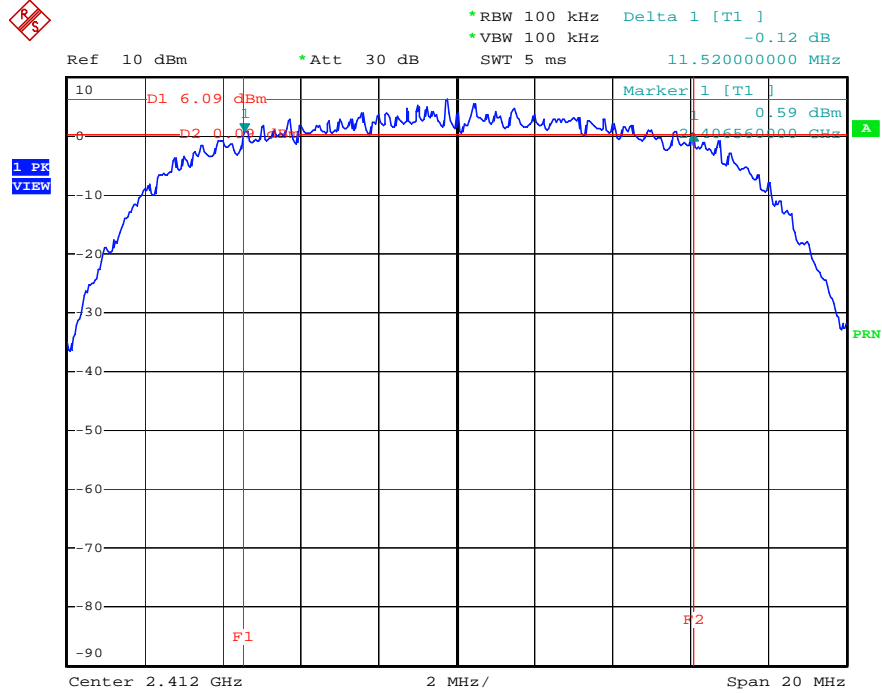

Date: 30.AUG.2004 09:43:12


CCK (Channel 06) :

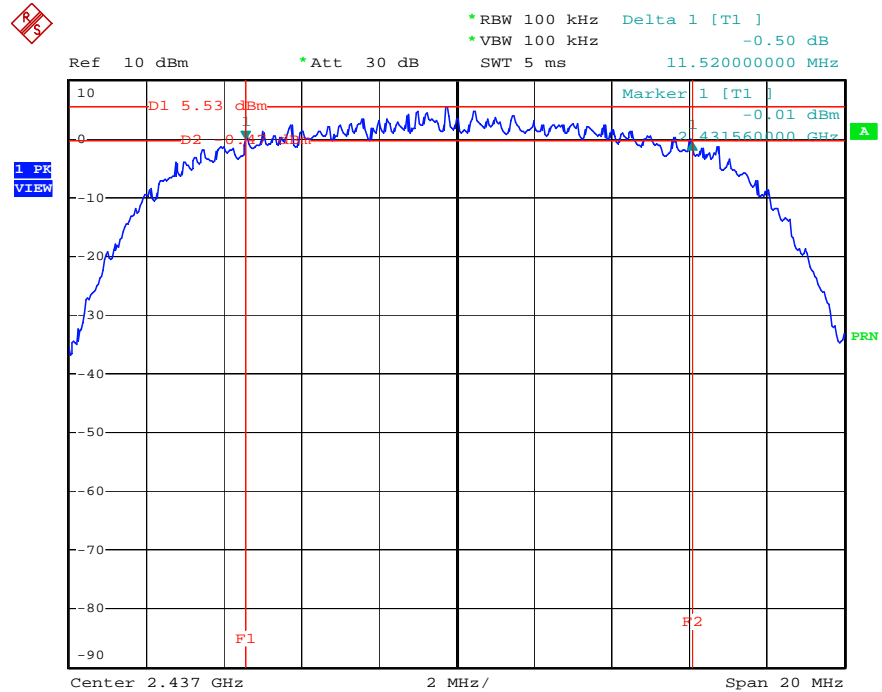

Date: 30.AUG.2004 09:45:22



CCK (Channel 11) :

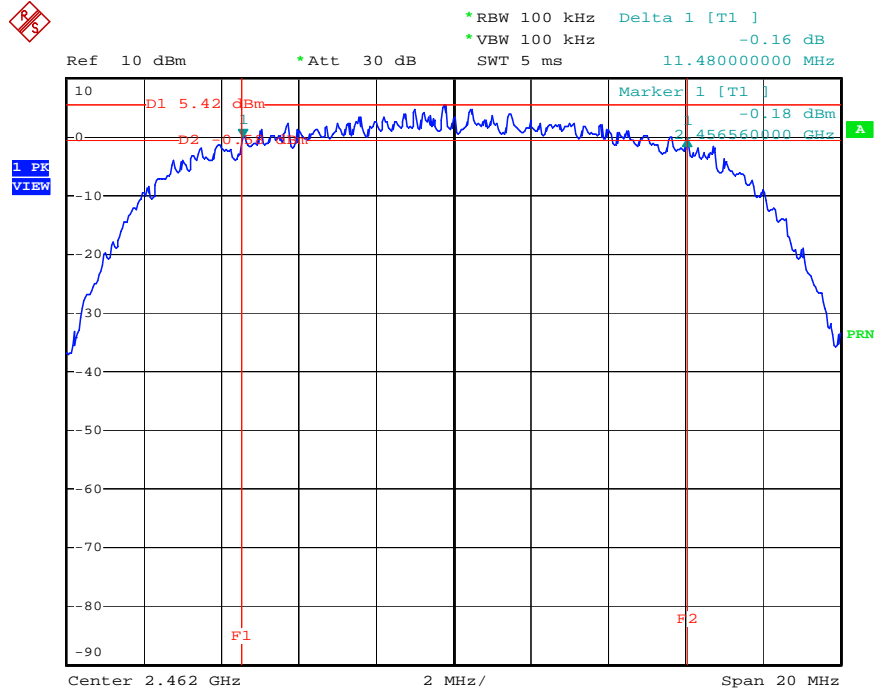

Date: 30.AUG.2004 09:47:31


5.1.5 Test Result: See spectrum analyzer plots below

- Modulation Type: OFDM
- Temperature: 24°C
- Relative humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Min. Limit (MHz) |
|---------|--------------------|------------------------|---------------------|
| 01 | 2412 | 16.44 | 0.5 |
| 06 | 2437 | 16.44 | 0.5 |
| 11 | 2462 | 16.48 | 0.5 |




OFDM (Channel 01) :

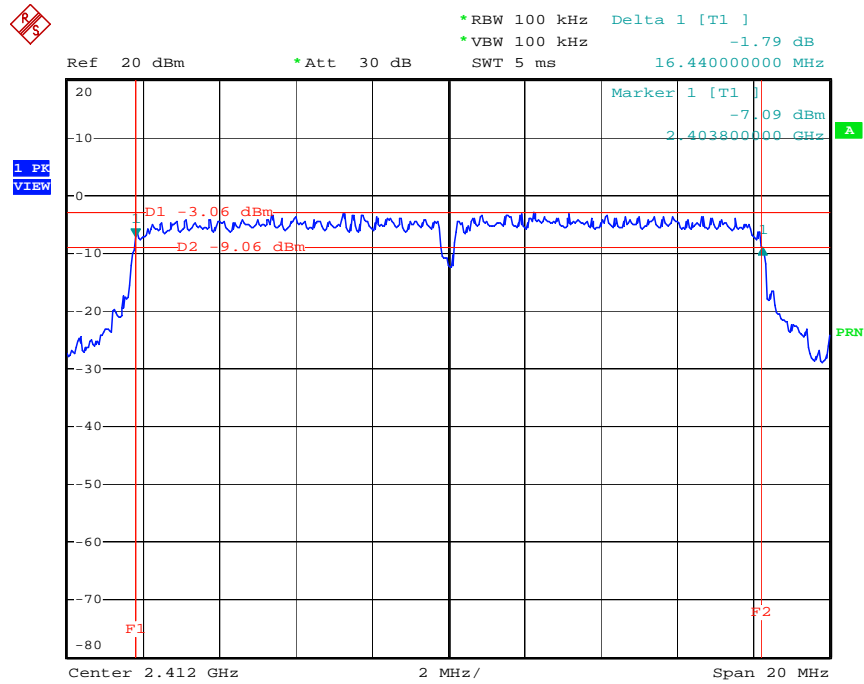

Date: 30.AUG.2004 10:27:05


OFDM (Channel 06) :

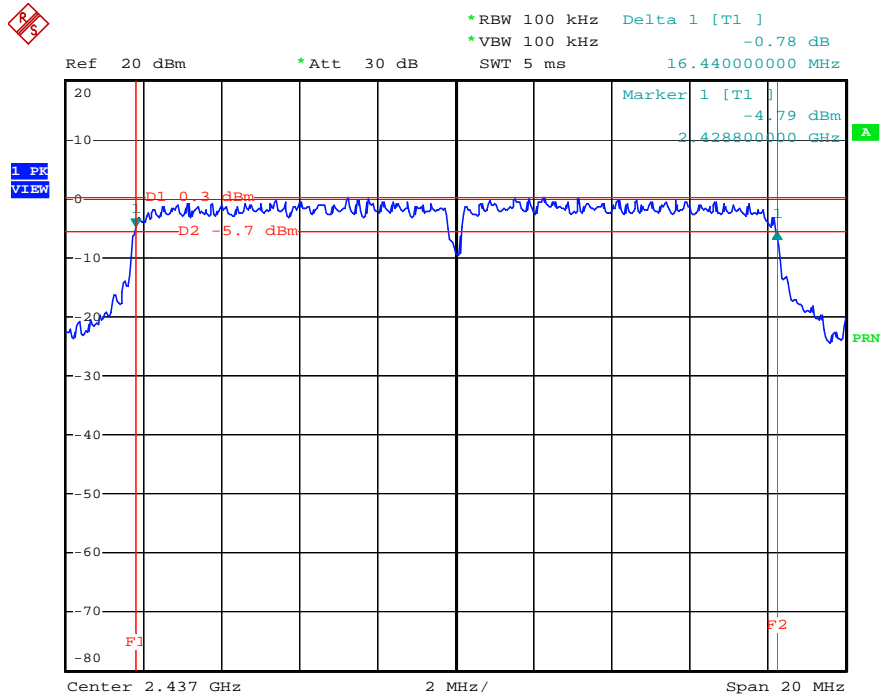

Date: 30.AUG.2004 10:28:53



OFDM (Channel 11) :

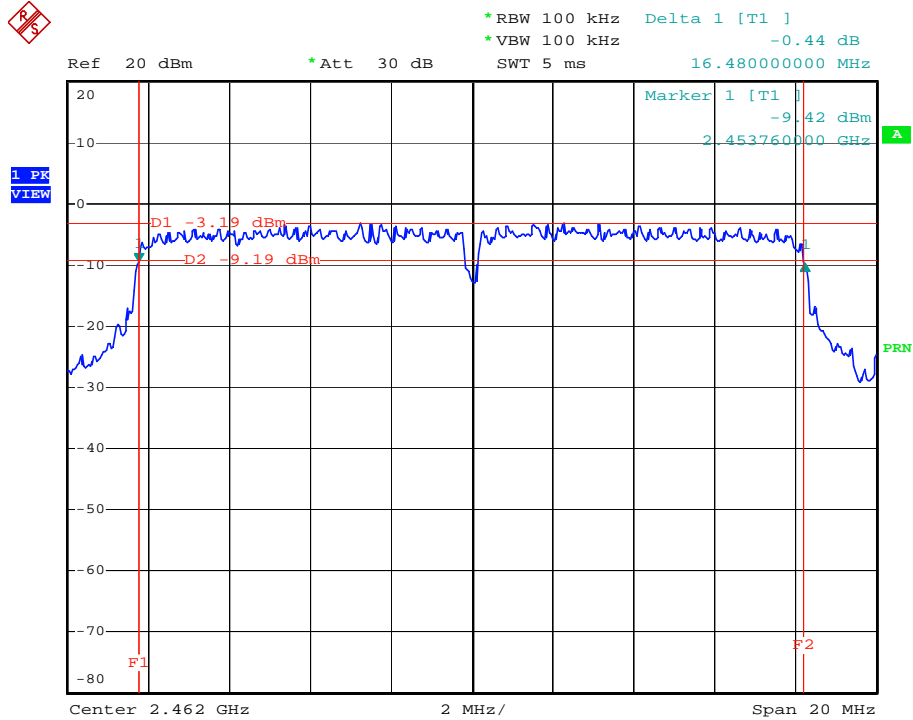

Date: 30.AUG.2004 10:33:11

5.2. Test of Maximum Peak Output Power


5.2.1 Measuring Instruments

Item 9 of the table on section 6.

5.2.2 Test Procedures

1. The transmitter output was connected to the vertical channel of the oscilloscope through a detector.
2. Record peak value from the meter.
3. Replace the EUT by a signal generator and record the power level which can get the same response on the oscilloscope.
4. Repeated the 1~3 for the middle and highest channel of the EUT.

5.2.3 Test Setup Layout

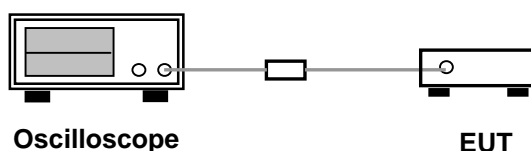

5.2.4 Test Result

- Modulation Type: CCK
- Temperature: 24°C
- Relative humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (mWatt) | Limits (dBm) |
|---------|--------------------|-----------------------|-------------------------|------------------|
| 01 | 2412 | 19.20 | 83.18 | 30 dBm |
| 06 | 2437 | 19.30 | 85.11 | 30 dBm |
| 11 | 2462 | 19.02 | 79.80 | 30 dBm |



5.2.5 Test Result

- Modulation Type: OFDM
- Temperature: 24°C
- Relative humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (mWatt) | Limits (dBm) |
|---------|--------------------|-----------------------|-------------------------|------------------|
| 01 | 2412 | 16.78 | 47.64 | 30 dBm |
| 06 | 2437 | 19.62 | 91.62 | 30 dBm |
| 11 | 2462 | 17.30 | 53.70 | 30 dBm |

5.3. Test of Peak Power Spectral Density


5.3.1 Measuring Instruments

Item 9 of the table on section 6.

5.3.2 Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.3.3 Test Setup Layout

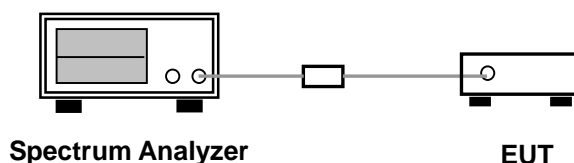


5.3.4 Test Result : See spectrum analyzer plots below

- Modulation Type: CCK
- Temperature: 24°C
- Relative Humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | Power Density (dBm) | Limits (dBm) |
|---------|--------------------|------------------------|-----------------|
| 01 | 2412 | -5.78 | 8 |
| 06 | 2437 | -6.24 | 8 |
| 11 | 2462 | -6.94 | 8 |




CCK (Channel 01) :

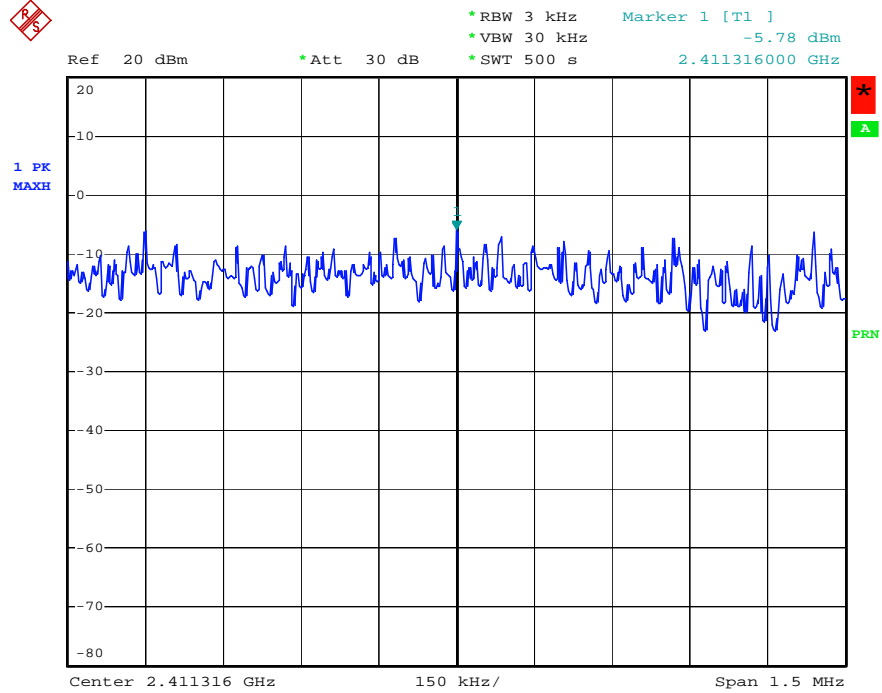

Date: 1.NOV.2004 15:00:23


CCK (Channel 06) :

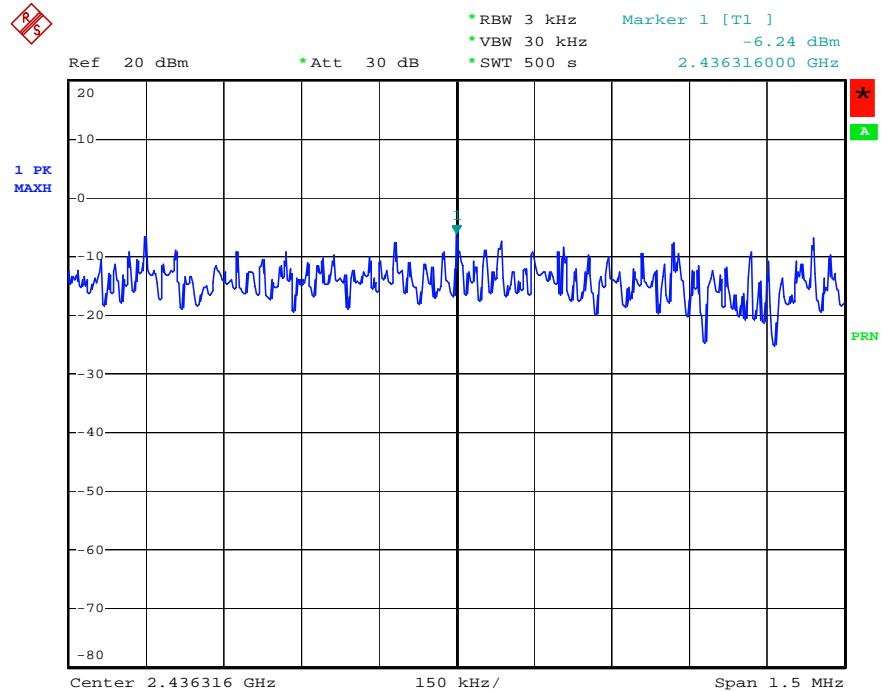

Date: 1.NOV.2004 15:01:23



CCK (Channel 11) :

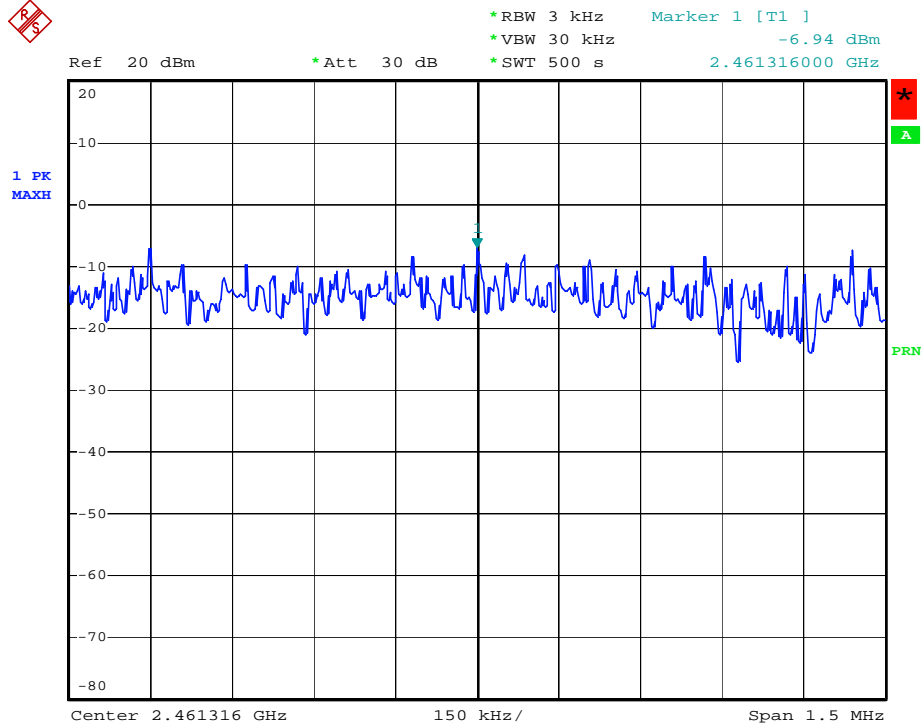

Date: 1.NOV.2004 15:02:16


5.3.5 Test Result : See spectrum analyzer plots below

- Modulation Type: OFDM
- Temperature: 24°C
- Relative Humidity: 60 %
- Test Engineer: Bunny Yao

| Channel | Frequency (MHz) | Power Density (dBm) | Limits (dBm) |
|---------|--------------------|------------------------|-----------------|
| 01 | 2412 | -14.82 | 8 |
| 06 | 2437 | -12.21 | 8 |
| 11 | 2462 | -14.88 | 8 |




OFDM (Channel 01) :

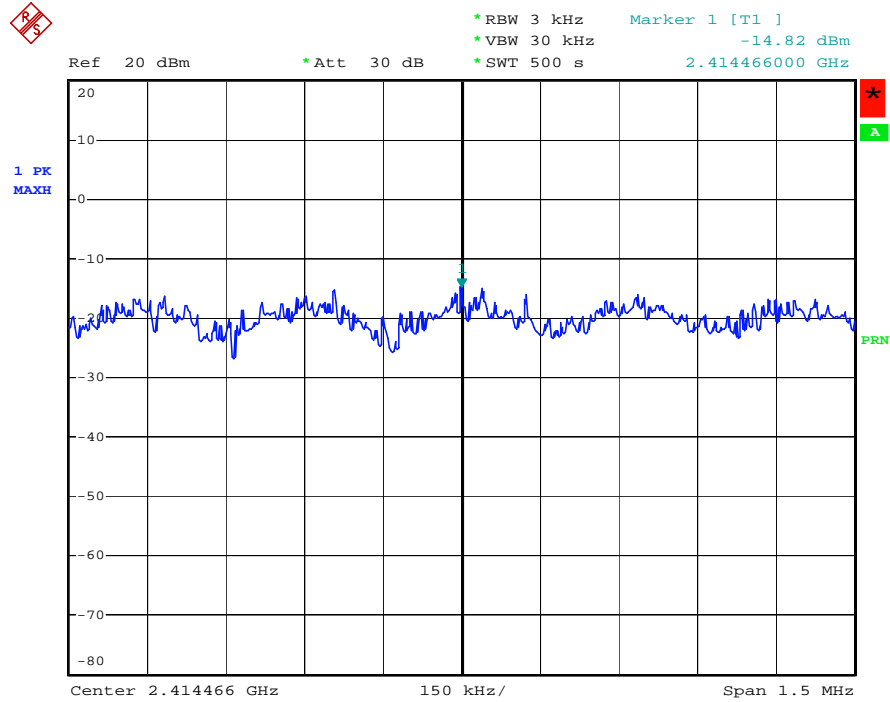

Date: 1.NOV.2004 14:50:15


OFDM (Channel 06) :

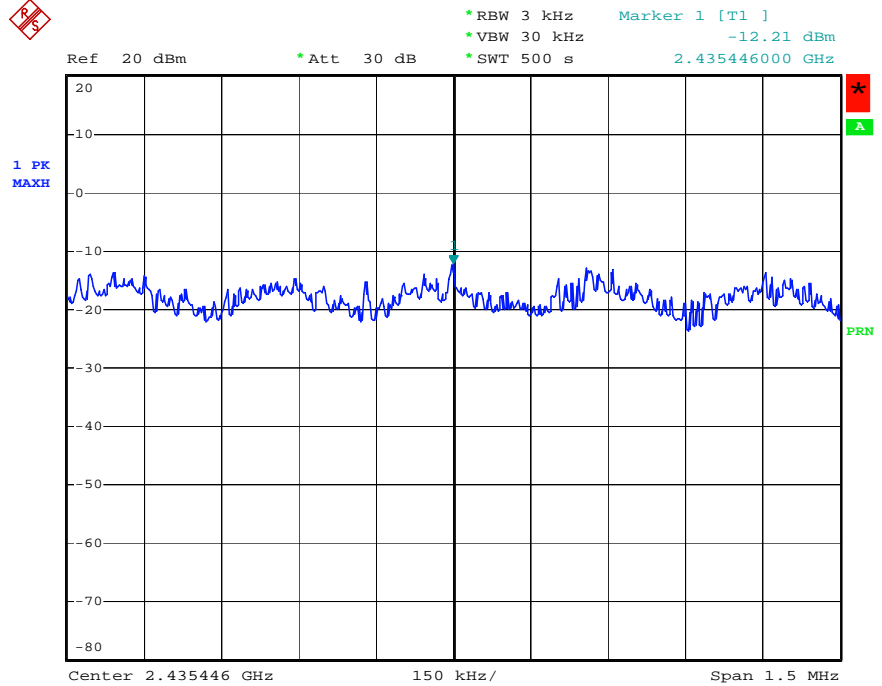

Date: 1.NOV.2004 14:51:26



OFDM (Channel 11) :

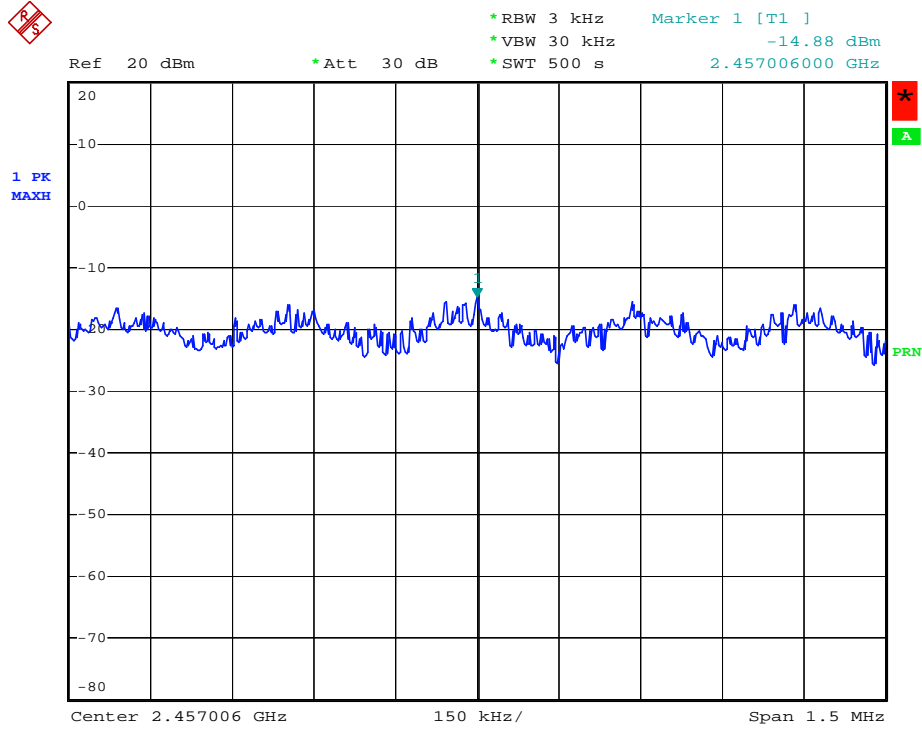

Date: 1.NOV.2004 14:53:11



5.4. Test of Band Edges of the Operating Frequency

5.4.1 Measuring Instruments

Item 9 of the table on section 6.

5.4.2 Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.4.3 Test Result

| | |
|--|------|
| Test Result in lower band (Channel 01) : | PASS |
| Test Result in higher band(Channel 11) : | PASS |



5.4.4 Note on Band edge Emission

Modulation Type : CCK

(A) Left Edge

The band edge emission plot shows 58.22dB delta between carrier maximum power and local maximum emission in the restricted band.

| CH01 Carrier power strength (dB μ V/m) | Delta (dB) | The maximum field strength in restrict band (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--|------------|--|----------------------|-------------|
| 97.42 | 58.22 | 39.20 | 54.00 | -14.80 |

(B) Right Edge


The band edge emission plot shows 57.61dB delta between carrier maximum power and local maximum emission in the restricted band.

| CH11 Carrier power strength (dB μ V/m) | Delta (dB) | The maximum field strength in restrict band (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--|------------|--|----------------------|-------------|
| 93.27 | 57.61 | 35.66 | 54.00 | -18.34 |


* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.



CCK (Channel 01) :

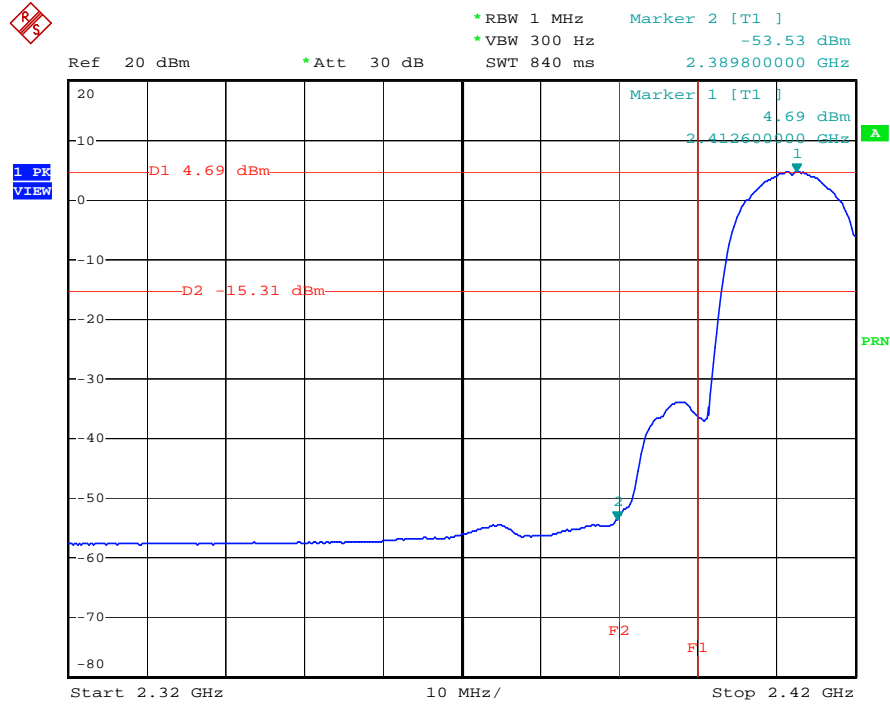

CCK (Channel 11) :

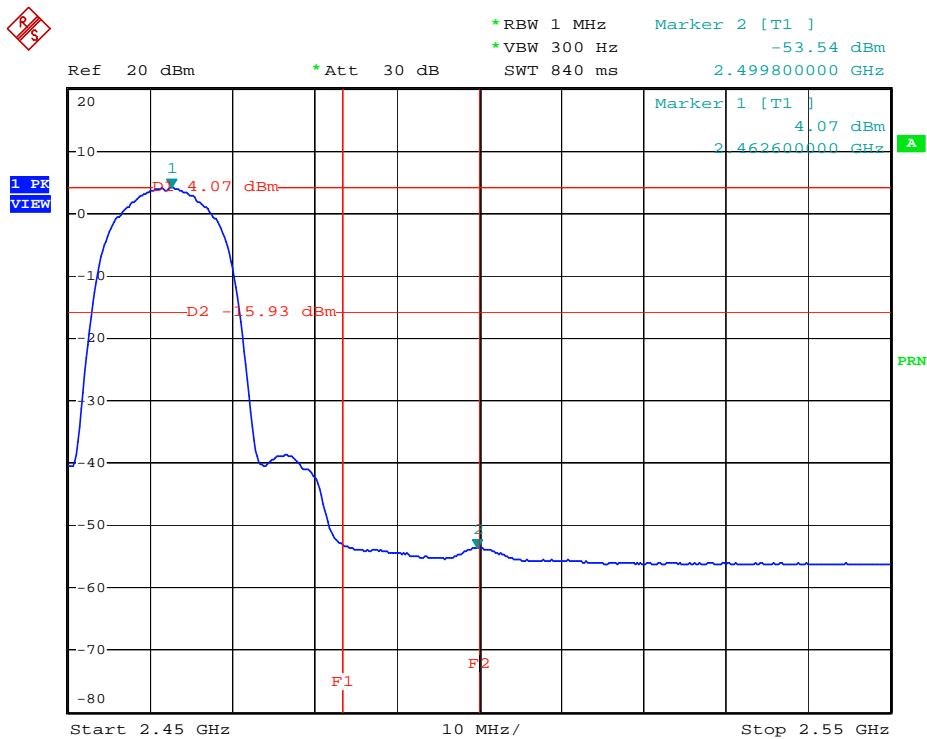

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.4.5 Note on Band edge Emission

Modulation Type : OFDM

(A) Left Edge

The band edge emission plot shows 51.53dB delta between carrier maximum power and local maximum emission in the restricted band.

| CH01 Carrier power strength (dB μ V/m) | Delta (dB) | The maximum field strength in restrict band (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--|------------|--|----------------------|-------------|
| 93.75 | 51.53 | 42.22 | 54.00 | -11.78 |

(B) Right Edge


The band edge emission plot shows 51.10dB delta between carrier maximum power and local maximum emission in the restricted band.

| CH11 Carrier power strength (dB μ V/m) | Delta (dB) | The maximum field strength in restrict band (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|--|------------|--|----------------------|-------------|
| 88.10 | 51.10 | 37.00 | 54.00 | -17.00 |


* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.



OFDM (Channel 01) :

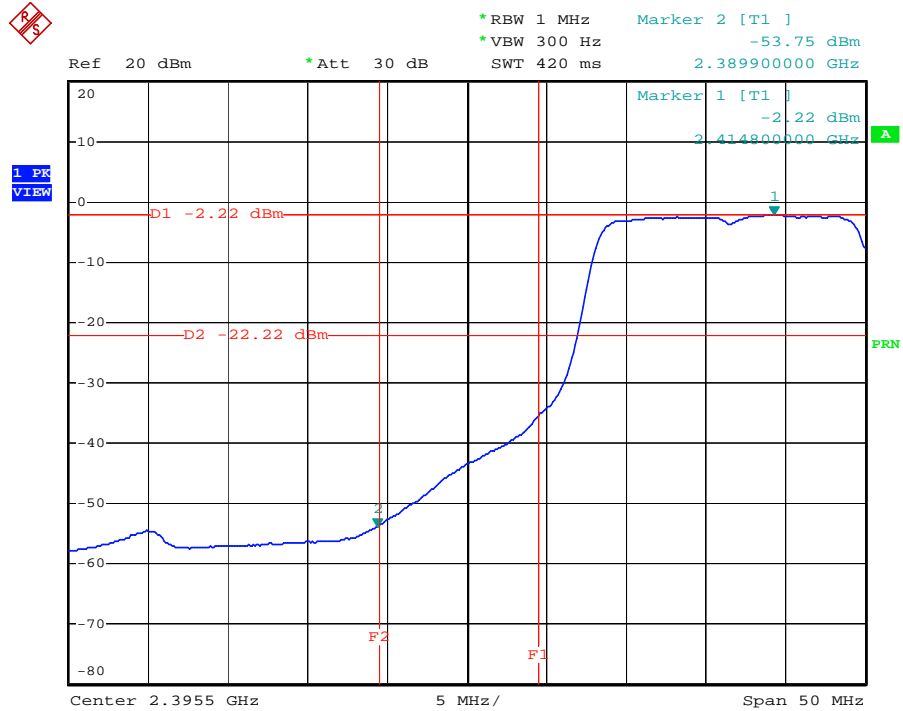

OFDM (Channel 11) :

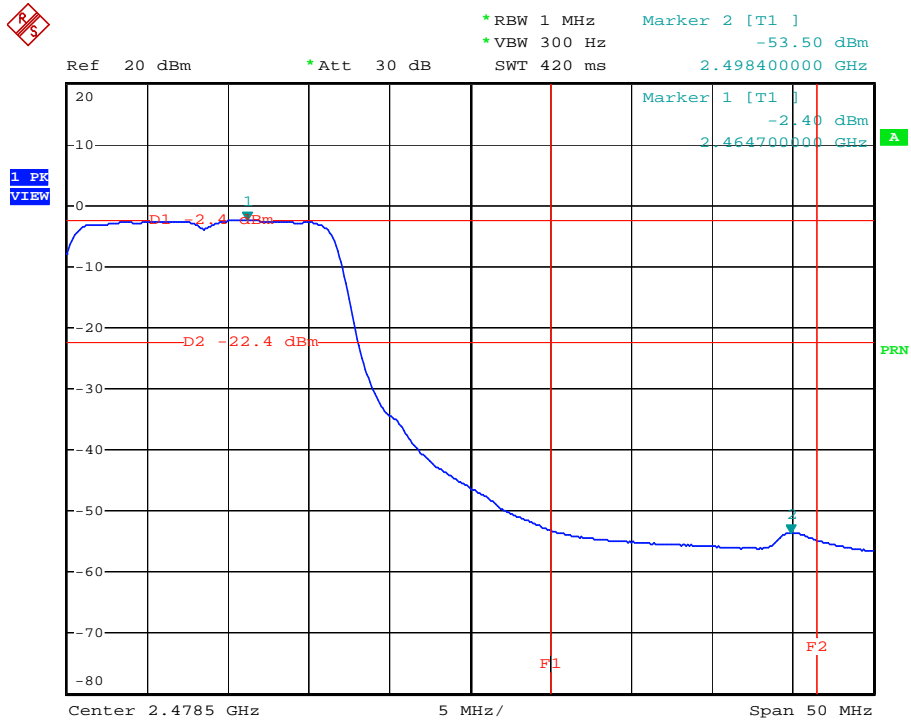

Observation : All emissions in the 100kHz bandwidth are 20dB lower than the carrier strength.



5.5. Test of AC Power Line Conducted Emission

5.5.1 Measuring Instruments

Please reference item 1~7 in chapter 6 for the instruments used for testing.

5.5.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.



5.5.3 Test Result of Conducted Emission

| | | | |
|-------------------------------|-----------------|------------------|-----------|
| Modulation Type | CCK | | |
| Test Mode | Mode 1 | Tested By | Brian Lin |
| Temperature / Humidity | 27 deg. C / 44% | | |

Line to Ground

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|------------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | @0.1514870 | 44.70 | -21.22 | 65.92 | 44.59 | 0.10 | 0.01 | QP |
| 2 | 0.1514870 | 18.62 | -37.30 | 55.92 | 18.51 | 0.10 | 0.01 | Average |
| 3 | @0.1913520 | 45.90 | -18.08 | 63.98 | 45.79 | 0.10 | 0.01 | QP |
| 4 | @0.1913520 | 33.44 | -20.54 | 53.98 | 33.33 | 0.10 | 0.01 | Average |
| 5 | @0.1917970 | 34.30 | -19.66 | 53.96 | 34.19 | 0.10 | 0.01 | Average |
| 6 | @0.1917970 | 46.76 | -17.20 | 63.96 | 46.65 | 0.10 | 0.01 | QP |
| 7 | @0.2163110 | 48.47 | -14.49 | 62.96 | 48.36 | 0.10 | 0.01 | QP |
| 8 | 0.2163110 | 15.17 | -37.79 | 52.96 | 15.06 | 0.10 | 0.01 | Average |
| 9 | @0.2495110 | 28.01 | -23.76 | 51.77 | 27.90 | 0.10 | 0.01 | Average |
| 10 | @0.2495110 | 38.13 | -23.64 | 61.77 | 38.02 | 0.10 | 0.01 | QP |
| 11 | @0.2515110 | 28.01 | -23.70 | 51.71 | 27.90 | 0.10 | 0.01 | Average |
| 12 | @0.2515110 | 39.49 | -22.22 | 61.71 | 39.38 | 0.10 | 0.01 | QP |
| 13 | @ 3.010 | 30.44 | -25.56 | 56.00 | 30.23 | 0.16 | 0.05 | QP |
| 14 | 3.010 | 7.44 | -38.56 | 46.00 | 7.23 | 0.16 | 0.05 | Average |

Neutral to Ground

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|------------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | @0.1564950 | 44.97 | -20.68 | 65.65 | 44.86 | 0.10 | 0.01 | QP |
| 2 | 0.1564950 | 23.95 | -31.70 | 55.65 | 23.84 | 0.10 | 0.01 | Average |
| 3 | @0.1885450 | 33.90 | -20.20 | 54.10 | 33.79 | 0.10 | 0.01 | Average |
| 4 | @0.1885450 | 46.26 | -17.84 | 64.10 | 46.15 | 0.10 | 0.01 | QP |
| 5 | @0.1922450 | 31.36 | -22.58 | 53.94 | 31.25 | 0.10 | 0.01 | Average |
| 6 | @0.1922450 | 44.67 | -19.27 | 63.94 | 44.56 | 0.10 | 0.01 | QP |
| 7 | @0.2333330 | 37.35 | -24.98 | 62.33 | 37.24 | 0.10 | 0.01 | QP |
| 8 | 0.2333330 | 11.18 | -41.15 | 52.33 | 11.07 | 0.10 | 0.01 | Average |
| 9 | @0.2481360 | 26.48 | -25.34 | 51.82 | 26.37 | 0.10 | 0.01 | Average |
| 10 | @0.2481360 | 37.31 | -24.51 | 61.82 | 37.20 | 0.10 | 0.01 | QP |
| 11 | 2.715 | 9.39 | -36.61 | 46.00 | 9.25 | 0.10 | 0.04 | Average |
| 12 | @ 2.715 | 32.92 | -23.08 | 56.00 | 32.78 | 0.10 | 0.04 | QP |



| | | | |
|-------------------------------|-----------------|------------------|-----------|
| Modulation Type | OFDM | | |
| Test Mode | Mode 1 | Tested By | Brian Lin |
| Temperature / Humidity | 27 deg. C / 44% | | |

Line to Ground

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-------------|--------------|-------------------|-------------------|-------------------|--------------------|-------------------|---------------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | @0.1532130 | 44.68 | -21.14 | 65.82 | 44.57 | 0.10 | 0.01 | QP |
| 2 | 0.1532130 | 19.04 | -36.78 | 55.82 | 18.93 | 0.10 | 0.01 | Average |
| 3 | @0.1694400 | 42.76 | -22.23 | 64.99 | 42.65 | 0.10 | 0.01 | QP |
| 4 | 0.1694400 | 15.98 | -39.01 | 54.99 | 15.87 | 0.10 | 0.01 | Average |
| 5 | @0.1892300 | 46.68 | -17.39 | 64.07 | 46.57 | 0.10 | 0.01 | QP |
| 6 | @0.1892300 | 35.04 | -19.03 | 54.07 | 34.93 | 0.10 | 0.01 | Average |
| 7 | @0.2007870 | 40.09 | -23.49 | 63.58 | 39.98 | 0.10 | 0.01 | QP |
| 8 | 0.2007870 | 18.58 | -35.00 | 53.58 | 18.47 | 0.10 | 0.01 | Average |
| 9 | @0.2534510 | 38.20 | -23.44 | 61.64 | 38.09 | 0.10 | 0.01 | QP |
| 10 | @0.2534510 | 27.25 | -24.39 | 51.64 | 27.14 | 0.10 | 0.01 | Average |
| 11 | @ 2.877 | 29.67 | -26.33 | 56.00 | 29.47 | 0.15 | 0.05 | QP |
| 12 | 2.877 | 6.24 | -39.76 | 46.00 | 6.04 | 0.15 | 0.05 | Average |

Neutral to Ground

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-------------|--------------|-------------------|-------------------|-------------------|--------------------|-------------------|---------------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | @0.1590020 | 43.94 | -21.58 | 65.52 | 43.83 | 0.10 | 0.01 | QP |
| 2 | 0.1590020 | 15.52 | -40.00 | 55.52 | 15.41 | 0.10 | 0.01 | Average |
| 3 | @0.1907340 | 44.63 | -19.37 | 64.00 | 44.52 | 0.10 | 0.01 | QP |
| 4 | @0.1907340 | 32.11 | -21.89 | 54.00 | 32.00 | 0.10 | 0.01 | Average |
| 5 | @0.2127940 | 39.46 | -23.64 | 63.10 | 39.35 | 0.10 | 0.01 | QP |
| 6 | 0.2127940 | 11.72 | -41.38 | 53.10 | 11.61 | 0.10 | 0.01 | Average |
| 7 | @0.2520240 | 37.77 | -23.92 | 61.69 | 37.66 | 0.10 | 0.01 | QP |
| 8 | @0.2520240 | 26.59 | -25.10 | 51.69 | 26.48 | 0.10 | 0.01 | Average |
| 9 | @0.3165430 | 22.50 | -27.30 | 49.80 | 22.38 | 0.10 | 0.02 | Average |
| 10 | @0.3165430 | 32.14 | -27.66 | 59.80 | 32.02 | 0.10 | 0.02 | QP |
| 11 | 3.450 | 10.38 | -35.62 | 46.00 | 10.22 | 0.10 | 0.06 | Average |
| 12 | @ 3.450 | 29.87 | -26.13 | 56.00 | 29.71 | 0.10 | 0.06 | QP |

5.5.4 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

Mode 1


FRONT VIEW



REAR VIEW



SIDE VIEW

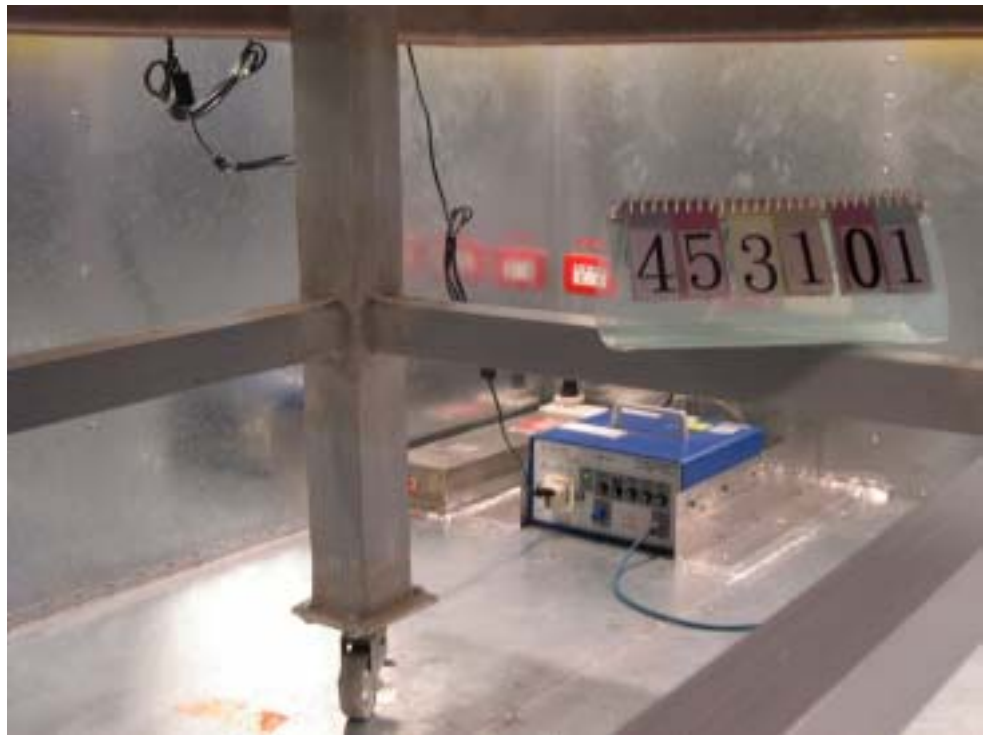



5.6. Test of Spurious Radiated Emission


5.6.1 Measuring Instruments

Please reference item 8~19 in chapter 6 for the instruments used for testing.

5.6.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 300Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3 Test Setup Layout

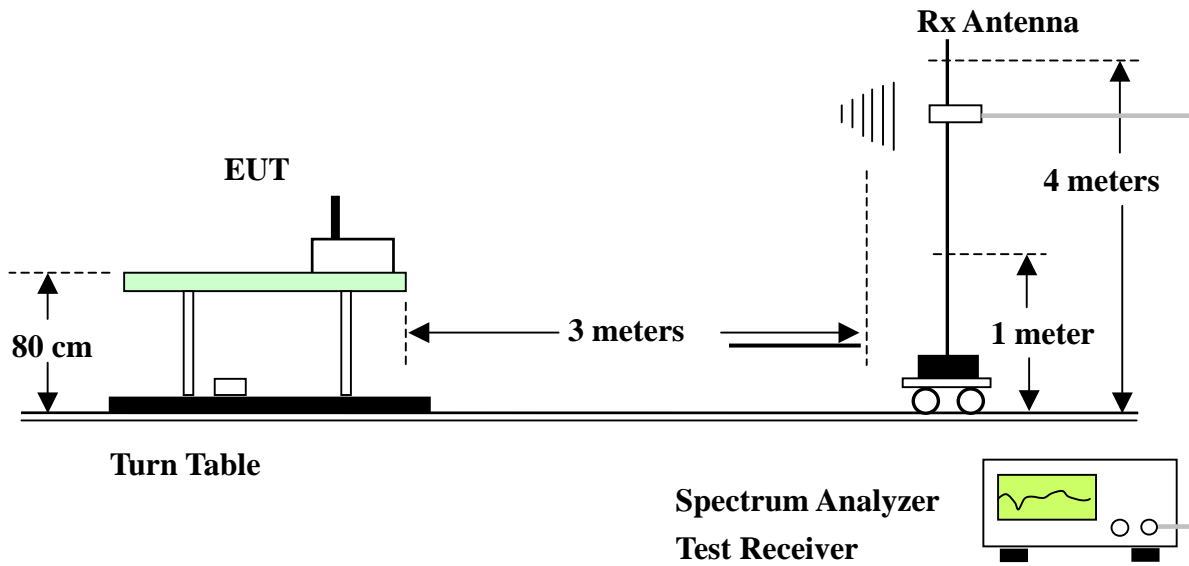



5.6.4 Test Results and Limit

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | OFDM | | | | |
| Test Mode | CH 11 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 30MHz~1GHz | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|--------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 107.860 | 31.51 | -11.99 | 43.50 | 47.41 | 10.13 | 1.85 | 27.88 | Peak | --- | --- |
| 2 | 166.510 | 24.94 | -18.56 | 43.50 | 37.06 | 13.31 | 2.34 | 27.77 | Peak | --- | --- |
| 3 | 197.620 | 29.63 | -13.87 | 43.50 | 39.18 | 15.60 | 2.55 | 27.70 | Peak | --- | --- |
| 1 | 265.600 | 37.73 | -8.27 | 46.00 | 49.47 | 12.77 | 2.93 | 27.44 | Peak | --- | --- |
| 2 | 832.000 | 34.61 | -11.39 | 46.00 | 36.19 | 21.84 | 5.22 | 28.64 | Peak | --- | --- |
| 3 | 998.400 | 35.41 | -18.59 | 54.00 | 34.06 | 23.86 | 5.69 | 28.20 | Peak | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|--------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 33.060 | 32.57 | -7.43 | 40.00 | 47.29 | 12.33 | 0.99 | 28.04 | Peak | 121 | 147 |
| 2 | 62.980 | 24.84 | -15.16 | 40.00 | 41.19 | 10.29 | 1.33 | 27.97 | Peak | --- | --- |
| 3 | 170.420 | 26.94 | -16.56 | 43.50 | 38.61 | 13.72 | 2.37 | 27.76 | Peak | --- | --- |
| 1 | 663.200 | 32.58 | -13.42 | 46.00 | 36.07 | 20.59 | 4.66 | 28.74 | Peak | --- | --- |
| 2 | 832.000 | 33.29 | -12.71 | 46.00 | 34.87 | 21.84 | 5.22 | 28.64 | Peak | --- | --- |
| 3 | 998.400 | 34.79 | -19.21 | 54.00 | 33.44 | 23.86 | 5.69 | 28.20 | Peak | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | CCK | | | | |
| Test Mode | CH 01 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHz~25GHz | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1000.000 | 46.78 | -7.22 | 54.00 | 64.27 | 23.80 | 1.11 | 42.40 | Peak | --- | --- |
| 2 | 1326.000 | 45.28 | -8.72 | 54.00 | 61.71 | 24.75 | 1.35 | 42.53 | Average | --- | --- |
| 3 | 2174.000 | 46.70 | -7.30 | 54.00 | 60.10 | 27.57 | 1.69 | 42.66 | Average | --- | --- |
| 4 | 2380.000 | 47.89 | -6.11 | 54.00 | 60.69 | 28.11 | 1.71 | 42.62 | Average | 105 | 144 |
| 1 | 4822.000 | 51.08 | -22.92 | 74.00 | 59.75 | 33.23 | 2.47 | 44.37 | Peak | --- | --- |
| 2 | 4822.000 | 39.88 | -14.12 | 54.00 | 48.55 | 33.23 | 2.47 | 44.37 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1998.000 | 43.79 | -10.21 | 54.00 | 57.86 | 27.11 | 1.52 | 42.70 | Average | --- | --- |
| 2 | 2212.000 | 45.57 | -8.43 | 54.00 | 58.85 | 27.67 | 1.70 | 42.65 | Average | --- | --- |
| 3 | 2340.000 | 47.40 | -6.60 | 54.00 | 60.33 | 28.01 | 1.69 | 42.63 | Average | --- | --- |
| 1 | 4822.000 | 56.00 | -18.00 | 74.00 | 64.67 | 33.23 | 2.47 | 44.37 | Peak | --- | --- |
| 2 | 4822.000 | 44.44 | -9.56 | 54.00 | 53.11 | 33.23 | 2.47 | 44.37 | Average | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | CCK | | | | |
| Test Mode | CH 06 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHz~25GHz | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1000.000 | 46.62 | -7.38 | 54.00 | 64.11 | 23.80 | 1.11 | 42.40 | Average | --- | --- |
| 2 | 2182.000 | 46.05 | -7.95 | 54.00 | 59.43 | 27.59 | 1.69 | 42.66 | Average | --- | --- |
| 3 | 2358.000 | 47.37 | -6.63 | 54.00 | 60.25 | 28.06 | 1.69 | 42.63 | Average | 102 | 151 |
| 1 | 4876.000 | 49.03 | -24.97 | 74.00 | 57.57 | 33.35 | 2.52 | 44.41 | Peak | --- | --- |
| 2 | 4876.000 | 38.66 | -15.34 | 54.00 | 47.20 | 33.35 | 2.52 | 44.41 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1990.000 | 43.88 | -10.12 | 54.00 | 57.98 | 27.08 | 1.52 | 42.70 | Average | --- | --- |
| 2 | 2196.000 | 46.25 | -7.75 | 54.00 | 59.59 | 27.63 | 1.69 | 42.66 | Average | --- | --- |
| 3 | 2340.000 | 46.08 | -7.92 | 54.00 | 59.01 | 28.01 | 1.69 | 42.63 | Average | --- | --- |
| 1 | 4876.000 | 54.26 | -19.74 | 74.00 | 62.80 | 33.35 | 2.52 | 44.41 | Peak | --- | --- |
| 2 | 4876.000 | 41.81 | -12.19 | 54.00 | 50.35 | 33.35 | 2.52 | 44.41 | Average | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | CCK | | | | |
| Test Mode | CH 11 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHz~25GHz | Humidity | 64% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1332.000 | 40.79 | -13.21 | 54.00 | 57.20 | 24.77 | 1.35 | 42.53 | Average | --- | --- |
| 2 | 2156.000 | 46.19 | -7.81 | 54.00 | 59.65 | 27.52 | 1.69 | 42.67 | Average | --- | --- |
| 3 | 2358.000 | 47.20 | -6.80 | 54.00 | 60.08 | 28.06 | 1.69 | 42.63 | Average | --- | --- |
| 1 | 4926.000 | 46.97 | -7.03 | 54.00 | 55.49 | 33.46 | 2.47 | 44.45 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 2004.000 | 43.89 | -10.11 | 54.00 | 57.93 | 27.12 | 1.54 | 42.70 | Average | --- | --- |
| 2 | 2214.000 | 45.26 | -8.74 | 54.00 | 58.53 | 27.68 | 1.70 | 42.65 | Average | --- | --- |
| 3 | 2356.000 | 47.36 | -6.64 | 54.00 | 60.25 | 28.05 | 1.69 | 42.63 | Average | 104 | 186 |
| 1 | 4924.000 | 50.44 | -23.56 | 74.00 | 58.96 | 33.46 | 2.47 | 44.45 | Peak | --- | --- |
| 2 | 4924.000 | 38.27 | -15.73 | 54.00 | 46.79 | 33.46 | 2.47 | 44.45 | Average | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | OFDM | | | | |
| Test Mode | CH 11 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 30MHz~1GHz | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|--------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 107.350 | 30.03 | -13.47 | 43.50 | 45.99 | 10.07 | 1.85 | 27.88 | Peak | --- | --- |
| 2 | 135.910 | 25.43 | -18.07 | 43.50 | 38.77 | 12.49 | 2.00 | 27.83 | Peak | --- | --- |
| 3 | 196.940 | 30.53 | -12.97 | 43.50 | 40.14 | 15.56 | 2.54 | 27.71 | Peak | --- | --- |
| 1 | 256.000 | 35.67 | -10.33 | 46.00 | 47.78 | 12.50 | 2.87 | 27.48 | Peak | --- | --- |
| 2 | 265.600 | 36.68 | -9.32 | 46.00 | 48.42 | 12.77 | 2.93 | 27.44 | Peak | --- | --- |
| 3 | 998.400 | 31.65 | -22.35 | 54.00 | 30.30 | 23.86 | 5.69 | 28.20 | Peak | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 32.550 | 32.78 | -7.22 | 40.00 | 47.39 | 12.45 | 0.98 | 28.04 | Peak | 142 | 145 |
| 2 | 101.230 | 23.33 | -20.17 | 43.50 | 40.25 | 9.18 | 1.80 | 27.90 | Peak | --- | --- |
| 3 | 129.790 | 26.23 | -17.27 | 43.50 | 39.63 | 12.33 | 2.11 | 27.84 | Peak | --- | --- |
| 1 | 666.400 | 32.89 | -13.11 | 46.00 | 36.37 | 20.60 | 4.65 | 28.73 | Peak | --- | --- |
| 2 | 832.800 | 33.05 | -12.95 | 46.00 | 34.62 | 21.83 | 5.23 | 28.63 | Peak | --- | --- |
| 3 | 1000.000 | 32.39 | -21.61 | 54.00 | 31.00 | 23.90 | 5.69 | 28.20 | Peak | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | OFDM | | | | |
| Test Mode | CH 01 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHz~25GHz | Humidity | 64% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1000.000 | 45.06 | -8.94 | 54.00 | 62.55 | 23.80 | 1.11 | 42.40 | Average | --- | --- |
| 2 | 2180.000 | 45.07 | -8.93 | 54.00 | 58.45 | 27.59 | 1.69 | 42.66 | Average | --- | --- |
| 3 | 2374.000 | 46.96 | -7.04 | 54.00 | 59.77 | 28.10 | 1.71 | 42.62 | Average | 105 | 157 |
| 1 | 4828.000 | 43.79 | -10.21 | 54.00 | 52.43 | 33.24 | 2.49 | 44.37 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1990.000 | 43.25 | -10.75 | 54.00 | 57.35 | 27.08 | 1.52 | 42.70 | Average | --- | --- |
| 2 | 2236.000 | 44.98 | -9.02 | 54.00 | 58.19 | 27.73 | 1.71 | 42.65 | Average | --- | --- |
| 3 | 2374.000 | 46.57 | -7.43 | 54.00 | 59.38 | 28.10 | 1.71 | 42.62 | Average | --- | --- |
| 1 | 4828.000 | 45.67 | -8.33 | 54.00 | 54.31 | 33.24 | 2.49 | 44.37 | Average | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | OFDM | | | | |
| Test Mode | CH 06 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHZ~25GHZ | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1332.000 | 46.36 | -7.64 | 54.00 | 62.77 | 24.77 | 1.35 | 42.53 | Average | 102 | 162 |
| 2 | 2190.000 | 46.06 | -7.94 | 54.00 | 59.42 | 27.61 | 1.69 | 42.66 | Average | --- | --- |
| 3 | 2372.000 | 45.22 | -8.78 | 54.00 | 58.05 | 28.09 | 1.70 | 42.62 | Average | --- | --- |
| 1 | 4878.000 | 50.88 | -23.12 | 74.00 | 59.42 | 33.36 | 2.51 | 44.41 | Peak | --- | --- |
| 2 | 4878.000 | 35.98 | -18.02 | 54.00 | 44.52 | 33.36 | 2.51 | 44.41 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1996.000 | 44.19 | -9.81 | 54.00 | 58.28 | 27.10 | 1.51 | 42.70 | Average | --- | --- |
| 2 | 2212.000 | 44.90 | -9.10 | 54.00 | 58.18 | 27.67 | 1.70 | 42.65 | Average | --- | --- |
| 3 | 2342.000 | 45.64 | -8.36 | 54.00 | 58.57 | 28.01 | 1.69 | 42.63 | Average | --- | --- |
| 1 | 4876.000 | 52.23 | -21.77 | 74.00 | 60.77 | 33.35 | 2.52 | 44.41 | Peak | --- | --- |
| 2 | 4876.000 | 40.22 | -13.78 | 54.00 | 48.76 | 33.35 | 2.52 | 44.41 | Average | --- | --- |



| | | | | | |
|------------------------|------------|--------------------|-----------|------------------|------------|
| Modulation Type | OFDM | | | | |
| Test Mode | CH 11 | Temperature | 25 deg. C | Tested By | Steve Chen |
| Freq. Range | 1GHz~25GHz | Humidity | 63% | | |

(A) Polarization: Horizontal

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1000.000 | 43.22 | -10.78 | 54.00 | 60.71 | 23.80 | 1.11 | 42.40 | Average | --- | --- |
| 2 | 2204.000 | 44.42 | -9.58 | 54.00 | 57.74 | 27.65 | 1.69 | 42.66 | Average | --- | --- |
| 3 | 2324.000 | 45.09 | -8.91 | 54.00 | 58.03 | 27.97 | 1.72 | 42.63 | Average | --- | --- |

(B) Polarization: Vertical

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|--------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | dB | | cm | deg |
| 1 | 1000.000 | 47.75 | -6.25 | 54.00 | 65.24 | 23.80 | 1.11 | 42.40 | Average | 106 | 171 |
| 2 | 1998.000 | 43.70 | -10.30 | 54.00 | 57.77 | 27.11 | 1.52 | 42.70 | Average | --- | --- |
| 3 | 2334.000 | 45.16 | -8.84 | 54.00 | 58.10 | 27.99 | 1.70 | 42.63 | Average | --- | --- |
| 1 | 4924.000 | 42.76 | -11.24 | 54.00 | 51.28 | 33.46 | 2.47 | 44.45 | Average | --- | --- |


5.6.5 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW

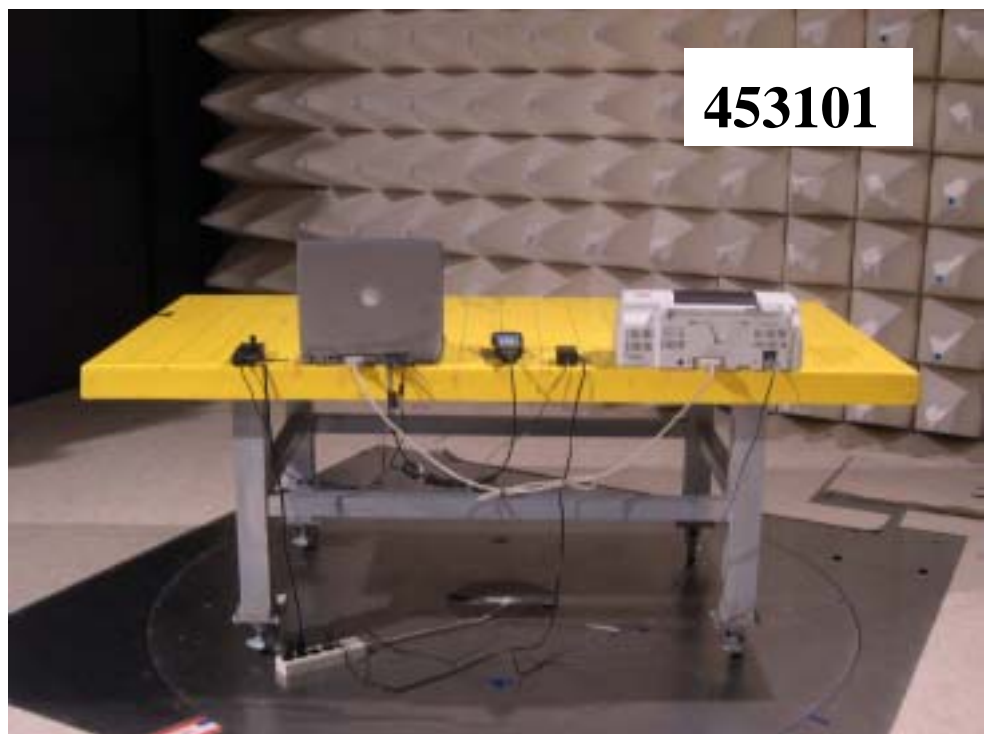



5.7. Antenna Requirements

5.7.1 Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2 Antenna Connected Construction

The antenna used in this product is PIFA antenna, antenna connector Hirose (U.FL-R-SMT).



6. List of Measuring Equipments Used

| Items | Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-------|--------------------------|----------------|--------------|------------|------------------|------------------|-----------------------|
| 1 | EMC Receiver | R&S | ESCS 30 | 100174 | 9 KHz – 2.75 GHz | Feb. 16, 2004 | Conduction (CO04-HY) |
| 2 | LISN | MessTec | NNB-2/16Z | 2001/004 | 9 KHz – 30 MHz | Jun. 09, 2004 | Conduction (CO04-HY) |
| 3 | LISN (Support Unit) | MessTec | NNB-2/16Z | 99041 | 9 KHz – 30 MHz | Apr. 27, 2004 | Conduction (CO04-HY) |
| 4 | EMI Filter | LINDGREN | LRE-2030 | 2651 | < 450 Hz | N/A | Conduction (CO04-HY) |
| 5 | RF Cable-CON | UTIFLEX | 3102-26886-4 | CB044 | 9KHz~30MHz | Apr. 21, 2004 | Conduction (CO04-HY) |
| 6 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30MHz~1GHz 3m | Jun. 21, 2004 | Radiation (03CH03-HY) |
| 7 | Spectrum analyzer | R&S | FSP30 | 100023 | 9KHZ~30GHz | Aug. 02, 2004 | Radiation (03CH03-HY) |
| 8 | Amplifier | HP | 8447D | 2944A09072 | 100KHz – 1.3GHz | Nov. 05, 2003 | Radiation (03CH03-HY) |
| 9 | Biconical Antenna | SCHWARZBECK | VHBB 9124 | 301 | 30MHz –200MHz | Jul. 28, 2004 | Radiation (03CH03-HY) |
| 10 | Log Antenna | SCHWARZBECK | VUSLP 9111 | 221 | 200MHz -1GHz | Jul. 28, 2004 | Radiation (03CH03-HY) |
| 11 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz~1GHz | Dec. 03, 2003 | Radiation (03CH03-HY) |
| 12 | Amplifier | MITEQ | AFS44 | 849984 | 100MHz~26.5GHz | Mar. 26, 2004 | Radiation (03CH03-HY) |
| 13 | Horn Antenna | EMCO | 3115 | 6821 | 1GHz – 18GHz | Apr. 19, 2004 | Radiation (03CH03-HY) |
| 14 | Turn Table | HD | DS 420 | 420/650/00 | 0 ~ 360 degree | N/A | Radiation (03CH03-HY) |
| 15 | Antenna Mast | HD | MA 240 | 240/560/00 | 1 m - 4 m | N/A | Radiation (03CH03-HY) |
| 16 | Horn Antenna | Schwarzbeck | BBHA9170 | 154 | 18GHz~40GHz | Jun. 09, 2004 | Radiation (03CH03-HY) |
| 17 | RF Cable-HIGH | Jye Bao | RG142 | CB030-HIGH | 1GHz~29.5GHz | Dec. 05, 2003 | Radiation (03CH03-HY) |

Calibration Interval of instruments listed above is one year.



| Items | Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-------|----------------------------|--------------|-----------|-------------|-----------------|------------------|---------------------|
| 18 | Spectrum analyzer | R&S | FSP7 | 838858/014 | 9KHZ~7GHZ | Sep. 02, 2004 | Conducted (TH01-HY) |
| 19 | Power meter | R&S | NRVS | 100444 | DC~40GHz | Jun. 15, 2004 | Conducted (TH01-HY) |
| 20 | Power sensor | R&S | NRV-Z55 | 100049 | DC~40GHz | Jun. 15, 2004 | Conducted (TH01-HY) |
| 21 | Power Sensor | R&S | NRV-Z32 | 100057 | 30MHz-6GHz | Jun. 15, 2004 | Conducted (TH01-HY) |
| 22 | AC power source | HPC | HPA-500W | HPA-9100024 | AC 0~300V | Jun. 16, 2004 | Conducted (TH01-HY) |
| 23 | AC power source | G.W. | GPC-6030D | C671845 | DC 1V~60V | Nov. 06, 2003 | Conducted (TH01-HY) |
| 24 | Temp. and Humidity Chamber | KSON | THS-C3L | 612 | N/A | Oct. 01, 2003 | Conducted (TH01-HY) |
| 25 | RF CABLE-1m | Jye Bao | RG142 | CB034-1m | 20MHz~7GHz | Jan. 01, 2004 | Conducted (TH01-HY) |
| 26 | RF CABLE-2m | Jye Bao | RG142 | CB035-2m | 20MHz~1GHz | Jan. 01, 2004 | Conducted (TH01-HY) |

Calibration Interval of instruments listed above is one year.