


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	61%
Test Engineer	Mars Lin, Hank Yang	Configurations	2.4G + 5G

Horizontal

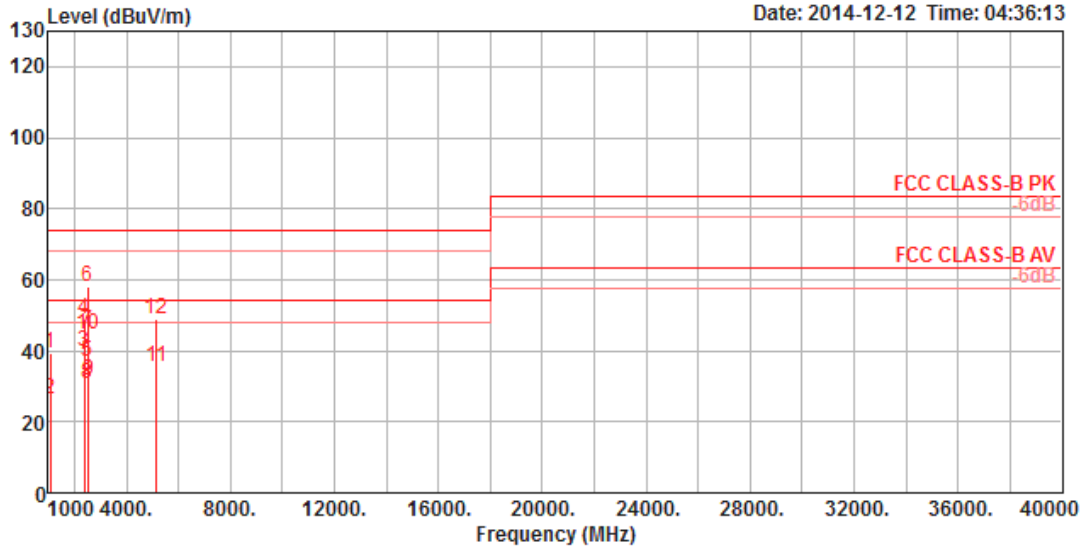

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	cm	deg	Pol/Phase
				dB	dBuV	dB	dB/m	dB			
1	1062.90	39.56	74.00	-34.44	49.36	2.88	24.45	37.13	100	1	HORIZONTAL
2	1063.94	26.46	54.00	-27.54	36.25	2.88	24.45	37.12	100	1	HORIZONTAL
3	2381.07	40.01	54.00	-13.99	43.16	4.43	27.06	34.64	117	350	HORIZONTAL
4	2383.58	49.06	74.00	-24.94	52.21	4.43	27.06	34.64	117	350	HORIZONTAL
5	2496.92	36.86	54.00	-17.14	39.50	4.53	27.40	34.57	117	3	HORIZONTAL
6	2497.67	57.86	74.00	-16.14	60.49	4.53	27.40	34.56	117	3	HORIZONTAL
7	2511.56	45.44	74.00	-28.56	48.01	4.55	27.44	34.56	116	305	HORIZONTAL
8	2514.87	30.78	54.00	-23.22	33.34	4.55	27.44	34.55	116	305	HORIZONTAL
9	2538.36	31.72	54.00	-22.28	34.20	4.58	27.48	34.54	159	4	HORIZONTAL
10	2540.20	44.59	74.00	-29.41	47.03	4.58	27.52	34.54	159	4	HORIZONTAL
11	5172.92	35.43	54.00	-18.57	30.21	6.66	31.53	32.97	100	81	HORIZONTAL
12	5173.29	48.75	74.00	-25.25	43.53	6.66	31.53	32.97	100	81	HORIZONTAL

Vertical

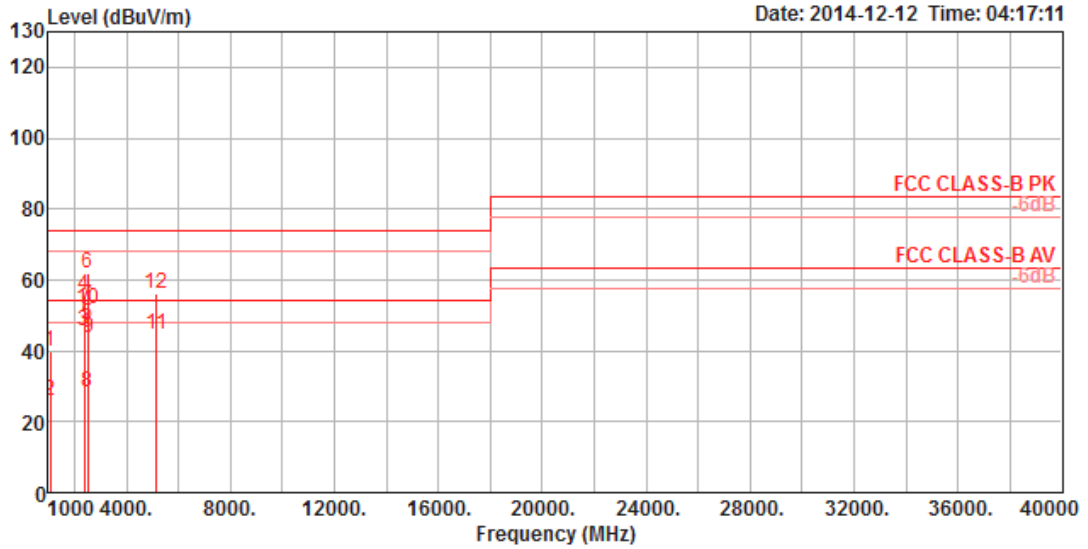

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1062.67	39.87	74.00	-34.13	49.67	2.87	24.46	37.13	100	221	VERTICAL
2	1063.94	25.99	54.00	-28.01	35.76	2.88	24.47	37.12	100	221	VERTICAL
3	2380.83	45.56	54.00	-8.44	48.68	4.43	27.09	34.64	100	352	VERTICAL
4	2383.61	55.69	74.00	-18.31	58.80	4.43	27.10	34.64	100	352	VERTICAL
5	2498.37	47.40	54.00	-6.60	50.02	4.54	27.40	34.56	100	346	VERTICAL
6	2498.67	62.01	74.00	-11.99	64.63	4.54	27.40	34.56	100	346	VERTICAL
7	2514.95	52.68	74.00	-21.32	55.24	4.55	27.44	34.55	110	357	VERTICAL
8	2515.48	28.43	54.00	-25.57	30.99	4.55	27.44	34.55	110	357	VERTICAL
9	2539.82	43.76	54.00	-10.24	46.22	4.58	27.50	34.54	100	11	VERTICAL
10	2540.77	51.92	74.00	-22.08	54.37	4.58	27.51	34.54	100	11	VERTICAL
11	5172.74	44.38	54.00	-9.62	39.15	6.66	31.54	32.97	100	9	VERTICAL
12	5173.46	56.11	74.00	-17.89	50.88	6.66	31.54	32.97	100	9	VERTICAL