



FCC TEST REPORT

REPORT NO.: RF140808E01 R1

MODEL NO.: EMG101

FCC ID: H9PEMG101

RECEIVED: July 10, 2014

TESTED: July 10 to Aug. 12, 2014

ISSUED: Aug. 26, 2014

APPLICANT: Symbol Technologies, Inc.

ADDRESS: One Motorola Plaza Holtsville NY 11742-1300 USA

MANUFACTURER: Symbol Technologies, Inc.

ADDRESS: One Motorola Plaza Holtsville NY 11742-1300 USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL.....	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
3.6 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	19
4.1.2 TEST INSTRUMENTS	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS (MODE 1).....	22
4.1.8 TEST RESULTS (MODE 2).....	26
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	30
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	30
4.2.2 TEST INSTRUMENTS	31
4.2.3 TEST PROCEDURES	33
4.2.4 DEVIATION FROM TEST STANDARD	33
4.2.5 TEST SETUP	34
4.2.6 EUT OPERATING CONDITIONS	35
4.2.7 TEST RESULTS (MODE 1).....	36
4.2.8 TEST RESULTS (MODE 2).....	42
4.3 6dB BANDWIDTH MEASUREMENT	48
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2 TEST INSTRUMENTS	48
4.3.3 TEST PROCEDURE	48
4.3.4 DEVIATION FROM TEST STANDARD	48
4.3.5 TEST SETUP	48
4.3.6 EUT OPERATING CONDITIONS	49
4.3.7 TEST RESULTS (MODE 1).....	49
4.3.8 TEST RESULTS (MODE 2).....	50
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	51
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	51
4.4.2 INSTRUMENTS.....	51
4.4.3 TEST PROCEDURES	51
4.4.4 DEVIATION FROM TEST STANDARD	51
4.4.5 TEST SETUP	51
4.4.6 EUT OPERATING CONDITIONS	51
4.4.7 TEST RESULTS (MODE 1).....	52
4.4.8 TEST RESULTS (MODE 2).....	53
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	54



A D T

4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	54
4.5.2	TEST INSTRUMENTS	54
4.5.3	TEST PROCEDURE	54
4.5.4	DEVIATION FROM TEST STANDARD	54
4.5.5	TEST SETUP	54
4.5.6	EUT OPERATING CONDITION	54
4.5.7	TEST RESULTS (MODE 1).....	55
4.5.8	TEST RESULTS (MODE 2).....	56
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	57
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	57
4.6.2	TEST INSTRUMENTS	57
4.6.3	TEST PROCEDURE	57
4.6.4	DEVIATION FROM TEST STANDARD	58
4.6.5	TEST SETUP	58
4.6.6	EUT OPERATING CONDITION	58
4.6.7	TEST RESULTS (MODE 1).....	58
4.6.8	TEST RESULTS (MODE 2).....	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	62
6.	INFORMATION ON THE TESTING LABORATORIES	63
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	64



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140808E01	Original release	Aug. 21, 2014
RF140808E01 R1	Modified the antenna information on section 3.1.	Aug. 26, 2014




A D T

1. CERTIFICATION

PRODUCT: 802.15.4 Gateway
BRAND NAME: Symbol
MODEL NO.: EMG101
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Symbol Technologies, Inc.
TESTED: July 10 to Aug. 12, 2014
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: EMG101) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Aug. 26, 2014
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** Aug. 26, 2014
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.44dB at 0.49375MHz
15.247(d) 15.209	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.2dB at 2484.00MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.43 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.15.4 Gateway
MODEL NO.	EMG101
POWER SUPPLY	48Vdc (from power adapter or POE)
MODULATION TYPE	O-QPSK
TRANSFER RATE	250kbps
OPERATING FREQUENCY	2405 ~ 2475MHz
NUMBER OF CHANNEL	15
MAXIMUM OUTPUT POWER	radio circuit 1 26.485mW radio circuit 2 24.831mW
ANTENNA TYPE	Refer to NOTE
DATA CABLE	NA
I/O PORTS	Power connector port x 1 RJ45 port x 2 (GE1/PoE&CONSOLE)
ASSOCIATED DEVICES	NA



A D T

NOTE:

- 1. There is IEEE 802.15.4 technology used for the EUT.
- 2. The EUT has two radio circuits, and it cannot transmit at same time.
- 3. The antenna provided to the EUT, please refer to the following table:

Gain (dBi) Exclude cable loss	Cable Loss (dB)	Net Gain (dBi)	Connector Type	Frequency range (MHz to MHz)	Antenna Type
3.2	0.47	2.73	NA	2400~2500	Dipole

- 4. The Version of EUT information are as below:

H/W VER	Version 4
S/W VER	Version 3.5.4-00014-g8666-dirty (Fri May 30 13:48:13)
RF test tool S/W VER	Version RFTest_V062514

- 5. The EUT could be supplied with the a Power Adapter and/or POE as below:

Power Adapter (Only for test, not for sale)	
Brand:	MOTOROLA/Symbol
Model No.:	PSC18U-480
Spec.:	Input: 100-240V, 50/60Hz, 0.5A Output: 48V, 0.38A DC output cable: Unshielded, 1.7m
POE (Only for test, not for sale)	
Brand:	Motorola/Symbol
Model No.:	PD-3501G/AC
Spec.:	Input: 100-240V, 50/60Hz, 0.43A Output: 48V, 0.35A

- 6. The EUT was pre-tested under following test modes:

Pre-test Mode	Description
Mode A	Adapter mode
Mode B	POE mode

From the above modes, the worst radiated emissions was found in **Mode B**. Therefore only the test data of the mode was recorded in this report individually.

- 7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

15 channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460		



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	radio circuit 1
2	√	√	√	√	√	radio circuit 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: 1. The EUT' had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on Y-plane.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

radio circuit 1				
AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	18	DSSS	O-QPSK	250
radio circuit 2				
AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	11	DSSS	O-QPSK	250



A D T

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	11, 18, 25	DSSS	O-QPSK	250

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	11, 18, 25	DSSS	O-QPSK	250

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	11, 18, 25	DSSS	O-QPSK	250

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (kbps)
11 to 25	11, 25	DSSS	O-QPSK	250



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	30deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
RE<1G	23deg. C, 67%RH	120Vac, 60Hz	Andy Ho
RE≥1G	24deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	James Chan
OB	25deg. C, 60%RH	120Vac, 60Hz	James Chan

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02


ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.

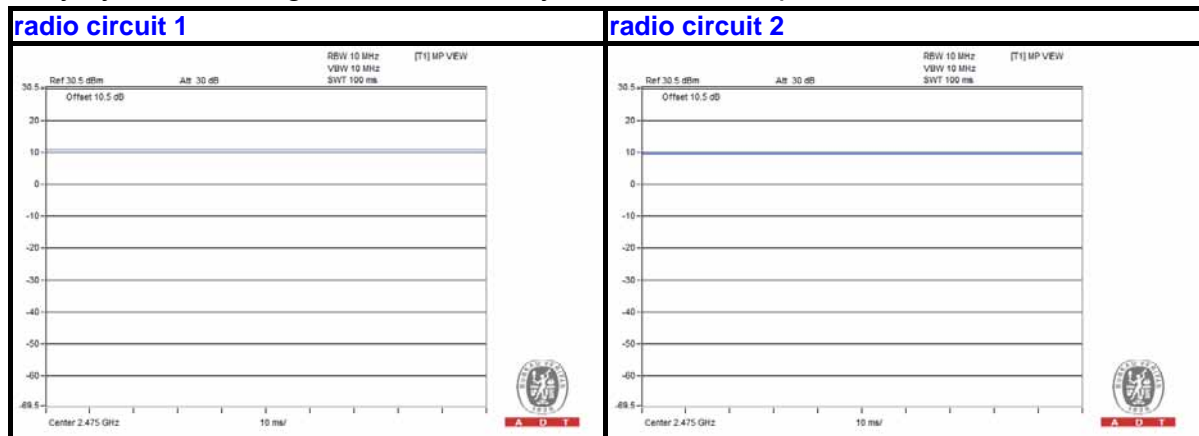



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NB	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B	Adapter	MOTOROLA /Symbol	PSC18U-480	NA	NA	Supplied by client
C	POE	Motorola /Symbol	PD-3501G/AC	AP-PSBIAS-2P2-AFR	FCC DoC	Supplied by client


NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1.	DC	1	1.7	No	0	Supplied by client
2.	RJ45	1	3	No	0	Provided by Lab
3.	RJ45	1	10	No	0	Provided by Lab
4.	RJ45	1	3	No	0	Provided by Lab

3.6 CONFIGURATION OF SYSTEM UNDER TEST


For conducted emission (Adapter mode) test:

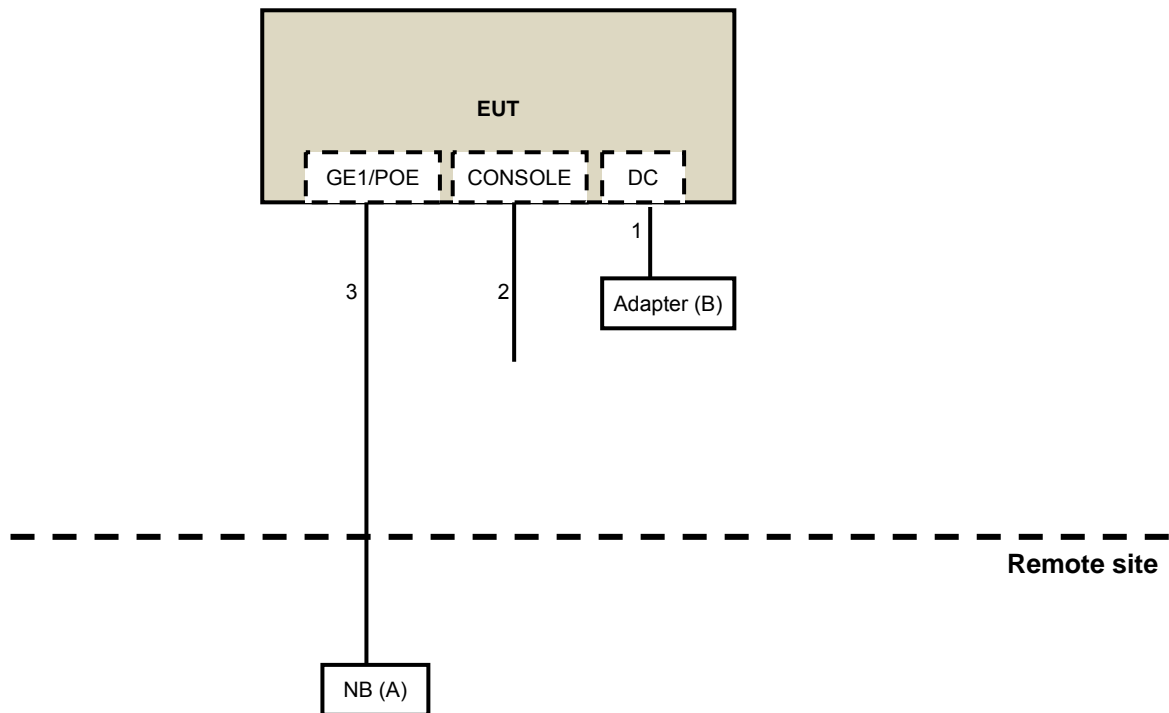



A D T


For conducted emission (POE mode) test:

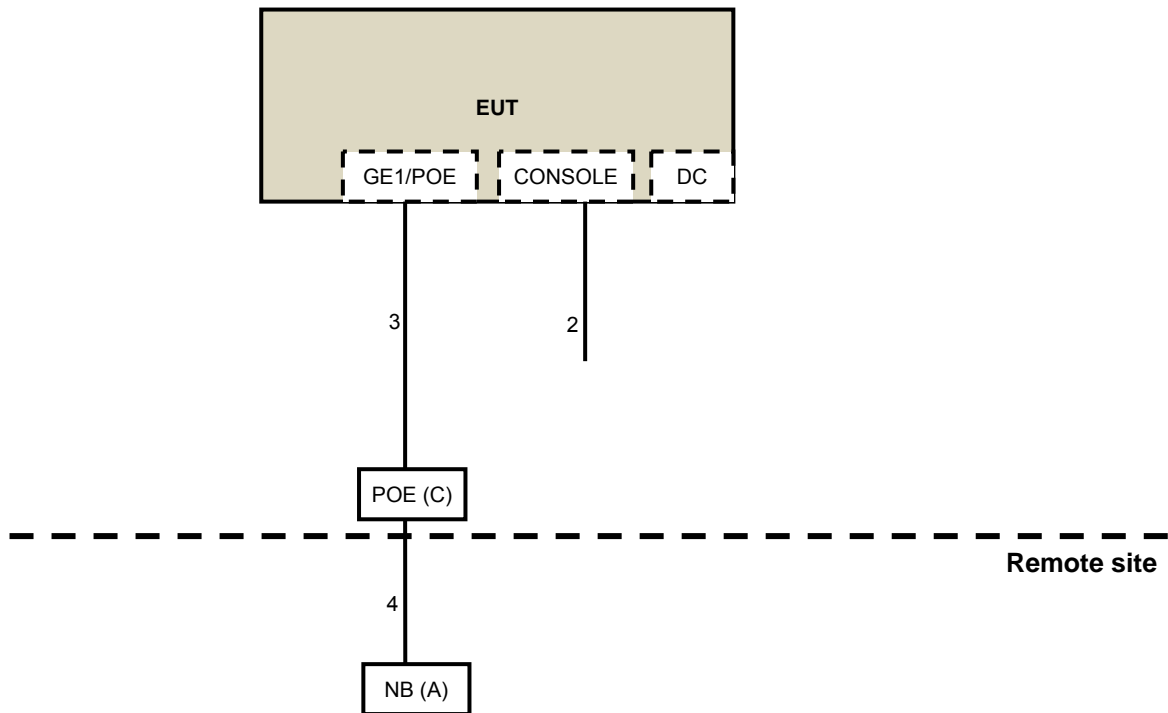



A D T

For other test items:

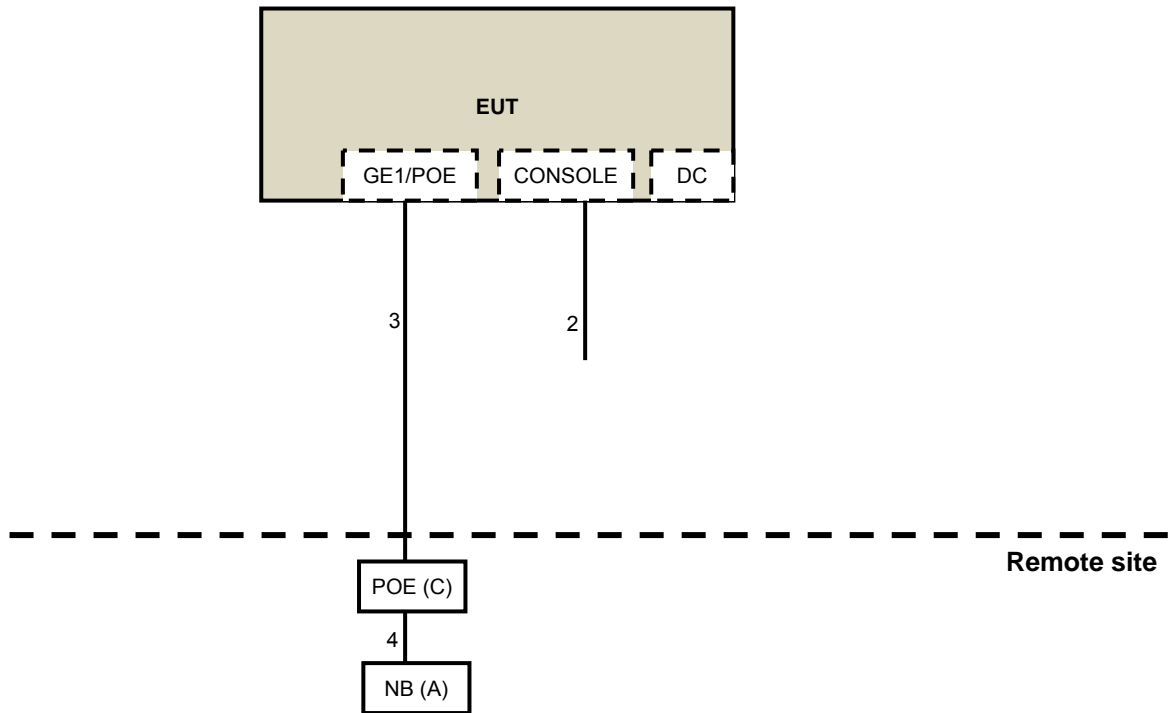



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Aug. 11, 2014

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

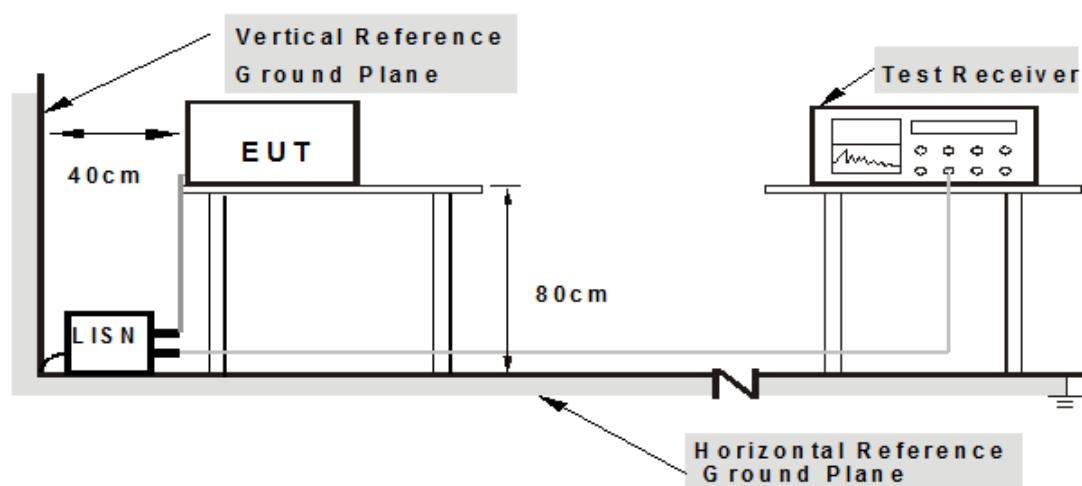

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Controlling software (ESLTools_RFTTest_v062514) has been activated to set the EUT on specific status.



A D T

4.1.7 TEST RESULTS (MODE 1)


Adapter MODE

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.07	33.19	22.90	33.26	22.97	64.79	54.79	-31.54	-31.83
2	0.26328	0.08	30.72	21.34	30.80	21.42	61.33	51.33	-30.53	-29.91
3	0.43125	0.09	37.16	31.69	37.25	31.78	57.23	47.23	-19.98	-15.45
4	0.84531	0.12	25.16	19.08	25.28	19.20	56.00	46.00	-30.72	-26.80
5	3.89063	0.26	24.47	17.82	24.73	18.08	56.00	46.00	-31.27	-27.92
6	20.99219	0.74	20.95	15.85	21.69	16.59	60.00	50.00	-38.31	-33.41

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

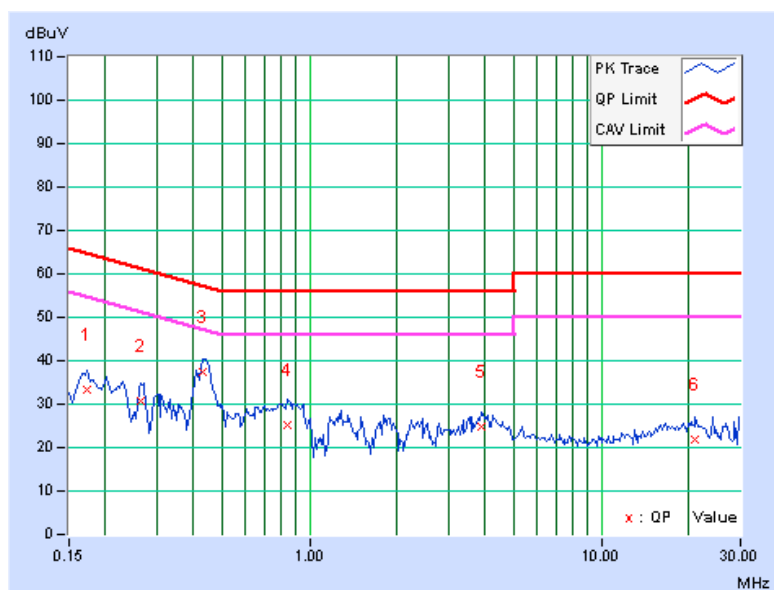


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17575	0.07	33.20	23.06	33.27	23.13	64.68	54.68	-31.41	-31.55
2	0.43906	0.09	37.58	32.86	37.67	32.95	57.08	47.08	-19.41	-14.13
3	0.91172	0.12	25.66	18.49	25.78	18.61	56.00	46.00	-30.22	-27.39
4	1.81250	0.17	24.07	18.80	24.24	18.97	56.00	46.00	-31.76	-27.03
5	4.11328	0.26	20.87	12.40	21.13	12.66	56.00	46.00	-34.87	-33.34
6	20.60547	0.72	21.64	16.49	22.36	17.21	60.00	50.00	-37.64	-32.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

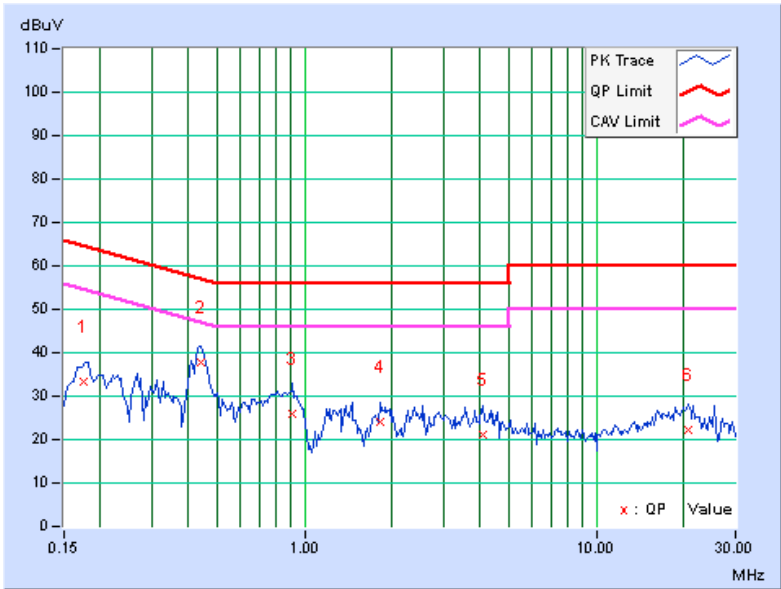


POE MODE

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.07	41.80	31.85	41.87	31.92	65.79	55.79	-23.92	-23.87
2	0.18516	0.07	37.92	28.78	37.99	28.85	64.25	54.25	-26.26	-25.40
3	0.49766	0.10	32.15	26.79	32.25	26.89	56.04	46.04	-23.79	-19.15
4	3.40234	0.23	20.73	13.81	20.96	14.04	56.00	46.00	-35.04	-31.96
5	20.89844	0.74	29.49	23.12	30.23	23.86	60.00	50.00	-29.77	-26.14
6	25.84375	0.88	24.66	7.45	25.54	8.33	60.00	50.00	-34.46	-41.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

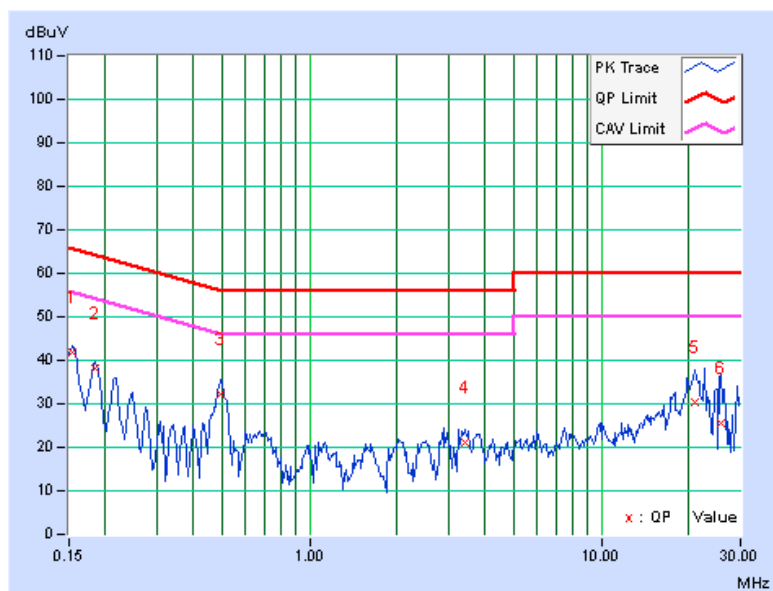


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.07	42.10	32.83	42.17	32.90	65.79	55.79	-23.61	-22.88
2	0.18906	0.07	36.28	26.35	36.35	26.42	64.08	54.08	-27.73	-27.66
3	0.49375	0.10	34.50	33.55	34.60	33.65	56.10	46.10	-21.51	-12.46
4	3.27344	0.23	22.65	16.93	22.88	17.16	56.00	46.00	-33.12	-28.84
5	19.72656	0.69	29.21	23.07	29.90	23.76	60.00	50.00	-30.10	-26.24
6	26.68750	0.89	23.87	9.69	24.76	10.58	60.00	50.00	-35.24	-39.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

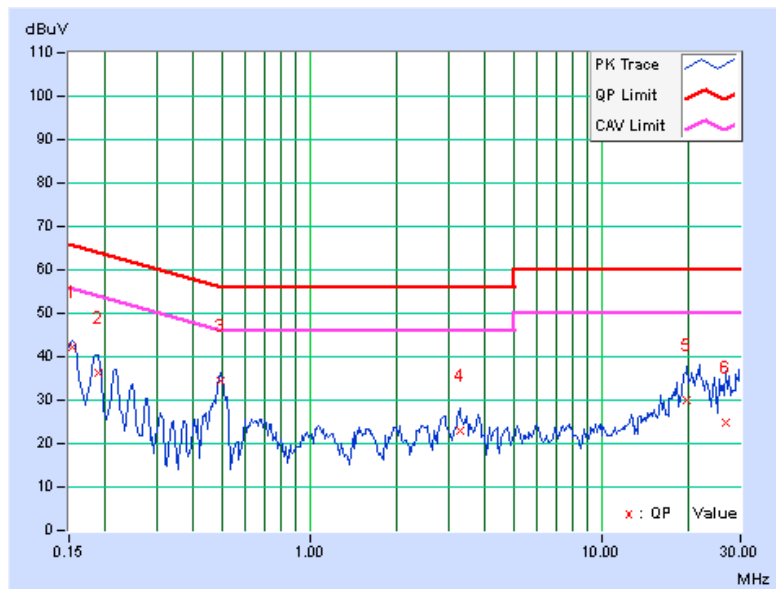

4.1.8 TEST RESULTS (MODE 2)


Adapter MODE

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17344	0.07	33.49	23.10	33.56	23.17	64.79
2	0.27109	0.08	31.58	23.30	31.66	23.38	61.08	51.08	-29.43	-27.71
3	0.43516	0.09	37.47	32.43	37.56	32.52	57.15	47.15	-19.59	-14.63
4	0.86094	0.12	25.38	20.36	25.50	20.48	56.00	46.00	-30.50	-25.52
5	3.55469	0.24	24.36	17.50	24.60	17.74	56.00	46.00	-31.40	-28.26
6	20.72656	0.73	20.92	15.64	21.65	16.37	60.00	50.00	-38.35	-33.63

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

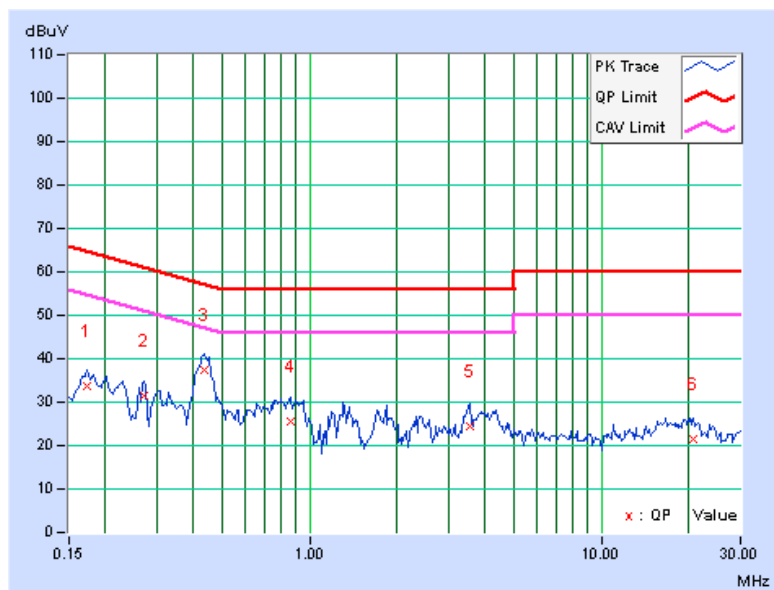


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.07	30.60	20.13	30.67	20.20	64.43	54.43	-33.76	-34.23
2	0.44297	0.09	37.43	32.84	37.52	32.93	57.01	47.01	-19.48	-14.07
3	0.94297	0.13	24.87	16.84	25.00	16.97	56.00	46.00	-31.00	-29.03
4	3.66797	0.25	21.79	13.53	22.04	13.78	56.00	46.00	-33.96	-32.22
5	20.28906	0.71	21.89	16.80	22.60	17.51	60.00	50.00	-37.40	-32.49
6	24.55078	0.83	20.58	14.02	21.41	14.85	60.00	50.00	-38.59	-35.15

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

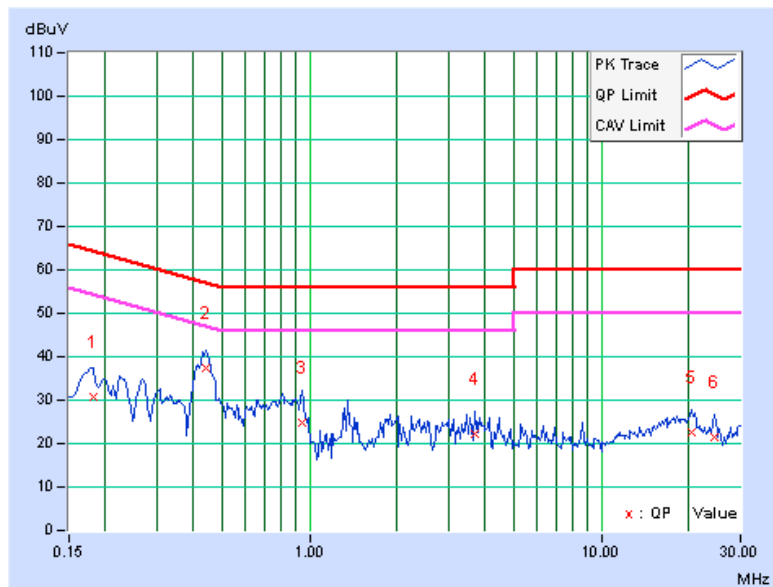


POE MODE

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.07	42.18	32.18	42.25	32.25	65.79	55.79	-23.54	-23.54
2	0.18516	0.07	38.33	28.94	38.40	29.01	64.25	54.25	-25.85	-25.24
3	0.49356	0.10	33.55	32.96	33.65	33.06	56.11	46.11	-22.46	-13.05
4	3.35938	0.23	20.20	14.04	20.43	14.27	56.00	46.00	-35.57	-31.73
5	20.54297	0.73	27.92	21.44	28.65	22.17	60.00	50.00	-31.35	-27.83
6	25.89844	0.88	23.79	6.85	24.67	7.73	60.00	50.00	-35.33	-42.27

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

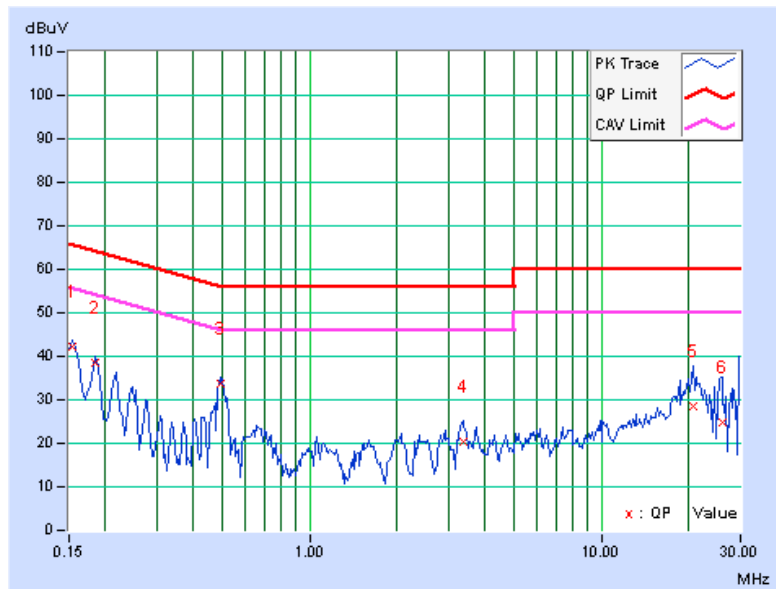


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.07	42.40	33.05	42.47	33.12	65.79	55.79	-23.31	-22.66
2	0.18524	0.07	38.67	30.24	38.74	30.31	64.25	54.25	-25.51	-23.94
3	0.49375	0.10	34.42	33.57	34.52	33.67	56.10	46.10	-21.59	-12.44
4	3.28906	0.23	23.20	17.23	23.43	17.46	56.00	46.00	-32.57	-28.54
5	21.37891	0.74	31.04	25.30	31.78	26.04	60.00	50.00	-28.22	-23.96
6	29.57031	0.98	26.71	8.18	27.69	9.16	60.00	50.00	-32.31	-40.84

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

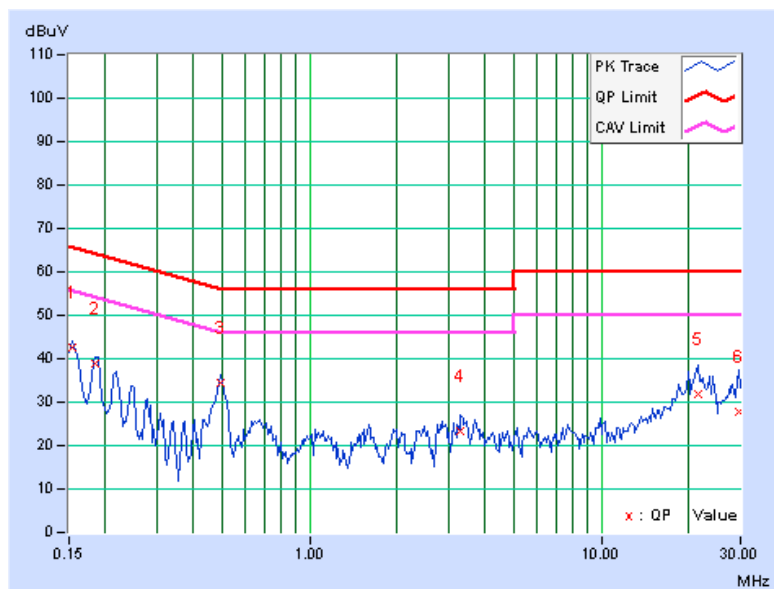



A D T

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 15, 2014	Jan. 14, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 27, 2014	Feb. 26, 2015
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISl	AIH.8018	0000220091110	Dec. 06, 2013	Dec. 05, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: July 10 to Aug. 12, 2014



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Aug. 11, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

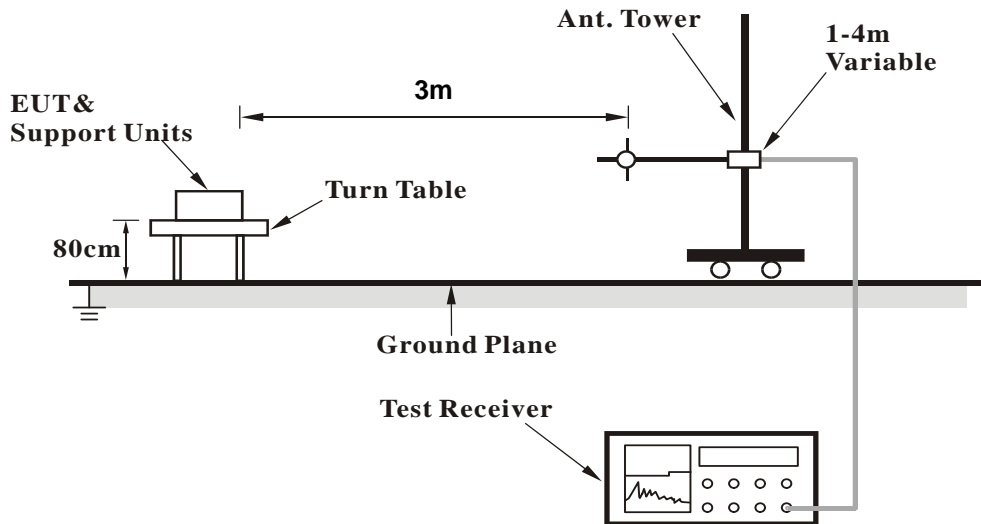

<Frequency Range above 1GHz>

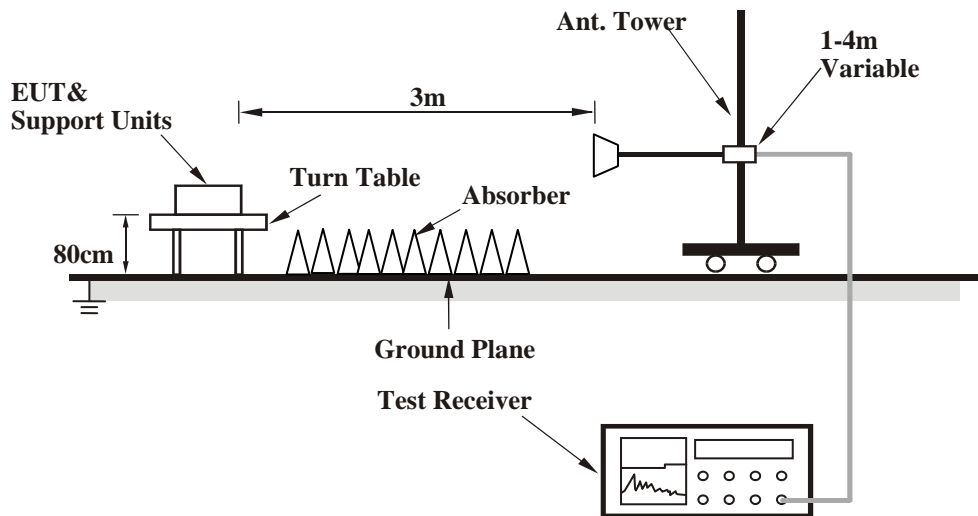

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS (MODE 1)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	30.4 QP	40.0	-9.6	2.00 H	347	44.28	-13.89
2	157.46	33.7 QP	43.5	-9.8	2.00 H	86	46.22	-12.51
3	250.00	30.0 QP	46.0	-16.0	1.00 H	325	43.64	-13.66
4	375.03	34.2 QP	46.0	-11.8	1.00 H	65	44.12	-9.91
5	500.06	33.8 QP	46.0	-12.2	1.50 H	17	40.71	-6.91
6	833.11	35.7 QP	46.0	-10.3	1.00 H	47	36.10	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	37.0 QP	40.0	-3.0	1.00 V	268	50.72	-13.74
2	64.78	34.6 QP	40.0	-5.4	1.00 V	275	48.71	-14.10
3	173.17	28.7 QP	43.5	-14.8	1.00 V	360	42.08	-13.41
4	375.03	26.2 QP	46.0	-19.9	1.50 V	114	36.06	-9.91
5	500.06	33.0 QP	46.0	-13.0	1.00 V	97	39.92	-6.91
6	911.59	42.9 QP	46.0	-3.1	1.00 V	15	41.98	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 18	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	30.4 QP	40.0	-9.6	1.50 H	225	44.31	-13.89
2	157.46	34.8 QP	43.5	-8.7	1.32 H	149	47.27	-12.51
3	250.00	31.2 QP	46.0	-14.8	1.26 H	309	44.90	-13.66
4	375.03	37.0 QP	46.0	-9.0	1.00 H	74	46.94	-9.91
5	500.06	35.8 QP	46.0	-10.2	1.21 H	149	42.74	-6.91
6	833.11	37.6 QP	46.0	-8.4	1.00 H	233	38.08	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	36.7 QP	40.0	-3.3	1.00 V	244	50.44	-13.74
2	64.78	34.6 QP	40.0	-5.4	1.00 V	269	48.70	-14.10
3	173.17	30.7 QP	43.5	-12.8	1.00 V	360	44.15	-13.41
4	375.03	29.1 QP	46.0	-16.9	1.50 V	261	39.01	-9.91
5	500.06	35.0 QP	46.0	-11.0	1.00 V	266	41.91	-6.91
6	911.59	42.7 QP	46.0	-3.3	1.00 V	106	41.86	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	32.4 QP	40.0	-7.6	1.50 H	266	46.29	-13.89
2	157.46	34.7 QP	43.5	-8.8	1.32 H	213	47.21	-12.51
3	250.00	36.6 QP	46.0	-9.4	1.26 H	149	50.30	-13.66
4	375.03	36.0 QP	46.0	-10.0	1.00 H	75	45.92	-9.91
5	500.06	36.9 QP	46.0	-9.1	1.21 H	233	43.82	-6.91
6	833.11	37.6 QP	46.0	-8.4	1.00 H	56	38.05	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	35.7 QP	40.0	-4.3	1.00 V	203	49.48	-13.74
2	64.78	34.7 QP	40.0	-5.3	1.03 V	183	48.76	-14.10
3	173.17	32.6 QP	43.5	-10.9	1.00 V	248	46.05	-13.41
4	375.03	31.4 QP	46.0	-14.6	1.30 V	184	41.33	-9.91
5	500.06	36.7 QP	46.0	-9.3	1.00 V	236	43.65	-6.91
6	911.59	41.4 QP	46.0	-4.6	1.00 V	15	40.54	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.2 PK	74.0	-22.8	1.01 H	222	19.55	31.65
2	2390.00	43.2 AV	54.0	-10.8	1.01 H	222	11.55	31.65
3	*2405.00	108.1 PK			1.01 H	222	76.40	31.70
4	*2405.00	104.2 AV			1.01 H	222	72.50	31.70
5	4810.00	53.9 PK	74.0	-20.1	1.45 H	61	15.05	38.85
6	4810.00	44.6 AV	54.0	-9.4	1.45 H	61	5.75	38.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.18 V	356	25.85	31.65
2	2390.00	48.4 AV	54.0	-5.6	1.18 V	356	16.75	31.65
3	*2405.00	114.5 PK			1.18 V	356	82.80	31.70
4	*2405.00	110.7 AV			1.18 V	356	79.00	31.70
5	4810.00	57.5 PK	74.0	-16.5	1.11 V	359	18.65	38.85
6	4810.00	49.5 AV	54.0	-4.5	1.11 V	359	10.65	38.85

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	108.5 PK			1.02 H	206	76.67	31.83
2	*2440.00	104.6 AV			1.02 H	206	72.77	31.83
3	4880.00	54.0 PK	74.0	-20.0	1.40 H	53	14.92	39.08
4	4880.00	45.0 AV	54.0	-9.0	1.40 H	53	5.92	39.08
5	7320.00	51.9 PK	74.0	-22.1	1.03 H	117	5.47	46.43
6	7320.00	41.1 AV	54.0	-12.9	1.03 H	117	-5.33	46.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	114.7 PK			1.17 V	350	82.87	31.83
2	*2440.00	111.1 AV			1.17 V	350	79.27	31.83
3	4880.00	58.5 PK	74.0	-15.5	1.08 V	282	19.42	39.08
4	4880.00	49.9 AV	54.0	-4.1	1.08 V	282	10.82	39.08
5	7320.00	58.7 PK	74.0	-15.3	1.08 V	22	12.27	46.43
6	7320.00	50.4 AV	54.0	-3.6	1.08 V	22	3.97	46.43

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	103.5 PK			1.05 H	220	71.54	31.96
2	*2475.00	100.1 AV			1.05 H	220	68.14	31.96
3	2483.50	55.2 PK	74.0	-18.8	1.05 H	220	23.21	31.99
4	2483.50	47.1 AV	54.0	-6.9	1.05 H	220	15.11	31.99
5	4950.00	53.7 PK	74.0	-20.3	1.44 H	66	14.42	39.28
6	4950.00	44.5 AV	54.0	-9.5	1.44 H	66	5.22	39.28
7	7425.00	52.1 PK	74.0	-21.9	1.00 H	125	5.67	46.43
8	7425.00	41.1 AV	54.0	-12.9	1.00 H	125	-5.33	46.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	109.7 PK			1.37 V	2	77.74	31.96
2	*2475.00	106.4 AV			1.37 V	2	74.44	31.96
3	2483.50	61.5 PK	74.0	-12.5	1.37 V	2	29.51	31.99
4	2483.50	52.1 AV	54.0	-1.9	1.37 V	2	20.11	31.99
5	4950.00	53.9 PK	74.0	-20.1	1.19 V	280	14.62	39.28
6	4950.00	44.8 AV	54.0	-9.2	1.19 V	280	5.52	39.28
7	7425.00	52.4 PK	74.0	-21.6	1.08 V	22	5.97	46.43
8	7425.00	41.3 AV	54.0	-12.7	1.08 V	22	-5.13	46.43

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

4.2.8 TEST RESULTS (MODE 2)

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	31.4 QP	40.0	-8.6	1.50 H	125	45.31	-13.89
2	157.46	34.7 QP	43.5	-8.8	1.32 H	213	47.25	-12.51
3	250.00	33.6 QP	46.0	-12.4	1.26 H	149	47.29	-13.66
4	375.03	36.1 QP	46.0	-9.9	1.00 H	75	45.97	-9.91
5	500.06	37.9 QP	46.0	-8.1	1.21 H	233	44.80	-6.91
6	833.11	37.6 QP	46.0	-8.4	1.00 H	56	38.04	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	36.7 QP	40.0	-3.3	1.00 V	155	50.46	-13.74
2	64.78	34.6 QP	40.0	-5.4	1.00 V	275	48.71	-14.10
3	173.17	28.7 QP	43.5	-14.8	1.00 V	360	42.08	-13.41
4	375.03	26.2 QP	46.0	-19.9	1.50 V	114	36.06	-9.91
5	500.06	33.0 QP	46.0	-13.0	1.00 V	97	39.92	-6.91
6	911.59	42.8 QP	46.0	-3.2	1.00 V	106	41.93	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 18	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	31.4 QP	40.0	-8.6	1.50 H	125	45.31	-13.89
2	157.46	34.7 QP	43.5	-8.8	1.32 H	213	47.25	-12.51
3	250.00	33.6 QP	46.0	-12.4	1.26 H	149	47.29	-13.66
4	375.03	36.1 QP	46.0	-9.9	1.00 H	75	45.97	-9.91
5	500.06	37.9 QP	46.0	-8.1	1.21 H	233	44.80	-6.91
6	833.11	37.6 QP	46.0	-8.4	1.00 H	56	38.04	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	35.8 QP	40.0	-4.2	1.00 V	223	49.52	-13.74
2	64.78	34.6 QP	40.0	-5.4	1.03 V	279	48.74	-14.10
3	173.17	30.7 QP	43.5	-12.8	1.00 V	248	44.15	-13.41
4	375.03	29.4 QP	46.0	-16.6	1.30 V	217	39.27	-9.91
5	500.06	35.1 QP	46.0	-11.0	1.00 V	236	41.96	-6.91
6	911.59	41.5 QP	46.0	-4.5	1.00 V	15	40.58	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.98	31.5 QP	40.0	-8.6	1.50 H	144	45.34	-13.89
2	157.46	34.8 QP	43.5	-8.7	1.32 H	236	47.29	-12.51
3	250.00	33.6 QP	46.0	-12.4	1.26 H	156	47.28	-13.66
4	375.03	36.6 QP	46.0	-9.4	1.00 H	247	46.53	-9.91
5	500.06	37.9 QP	46.0	-8.1	1.21 H	159	44.80	-6.91
6	833.11	37.6 QP	46.0	-8.4	1.00 H	302	38.08	-0.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.52	35.7 QP	40.0	-4.3	1.00 V	203	49.48	-13.74
2	64.78	34.7 QP	40.0	-5.3	1.03 V	183	48.76	-14.10
3	173.17	32.6 QP	43.5	-10.9	1.00 V	248	46.05	-13.41
4	375.03	31.4 QP	46.0	-14.6	1.30 V	184	41.33	-9.91
5	500.06	36.7 QP	46.0	-9.3	1.00 V	236	43.65	-6.91
6	911.59	41.4 QP	46.0	-4.6	1.00 V	15	40.54	0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	52.8 PK	74.0	-21.2	1.30 H	213	21.15	31.65
2	2390.00	46.4 AV	54.0	-7.6	1.30 H	213	14.75	31.65
3	*2405.00	108.0 PK			1.30 H	213	76.30	31.70
4	*2405.00	104.7 AV			1.30 H	213	73.00	31.70
5	4810.00	54.2 PK	74.0	-19.8	1.43 H	72	15.35	38.85
6	4810.00	44.9 AV	54.0	-9.1	1.43 H	72	6.05	38.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.07 V	170	27.45	31.65
2	2390.00	51.4 AV	54.0	-2.6	1.07 V	170	19.75	31.65
3	*2405.00	114.4 PK			1.07 V	170	82.70	31.70
4	*2405.00	111.2 AV			1.07 V	170	79.50	31.70
5	4810.00	58.7 PK	74.0	-15.3	1.05 V	356	19.85	38.85
6	4810.00	49.5 AV	54.0	-4.5	1.05 V	356	10.65	38.85

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 18	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	108.4 PK			1.24 H	208	76.57	31.83
2	*2440.00	105.1 AV			1.24 H	208	73.27	31.83
3	4880.00	54.0 PK	74.0	-20.0	1.35 H	55	14.92	39.08
4	4880.00	45.2 AV	54.0	-8.8	1.35 H	55	6.12	39.08
5	7320.00	51.8 PK	74.0	-22.2	1.08 H	131	5.37	46.43
6	7320.00	41.3 AV	54.0	-12.7	1.08 H	131	-5.13	46.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	114.6 PK			1.44 V	360	82.77	31.83
2	*2440.00	111.6 AV			1.44 V	360	79.77	31.83
3	4880.00	60.2 PK	74.0	-13.8	1.17 V	346	21.12	39.08
4	4880.00	50.7 AV	54.0	-3.3	1.17 V	346	11.62	39.08
5	7320.00	60.9 PK	74.0	-13.1	1.24 V	349	14.47	46.43
6	7320.00	50.8 AV	54.0	-3.2	1.24 V	349	4.37	46.43

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 25	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	104.6 PK			1.20 H	221	72.64	31.96
2	*2475.00	101.1 AV			1.20 H	221	69.14	31.96
3	2484.00	56.2 PK	74.0	-17.8	1.20 H	221	24.20	32.00
4	2484.00	47.8 AV	54.0	-6.2	1.20 H	221	15.80	32.00
5	4950.00	53.9 PK	74.0	-20.1	1.36 H	41	14.62	39.28
6	4950.00	45.1 AV	54.0	-8.9	1.36 H	41	5.82	39.28
7	7425.00	51.8 PK	74.0	-22.2	1.09 H	140	5.37	46.43
8	7425.00	41.5 AV	54.0	-12.5	1.09 H	140	-4.93	46.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2475.00	110.8 PK			1.02 V	359	78.84	31.96
2	*2475.00	107.4 AV			1.02 V	359	75.44	31.96
3	2484.00	62.5 PK	74.0	-11.5	1.02 V	359	30.50	32.00
4	2484.00	52.8 AV	54.0	-1.2	1.02 V	359	20.80	32.00
5	4950.00	52.0 PK	74.0	-22.0	1.41 V	15	12.72	39.28
6	4950.00	42.1 AV	54.0	-11.9	1.41 V	15	2.82	39.28
7	7425.00	55.7 PK	74.0	-18.3	1.46 V	344	9.27	46.43
8	7425.00	45.4 AV	54.0	-8.6	1.46 V	344	-1.03	46.43

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 12, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP




4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS (MODE 1)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
11	2405	1.49	0.5	PASS
18	2440	1.31	0.5	PASS
25	2475	1.49	0.5	PASS

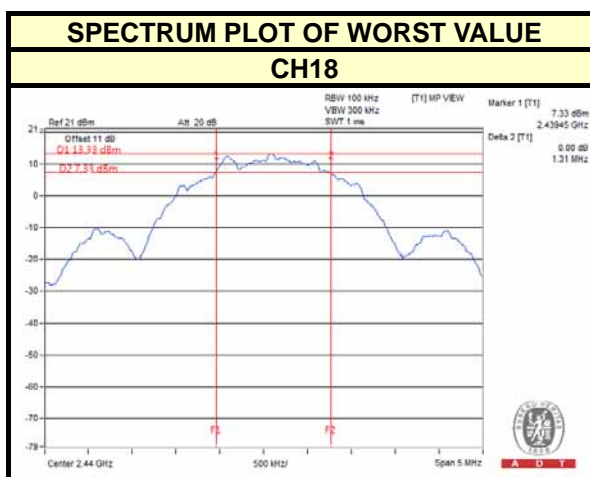

4.3.8 TEST RESULTS (MODE 2)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
11	2405	1.49	0.5	PASS
18	2440	1.59	0.5	PASS
25	2475	1.61	0.5	PASS

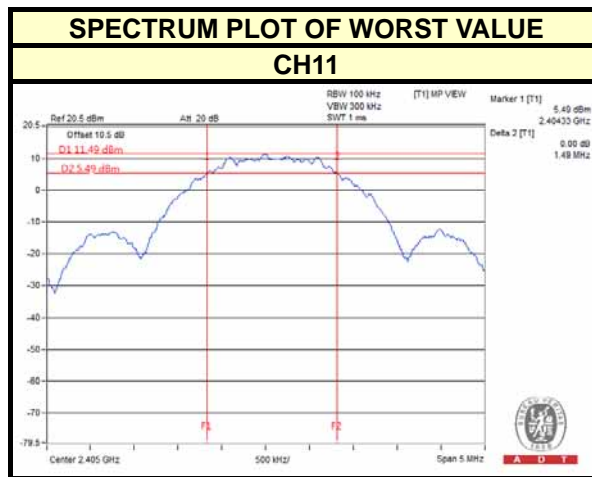



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power Sensor	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 12, 2014

4.4.3 TEST PROCEDURES


A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor.

Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.1.6



A D T

4.4.7 TEST RESULTS (MODE 1)

FOR PEAK POWER

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
11	2405	22.646	13.55	30	PASS
18	2440	26.485	14.23	30	PASS
25	2475	12.078	10.82	30	PASS

FOR AVERAGE POWER

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
11	2405	21.979	13.42
18	2440	25.177	14.01
25	2475	11.588	10.64



A D T

4.4.8 TEST RESULTS (MODE 2)

FOR PEAK POWER

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
11	2405	24.831	13.95	30	PASS
18	2440	24.044	13.81	30	PASS
25	2475	10.116	10.05	30	PASS

FOR AVERAGE POWER

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
11	2405	24.322	13.86
18	2440	23.550	13.72
25	2475	9.594	9.82

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 12, 2014


4.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.1.6



A D T

4.5.7 TEST RESULTS (MODE 1)

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
11	2405	-0.88	8	PASS
18	2440	-1.70	8	PASS
25	2475	-5.98	8	PASS

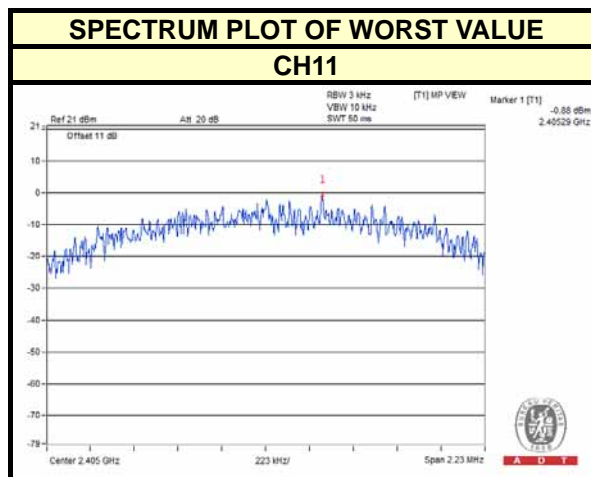




A D T

4.5.8 TEST RESULTS (MODE 2)

Channel	FREQUENCY (MHz)	PSD (dBm)	Limit (dBm)	PASS /FAIL
11	2405	-2.52	8	PASS
18	2440	-3.59	8	PASS
25	2475	-7.77	8	PASS

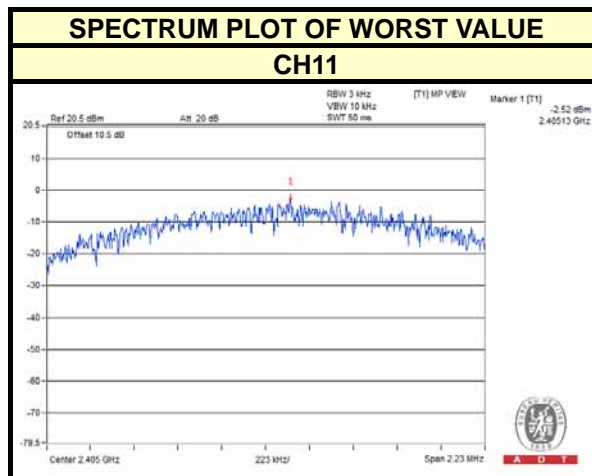



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Aug. 12, 2014

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6


4.6.7 TEST RESULTS (MODE 1)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


CH 11

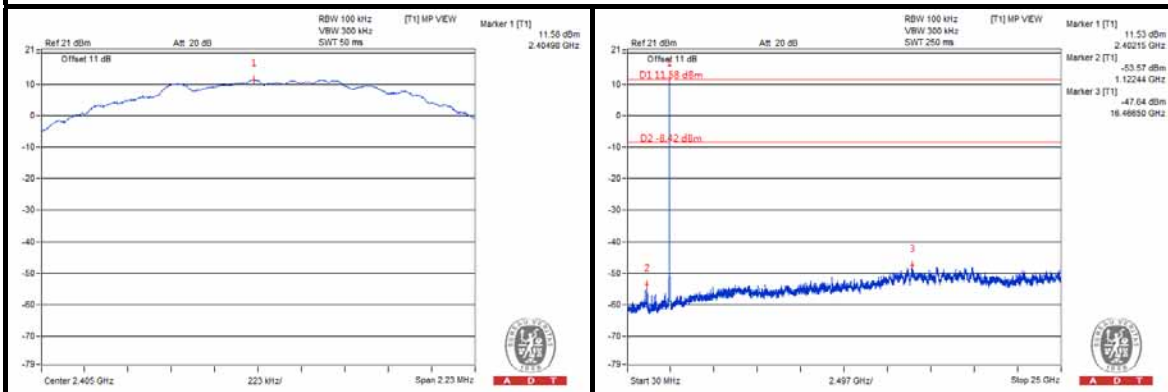


CH 18

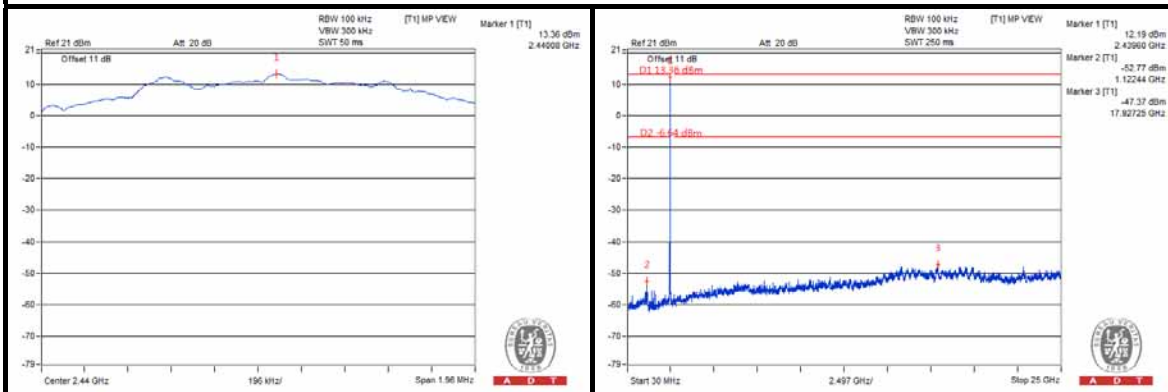


CH 25

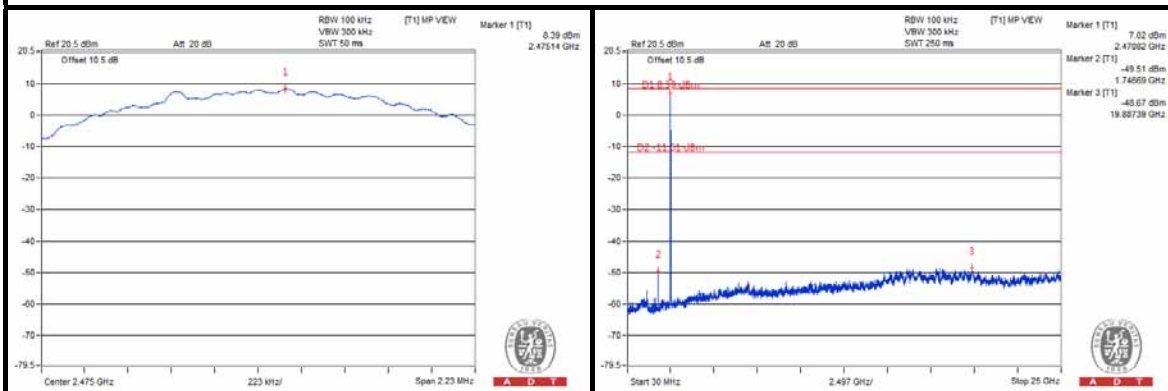

CH 11 Band edge

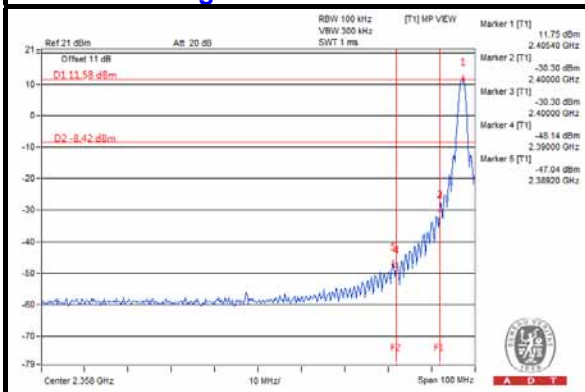

CH 25 Band edge

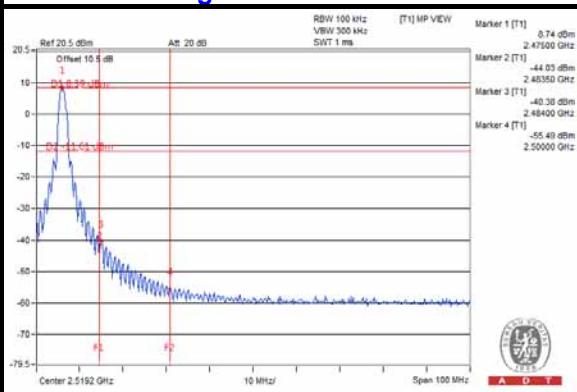





4.6.8 TEST RESULTS (MODE 2)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T



CH 11

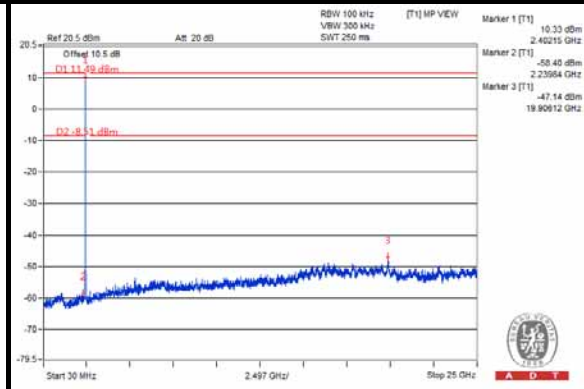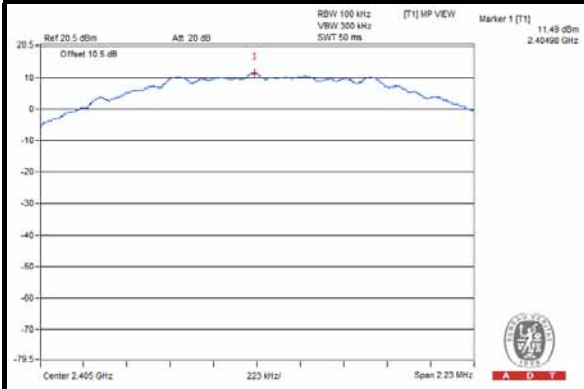


CH 18

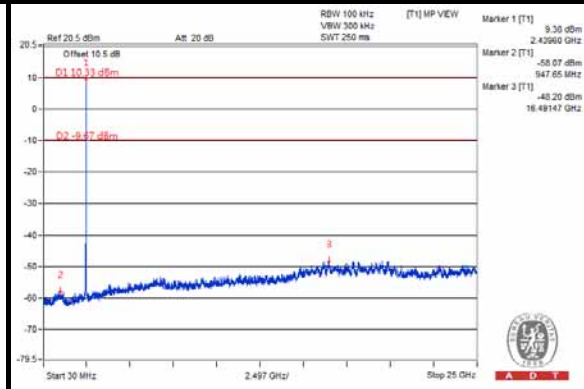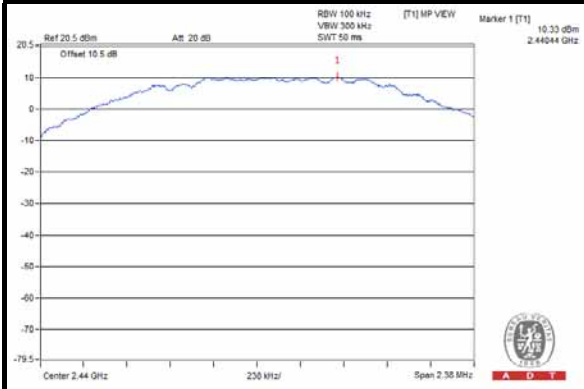


CH 25

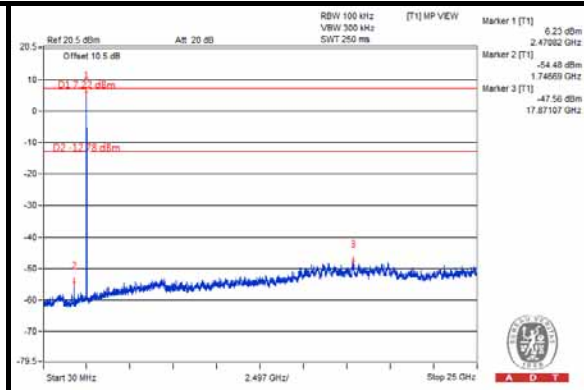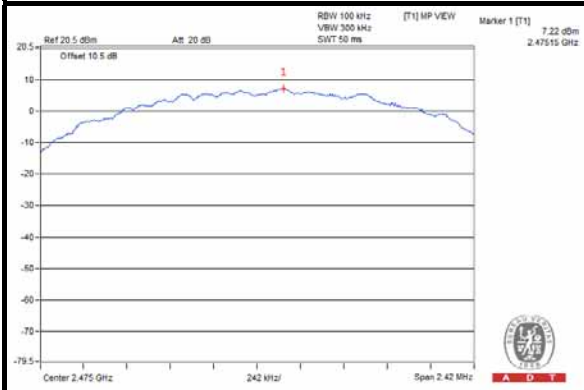

CH 11 Band edge

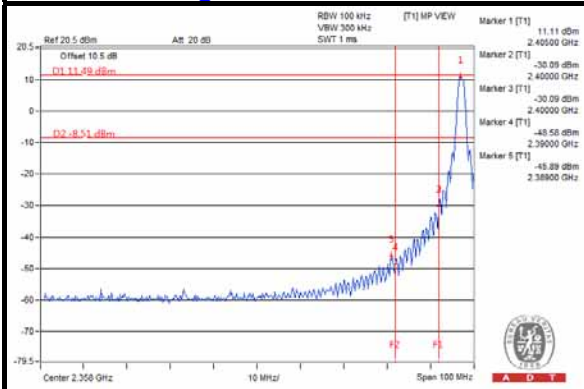

CH 25 Band edge

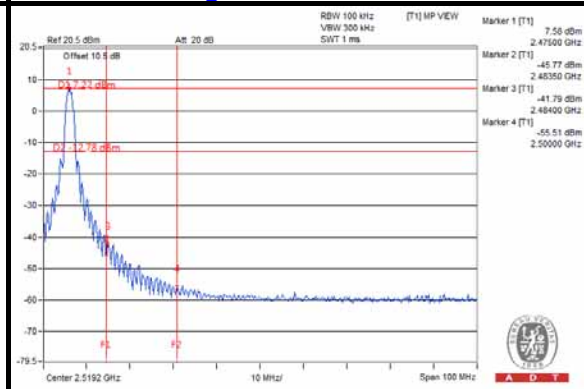



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---