

FCC Test Report

EQUIPMENT : EDA (Enterprise Digital Assistant)
BRAND NAME : Symbol
MODEL NAME : MC5574
FCC ID : H9PMC5574A
STANDARD : 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
MAX. ERP/EIRP POWER : <Sample 1>
GSM850(GPRS) : 1.88 W
GSM850(EDGE) : 1.17 W
GSM1900(GSM) : 1.44 W
GSM1900(EDGE) : 0.66 W
<Sample 2>
GSM850(GPRS) : 1.86 W
GSM850(EDGE) : 1.09 W
GSM1900(GSM) : 1.60 W
GSM1900(EDGE) : 0.65 W
EMISSION DESIGNATOR : GSM : 242KGXW
EDGE : 240KG7W
APPLICANT : Symbol Technologies Inc
One Symbol Plaza Holtsville, NY 11742-1300 USA

The product sample received on Oct. 28, 2008 and completely tested on Nov. 22, 2008. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF TEST RESULT 3

REVISION HISTORY..... 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Testing Site 7

 1.5 Applied Standards 7

 1.6 Ancillary Equipment List..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

3 TEST RESULT..... 10

 3.1 Conducted Output Power Measurement..... 10

 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 12

 3.3 Occupied Bandwidth and Band Edge Measurement 17

 3.4 Conducted Emission Measurement 26

 3.5 Field Strength of Spurious Radiation Measurement 37

 3.6 Frequency Stability Measurement..... 70

4 LIST OF MEASURING EQUIPMENTS 73

5 UNCERTAINTY OF EVALUATION 74

6 CERTIFICATION OF TAF ACCREDITATION 76

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS
3.3	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log ₁₀ (P[Watts])	PASS
3.5	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS
3.6	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG802811	Rev. 01	Initial issue of report	Dec. 01, 2008



1 General Description

1.1 Applicant

Symbol Technologies Inc
One Symbol Plaza Holtsville, NY 11742-1300 USA

1.2 Manufacturer

Symbol Technologies Inc
One Symbol Plaza Holtsville, NY 11742-1300 USA

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	EDA (Enterprise Digital Assistant)
Brand Name	Symbol
Model Name	MC5574
Sample 1	1D Scanner + Numeric Keypad
Sample 2	2D Scanner + Qwerty Keypad
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GPRS850 : 33.12 dBm GSM1900 : 29.58 dBm
Maximum ERP/EIRP	<Sample 1> GSM850(GPRS) : 1.88 W (32.74 dBm) GSM850(EDGE) : 1.17 W (30.68 dBm) GSM1900(GSM) : 1.44 W (31.58 dBm) GSM1900(EDGE) : 0.66 W (28.17 dBm) <Sample 2> GSM850(GPRS) : 1.86 W (32.70 dBm) GSM850(EDGE) : 1.09 W (30.36 dBm) GSM1900(GSM) : 1.60 W (32.03 dBm) GSM1900(EDGE) : 0.65 W (28.10 dBm)
Antenna Type	Fixed Internal Antenna
HW Version	DV
SW Version	BSP25
Type of Modulation	GSM / GPRS : GMSK EDGE : 8PSK
Type of Emission	GSM: 242KGXW EDGE: 240KG7W
EUT Stage	Identical Prototype

Remark: GPRS850 power is larger than GSM850, so all the test cases were performed in GPRS850 mode.

Accessories List:

Accessories Specification		
AC Adapter	Brand Name	Motorola
	Model Name	EADP-16BB A
	Power Rating	I/P: 100-240Vac, 50-60Hz, 0.4A; O/P: 5.4Vdc, 3A
	DC Power Cord Type	1.94 meter shielded cable without ferrite core
Power Cable	AC Power Cord Type	1.82 meter without shielded cable without ferrite core
Battery 1	Brand Name	Motorola
	Model Name	82-107172-01
	Power Rating	3.7Vdc, 2400mAh
	Type	Li-ion
Battery 2	Brand Name	Motorola
	Model Name	82-111094-01
	Power Rating	3.7Vdc, 3600mAh
	Type	Li-ion
USB Cable	Brand Name	Motorola
	Part Number	25-108022-01R
	Signal Line Type	1.62 meter shielded cable with ferrite core
Holster 1	Brand Name	Symbol
	Part Number	11-57530-02
Holster 2	Brand Name	Symbol
	Part Number	21-67292-01R
Holster 3	Brand Name	Symbol
	Part Number	SG-MC5521110-01R

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For accessories equipped with this EUT, please refer to the appendix of the external photo.
3. For other wireless features of this EUT, the test report will be issued separately.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	TW1022/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI C63.4-2003
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132, RSS-133

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Code
1.	GSM Base Station	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	BT Base Station	Anritsu	8852B	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:


1. 30 MHz to 9000 MHz for GSM850.
2. 30MHz to 19000 MHz for GSM1900.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ Sample 1D Scanner + GPRS Link + Battery 2 ■ Sample 1D Scanner + EDGE Link + Battery 2 ■ Sample 1D Scanner + GPRS Link + Battery 1 ■ Sample 2D Scanner + GPRS Link + Battery 2 ■ Sample 1D Scanner + GPRS Link + BT Link + Battery 2 ■ Sample 2D Scanner + GPRS Link + BT Link + Battery 2 ■ Sample 1D Scanner + GPRS Link + WLAN Link + Battery 2 ■ Sample 2D Scanner + GPRS Link + WLAN Link + Battery 2 	<ul style="list-style-type: none"> ■ GPRS Link ■ EDGE Link
GSM 1900	<ul style="list-style-type: none"> ■ Sample 1D Scanner + GSM Link + Battery 2 ■ Sample 1D Scanner + EDGE Link + Battery 2 ■ Sample 1D Scanner + GSM Link + Battery 1 ■ Sample 2D Scanner + GSM Link + Battery 2 ■ Sample 1D Scanner + GSM Link + BT Link + Battery 2 ■ Sample 2D Scanner + GSM Link + BT Link + Battery 2 ■ Sample 1D Scanner + GSM Link + WLAN Link + Battery 2 ■ Sample 2D Scanner + GSM Link + WLAN Link + Battery 2 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE Link


Remark: GPRS850 power is larger than GSM850, so all the test cases were performed in GPRS850 mode.

2.2 Connection Diagram of Test System

<Radiated Emission & Co-location for WLAN>

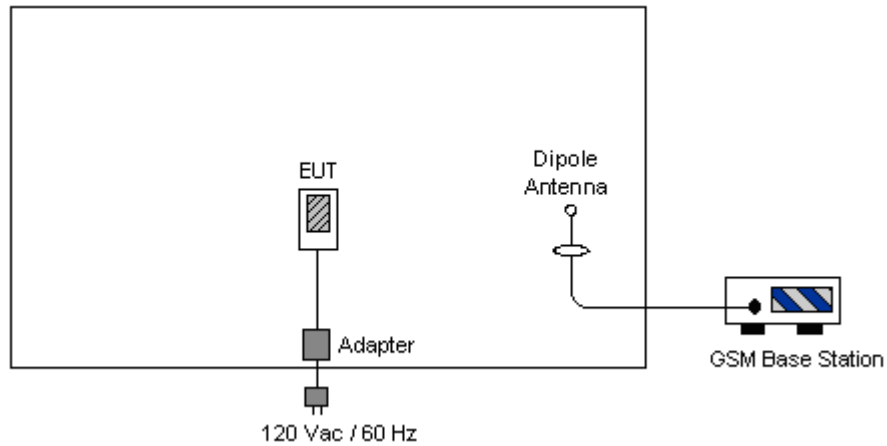

<Co-location for BT>

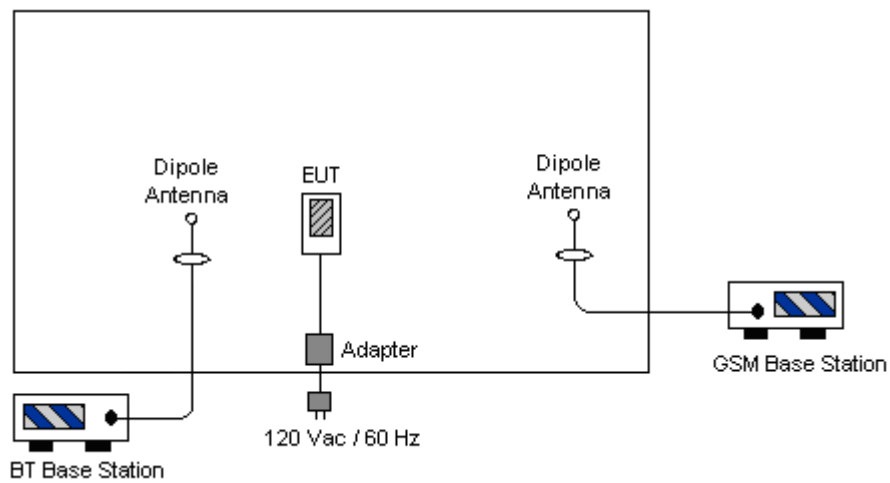

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

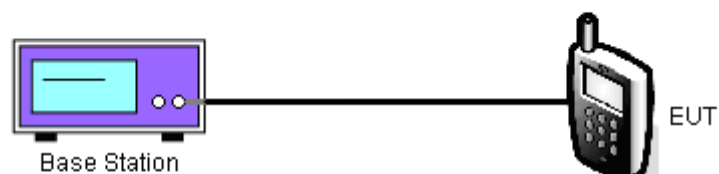



3.1.5 Test Result of Conducted Output Power

Peak power of Cellular				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GPRS	128 (Low)	824.2	32.99	1.99
	189 (Mid)	836.4	33.04	2.01
	251 (High)	848.8	33.12	2.05
EDGE	128 (Low)	824.2	29.25	0.84
	189 (Mid)	836.4	29.08	0.81
	251 (High)	848.8	29.11	0.81

Peak power of PCS				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GSM	512 (Low)	1850.2	29.44	0.88
	661 (Mid)	1880.0	29.52	0.90
	810 (High)	1909.8	29.58	0.91
EDGE	512 (Low)	1850.2	27.66	0.58
	661 (Mid)	1880.0	27.67	0.58
	810 (High)	1909.8	27.71	0.59

Average power of Cellular				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GPRS	128 (Low)	824.2	32.94	1.97
	189 (Mid)	836.4	32.99	1.99
	251 (High)	848.8	33.03	2.01
EDGE	128 (Low)	824.2	26.74	0.47
	189 (Mid)	836.4	26.70	0.47
	251 (High)	848.8	26.56	0.45

Average power of PCS				
Modes	Channel	Frequency (MHz)	Conducted Power	
			(dBm)	(Watts)
GSM	512 (Low)	1850.2	29.18	0.83
	661 (Mid)	1880.0	29.44	0.88
	810 (High)	1909.8	29.57	0.91
EDGE	512 (Low)	1850.2	24.95	0.31
	661 (Mid)	1880.0	24.92	0.31
	810 (High)	1909.8	24.87	0.31

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz, VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.2.4 Test Setup

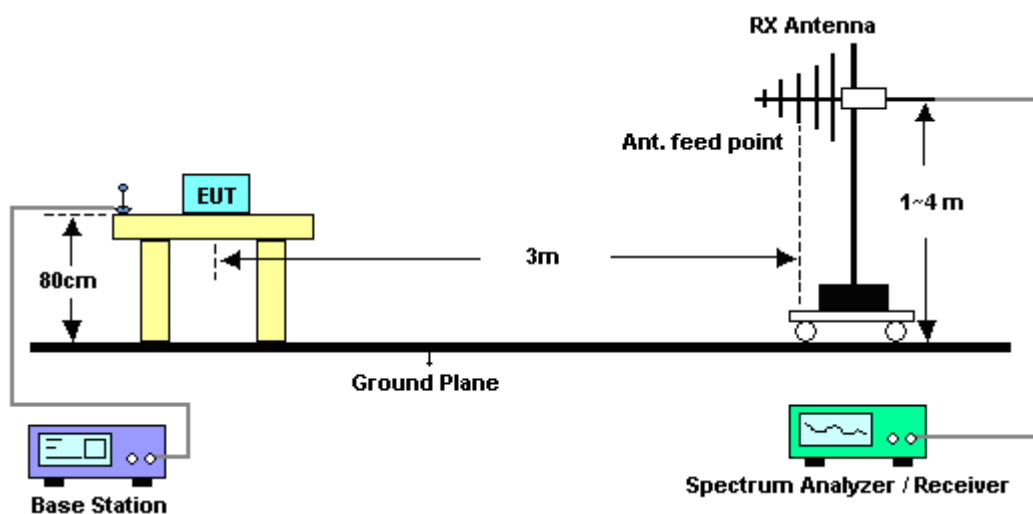

3.2.5 Test Result of ERP

Sample 1D Scanner				
GSM850 (GPRS) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-1.95	33.02	28.92	0.78
836.4	-2.05	35.06	30.86	1.22
848.8	-1.92	36.81	32.74	1.88
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-12.36	35.83	21.32	0.14
836.4	-10.14	35.21	22.92	0.20
848.8	-8.55	36.01	25.31	0.34

Sample 1D Scanner				
GSM850 (EDGE) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-4.24	33.02	26.63	0.46
836.4	-4.64	35.06	28.27	0.67
848.8	-3.98	36.81	30.68	1.17
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-10.52	35.83	23.16	0.21
836.4	-9.30	35.21	23.76	0.24
848.8	-10.53	36.01	23.33	0.22



Sample 2D Scanner				
GSM850 (GPRS) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-3.77	33.02	27.10	0.51
836.4	-3.81	35.06	29.10	0.81
848.8	-1.96	36.81	32.70	1.86
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-8.48	35.83	25.20	0.33
836.4	-8.47	35.21	24.59	0.29
848.8	-8.74	36.01	25.12	0.33

Sample 2D Scanner				
GSM850 (EDGE) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-6.24	33.02	24.63	0.29
836.4	-5.23	35.06	27.68	0.59
848.8	-4.30	36.81	30.36	1.09
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-11.91	35.83	21.77	0.15
836.4	-12.27	35.21	20.79	0.12
848.8	-10.71	36.01	23.15	0.21

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

Sample 1D Scanner				
GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-16.85	44.09	27.24	0.53
1880.0	-20.44	45.42	24.98	0.31
1909.8	-18.81	43.31	24.50	0.28
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.80	47.38	31.58	1.44
1880.0	-19.18	47.52	28.34	0.68
1909.8	-17.66	46.57	28.91	0.78

Sample 1D Scanner				
GSM1900 (EDGE) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-18.81	44.09	25.28	0.34
1880.0	-22.13	45.42	23.29	0.21
1909.8	-21.78	43.31	21.53	0.14
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.21	47.38	28.17	0.66
1880.0	-21.80	47.52	25.72	0.37
1909.8	-19.61	46.57	26.96	0.50



Sample 2D Scanner				
GSM1900 (GSM) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.31	44.09	28.78	0.76
1880.0	-18.35	45.42	27.07	0.51
1909.8	-17.10	43.31	26.21	0.42
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.35	47.38	32.03	1.60
1880.0	-17.14	47.52	30.38	1.09
1909.8	-16.73	46.57	29.84	0.96

Sample 2D Scanner				
GSM1900 (EDGE) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-16.97	44.09	27.12	0.52
1880.0	-20.88	45.42	24.54	0.28
1909.8	-18.21	43.31	25.10	0.32
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.28	47.38	28.10	0.65
1880.0	-21.31	47.52	26.21	0.42
1909.8	-18.88	46.57	27.69	0.59

* EIRP = LVL (dBm) + Correction Factor (dB)

3.3 Occupied Bandwidth and Band Edge Measurement

3.3.1 Description of Occupied Bandwidth and Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the low, middle and high channels for the highest RF powers were measured.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of $10 \log (1\% \text{ BW}/\text{measurement RBW})$ was implemented.

3.3.4 Test Setup

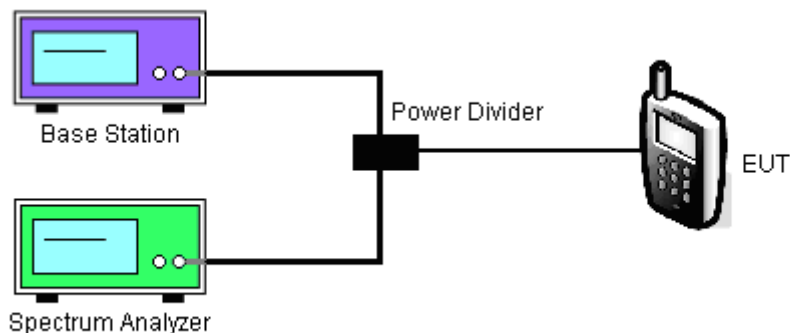




3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS Link		

99% Occupied Bandwidth Plot on Channel 189

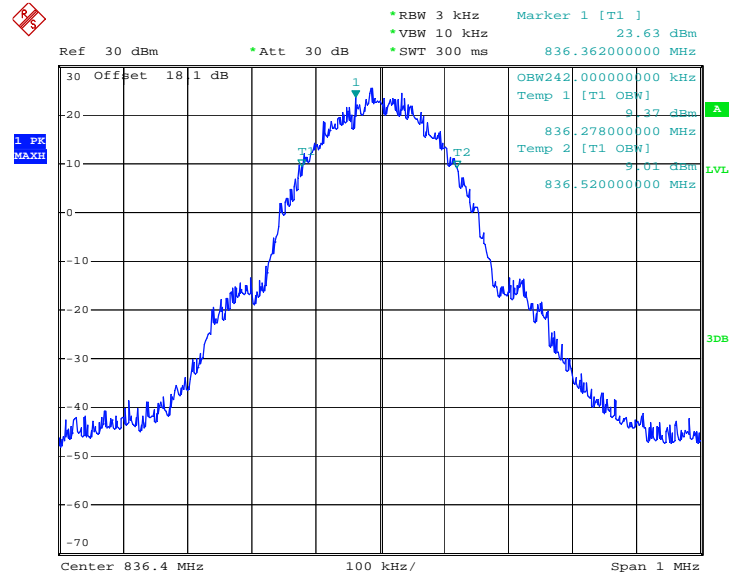

Date: 28.OCT.2008 23:33:04

26dB Bandwidth Plot on Channel 189

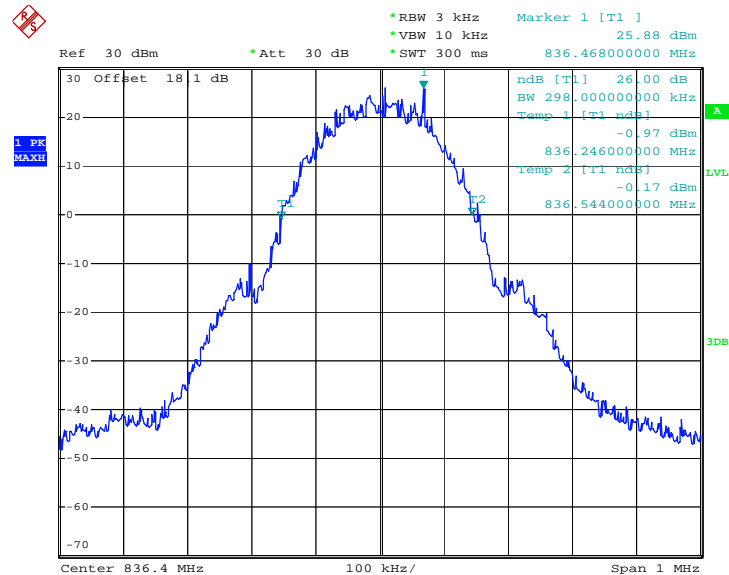


Date: 28.OCT.2008 23:20:15




Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE Link		

99% Occupied Bandwidth Plot on Channel 189

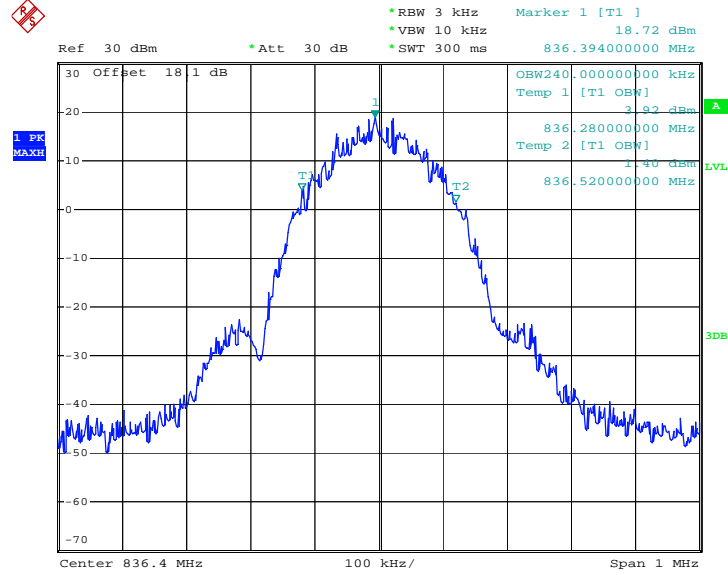

Date: 29.OCT.2008 01:20:05

26dB Bandwidth Plot on Channel 189

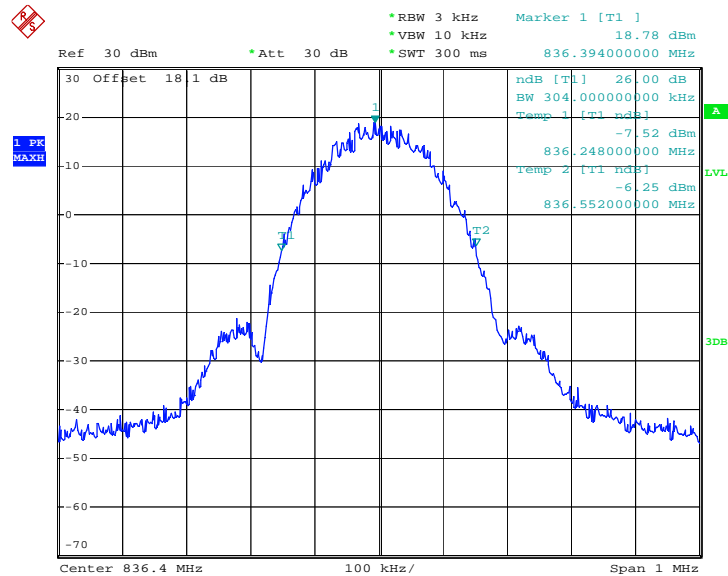


Date: 29.OCT.2008 01:17:38




Band :	GSM 1900	Power Stage :	High
Test Mode :	GSM Link		

99% Occupied Bandwidth Plot on Channel 661

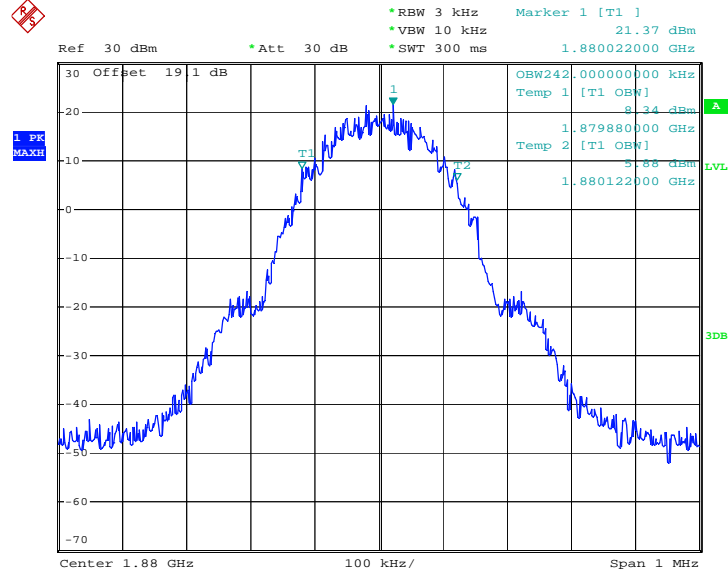

Date: 29.OCT.2008 17:55:01

26dB Bandwidth Plot on Channel 661

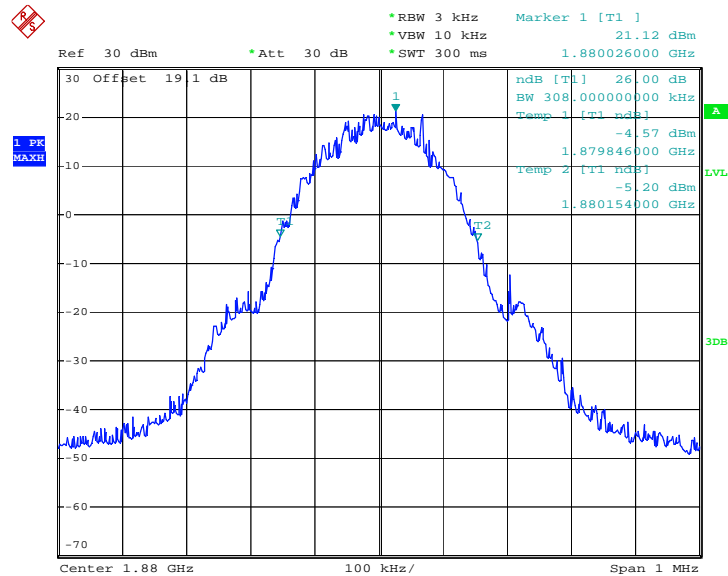


Date: 29.OCT.2008 17:51:42




Band :	GSM 1900	Power Stage :	High
Test Mode :	EDGE Link		

99% Occupied Bandwidth Plot on Channel 661

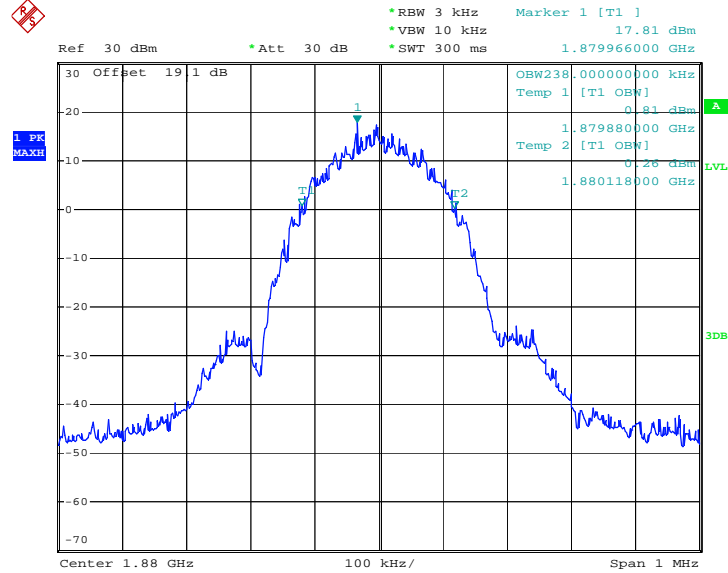

Date: 29.OCT.2008 20:08:09

26dB Bandwidth Plot on Channel 661

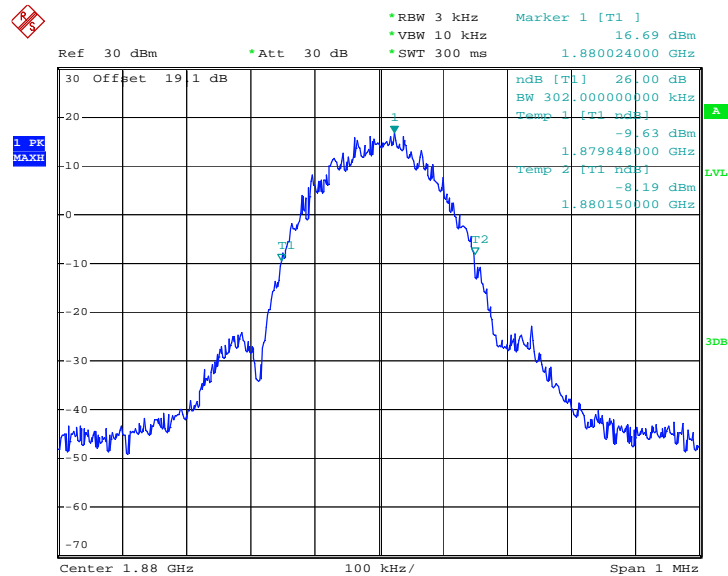


Date: 29.OCT.2008 20:05:02



3.3.6 Test Result (Plots) of Conducted Band Edges


Band :	GSM850	Power Stage :	High
Test Mode :	GPRS Link		

Lower Band Edge Plot on Channel 128

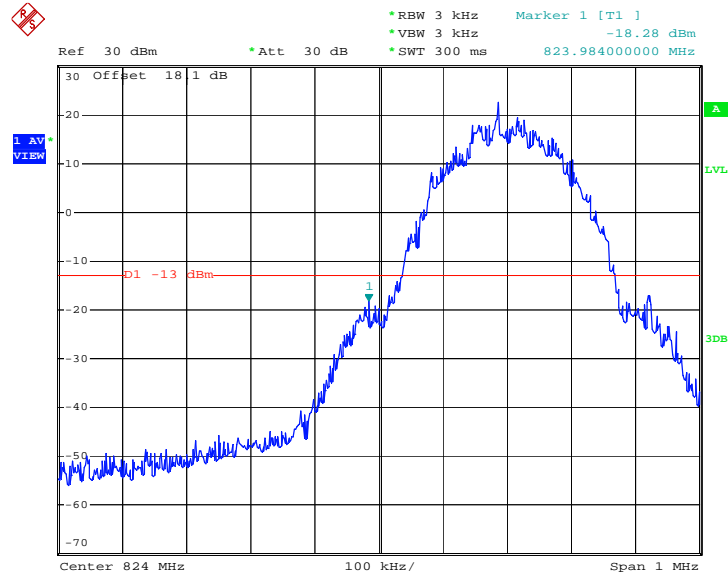

Date: 28.OCT.2008 23:25:29

Higher Band Edge Plot on Channel 251

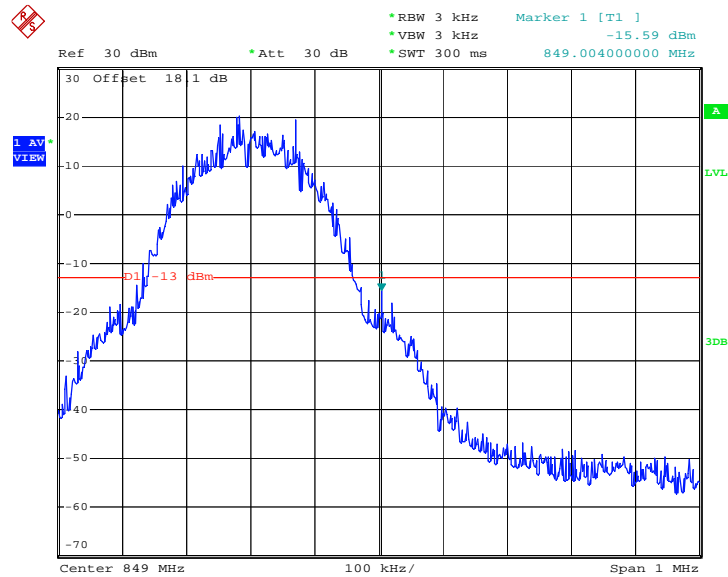


Date: 28.OCT.2008 23:26:44




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE Link		

Lower Band Edge Plot on Channel 128

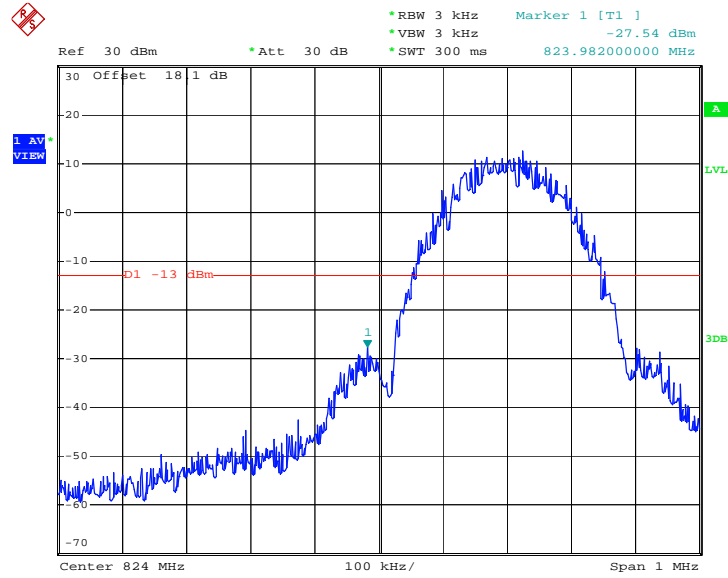

Date: 29.OCT.2008 01:33:38

Higher Band Edge Plot on Channel 251

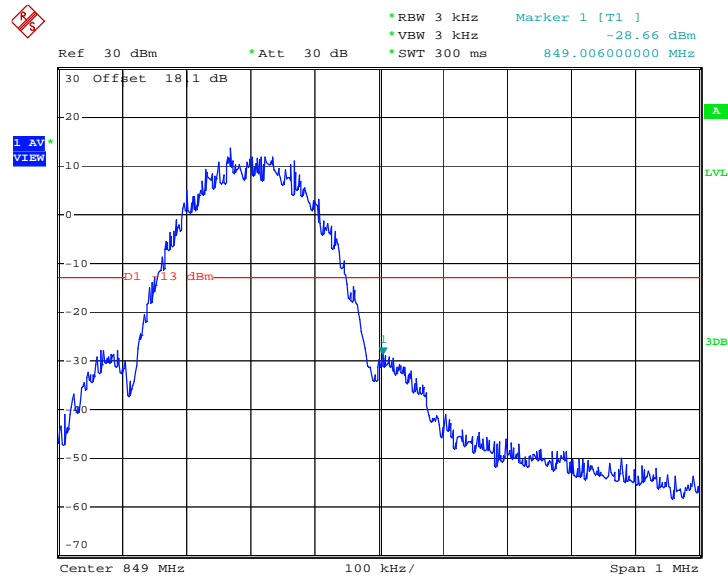


Date: 29.OCT.2008 01:37:22




Band :	GSM1900	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 512

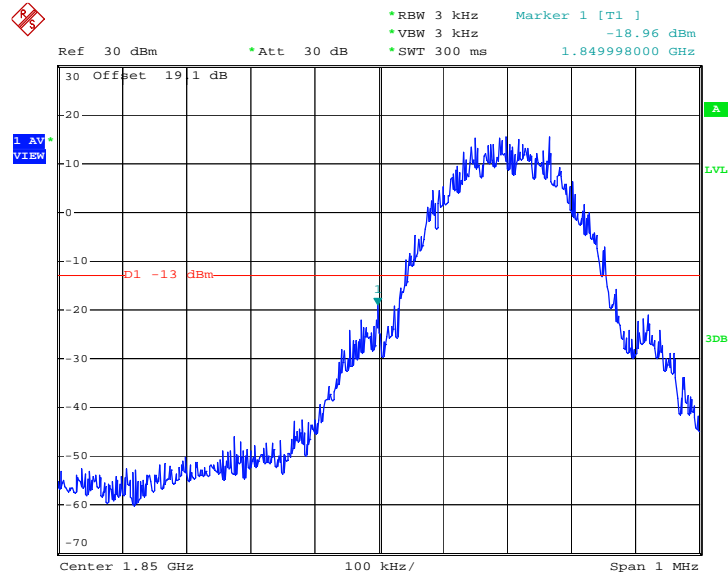

Date: 29.OCT.2008 18:27:09

Higher Band Edge Plot on Channel 810

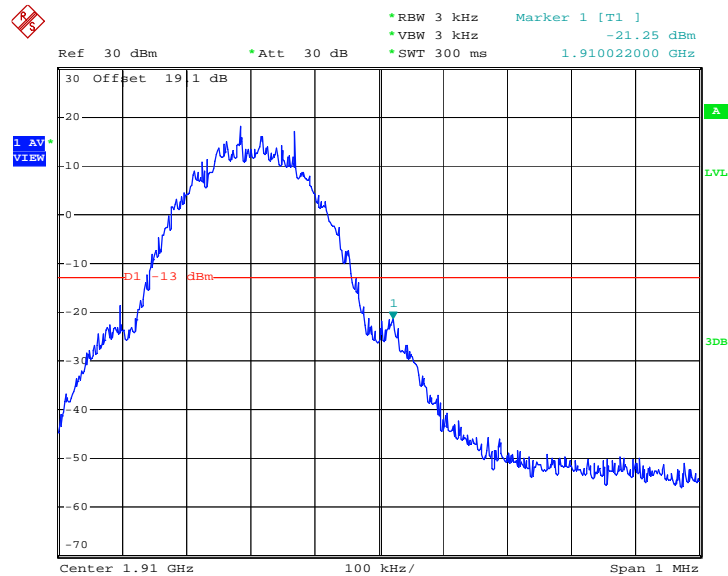


Date: 29.OCT.2008 18:28:47




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE Link		

Lower Band Edge Plot on Channel 512

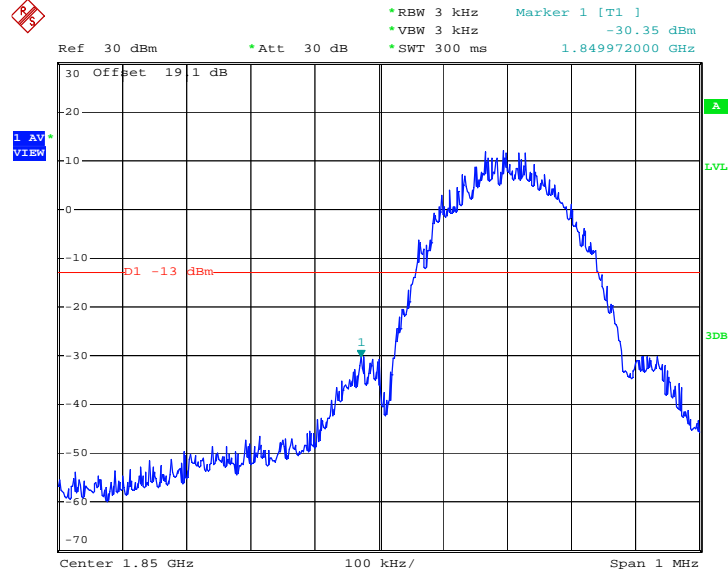

Date: 29.OCT.2008 20:12:36

Higher Band Edge Plot on Channel 810

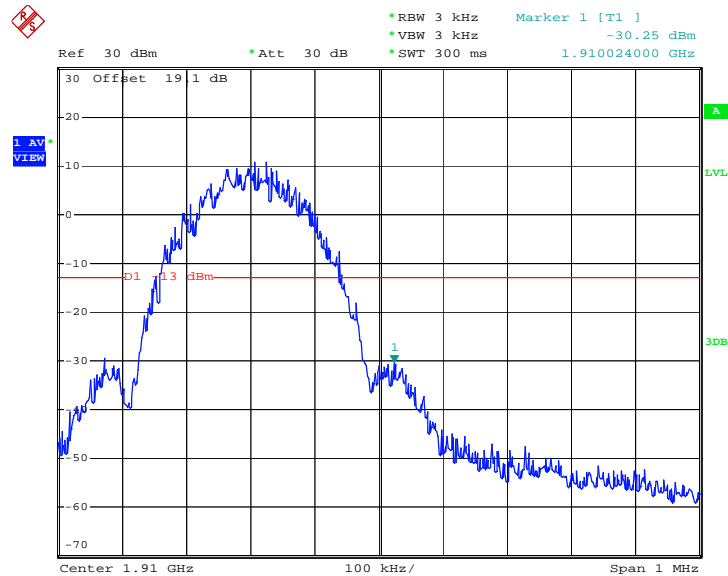

Date: 29.OCT.2008 20:13:35

3.4 Conducted Emission Measurement

3.4.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

3.4.4 Test Setup

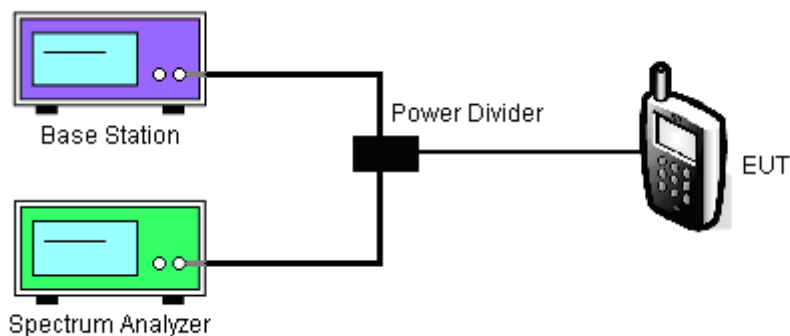




3.4.5 Test Result of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS Link		

Conducted Emission Plot between 30M-1G

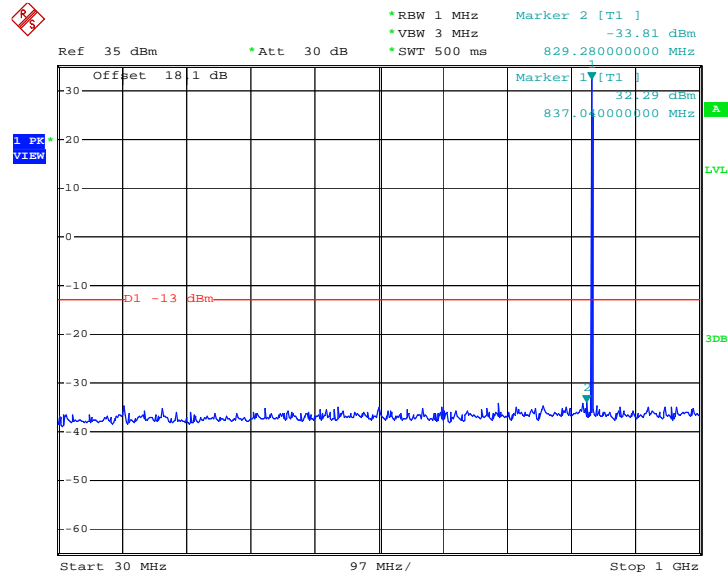

Date: 29.OCT.2008 00:49:21


Conducted Emission Plot between 1GHz ~ 3GHz

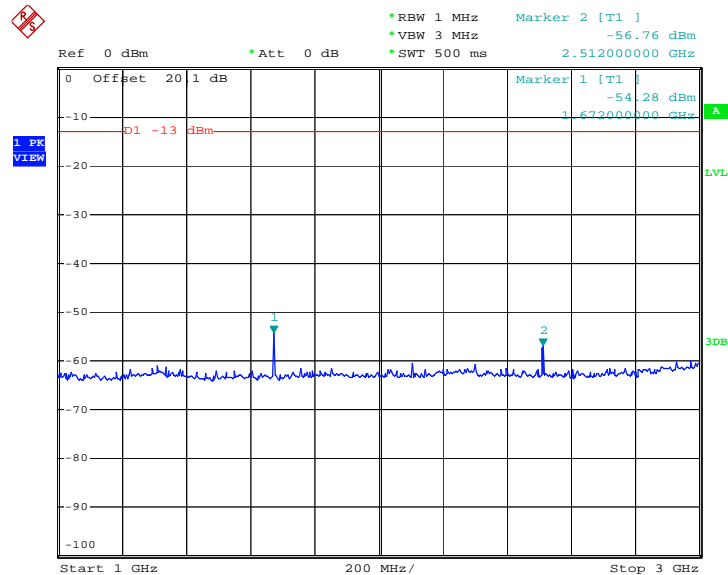

Date: 29.OCT.2008 00:50:43




Conducted Emission Plot between 3GHz ~ 7GHz

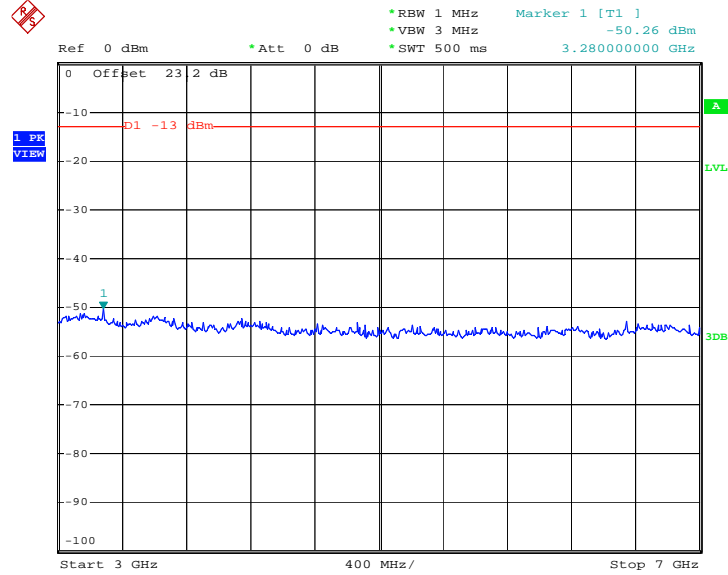

Date: 29.OCT.2008 00:51:09

Conducted Emission Plot between 7GHz ~ 9GHz

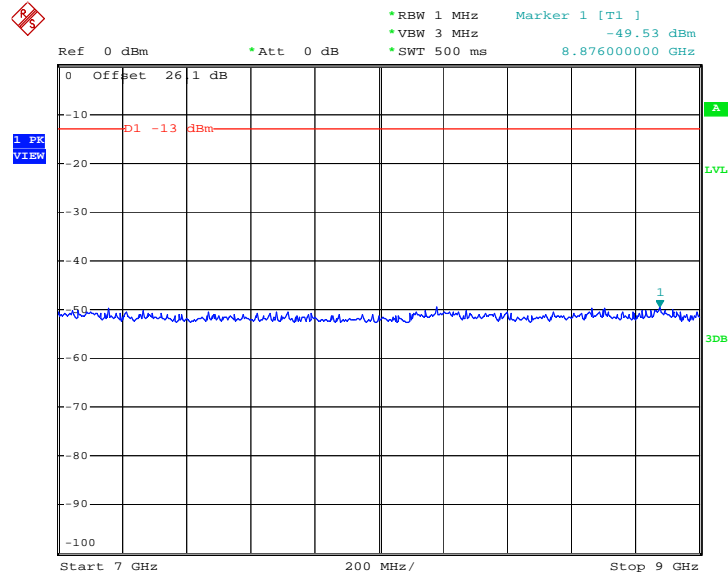


Date: 29.OCT.2008 00:51:36




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE Link		

Conducted Emission Plot between 30M-1G

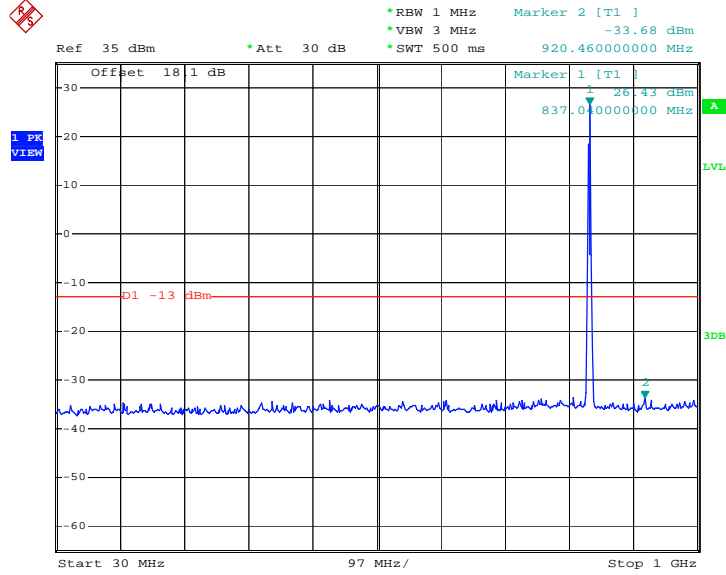

Date: 29.OCT.2008 01:15:48


Conducted Emission Plot between 1GHz ~ 3GHz

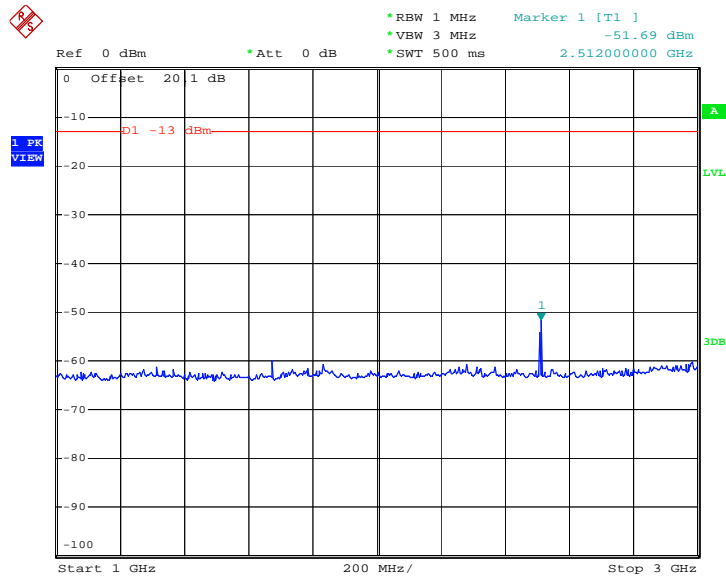

Date: 29.OCT.2008 01:14:17




Conducted Emission Plot between 3GHz ~ 7GHz

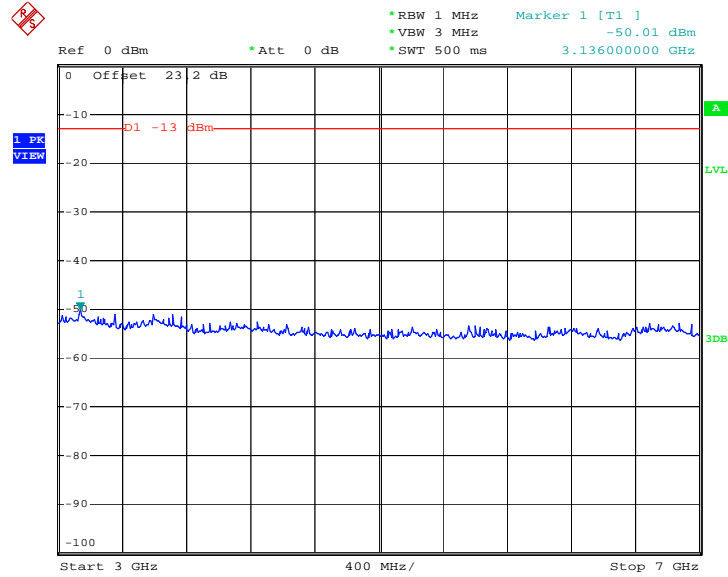

Date: 29.OCT.2008 01:13:39

Conducted Emission Plot between 7GHz ~ 9GHz

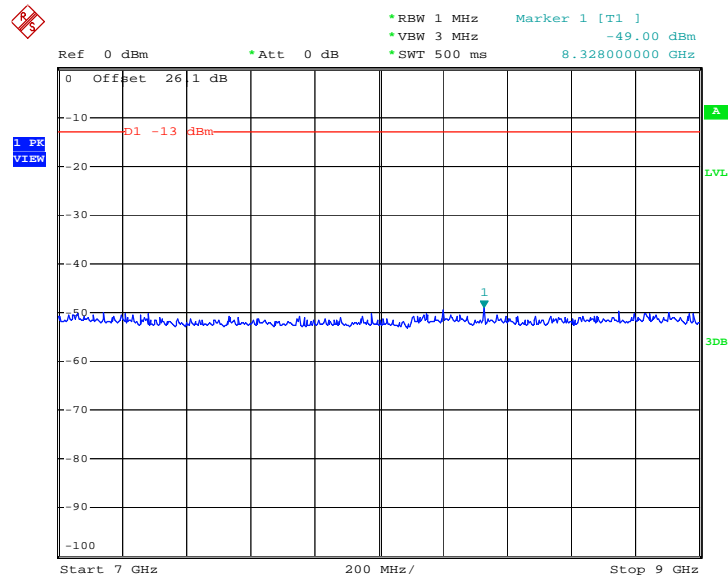


Date: 29.OCT.2008 01:05:35




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link		

Conducted Emission Plot between 30M-1G

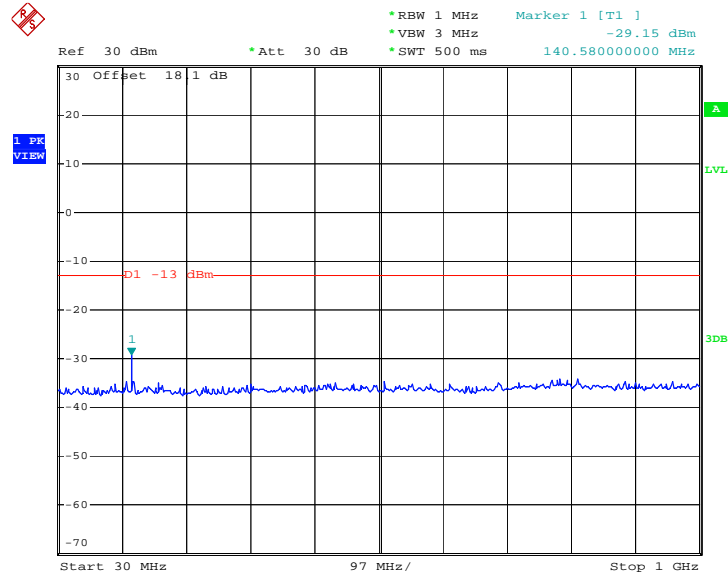

Date: 29.OCT.2008 18:55:46


Conducted Emission Plot between 1GHz ~ 3GHz

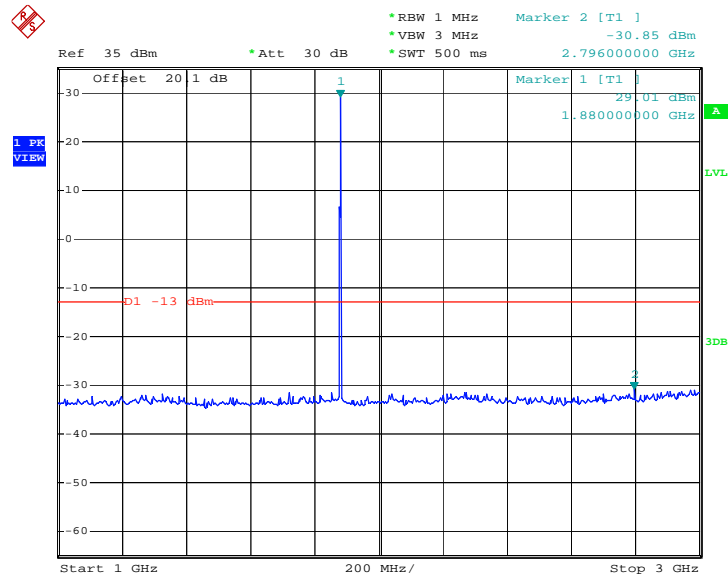

Date: 27.NOV.2008 10:30:23




Conducted Emission Plot between 3G-7G

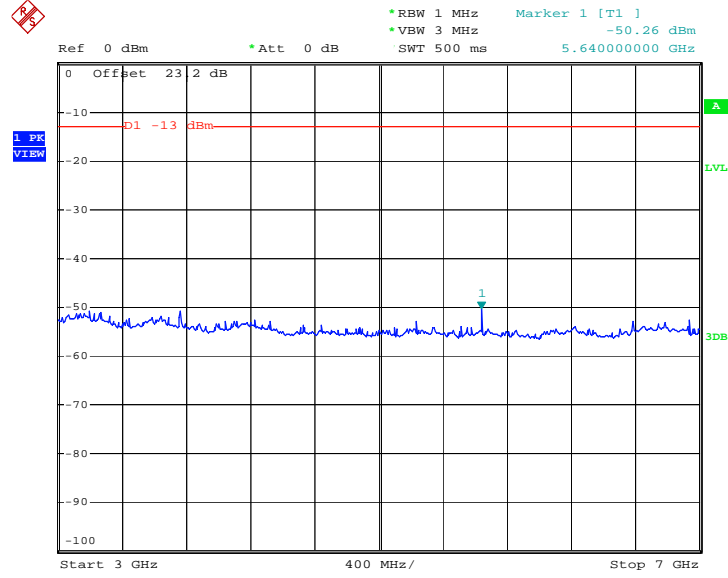

Date: 29.OCT.2008 19:06:01


Conducted Emission Plot between 7G-13.6G

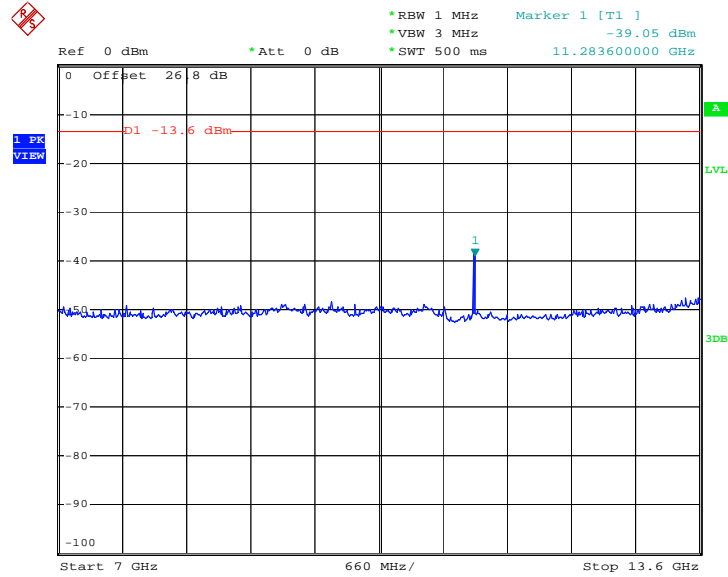

Date: 29.OCT.2008 19:10:48



Conducted Emission Plot between 13.6G-19.1G

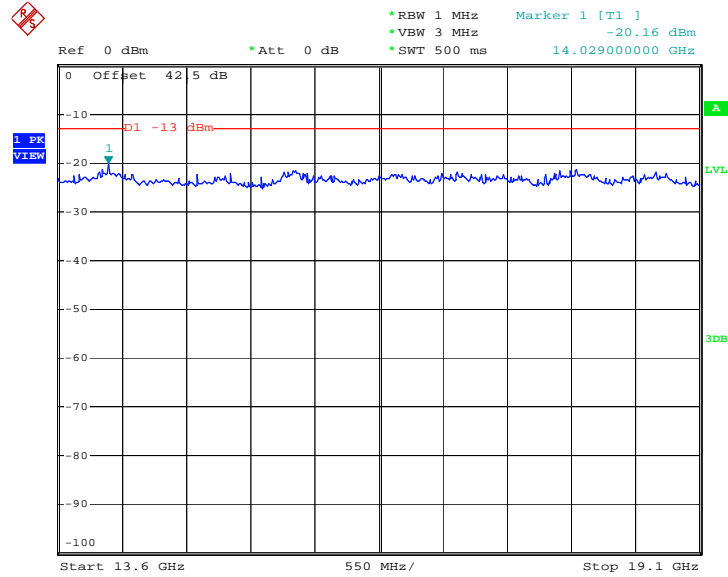


Date: 29.OCT.2008 19:12:25




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE Link		

Conducted Emission Plot between 30M-1G

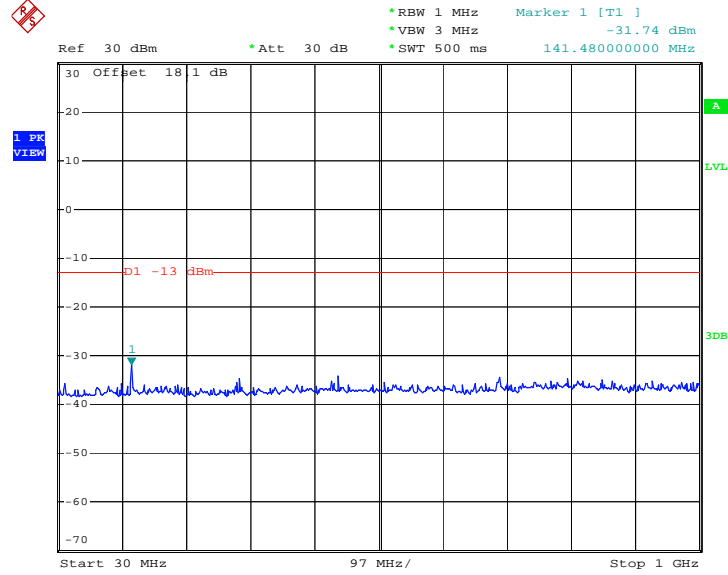

Date: 29.OCT.2008 20:46:57


Conducted Emission Plot between 1GHz ~ 3GHz

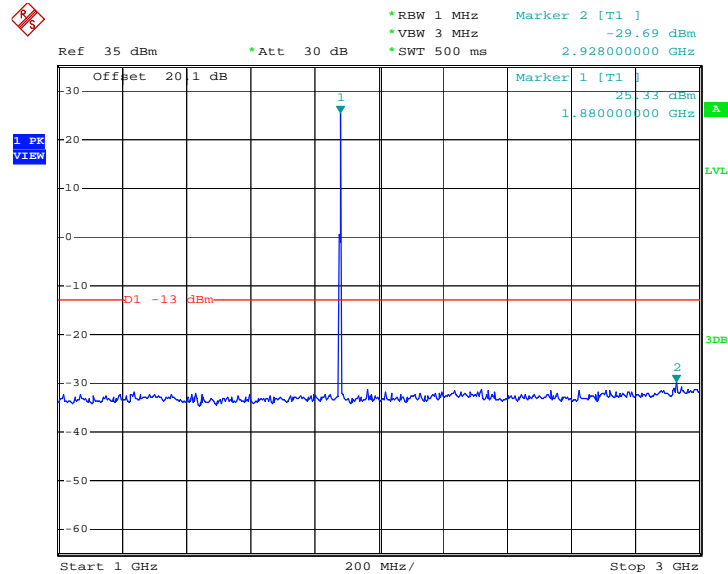

Date: 29.OCT.2008 20:55:11




Conducted Emission Plot between 3G-7G

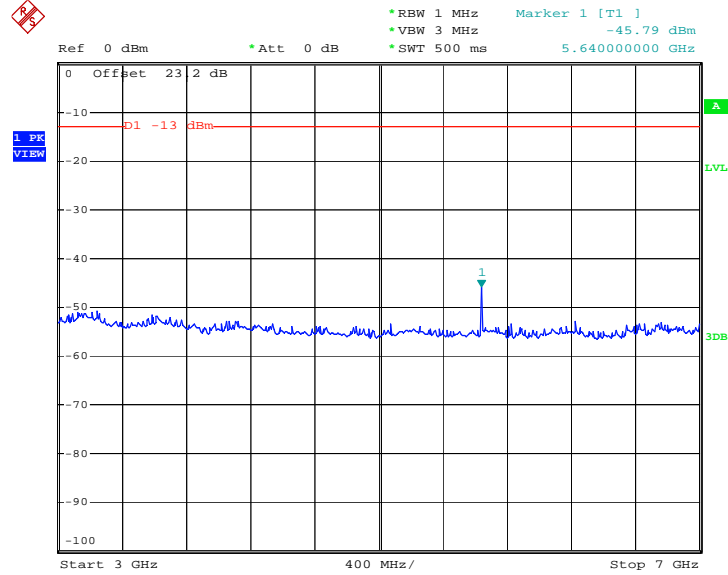

Date: 29.OCT.2008 20:57:36


Conducted Emission Plot between 7G-13.6G

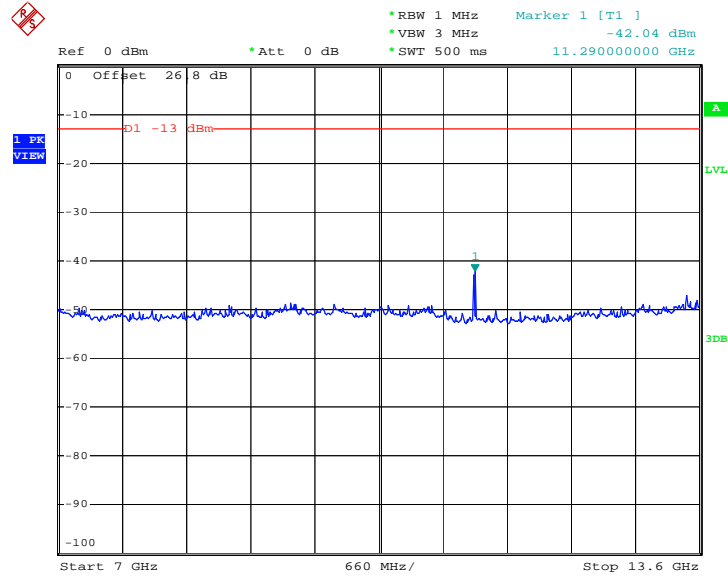

Date: 29.OCT.2008 21:16:07



Conducted Emission Plot between 13.6G-19.1G

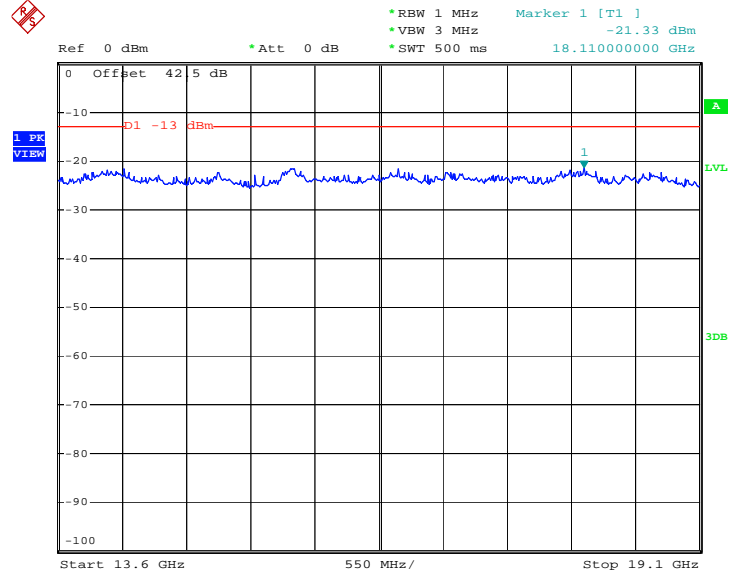

Date: 29.OCT.2008 21:00:39

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

4. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
5. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
6. The table was rotated 360 degrees to determine the position of the highest spurious emission.
7. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
8. Taking the record of maximum spurious emission.
9. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
10. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
11. Taking the record of output power at antenna port.
12. Repeat step 7 to step 8 for another polarization.
13. Emission level (dBm) = output power + substitution Gain.


3.5.4 Test Setup

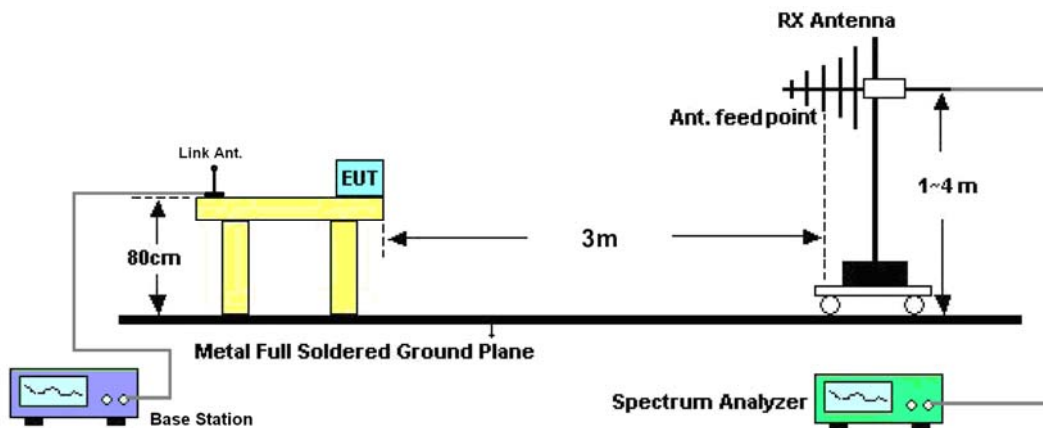



3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

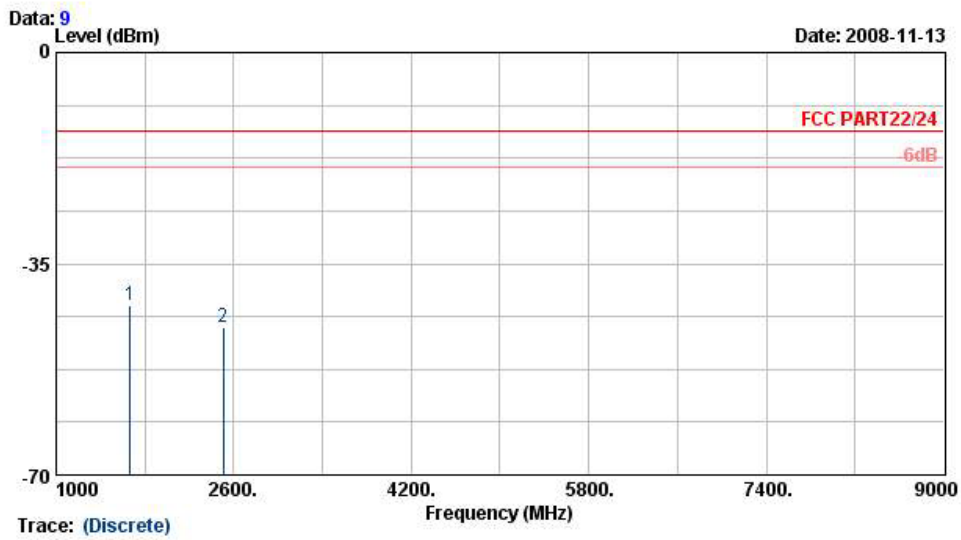


Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-41.79	-13	-28.79	-49.54	-40.8	3.39	4.55	H	Pass
2509	-45.43	-13	-32.43	-59.53	-45.49	3.71	5.92	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

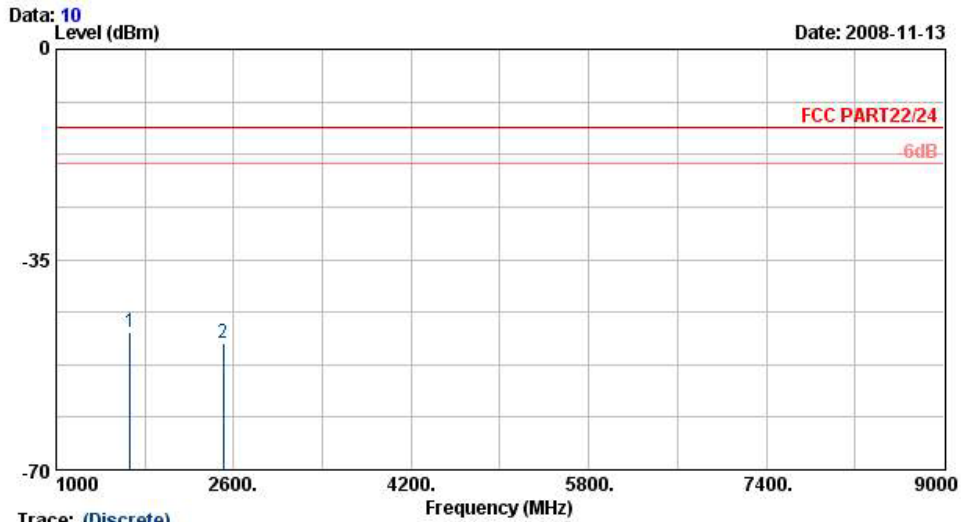


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-47.05	-13	-34.05	-51.86	-45.67	3.39	4.16	V	Pass
2509	-48.96	-13	-35.96	-59.58	-48.82	3.71	5.72	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + EDGE Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

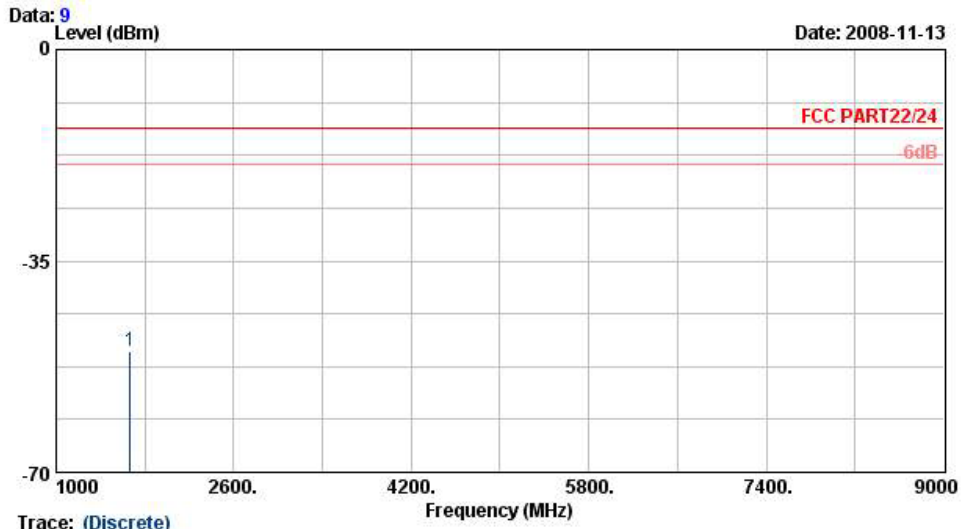


Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-49.90	-13	-36.90	-56.19	-48.91	3.39	4.55	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + EDGE Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

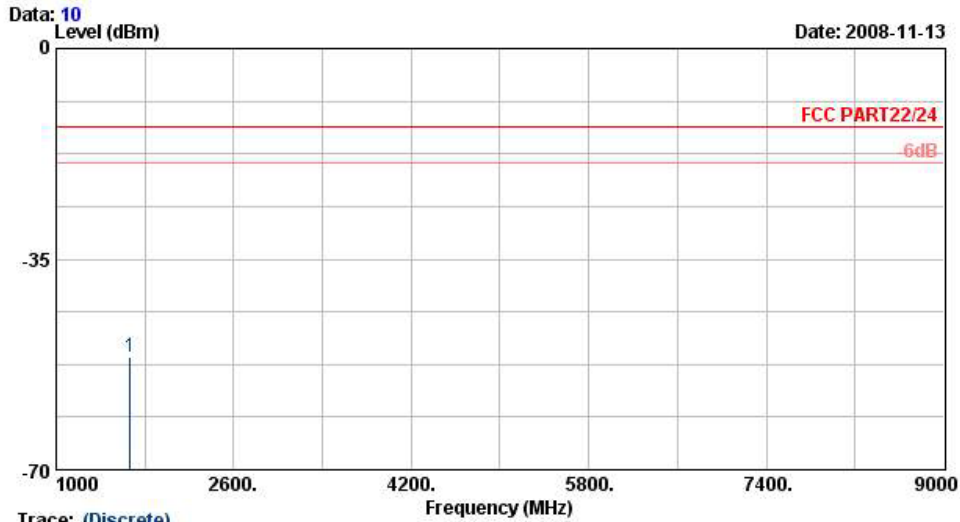


Site : 03CH07-HY
Condition : HF-EIRP(080306) VERTICAL
Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-51.31	-13	-38.31	-55.63	-49.93	3.39	4.16	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + Battery 1	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

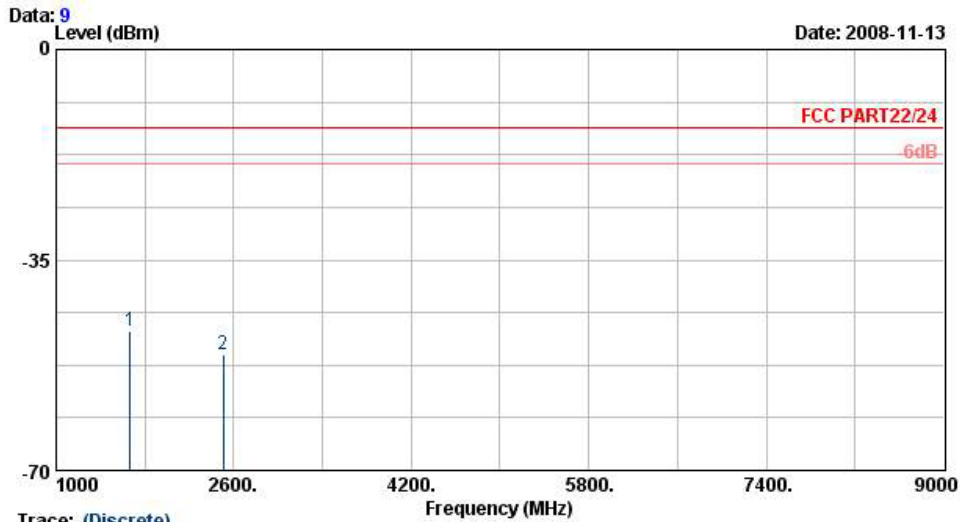


Site : 03CH07-HY
Condition : HF-EIRP(080306) HORIZONTAL
Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-46.82	-13	-33.82	-53.69	-45.83	3.39	4.55	H	Pass
2509	-50.70	-13	-37.70	-60.84	-50.76	3.71	5.92	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + Battery 1	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

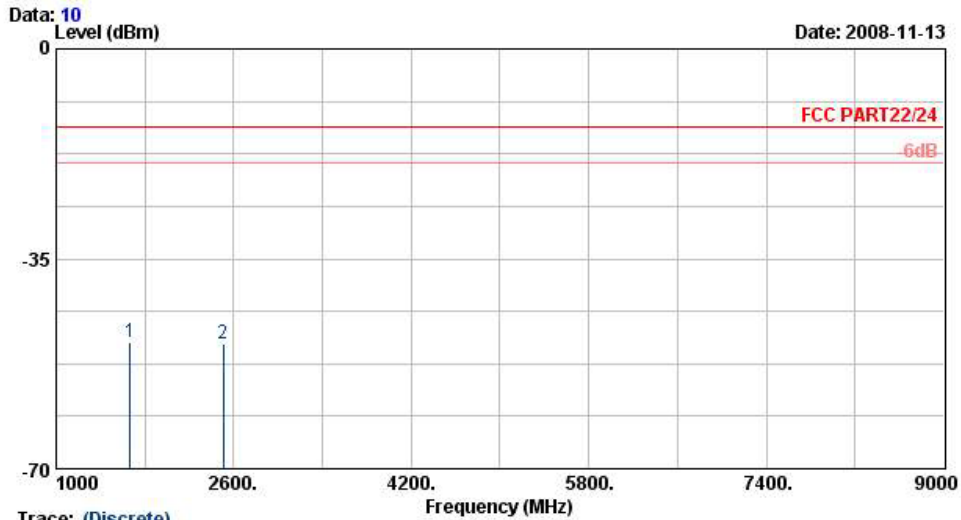


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-48.80	-13	-35.80	-53.52	-47.42	3.39	4.16	V	Pass
2509	-49.31	-13	-36.31	-59.9	-49.17	3.71	5.72	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

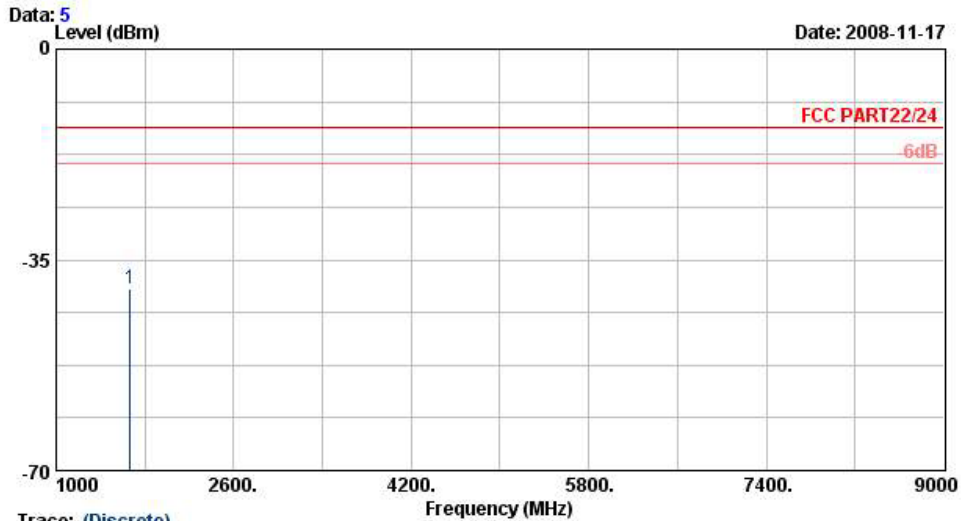


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-39.90	-13	-26.90	-47.98	-38.91	3.39	4.55	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

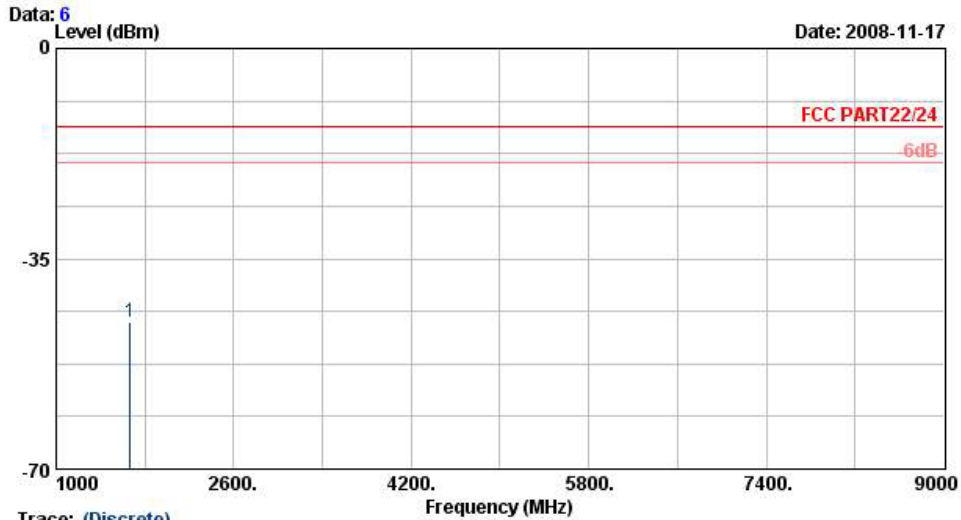


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-45.47	-13	-32.47	-50.86	-44.09	3.39	4.16	V	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

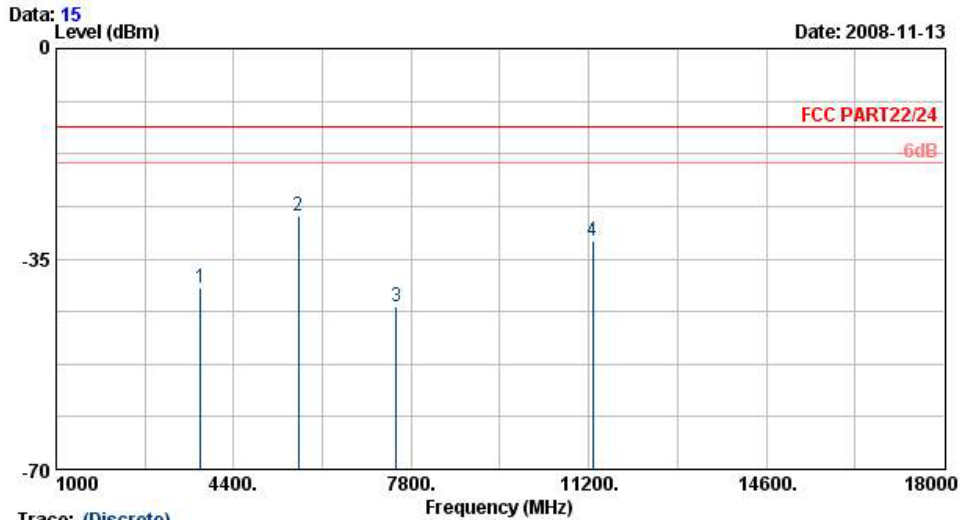


Site : 03CH07-HY
Condition : HF-EIRP(080306) HORIZONTAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-39.74	-13	-26.74	-54.98	-43.11	4.03	7.40	H	Pass
5636	-27.89	-13	-14.89	-50.07	-32.83	3.87	8.81	H	Pass
7520	-42.97	-13	-29.97	-64.38	-46.85	5.83	9.71	H	Pass
11280	-31.98	-13	-18.98	-64.19	-34.26	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

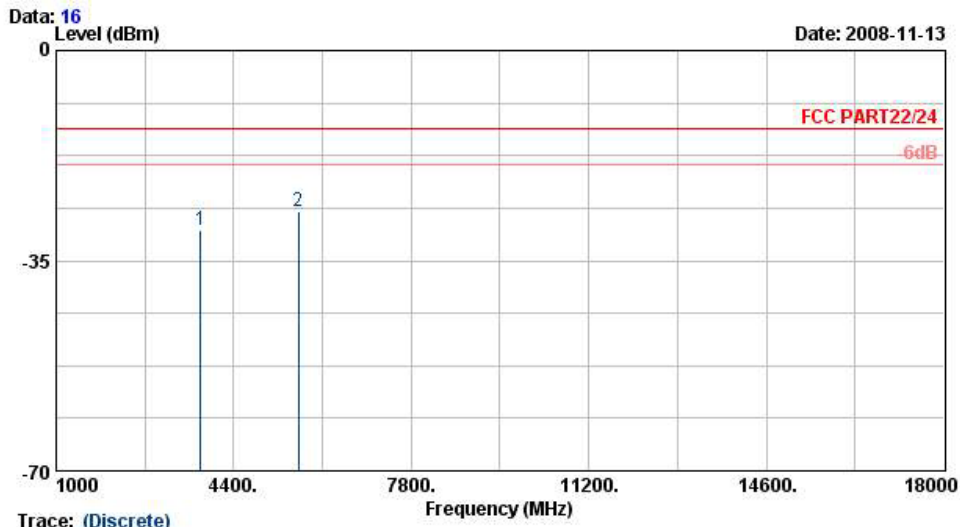


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-29.93	-13	-16.93	-48.7	-33.81	4.03	7.91	V	Pass
5636	-26.91	-13	-13.91	-50.28	-32.81	3.87	9.77	V	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + EDGE Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

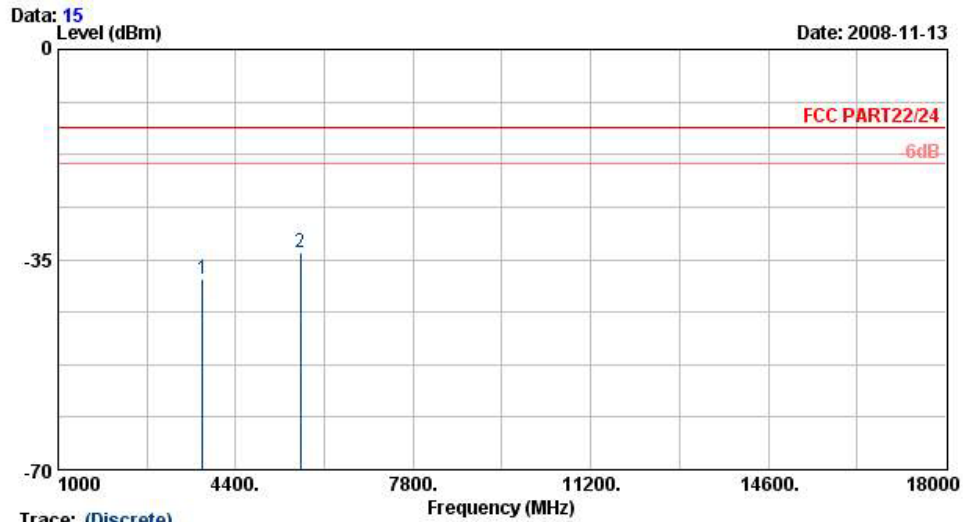


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-38.32	-13	-25.32	-53.5	-41.69	4.03	7.40	H	Pass
5636	-33.94	-13	-20.94	-55.35	-38.88	3.87	8.81	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + EDGE Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

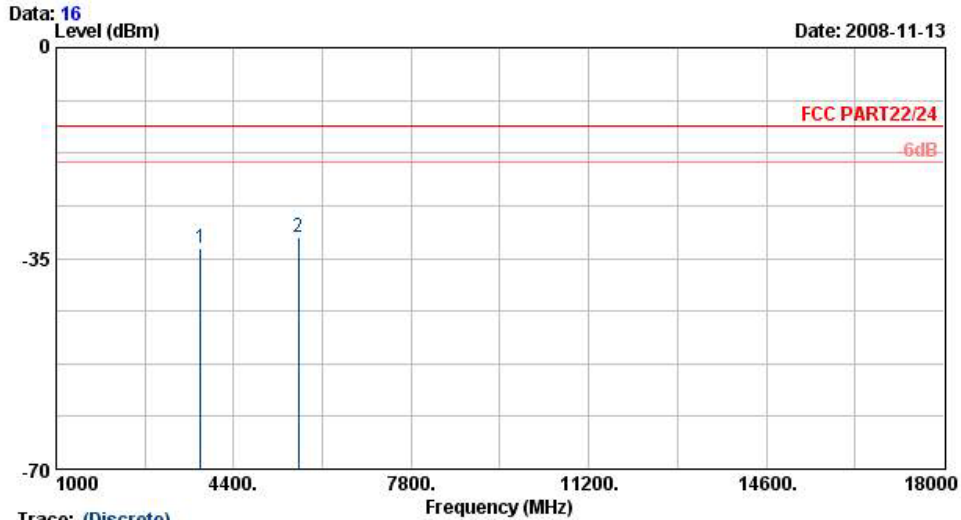


Site : 03CH07-HY
Condition : HF-EIRP(080306) VERTICAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-33.30	-13	-20.30	-51.81	-37.18	4.03	7.91	V	Pass
5636	-31.36	-13	-18.36	-54.36	-37.26	3.87	9.77	V	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + Battery 1	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

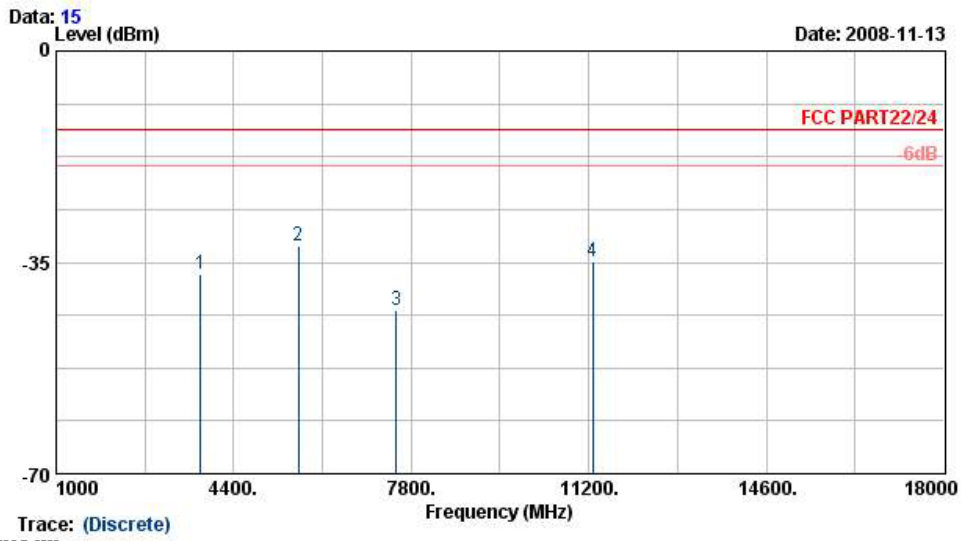


Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-36.91	-13	-23.91	-52.44	-40.28	4.03	7.40	H	Pass
5636	-32.34	-13	-19.34	-54.33	-37.28	3.87	8.81	H	Pass
7520	-42.97	-13	-29.97	-64.38	-46.85	5.83	9.71	H	Pass
11280	-34.83	-13	-21.83	-66.34	-37.11	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + Battery 1	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

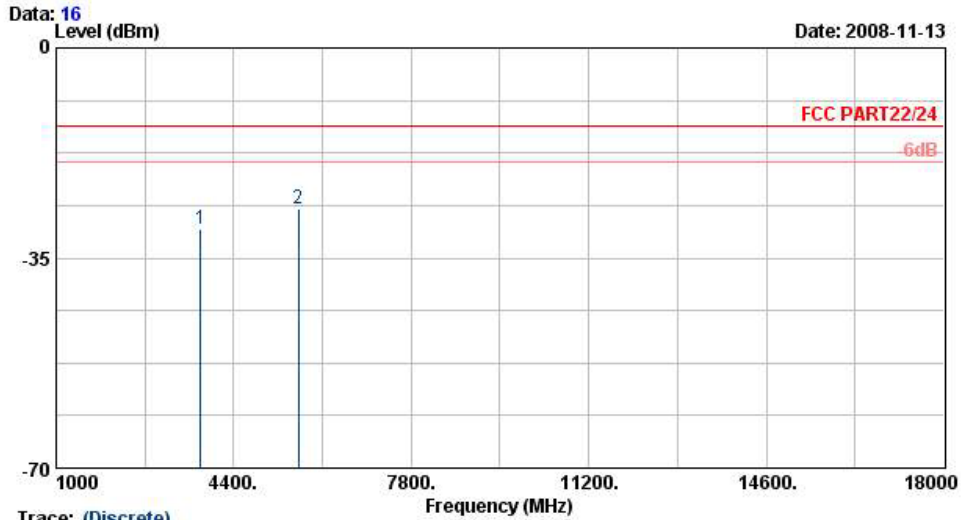


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-30.31	-13	-17.31	-49.08	-34.19	4.03	7.91	V	Pass
5636	-26.72	-13	-13.72	-50.09	-32.62	3.87	9.77	V	Pass




Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

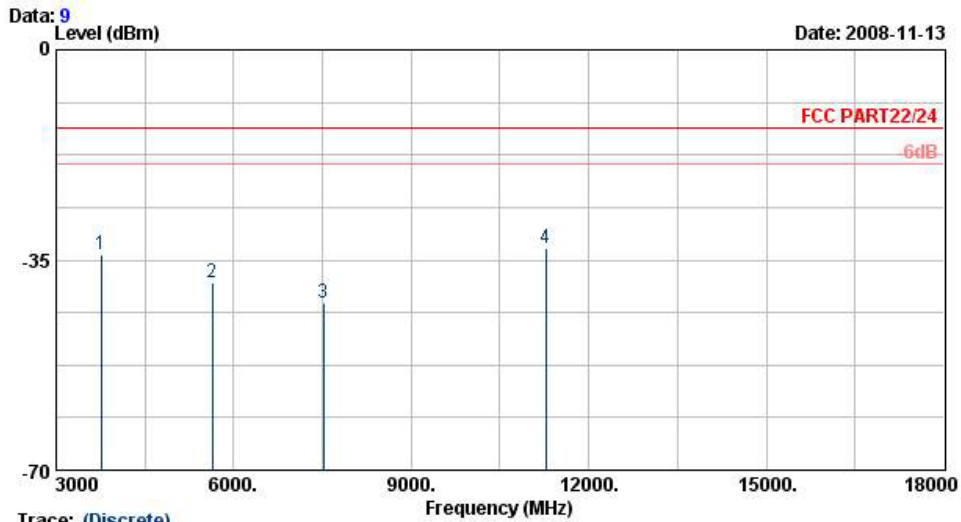

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-34.10	-13	-21.10	-49.73	-37.47	4.03	7.40	H	Pass
5636	-38.71	-13	-25.71	-59.61	-43.65	3.87	8.81	H	Pass
7520	-42.23	-13	-29.23	-63.85	-46.11	5.83	9.71	H	Pass
11280	-33.11	-13	-20.11	-65.13	-35.39	8.48	10.76	H	Pass




Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

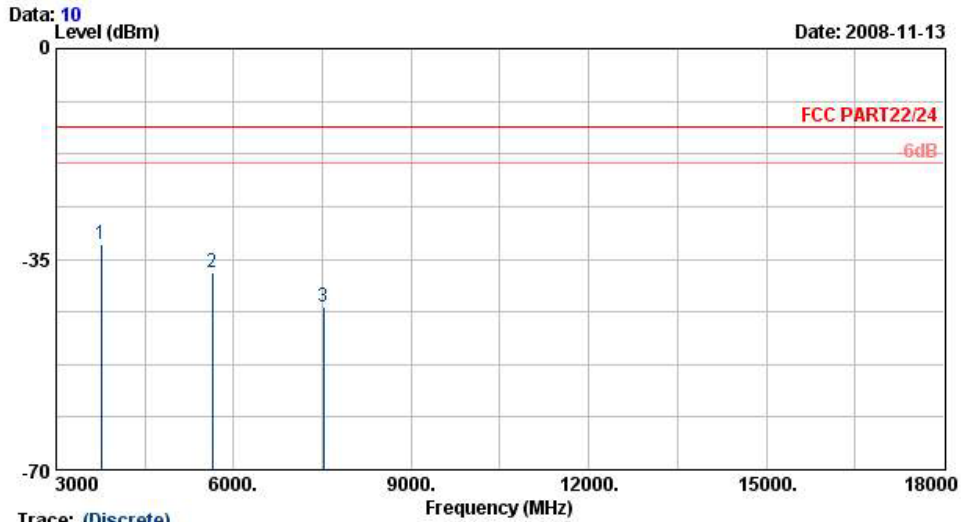

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-32.42	-13	-19.42	-50.9	-36.3	4.03	7.91	V	Pass
5636	-37.25	-13	-24.25	-59.55	-43.15	3.87	9.77	V	Pass
7520	-43.05	-13	-30.05	-64.71	-48.03	5.83	10.81	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

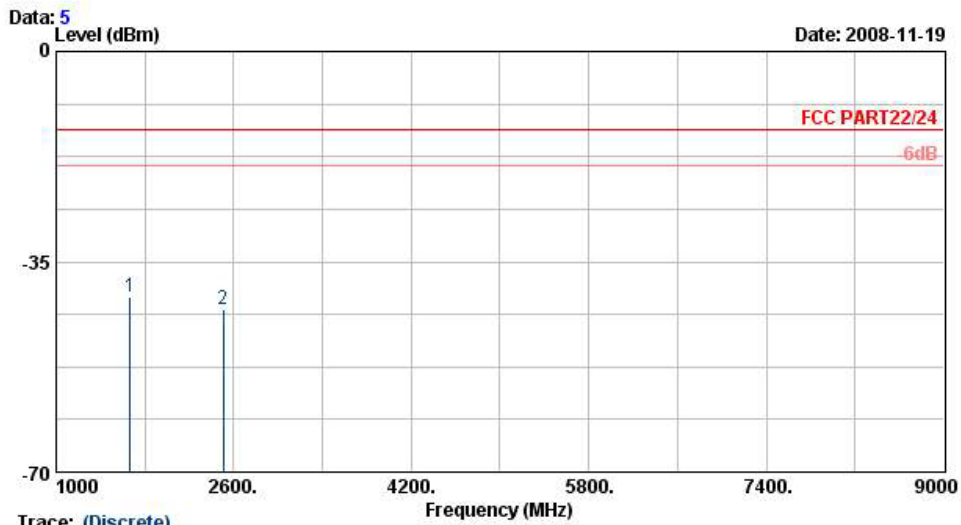


Site : 03CH07-HY
Condition : HF-EIRP(080306) HORIZONTAL
Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-40.75	-13	-27.75	-48.62	-39.76	3.39	4.55	H	Pass
2509	-42.96	-13	-29.96	-50.9	-43.02	3.71	5.92	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

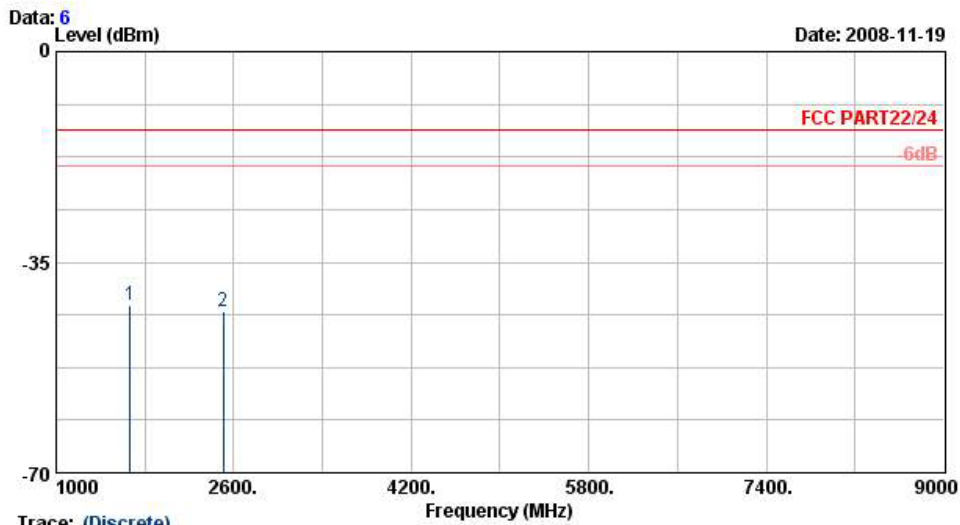


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-42.10	-13	-29.10	-51.77	-40.72	3.39	4.16	V	Pass
2509	-43.28	-13	-30.28	-53.98	-43.14	3.71	5.72	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

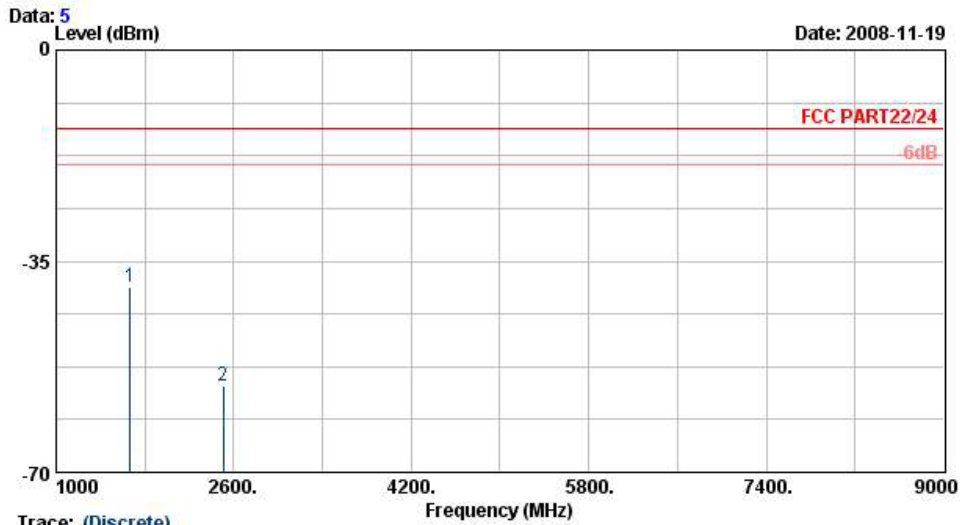


Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-39.18	-13	-26.18	-47.31	-38.19	3.39	4.55	H	Pass
2509	-55.75	-13	-42.75	-61.49	-55.81	3.71	5.92	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

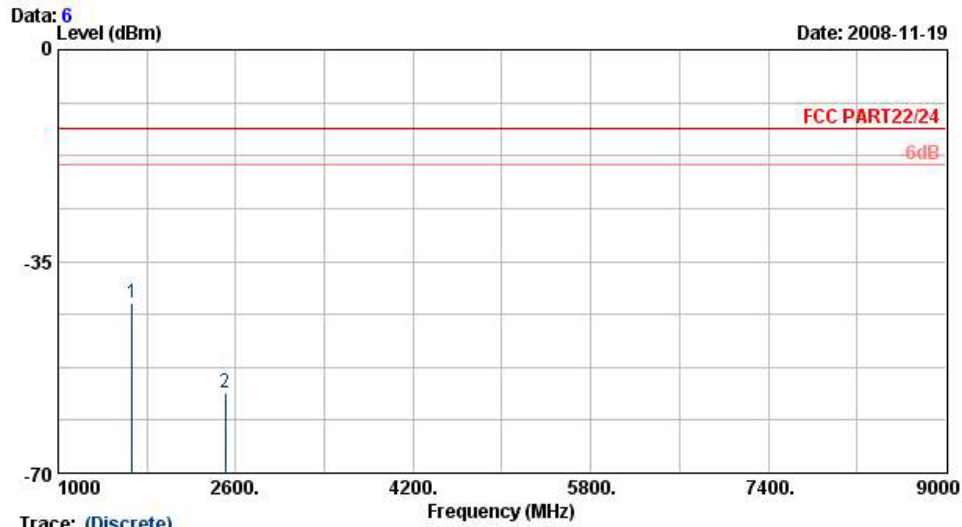


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-41.89	-13	-28.89	-51.56	-40.51	3.39	4.16	V	Pass
2509	-56.84	-13	-43.84	-63.9	-56.7	3.71	5.72	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

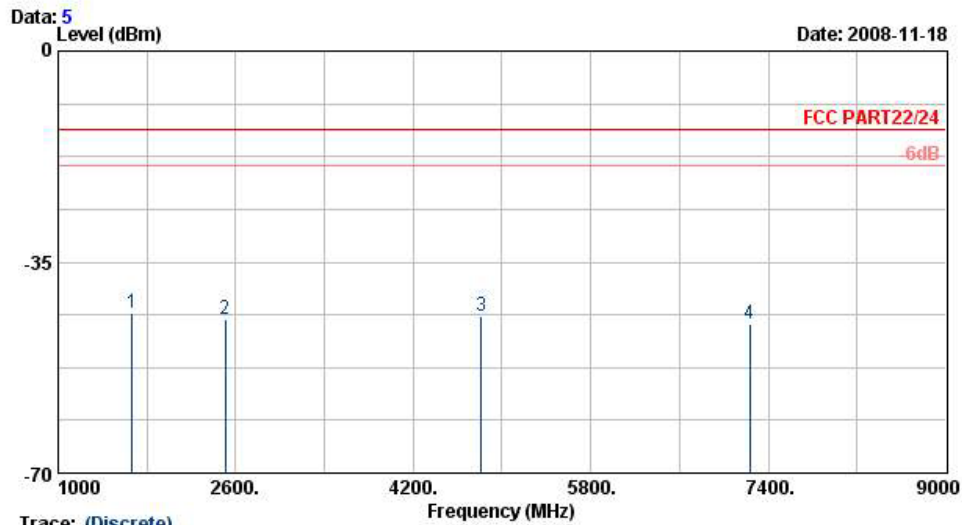


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-43.58	-13	-30.58	-51.07	-42.59	3.39	4.55	H	Pass
2509	-44.62	-13	-31.62	-52.14	-44.68	3.71	5.92	H	Pass
4815	-44.10	-13	-31.10	-57.52	-47.52	2.71	8.28	H	Pass
7235	-45.31	-13	-32.31	-62.22	-46.95	5.87	9.66	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GPRS Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

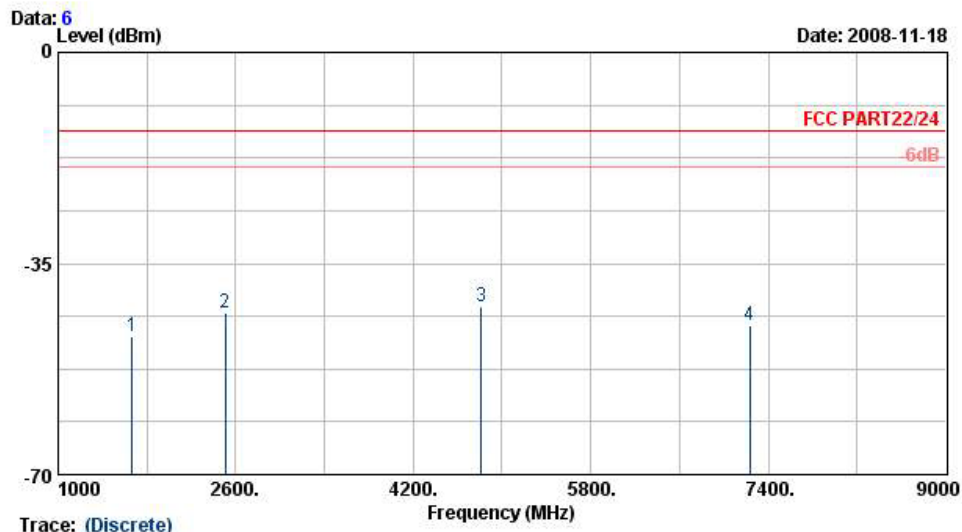


Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-47.21	-13	-34.21	-52.02	-45.83	3.39	4.16	V	Pass
2509	-43.17	-13	-30.17	-53.87	-43.03	3.71	5.72	V	Pass
4815	-42.08	-13	-29.08	-57.16	-46.14	2.71	8.92	V	Pass
7235	-45.23	-13	-32.23	-62.16	-47.95	5.87	10.74	V	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

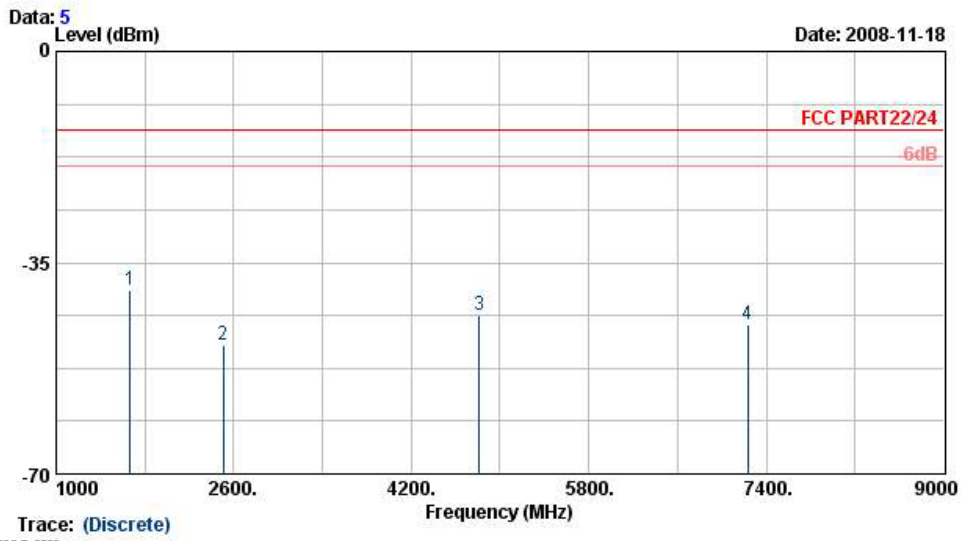


Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-39.64	-13	-26.64	-47.72	-38.65	3.39	4.55	H	Pass
2509	-48.68	-13	-35.68	-55.42	-48.74	3.71	5.92	H	Pass
4815	-43.59	-13	-30.59	-57.33	-47.01	2.71	8.28	H	Pass
7235	-45.18	-13	-32.18	-62.05	-46.82	5.87	9.66	H	Pass



Band :	GSM850	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GPRS Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

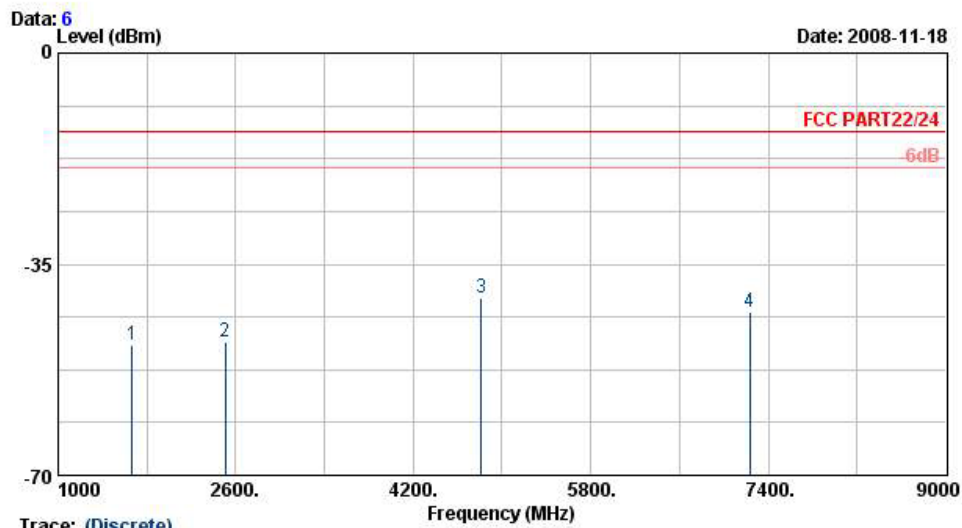


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-48.31	-13	-35.31	-53.08	-46.93	3.39	4.16	V	Pass
2509	-47.97	-13	-34.97	-57.69	-47.83	3.71	5.72	V	Pass
4815	-40.63	-13	-27.63	-56.4	-44.69	2.71	8.92	V	Pass
7235	-43.06	-13	-30.06	-60.59	-45.78	5.87	10.74	V	Pass




Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

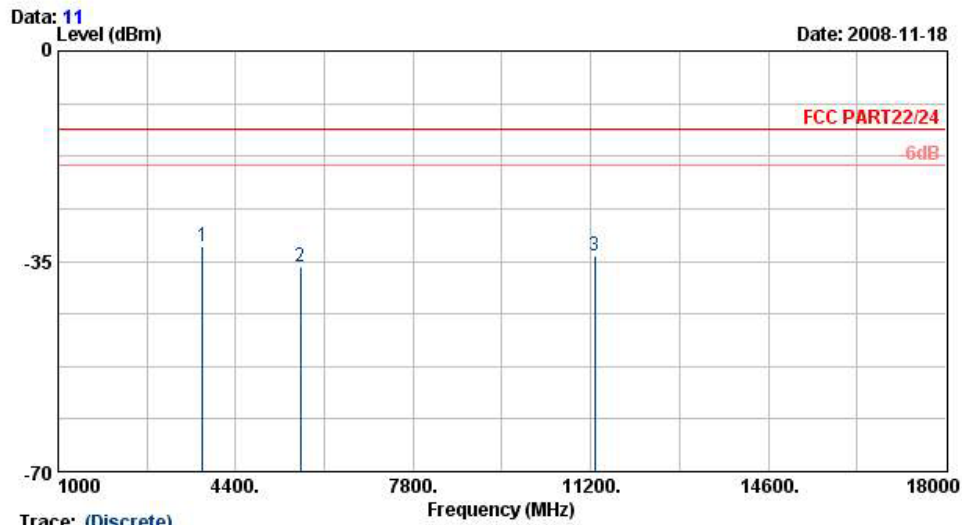

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-32.65	-13	-19.65	-48.22	-36.02	4.03	7.40	H	Pass
5636	-35.90	-13	-22.90	-57.36	-40.84	3.87	8.81	H	Pass
11280	-34.08	-13	-21.08	-65.72	-36.36	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

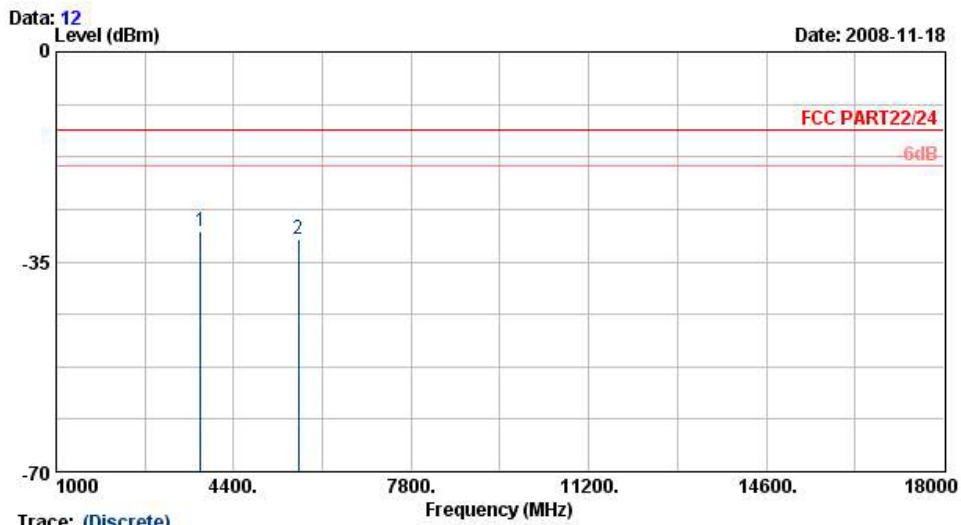


Trace: (Discrete)
Site : 03CH07-HY
Condition : HF-EIRP(080306) VERTICAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-29.94	-13	-16.94	-48.71	-33.82	4.03	7.91	V	Pass
5640	-31.31	-13	-18.31	-54.31	-37.21	3.87	9.77	V	Pass




Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

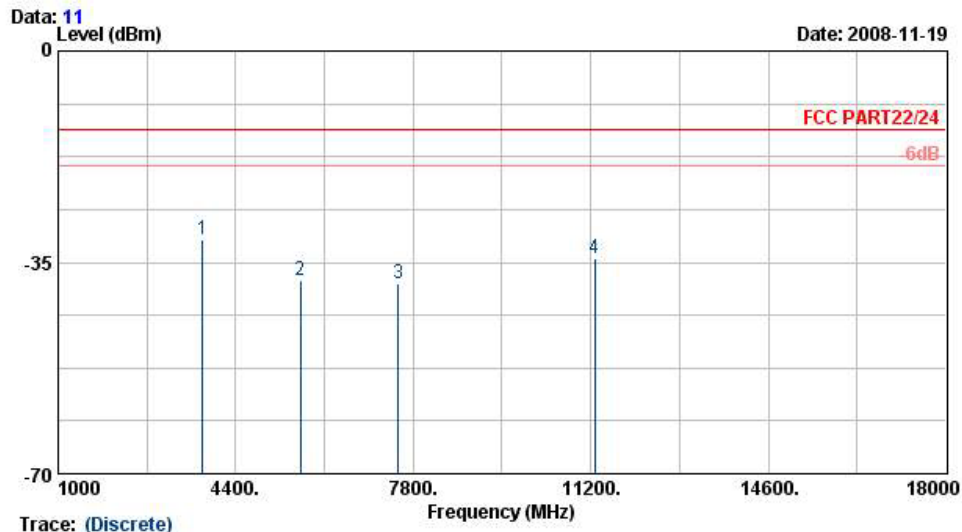

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-31.24	-13	-18.24	-47.07	-34.61	4.03	7.40	H	Pass
5636	-37.91	-13	-24.91	-58.99	-42.85	3.87	8.81	H	Pass
7520	-38.61	-13	-25.61	-61.92	-42.49	5.83	9.71	H	Pass
11280	-34.36	-13	-21.36	-66	-36.64	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + BT Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

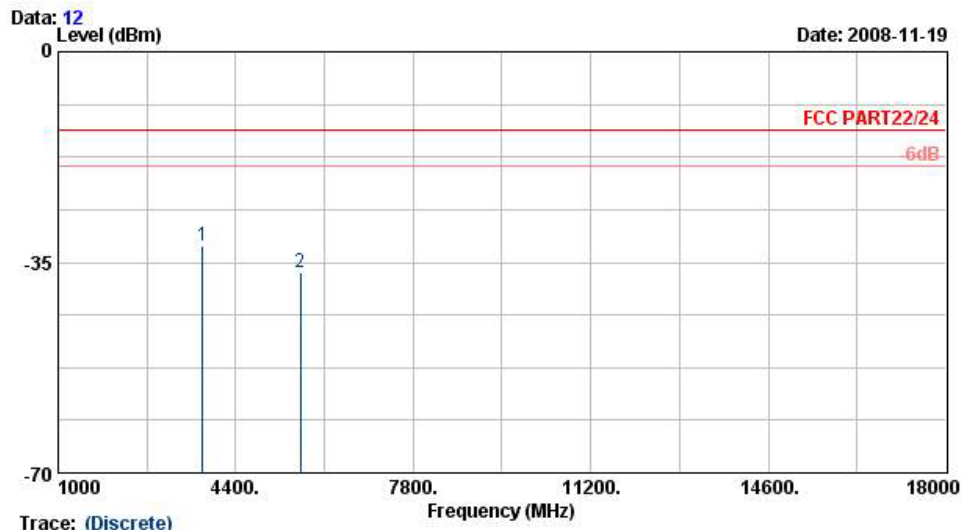


Site : 03CH07-HY
Condition : HF-EIRP(080306) VERTICAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-32.33	-13	-19.33	-50.81	-36.21	4.03	7.91	V	Pass
5636	-36.77	-13	-23.77	-59.07	-42.67	3.87	9.77	V	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

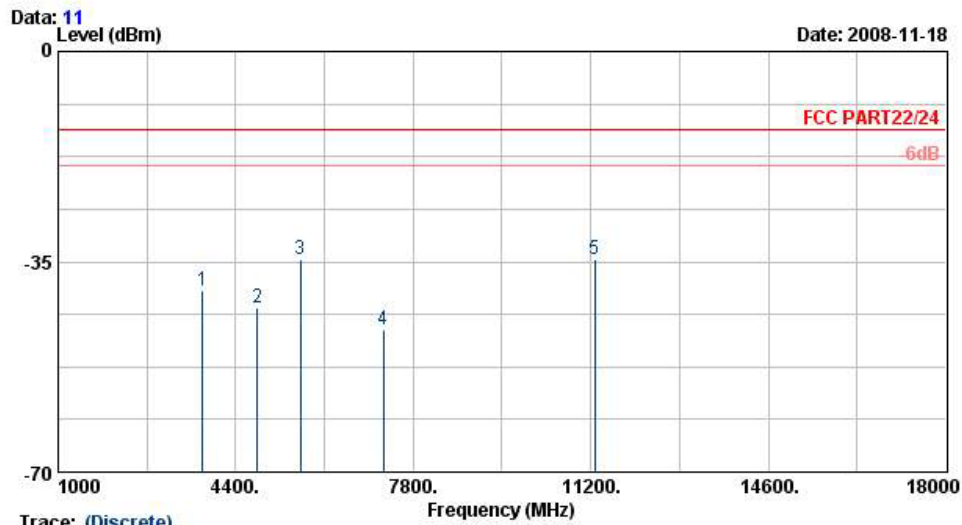


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : HF-EIRP(080306) HORIZONTAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-39.88	-13	-26.88	-54.99	-43.25	4.03	7.40	H	Pass
4820	-42.59	-13	-29.59	-57.17	-46.85	3.94	8.20	H	Pass
5636	-34.64	-13	-21.64	-56.33	-39.58	3.87	8.81	H	Pass
7232	-46.34	-13	-33.34	-65.14	-50.38	5.53	9.57	H	Pass
11280	-34.57	-13	-21.57	-66.06	-36.85	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 1D Scanner + GSM Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

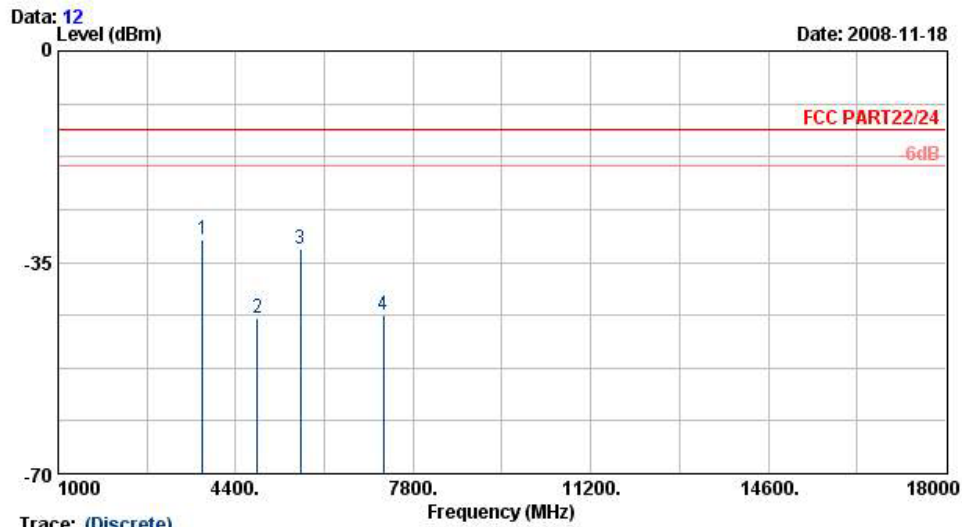


Site : 03CH07-HY
Condition : HF-EIRP(080306) VERTICAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-31.11	-13	-18.11	-49.72	-34.99	4.03	7.91	V	Pass
4820	-44.33	-13	-31.33	-59.43	-49.35	3.94	8.96	V	Pass
5636	-32.77	-13	-19.77	-55.73	-38.67	3.87	9.77	V	Pass
7232	-43.74	-13	-30.74	-63.07	-48.86	5.53	10.65	V	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

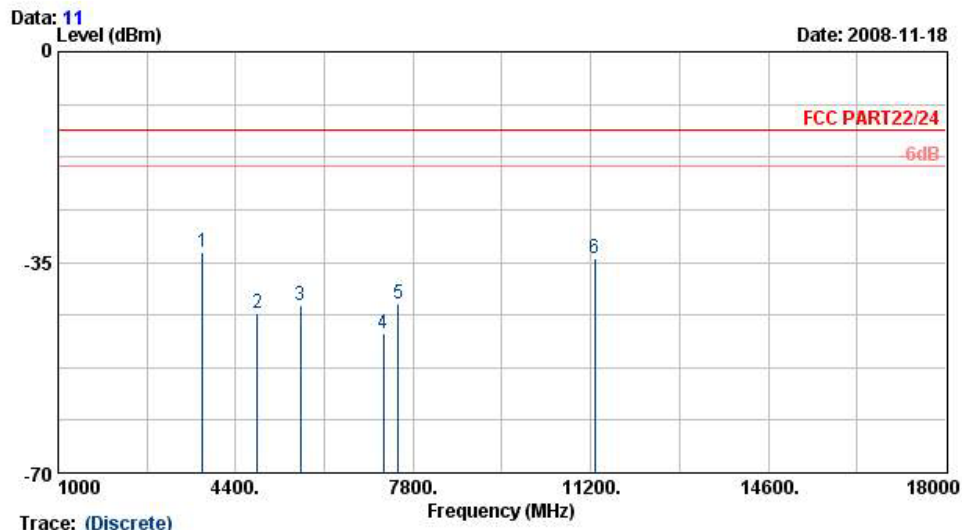


Site : 03CH07-HY
Condition : HF-EIRP(080306) HORIZONTAL
Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-33.28	-13	-20.28	-48.85	-36.65	4.03	7.40	H	Pass
4820	-43.45	-13	-30.45	-57.71	-47.71	3.94	8.20	H	Pass
5636	-42.03	-13	-29.03	-62.11	-46.97	3.87	8.81	H	Pass
7232	-46.79	-13	-33.79	-65.59	-50.83	5.53	9.57	H	Pass
7520	-41.79	-13	-28.79	-63.41	-45.67	5.83	9.71	H	Pass
11280	-34.39	-13	-21.39	-66.03	-36.67	8.48	10.76	H	Pass



Band :	GSM1900	Temperature :	25~27°C
Test Mode :	Sample 2D Scanner + GSM Link + WLAN Link + Battery 2	Relative Humidity :	42~44%
Test Engineer :	Kay Wu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

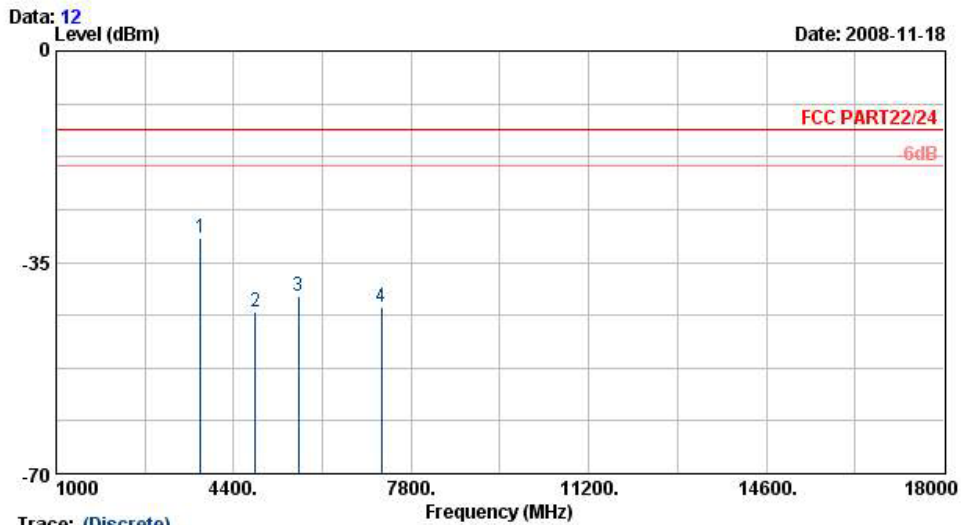

Site : 03CH07-HY
 Condition : HF-EIRP(080306) VERTICAL
 Model : 802811

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-30.98	-13	-17.98	-49.59	-34.86	4.03	7.91	V	Pass
4820	-43.14	-13	-30.14	-58.94	-48.16	3.94	8.96	V	Pass
5636	-40.66	-13	-27.66	-61.83	-46.56	3.87	9.77	V	Pass
7232	-42.47	-13	-29.47	-62.07	-47.59	5.53	10.65	V	Pass

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.6.2 Measuring Instruments

See list of measuring instruments of this test report.


3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

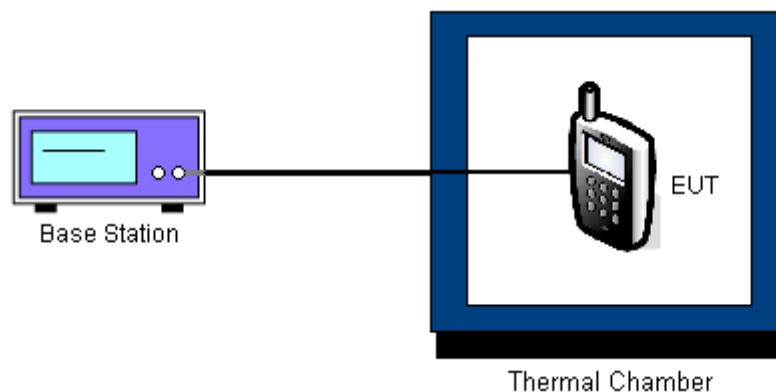



3.6.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS		EDGE		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-16	-0.02	-16	-0.02	PASS
-20	-30	-0.04	-8	-0.01	
-10	-17	-0.02	-15	-0.02	
0	-24	-0.03	16	0.02	
10	-9	-0.01	-23	-0.03	
20	15	0.02	14	0.02	
30	-21	-0.02	-14	-0.02	
40	-20	-0.02	-29	-0.03	
50	-15	-0.02	14	0.02	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	22	0.01	25	0.01	PASS
-20	47	0.02	-12	-0.01	
-10	31	0.02	-18	-0.01	
0	43	0.02	12	0.01	
10	-22	-0.01	33	0.02	
20	10	0.01	-25	-0.01	
30	-19	-0.01	-26	-0.01	
40	27	0.01	31	0.02	
50	32	0.02	24	0.01	

3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS	3.7	-20	-0.02	2.5	PASS
		BEP	18	0.02		
		4.2	22	0.03		
	EDGE	3.7	15	0.02		
		BEP	-15	-0.02		
		4.2	20	0.02		
GSM 1900 CH661	GSM	3.7	-34	-0.02		
		BEP	-24	-0.01		
		4.2	21	0.01		
	EDGE	3.7	29	0.02		
		BEP	-17	-0.01		
		4.2	-13	-0.01		

Remark:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.



4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Base Station	R&S	CMU200	105934	NA	Nov. 08, 2008	Nov. 07, 2009	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9KHz~40GHz	Jun. 26, 2008	Jun. 25, 2009	Conducted (TH02-HY)
Thermal Chamber	TEN BILLION	TTH-D35P	TBN-930701	N/A	Aug. 01, 2008	Jul. 31, 2009	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz~1GHz	Nov. 20, 2008	Nov. 19, 2009	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9kHz~30GHz	Dec. 05, 2007	Dec. 04, 2008	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1G~18GHz	Aug. 13, 2008	Aug. 12, 2009	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G~26.5GHz	Nov. 11, 2008	Nov. 10, 2009	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10~1000MHz. 32dB.GAIN	Mar. 31, 2008	Mar. 30, 2009	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	66584	1G~18GHz	Aug. 06, 2008	Aug. 05, 2009	Radiation (03CH07-HY)
GSM Base Station	R&S	CMU200	116456	NA	Jul. 05, 2008	Jul. 04, 2009	Radiation (03CH07-HY)
BT Base Station	Anritsu	MT8852B	6K00005722	N/A	Oct. 23, 2007	Oct. 22, 2009	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
Combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)


Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation


Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix Accreditation Program for Designated Testing Laboratory
Specific Accreditation Program	: for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.



Appendix A. Photographs of EUT

Please refer to Sporton report number EP8O2811 as below.