



SAR TEST REPORT

(Mobile Phone)

REPORT NO.: SA981022L04-3

MODEL NO.: MC75A8

RECEIVED: Oct. 22, 2009

TESTED: Apr. 20 ~ Apr. 25, 2010

ISSUED: Jun. 17, 2010

APPLICANT: Symbol Technologies, Inc.

ADDRESS: One Motorola Plaza, Holtsville, NY-11742-1300,
U.S.A.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,
Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 35 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION.....	3
2.	GENERAL INFORMATION.....	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	SAR MEASUREMENT CONDITIONS FOR CDMA.....	6
2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
2.4	GENERAL INFORMATION OF THE SAR SYSTEM.....	10
2.5	TEST EQUIPMENT	13
2.6	GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION.....	14
3.	DESCRIPTION OF SUPPORT UNITS	17
4.	DESCRIPTION OF TEST POSITION	18
4.1	DESCRIPTION OF TEST POSITION	18
4.1.1	TOUCH/CHEEK TEST POSITION	19
4.1.2	TILT TEST POSITION	20
4.1.3	BODY-WORN CONFIGURATION	20
5.	RECIPES FOR TISSUE SIMULATING LIQUIDS	21
6.	SYSTEM VALIDATION	26
6.1	TEST PROCEDURE.....	26
6.2	VALIDATION RESULTS.....	28
6.3	SYSTEM VALIDATION UNCERTAINTIES	29
7.	TEST RESULTS	30
7.1	TEST PROCEDURES	30
7.2	MEASURED SAR RESULTS.....	32
7.3	SAR LIMITS.....	34
8.	INFORMATION ON THE TESTING LABORATORIES	35
	APPENDIX A: TEST DATA	
	APPENDIX B: ADT SAR MEASUREMENT SYSTEM	
	APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
	APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION	
	APPENDIX E: TEST CONFIGURATIONS	



A D T

1. CERTIFICATION

PRODUCT: EDA (Enterprise Digital Assistant)

MODEL: MC75A8

BRAND: Symbol

APPLICANT: Symbol Technologies, Inc.

TESTED: Apr. 20 ~ Apr. 25, 2010

TEST SAMPLE: ENGINEERING SAMPLE


STANDARDS: **FCC Part 2 (Section 2.1093)**

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

The above equipment (model: MC75A8) have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Jun. 17, 2010
Joanna Wang / Senior Specialist

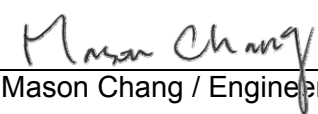TECHNICAL ACCEPTANCE :  , **DATE** : Jun. 17, 2010
Responsible for RF Mason Chang / Engineer

APPROVED BY :  , **DATE** : Jun. 17, 2010
Gary Chang / Assistant Manager

REVISED VERSION	REVISED DATE	DESCRIPTION
Ver. 1	May 11, 2010	1. Reduce output power of WLAN. 2. TX diversity function is disabled by software. Only main antenna can transmit.
Ver. 2	Jun. 14, 2010	Modified the general information
Ver. 3	Jun. 17, 2010	Modified typing error.



A D T

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	EDA (Enterprise Digital Assistant)	
MODEL NO.	MC75A8	
FCC ID	H9PMC75A8	
POWER SUPPLY	3.7Vdc (Li-Ion battery) 5.4Vdc (Adapter)	
CLASSIFICATION	Portable device, production unit	
MODULATION TYPE	GMSK / 8PSK / BPSK	
OPERATING FREQUENCY	824.7MHz ~ 848.3MHz 1851.25MHz ~ 1908.75MHz	
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	Refer to item 2.2 power table	
MAXIMUM SAR (1g)	Head	Body
	1.2W/kg	0.2W/kg
ANTENNA TYPE	Monopole antenna	
MAX. ANTENNA GAIN	850MHz: -0.67dBi	1900MHz: 1.5dBi
DATA CABLE	Refer to NOTE as below	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Battery	

NOTE:

- The EUT is an EDA (Enterprise Digital Assistant). The test data are separated into following test reports:

	REFERENCE REPORT
SAR test report-247 2.4G WLAN	SA981022L04
SAR test report-247 5G WLAN	
SAR test report-407 5G WLAN	SA981022L04-1
SAR test report-247 BLUETOOTH	SA981022L04-2
SAR test report-CDMA850	SA981022L04-3
SAR test report-CDMA1900	
SAR collocated report-WLAN 802.11a + MOBILE	SA981022L04-4
SAR supplement report-preliminary and worst case finding supplement data	SA981022L04-5

- The communicated functions of EUT listed as below:

		850MHz	1900MHz	With WLAN 802.11a/b/g + BT 2.0 with EDR + GPS
3G	CDMA 1X RTT EV-OD Rev 0 EV-OD Rev A (Power class 3)	√	√	



A D T

3. The models identified as below are identical to each other except of the following options:

- Keypad: Numeric / QWERTY
- Barcode reader: 1D laser scanner / BB Imager

BRAND	MODEL	DESCRIPTION
Symbol	MC75A8	EVDO 1D Numeric
Symbol	MC75A8	EVDO 1D QWERTY
Symbol	MC75A8	EVDO BB Numeric
Symbol	MC75A8	EVDO BB QWERTY

4. The EUT uses the following Li-ion batteries:

BATTERY 1 (1.5X)	
BRAND:	MOTOROLA
PART NUMBER:	82-71364-05 Rev D
RATING:	3.7Vdc, 3600mAh, 13.3Wh

BATTERY 2 (2.5X)	
BRAND:	MOTOROLA
PART NUMBER:	82-71364-06 Rev C
RATING:	3.7Vdc, 4800mAh, 17.7Wh

*The applicant defined the normal working voltage of the battery is from 3.7Vdc to 4.2Vdc.

*The EUT have been pre-tested and found "BB / QWERTY + 1.5X battery" was the worst case configuration for final test.

5. The following accessories are optional to the DUT.

PRODUCT	BRAND	MODEL	DESCRIPTION
RS232 charging cable	Motorola	25-102776-01R	1.2m non-shielded cable with one core
USB charging cable	Motorola	25-102775-01R	1.5m shielded cable with one core
Headset	Motorola	50-11300-050R	VR10 headset 0.8m non-shielded cable with one core
Power Supply Adaptor	Motorola	EADP-16BB A	I/P: 100-240Vac, 50-60Hz, 0.4A O/P: 5.4Vdc, 3A 1.8m non-shielded cable without core
Fabric holster	Motorola	SG-MC7521215-01R	Contain metal
Ridged holster	Motorola	SG-MC7011110-02R	Contain metal

6. Hardware version: EVT1A.

7. Software version: BSP_21.03.

8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 SAR MEASUREMENT CONDITIONS FOR CDMA

The following procedures were followed according to FCC “SAR Measurement Procedures 3G Devices”, Oct. 2007.

➤ Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. Results for at least steps 3, 4 and 10 of the power measurement procedures should be tabulated in the SAR report. Steps 3 and 4 should be measured using SO55 with power control bits in “All Up” condition. TDSO / SO32 may be used instead of SO55 for step 4. Step 10 should be measured using TDSO / SO32 with power control bits in the “Bits Hold” condition (i.e. alternative Up/Down Bits). All power measurements defined in C.S0011/TIA-98-E that are inapplicable to the DUT or cannot be measured due to technical or equipment limitations should be clearly identified in the test report.6

➤ Head SAR Measurement

SAR for head exposure configurations is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

➤ Body SAR Measurements

SAR for body exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCHn) is not required when the maximum average output of each RF channel is less than ¼ dB higher than that measured with FCH only. Otherwise, SAR is measured on the maximum output channel (FCH + SCHn) with FCH at full rate and SCH0 enabled at 9600 bps using the exposure configuration that results in the highest SAR for that channel with FCH only.

When multiple code channels are enabled, the DUT output may shift by more than 0.5 dB and lead to higher SAR drifts and SCH dropouts. Body SAR in RC1 is not required when the maximum average output of each channel is less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR for that channel in RC3.



➤ **Handsets with Ev-Do**

For handsets with Ev-Do capabilities, when the maximum average output of each channel in Rev. 0 is less than ¼ dB higher than that measured in RC3 (1x RTT), body SAR for Ev-Do is not required. Otherwise, SAR for Rev. 0 is measured on the maximum output channel at **153.6 kbps** using the body exposure configuration that results in the highest SAR for that channel in RC3. SAR for Rev. A is not required when the maximum average output of each channel is less than that measured in Rev. 0 or less than ¼ dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel for Rev. A using a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations. A Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots should be configured in the downlink for both Rev. 0 and Rev. A.

Conducted power of CDMA at 850MHz band

CDMA 2000 CONDUCTED POWER													
CHAN.	FREQ. (MHz)	CDMA 2000 RC	RAW VALUE (dBm)					CORR. FACTOR (dB)	OUTPUT POWER (dBm)				
			SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+ SCH)	SO3		SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+ SCH)	SO3
1013	824.70	RC1	-0.7	-0.7	-	-	-0.7	24.8	24.1	24.1	-	-	24.1
		RC3	-0.7	-0.6	-0.7	-0.7	-0.7	24.8	24.1	24.2	24.1	24.1	24.1
384	836.52	RC1	-1.1	-1.1	-	-	-1.1	24.8	23.7	23.7	-	-	23.7
		RC3	-1.1	-0.9	-1.0	-1.1	-1.1	24.8	23.7	23.9	23.8	23.7	23.7
777	848.31	RC1	-0.9	-0.8	-	-	-0.9	24.8	23.9	24.0	-	-	23.9
		RC3	-0.8	-0.7	-0.8	-0.9	-0.8	24.8	24.0	24.1	24.0	23.9	24.0

Conducted power of CDMA at 1900MHz band

CDMA 2000 CONDUCTED POWER													
CHAN.	FREQ. (MHz)	CDMA 2000 RC	RAW VALUE (dBm)					CORR. FACTOR (dB)	OUTPUT POWER (dBm)				
			SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+ SCH)	SO3		SO2	SO55	TDSO SO32 (FCH)	TDSO SO32 (FCH+ SCH)	SO3
25	1851.25	RC1	-1.4	-1.3	-	-	-1.4	25.0	23.6	23.7	-	-	23.6
		RC3	-1.4	-1.2	-1.3	-1.4	-1.4	25.0	23.6	23.8	23.7	23.6	23.6
600	1880.00	RC1	-1.1	-1.2	-	-	-1.1	25.0	23.9	23.8	-	-	23.9
		RC3	-1.1	-1.1	-1.1	-1.1	-1.1	25.0	23.9	23.9	23.9	23.9	23.9
1175	1908.75	RC1	-1.2	-1.2	-	-	-1.2	25.0	23.8	23.8	-	-	23.8
		RC3	-1.3	-1.1	-1.1	-1.1	-1.1	25.0	23.7	23.9	23.9	23.9	23.9



A D T

Conducted power of EVDO-Release 0 at 850MHz band

FTAP rate	RTAP Rate	Channel	Frequency (MHz)	Conducted power (dBm)
307.2k	153.6 kbps	1013	824.70	24.1
		384	836.52	23.87
		777	848.31	23.9

Conducted power of EVDO-Release 0 at 1900MHz band

FTAP rate	RTAP Rate	Channel	Frequency (MHz)	Conducted power (dBm)
307.2k	153.6 kbps	25	1851.25	23.7
		600	1880.00	24.0
		1175	1908.75	23.9

Conducted power of EVDO-Release A at 850MHz band

FETAP-Traffic Format	RETAP-Data Payload Size	Channel	Frequency (MHz)	Conducted power (dBm)
307.2k, QPSK/ACK channel is transmitted at all the slots	4096	1013	824.70	23.9
		384	836.52	23.7
		777	848.31	23.6

Conducted power of EVDO-Release A at 1900MHz band

FETAP-Traffic Format	RETAP-Data Payload Size	Channel	Frequency (MHz)	Conducted power (dBm)
307.2k, QPSK/ACK channel is transmitted at all the slots	4096	25	1851.25	23.6
		600	1880.00	23.9
		1175	1908.75	23.3



A D T

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC 47 CFR Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01- 01)

RSS-102

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.



A D T

2.4 GENERAL INFORMATION OF THE SAR SYSTEM

DASY5 (software 5.2 Build 157) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV3 ISOTROPIC E-FIELD PROBE

CONSTRUCTION	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
FREQUENCY	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
DIRECTIVITY	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
DYNAMIC RANGE	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
DIMENSIONS	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
APPLICATION	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



A D T

TWIN SAM V4.0

CONSTRUCTION The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

SHELL THICKNESS 2 ± 0.2 mm

FILLING VOLUME Approx. 25 liters

DIMENSIONS Height: 810 mm; Length: 1000 mm; Width: 500 mm

SYSTEM VALIDATION KITS:

CONSTRUCTION Symmetrical dipole with 1/4 balun
Enables measurement of feedpoint impedance with NWA
Matched for use near flat phantoms filled with brain simulating solutions
Includes distance holder and tripod adaptor

CALIBRATION Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions

FREQUENCY 835, 1900MHz

RETURN LOSS > 20 dB at specified validation position

POWER CAPABILITY > 100 W ($f < 1\text{GHz}$); > 40 W ($f > 1\text{GHz}$)

OPTIONS Dipoles for other frequencies or solutions and other calibration conditions upon request



A D T

DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION The device holder for the GSM900/DCS1800/PCS1900 GSM/GPRS/CDMA Mobile Phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



A D T

2.5 TEST EQUIPMENT

FOR SAR MEASUREMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1485	NA	NA
2	Signal Generator	Anritsu	68247B	984703	May 21, 2009	May 20, 2010
3	E-Field Probe	S & P	EX3DV3	3504	Jan. 26, 2010	Jan. 25, 2011
4	DAE	S & P	DAE	510	Dec. 16, 2009	Dec. 15, 2010
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D835V2	4d021	May 25, 2009	May 24, 2010
			D1900V2	5d036	Feb. 23, 2010	Feb. 22, 2011

NOTE: Before starting the measurement, all test equipment shall be warmed up for 30min.

FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E8358A	US41480538	Dec. 03, 2009	Dec. 02, 2010
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance ($k=1$) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually $\pm 2.5\%$ and $\pm 5\%$ for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than $\pm 2.5\%$ ($k=1$). It can be substantially smaller if more accurate methods are applied.



2.6 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	σ
	- Density	ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

V _i	=compensated signal of channel i	(i = x, y, z)
U _i	=input signal of channel I	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp _i	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{Conv}F}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i $\mu\text{V}/(\text{V/m})^2$ for ($i = x, y, z$)
E-field Probes

$\text{Conv}F$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

F = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³



A D T

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.



The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

3. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	104958

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. DESCRIPTION OF TEST POSITION

4.1 DESCRIPTION OF TEST POSITION

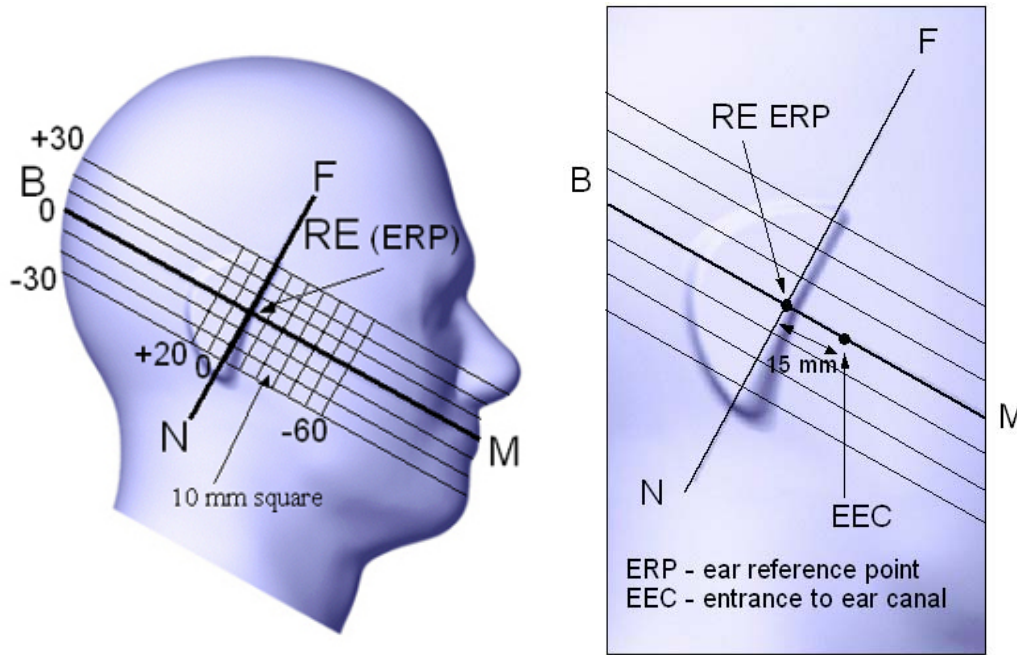


FIGURE 3.1

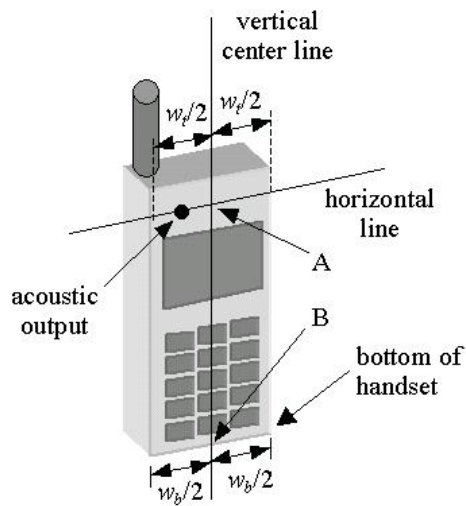


FIGURE 3.1a


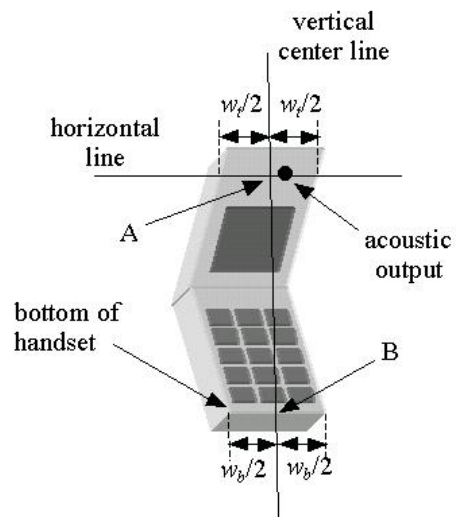


FIGURE 3.1b

4.1.1 TOUCH/CHEEK TEST POSITION


The head position in Figure 3.1, the ear reference points ERP are 15mm above entrance to ear canal along the B-M line. The line N-F (Neck-Front) is perpendicular to the B-M (Back Mouth) line. The handset device in Figure 3.1a and 3.1b, The vertical centerline pass through two points on the front side of handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A) and the midpoint of the width w_b of the bottom of the handset (point B). The vertical centerline is perpendicular to the horizontal line and pass through the center of the acoustic output. The point A touches the ERP and the vertical centerline of the handset is parallel to the B-M line. While maintaining the point A contact with the ear(ERP), rotate the handset about the line NF until any point on handset is in contact with the cheek of the phantom

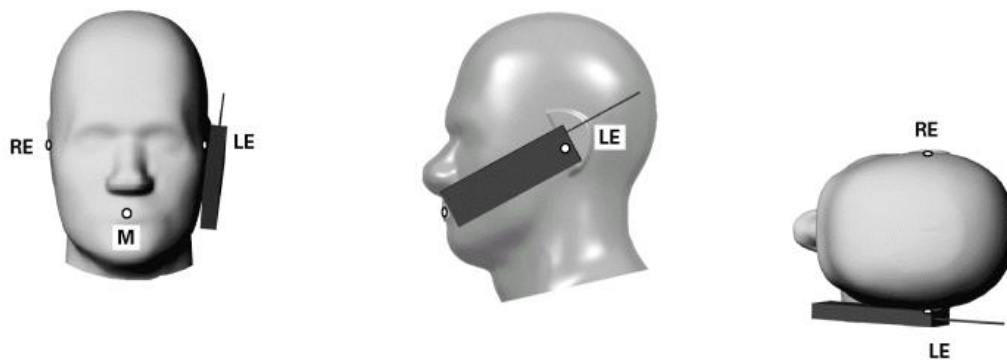

TOUCH/CHEEK POSITION FIGURE

4.1.2 TILT TEST POSITION

Adjust the device in the cheek position. While maintaining a point of the handset contact in the ear, move the bottom of the handset away from the mouth by an angle of 15 degrees.

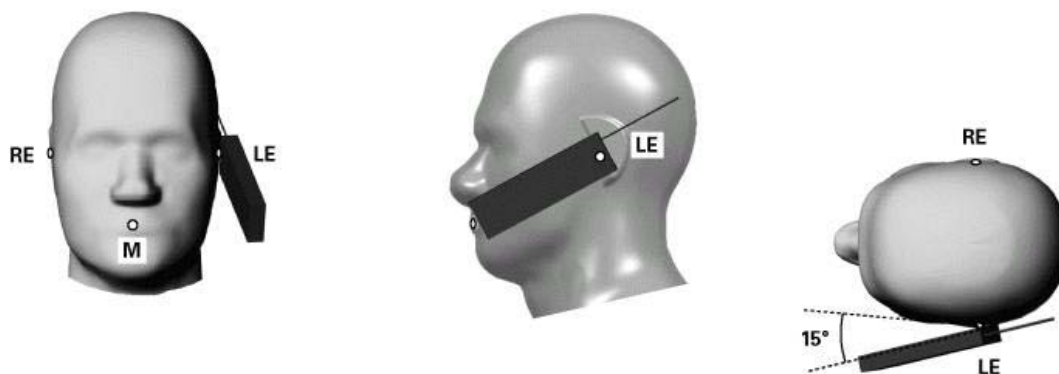

TILT POSITION FIGURE

4.1.3 BODY-WORN CONFIGURATION

The handset device attached the belt clip or the holster. The keypad face of the handset is against with the bottom of the flat phantom face and the bottom of the keypad face contact to the bottom of the flat phantom.

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only accessory that dictates the closest spacing to the body must be tested.



A D T

5. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 liters of tissue simulation liquid.

The following ingredients are used :

- **WATER-** Deionized water (pure H₂O), resistivity ≈ 16 M - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20_C),
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventtol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Dielectric Parameters at 22°C	f = 835MHz $\epsilon = 41.5 \pm 5\%$ $\sigma = 0.9 \pm 5\%$ S/m	f = 835MHz $\epsilon = 55.2 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ S/m



A D T

THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22°C	f= 1900MHz $\epsilon = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\% \text{ S/m}$	f= 1900MHz $\epsilon = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\% \text{ S/m}$



A D T

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30 min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ($\pm 1^\circ$).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with $>8\text{mm}$ thickness $\epsilon' = 10.0$, $\epsilon'' = 0.0$). If measured parameters do not fit within tolerance, repeat calibration (± 0.2 for ϵ' : ± 0.1 for ϵ'').
7. Conductivity can be calculated from ϵ'' by $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$.
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample ($\sim 50\text{ml}$) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY5 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button.

Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).



A D T

FOR CDMA850 BAND SIMULATING LIQUID

LIQUID TYPE		HSL-835		
SIMULATING LIQUID TEMP.		21.2		
TEST DATE		Apr. 20, 2010		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
824.70	Permittivity (ϵ)	41.60	42.50	2.16
835.00		41.50	42.40	2.17
836.52		41.50	42.30	1.93
848.31		41.50	42.20	1.69
824.70	Conductivity (σ) S/m	0.90	0.91	1.11
835.00		0.90	0.92	2.22
836.52		0.90	0.92	2.22
848.31		0.91	0.94	3.30
Dielectric Parameters Required at 22°C		f= 835MHz $\epsilon = 41.5 \pm 5\%$ $\sigma = 0.90 \pm 5\%$ S/m		

LIQUID TYPE		MSL-835		
SIMULATING LIQUID TEMP.		22.1		
TEST DATE		Apr. 25, 2010		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
835.00	Permittivity (ϵ)	55.20	54.30	-1.63
836.52		55.20	54.30	-1.63
835.00	Conductivity (σ) S/m	0.97	0.98	1.03
836.52		0.97	0.98	1.03
Dielectric Parameters Required at 22°C		f= 835MHz $\epsilon = 55.2 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ S/m		



A D T

FOR CDMA1900 BAND SIMULATING LIQUID

LIQUID TYPE		HSL-1900		
SIMULATING LIQUID TEMP.		22.0		
TEST DATE		Apr. 21, 2010		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
1851.25	Permittivity (ϵ)	40.00	41.00	2.50
1880.00		40.00	40.90	2.25
1900.00		40.00	40.80	2.00
1908.75		40.00	40.70	1.75
1851.25	Conductivity (σ) S/m	1.40	1.37	-2.14
1880.00		1.40	1.40	0.00
1900.00		1.40	1.42	1.43
1908.75		1.40	1.43	2.14
Dielectric Parameters Required at 22°C		f= 1900MHz $\epsilon= 40.0 \pm 5\%$ $\sigma= 1.40 \pm 5\%$ S/m		

LIQUID TYPE		MSL-1900		
SIMULATING LIQUID TEMP.		22.0		
TEST DATE		Apr. 25, 2010		
TESTED BY		Sam Onn		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)
1880.00	Permittivity (ϵ)	53.30	53.80	0.94
1900.00		53.30	53.80	0.94
1880.00	Conductivity (σ) S/m	1.52	1.54	1.32
1900.00		1.52	1.57	3.29
Dielectric Parameters Required at 22°C		f= 1900MHz $\epsilon= 53.3 \pm 5\%$ $\sigma= 1.52 \pm 5\%$ S/m		



A D T

6. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

6.1 TEST PROCEDURE

Before you start the system performance check, need only to tell the system with which components (probe, medium, and device) are performing the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat phantom section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for the EUT can be left in place but should be rotated away from the dipole.

1.The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ± 0.02 dB.

2.The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system performance check and stir the liquid.



A D T

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY5 system is less than ± 0.1 mm.

$$SAR_{tolerance} [\%] = 100 \times \left(\frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance $SAR_{tolerance} [\%]$ is $< 2\%$.



A D T

6.2 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
HSL 835	2.37 (1g)	2.32	-2.11	15mm	Apr. 20, 2010
HSL 1900	10.00 (1g)	10.20	2.00	10mm	Apr. 21, 2010
MSL 835	2.54 (1g)	2.39	-5.91	15mm	Apr. 25, 2010
MSL 1900	10.30 (1g)	10.20	-0.97	10mm	Apr. 25, 2010
TESTED BY	Sam Onn				

NOTE: Please see Appendix for the photo of system validation test.



6.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(V _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement System								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	0.50	Rectangular	√3	0.7	0.7	0.20	0.20	∞
Hemispherical Isotropy	2.60	Rectangular	√3	0.7	0.7	1.05	1.05	∞
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Linearity	0.60	Rectangular	√3	1	1	0.35	0.35	∞
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	∞
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Dipole Related								
Dipole Axis to Liquid Distance	2.00	Rectangular	√3	1	1	1.15	1.15	145
Input Power Drift	5.00	Rectangular	√3	1	1	2.89	2.89	∞
Phantom and Tissue parameters								
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	3.30	Normal	1	0.64	0.43	2.11	1.42	∞
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	2.25	Normal	1	0.6	0.49	1.35	1.10	∞
Combined Standard Uncertainty						8.46	8.11	
Coverage Factor for 95%						Kp=2		
Expanded Uncertainty (K=2)						16.93	16.21	

NOTE: About the system validation uncertainty assessment, please reference the section 7.

7. TEST RESULTS

7.1 TEST PROCEDURES

The EUT (EDA (Enterprise Digital Assistant)) makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY5 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 50361, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan with 15mm x 15mm grid was performed for the highest spatial SAR location. Consist of 11 x 13 points while the scan size is the 150mm x 180mm. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.



A D T

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 4.0 mm and maintained at a constant distance of ± 1.0 mm during a zoom scan to determine peak SAR locations. The distance is 4mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 9mm separation distance. The cube size is 7 x 7 x 7 points consist of 343 points and the grid space is 5mm.

The measurement time is 0.5 s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 4mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.



7.2 MEASURED SAR RESULTS

HEAD POSITION

Configuration:

Keypad: QWERTY, Barcode reader: BB Imager, 1.5x Battery

Stand-alone SAR (1g)				
HEAD	RIGHT		LEFT	
	CHEEK	TILT	CHEEK	TILT
CDMA 850				
CH 1013	-	-	-	0.936
CH 384	0.730	0.687	0.731	0.842
CH 777	-	-	-	1.010
CDMA 1900				
CH 25	-	-	1.120	0.939
CH 600	0.632	0.664	1.240	1.140
CH 1175	-	-	1.170	0.935

NOTE:

1. In this testing, the limit for General Population Spatial Peak averaged over **1g, 1.6W/kg**, is applied.
2. Please see the Appendix A for the data.
3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
4. Temperature of Liquid is 22±1°C.
5. Per DA-02-1438A1, when 1-g SAR for the middle channel is less than 0.8 W/kg, testing for the other channels is not required.
6. The EUT have been pre-tested and found "BB / QWERTY + 1.5X battery" was the worst case configuration for final test.



BODY POSITION

Configuration:

(Front)

Keypad: QWERTY, Barcode reader: BB Imager, 1.5x Battery, Ridged holster, Headset

(Bottom)

Keypad: QWERTY, Barcode reader: BB Imager, 1.5x Battery, Fabric holster, Headset

Stand-alone SAR (1g)		
EUT	BODY	
	FRONT	BOTTOM
CDMA1900		
CH 600	0.147	0.120
EVDO1900		
CH 600	0.143	0.088
CDMA850		
CH 384	0.244	0.163
EVDO850		
CH 384	0.240	0.162

NOTE:

1. In this testing, the limit for General Population Spatial Peak averaged over **1g, 1.6W/kg**, is applied.
2. Please see the Appendix A for the data.
3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
4. Temperature of Liquid is 22±1°C.
5. Per DA-02-1438A1, when 1-g SAR for the middle channel is less than 0.8 W/kg, testing for the other channels is not required.
6. The EUT have been pre-tested and found "BB / QWERTY + 1.5X battery" was the worst case configuration for final test.
7. For body position, the EUT front facing the phantom was tested with Ridged holster and the EUT bottom facing the phantom was tested with fabric holster. This is due to the facts that the correspond holster will limit the orientation of EUT when it is stored in the holster.



7.3 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / controlled Exposure Environment)
Spatial Average (whole body)	0.08	0.4
Spatial Peak (averaged over 1 g)	1.6	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

NOTE:

1. This limits accord to 47 CFR 2.1093 – Safety Limit.
2. The EUT property been complied with the partial body exposure limit under the general population environment.



A D T

8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX A: TEST DATA

Liquid Level Photo

Tissue HSL835MHz D=150mm



Tissue HSL1900MHz D=150mm



Tissue MSL835MHz D=150mm



Tissue MSL1900MHz D=150mm



Test Laboratory: Bureau Veritas ADT

M01-A8-2D-Right Head-Cheek-CDMA850-Ch384

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Touch Position - Mid Ch384/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.851 mW/g**Touch Position - Mid Ch384/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 29.8 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = **0.730** mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 0.841 mW/g

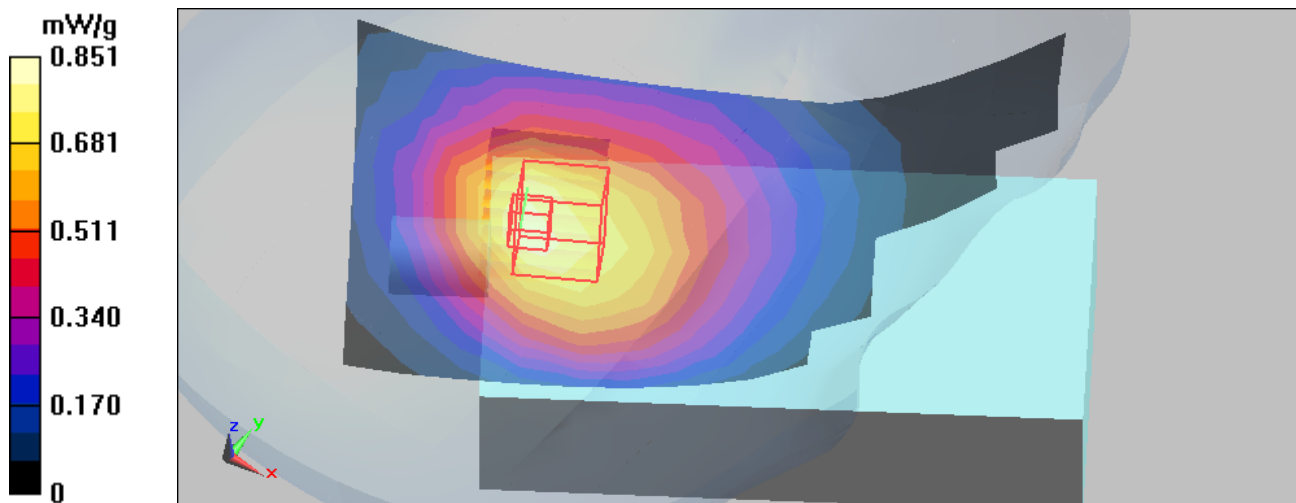

Test Laboratory: Bureau Veritas ADT

M02-A8-2D-Right Head-Tilt-CDMA850-Ch384

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Tilt Position - Mid Ch384/Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.760 mW/g


Tilt Position - Mid Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 27.1 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = **0.687 mW/g**; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.795 mW/g

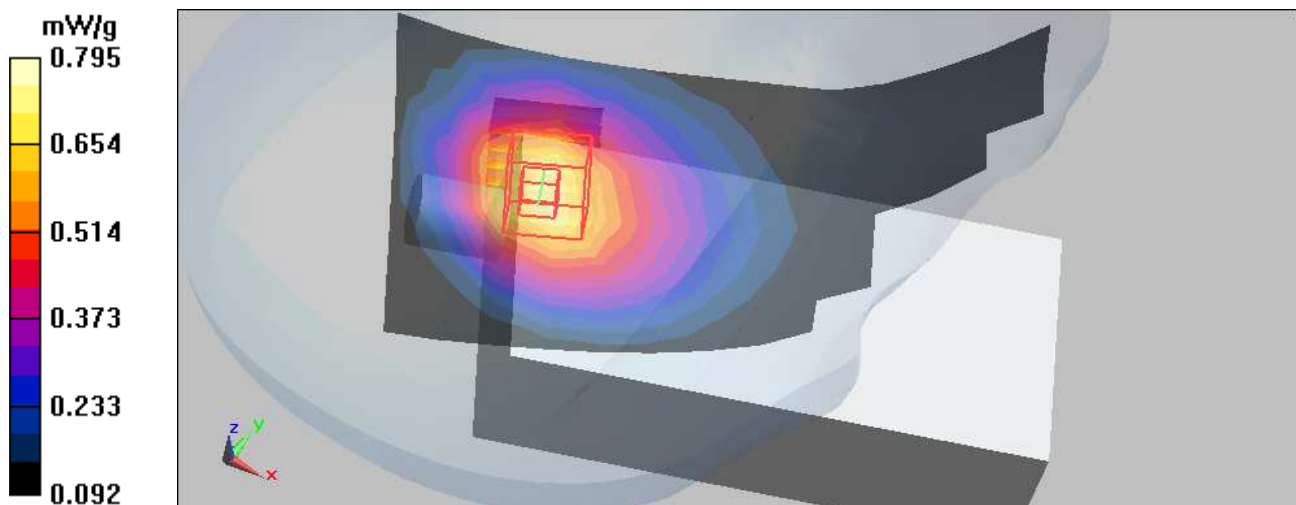

Test Laboratory: Bureau Veritas ADT

M03-A8-2D-Left Head-Cheek-CDMA850-Ch384

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Touch Position - Mid Ch384/Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.841 mW/g


Touch Position - Mid Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 25.4 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.497 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

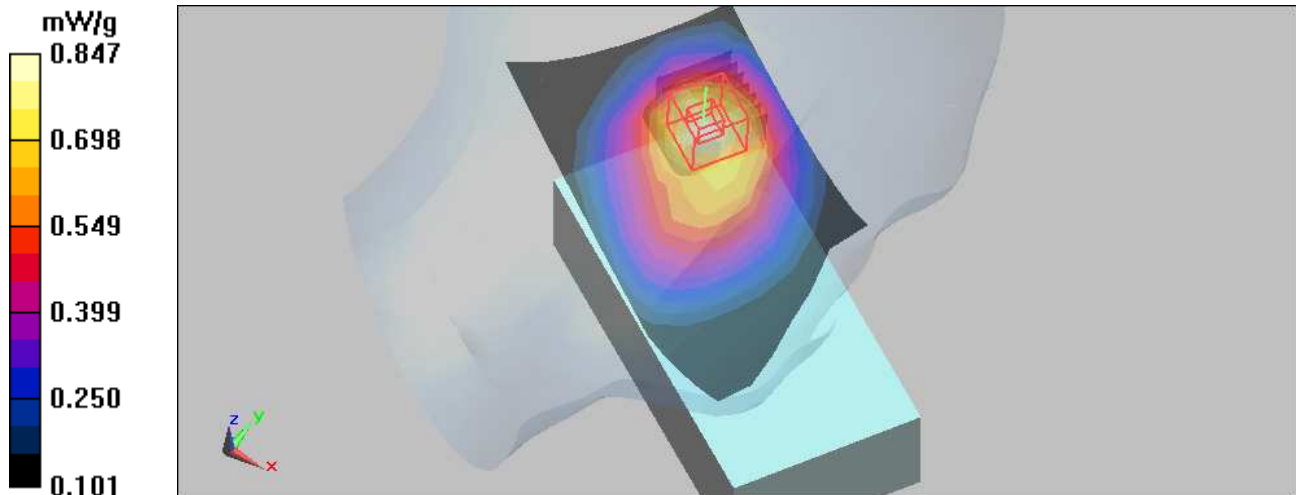

Test Laboratory: Bureau Veritas ADT

M04-A8-2D-Left Head-Tilt-CDMA850-Ch1013**DUT: EDA ; Type: MC75A8**

Communication System: CDMA 1x ; Frequency: 824.7 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 824.7$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Tilt Position - Low Ch1013/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.02 mW/g**Tilt Position - Low Ch1013/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28.4 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = **0.936** mW/g; SAR(10 g) = 0.619 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

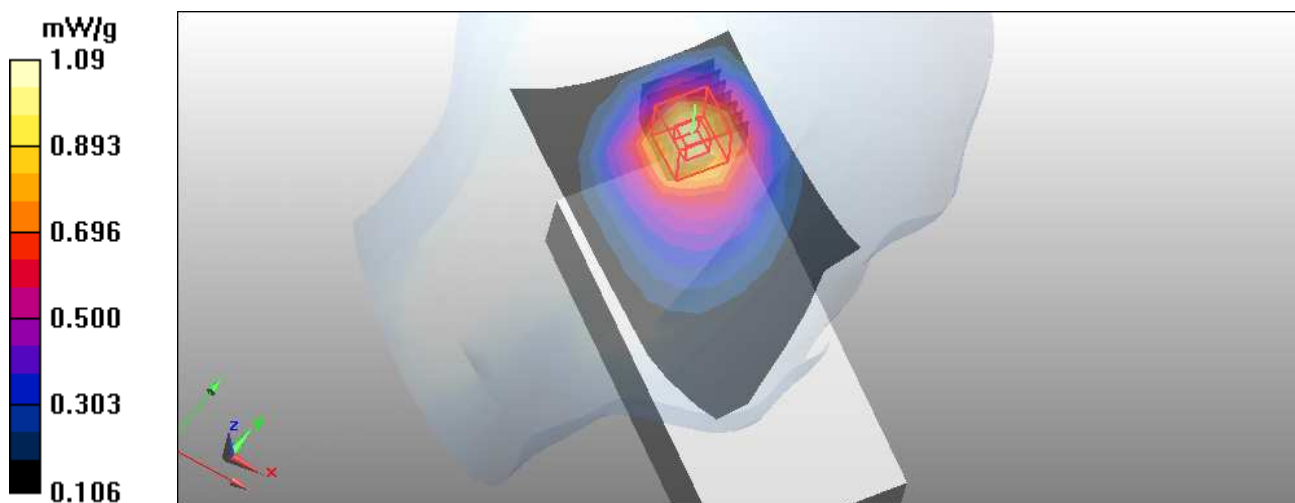

Test Laboratory: Bureau Veritas ADT

M04-A8-2D-Left Head-Tilt-CDMA850-Ch384

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Tilt Position - Mid Ch384/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.912 mW/g


Tilt Position - Mid Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 26.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = **0.842 mW/g**; SAR(10 g) = 0.554 mW/g

Maximum value of SAR (measured) = 0.988 mW/g

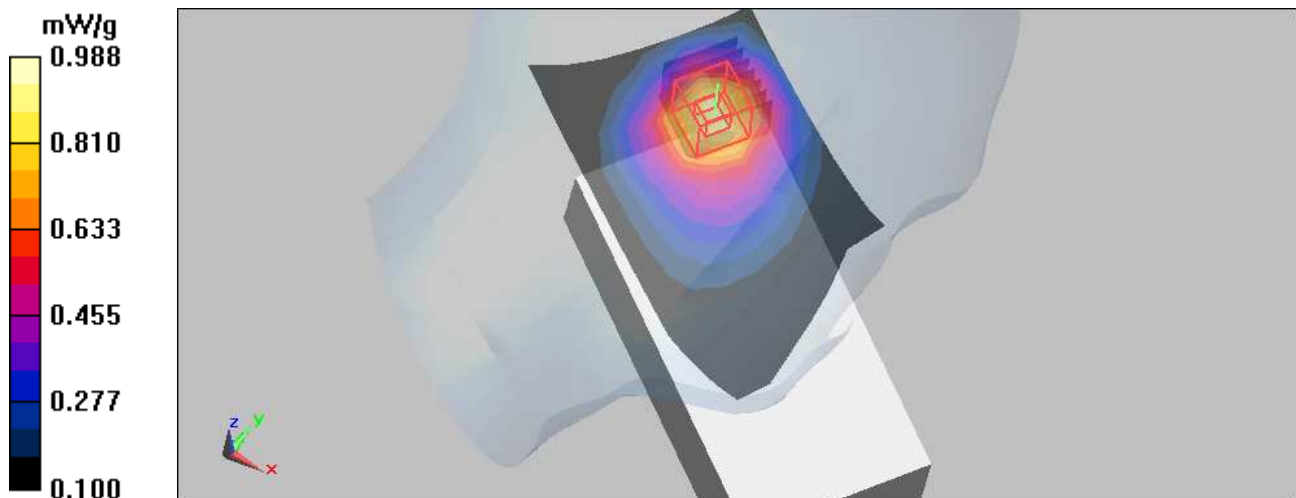

Test Laboratory: Bureau Veritas ADT

M04-A8-2D-Left Head-Tilt-CDMA850-Ch777**DUT: EDA ; Type: MC75A8**

Communication System: CDMA 2000 ; Frequency: 848.31 MHz ; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 848.31$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Tilt Position - High Ch777/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.1 mW/g**Tilt Position - High Ch777/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28.7 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.661 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

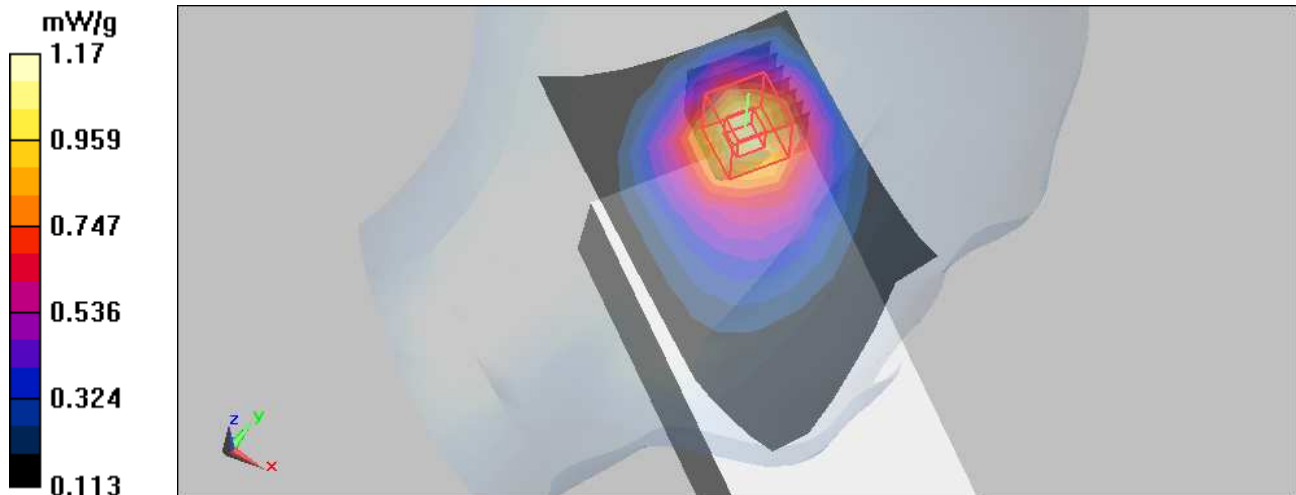

Test Laboratory: Bureau Veritas ADT

M05-A8-2D-Right Head-Cheek-CDMA1900-Ch600

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Touch Position - Mid Ch600/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.744 mW/g

Touch Position - Mid Ch600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.2 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.357 mW/g

Maximum value of SAR (measured) = 0.778 mW/g


Touch Position - Mid Ch600/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.2 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.306 mW/g

Maximum value of SAR (measured) = 0.594 mW/g

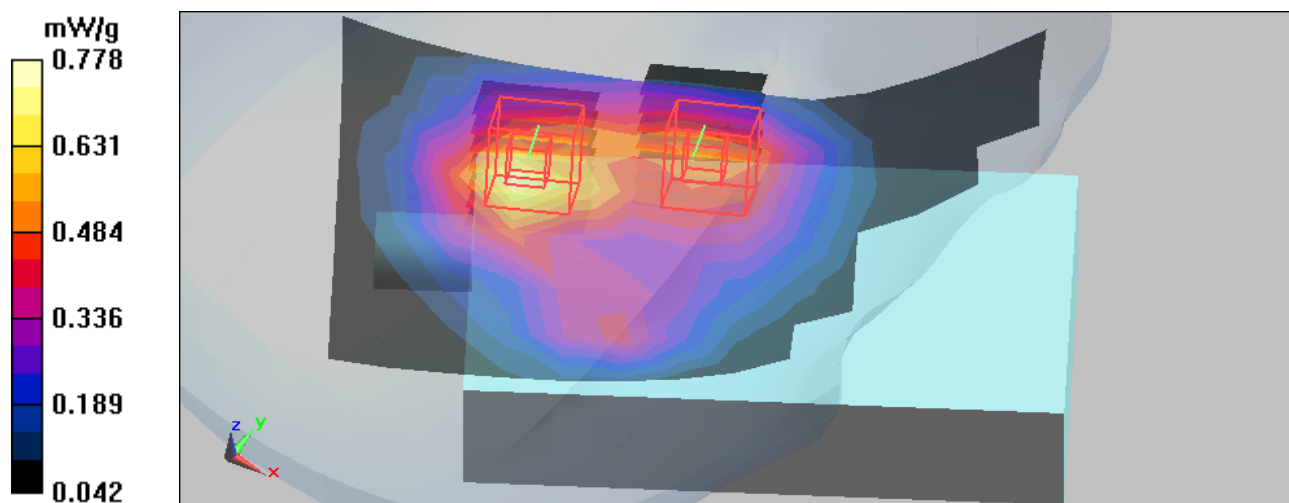

Test Laboratory: Bureau Veritas ADT

M06-A8-2D-Right Head-Tilt-CDMA1900-Ch600

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Tilt Position - Mid Ch600/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 mW/g


Tilt Position - Mid Ch600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.1 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.384 mW/g

Maximum value of SAR (measured) = 0.808 mW/g

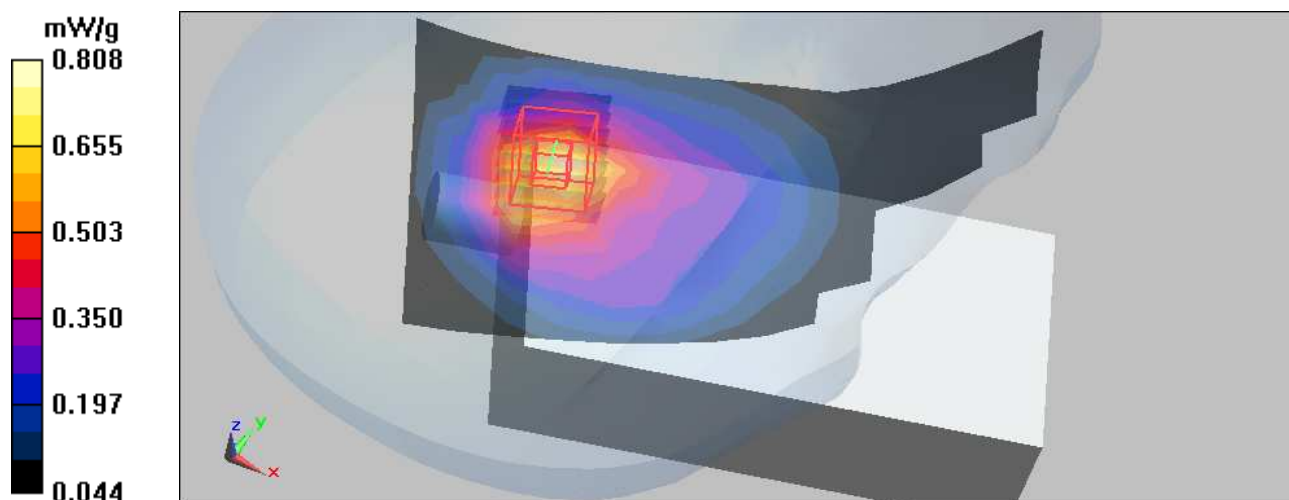

Test Laboratory: Bureau Veritas ADT

M07-A8-2D-Left Head-Cheek-CDMA1900-Ch25

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1851.25 MHz ; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Touch Position - Low Ch25/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.13 mW/g


Touch Position - Low Ch25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.9 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

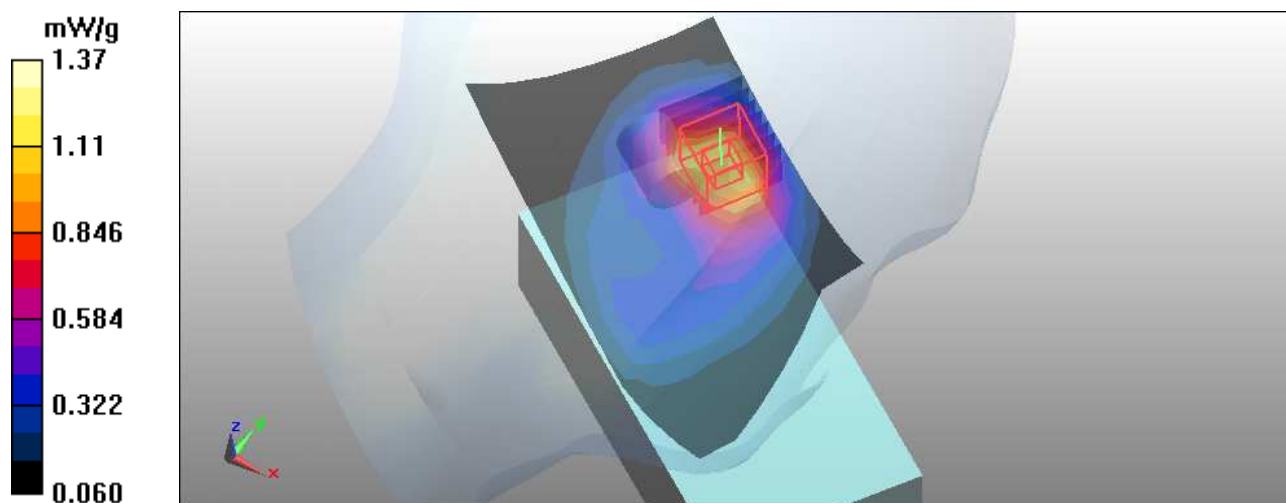

Test Laboratory: Bureau Veritas ADT

M07-A8-2D-Left Head-Cheek-CDMA1900-Ch600

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Touch Position - Mid Ch600 /Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.32 mW/g



Touch Position - Mid Ch600 /Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.8 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.698 mW/g

Maximum value of SAR (measured) = 1.52 mW/g

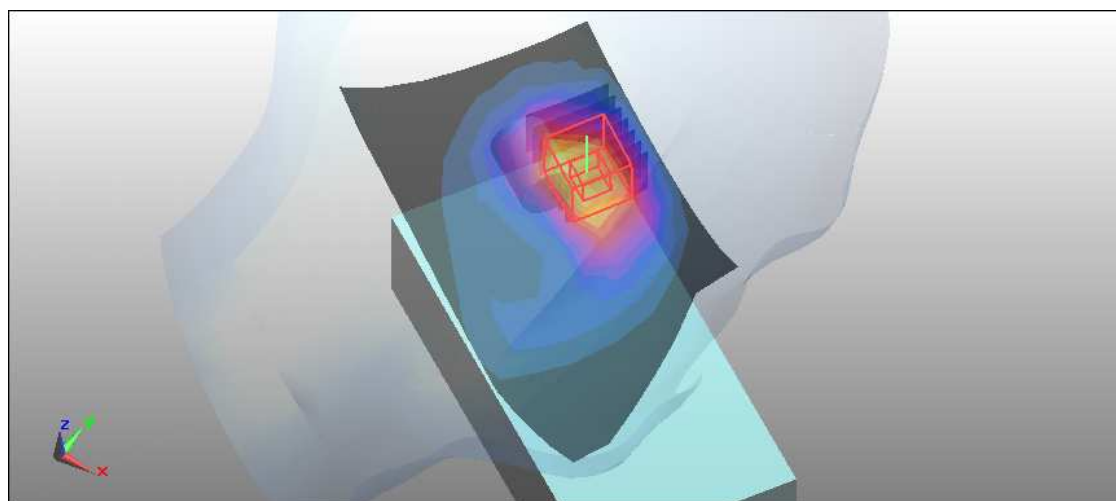

Test Laboratory: Bureau Veritas ADT

M07-A8-2D-Left Head-Cheek-CDMA1900-Ch1175

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1908.75 MHz ; Duty Cycle: 1:1
 Medium: HSL1900 Medium parameters used : $f = 1908.75$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³
 Phantom section: Left Section ; DUT test position : Cheek ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Touch Position - High Ch1175/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.2 mW/g


Touch Position - High Ch1175/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.4 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 1.42 mW/g

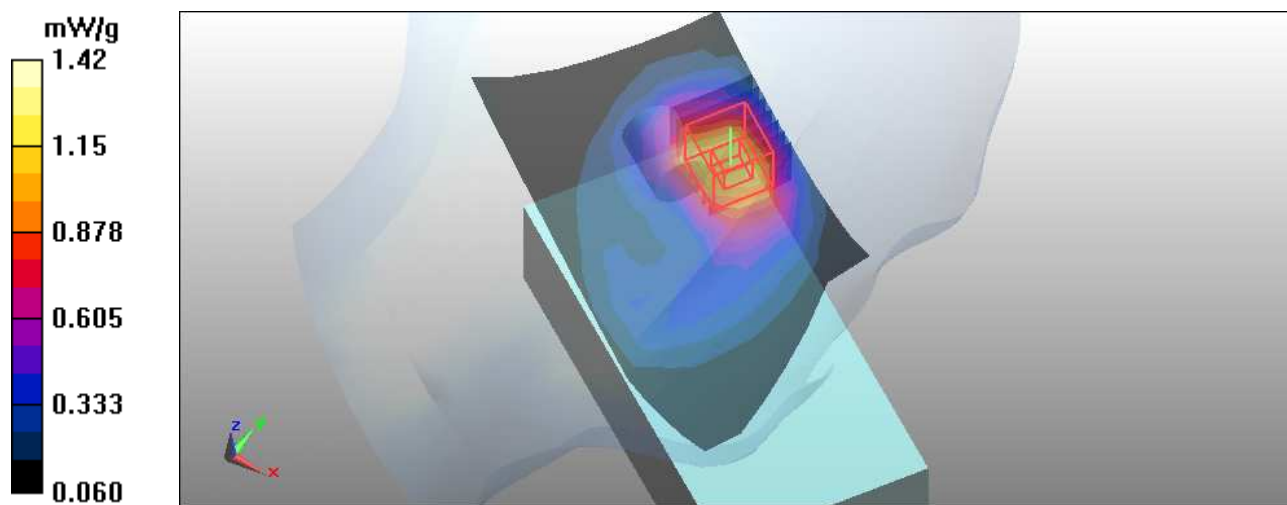

Test Laboratory: Bureau Veritas ADT

M08-A8-2D-Left Head-Tilt-CDMA1900-Ch25

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1851.25 MHz ; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Tilt Position - Low Ch25/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.02 mW/g


Tilt Position - Low Ch25/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.939 mW/g; SAR(10 g) = 0.529 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

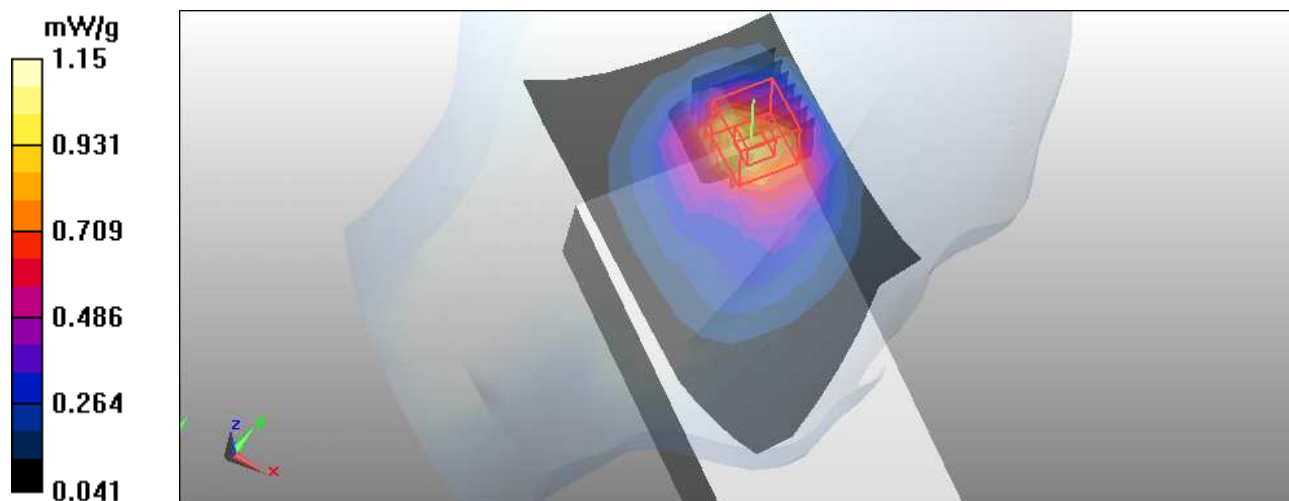

Test Laboratory: Bureau Veritas ADT

M08-A8-2D-Left Head-Tilt-CDMA1900-Ch600

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57



Tilt Position - Mid Ch600 /Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.34 mW/g**Tilt Position - Mid Ch600 /Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.3 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.647 mW/g

Maximum value of SAR (measured) = 1.38 mW/g

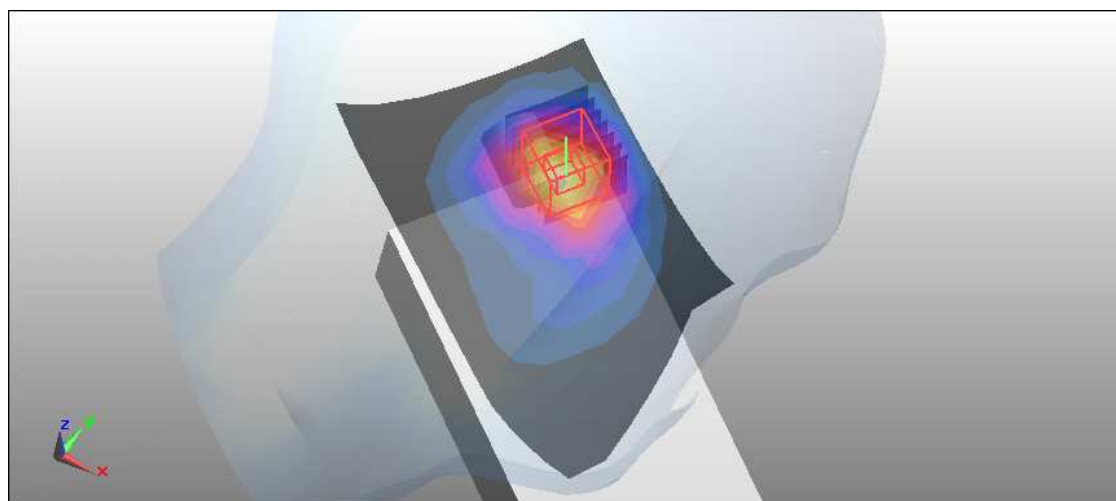

Test Laboratory: Bureau Veritas ADT

M08-A8-2D-Left Head-Tilt-CDMA1900-Ch1175

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1908.75 MHz ; Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used : $f = 1908.75$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³ Phantom section: Left Section ; DUT test position : Tilt ; Modulation type: OQPSK

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Tilt Position - High Ch1175/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.07 mW/g


Tilt Position - High Ch1175/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.8 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = **0.935 mW/g**; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

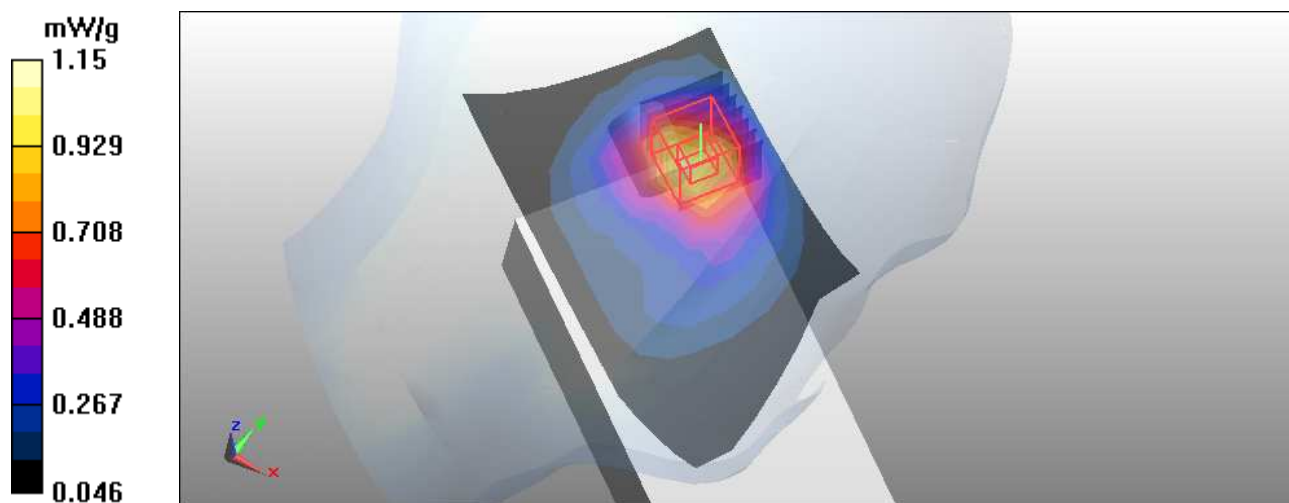

Test Laboratory: Bureau Veritas ADT

M09-Body-CDMA 1900-Ch600 / LCD Up

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: OQPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 0 mm (The front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.160 mW/g

Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.08 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.174 mW/g


Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.08 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

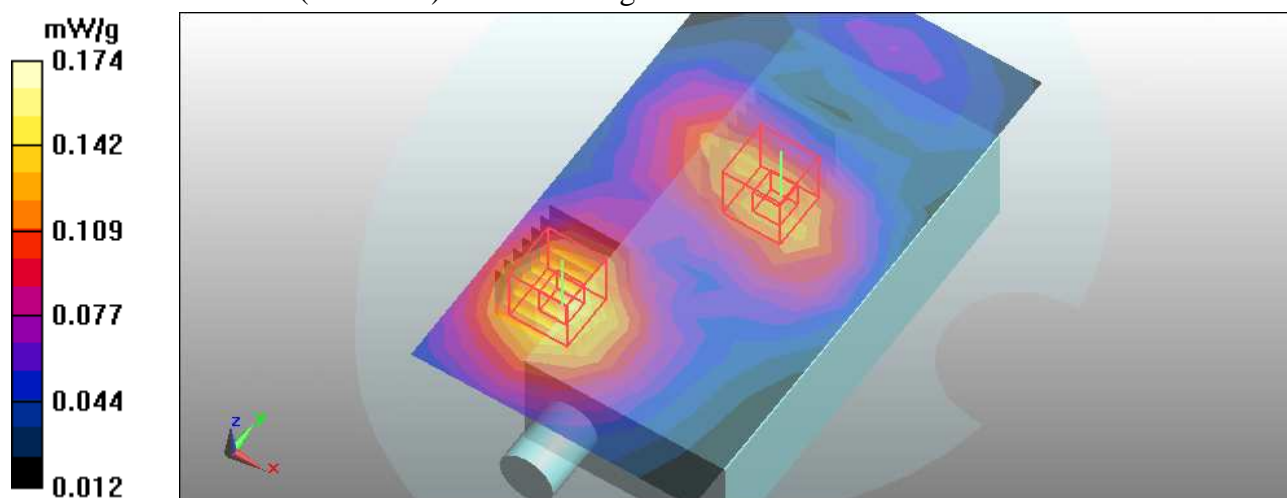

Test Laboratory: Bureau Veritas ADT

M10-Body-CDMA1900-Ch600 / LCD Down

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: OQPSK

Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Separation distance : 0 mm (The back side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57


Flat Section Mid. Ch600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.151 mW/g**Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.47 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

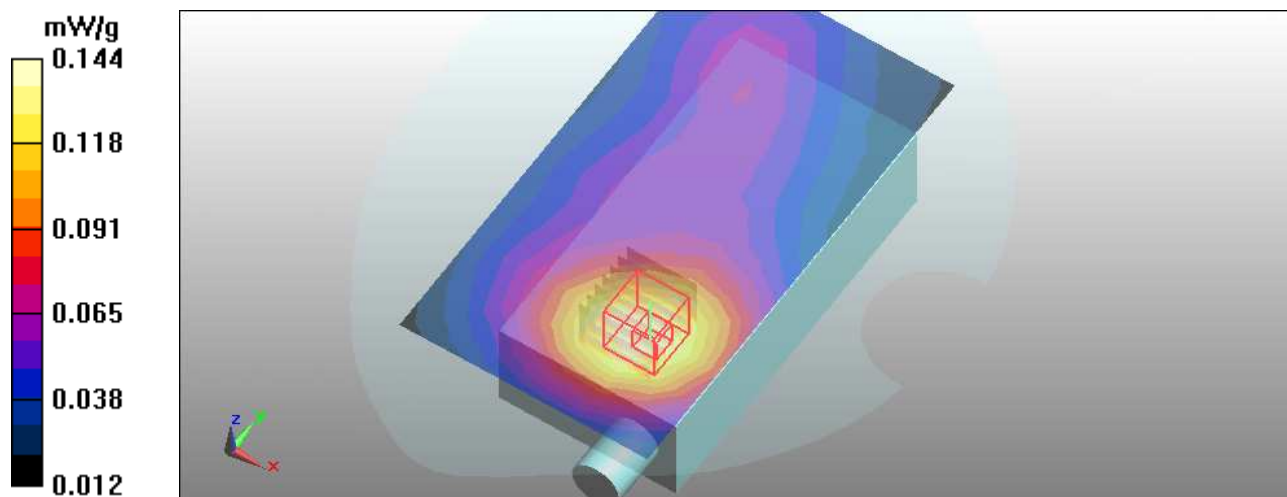

Test Laboratory: Bureau Veritas ADT

M11-Body-EVDO1900-Ch600 / LCD Up

DUT: EDA ; Type: MC75A8

Communication System: EVDO1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: HPSK
 Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section ; Separation distance : 0 mm (The front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.168 mW/g

Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.09 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.143 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.169 mW/g


Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.09 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

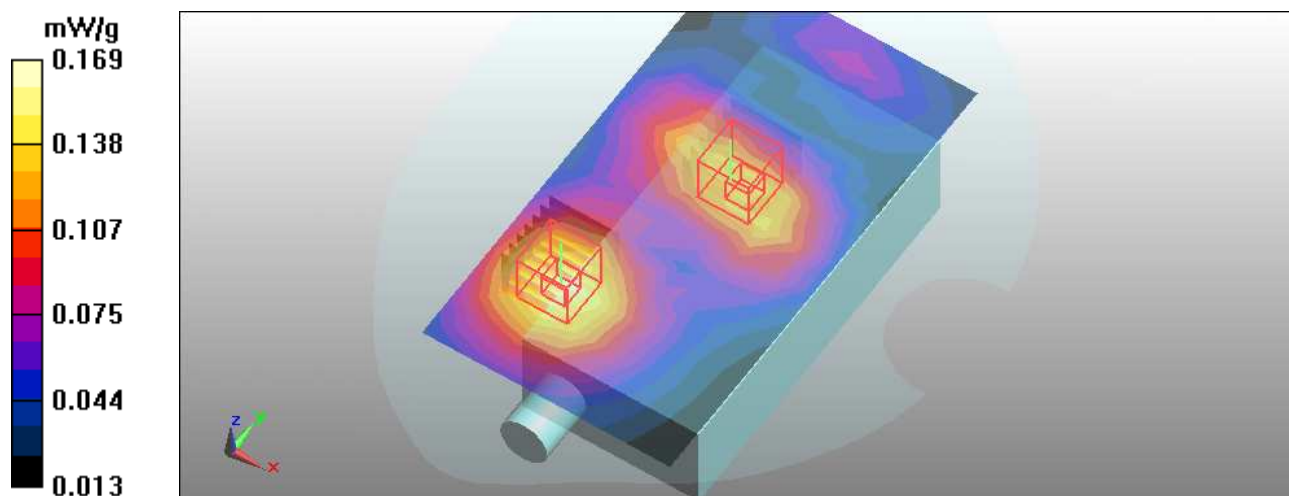

Test Laboratory: Bureau Veritas ADT

M12-Body-EVDO1900-Ch600 / LCD Down

DUT: EDA ; Type: MC75A8

Communication System: EVDO1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:1 ; Modulation type: HPSK
Medium: MSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Separation distance : 0 mm (The back side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch600/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.147 mW/g


Flat Section Mid. Ch600/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.34 V/m; Power Drift = 0.192 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = **0.088** mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.105 mW/g

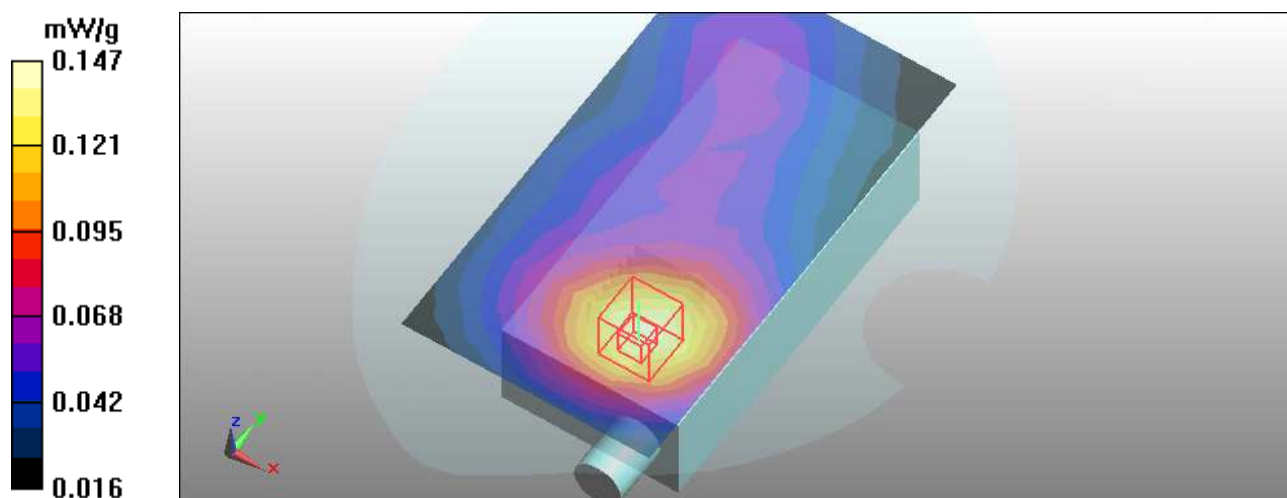

Test Laboratory: Bureau Veritas ADT

M13-Body-CDMA850-Ch384 / LCD Up

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1 ; Modulation type: OQPSK Medium: MSL835 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ Phantom section: Flat Section ; Separation distance : 0 mm (The front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch384/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.268 mW/g


Flat Section Mid. Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.6 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

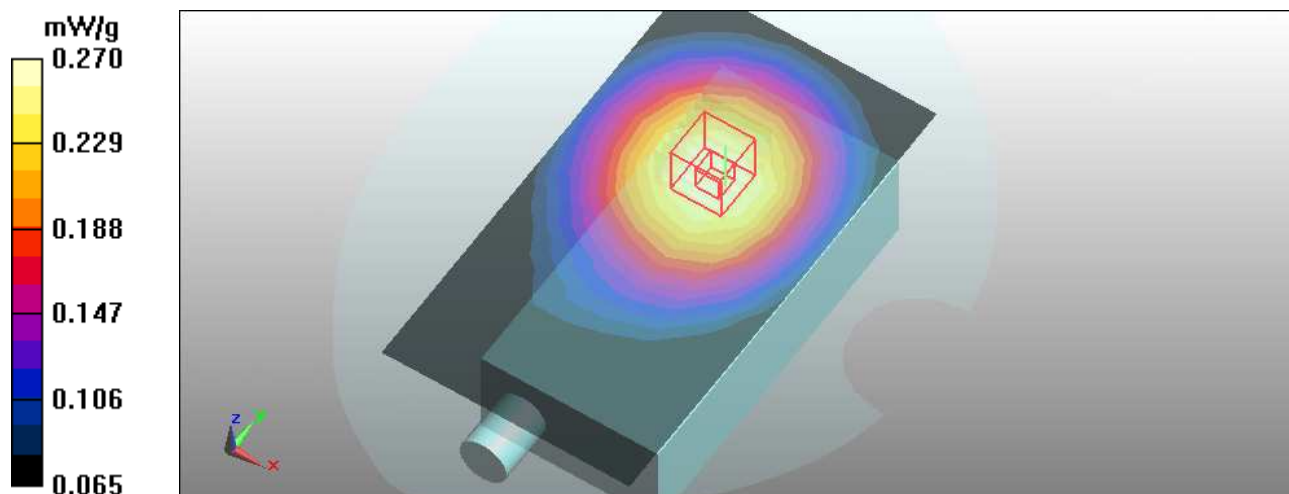

Test Laboratory: Bureau Veritas ADT

M14-Body-CDMA850-Ch384 / LCD Down

DUT: EDA ; Type: MC75A8

Communication System: CDMA 1x ; Frequency: 836.52 MHz ; Duty Cycle: 1:1 ; Modulation type: OQPSK Medium: MSL835 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ Phantom section: Flat Section ; Separation distance : 0 mm (The back side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch384/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.179 mW/g



Flat Section Mid. Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.6 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = **0.163** mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.181 mW/g

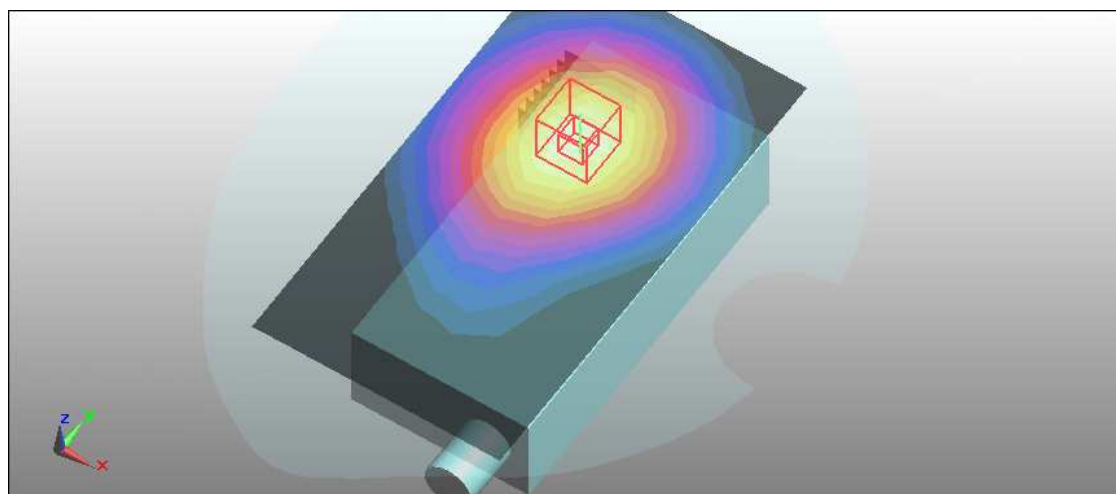

Test Laboratory: Bureau Veritas ADT

M15-Body-EVDO850-Ch384 / LCD Up

DUT: EDA ; Type: MC75A8

Communication System: EVDO850 ; Frequency: 836.52 MHz ; Duty Cycle: 1:1 ; Modulation type: HPSK Medium: MSL835 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ Phantom section: Flat Section ; Separation distance : 0 mm (The front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch384/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.264 mW/g


Flat Section Mid. Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.5 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.182 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

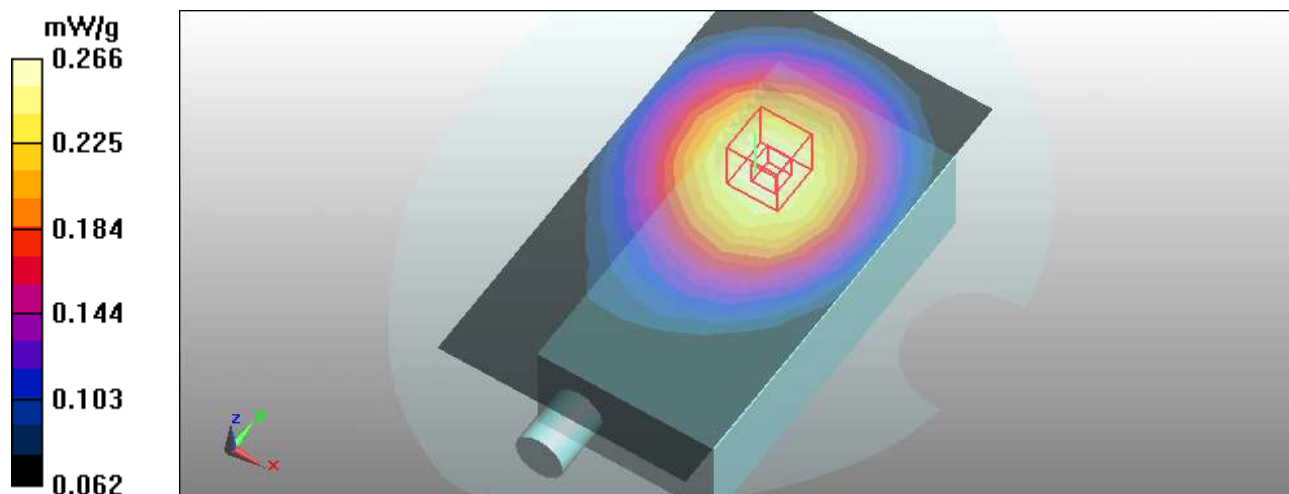

Test Laboratory: Bureau Veritas ADT

M16-Body-EVDO 850-Ch384 / LCD Down

DUT: EDA ; Type: MC75A8

Communication System: EVDO850 ; Frequency: 836.52 MHz ; Duty Cycle: 1:1 ; Modulation type: HPSK Medium: MSL835 Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³ Phantom section: Flat Section ; Separation distance : 0 mm (The back side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Flat Section Mid. Ch384/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.174 mW/g


Flat Section Mid. Ch384/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 12.2 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.180 mW/g

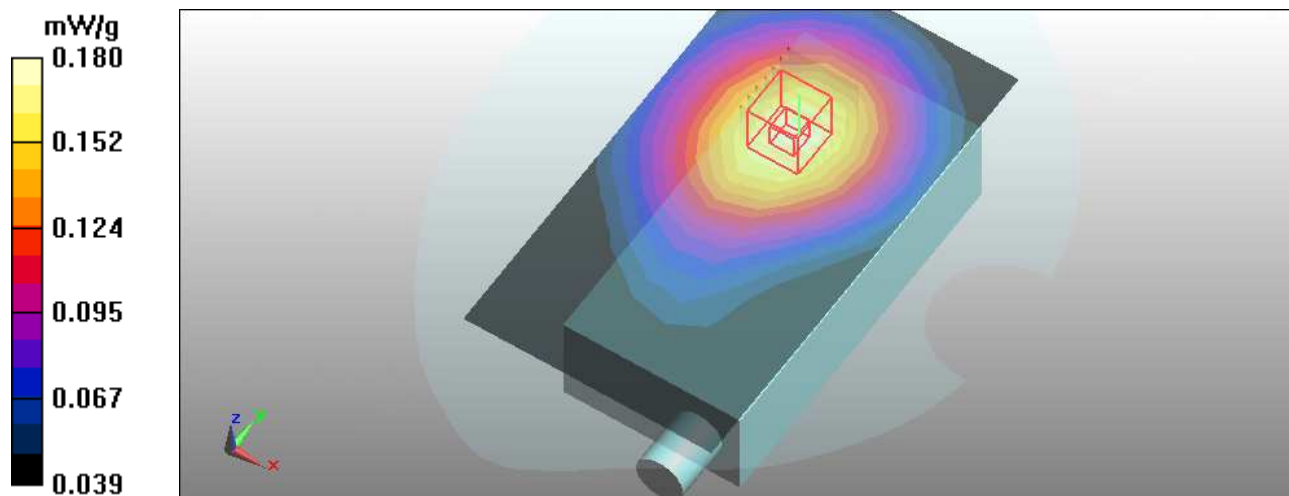

Test Laboratory: Bureau Veritas ADT

System Performance Check-HSL835 MHz

DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz


Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL850; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 42.4$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom) Air temp. : 22.5 degrees ; Liquid temp. : 21.2 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

System Performance Check at Frequencies 835 MHz/d=15mm, Pin=250 mW, dist=3.0mm /Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.38 mW/g

System Performance Check at Frequencies 835 MHz/d=15mm, Pin=250 mW, dist=3.0mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 55.7 V/m; Power Drift = -0.081 dB
 Peak SAR (extrapolated) = 3.51 W/kg
SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.51 mW/g
 Maximum value of SAR (measured) = 2.72 mW/g

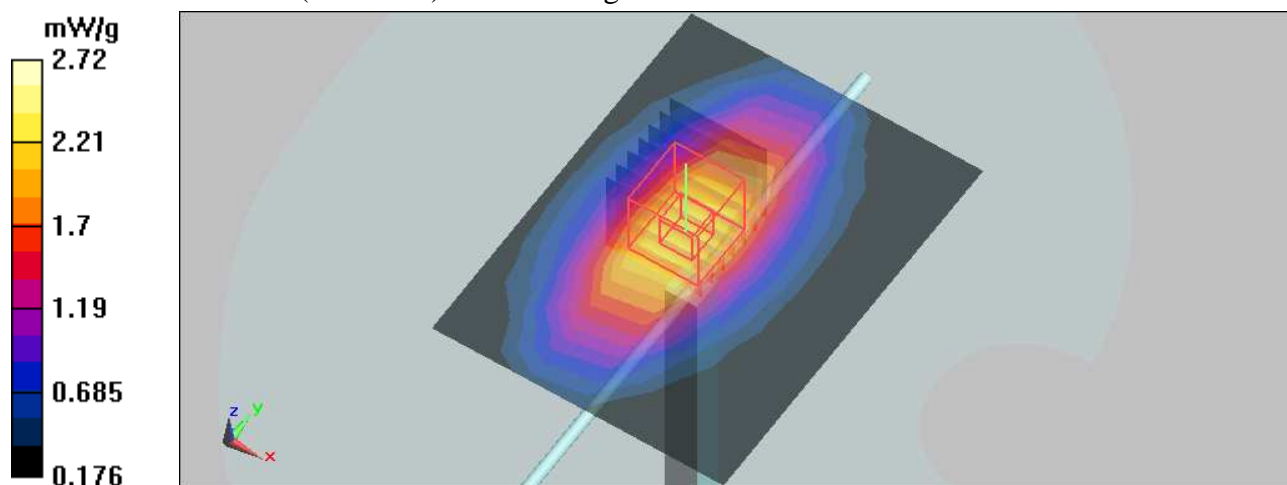

Test Laboratory: Bureau Veritas ADT

SystemPerformanceCheck-HSL1900MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz


Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: HSL1900;Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³ ;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)Air temp. : 22.9 degrees ; Liquid temp. : 22 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

System Performance Check at Frequencies 1.9 GHz/d=10mm, Pin=250 mW, dist=3.0mm /Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 13.1 mW/g

System Performance Check at Frequencies 1.9 GHz/d=10mm, Pin=250 mW, dist=3.0mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 96.6 V/m; Power Drift = -0.050 dB
 Peak SAR (extrapolated) = 19.5 W/kg
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.27 mW/g
 Maximum value of SAR (measured) = 12.9 mW/g

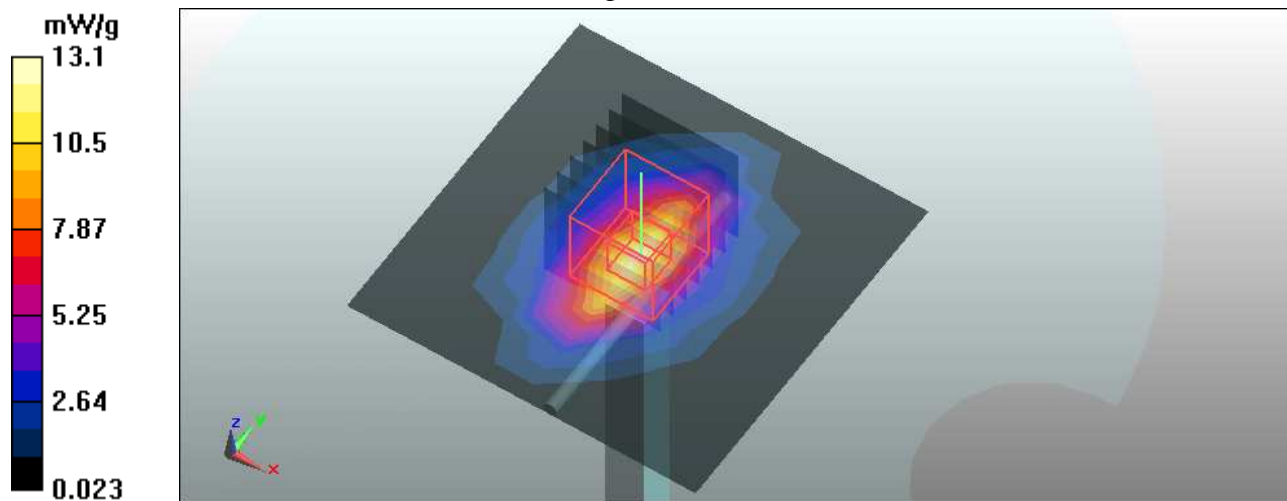

Test Laboratory: Bureau Veritas ADT

SystemPerformanceCheck-MSL835MHz

DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz


Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL850;Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$;
 Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom)Air temp. : 23 degrees ; Liquid temp. : 22.1 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

System Performance Check at Frequencies 835MHz/d=15mm, Pin=250 mW, dist=3.0mm /Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.45 mW/g

System Performance Check at Frequencies 835MHz/d=15mm, Pin=250 mW, dist=3.0mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 54.7 V/m; Power Drift = -0.091 dB
 Peak SAR (extrapolated) = 3.59 W/kg
SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g
 Maximum value of SAR (measured) = 2.80 mW/g

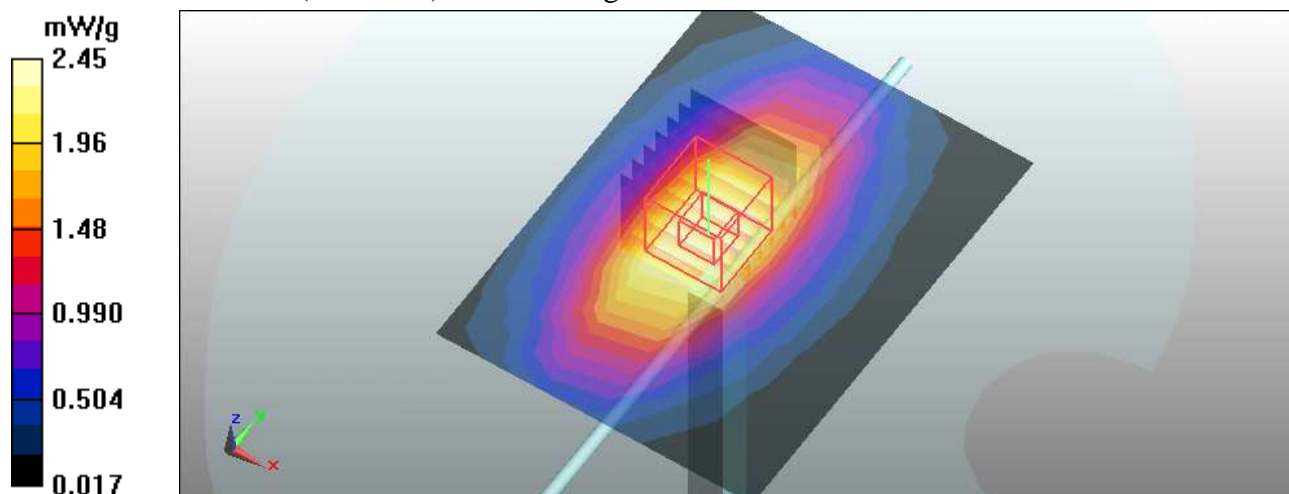

Test Laboratory: Bureau Veritas ADT

System Performance Check-MSL1900 MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz



Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW
 Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³ ; Liquid level : 150 mm
 Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.1 degrees ; Liquid temp. : 22 degrees

DASY5 Configuration:


- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

System Performance Check at Frequencies 1.9 GHz/d=10mm, Pin=250 mW, dist=3.0mm/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 12.8 mW/g

System Performance Check at Frequencies 1.9 GHz/d=10mm, Pin=250 mW, dist=3.0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 95.6 V/m; Power Drift = -0.151 dB
 Peak SAR (extrapolated) = 18.7 W/kg
 SAR(1 g) = **10.2 mW/g**; SAR(10 g) = 5.31 mW/g

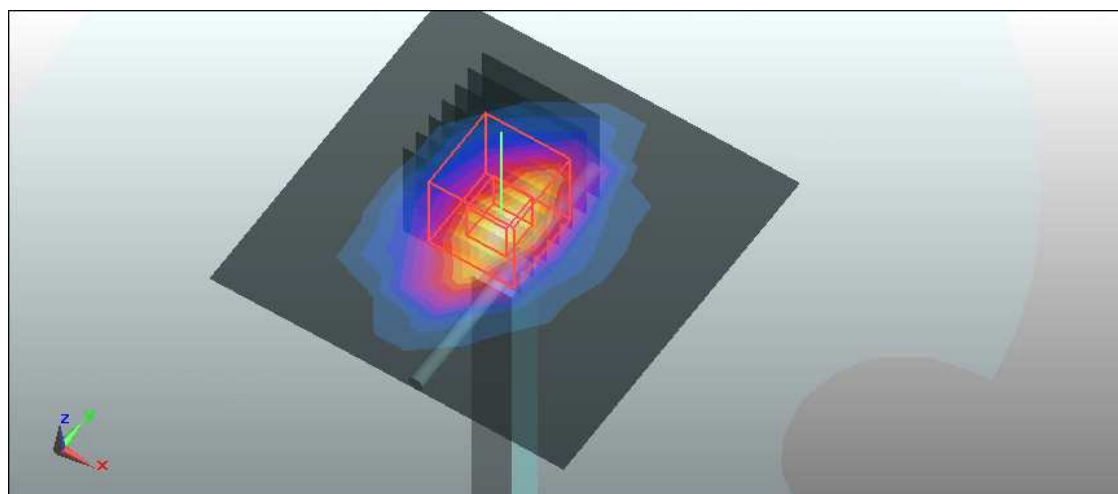

APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM

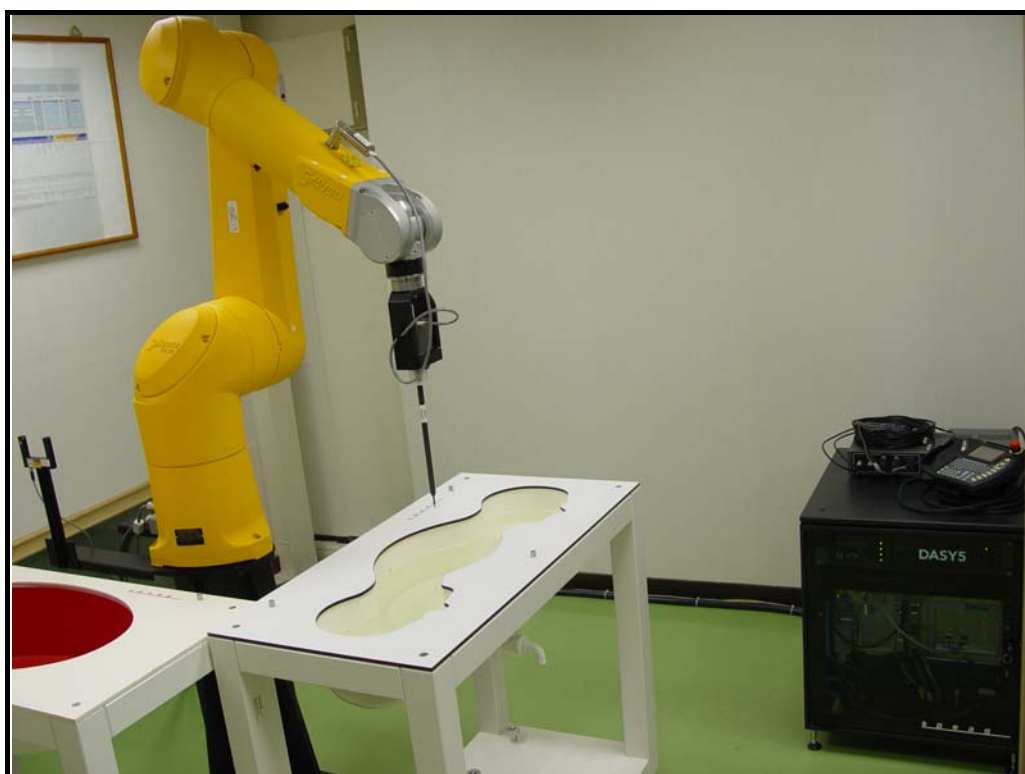

APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION

