

---

**REPORT ON**

Limited FCC CFR 47: Part 15 C Testing in support of an  
Application for Grant of Equipment Authorisation  
Of a Symbol MC9062 Mobile Computer

**COMMERCIAL-IN-CONFIDENCE**

FCC ID: H9PMC9062A

Report No OR611524/02 Issue 1

March 2004

---

**REPORT ON** Limited FCC CFR 47: Part 15 C Testing in support of an Application for Grant of Equipment Authorisation Of a Symbol MC9062 Mobile Computer

FCC ID: H9PMC9062A

Report No OR611524/02 Issue 1

March 2004

**PREPARED FOR** Symbol Technologies Inc  
One Symbol Plaza  
Holtsville  
NY 11742-1300  
New York  
United States of America

**PREPARED BY**

  
M Glasspool  
Project Manager

**APPROVED BY**

  
C Gould  
EMC Signatory

**DATED**

05-03-04

**DISTRIBUTION**

Symbol Technologies

Copy 1

BABT


Copy 2

Copy No

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Part 15 C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineers;

  
D High

  
A Guy

  
G Lawler





## CONTENTS

<b>Section</b>	<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY</b>
1.1	Status..... 4
1.2	Introduction..... 5
1.3	Brief Summary of Results ..... 7
1.4	Opinions and Interpretations ..... 8
1.5	Product information ..... 9
1.6	Test Conditions (Configuration)..... 10
1.7	Deviations from the Standard..... 10
1.8	Modification Record..... 10
<b>2</b>	<b>TEST DETAILS</b>
2.1	Measurement At The Band Edge..... 12
2.2	Maximum Peak Output Power..... 15
2.3	Spurious Radiated Emissions ..... 17
<b>3</b>	<b>TEST EQUIPMENT USED</b>
3.1	Table of Test Equipment Used..... 28
3.2	Measurement Uncertainty ..... 30
<b>4</b>	<b>EUT PHOTOGRAPH</b>
4.1	Front View Photograph..... 32
<b>5</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT</b>
5.1	Accreditation, Disclaimers and Copyright..... 34
<b>APPENDICES</b>	
A	Titchfield FCC Site Compliance Letter ..... 36 (Comprising of 1 Sheet)



## **SECTION 1**

### **REPORT SUMMARY**

Limited FCC CFR 47: Part 15 C Testing in support of an  
Application for Grant of Equipment Authorisation  
Of a Symbol MC9062 Mobile Computer



## 1.1 STATUS

EQUIPMENT UNDER TEST	MC9062 Mobile Computer
OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specification.
NAME AND ADDRESS OF CLIENT	Symbol Technologies Inc One Symbol Plaza Holtsville 11742-1300, New York United States of America
TYPE NUMBER	MC9062
PART NUMBER	MC9062-SHAH9AEA721
SERIAL NUMBER	ALP75716
HARDWARE VERSION	Rev 8 (To be released as Rev A)
DECLARED VARIANTS	None
TEST SPECIFICATION / ISSUE / DATE	FCC CFR 47: Part 15, Subpart C, August 2002
NUMBER OF ITEMS TESTED	One
SECURITY CLASSIFICATION OF EUT	Commercial In Confidence
INCOMING RELEASE DATE	Declaration of Build Status 9 <sup>th</sup> February 2004
DISPOSAL REFERENCE NUMBER DATE	Held pending disposal Not Applicable Not Applicable
ORDER NUMBER DATE	EMEA 13602 3 <sup>rd</sup> November 2003
START OF TEST	18 <sup>th</sup> February 2004
FINISH OF TEST	21 <sup>st</sup> February 2004
RELATED DOCUMENTS	ANSI C63.4 2001. Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



## 1.2 INTRODUCTION

The information contained within this report is intended to show limited verification of compliance of the Symbol Technologies Inc MC9062 Mobile Computer to the requirements of FCC Specification Part 15 C.

Testing was carried out in support of an application for Grant of Equipment Authorisation in the name of Symbol Technologies Inc.



### 1.2.1 DECLARATION OF BUILD STATUS

MAIN EUT			
<b>MANUFACTURING DESCRIPTION</b>	Mobile Computer		
<b>MANUFACTURER</b>	Symbol Technologies Inc.		
<b>COUNTRY OF ORIGIN</b>	USA		
<b>TYPE</b>	MC9062		
<b>PART NUMBER</b>	MC9062-SHAH9AEA721		
<b>SERIAL NUMBER</b>	ALP75716, ALP75718, ALP75714, ALP75715, ALP75716, ALP75772, ALP75794, ALP75904, ALP75801, ALP75815		
<b>HARDWARE VERSION</b>	Rev 8 (Manufactured as Rev A)		
<b>FCC ID</b>	H9PMC9062A		
<b>INDUSTRY CANADA ID</b>	1549D-MC9062A		
<b>RADIO MODULES INTEGRATED</b>	RLAN, (21-64436) and Bluetooth, (21-64381), GSM/GPRS 850/1800/1900, (MC46)		
<b>TECHNICAL DESCRIPTION</b>	The unit supplied for testing is a Symbol MC9062 Mobile Computer, which offers Tri-Band GSM/GPRS 850/1800/1900, 2.4GHz 802.11b Wireless LAN and Bluetooth connectivity with the following options: SE824 Scan Engine; Colour (touch) display; 128/32 memory option; 28 Key Keyboard; PPC2003; Audio; Bluetooth		
BATTERY/POWER SUPPLY			
<b>MANUFACTURING DESCRIPTION</b>	Lithium Battery		
<b>MANUFACTURER</b>	Symbol Technologies Inc.		
<b>COUNTRY OF ORIGIN</b>	USA		
<b>TYPE</b>	N/A		
<b>PART NUMBER</b>	21-62960-01		
<b>VOLTAGE</b>	7.2V		
<b>UK AGENT</b>	Symbol Technologies Ltd		
RADIO MODULES			
<b>MANUFACTURING DESCRIPTION</b>	Main Terminal Module with Embedded RLAN Radio	Bluetooth Module	GPRS/GSM Tri-Band Radio Module
<b>MANUFACTURER</b>	Symbol Technologies Inc	Symbol Technologies Inc	Siemens AG
<b>COUNTRY OF ORIGIN</b>	USA	USA	Germany
<b>TYPE</b>	21-64436	21-64381	MC46
<b>POWER</b>	7 - 16V	3.3V	3.2 - 4.5V
<b>TRANSMITTER OPERATING RANGE</b>	2400 - 2483.5MHz	2400 - 2483.5MHz	824-849 / 1710-1785 / 1850-1910
<b>TRANSMITTER POWER</b>	100mW (+20dBm)	100mW (+20dBm)	2W (GSM850) 1W (GSM1800/1900)
<b>RECEIVER OPERATING RANGE</b>	2400 - 2483.5MHz	2400 - 2483.5MHz	869-894 / 1805-1880 / 1930-1990
<b>INTERMEDIATE FREQUENCIES</b>	374MHz	Direct Conversion	Receiver: 0; Transmitter: 80MHz
<b>EMISSION DESIGNATOR</b>	11M0F1D	1M00F1D	GXW
<b>DHSS/FHSS/COMBINED</b>	DSSS	FHSS	GSM
<b>FCC ID</b>	H9P2164436	H9P2164381	QIPMC46
<b>INDUSTRY CANADA ID</b>	1549D-2164436	1549D-2164381	267W-MC46
ANCILLARIES			
<b>MANUFACTURING DESCRIPTION</b>	Headset		
<b>MANUFACTURER</b>	VXI Corporation		
<b>TYPE</b>	VXI 61-SYB		
<b>PART NUMBER</b>	50-11300-050		
<b>SERIAL NUMBER</b>	Not Serialised		
<b>HARDWARE VERSION</b>	Rev A		
<b>COUNTRY OF ORIGIN</b>	USA		
<b>UK AGENT</b>	Symbol Technologies Inc		

Signature

Date

9<sup>th</sup> February 2004

D of B S Serial No

OR611524

The unit used for the internal photographs in this report was not the EUT, but was supplied as an identical unit for photographs only. It is declared as being the same build status as the EUT.

BABT Product Service Limited formally certifies that the manufacturer's declaration as reproduced in this report, is a true and accurate record of the original received from the applicant.



### 1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out is shown below.

Test	Spec Clause	Test Description	Result	Levels/Comments
	15.109	Spurious Radiated Emissions	N/A	
2.1	15.205	Measurement at Band Edge	Pass	
	15.207	Conducted Emissions on Power Lines	N/A	
2.2	15.247(b)(3)	Maximum Peak Output Power	Pass	
	15.247(c)	Spurious Conducted Emissions on Antenna Port	N/A	
2.3	15.247(c)	Spurious Radiated Emissions	Pass	





#### **1.4 OPINIONS AND INTERPRETATIONS**

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.



## 1.5 PRODUCT INFORMATION

### 1.5.1 Technical Description

The unit supplied for testing is a Symbol MC9062 Mobile Computer, which offers Tri-Band GSM/GPRS 850/1800/1900, 2.4GHz 802.11b Wireless LAN and Bluetooth connectivity with the following options: SE824 Scan Engine; Colour (touch) display; 128/32 memory option; 28 Key Keyboard; PPC2003; Audio; Bluetooth

The terminal utilizes the approved Siemens AG MC46 GSM/GPRS 850/1800/1900 Module, Symbol 21-64436 Main Terminal Module with embedded RLAN Radio and the Symbol 21-64381 Bluetooth Module. FCC ID numbers are detailed in Section 1.2.1 "Declaration of Build Status".

### 1.5.2 Modes of Operation

Applicable testing was carried out with the EUT transmitting at maximum power as detailed in Section 1.5.3 "Test Configuration".

The Client has declared that the Symbol 21-64436 and the Symbol 21-64381 Modules are Co-Located, but that they are not capable of Simultaneously Transmitting. The Symbol 21-64436 and the Symbol 21-64381 Modules are both capable of Simultaneously Transmitting with the Tri-Band GSM/GPRS 850/1800/1900 Module individually. Testing for this mode of operation is covered in BABT Test Report Reference Number OR611524/04 Issue 1, dated March 2004.

### 1.5.3 Test Configuration

#### 1.5.3.1 Test Configuration – Mode 1 (RLAN)

Bottom Channel:	2412MHz
Middle Channel:	2437MHz
Top Channel:	2462MHz

#### 1.5.3.2 Test Configuration – Mode 2 (Bluetooth)

Bottom Channel:	2402MHz
Middle Channel:	2441MHz
Top Channel:	2480MHz



## 1.6 TEST CONDITIONS

The EUT was set-up simulating a typical user installation on the Alternative Open Field Test Site identified in Appendix A and tested in accordance with the applicable specification.

For all tests, the Symbol MC9062 Mobile Computer was powered by its own internal battery and fitted with a headset.

Testing in this report pertains only to the item tested and detailed in Section 1.2.

## 1.7 DEVIATIONS FROM THE STANDARD

No deviations from the standard were made.

## 1.8 MODIFICATION RECORD

The table below details modifications made to the EUT during the test programme and applies to all configurations. All testing was performed with the EUT in Modification State 0 unless otherwise stated in Section 1.3 and on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	N/A	N/A



## **SECTION 2**

### **TEST DETAILS**

Limited FCC CFR 47: Part 15 C Testing in support of an  
Application for Grant of Equipment Authorisation  
Of a Symbol MC9062 Mobile Computer



## **2.1 MEASUREMENT AT THE BAND EDGE**

### **2.1.1 Specification Reference**

FCC CFR 47: Part 15 Subpart C, Section 15.205

### **2.1.2 Equipment Under Test**

MC9062

### **2.1.3 Date of Test**

18<sup>th</sup> and 19<sup>th</sup> February 2004

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as “Section 2.1” within the Test Equipment Used table shown in Section 3.1.

### **2.1.5 Test Procedure**

Test performed in accordance with ANSI C63.4.



## 2.1 MEASUREMENT AT THE BAND EDGE - continued

### 2.1.6 Test Results

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.205 for Band Edge Measurements.

Measurements were made with the EUT in Mode 1 (RLAN)

Channel Frequency	Band Edge Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Limit Peak Field Strength	Average Field Strength	Limit Average Field Strength
MHz	MHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2412.0	2390.0	V	104	218	57.9	74.0	46.3	54.0
2462.0	2483.5	V	200	220	58.7	74.0	47.1	54.0


Measurements were made with the EUT in Mode 2 (Bluetooth)

Channel Frequency	Band Edge Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Limit Peak Field Strength	Average Field Strength	Limit Average Field Strength
MHz	MHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2402.0	2390.0	V	165	58	61.2	74.0	50.1	54.0
2480.0	2483.5	V	150	82	57.3	74.0	48.2	54.0



## 2.1 MEASUREMENT AT THE BAND EDGE - continued

### 2.1.6 Test Results - continued

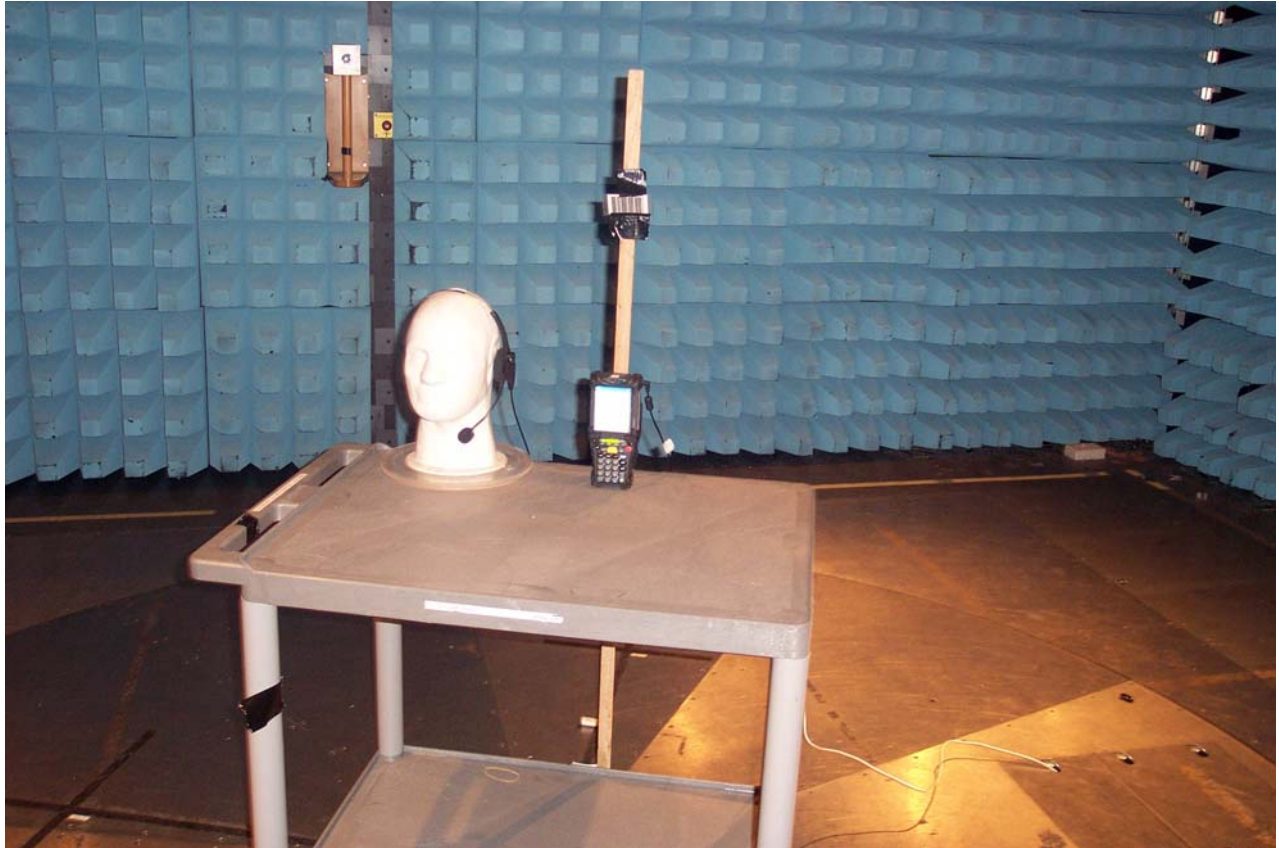

Photograph of Radiated Emissions, Maximum Peak Output Power & Band Edge Measurement Test Set Up



## **2.2 MAXIMUM PEAK OUTPUT POWER (EIRP Method)**

### **2.2.1 Specification Reference**

FCC CFR 47: Part 15 Subpart C; Section 15.247(b)(3)

### **2.2.2 Equipment Under Test**

MC9062

### **2.2.3 Date of Test**

20<sup>th</sup> February 2004

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as "Section 2.2" within the Test Equipment Used table shown in Section 3.1.

### **2.2.5 Test Procedure**

Test Performed in accordance with FCC CFR 47: Part 15.247(b)(1).

The EUT contains an integral antenna and therefore the Maximum Peak Output Power was made using the EIRP method.

The Spectrum Analyser was tuned to the test frequency. The device Output Power setting was controlled as specified in the Product Information, Section 1.5 of this document. The device was then rotated through 360 degrees until the highest power level was observed in both horizontal and vertical polarisation. The device was then replaced with a substitution antenna, whose input signal level into the antenna was adjusted until the received level matched that of the previously detected emission.





## 2.2 MAXIMUM PEAK OUTPUT POWER (EIRP Method) - continued

### 2.2.6 Test Results

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(b)(3) for Maximum Peak Output Power.

Measurements were made with the EUT in Mode 1 (RLAN)

Frequency (MHz)	Result EIRP (dBm)	Result EIRP (mW)
2412	12.8	19.05
2437	12.9	19.46
2462	13.0	19.95
Limit	<+36dBm or <4W	

Measurements were made with the EUT in Mode 2 (Bluetooth)

Frequency (MHz)	Result EIRP (dBm)	Result EIRP (mW)
2402	10.6	11.48
2441	10.2	10.47
2480	6.0	3.98
Limit	<+36dBm or <4W	



## **2.3 SPURIOUS RADIATED EMISSIONS**

### **2.3.1 Specification Reference**

FCC CFR 47: Part 15 Subpart C, Section 15.247(c)

### **2.3.2 Equipment Under Test**

MC9062-S

### **2.3.3 Date of Test**

11<sup>th</sup> – 16<sup>th</sup> February 2004

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as “Section 2.6” within the Test Equipment Used table shown in Section 3.1.

### **2.3.5 Test Procedure**

Test Performed in accordance with ANSI C63.4.

FCC CFR 47: Part 15 Subpart C, Section 15.247(c), for Radiated Emissions also requires Sections 15.205 and 15.209 to be applied.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector.

Emissions identified within the range 1GHz – 25GHz were then formally measured using Peak and Average Detectors, as appropriate.

The measurements were performed at a 3m distance unless otherwise stated.



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.5 Test Procedure - Continued

The limits for Spurious Emissions Outside the Restricted Bands have been measured and calculated, as shown in the table below:

Test Mode	Carrier Frequency GHz	Carrier Field Strength dB $\mu$ V/m	Limit for Spurious Outside Restricted Band (Carrier F S -20dB) dB $\mu$ V/m
Mode 1 (RLAN)	2412	97.5	77.5
Mode 1 (RLAN)	2437	99.9	79.9
Mode 1 (RLAN)	2462	100.0	80.0
Mode 2 (Bluetooth)	2402	108.0	88.0
Mode 2 (Bluetooth)	2441	107.6	87.6
Mode 2 (Bluetooth)	2480	100.3	80.3

In accordance with FCC Public Notice DA 00-705, Released 30<sup>th</sup> March 2003, Section 15.247(c) Spurious Radiated Emissions "If the dwell time per channel of the hopping signal is less than 100ms, then the reading obtained with the 10Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100\text{ms})$ , in an effort to demonstrate compliance with the 15.209 limit the following adjustment has been calculated for use with Average Measurements only;

Dwell Time = 5.81ms this is derived from;

Total slot time per time slot for DH5 packet  $625\mu\text{s} \times 5 = 3.125\text{ms}$

Actual transmit time during this time slot is 2.905ms and the reply time slot after each DH5 packet is 625 $\mu$ s.

Total time slot length per channel  $3.125 + 0.625 = 3.75\text{ms}$

Multiply Total time slot length per channel by 32 channels per hop sequence  $32 \times 3.75 = 120\text{ms}$

It is therefore possible to have a maximum of two hop sequences in any given 100ms period, a single channel could occur twice within any 100ms time window.  $2 \times 2.905 = 5.81\text{ms}$

Therefore; the Bluetooth Duty Cycle Correction Factor for the EUT is  $20 \log (5.81/100) = -24.7\text{dB}$



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results

#### 30MHz - 1GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(c), 15.205 and 15.209 for Radiated Emissions (30MHz – 1GHz).

#### **EUT Tx on Bottom Channel (2412MHz)**

Measurements were made with the EUT in Mode 1 (RLAN).

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
46.66	V	100	10	19.3	9.2	40.0	100
59.11	V	100	76	17.9	7.8	40.0	100
413.5	V	100	38	22.5	13.3	46.0	200
456.9	V	100	97	24.7	17.2	46.0	200
527.2	V	100	5	27.6	24.0	46.0	200
574.5	V	100	327	25.7	19.3	46.0	200

#### **EUT Tx on Middle Channel (2437MHz)**

Measurements were made with the EUT in Mode 1. (RLAN).

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
46.81	V	100	350	19.5	9.4	40.0	100
60.20	V	100	65	18.1	8.0	40.0	100
413.1	V	100	37	22.4	13.2	46.0	200
456.9	V	100	100	24.6	17.0	46.0	200
527.2	V	100	9	27.1	22.6	46.0	200
574.9	V	100	315	26.0	20.0	46.0	200



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results

#### 30MHz - 1GHz Frequency Range

#### EUT Tx on Top Channel (2462MHz)

Measurements were made with the EUT in Mode 1. (RLAN).

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
46.7	V	100	350	20.0	10.0	40.0	100.0
60.0	V	100	60	18.0	7.9	40.0	100.0
413.0	V	100	30	23.4	14.8	46.0	200.0
456.9	V	100	105	25.6	19.1	46.0	200.0
527.0	V	100	10	27.3	23.2	46.0	200.0
574.1	V	100	332	25.2	18.2	46.0	200.0



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results

#### 30MHz - 1GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(c), 15.205 and 15.209 for Radiated Emissions (30MHz – 1GHz).

#### **EUT Tx on Bottom Channel (2402MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
527.2	V	106	350	28.8	27.5	46.0	200
544.5	V	100	31	25.9	19.7	46.0	200
556.5	V	100	20	26.5	21.1	46.0	200
587.1	V	100	27	26.8	21.9	46.0	200
606.7	V	100	321	25.5	18.8	46.0	200
623.0	H	231	30	29.3	27.2	46.0	200

#### **EUT Tx on Middle Channel (2441MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
527.1	V	100	27	28.2	25.7	46.0	200
544.1	V	107	337	26.3	20.7	46.0	200
556.5	V	100	28	26.3	20.7	46.0	200
587.2	V	100	308	26.4	20.9	46.0	200
605.8	V	100	36	24.9	17.6	46.0	200
623.0	H	221	347	29.7	30.5	46.0	200



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results – continued

#### 30MHz - 1GHz Frequency Range

#### **EUT Tx on Top Channel (2480MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Emission Frequency	Pol	Hgt	Azm	Field Strength at 3m		Specification Limit	
				MHz	H/V	cm	deg
527.0	V	100	25	28.0	25.1	46.0	200.0
544.2	V	100	332	26.7	21.6	46.0	200.0
556.5	V	100	25	26.9	22.1	46.0	200.0
587.1	V	100	322	26.9	22.1	46.0	200.0
606.0	V	100	30	25.2	18.2	46.0	200.0
623.0	H	227	335	29.6	30.2	46.0	200.0

#### **ABBREVIATIONS FOR ABOVE TABLES**

H Horizontal Polarisation  
 Pol Polarisation  
 deg degree

V Vertical Polarisation  
 Hgt Height  
 Azm Azimuth



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results - continued

#### 1GHz - 25GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(c), 15.205 and 15.209 for Radiated Emissions (1GHz – 25GHz).

#### **EUT Tx on Bottom Channel (2412MHz)**

Measurements were made with the EUT in Mode 1. (RLAN).

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2.484	V	100	227	56.5	74.0	46.4	54.0
4.824	V	132	217	61.1	74.0	47.2	54.0

#### **EUT Tx on Middle Channel (2437MHz)**

Measurements were made with the EUT in Mode 1. (RLAN).

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.874	V	103	211	60.4	74.0	46.0	54.0

#### **EUT Tx on Top Channel (2462MHz)**

Measurements were made with the EUT in Mode 1. (RLAN).

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.923	V	105	212	65.3	74.0	52.5	54.0





## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results - continued

#### 1GHz - 25GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(c), 15.205 and 15.209 for Radiated Emissions (1GHz – 25GHz).

#### **EUT Tx on Bottom Channel (2402MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.804	H	112	232	54.0	74.0	21.1*	54.0
4.716	H	100	62	58.2	74.0	25.2*	54.0
7.205	H	100	63	74.2	88.0	N/A	N/A

\* Note these results have been corrected using the Bluetooth Duty Cycle Correction Factor for the EUT, as calculated on page 18 of this report.

Note: The Measurements in the above table marked N/A are Not Applicable because the frequency does not fall within the Restricted Band (15.205) and hence Average Measurements are not required.



## 2.3 SPURIOUS RADIATED EMISSIONS – continued

### 2.3.6 Test Results - continued

#### 1GHz - 25GHz Frequency Range - continued

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.247(c), 15.205 and 15.209 for Radiated Emissions (1GHz – 25GHz).

#### **EUT Tx on Middle Channel (2441MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.882	V	-	-	28.3*	74.0	N/A	N/A
7.323	V	-	-	27.4*	85.2	N/A	N/A

**\*Noise Floor measurements only detected.**

Note: The Measurements in the above table marked N/A are Not Applicable because the frequency does not fall within the Restricted Band (15.205) and hence Average Measurements are not required.



**2.3 SPURIOUS RADIATED EMISSIONS – continued**

**2.3.6 Test Results – continued**

**1GHz - 25GHz Frequency Range**

**EUT Tx on Top Channel (2480MHz)**

Measurements were made with the EUT in Mode 2. (Bluetooth)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height	Azimuth				
GHz	H/V	cm	deg	dBµV/m	dBµV/m	dBµV/m	dBµV/m
4.959	H	100	204	49.3	74.0	16.9*	54.0

\* Note these results have been corrected using the Bluetooth Duty Cycle Correction Factor for the EUT, as calculated on page 18 of this report.

**ABBREVIATIONS FOR ABOVE TABLES**

H	Horizontal Polarisation	V	Vertical Polarisation
Pol	Polarisation	Hgt	Height
deg	degree	Azm	Azimuth



### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

Item	Instrument	Manufacturer	Type No	Serial No	EMC / INV No	Cal. Due
Section 2.1						
1	Turntable & Controller	H-D	HD 050	050/396	2528	TU
2	Antenna Mast	EMCO	2070	-	-	TU
3	Antenna Mast Controller	EMCO	2090	-	-	TU
4	Screened Room 5	SIE	EAC54300	NA	2533	TU
5	High Pass Filter	RLC	F-100-3000-5-R	-	4467	TU
6	Low Noise Amplifier	MIQ	AMF-3D-001080-18-13P	-	2457	TU
7	Test Receiver	ROH	ESIB 40	100181	2972	08/11/2004
8	Horn Antenna	EMC	3115	96964848	2297	04/07/2004
9	Horn Antenna	EMC	3115	97015079	500	04/07/2004
10	Signal Generator	HEW	8672A	2016A01097	411	26/02/2004
11	Aneroid Barometer	VAR	DIPLEX	B05/1-04B04	1938	TU
12	Hygromer	RTC	A1	10400016	4066	28/08/2004
13	Amplifier	AVA	AWT-18036	F133658452	1081	26/06/2004
14	Amplifier	AVA	AMT-26177-33	6669	2072	26/06/2004
15	Horn Antenna	FLA	2024-20	164	1396	TU
16	Peak Power Meter	HEW	8990A	3107A00124	1670	14/08/2004
17	Peak Power Meter Probe	HEW	84812A	3107A00126	1662	14/08/2004



### 3.1 TEST EQUIPMENT USED – Continued

Item	Instrument	Manufacturer	Type No	Serial No	EMC / INV No	Cal. Due
Section 2.2 and 2.3						
1	Turntable & Controller	H-D	HD 050	050/396	2528	TU
2	Antenna Mast	EMCO	2070	-	-	TU
3	Antenna Mast Controller	EMCO	2090	-	-	TU
4	Screened Room 5	SIE	EAC54300	NA	2533	TU
5	High Pass Filter	RLC	F-100-3000-5-R	-	4467	TU
6	Low Noise Amplifier	MIQ	AMF-3D-001080-18-13P	-	2457	TU
7	Test Receiver	ROH	ESIB 40	100181	2972	08/11/2004
8	Horn Antenna	EMC	3115	96964848	2297	04/07/2004
9	Horn Antenna	EMC	3115	97015079	2397	04/07/2004
10	Signal Generator	HEW	8672A	2016A01097	411	26/02/2004
12	Hygromer	RTC	A1	10400016	4066	28/08/2004
14	Amplifier	AVA	AMT-26177-33	6669	2072	26/06/2004
15	Horn Antenna	FLA	2024-20	164	1396	TU
18	Signal Generator	ROH	SMT03	848161/006	2449	09/04/2004
19	Signal Generator	HEW	8673B	2147A00423	954	04/06/2004
20	Hygromer	ORE	BA116	-	Lab 2	TU
21	Hygromer	RTC	A1	643-29	4066	28/08/2004

#### Key To Manufacturers

AVA	Avantek	EMC	Emco
FLA	Flann	H-D	No Data
HEW	Hewlett Packard	MIQ	Miteq Corp
ORE	Oregon	RLC	RLC Electronics
ROH	Rohde & Schwarz	RTC	Rotronic
SEM	Sematron	SCH	Schaffner
SIE	Siemens	VAR	Various
TU	Traceability Unscheduled		



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

<b>IN THE FREQUENCY RANGE 30MHz TO 1000MHz</b>		
<b>TEST</b>	<b>FREQUENCY</b>	<b>AMPLITUDE</b>
For Radiated Emissions, Quasi-Peak Measurements taken in Zero Span using the Hewlett Packard EMI Receiver and Bilog Antenna	$\pm 2 \times 10^{-7} \times$ Centre Frequency	5.15dB calculated in accordance with CISPR 16-4
<b>IN THE FREQUENCY RANGE 1GHz TO 25GHz</b>		
<b>TEST</b>	<b>FREQUENCY</b>	<b>AMPLITUDE</b>
For Spurious Radiated Emissions measurements	$\pm 2 \times 10^{-7} \times$ Centre Frequency	$\pm 3.4$ dB
For Effective Radiated Power (ERP) measurements	Not Applicable	$\pm 1.45$ dBm



## **SECTION 4**

### **EUT PHOTOGRAPH**





**EUT PHOTOGRAPH**



Front View



## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2004 TÜV Product Service Limited



## **APPENDIX A**

### **TITCHFIELD FCC SITE COMPLIANCE LETTER**



## FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046

October 18, 2002

Registration Number: 90987

TUV Product Service Ltd  
Segensworth Road  
Titchfield  
Fareham, Hampshire, PO15 5RH  
United Kingdom  
Attention: Kevan Adsetts

Re: Measurement facility located at Titchfield  
Anechoic chamber (3 meters) and 3 & 10 meter OATS  
Date of Listing: October 18, 2002

Gentlemen:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Thomas W Phillips  
Electronics Engineer