

PCTEST ENGINEERING LABORATORY, INC.

6660 – B Dobbin Road · Columbia, MD 21045 · USA
Telephone 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com> (email: randy@pctestlab.com)



CERTIFICATE OF COMPLIANCE

MANUFACTURER NAME & ADDRESS:

Symbol Technologies, Inc.
One Symbol Plaza MS B5
Holtsville, NY 11742-1300

DATE & LOCATION OF TESTING:

Date(s) of Tests: April 15-28, 2005
Test Report S/N: 0504120253
Test Site: PCTEST Lab, Columbia, MD

| | |
|-------------------|----------------------------------|
| FCC ID: | H9PMC9090 |
| APPLICANT: | SYMBOL TECHNOLOGIES, INC. |

SUMMARY:

Model No(s): MC9090-KKOH9AFFA7WW/-SKOH9AFA7WW/-GKOHBEGA7WW
Equipment EUT Type: Handheld Terminal
Max. Output Power: 0.96 mW (-0.18 dBm)
Frequency Range: 2402 – 2480 MHz
FCC Classification: FCC Part 15 Frequency Hopping Spread Spectrum Transceiver (DSS)
FCC Rule Part(s): Parts 15.247; ANSI C-63.4-2001

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2001. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. The EUT complies with Industry Bluetooth Standards. The JBC portion of this EUT is covered in the DOC report. The WLAN tested for this filing has previously been certified under Symbol FCC ID: H9P2121160. The unit comes in three model types. Each type has its own body worn accessory. All were evaluated for SAR. S/N: ALP8163 was evaluated first and engineering judgments were from this unit with respect to channel and data rate worse cases.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



Model:
KKOH9AFFA7WW



Model:
KKOHBEGA7WW



Model:
SKOH9AFA7WW



TABLE OF CONTENTS


| | |
|---|-------|
| ATTESTATION STATEMENTS..... | 1 |
| FCC PART 15.247 MEASUREMENT REPORT COVER PAGE | 2 |
| 1.0 INTRODUCTION..... | 3 |
| 1.1 EVALUATION PROCEDURE..... | 3 |
| 1.2 SCOPE | 3 |
| 1.3 PCTEST TEST LOCATION..... | 3 |
| 2.0 PRODUCT INFORMATION | 4 |
| 2.1 EQUIPMENT DESCRIPTION..... | 4 |
| 2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS..... | 4 |
| 3.0 DESCRIPTION OF TEST | 5 |
| 3.1 CONDUCTED EMISSIONS..... | 5 |
| 3.2 RADIATED EMISSIONS | 6 |
| 4.0 ANTENNA REQUIREMENTS | 7 |
| 5.0 TEST EQUIPMENT CALIBRATION DATA..... | 8 |
| 6.0 CONCLUSION | 9 |
| EXHIBIT A – TEST RESULTS..... | 10 |
| SUMMARY..... | 10 |
| 20DB BANDWIDTH MEASUREMENT (HANDSET)..... | 11 |
| OUTPUT POWER MEASUREMENT..... | 14 |
| BAND EDGE COMPLIANCE | 17 |
| CARRIER FREQUENCY SEPARATION | 18 |
| DWELL TIME..... | 19 |
| CHANNEL HOPPING | 20 |
| RADIATED HARMONIC MEASUREMENTS (CONT.)..... | 21-25 |
| LINE-CONDUCTED TEST DATA..... | 26 |
| EXHIBIT B – LABELING REQUIREMENTS..... | 27 |
| EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS | 29 |
| EXHIBIT D – OPERATIONAL DESCRIPTION | 30 |
| EXHIBIT E – TEST SETUP PHOTOGRAPHS | 31 |
| EXHIBIT F – EUT EXTERNAL/ INTERNAL PHOTOGRAPHS..... | 32 |
| EXHIBIT G – USER’S MANUAL | 33 |
| EXHIBIT H – SAR MEASUREMENT REPORT | 34 |
| EXHIBIT I – SUPPLEMENTAL 15C WLAN REPORT | 35 |
| EXHIBIT J – SUPPLEMENTAL 15E WLAN REPORT | 36 |

Attestation Statements

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 1 of 36 |



MEASUREMENT REPORT



FCC Part 15.247 Measurement Report Cover Page

A. General Information

APPLICANT Symbol Technologies INC.
APPLICANT ADDRESS One Symbol Plaza, MS:B5
 Holtsville, NY 11742-1300

TEST SITE PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S) Parts 15.247; ANSI C-63.4-2001
MODEL NAME MC9090-KKOH9AFFA7WW/-SKOH9AFA7WW/-GKOHBEGA7WW
FCC ID H9PMC9090
Test Device Serial No.: S/N: ALP81763 Production Pre-Production Engineering
FCC CLASSIFICATION FCC Part 15 Spread Spectrum Transceiver (DSS)
Method/ System: DSS Sequence Spread Spectrum (FHSS)
DATE(S) OF TEST April 12-15, 2005
TESTS REPORT S/N: 0504120253

A.1 Test Facility / NVLAP Accreditation

Measurements were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 2 of 36 |

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2001) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Symbol MC9090 WLAN and Bluetooth**.

Deviation from measurement procedure.....NONE

1.2 Scope

Measurement & determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.2-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

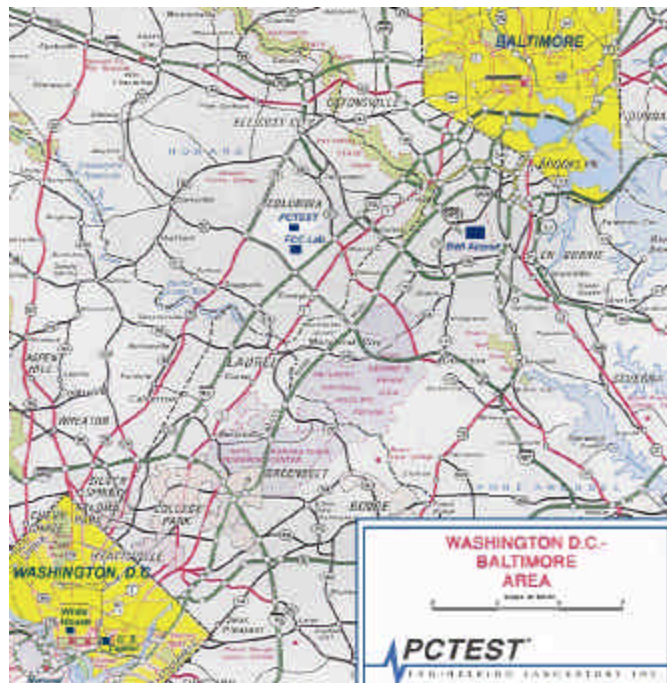


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 3 of 36 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the *Symbol MC9090 WLAN and Bluetooth*.

- . The EUT consisted of the following component(s):

Table 2-1. EUT Equipment Description

| Manufacturer / Model / Description | Serial Number |
|---|---------------|
| Handheld Terminal with WLAN and Bluetooth | ALP81763 |

2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 4 of 36 |

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions




Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

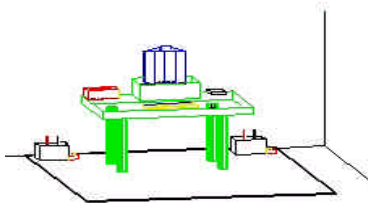


Figure 3.1-2. Line Conducted Emission Test Set-Up

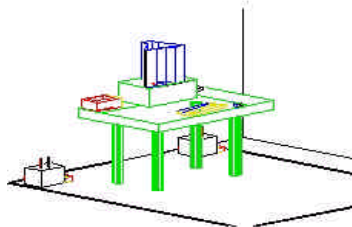


Figure 3.1-3. Wooden Table & Bonded LISNs

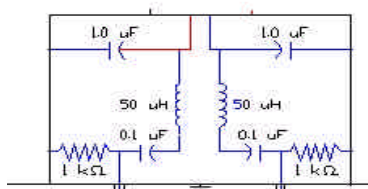


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150kHz to 30Mhz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H patter to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640B signal generator.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 5 of 36 |

3.2 Radiated Emissions

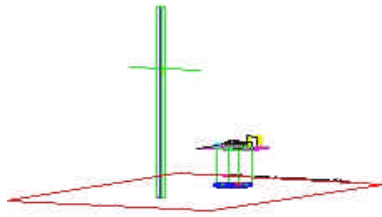


Figure 3.2-1. Meter Test Site

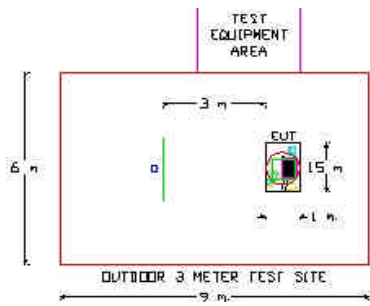


Figure 3.2-2. Dimensions of Outdoor Test Site

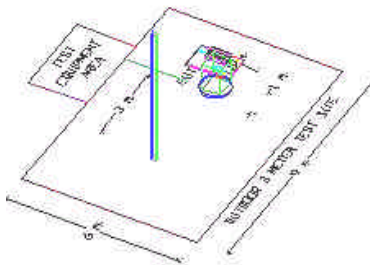


Figure 3.2-3. Turntable and System Setup

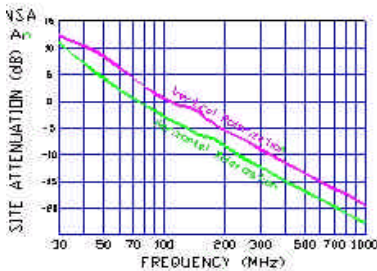


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using bi-conical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 6 of 36 |

4.0 ANTENNA REQUIREMENTS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The antennas are **permanently attached antenna** for stand alone operation

Conclusion:

The **SYMBOL MC9090** unit complies with the requirement of §15.203.

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 0 | 2402 |
| : | : |
| 39 | 2441 |
| : | : |
| 78 | 2480 |

Table 4.1 Frequency/ Channel Operations

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 7 of 36 |

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| TYPE | MODEL | CAL. DUE DATE | CAL. INTERVAL | SERIAL No. |
|--------------------------------------|--------------------------------|---------------|---------------|---------------------------|
| Microwave Spectrum Analyzer | HP 8566 (100Hz-22GHz) | 12/05/05 | Annual | 3638A08713 |
| Microwave Spectrum Analyzer | HP 8566 (100Hz-22GHz) | 04/17/06 | Annual | 2542A11898 |
| Spectrum Analyzer/Tracking Generator | HP 8591A (9kHz-1.8GHz) | 06/02/05 | Annual | 3144A02458 |
| Spectrum Analyzer | HP 8591A (9kHz-1.8GHz) | 10/15/05 | Annual | 3108A02053 |
| Spectrum Analyzer | HP 8594A (9kHz-2.9GHz) | 11/02/05 | Annual | 3051A00187 |
| Signal Generator | HP 8650B (500Hz-1GHz) | 06/02/05 | Annual | 2232A19558 |
| Signal Generator | HP 8640B (500Hz-1GHz) | 06/02/05 | Annual | 1851A09816 |
| Signal Generator | Rohde & Schwarz (0.1-1GHz) | 09/22/05 | Annual | 894215/012 |
| Ailtech/Eaton Receiver | NM 37/57A-SL (30MHz-1GHz) | 04/12/06 | Annual | 0792-03271 |
| Ailtech/Eaton Receiver | NM 37/57A (30MHz-1GHz) | 03/11/06 | Annual | 0805-03334 |
| Ailtech/Eaton Receiver | NM 17/27A (0.1-32MHz) | 09/17/05 | Annual | 0608-03241 |
| Quasi-Peak Adapter | HP 85650A | 08/09/05 | Annual | 2043A00301 |
| Ailtech/Eaton Adapter | CCA-7 CISPR/ANSI QP Adapter | 03/11/06 | Annual | 0194-04082 |
| RG58 Coax Test Cable | No.167 | | | n/a |
| Harmonic/Flicker Test System | HP 6841A (IEC 555-2/3) | | | 3531A00115 |
| Broadband Amplifier (2) | HP 8447D | | | 1145A00470, 1937A03348 |
| Broadband Amplifier | HP 8447F | | | 2443A03784 |
| Transient Limiter | HP 11947A (9kHz-200MHz) | | | 2820A00300 |
| Horn Antenna (2) | EMCO Model 3115 (1-18GHz) | | | 9704-5182, 9205-3874 |
| Horn Antenna | EMCO Model 3116 (18-40GHz) | | | 9203-2178 |
| Biconical Antenna (3) | Eaton 94455-1 | | | 1295, 1332, 1277 |
| Log-Spiral Antenna (2) | Ailtech/Eaton 93490-1 | | | 0227, 1104 |
| Log-Spiral Antenna | Singer 93490-1 | | | 147 |
| Roberts Dipoles | Compliance Design (1 set) A100 | | | 5118 |
| Ailtech Dipoles | DM-105A (1set) | | | 33448-111 |
| EMCO LISN (3) | 3816/2, 3816/2, 3725/2 | | | 1077, 1079, 2099 |
| 50-ohm Terminator | n/a | | | n/a |
| Microwave Preamp 40dB Gain | HP 83017A (0.5-26.5GHz) | | | 3123A00181 |
| Microwave Cables | MicroCoax (1.0-26.5GHz) | | | n/a |
| Ailtech/Eaton Receiver | NM37/57A-SL | | | 0792-03271 |
| Spectrum Analyzer | HP 8591A | | | 3034A01395 |
| Modulation Analyzer | HP 8901A | | | 2432A03467 |
| NTSC Pattern Generator | Leader 408 | | | 0377433 |
| Noise Figure Meter | HP 8970B, Ailtech 7510 | | | 3106A02189, TE31700 |
| Noise Generator | Ailtech 7010 | | | 1473 |
| Microwave Survey Meter | Holiday Model 1501 (2.45GHz) | | | 80931 |
| Digital Thermometer | Extech Instruments 421305 | | | 426966 |
| Attenuator | HP 8495A (0-70dB) DC-4GHz | | | |
| Bi-Directional Coax Coupler | Narda 3020A (50-1000MHz) | | | |
| Shielded Screen Room | RF Lindgren Model 26-2/2-0 | | | 6710 (PCT270) |
| Shielded Semi-Anechoic Chamber | Ray Proof Model S81 | | | R2437 (PCT278) |
| Environmental Chamber | Associated Systems 1025 | | | PCT285 |
| OATS | n/a | 12/31/2005 | Tri-annual | |

Table 5-1. Annual Test Equipment Calibration Schedule

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 8 of 36 |

6.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **SYMBOL MC9090 with Bluetooth** is in compliance with Part 15C of the FCC Rules.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 9 of 36 |

EXHIBIT A – Test Results

Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.

Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Method/System: Frequency Hopping Spread Spectrum (FHSS)

Number of channels: 79

| FCC Part Section(s) | RSS 210 Section | Test Description | Test Limit | Result |
|------------------------------|------------------------|---|--|--------|
| TRANSMITTER MODE (TX) | | | | |
| 15.247(a)(2) | | 20dB Bandwidth | > 1 MHz | Pass |
| 15.247(b) | 6.22(o)(a3) | Transmitter Output Power | < 1 Watt | Pass |
| 15.247(c) | 5.9.1 6.2.2(o) (e1) | Occupied BandEdge Out-of-Band Emissions (BandEdge at 20dB below) | Radiated <20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.207 | Pass |
| 15.205 15.209 | 6.2.1 6.3 | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | < FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Pass |
| 15.207 | 6.6 | AC Conducted Emissions 150kHz – 30MHz | EN55022 | Pass |
| RECEIVER MODE (RX) | | | | |
| 15.207 | 7.4 | AC Conducted Emissions 150kHz – 30MHz | Class B = 250µV | Pass |
| 15.209 | 7.3 | General Field Strength Limits (Restricted Bands and Radiated Emissions Limits) | < FCC 15.209 limits or < RSS-210 table 3 limits | Pass |

Table A-1. Summary of Test Results

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 10 of 36 |

EXHIBIT A – Test Results (Cont.)

20dB Bandwidth Measurement (Handset)

§15.247(a)(2)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

The spectrum analyzer is set to:

- RBW = 30 kHz (10dB/div)
- VBW = 30 kHz
- Span = 2 MHz
- Ref. Level = -52 dBm
- Sweep = 5 ms

| Frequency (MHz) | Channel No. | Test Results | |
|-----------------|-------------|----------------------|-----------|
| | | 20dB Bandwidth (kHz) | Pass/Fail |
| 2402 | 0 | 920 | Pass |
| 2441 | 39 | 930 | Pass |
| 2480 | 78 | 935 | Pass |

– See next pages for actual measured spectrum plots

Table A-2. Radiated Bandwidth Measurements




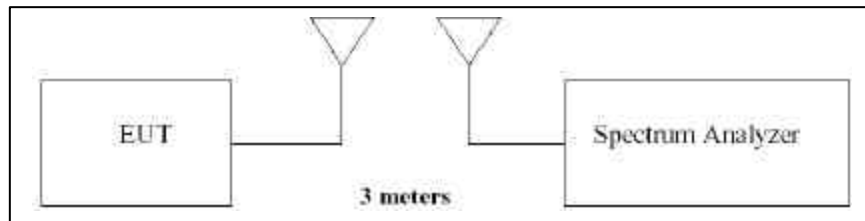


Figure A-1. Test Instrument & Measurement Setup

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 11 of 36 |

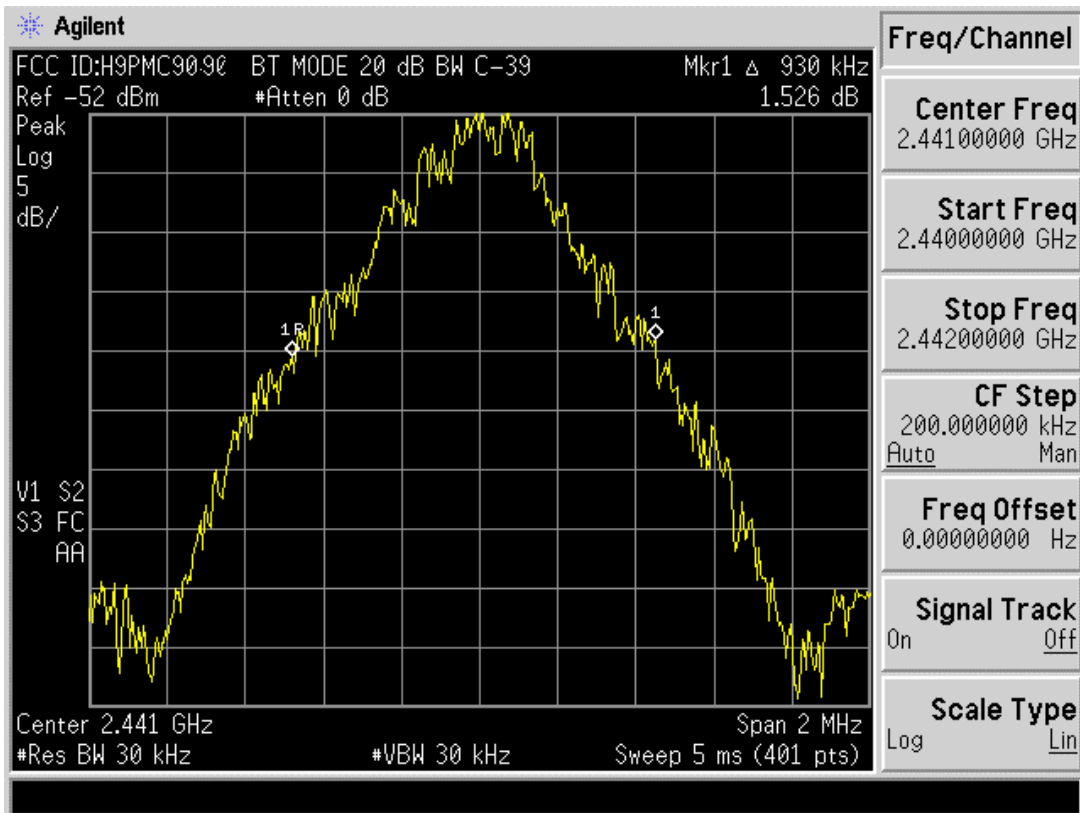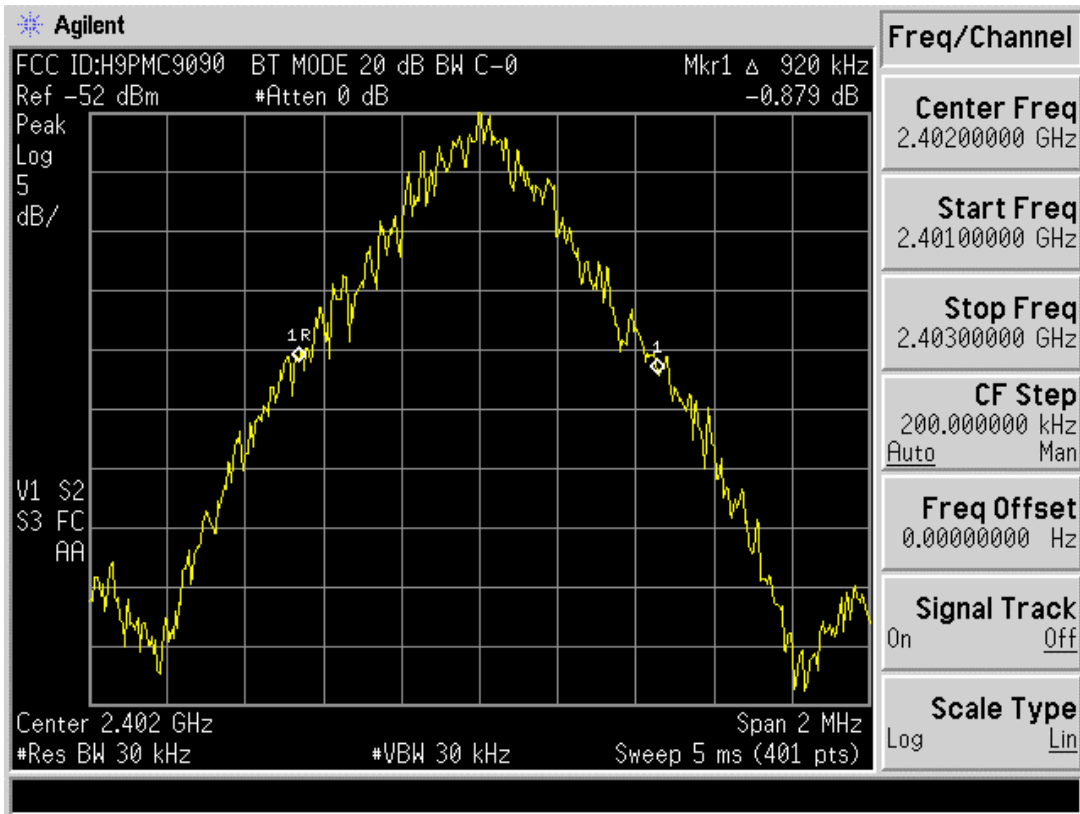

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 12 of 36 |

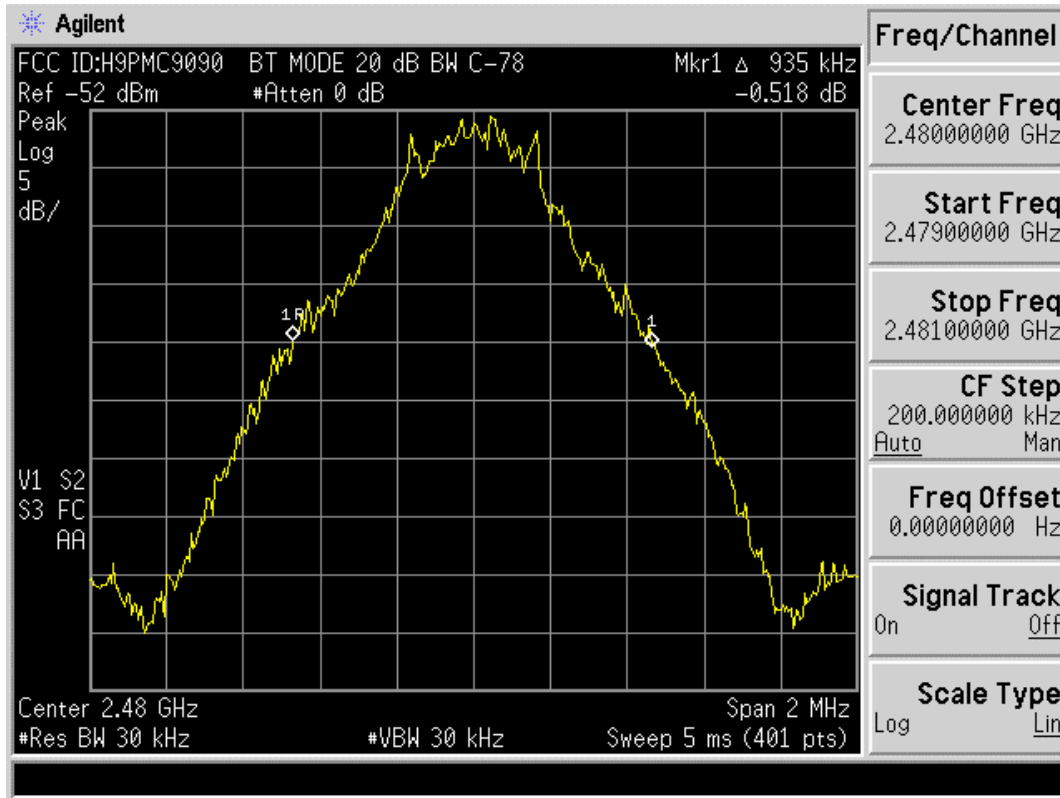

| | | | | |
|----------------------------------|---|--------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: | Test Dates: | d Terminal | FCC ID: H9PMC9090 | Page 13 of 36 |

EXHIBIT A – Test Results (Cont.)

Output Power Measurement

§15.247(b)

Measurement is made while the EUT is operating in non-hopping transmission mode

Minimum Standard – The transmitter peak output power shall not exceed 1 watt.

Spectrum Analyzer plots are for reference only actual Conducted power measurements were taken with a power meter.

Power out Calculation Example:

The 3 meter Spectrum Analyzer reading at 2402 MHz = -46.86 dBm or 60.14 dBuV AFCL = 36.9 dB. FS is 97.04 dBuV/m or 71,121.4 uV/m. The Handset antenna gain = 2 dBi which yields a numerical gain of 1.58.

Using the Equation $P = (E*d)^2/(30*G)$ Output Power = 0.96 mW

| Frequency (MHz) | Channel No. | Conducted Power | |
|-----------------|-------------|-----------------|------|
| | | dBm | mW |
| 2402.00 | 0 | -0.18 | .96 |
| 2441.00 | 39 | -1.02 | .50 |
| 2480.00 | 78 | -1.90 | -.65 |

Table A-3. Output Power Measurements




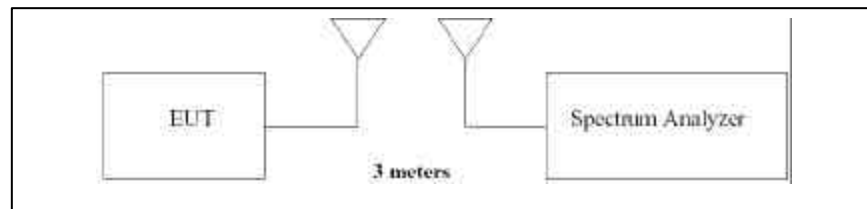


Figure A-3. Test Instrument & Measurement Setup

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 14 of 36 |

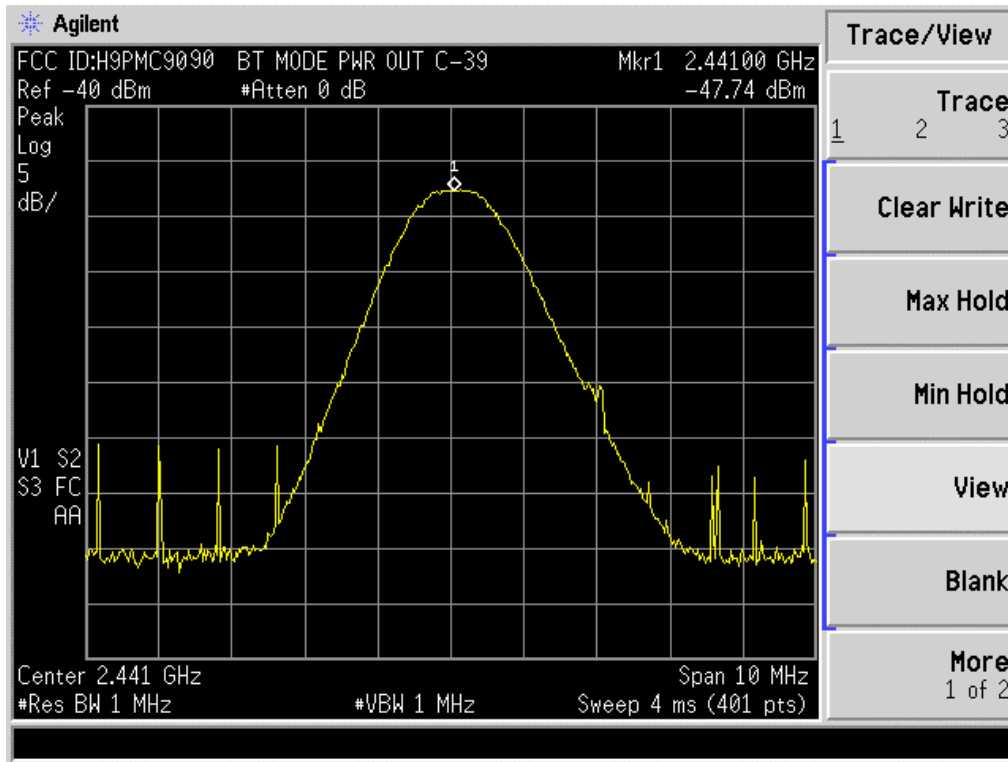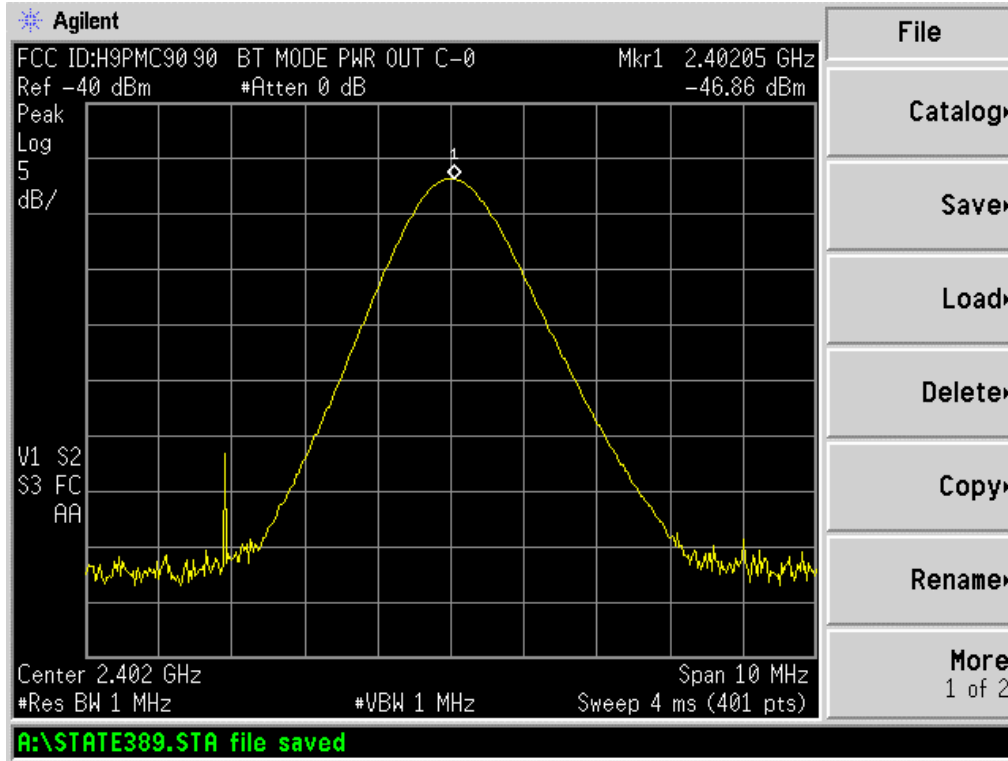



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 15 of 36 |

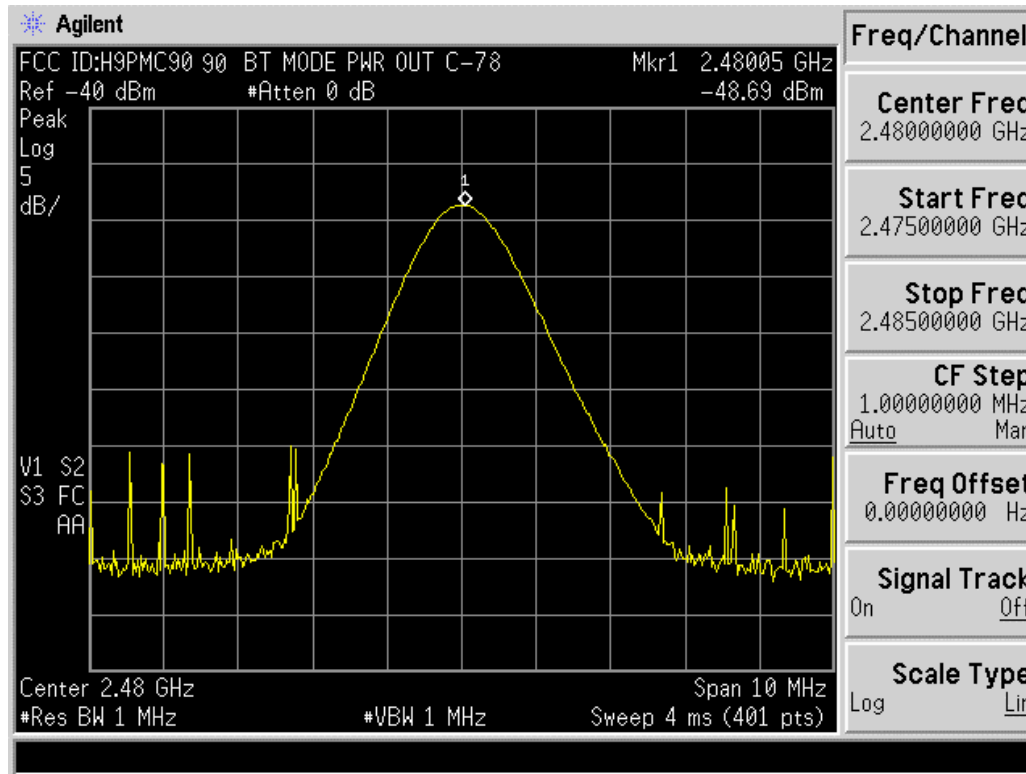

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 16 of 36 |

EXHIBIT A – Test Results (Cont.)


Band Edge Compliance

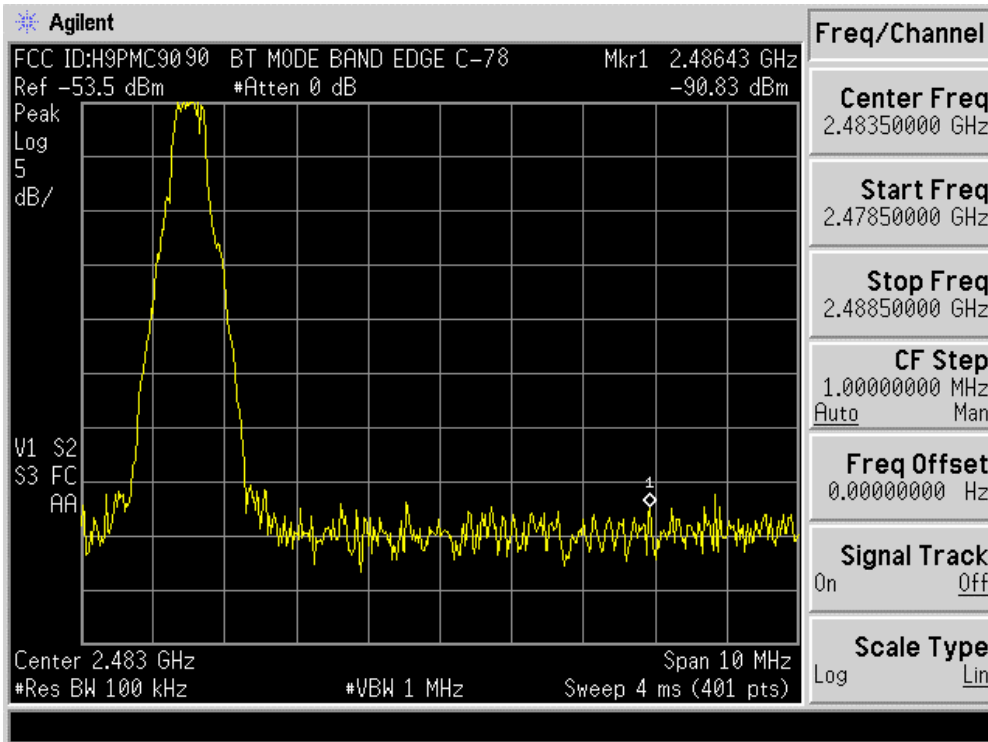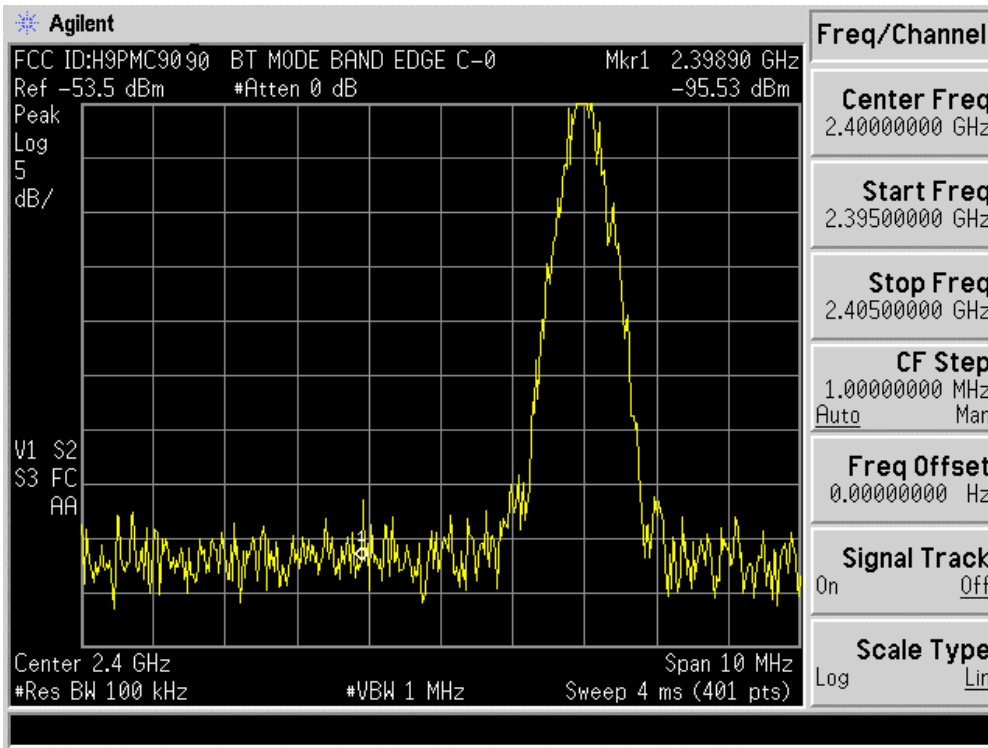

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 17 of 36 |

EXHIBIT A – Test Results (Cont.)

Carrier Frequency Separation

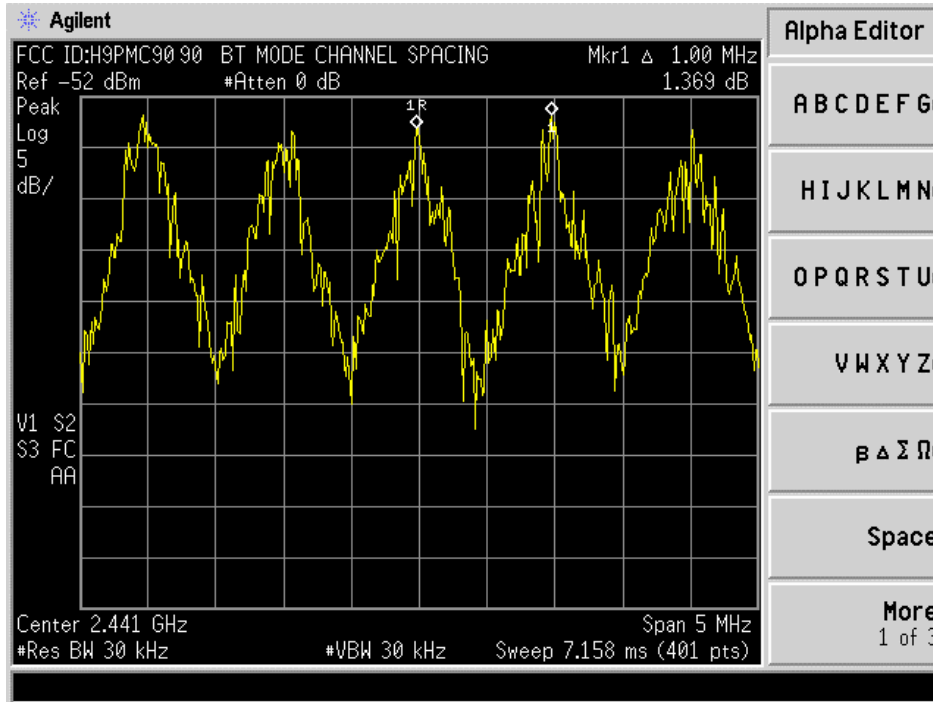


| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 18 of 36 |

EXHIBIT A – Test Results (Cont.)

Dwell Time

§15.247(b) / §15.205 & §15.209

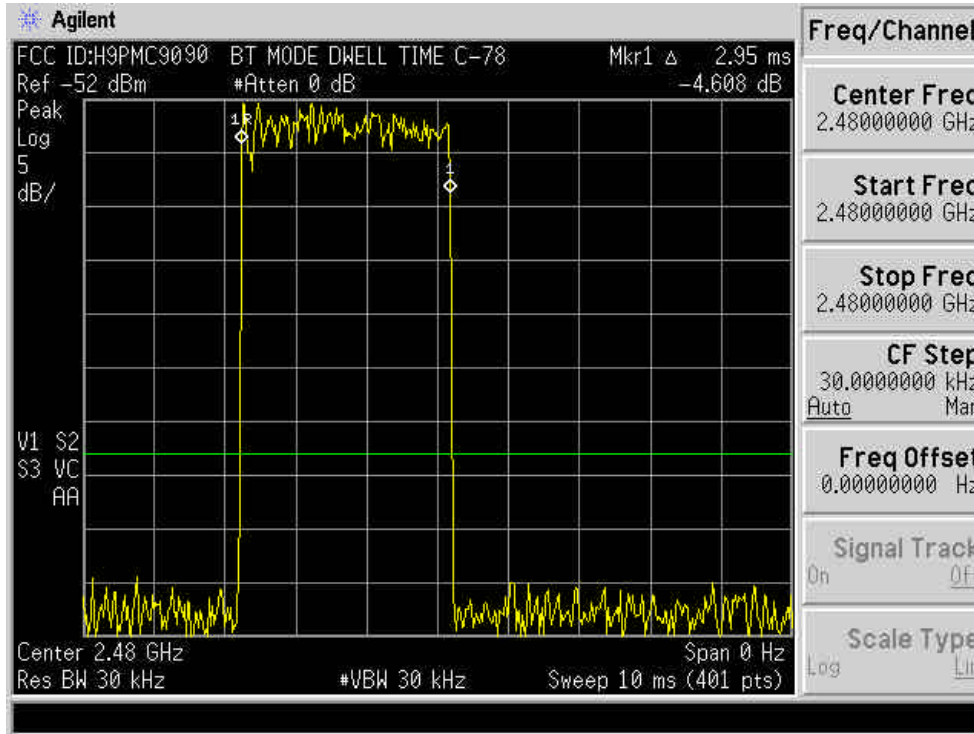


| | | | | |
|----------------------------------|----------------------------------|-----------------------------|----------------------|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 | | FCC CERTIFICATION REPORT | | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 19 of 36 |

EXHIBIT A – Test Results (Cont.)

Channel Hopping

§15.247(b) / §15.205 & §15.209

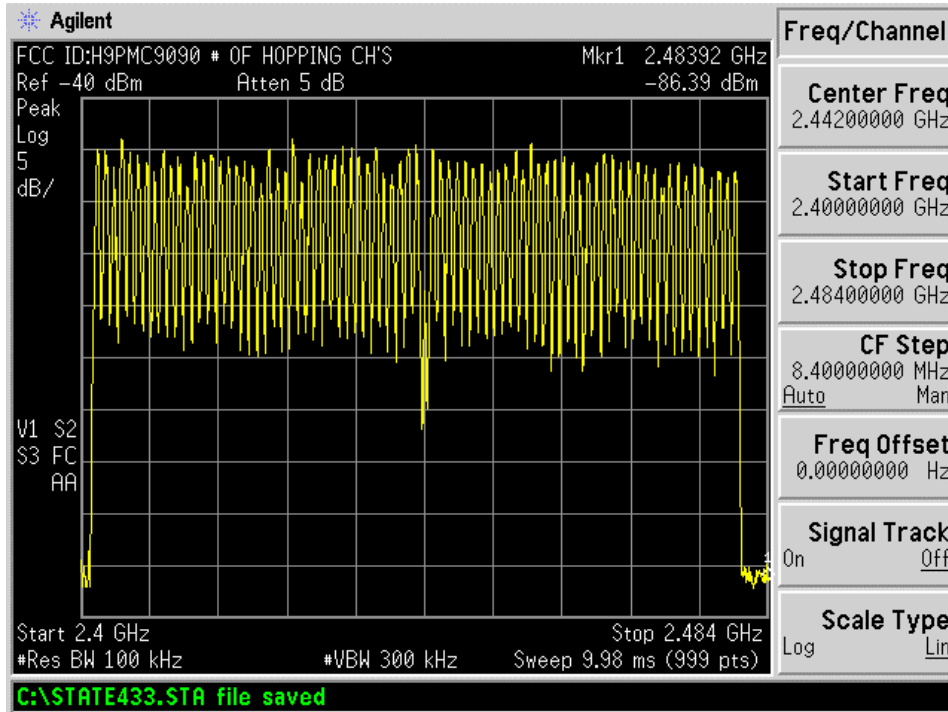

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 20 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 00

| FREQ. (MHz) | LEVEL (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (MV/m) | MARGIN (dB) |
|----------------|----------------|--------------|--------------|-----------------|---------------|----------------|
| 4804.00 | -101.20 | 40.4 | V | 46.2 | 203.9 | -7.8 |
| 7206.00 | -112.10 | 47.4 | V | 42.3 | 130.6 | -11.7 |
| 9608.00 | -129.00 | 50.3 | V | 28.3 | 26.0 | -25.7 |
| 12010.00 | -135.00 | 53.7 | V | 25.7 | 19.3 | -28.3 |

Table A-8. Harmonic Measurements

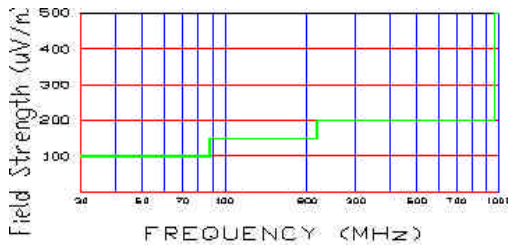


Figure A-7. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dBu/m) at 3 meters radiated.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 21 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 39

| FREQ. (MHz) | LEVEL (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (MV/m) | MARGIN (dB) |
|----------------|----------------|--------------|--------------|-----------------|---------------|----------------|
| 4882.00 | -100.40 | 40.5 | V | 47.1 | 226.5 | -6.9 |
| 7323.00 | -110.30 | 48.0 | V | 44.7 | 171.8 | -9.3 |
| 9764.00 | -128.30 | 50.3 | V | 29.0 | 28.2 | -25.0 |
| 12205.00 | -135.00 | 53.7 | V | 25.7 | 19.3 | -28.3 |

Table A-9. Radiated Fundamental & Harmonic Measurements

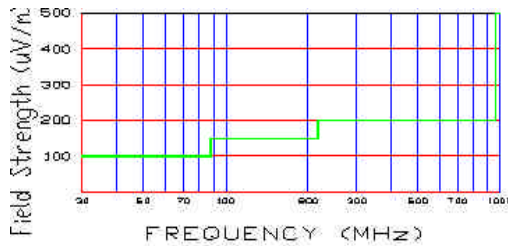


Figure A-8. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 22 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 78

| FREQ. (MHz) | LEVEL (dBm) | AFCL (dB) | POL (H/V) | TOTAL (dBuV/m) | F/S (MV/m) | MARGIN (dB) |
|----------------|----------------|--------------|--------------|-------------------|---------------|----------------|
| 4960.00 | -101.80 | 40.7 | V | 45.9 | 197.2 | -8.1 |
| 7440.00 | -111.20 | 48.2 | V | 44.0 | 158.5 | -10.0 |
| 9920.00 | -128.40 | 50.4 | V | 29.0 | 28.2 | -25.0 |
| 12400.00 | -135.00 | 53.8 | V | 25.8 | 19.5 | -28.2 |

Table A-10. Radiated Fundamental & Harmonic Measurements

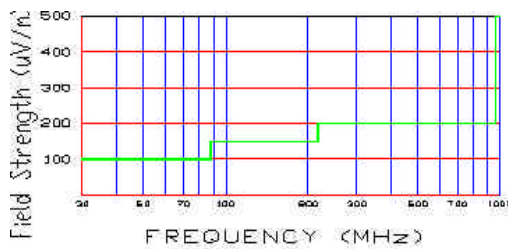


Figure A-9. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 23 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT’s harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.209.

| Frequency | F/S (mV/m) | Measured Distance (Meters) |
|-------------------|---------------|----------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table A-18. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

| | |
|------------------|--|
| Agilent E4448A | PSA Spectrum Analyzer 3 Hz - 50GHz |
| HP 8566B | Spectrum Analyzer 100Hz – 22GHz |
| HP 83017A | Microwave Analyzer 40dB Gain (0.5 – 26.5GHz) |
| HP 3784A | Digital Transmission Analyzer |
| EMCO 3115 | Horn Antenna (1 – 18GHz) |
| HP 8495A | 20dB Attenuator (DC-40GHz) 0 –70dB |
| HP 8493B | 10dB Attenuator |
| MicroCoax Cables | Low Loss Microwave Cables (1 – 26.5GHz) |
| CDI Dipoles | Dipole Antennas (30 – 1000MHz) |
| EMCO 3116 | Horn Antenna (18 – 40GHz) |

| | | |
|----------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  FCC CERTIFICATION REPORT  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal |
| | FCC ID: H9PMC9090 | Page 24 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements (Cont.)

§15.205 / §15.209 courtesy

Operating Frequency: 2480 MHz
 Number of Channels: 78

| FREQ (MHz) | Level (dBm) | AFCL (dB/m) | POL (H/V) | F/S (dB≡V/m) | F/S (uV/M) | Margin (dB) |
|------------|-------------|-------------|-----------|--------------|------------|-------------|
| 2483.7 | -103.6 | 33.0 | V | 36.4 | 66.1 | -17.6 |
| 2484.6 | -104.0 | 33.0 | V | 36.0 | 63.1 | -18.0 |
| 2484.9 | -106.5 | 33.1 | V | 33.6 | 47.9 | -20.4 |
| 2485.1 | -104.0 | 33.1 | V | 36.1 | 63.8 | -17.9 |
| 2493.0 | -108.0 | 33.2 | V | 32.2 | 40.7 | -21.8 |
| 2496.0 | -112.5 | 33.2 | V | 27.7 | 24.3 | -26.3 |

Table A-19. Radiated Restricted Band Measurements at 3-meters

NOTES:


1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500µV/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The peak emissions above 1 GHz are not more than 20 dB above average limit.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 25 of 36 |


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207

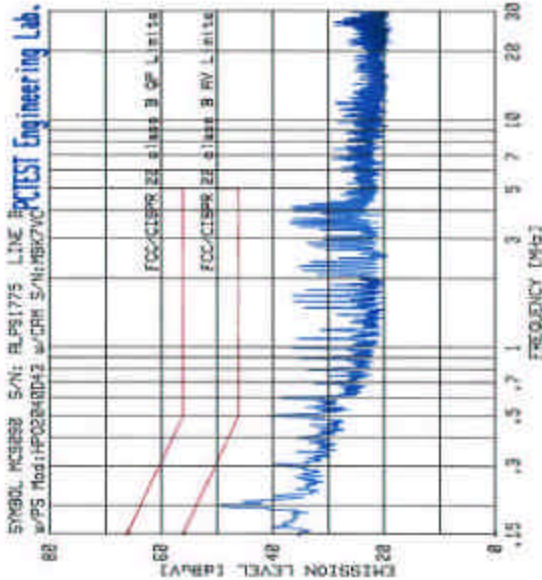

| No. | Freq. [MHz] | Quasi-Pk [dBμV] | Limit [dBμV] | Margin [dB] | Average [dBμV] | Limit [dBμV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | .198 | 47.75 | 63.65 | -15.94 | 48.25 | 53.73 | -13.44 |
| 2 | .498 | 39.37 | 56.03 | -16.66 | 32.03 | 46.04 | -14.01 |
| 3 | .598 | 38.58 | 56.00 | -17.42 | 31.02 | 46.00 | -14.98 |
| 4 | 3.498 | 35.79 | 56.00 | -20.21 | 24.66 | 46.00 | -21.34 |
| 5 | 3.598 | 35.81 | 56.00 | -20.19 | 24.58 | 46.00 | -21.42 |
| 6 | 4.195 | 35.51 | 56.00 | -20.49 | 23.66 | 46.00 | -22.34 |
| 7 | .698 | 35.48 | 56.00 | -20.52 | 27.94 | 46.00 | -18.06 |
| 8 | 1.696 | 34.78 | 56.00 | -21.22 | 27.14 | 46.00 | -18.86 |
| 9 | 1.597 | 34.54 | 56.00 | -21.46 | 26.62 | 46.00 | -19.38 |
| 10 | 3.595 | 36.65 | 56.00 | -19.35 | 23.66 | 46.00 | -22.34 |

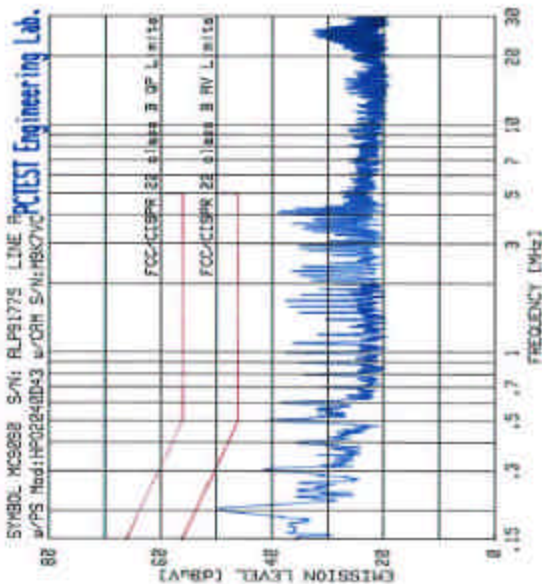

| No. | Freq. [MHz] | Quasi-Pk [dBμV] | Limit [dBμV] | Margin [dB] | Average [dBμV] | Limit [dBμV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | .198 | 45.69 | 63.65 | -17.96 | 35.54 | 53.63 | -18.09 |
| 2 | .498 | 36.79 | 56.03 | -19.24 | 32.44 | 46.03 | -13.59 |
| 3 | 4.095 | 37.79 | 56.00 | -18.21 | 24.13 | 46.00 | -21.87 |
| 4 | .598 | 38.23 | 56.00 | -17.77 | 30.75 | 46.00 | -15.25 |
| 5 | 4.195 | 36.59 | 56.00 | -19.41 | 23.58 | 46.00 | -22.42 |
| 6 | .298 | 36.58 | 56.25 | -19.67 | 28.49 | 50.32 | -21.84 |
| 7 | .998 | 36.33 | 56.00 | -19.67 | 28.77 | 46.00 | -17.23 |
| 8 | 1.696 | 35.66 | 56.00 | -20.34 | 28.14 | 46.00 | -17.86 |
| 9 | 1.597 | 35.50 | 56.00 | -20.50 | 28.04 | 46.00 | -17.96 |
| 10 | 2.298 | 34.78 | 56.00 | -21.22 | 27.86 | 46.00 | -18.14 |

NOTES:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None.*

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 26 of 36 |


EXHIBIT B – Labeling Requirements

Sample Label & Location

New Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19 (b)(2).



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 27 of 36 |

EXHIBIT B – Labeling Requirements (Cont.)

Sample Label & Location

FCC ID LABEL



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 28 of 36 |

EXHIBIT C – Block Diagram/Schematics

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 29 of 36 |

EXHIBIT D – Operational Description

| | | | | |
|--|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 30 of 36 |

EXHIBIT E – Test Setup Photographs

| | | | | |
|---|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 31 of 36 |

EXHIBIT F – EUT External/ Internal Photographs

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 32 of 36 |

EXHIBIT G – User’s Manual

| | | | | |
|---|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 33 of 36 |

EXHIBIT H – SAR Measurement Report

| | | | | |
|---|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 34 of 36 |

EXHIBIT I – Supplemental 15C WLAN Report

| | | | | |
|--|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 35 of 36 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 01

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----|--------------|------------|-------------|
| 4824 | -110.3 | 40.39 | V | 37.09 | 71.53 | -16.91 |
| 7236 | -116.3 | 47.42 | V | 38.12 | 80.54 | -15.88 |
| 9648 | -135 | 50.3 | V | 22.30 | 13.03 | -31.70 |
| 12060 | -135 | 53.7 | V | 25.7 | 19.28 | -28.3 |

Table A-6. Peak Radiated Measurements @ 3 meters

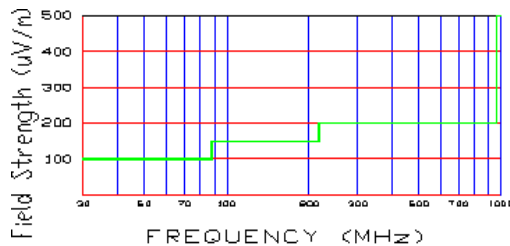


Figure A-5. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 1 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 06

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 4874 | -109.3 | 40.5 | V | 38.20 | 81.28 | -15.8 |
| 7311 | -116.5 | 48 | V | 38.50 | 84.14 | -15.5 |
| 9748 | -135 | 50.3 | V | 22.30 | 13.03 | -31.7 |
| 12185 | -135 | 53.7 | V | 25.70 | 19.28 | -28.3 |

Table A-7. Peak Radiated Measurements @ 3 meters

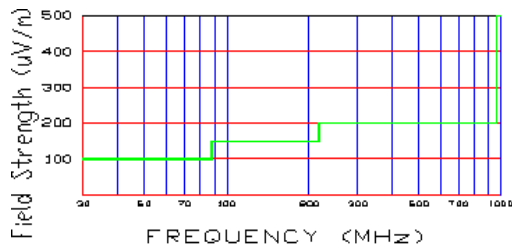


Figure A-6. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 2 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 11

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 4924 | -111.2 | 40.7 | V | 36.5 | 66.83 | -17.5 |
| 7386 | -118.3 | 48.2 | V | 36.9 | 69.98 | -17.1 |
| 9848 | -135 | 50.4 | V | 22.4 | 13.18 | -31.6 |
| 12310 | -135 | 53.8 | V | 25.8 | 19.50 | -28.3 |

Table A-8. Peak Radiated Measurements @ 3 meters

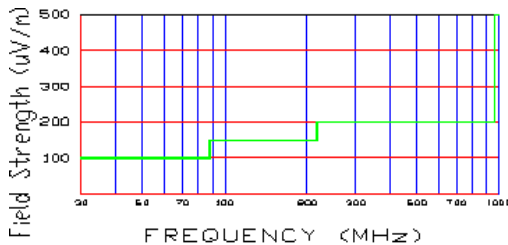


Figure A-7. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 3 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 01

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----|--------------|------------|-------------|
| 4824 | -109.4 | 40.39 | V | 37.99 | 79.34 | -16.01 |
| 7236 | -118.5 | 47.42 | V | 35.92 | 62.52 | -18.08 |
| 9648 | -135 | 50.3 | V | 22.30 | 13.03 | -31.70 |
| 12060 | -135 | 53.7 | V | 25.7 | 19.28 | -28.3 |

Table A-9. Peak Radiated Measurements @ 3 meters

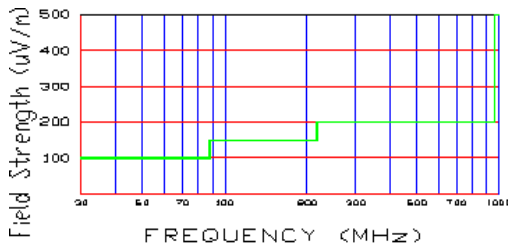


Figure A-8. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 4 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 06

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 4874 | -108.5 | 40.5 | V | 39.00 | 89.13 | -15.0 |
| 7311 | -119.3 | 48 | V | 35.70 | 60.95 | -18.3 |
| 9748 | -135 | 50.3 | V | 22.30 | 13.03 | -31.7 |
| 12185 | -135 | 53.7 | V | 25.70 | 19.28 | -28.3 |

Table A-10. Peak Radiated Measurements @ 3 meters

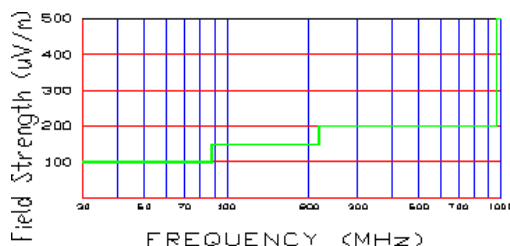


Figure A-9. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 5 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 11

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 4958 | -111.3 | 40.7 | V | 36.4 | 66.07 | -17.6 |
| 7437 | -117.9 | 48.2 | V | 37.3 | 73.28 | -16.7 |
| 9916 | -135 | 50.4 | V | 22.4 | 13.18 | -31.6 |
| 12395 | -135 | 53.8 | V | 25.8 | 19.50 | -28.2 |

Table A-11. Peak Radiated Measurements @ 3 meters

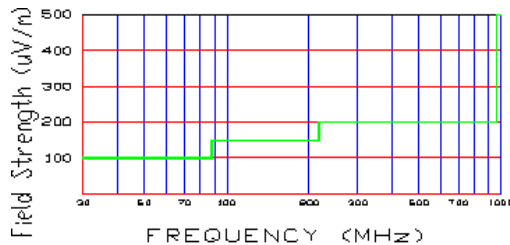


Figure A-10. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 6 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 149

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----|--------------|------------|-------------|
| 11490 | -117.0 | 52.8 | V | 43.3 | 146.22 | -10.7 |
| 17235 | -123.5 | 62.3 | V | 40.8 | 109.65 | -13.2 |
| 22980 | -135.0 | 66.0 | V | 38 | 79.43 | -16 |
| 28725 | -135.0 | 69.0 | V | 41 | 112.20 | -13 |

Table A-12. Peak Radiated Measurements @ 3 meters

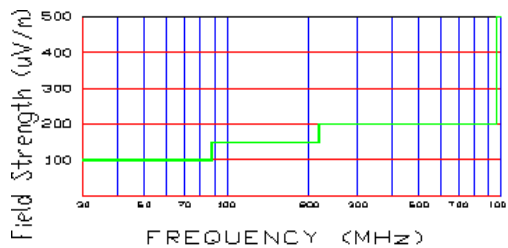


Figure A-11. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 7 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 157

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----|--------------|------------|-------------|
| 11570 | -115.6 | 52.9 | V | 43.6 | 151.36 | -10.4 |
| 17355 | -121.2 | 62.5 | V | 40.6 | 107.15 | -13.4 |
| 23140 | -135 | 66.4 | V | 38.4 | 83.18 | -15.6 |
| 28925 | -135 | 69.4 | V | 41.4 | 117.49 | -12.6 |

Table A-13. Peak Radiated Measurements @ 3 meters

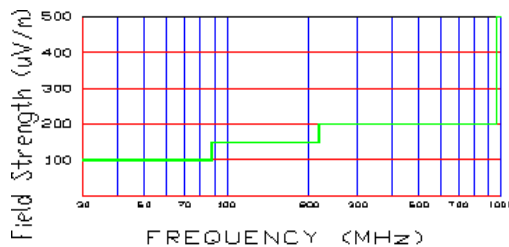


Figure A-12. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dBu/m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 8 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 165

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----|--------------|------------|-------------|
| 11650 | -112.7 | 53 | V | 42.8 | 138.04 | -11.2 |
| 17475 | -124.4 | 63.7 | V | 42.7 | 136.46 | -11.3 |
| 23300 | -130 | 66.9 | V | 38.9 | 88.10 | -15.1 |
| 29125 | -135 | 69.9 | V | 41.9 | 124.45 | -12.1 |

Table A-14. Peak Radiated Measurements @ 3 meters

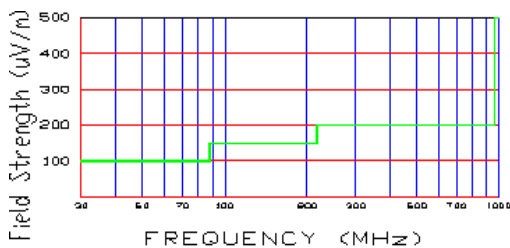


Figure A-13. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ m) at 3 meters radiated.



| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 9 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.247.

| Frequency | F/S (mV/m) | Measured Distance (Meters) |
|-------------------|---------------|----------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table A-19. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

| | |
|------------------|--|
| Agilent E4448A | PSA Spectrum Analyzer 3 Hz - 50GHz |
| HP 8566B | Spectrum Analyzer 100Hz – 22GHz |
| HP 83017A | Microwave Analyzer 40dB Gain (0.5 – 26.5GHz) |
| HP 3784A | Digital Transmission Analyzer |
| EMCO 3115 | Horn Antenna (1 – 18GHz) |
| HP 8495A | 20dB Attenuator (DC-40GHz) 0 –70dB |
| HP 8493B | 10dB Attenuator |
| MicroCoax Cables | Low Loss Microwave Cables (1 – 26.5GHz) |
| CDI Dipoles | Dipole Antennas (30 – 1000MHz) |
| EMCO 3116 | Horn Antenna (18 – 40GHz) |



| | | |
|----------------------------------|--|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  Supplemental 15C Report  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal |
| | FCC ID: H9PMC9090 | Page 10 of 14 |

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements (Cont.)

§15.205 /§15.209 courtesy

Operating Frequency: 2462 MHz

Distance of Measurements: 3 Meters

Data Rate: 6 Mbps

| FREQ (MHz) | Level (dBm) | AFCL (dB/m) | POL (H/V) | F/S (dB μ V/m) | F/S (μ V/M) | Margin (dB) |
|---------------|----------------|----------------|--------------|-----------------------|---------------------|----------------|
| 2483.7 | -104.6 | 33 | V | 35.4 | 58.88 | -18.6 |
| 2484.5 | -100.7 | 33 | V | 39.3 | 92.26 | -14.7 |
| 2484.4 | -117.5 | 33.1 | V | 22.6 | 13.49 | -31.4 |
| 2485.1 | -123 | 33.1 | V | 17.1 | 7.16 | -36.9 |
| 2493.0 | -127.4 | 33.2 | V | 12.8 | 4.37 | -41.2 |
| 2496.0 | -133 | 33.2 | V | 7.2 | 2.29 | -46.8 |

Table A-20. Radiated Restricted Band Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500 μ V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.



| | | | | |
|----------------------------------|--|---------------------------------|----------------------|---------------|
| PCTEST LAB TEST REPORT 15.247 |  Supplemental 15C Report  | Reviewed by: Quality Manager | | |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 11 of 14 |

EXHIBIT A – Test Results (Cont.)

Support Equipment

| | | | | | |
|---|----------------------------|---------|-------------------------------------|------|---------------|
| 1 | Symbol Bar Scanner | FCC ID: | H9PMC9063A | S/N: | ALP82022 |
| 2 | Cable Adapter Module (CAM) | P/N: | ADP9000-100 | S/N: | M9K7VC |
| 3 | CAM Power Supply | Model: | PSA-18U-480C | | |
| | | 1.5m | Unshielded cord with 1 Ferrite Bead | | |
| | | 2m | Unshielded AC Cord | | |
| 4 | Toshiba Notebook | Model: | PA1221U-S2A | S/N: | 07621293-3 |
| | | 1.9m | Unshielded AC power cord | | |
| | w/ NETGEAR PCMCIA Card | Model: | FA411 | S/N: | FA42A31344130 |
| | | 1.5m | Ethernet Cord | | |
| 5 | WLAN(a) Access Point | FCC ID: | LDK102045 | S/N: | FTX0903R0XV |
| | w/ Power Supply | Model: | PSA18U-480C | | |
| | | 1.5m | Unshielded cord with 1 Ferrite Bead | | |
| 6 | WLAN(b) Access Point | FCC ID: | H9PLA4131M | S/N: | 00A0F851BB3B |
| | w/ Power Supply | P/N: | 50-24000-024 | | |
| | | 2m | Unshielded AC power cord | | |
| 7 | WLAN(g) Access Point | FCC ID: | LDK102049 | S/N: | FTX0905R2Q3 |
| | | 2m | Unshielded AC power cord | | |

Note: Access Points (a) and (g) used the same power supply



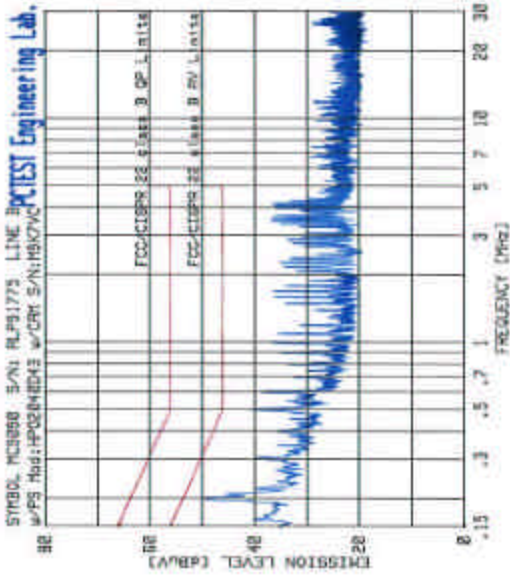
| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 12 of 14 |


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207



| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | 0.198 | 47.75 | 63.09 | -15.34 | 40.29 | 53.73 | -13.44 |
| 2 | 0.436 | 39.37 | 56.03 | -16.66 | 32.03 | 46.04 | -14.01 |
| 3 | 0.336 | 36.50 | 56.00 | -19.50 | 31.02 | 46.00 | -14.98 |
| 4 | 3.498 | 35.78 | 56.00 | -20.22 | 24.06 | 46.00 | -21.94 |
| 5 | 3.596 | 35.81 | 56.00 | -20.19 | 24.50 | 46.00 | -21.50 |
| 6 | 4.195 | 36.91 | 56.00 | -19.09 | 23.66 | 46.00 | -22.34 |
| 7 | 0.998 | 35.49 | 56.00 | -20.51 | 27.94 | 46.00 | -18.06 |
| 8 | 1.696 | 34.78 | 56.00 | -21.22 | 27.14 | 46.00 | -18.86 |
| 9 | 1.337 | 34.54 | 56.00 | -21.46 | 26.52 | 46.00 | -19.48 |
| 10 | 3.995 | 36.65 | 56.00 | -19.35 | 23.60 | 46.00 | -22.34 |

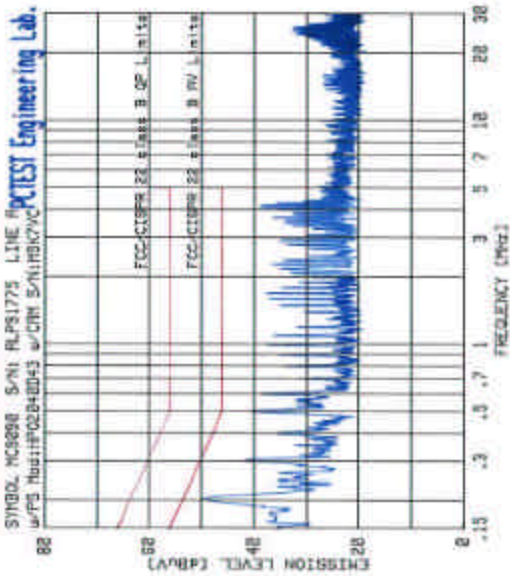

| No. | Freq. [MHz] | Quasi-Pk [dBuV] | Limit [dBuV] | Margin [dB] | Average [dBuV] | Limit [dBuV] | Margin [dB] |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | 0.198 | 46.69 | 63.09 | -16.40 | 35.54 | 53.69 | -18.15 |
| 2 | 0.436 | 39.79 | 56.03 | -16.24 | 32.44 | 46.03 | -13.59 |
| 3 | 0.336 | 37.79 | 56.00 | -18.21 | 24.19 | 46.00 | -21.81 |
| 4 | 0.598 | 36.23 | 56.00 | -19.77 | 30.75 | 46.00 | -15.25 |
| 5 | 4.195 | 36.50 | 56.00 | -19.50 | 27.56 | 46.00 | -22.42 |
| 6 | 0.298 | 36.50 | 60.29 | -23.79 | 28.46 | 50.32 | -21.84 |
| 7 | 0.998 | 36.33 | 56.00 | -19.67 | 29.77 | 46.00 | -17.23 |
| 8 | 1.696 | 35.66 | 56.00 | -20.34 | 28.14 | 46.00 | -17.86 |
| 9 | 1.337 | 35.62 | 56.00 | -20.38 | 28.04 | 46.00 | -17.96 |
| 10 | 3.298 | 34.78 | 56.00 | -21.22 | 27.06 | 46.00 | -18.94 |

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None*.

| | | | | |
|----------------------------------|---------------------------------|-----------------------------|----------------------|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 | | Supplemental 15C Report | | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 13 of 14 |

EXHIBIT A – Test Results (Cont.)

Receiver Spurious Measurements

§15.205 / §15.209

Operating Frequency: 2462 MHz

Distance of Measurements: 3 Meters

Data Rate: 6 Mbps

| FREQ (MHz) | Level (dBm) | AFCL (dB/m) | POL (H/V) | Height (m) | Azimuth (° angle) | F/S (uV/M) | Margin (dB) |
|------------|-------------|-------------|-----------|------------|-------------------|------------|-------------|
| 66.3 | -80.6 | 5.8 | V | 2.3 | 70 | 40.8 | -7.8 |
| 87.0 | -83.4 | 8.3 | V | 2.0 | 60 | 39.4 | -8.1 |
| 148.7 | -84.0 | 13.5 | H | 1.8 | 190 | 66.9 | -7.0 |
| 233.3 | -86.9 | 18.0 | H | 1.4 | 190 | 80.4 | -7.9 |
| 330.0 | -90.7 | 21.7 | V | 1.3 | 180 | 79.5 | -8.0 |
| 561.0 | -96.3 | 27.4 | H | 1.1 | 200 | 79.5 | -8.0 |

Table A-18. Radiated Measurements at 3-meters

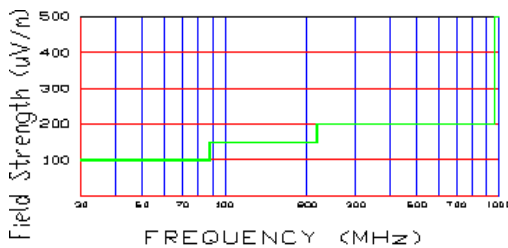


Figure A-17. Radiated limits at 3 meters

NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10th harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500µV/m at 3 meters radiated.



| | | | | |
|----------------------------------|---|--------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | Supplemental 15C Report |  | Reviewed by: Quality Manager |
| Filename: 0504190296 | Test Dates: April 15-28 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 14 of 14 |

EXHIBIT J – Supplemental 15E WLAN Report

| | | | | |
|--|---|------------------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.247 |  | FCC CERTIFICATION REPORT |  | Reviewed by: Quality Manager |
| Filename: 0504120256 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 36 of 36 |

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

| Frequency | F/S (mV/m) | Measured Distance (Meters) |
|-------------------|---------------|----------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table A-6. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

| | |
|------------------|--|
| Agilent E4448A | PSA Spectrum Analyzer 3 Hz - 50GHz |
| HP 4448A | Spectrum Analyzer 100Hz – 50GHz |
| HP 83017A | Microwave Analyzer 40dB Gain (0.5 – 26.5GHz) |
| HP 3784A | Digital Transmission Analyzer |
| EMCO 3115 | Horn Antenna (1 – 18GHz) |
| EMCO 3116 | Horn Antenna (18 – 40GHz) |
| HP 8495A | 20dB Attenuator (DC-40GHz) 0 –70dB |
| HP 8493B | 10dB Attenuator |
| MicroCoax Cables | Low Loss Microwave Cables (1 – 50GHz) |
| CDI Dipoles | Dipole Antennas (30 – 1000MHz) |
| EMCO 3116 | Horn Antenna (18 – 40GHz) |

| | | | | | |
|----------------------------------|---|--------------------------------|----------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.407 |  | Supplemental 15E Report | |  | Reviewed by: Quality Manager |
| Filename: 0504120254 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 1 of 8 | |

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

| | |
|---------------------------|----------|
| Transfer Rate: | 36 Mbps |
| Distance of Measurements: | 3 Meters |
| Channel: | 36 |

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 10360 | -123.4 | 52.8 | V | 36.40 | 66.07 | -17.6 |
| 15540 | -124.3 | 62.3 | V | 45.00 | 177.83 | -9 |
| 20720 | -135 | 66 | V | 38.00 | 79.43 | -16 |
| 25900 | -135 | 69 | V | 41.00 | 112.20 | -13 |

Table A-7. Radiated Measurements @ 3 meters

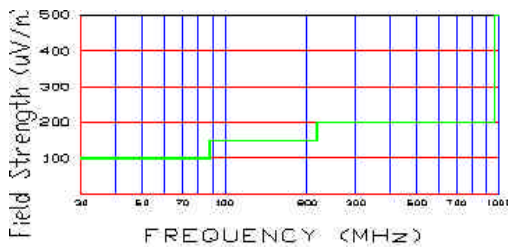


Figure A-5. Radiated limits at 3 meters.

NOTES:

1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz, VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.407 |  | Supplemental 15E Report |  | Reviewed by: Quality Manager |
| Filename: 0504120254 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 2 of 8 |

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

| | |
|---------------------------|----------|
| Transfer Rate: | 36 Mbps |
| Distance of Measurements: | 3 Meters |
| Channel: | 52 |

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 10520 | -126.3 | 52.9 | V | 33.6 | 47.86 | -20.4 |
| 15780 | -131.2 | 62.5 | V | 38.3 | 82.22 | -15.7 |
| 21040 | -135.0 | 66.4 | V | 38.4 | 83.18 | -15.6 |
| 26300 | -135.0 | 69.4 | V | 41.4 | 117.49 | -12.6 |

Table A-8. Radiated Measurements @ 3 meters

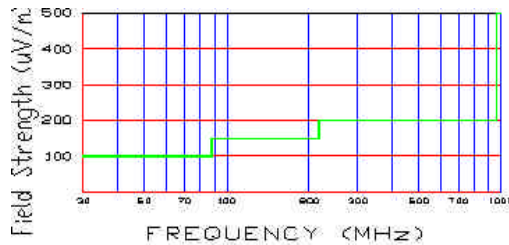


Figure A-6. Radiated limits at 3 meters.

NOTES:

1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz,
VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.407 |  | Supplemental 15E Report |  | Reviewed by: Quality Manager |
| Filename: 0504120254 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 3 of 8 |

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

| | |
|---------------------------|----------|
| Transfer Rate: | 36 Mbps |
| Distance of Measurements: | 3 Meters |
| Channel: | 64 |

| Frequency (MHz) | Level (dBm) | AFCL (dB) | POL (H/V) | F/S (dBuV/m) | F/S (uV/m) | Margin (dB) |
|-----------------|-------------|-----------|-----------|--------------|------------|-------------|
| 10640 | -123.4 | 53.0 | V | 36.6 | 67.61 | -17.4 |
| 15960 | -125 | 63.7 | V | 45.7 | 192.75 | -8.3 |
| 21280 | -135 | 66.9 | V | 38.9 | 88.10 | -15.1 |
| 26600 | -140 | 69.9 | V | 36.9 | 69.98 | -17.1 |

Table A-9. Radiated Measurements @ 3 meters

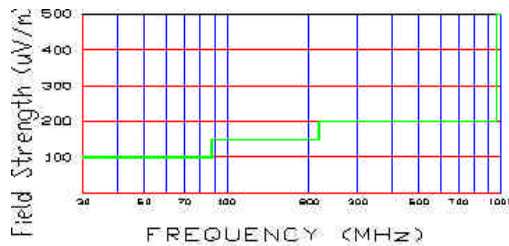


Figure A-7. Radiated limits at 3 meters.

NOTES:


1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz,
VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

| | | | | |
|----------------------------------|---|-----------------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.407 |  | Supplemental 15E Report |  | Reviewed by: Quality Manager |
| Filename: 0504120254 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 4 of 8 |


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207

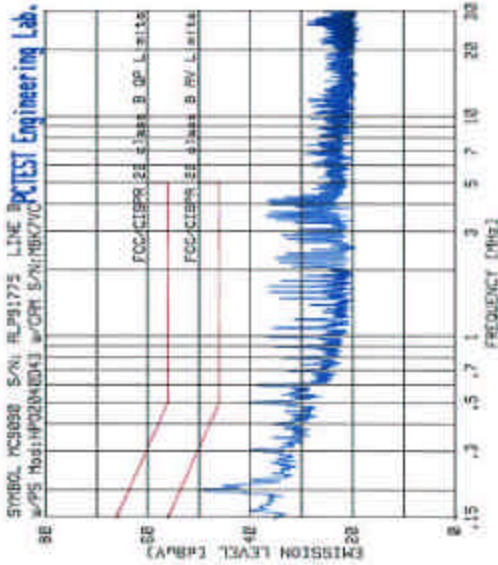

| No. | Freq. (MHz) | Quasi-Pk (dBuV) | Limit (dBuV) | Margin (dB) | Average (dBuV) | Limit (dBuV) | Margin (dB) |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | 0.100 | 47.75 | 53.00 | -15.04 | 48.29 | 53.73 | -13.44 |
| 2 | 0.498 | 39.37 | 56.00 | -16.66 | 32.83 | 46.04 | -14.01 |
| 3 | 0.598 | 30.58 | 56.00 | -17.58 | 31.82 | 46.00 | -14.50 |
| 4 | 3.495 | 35.78 | 56.00 | -20.22 | 24.05 | 46.00 | -21.54 |
| 5 | 3.595 | 35.81 | 56.00 | -20.19 | 24.50 | 46.00 | -21.50 |
| 6 | 4.195 | 36.51 | 56.00 | -19.09 | 23.60 | 46.00 | -22.14 |
| 7 | 0.598 | 34.58 | 56.00 | -20.51 | 21.54 | 46.00 | -18.85 |
| 8 | 1.595 | 34.78 | 56.00 | -21.38 | 27.14 | 46.00 | -18.85 |
| 9 | 1.597 | 34.54 | 56.00 | -21.46 | 26.52 | 46.00 | -19.38 |
| 10 | 3.595 | 35.55 | 56.00 | -19.35 | 23.55 | 46.00 | -22.34 |

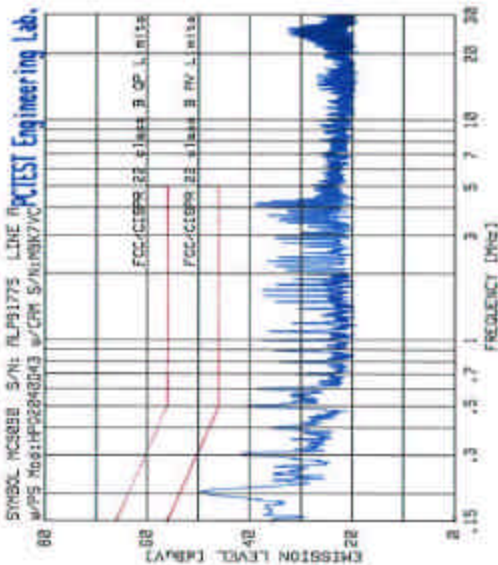

| No. | Freq. (MHz) | Quasi-Pk (dBuV) | Limit (dBuV) | Margin (dB) | Average (dBuV) | Limit (dBuV) | Margin (dB) |
|-----|-------------|-----------------|--------------|-------------|----------------|--------------|-------------|
| 1 | 0.100 | 46.88 | 53.00 | -16.88 | 35.54 | 53.69 | -10.15 |
| 2 | 0.498 | 38.79 | 56.00 | -16.24 | 32.44 | 46.00 | -13.59 |
| 3 | 0.598 | 37.79 | 56.00 | -18.21 | 24.13 | 46.00 | -21.87 |
| 4 | 0.598 | 38.23 | 56.00 | -17.77 | 28.75 | 46.00 | -19.25 |
| 5 | 4.195 | 35.50 | 56.00 | -19.50 | 23.59 | 46.00 | -22.42 |
| 6 | 0.298 | 38.38 | 56.00 | -17.62 | 28.48 | 50.32 | -21.94 |
| 7 | 0.598 | 36.23 | 56.00 | -19.57 | 28.77 | 46.00 | -17.23 |
| 8 | 1.595 | 35.86 | 56.00 | -20.14 | 28.14 | 46.00 | -17.88 |
| 9 | 1.597 | 35.40 | 56.00 | -20.48 | 28.04 | 46.00 | -17.98 |
| 10 | 2.298 | 34.78 | 56.00 | -21.22 | 27.05 | 46.00 | -18.54 |

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None*.

| | | | | | |
|----------------------------------|---|-----------------------------|----------------------|---|---------------------------------|
| PCTEST LAB TEST REPORT 15.407 |  | Supplemental 15E Report | |  | Reviewed by: Quality Manager |
| Filename: 0504120254 | Test Dates: April 15-28, 2005 | EUT Type: Handheld Terminal | FCC ID: H9PMC9090 | Page 5 of 8 | |