

PCTEST ENGINEERING LABORATORY, INC.

6660 – B Dobbin Road · Columbia, MD 21045 · USA
Telephone 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com> (email: randy@pctestlab.com)

CERTIFICATE OF COMPLIANCE

MANUFACTURER NAME & ADDRESS:

Symbol Technologies, Inc.
One Symbol Plaza MS B5
Holtsville, NY 11742-1300

DATE & LOCATION OF TESTING:

Date(s) of Tests: April 15-28, 2005
Test Report S/N: 0504120253
Test Site: PCTEST Lab, Columbia, MD

FCC ID: H9PMC9090

APPLICANT: SYMBOL TECHNOLOGIES, INC.

SUMMARY:

Model No(s): MC9090-KKOH9AFFA7WW/-SKOH9AFA7WW/-GKOHBEGA7WW
Equipment EUT Type: Handheld Terminal
Max. Output Power: 0.96 mW (-0.18 dBm)
Frequency Range: 2402 – 2480 MHz
FCC Classification: FCC Part 15 Frequency Hopping Spread Spectrum Transceiver (DSS)
FCC Rule Part(s): Parts 15.247; ANSI C-63.4-2001

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2001. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. The EUT complies with Industry Bluetooth Standards. The JBC portion of this EUT is covered in the DOC report. The WLAN tested for this filing has previously been certified under Symbol FCC ID: H9P2121160. The unit comes in three model types. Each type has its own body worn accessory. All were evaluated for SAR. S/N: ALP8163 was evaluated first and engineering judgments were from this unit with respect to channel and data rate worse cases.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



Model:
KKOH9AFFA7WW



Model:
KCOHBEGA7WW



Model:
SKOH9AFA7WW



TABLE OF CONTENTS


ATTESTATION STATEMENTS.....	1
FCC PART 15.247 MEASUREMENT REPORT COVER PAGE	2
1.0 INTRODUCTION.....	3
1.1 EVALUATION PROCEDURE.....	3
1.2 SCOPE	3
1.3 PCTEST TEST LOCATION.....	3
2.0 PRODUCT INFORMATION	4
2.1 EQUIPMENT DESCRIPTION.....	4
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	4
3.0 DESCRIPTION OF TEST	5
3.1 CONDUCTED EMISSIONS.....	5
3.2 RADIATED EMISSIONS	6
4.0 ANTENNA REQUIREMENTS	7
5.0 TEST EQUIPMENT CALIBRATION DATA.....	8
6.0 CONCLUSION	9
EXHIBIT A – TEST RESULTS.....	10
SUMMARY.....	10
20DB BANDWIDTH MEASUREMENT (HANDSET).....	11
OUTPUT POWER MEASUREMENT.....	14
BAND EDGE COMPLIANCE	17
CARRIER FREQUENCY SEPARATION	18
DWELL TIME.....	19
CHANNEL HOPPING	20
RADIATED HARMONIC MEASUREMENTS (CONT.).....	21-25
LINE-CONDUCTED TEST DATA.....	26
EXHIBIT B – LABELING REQUIREMENTS.....	27
EXHIBIT C – BLOCK DIAGRAM/SCHEMATICS	29
EXHIBIT D – OPERATIONAL DESCRIPTION	30
EXHIBIT E – TEST SETUP PHOTOGRAPHS	31
EXHIBIT F – EUT EXTERNAL/ INTERNAL PHOTOGRAPHS.....	32
EXHIBIT G – USER’S MANUAL	33
EXHIBIT H – SAR MEASUREMENT REPORT	34
EXHIBIT I – SUPPLEMENTAL 15C WLAN REPORT	35
EXHIBIT J – SUPPLEMENTAL 15E WLAN REPORT	36

Attestation Statements

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 1 of 36



MEASUREMENT REPORT



FCC Part 15.247 Measurement Report Cover Page

A. General Information

APPLICANT Symbol Technologies INC.
APPLICANT ADDRESS One Symbol Plaza, MS:B5
 Holtsville, NY 11742-1300

TEST SITE PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S) Parts 15.247; ANSI C-63.4-2001
MODEL NAME MC9090-KKOH9AFFA7WW/-SKOH9AFA7WW/-GKOHBEGA7WW
FCC ID H9PMC9090
Test Device Serial No.: S/N: ALP81763 Production Pre-Production Engineering
FCC CLASSIFICATION FCC Part 15 Spread Spectrum Transceiver (DSS)
Method/ System: DSS Sequence Spread Spectrum (FHSS)
DATE(S) OF TEST April 12-15, 2005
TESTS REPORT S/N: 0504120253

A.1 Test Facility / NVLAP Accreditation

Measurements were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 2 of 36

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2001) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **Symbol MC9090 WLAN and Bluetooth**.

Deviation from measurement procedure.....NONE

1.2 Scope

Measurement & determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.2-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

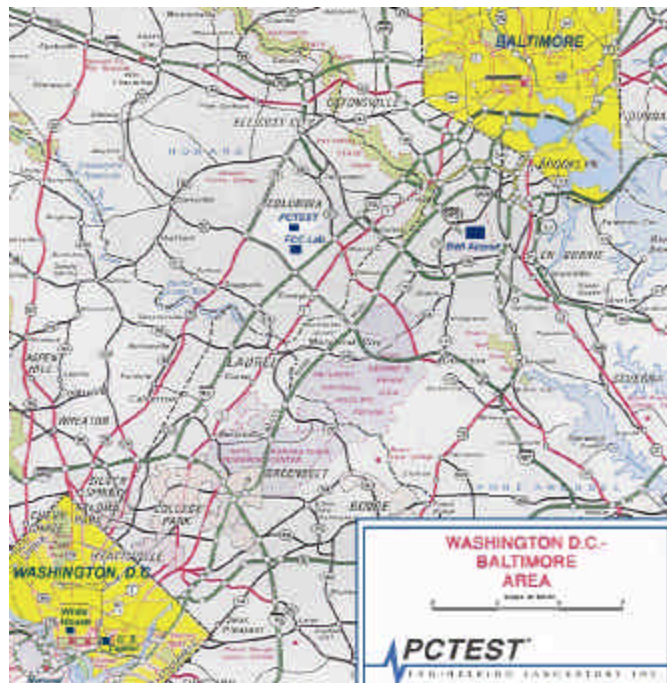


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 3 of 36

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the *Symbol MC9090 WLAN and Bluetooth*.

- . The EUT consisted of the following component(s):

Table 2-1. EUT Equipment Description

Manufacturer / Model / Description	Serial Number
Handheld Terminal with WLAN and Bluetooth	ALP81763

2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 4 of 36

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions




Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

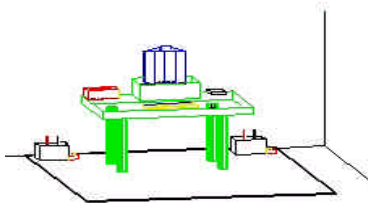


Figure 3.1-2. Line Conducted Emission Test Set-Up

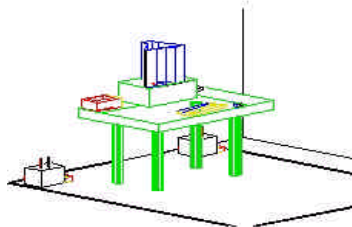


Figure 3.1-3. Wooden Table & Bonded LISNs

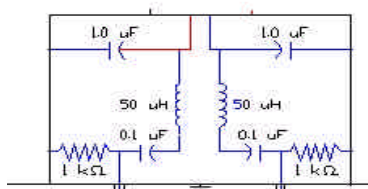


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1-meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150kHz to 30Mhz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H patter to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640B signal generator.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 5 of 36

3.2 Radiated Emissions

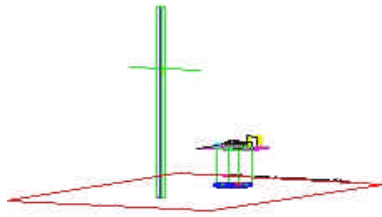


Figure 3.2-1. Meter Test Site

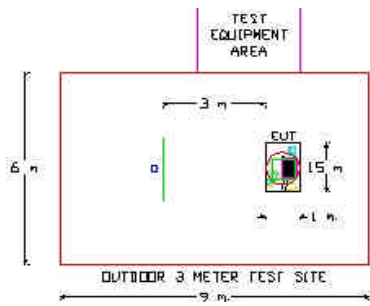


Figure 3.2-2. Dimensions of Outdoor Test Site

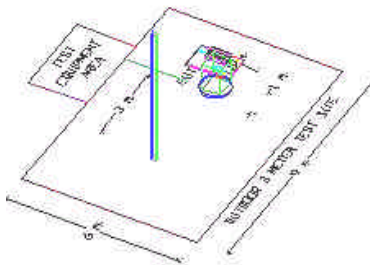


Figure 3.2-3. Turntable and System Setup

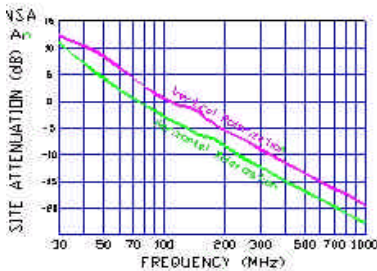


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using bi-conical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3 meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 6 of 36

4.0 ANTENNA REQUIREMENTS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The antennas are **permanently attached antenna** for stand alone operation

Conclusion:

The **SYMBOL MC9090** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)
0	2402
:	:
39	2441
:	:
78	2480

Table 4.1 Frequency/ Channel Operations

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 7 of 36

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	12/05/05	Annual	3638A08713
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	04/17/06	Annual	2542A11898
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	06/02/05	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/05	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/05	Annual	3051A00187
Signal Generator	HP 8650B (500Hz-1GHz)	06/02/05	Annual	2232A19558
Signal Generator	HP 8640B (500Hz-1GHz)	06/02/05	Annual	1851A09816
Signal Generator	Rohde & Schwarz (0.1-1GHz)	09/22/05	Annual	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30MHz-1GHz)	04/12/06	Annual	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30MHz-1GHz)	03/11/06	Annual	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/05	Annual	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/05	Annual	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/06	Annual	0194-04082
RG58 Coax Test Cable	No.167			n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)			3531A00115
Broadband Amplifier (2)	HP 8447D			1145A00470, 1937A03348
Broadband Amplifier	HP 8447F			2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)			2820A00300
Horn Antenna (2)	EMCO Model 3115 (1-18GHz)			9704-5182, 9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)			9203-2178
Biconical Antenna (3)	Eaton 94455-1			1295, 1332, 1277
Log-Spiral Antenna (2)	Ailtech/Eaton 93490-1			0227, 1104
Log-Spiral Antenna	Singer 93490-1			147
Roberts Dipoles	Compliance Design (1 set) A100			5118
Ailtech Dipoles	DM-105A (1set)			33448-111
EMCO LISN (3)	3816/2, 3816/2, 3725/2			1077, 1079, 2099
50-ohm Terminator	n/a			n/a
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)			3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)			n/a
Ailtech/Eaton Receiver	NM37/57A-SL			0792-03271
Spectrum Analyzer	HP 8591A			3034A01395
Modulation Analyzer	HP 8901A			2432A03467
NTSC Pattern Generator	Leader 408			0377433
Noise Figure Meter	HP 8970B, Ailtech 7510			3106A02189, TE31700
Noise Generator	Ailtech 7010			1473
Microwave Survey Meter	Holiday Model 1501 (2.45GHz)			80931
Digital Thermometer	Extech Instruments 421305			426966
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0			6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81			R2437 (PCT278)
Environmental Chamber	Associated Systems 1025			PCT285
OATS	n/a	12/31/2005	Tri-annual	

Table 5-1. Annual Test Equipment Calibration Schedule

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 8 of 36

6.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **SYMBOL MC9090 with Bluetooth** is in compliance with Part 15C of the FCC Rules.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 9 of 36

EXHIBIT A – Test Results

Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.

Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Method/System: Frequency Hopping Spread Spectrum (FHSS)

Number of channels: 79

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Result
TRANSMITTER MODE (TX)				
15.247(a)(2)		20dB Bandwidth	> 1 MHz	Pass
15.247(b)	6.22(o)(a3)	Transmitter Output Power	< 1 Watt	Pass
15.247(c)	5.9.1 6.2.2(o) (e1)	Occupied BandEdge Out-of-Band Emissions (BandEdge at 20dB below)	Radiated <20dBc. Emissions in restricted bands must meet the radiated limits detailed in 15.207	Pass
15.205 15.209	6.2.1 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209	Pass
15.207	6.6	AC Conducted Emissions 150kHz – 30MHz	EN55022	Pass
RECEIVER MODE (RX)				
15.207	7.4	AC Conducted Emissions 150kHz – 30MHz	Class B = 250µV	Pass
15.209	7.3	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	Pass

Table A-1. Summary of Test Results

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 10 of 36

EXHIBIT A – Test Results (Cont.)

20dB Bandwidth Measurement (Handset)

§15.247(a)(2)

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

The spectrum analyzer is set to:

- RBW = 30 kHz (10dB/div)
- VBW = 30 kHz
- Span = 2 MHz
- Ref. Level = -52 dBm
- Sweep = 5 ms

Frequency (MHz)	Channel No.	Test Results	
		20dB Bandwidth (kHz)	Pass/Fail
2402	0	920	Pass
2441	39	930	Pass
2480	78	935	Pass

– See next pages for actual measured spectrum plots

Table A-2. Radiated Bandwidth Measurements




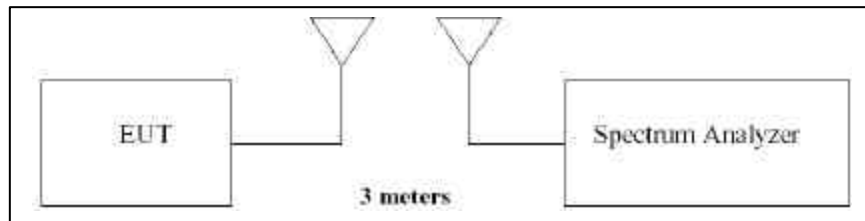


Figure A-1. Test Instrument & Measurement Setup

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 11 of 36

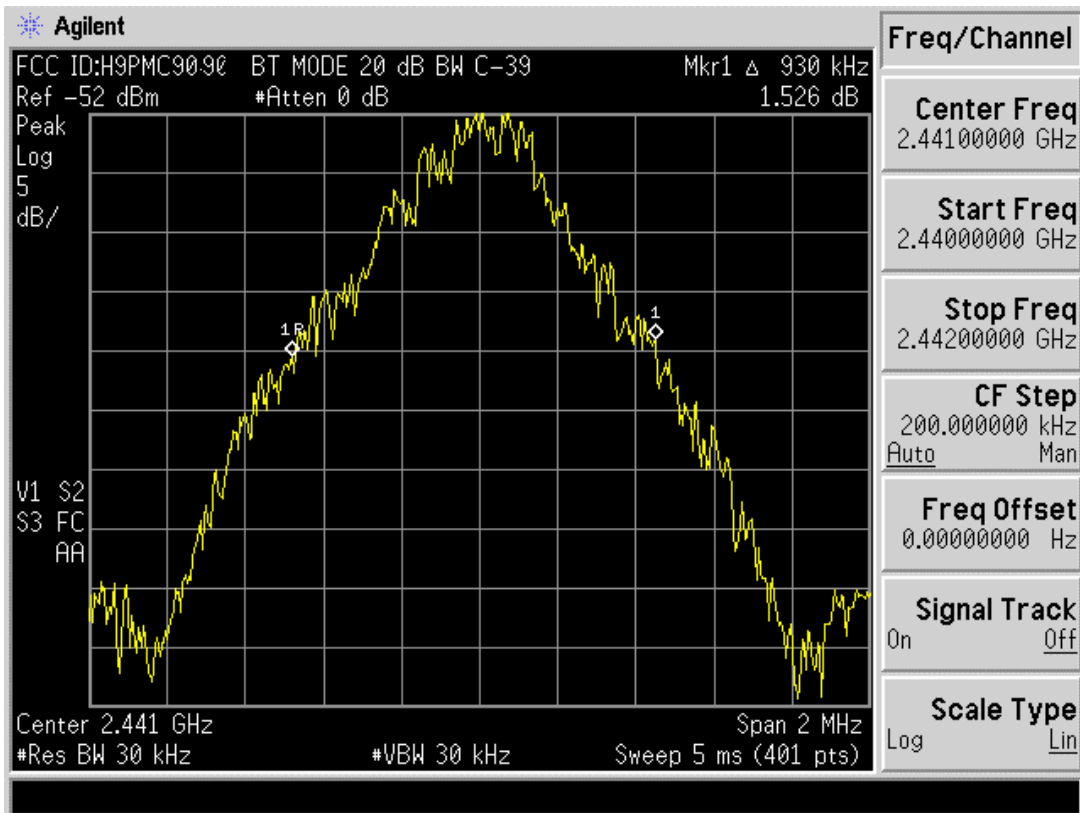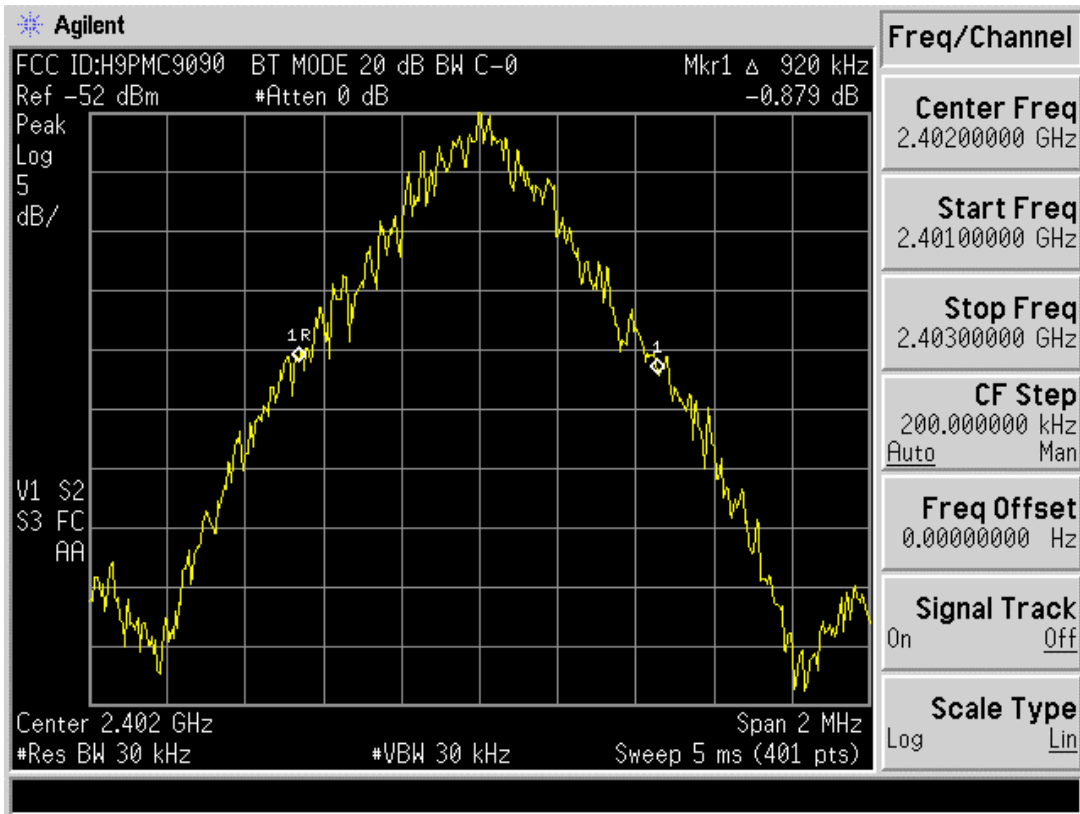

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 12 of 36

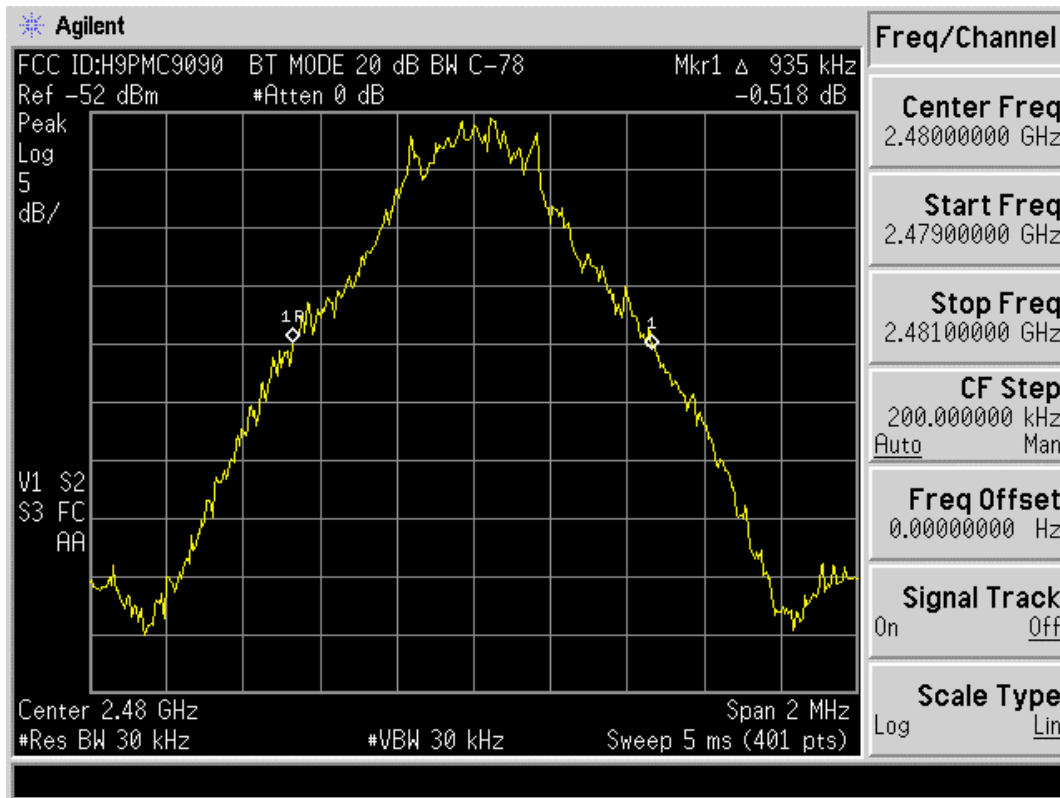

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename:	Test Dates:	d Terminal	FCC ID: H9PMC9090	Page 13 of 36

EXHIBIT A – Test Results (Cont.)

Output Power Measurement

§15.247(b)

Measurement is made while the EUT is operating in non-hopping transmission mode

Minimum Standard – The transmitter peak output power shall not exceed 1 watt.

Spectrum Analyzer plots are for reference only actual Conducted power measurements were taken with a power meter.

Power out Calculation Example:

The 3 meter Spectrum Analyzer reading at 2402 MHz = -46.86 dBm or 60.14 dBuV AFCL = 36.9 dB. FS is 97.04 dBuV/m or 71,121.4 uV/m. The Handset antenna gain = 2 dBi which yields a numerical gain of 1.58.

Using the Equation $P = (E*d)^2/(30*G)$ Output Power = 0.96 mW

Frequency (MHz)	Channel No.	Conducted Power	
		dBm	mW
2402.00	0	-0.18	.96
2441.00	39	-1.02	.50
2480.00	78	-1.90	-.65

Table A-3. Output Power Measurements




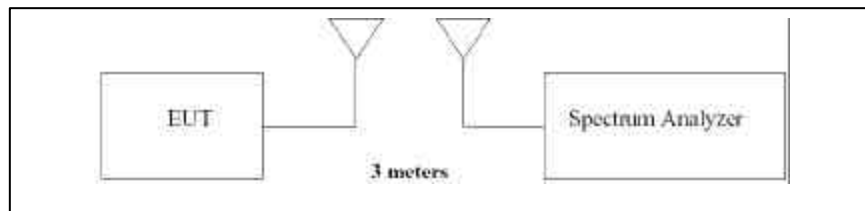


Figure A-3. Test Instrument & Measurement Setup

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 14 of 36

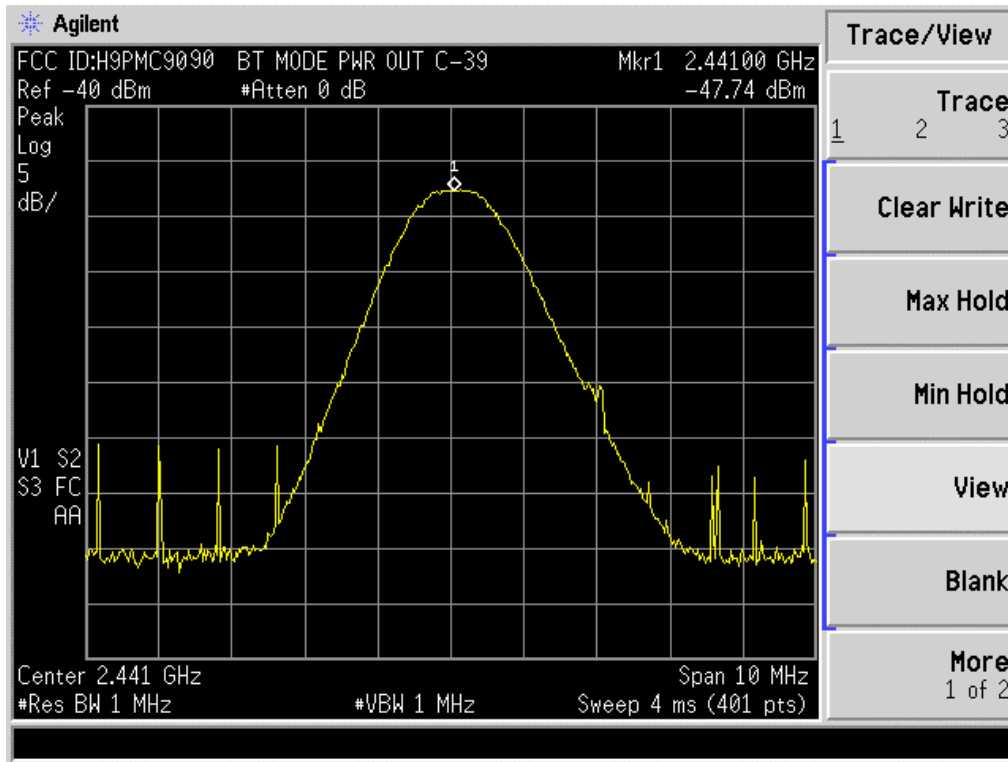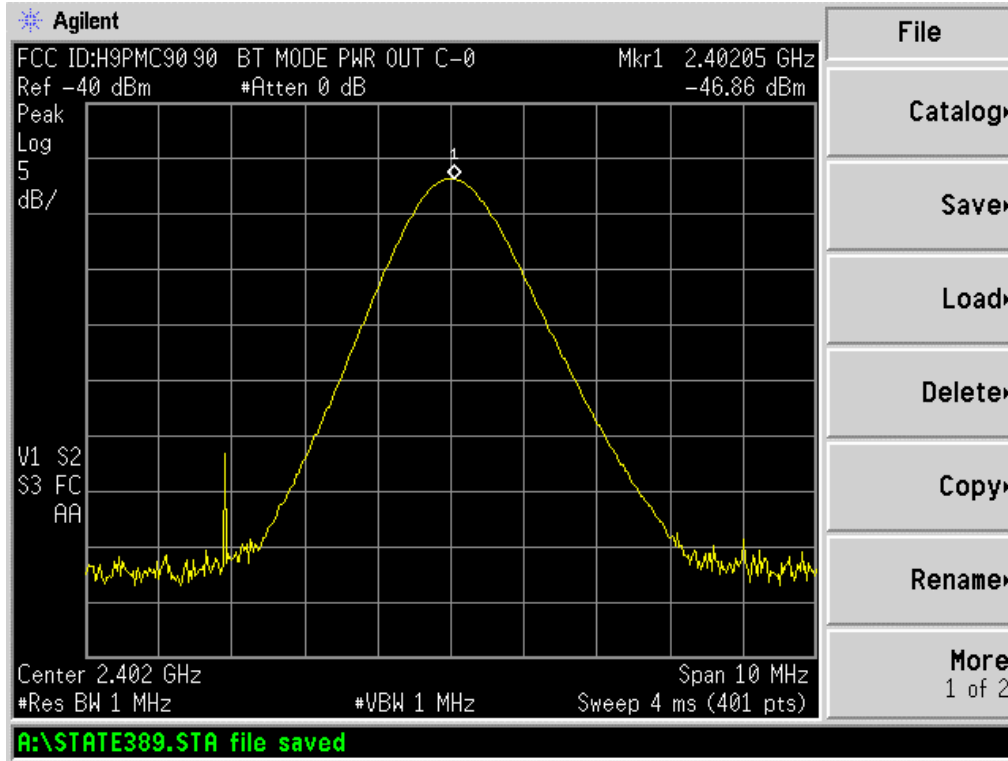



PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 15 of 36

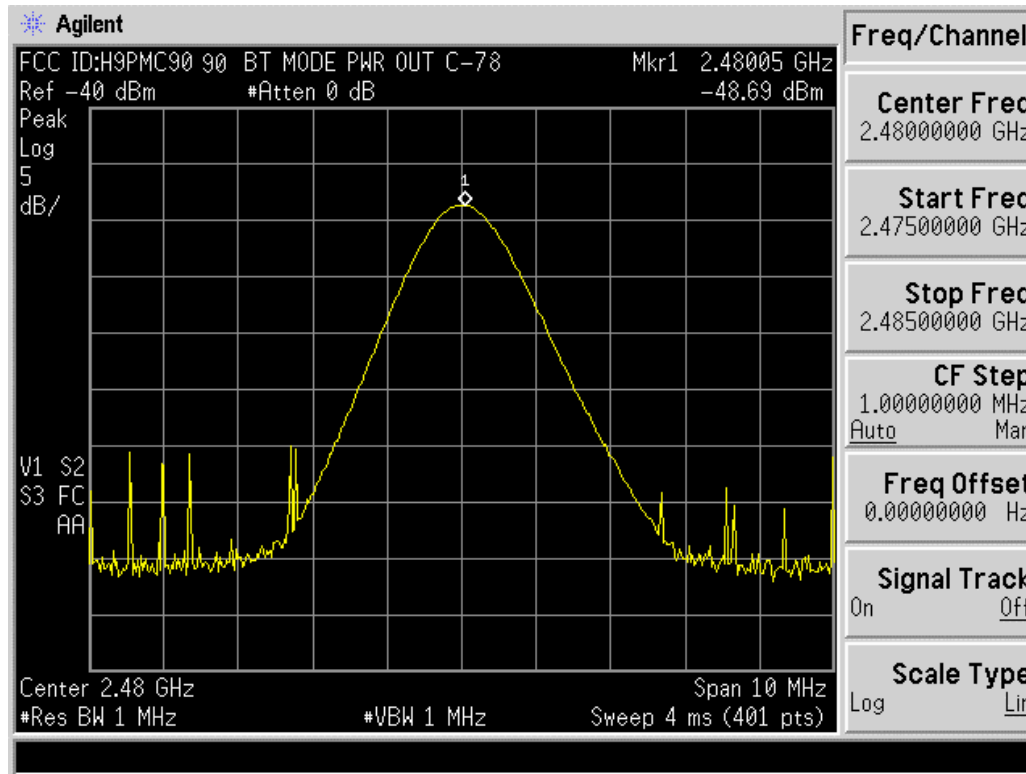

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 16 of 36

EXHIBIT A – Test Results (Cont.)


Band Edge Compliance

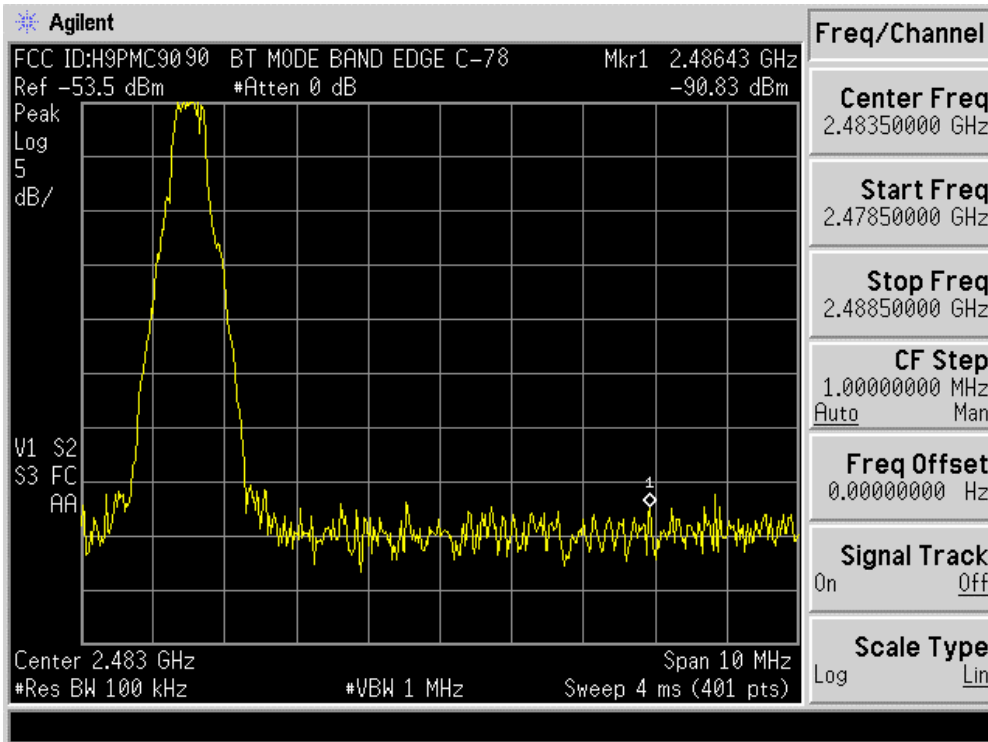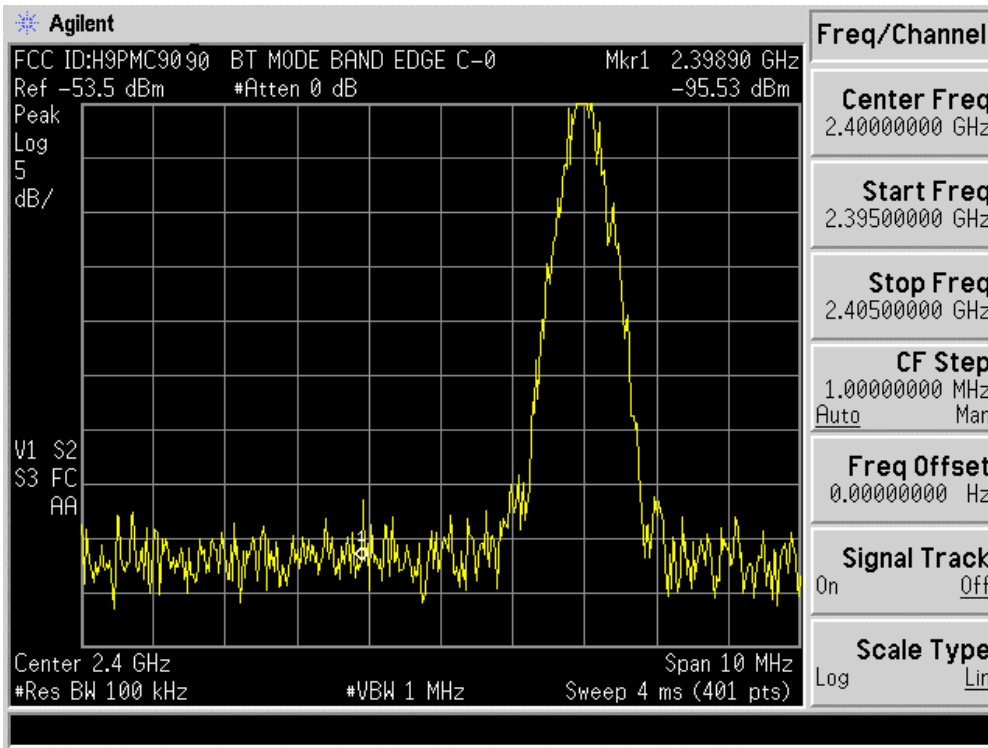

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 17 of 36

EXHIBIT A – Test Results (Cont.)

Carrier Frequency Separation

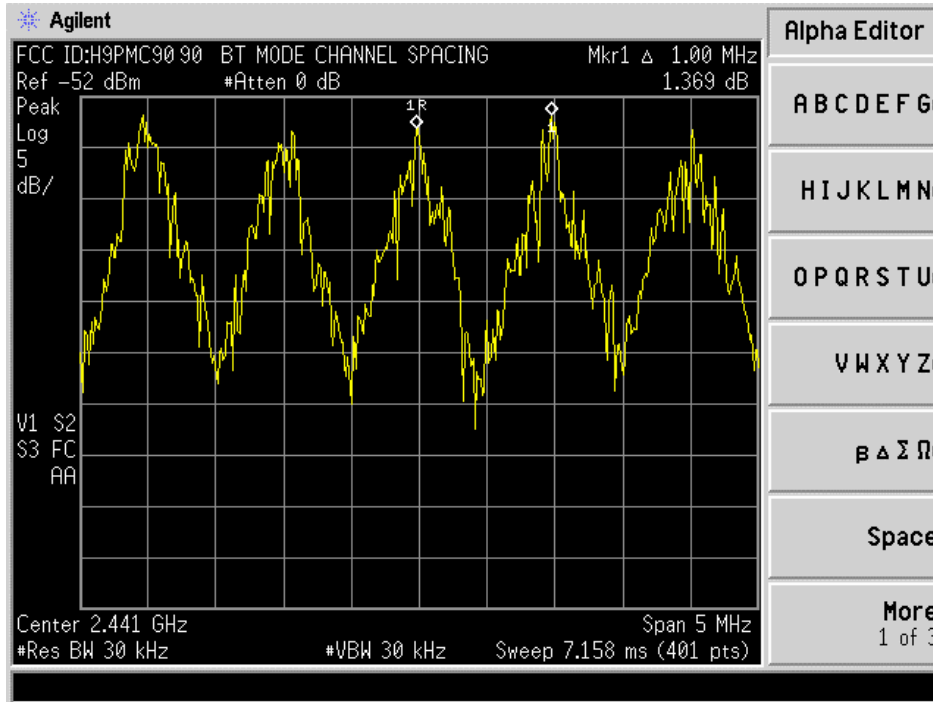


PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 18 of 36

EXHIBIT A – Test Results (Cont.)

Dwell Time

§15.247(b) / §15.205 & §15.209

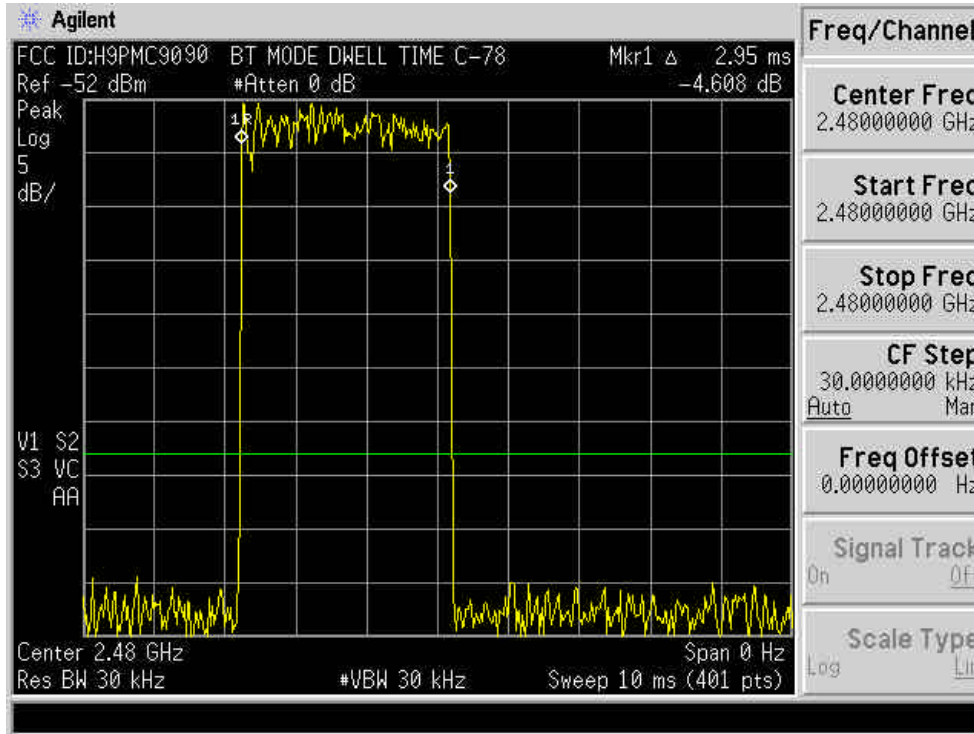


PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 19 of 36

EXHIBIT A – Test Results (Cont.)

Channel Hopping

§15.247(b) / §15.205 & §15.209

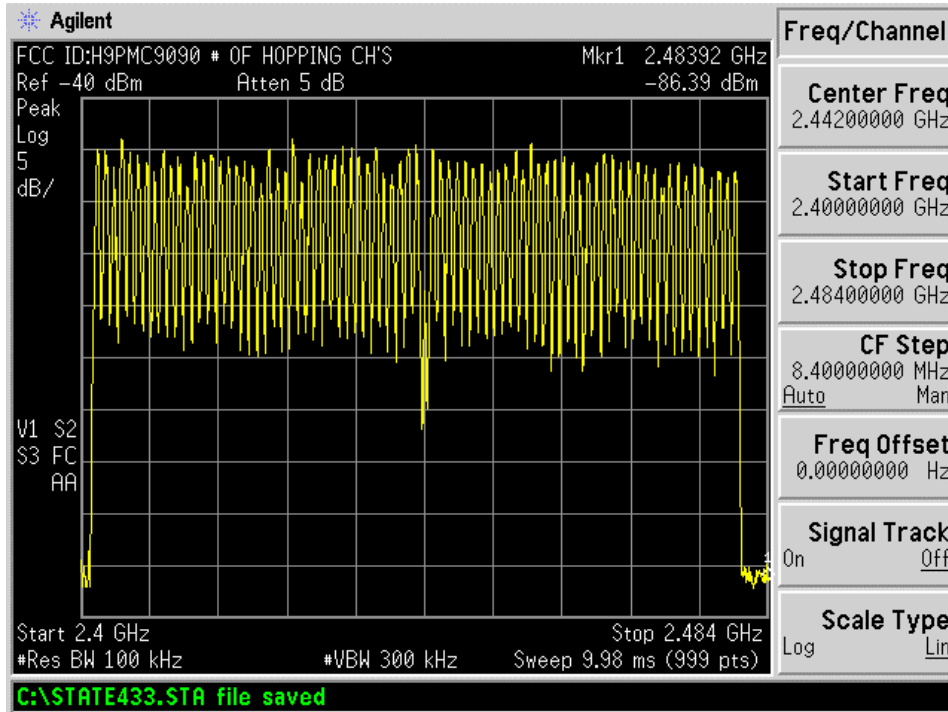

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 20 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 00

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (MV/m)	MARGIN (dB)
4804.00	-101.20	40.4	V	46.2	203.9	-7.8
7206.00	-112.10	47.4	V	42.3	130.6	-11.7
9608.00	-129.00	50.3	V	28.3	26.0	-25.7
12010.00	-135.00	53.7	V	25.7	19.3	-28.3

Table A-8. Harmonic Measurements

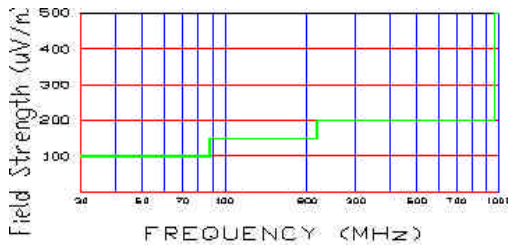


Figure A-7. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBu/m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 21 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 39

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (MV/m)	MARGIN (dB)
4882.00	-100.40	40.5	V	47.1	226.5	-6.9
7323.00	-110.30	48.0	V	44.7	171.8	-9.3
9764.00	-128.30	50.3	V	29.0	28.2	-25.0
12205.00	-135.00	53.7	V	25.7	19.3	-28.3

Table A-9. Radiated Fundamental & Harmonic Measurements

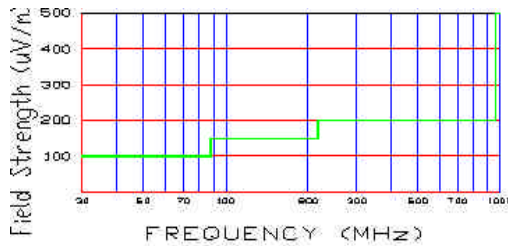


Figure A-8. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 µV/m (54dBµ/m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 22 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Harmonic Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Distance of Measurements: 3 Meters

Channel: 78

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	TOTAL (dBuV/m)	F/S (MV/m)	MARGIN (dB)
4960.00	-101.80	40.7	V	45.9	197.2	-8.1
7440.00	-111.20	48.2	V	44.0	158.5	-10.0
9920.00	-128.40	50.4	V	29.0	28.2	-25.0
12400.00	-135.00	53.8	V	25.8	19.5	-28.2

Table A-10. Radiated Fundamental & Harmonic Measurements

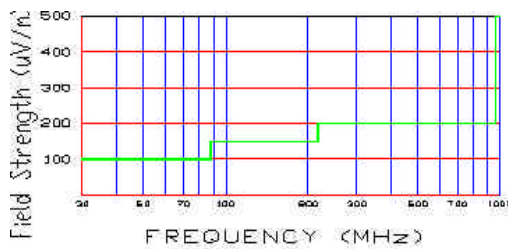


Figure A-9. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-18. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 23 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT’s harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.209.

Frequency	F/S (mV/m)	Measured Distance (Meters)
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table A-18. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3 Hz - 50GHz
HP 8566B	Spectrum Analyzer 100Hz – 22GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0 –70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 – 26.5GHz)
CDI Dipoles	Dipole Antennas (30 – 1000MHz)
EMCO 3116	Horn Antenna (18 – 40GHz)

PCTEST LAB TEST REPORT 15.247	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal
	FCC ID: H9PMC9090	Page 24 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements (Cont.)

§15.205 / §15.209 courtesy

Operating Frequency: 2480 MHz
 Number of Channels: 78

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	F/S (dB≡V/m)	F/S (uV/M)	Margin (dB)
2483.7	-103.6	33.0	V	36.4	66.1	-17.6
2484.6	-104.0	33.0	V	36.0	63.1	-18.0
2484.9	-106.5	33.1	V	33.6	47.9	-20.4
2485.1	-104.0	33.1	V	36.1	63.8	-17.9
2493.0	-108.0	33.2	V	32.2	40.7	-21.8
2496.0	-112.5	33.2	V	27.7	24.3	-26.3

Table A-19. Radiated Restricted Band Measurements at 3-meters

NOTES:


1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500µV/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The peak emissions above 1 GHz are not more than 20 dB above average limit.

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 25 of 36


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207

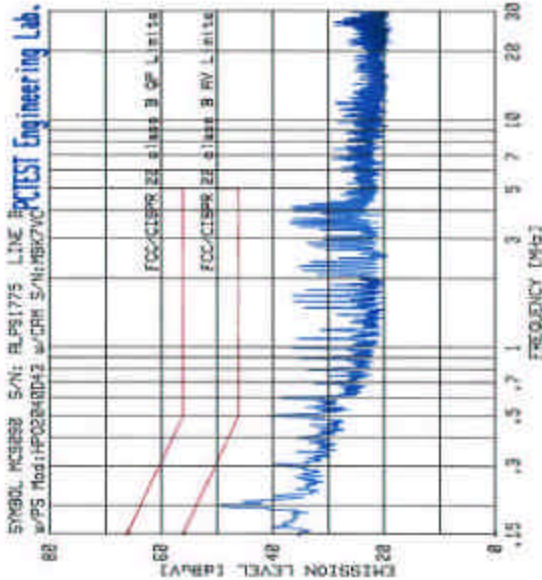

No.	Freq. [MHz]	Quasi-Pk [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	.198	47.75	63.65	-15.94	48.25	53.73	-13.44
2	.498	39.37	56.03	-16.66	32.03	46.04	-14.01
3	.598	38.58	56.00	-17.42	31.02	46.00	-14.98
4	3.498	35.79	56.00	-20.21	24.66	46.00	-21.34
5	3.598	35.81	56.00	-20.19	24.58	46.00	-21.42
6	4.195	35.51	56.00	-20.49	23.66	46.00	-22.34
7	.698	35.48	56.00	-20.52	27.94	46.00	-18.06
8	1.696	34.78	56.00	-21.22	27.14	46.00	-18.86
9	1.597	34.54	56.00	-21.46	26.62	46.00	-19.38
10	3.595	36.65	56.00	-19.35	23.66	46.00	-22.34

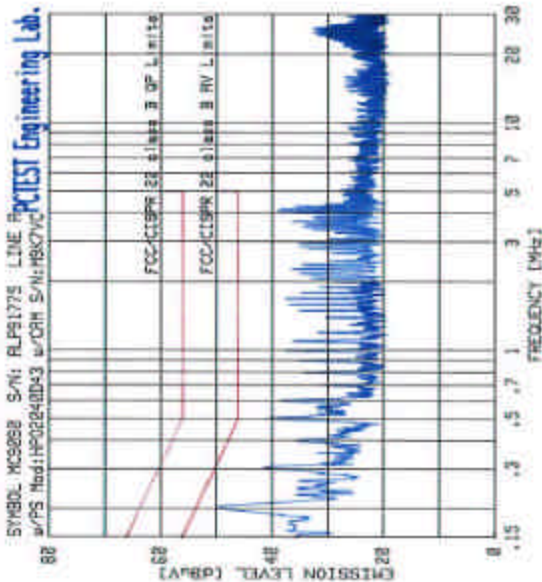

No.	Freq. [MHz]	Quasi-Pk [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	.198	45.69	63.65	-17.96	35.54	53.63	-18.09
2	.498	36.79	56.03	-19.24	32.44	46.03	-13.59
3	4.095	37.79	56.00	-18.21	24.13	46.00	-21.87
4	.598	38.23	56.00	-17.77	30.75	46.00	-15.25
5	4.195	36.59	56.00	-19.41	23.58	46.00	-22.42
6	.298	36.58	56.25	-19.67	28.49	50.32	-21.84
7	.998	36.33	56.00	-19.67	28.77	46.00	-17.23
8	1.696	35.66	56.00	-20.34	28.14	46.00	-17.86
9	1.597	35.50	56.00	-20.50	28.04	46.00	-17.96
10	2.298	34.78	56.00	-21.22	27.86	46.00	-18.14

NOTES:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None.*

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 26 of 36


EXHIBIT B – Labeling Requirements

Sample Label & Location

New Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19 (b)(2).



PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 27 of 36

EXHIBIT B – Labeling Requirements (Cont.)

Sample Label & Location

FCC ID LABEL



PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 28 of 36

EXHIBIT C – Block Diagram/Schematics

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 29 of 36

EXHIBIT D – Operational Description

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 30 of 36

EXHIBIT E – Test Setup Photographs

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 31 of 36

EXHIBIT F – EUT External/ Internal Photographs

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 32 of 36

EXHIBIT G – User’s Manual

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 33 of 36

EXHIBIT H – SAR Measurement Report

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 34 of 36

EXHIBIT I – Supplemental 15C WLAN Report

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 35 of 36

EXHIBIT A – Test Results (Cont.)

Radiated Measurements

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4824	-110.3	40.39	V	37.09	71.53	-16.91
7236	-116.3	47.42	V	38.12	80.54	-15.88
9648	-135	50.3	V	22.30	13.03	-31.70
12060	-135	53.7	V	25.7	19.28	-28.3

Table A-6. Peak Radiated Measurements @ 3 meters

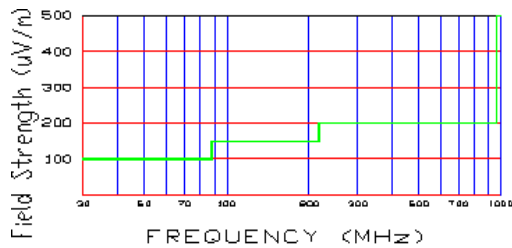


Figure A-5. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 1 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4874	-109.3	40.5	V	38.20	81.28	-15.8
7311	-116.5	48	V	38.50	84.14	-15.5
9748	-135	50.3	V	22.30	13.03	-31.7
12185	-135	53.7	V	25.70	19.28	-28.3

Table A-7. Peak Radiated Measurements @ 3 meters

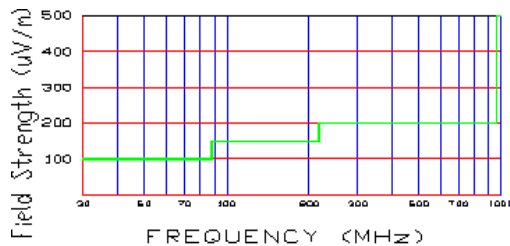


Figure A-6. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 2 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 1 Mbps

Distance of Measurements: 3 Meters

Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4924	-111.2	40.7	V	36.5	66.83	-17.5
7386	-118.3	48.2	V	36.9	69.98	-17.1
9848	-135	50.4	V	22.4	13.18	-31.6
12310	-135	53.8	V	25.8	19.50	-28.3

Table A-8. Peak Radiated Measurements @ 3 meters

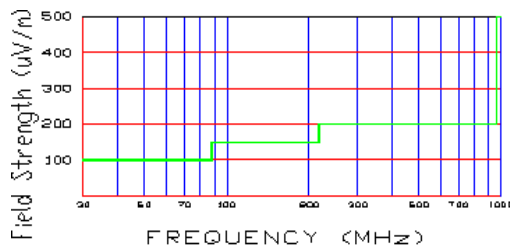


Figure A-7. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 3 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 01

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4824	-109.4	40.39	V	37.99	79.34	-16.01
7236	-118.5	47.42	V	35.92	62.52	-18.08
9648	-135	50.3	V	22.30	13.03	-31.70
12060	-135	53.7	V	25.7	19.28	-28.3

Table A-9. Peak Radiated Measurements @ 3 meters

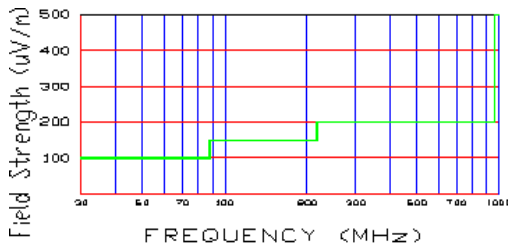


Figure A-8. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 4 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 06

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4874	-108.5	40.5	V	39.00	89.13	-15.0
7311	-119.3	48	V	35.70	60.95	-18.3
9748	-135	50.3	V	22.30	13.03	-31.7
12185	-135	53.7	V	25.70	19.28	-28.3

Table A-10. Peak Radiated Measurements @ 3 meters

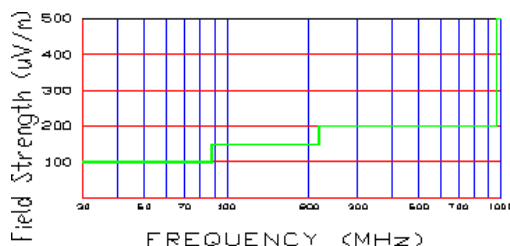


Figure A-9. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 5 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 11

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
4958	-111.3	40.7	V	36.4	66.07	-17.6
7437	-117.9	48.2	V	37.3	73.28	-16.7
9916	-135	50.4	V	22.4	13.18	-31.6
12395	-135	53.8	V	25.8	19.50	-28.2

Table A-11. Peak Radiated Measurements @ 3 meters

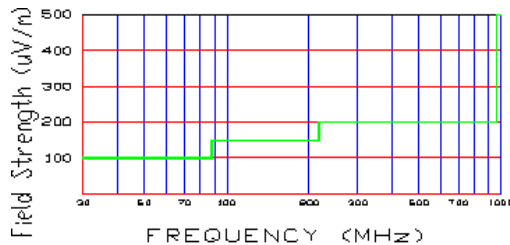


Figure A-10. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 6 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps

Distance of Measurements: 3 Meters

Channel: 149

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
11490	-117.0	52.8	V	43.3	146.22	-10.7
17235	-123.5	62.3	V	40.8	109.65	-13.2
22980	-135.0	66.0	V	38	79.43	-16
28725	-135.0	69.0	V	41	112.20	-13

Table A-12. Peak Radiated Measurements @ 3 meters

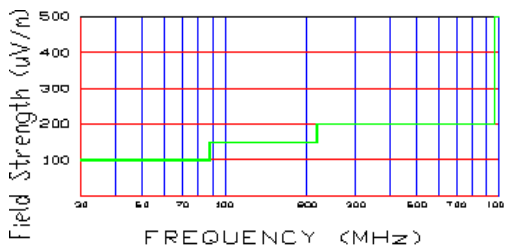


Figure A-11. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ /m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 7 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 157

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
11570	-115.6	52.9	V	43.6	151.36	-10.4
17355	-121.2	62.5	V	40.6	107.15	-13.4
23140	-135	66.4	V	38.4	83.18	-15.6
28925	-135	69.4	V	41.4	117.49	-12.6

Table A-13. Peak Radiated Measurements @ 3 meters

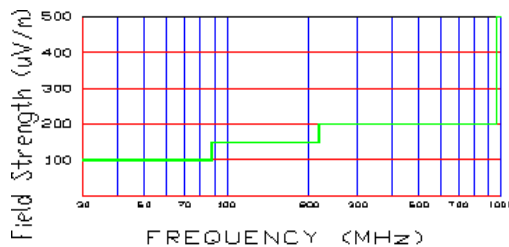


Figure A-12. Radiated limits at 3 meters.

NOTES:

- All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
- All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
- Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
- The peak emissions above 1 GHz are not more than 20 dB above the average limit.
- The antenna is manipulated through typical positions, polarity and length during the tests.
- The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
- The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
- < - - 135 dBm are below the analyzer floor level.
- Above 1 GHz, the limit is 500 μ V/m (54dBu/m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 8 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Measurements (Cont.)

§15.247(b) / §15.205 & §15.209

Transfer Rate: 36 Mbps
 Distance of Measurements: 3 Meters
 Channel: 165

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
11650	-112.7	53	V	42.8	138.04	-11.2
17475	-124.4	63.7	V	42.7	136.46	-11.3
23300	-130	66.9	V	38.9	88.10	-15.1
29125	-135	69.9	V	41.9	124.45	-12.1

Table A-14. Peak Radiated Measurements @ 3 meters

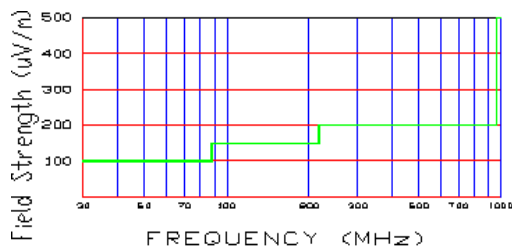


Figure A-13. Radiated limits at 3 meters.

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: * = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μ V/m (54dB μ m) at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 9 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements

§15.205 / §15.209

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurement was used, using RBW 1MHz – VBW 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table G-1 per Section 15.247.

Frequency	F/S (mV/m)	Measured Distance (Meters)
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table A-19. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3 Hz - 50GHz
HP 8566B	Spectrum Analyzer 100Hz – 22GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0 –70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 – 26.5GHz)
CDI Dipoles	Dipole Antennas (30 – 1000MHz)
EMCO 3116	Horn Antenna (18 – 40GHz)



PCTEST LAB TEST REPORT 15.247	 Supplemental 15C Report 	Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal
	FCC ID: H9PMC9090	Page 10 of 14

EXHIBIT A – Test Results (Cont.)

Radiated Restricted Band Measurements (Cont.)

§15.205 /§15.209 courtesy

Operating Frequency: 2462 MHz

Distance of Measurements: 3 Meters

Data Rate: 6 Mbps

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	F/S (dB μ V/m)	F/S (μ V/M)	Margin (dB)
2483.7	-104.6	33	V	35.4	58.88	-18.6
2484.5	-100.7	33	V	39.3	92.26	-14.7
2484.4	-117.5	33.1	V	22.6	13.49	-31.4
2485.1	-123	33.1	V	17.1	7.16	-36.9
2493.0	-127.4	33.2	V	12.8	4.37	-41.2
2496.0	-133	33.2	V	7.2	2.29	-46.8

Table A-20. Radiated Restricted Band Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. The conducted limits are shown on Figure A-14. Above 1 GHz the limit is 500 μ V/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The data in the table are Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
7. The peak emissions above 1 GHz are not more than 20 dB above the average limit.



PCTEST LAB TEST REPORT 15.247	 Supplemental 15C Report 	Reviewed by: Quality Manager		
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 11 of 14

EXHIBIT A – Test Results (Cont.)

Support Equipment

1	Symbol Bar Scanner	FCC ID:	H9PMC9063A	S/N:	ALP82022
2	Cable Adapter Module (CAM)	P/N:	ADP9000-100	S/N:	M9K7VC
3	CAM Power Supply	Model:	PSA-18U-480C		
		1.5m	Unshielded cord with 1 Ferrite Bead		
		2m	Unshielded AC Cord		
4	Toshiba Notebook	Model:	PA1221U-S2A	S/N:	07621293-3
		1.9m	Unshielded AC power cord		
	w/ NETGEAR PCMCIA Card	Model:	FA411	S/N:	FA42A31344130
		1.5m	Ethernet Cord		
5	WLAN(a) Access Point	FCC ID:	LDK102045	S/N:	FTX0903R0XV
	w/ Power Supply	Model:	PSA18U-480C		
		1.5m	Unshielded cord with 1 Ferrite Bead		
6	WLAN(b) Access Point	FCC ID:	H9PLA4131M	S/N:	00A0F851BB3B
	w/ Power Supply	P/N:	50-24000-024		
		2m	Unshielded AC power cord		
7	WLAN(g) Access Point	FCC ID:	LDK102049	S/N:	FTX0905R2Q3
		2m	Unshielded AC power cord		

Note: Access Points (a) and (g) used the same power supply



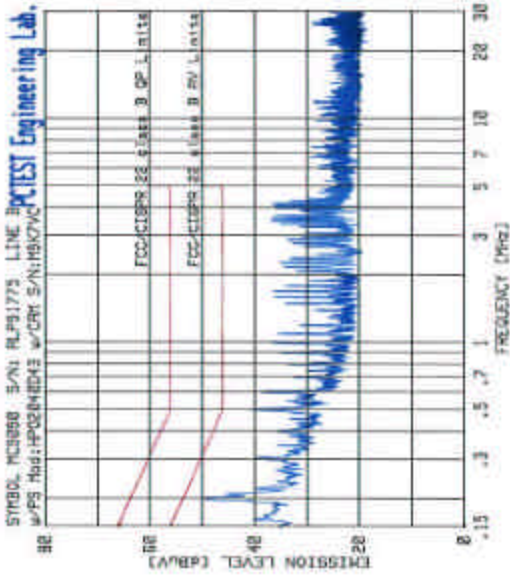
PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 12 of 14


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207



No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	0.198	47.75	63.00	-15.25	40.29	53.73	-13.44
2	0.436	39.37	56.00	-16.63	32.03	46.04	-14.01
3	0.598	36.23	56.00	-19.77	31.02	46.00	-14.98
4	0.798	35.78	56.00	-20.22	24.06	46.00	-21.94
5	1.195	35.81	56.00	-20.19	24.50	46.00	-21.50
6	1.596	36.51	56.00	-19.49	23.86	46.00	-22.14
7	1.998	35.49	56.00	-20.51	27.94	46.00	-18.06
8	2.596	34.78	56.00	-21.22	27.14	46.00	-18.86
9	3.197	34.54	56.00	-21.46	26.52	46.00	-19.48
10	3.995	36.65	56.00	-19.35	23.60	46.00	-22.40

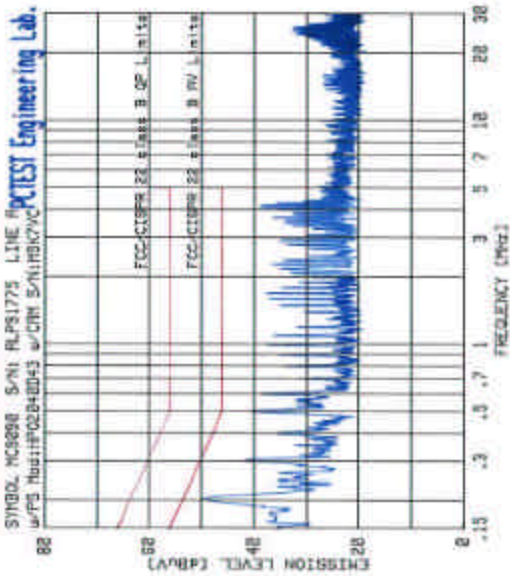

No.	Freq. [MHz]	Quasi-Pk [dBuV]	Limit [dBuV]	Margin [dB]	Average [dBuV]	Limit [dBuV]	Margin [dB]
1	0.198	46.69	63.00	-16.31	35.54	53.69	-18.15
2	0.436	38.79	56.00	-17.21	32.44	46.03	-13.59
3	0.598	37.79	56.00	-18.21	24.13	46.00	-21.87
4	0.798	36.23	56.00	-19.77	38.75	46.00	-15.25
5	1.195	36.50	56.00	-19.50	27.56	46.00	-22.42
6	1.596	36.50	56.00	-19.50	28.46	46.00	-22.42
7	1.998	36.33	56.00	-19.67	29.77	46.00	-17.23
8	2.596	35.66	56.00	-20.34	26.14	46.00	-17.86
9	3.197	35.52	56.00	-20.48	26.04	46.00	-17.96
10	3.995	34.78	56.00	-21.22	27.06	46.00	-18.94

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None*.

PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 13 of 14

EXHIBIT A – Test Results (Cont.)

Receiver Spurious Measurements

§15.205 / §15.209

Operating Frequency: 2462 MHz

Distance of Measurements: 3 Meters

Data Rate: 6 Mbps

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (uV/M)	Margin (dB)
66.3	-80.6	5.8	V	2.3	70	40.8	-7.8
87.0	-83.4	8.3	V	2.0	60	39.4	-8.1
148.7	-84.0	13.5	H	1.8	190	66.9	-7.0
233.3	-86.9	18.0	H	1.4	190	80.4	-7.9
330.0	-90.7	21.7	V	1.3	180	79.5	-8.0
561.0	-96.3	27.4	H	1.1	200	79.5	-8.0

Table A-18. Radiated Measurements at 3-meters

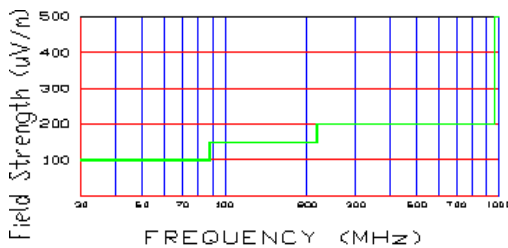


Figure A-17. Radiated limits at 3 meters

NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10th harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500µV/m at 3 meters radiated.



PCTEST LAB TEST REPORT 15.247		Supplemental 15C Report		Reviewed by: Quality Manager
Filename: 0504190296	Test Dates: April 15-28 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 14 of 14

EXHIBIT J – Supplemental 15E WLAN Report

PCTEST LAB TEST REPORT 15.247		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: 0504120256	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 36 of 36

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

The EUT was tested from 9kHz to the tenth harmonic of the fundamental frequency of the transmitter. Below 1GHz a CISPR quasi peak detector was used. Above 1 GHz average measurements were taken, using RBW= 1MHz, VBW= 10Hz, and linearly polarized horn antennas. In addition, peak measurements (RBW= 1MHz, VBW= 1MHz) were taken to ensure that the peak levels are not more than 20dB above the average limit. No harmonics/spurs peak emissions are more than 20dB above the average limit. Special attention is taken for the EUT's harmonic and spurious radiated emissions in the restricted bands of operations, as defined in Section 15.205.

Frequency	F/S (mV/m)	Measured Distance (Meters)
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table A-6. Restricted Band Limits

TEST MEASUREMENT EQUIPMENT

Agilent E4448A	PSA Spectrum Analyzer 3 Hz - 50GHz
HP 4448A	Spectrum Analyzer 100Hz – 50GHz
HP 83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
EMCO 3116	Horn Antenna (18 – 40GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0 –70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1 – 50GHz)
CDI Dipoles	Dipole Antennas (30 – 1000MHz)
EMCO 3116	Horn Antenna (18 – 40GHz)

PCTEST LAB TEST REPORT 15.407	 Supplemental 15E Report 	Reviewed by: Quality Manager
Filename: 0504120254	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal
	FCC ID: H9PMC9090	Page 1 of 8

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

Transfer Rate:	36 Mbps
Distance of Measurements:	3 Meters
Channel:	36

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
10360	-123.4	52.8	V	36.40	66.07	-17.6
15540	-124.3	62.3	V	45.00	177.83	-9
20720	-135	66	V	38.00	79.43	-16
25900	-135	69	V	41.00	112.20	-13

Table A-7. Radiated Measurements @ 3 meters

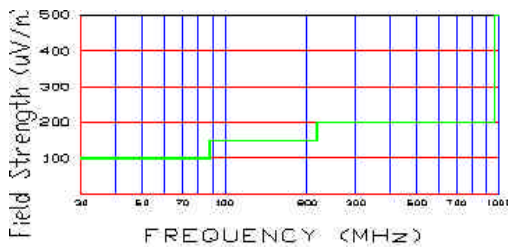


Figure A-5. Radiated limits at 3 meters.

NOTES:

1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz, VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

PCTEST LAB TEST REPORT 15.407		Supplemental 15E Report		Reviewed by: Quality Manager
Filename: 0504120254	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 2 of 8

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

Transfer Rate:	36 Mbps
Distance of Measurements:	3 Meters
Channel:	52

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
10520	-126.3	52.9	V	33.6	47.86	-20.4
15780	-131.2	62.5	V	38.3	82.22	-15.7
21040	-135.0	66.4	V	38.4	83.18	-15.6
26300	-135.0	69.4	V	41.4	117.49	-12.6

Table A-8. Radiated Measurements @ 3 meters

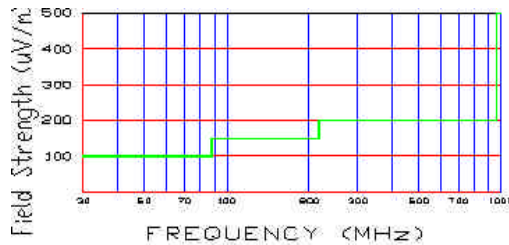


Figure A-6. Radiated limits at 3 meters.

NOTES:

1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz,
VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

PCTEST LAB TEST REPORT 15.407		Supplemental 15E Report		Reviewed by: Quality Manager
Filename: 0504120254	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 3 of 8

EXHIBIT A – Test Results (Cont.)

Undesirable Emissions: Radiated Measurements and Restricted Band Measurements

§15.407(b)(1) and (2), §15.205 & §15.209

Transfer Rate:	36 Mbps
Distance of Measurements:	3 Meters
Channel:	64

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBuV/m)	F/S (uV/m)	Margin (dB)
10640	-123.4	53.0	V	36.6	67.61	-17.4
15960	-125	63.7	V	45.7	192.75	-8.3
21280	-135	66.9	V	38.9	88.10	-15.1
26600	-140	69.9	V	36.9	69.98	-17.1

Table A-9. Radiated Measurements @ 3 meters

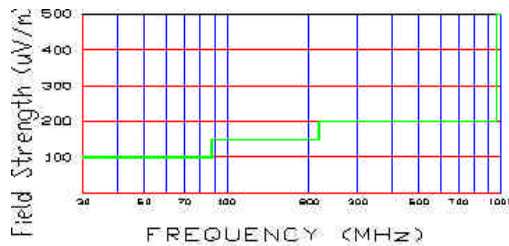


Figure A-7. Radiated limits at 3 meters.

NOTES:


1. The limit listed in Section 15.407(b) is -27 dBm/MHz EIRP. This is equivalent to a field strength of 68.24 dBuV/m @ 3m.
2. The Restricted Band limit (Section 15.205) for frequencies above 960 MHz is 54 dBuV/m @ 3m.
3. Average Measurements > 1GHz using RBW = 1 MHz,
VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. Levels < -140 dBm are at the analyzer noise floor.

PCTEST LAB TEST REPORT 15.407		Supplemental 15E Report		Reviewed by: Quality Manager
Filename: 0504120254	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 4 of 8


EXHIBIT A – Test Results (Cont.)

Line-Conducted Test Data

§15.207

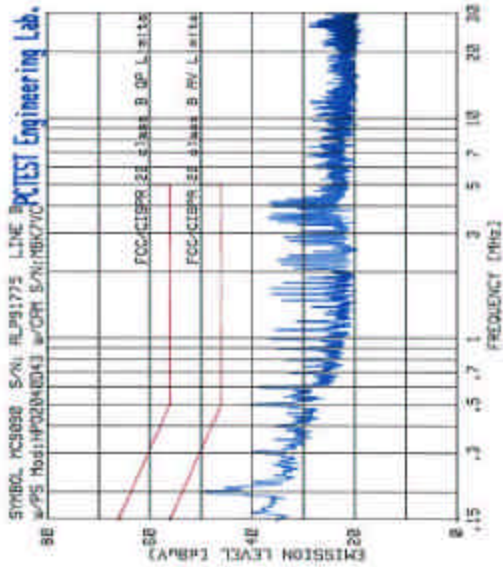

No.	Freq. (MHz)	Quasi-Pk (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)
1	0.100	47.75	53.00	-15.04	48.29	53.73	-13.44
2	0.498	39.37	56.00	-16.66	32.83	46.04	-14.01
3	0.598	30.58	56.00	-17.58	31.82	46.00	-14.58
4	3.495	35.78	56.00	-20.22	24.05	46.00	-21.54
5	3.595	35.81	56.00	-20.19	24.50	46.00	-21.50
6	4.195	36.51	56.00	-19.09	23.60	46.00	-22.14
7	0.598	31.58	56.00	-20.51	21.54	46.00	-18.85
8	1.595	34.78	56.00	-21.38	27.14	46.00	-18.85
9	1.597	34.54	56.00	-21.46	26.52	46.00	-19.38
10	3.595	35.55	56.00	-19.35	23.55	46.00	-22.34

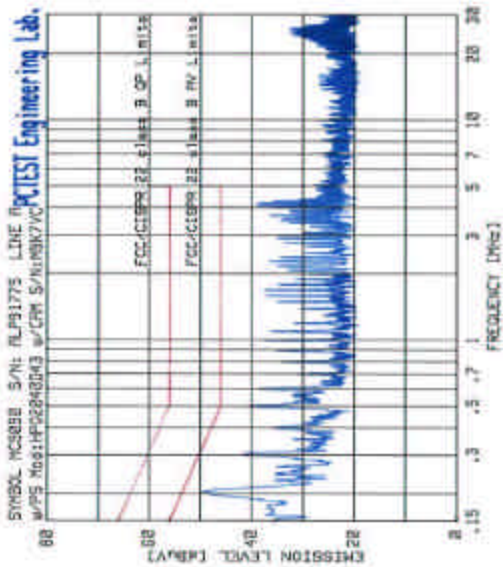

No.	Freq. (MHz)	Quasi-Pk (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)
1	0.100	46.88	53.00	-16.88	35.54	53.69	-10.15
2	0.498	38.79	56.00	-16.24	32.44	46.00	-13.59
3	0.598	37.79	56.00	-18.21	24.13	46.00	-21.87
4	3.495	38.23	56.00	-17.77	28.75	46.00	-19.25
5	4.195	36.50	56.00	-19.50	23.59	46.00	-22.42
6	0.598	38.38	56.00	-17.62	28.48	50.32	-21.94
7	0.598	36.33	56.00	-19.67	28.77	46.00	-17.23
8	1.595	35.86	56.00	-20.14	28.14	46.00	-17.88
9	1.597	35.60	56.00	-20.40	28.04	46.00	-17.98
10	3.595	34.78	56.00	-21.22	27.05	46.00	-18.54

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None*.

PCTEST LAB TEST REPORT 15.407		Supplemental 15E Report			Reviewed by: Quality Manager
Filename: 0504120254	Test Dates: April 15-28, 2005	EUT Type: Handheld Terminal	FCC ID: H9PMC9090	Page 5 of 8	