

Specific Absorption Rate (SAR) Test Report
 for
Symbol Technologies, Inc.
 on the
PDT 7530 Diamond WAN Terminal with Datatac Radio
Model: PDT 7530

Job # J2018638
 Test Report: 20186381
 Date of Report: July 31, 2000



NVLAP Laboratory Code 200201-0
 Accredited for testing to FCC Parts 15

| | | |
|--------------|--------------------|--|
| Tested by: | Suresh Kondapalli | |
| Reviewed by: | David Chernomordik | |

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

Table of Contents

- 1 JOB DESCRIPTION.....3
 - 1.1 Client Information3
 - 1.2 Equipment under test (EUT)3
 - 1.3 Test plan reference.....4
 - 1.4 System test configuration.....4
 - 1.4.1 System block diagram & Support equipment.....4
 - 1.4.2 Test Position.....5
 - 1.4.3 Test Condition.....6
 - 1.5 Modifications required for compliance.....6
 - 1.6 Additions, deviations and exclusions from standards.....6
- 2 SAR EVALUATION6
 - 2.1 SAR Limits.....6
 - 2.2 Configuration Photographs7
 - 2.3 System Verification8
 - 2.4 Evaluation Procedures8
 - 2.5 Test Results9
- 3 TEST EQUIPMENT.....11
 - 3.1 Equipment List11
 - 3.2 Muscle Tissue Simulating Liquid.....12
 - 3.3 E-Field Probe Calibration.....12
 - 3.4 Measurement Uncertainty13
 - 3.5 Measurement Tractability13
- 4 WARNING LABEL INFORMATION - USA13
- 5 REFERENCES14
- 6 APPENDIX A - SAR EVALUATION DATA.....15
- 7 APPENDIX B - E-FIELD PROBE CALIBRATION DATA.....22

1 JOB DESCRIPTION

1.1 Client Information

The EUT has been tested at the request of

Company: Symbol Technologies, Inc.
Address: 1 Symbol Plaza,
 Holtsvillie, N.Y. 11742-1300
 U.S.A

Name of contact: Mr. Sandy Mazzola
Telephone: 631-738-5373
Fax: 631-738-3318

1.2 Equipment under test (EUT)

The Symbol Technologies Inc. PDT 7530 is based on the Symbol Technologies Diamond (PDT7500 series) terminal with a Motorola Datatac radio module imbedded inside. The Symbol terminal is a handheld portable data terminal with WAN capability supplied by Motorola Type 3 Datatac radio module. The Motorola module was FCC approved to FCC Part 90 under FCC ID: MKMPW1100-1. This test report is a part of the Symbol terminal's application for FCC ID: H9PPDT7530.

The PDT 7500 series family of portable data terminals puts the processing power of 485 PC in the user's hand. The terminal uses a rechargeable Lithium-Ion 1400 mAH smart battery, and incorporates pen technology and bar code scanning capability in key-based terminal.

The Datatac radio module is a 1 watt transmitter that is duty cycle limited to a maximum of 16% as per the Motorola's users manual. This is due to overheating and shutdown considerations of the module itself.

The normal operation of the Motorola Datatac RF module is very much different than that of a continuous use voice transmitter. These devices are primarily used in dispatch, telemetry, simple two-way messaging type of applications; mostly bursty data retrieval/delivery tapes of profiles. This is the intended use for Ardis RD-LAP WAN (Datatac).

| | | | |
|--------------------------------|-----------------------------|--------------------|--------------------------|
| Equipment | Terminal with Datatac Radio | | |
| Trade Name | Symbol Technologies | Model No. | PDT 7530 |
| FCC ID | H9PPDT7530 | S/N No. | Not Labeled |
| Category | Portable | RF Exposure | Uncontrolled Environment |
| Frequency Band (uplink) | 824 MHz – 849 MHz | System | Datatac Radio |

| EUT Antenna Description | | | |
|--------------------------------|----------------|----------------------|---------------------|
| Type | Monopole | Configuration | External, Removable |
| Dimensions | 57.15 mm (L) | Gain | 0 dBi |
| Location | Right side top | | |

1.3 Test plan reference

FCC rule part 2.1093, FCC Docket 96-326 & Supplement C to OET Bulletin 65

1.4 System test configuration


1.4.1 System block diagram & Support equipment

Support Equipment:

None, the unit is a standalone device.

System Block Diagram:

The diagram shown below details test configuration of the equipment under test.

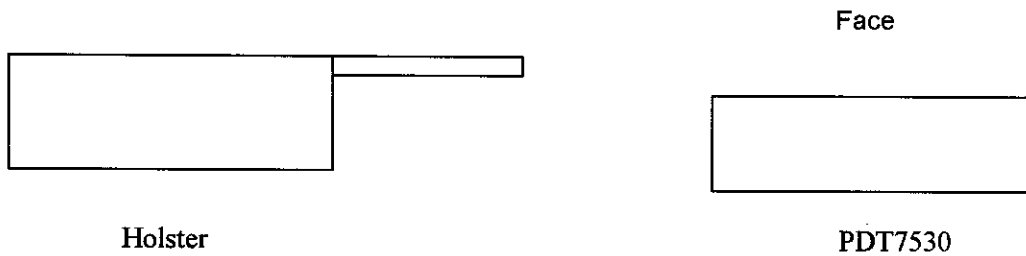

| | | |
|-------------|-------------|----------------------|
| S: Shielded | U: Unshield | F: With Ferrite Core |
|-------------|-------------|----------------------|

1.4.2 Test Position

The EUT was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in C95.1 (1992) and Supplement C of OET 65 (1998). The EUT was placed in the intended use position, i.e. touching the human body or hand. Please refer to figure 1 below for the position details:

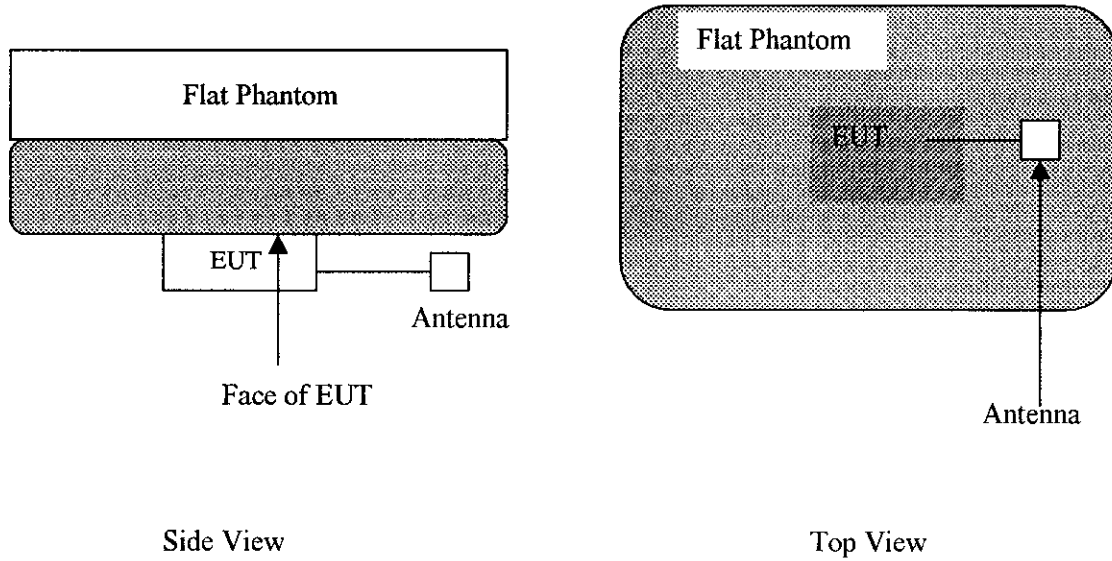


Figure 1: Intended use position

1.4.3 Test Condition

During tests, the worst case data (max. RF coupling) was determined with following conditions:

| | | | |
|-----------------------|-------------------------|--|----------------|
| EUT Antenna | Fixed | Orientation | N/A |
| Usage | Body-worn and hand-held | Distance between base of EUT and the liquid surface: | See data below |
| Simulating human hand | Not Used | EUT Battery | Fully Charged |
| Power output | 1.00W Conducted | | |

The spatial peak SAR values were accessed for lowest, middle and highest operating channels defined by the manufacturer. Tests were performed at 16% duty cycle. 30 milliseconds, transmitter "On" and 150 milliseconds, transmitter "Off". This is due to overheating and shut down considerations of the radio module.

Radiated emission measurement was performed, before and after the SAR tests to ensure that the EUT operated at the highest power level.

1.5 Modifications required for compliance

No modifications were implemented by Intertek Testing Services.

1.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusions have been made from standard.

2 SAR EVALUATION

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

| EXPOSURE (General Population/Uncontrolled Exposure environment) | SAR (W/kg) |
|--|---------------|
| Average over the whole body | 0.08 |
| Spatial Peak (1g) | 1.60 |
| Spatial Peak for hands, wrists, feet and ankles (10g) | 4.00 |

2.2 Configuration Photographs

Worst-Case SAR measurement



2.3 System Verification

Prior to the assessment, the system was verified to the $\pm 5\%$ of the specifications by using the system validation kit. The validation was performed at 900 MHz.

| Validation kit | Targeted SAR _{1g} (mW/g) | Measured SAR _{1g} (mW/g) |
|--------------------|-----------------------------------|-----------------------------------|
| D900V2, S/N #: 013 | 4.03 | 3.97 |

2.3 Evaluation Procedures

The SAR evaluation was performed with the following procedures:

- a. SAR was measured at a fixed location above the reference point and used as a reference value for the assessing the power drop.
- b. The SAR distribution at the exposed side of the flat phantom was measured at a distance of 2.0 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
- c. Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 1.6 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- d. Re-measurement of the SAR value at the same location as in step a. above. If the value changed by more than 5 %, the evaluation was repeated.

2.4 Test Results

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detail measurement data and plots which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

The maximum spatial peak SAR values average over 1g assessed in "normal" position was 0.192 mW/g. The unit is in compliance with the requirements of the FCC for body requirements.

The maximum spatial peak SAR values average over 10g assessed in "normal" position was 0.134 mW/g. The unit is in compliance with the requirements of the FCC for hands and feet requirements.

| | | | |
|-------------|----------|----------------|-------------------|
| Trade Name: | Wireless | Model No.: | PDT7530 |
| Serial No.: | Unit # 1 | Test Engineer: | Suresh Kondapalli |

| TEST CONDITIONS | | | |
|------------------------------|-----------|-----------------------------|-------------|
| Ambient Temperature | 24.8 °C | Relative Humidity | 48 % |
| Test Signal Source | Test Mode | Signal Modulation | Unmodulated |
| Output Power Before SAR Test | 0.925W | Output Power After SAR Test | 0.950 W |
| Test Duration | 25 Min. | Number of Battery Change | Every Scan |

| Usage (Touch position) | | | | | | | |
|------------------------|---------------|----------------|----------|---------|-----------------------|-----------------------------------|------------------------------------|
| Plots # | Channel (MHz) | Operating Mode | Position | Antenna | Distance From Phantom | Measured SAR _{1g} (mW/g) | Measured SAR _{10g} (mW/g) |
| 1 | 815 | Normal** | Face up | Fixed | Normal* | 0.183 | 0.127 |
| 2 | 825 | Normal** | Face up | Fixed | Normal* | 0.192 | 0.134 |
| 3 | 806 | Normal** | Face up | Fixed | Normal* | 0.128 | 0.089 |

Note:

- a) Worst case data were reported
- b) Duty cycle factor included in the measured SAR data
- c) Uncertainty of the system is not included

- PDT 7530 is normally inserted screen to long side of holster (facing user) as it was setup to protect the screen.

** Normal operation during the tests; was 30 milliseconds "On" and 150 milliseconds "Off" unmodulated.

3 TEST EQUIPMENT

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the SPEAG model DASY 3 automated near-field scanning system, which is package, optimized for dosimetric evaluation of mobile radios [3]. The following major equipment/components were used for the SAR evaluations:

| SAR Measurement System | | | |
|------------------------|--|------------|-----------|
| EQUIPMENT | SPECIFICATIONS | S/N # | CAL. DATE |
| Robot | Stäubi RX60L Repeatability: ± 0.025 mm Accuracy: 0.806×10^{-3} degree Number of Axes: 6 | 597412-01 | N/A |
| E-Field Probe | ET3DV5 Frequency Range: 10 MHz to 6 GHz Linearity: ± 0.2 dB Directivity: ± 0.1 dB in brain tissue | 1333 | 04/10/00 |
| Data Acquisition | DAE3 Measurement Range: $1\mu\text{V}$ to $>200\text{mV}$ Input offset Voltage: $< 1\mu\text{V}$ (with auto zero) Input Resistance: 200 M | 317 | N/A |
| Phantom | Generic Twin V3.0 Type: Generic Twin, Homogenous Shell Material: Fiberglass Thickness: 2 ± 0.1 mm Capacity: 20 liter Ear spacer: 4 mm (between EUT ear piece and tissue simulating liquid) | N/A | N/A |
| Simulated Tissue | Mixture Please see section 3.2 for details | N/A | 07/27/00 |
| Power Meter | HP 435A w/ 8481H sensor Frequency Range: 100kHz to 18 GHz Power Range: $300\mu\text{W}$ to 3W | 1312A01255 | 02/16/00 |

3.2 Muscle Tissue Simulating Liquid

| Ingredient | Frequency (800 - 850 MHz) |
|-------------|---------------------------|
| Water | 54.05 % |
| Sugar | 45.05 % |
| Salt | 0.1 % |
| Bactericide | 0.8 % |

The dielectric parameters were verified prior to assessment using the HP 85070A dielectric probe kit and the HP 8753C network Analyzer. The dielectric parameters were:

| Frequency (MHZ) | ϵ^* | σ^* (mho/m) | ρ^{**} (kg/m ³) |
|-----------------|--------------|--------------------|----------------------------------|
| 835 | 56.1 ± 5% | 0.95 ± 10% | 1000 |

* *worst case uncertainty of the HP 85070A dielectric probe kit*

** *worst case assumption*

3.3 E-Field Probe Calibration

Probes were calibrated by the manufacturer in the TEM cell ifi 110. To ensure consistency, a strict protocol was followed. The conversion factor (ConF) between this calibration and the measurement in the tissue simulation solution was performed by comparison with temperature measurement and computer simulations. Probe calibration factors are included in Appendix C.

3.4 Measurement Uncertainty

The uncertainty budget has been determined for the DASY3 measurement system according to the NIS81 [5] and the NIST 1297 [6] documents and is given in the following table. The extended uncertainty (K=2) was assessed to be 23.5 %

| UNCERTAINTY BUDGET | | | | |
|--|--------------|-----------------|---------------|-----------------|
| Uncertainty Description | Error | Distrib. | Weight | Std.Dev. |
| Probe Uncertainty | | | | |
| Axial isotropy | ±0.2 dB | U-shape | 0.5 | ±2.4 % |
| Spherical isotropy | ±0.4 dB | U-shape | 0.5 | ±4.8 % |
| Isotropy from gradient | ±0.5 dB | U-shape | 0 | |
| Spatial resolution | ±0.5 % | Normal | 1 | ±0.5 % |
| Linearity error | ±0.2 dB | Rectang. | 1 | ±2.7 % |
| Calibration error | ±3.3 % | Normal | 1 | ±3.3 % |
| SAR Evaluation Uncertainty | | | | |
| Data acquisition error | ±1 % | Rectang. | 1 | ±0.6 % |
| ELF and RF disturbances | ±0.25 % | Normal | 1 | ±0.25 % |
| Conductivity assessment | ±10 % | Rectang. | 1 | ±5.8 % |
| Spatial Peak SAR Evaluation Uncertainty | | | | |
| Extrapol boundary effect | ±3 % | Normal | 1 | ±3 % |
| Probe positioning error | ±0.1 mm | Normal | 1 | ±1 % |
| Integrat. And cube orient | ±3 % | Normal | 1 | ±3 % |
| Cube shape inaccuracies | ±2 % | Rectang. | 1 | ±1.2 % |
| Device positioning | ±6 % | Normal | 1 | ±6 % |
| Combined Uncertainties | | | | ±11.7 % |

3.5 Measurement Tractability

All measurements described in this report are traceable to National Institute of Standards and Technology (NIST) standards or appropriate national standards.

4 WARNING LABEL INFORMATION - USA

Not Applicable

5 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1991: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 Ghz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1992
- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, "Automated E-field scanning system for dosimetric assessments", *IEEE Transaction on Microwave Theory and Techniques*, vol. 44, pp. 105-113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetic evaluation of mobile communications equipment with know precision", *IEICE Transactions on Communications*, vol. E80-B, no. 5, pp.645-652, May 1997.
- [5] NIS81, NAMAS, "The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddinton, Middlesex, England, 1994.
- [6] Barry N. Taylor and Chris E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.

6 APPENDIX A - SAR EVALUATION DATA

Please note that the graphical visualization of the phone position onto the SAR distribution gives only limited information on the current distribution of the device, since the curvature of the head results in graphical distortion. Full information can only be obtained either by H-field scans in free space or SAR evaluation with a flat phantom.

Powerdrift is the measurement of power drift of the device over one complete SAR scan.

Symbol PDT7530

Plot #1


Generic Twin Phantom; Flat Section; Position: (90°, 90°); Frequency: 815 MHz

Probe: ET3DV5 - SNI333; ConvF(5.70, 5.70, 5.70); Crest factor: 6.0; Muscle 815 MHz: $\sigma = 0.94$ mho/m $\epsilon_r = 56.5$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 0.183 mW/g; SAR (10g): 0.127 mW/g; (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdrift: 0.15 dB

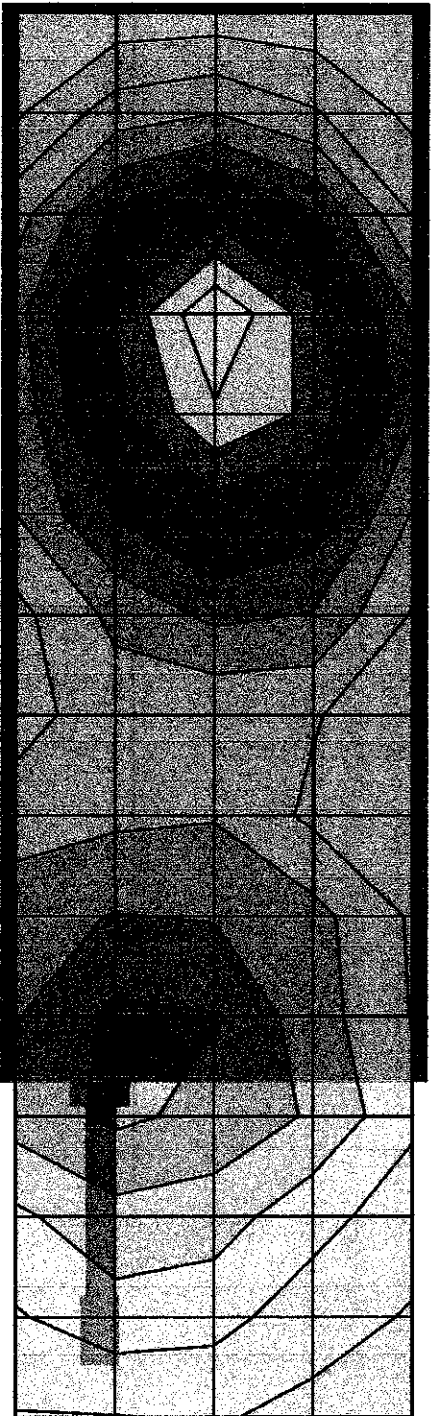

SAR_{tot} [mW/g]

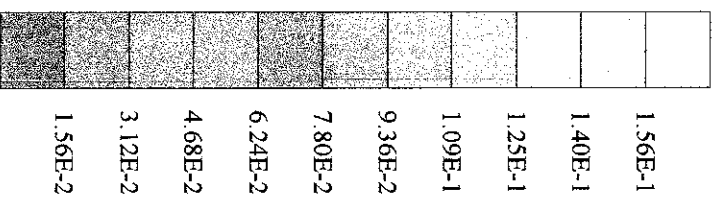

Symbol PDT7530


Plot #2

Generic Twin Phantom, Flat Section, Position: (90°, 90°), Frequency: 825 MHz


Probe: ET3DV5 - SN1333; ConvF(5.70, 5.70, 5.70); Crest factor: 6.0; Muscle 815 MHz: $\sigma = 0.94$ mho/m $\epsilon_r = 56.5$ $\rho = 1.00$ g/cm³
 Cube 5x5x7: SAR (1g): 0.192 mW/g, SAR (10g): 0.134 mW/g, (Worst-case extrapolation)

Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0

Powerdft: 0.10 dB

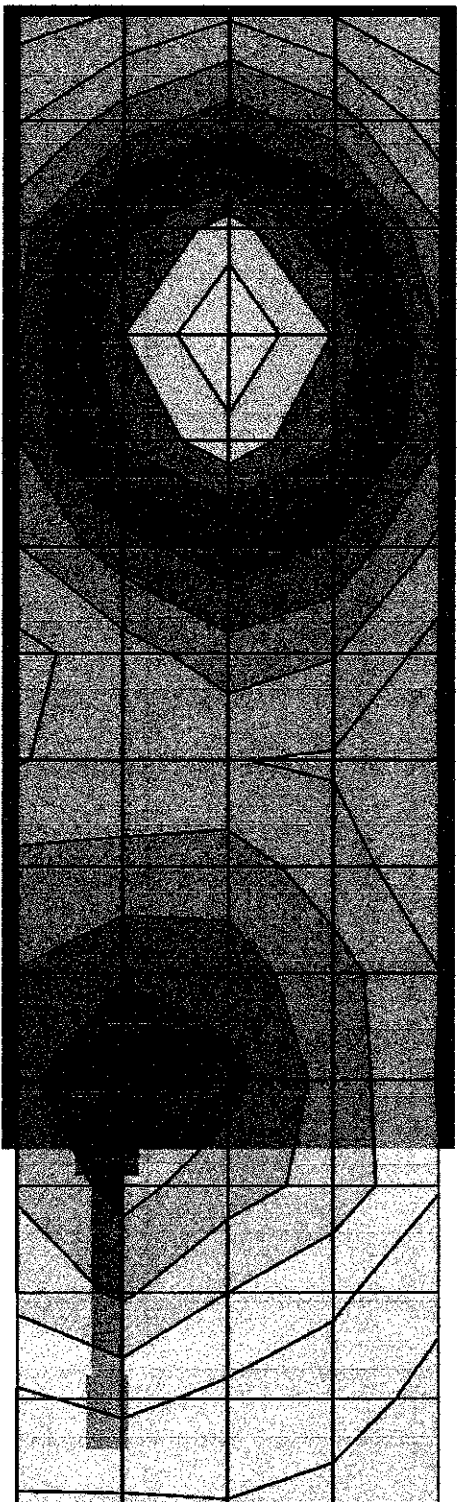


SAR_{10g} [mW/g]

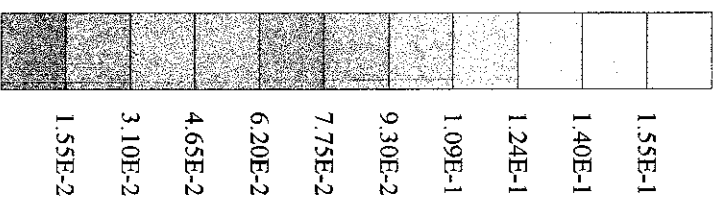


Symbol PDT7530

Plot # 3

Generic Twin Phantom; Flat Section; Position: (90°, 90°); Frequency: 806 MHz
Probe: ET3DV5 - SN1333; ConvF(5, 70, 5, 70); Crest factor: 6.0; Muscle 815 MHz: $\sigma = 0.94$ mho/m $\epsilon_r = 56.5$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.128 mW/g, SAR (10g): 0.0891 mW/g, (Worst-case extrapolation)
Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
Powerdiff: -0.08 dB

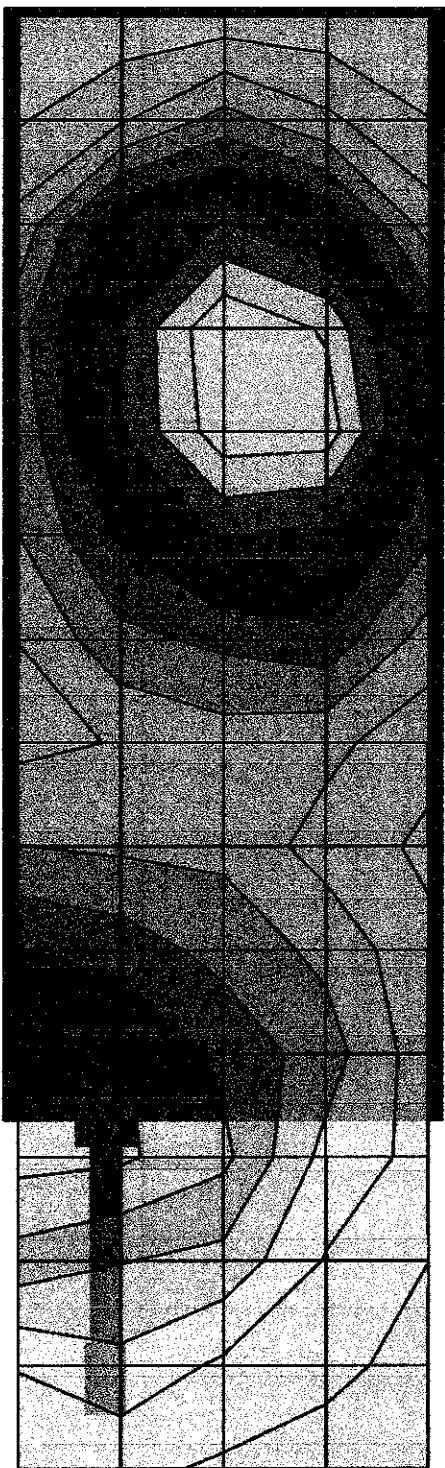

SAR_{10g} [mW/g]

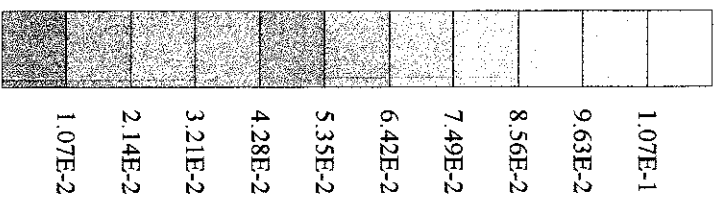

7 APPENDIX B - E-FIELD PROBE CALIBRATION DATA

See Separate Attachment

See Below

**Schmid & Partner
Engineering AG**

Staffelstrasse 8, 8045 Zurich, Switzerland, Telefon +41 1 280 08 60, Fax +41 1 280 08 64

Probe ET3DV5

SN:1333

| | |
|-------------------|-------------------|
| Manufactured: | December 20, 1997 |
| Last calibration: | March 18, 1999 |
| Recalibrated: | April 10, 2000 |

Calibrated for System DASY3

ET3DV5 SN:1333

DASY3 - Parameters of Probe: ET3DV5 SN:1333

Sensitivity in Free Space

| | |
|-------|--|
| NormX | 2.39 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormY | 2.36 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormZ | 2.34 $\mu\text{V}/(\text{V}/\text{m})^2$ |

Diode Compression

| | |
|-------|--------|
| DCP X | 100 mV |
| DCP Y | 100 mV |
| DCP Z | 100 mV |

Sensitivity in Tissue Simulating Liquid

Brain 450 MHz $\epsilon_r = 48 \pm 5\%$ $\sigma = 0.50 \pm 10\% \text{ mho/m}$

| | | | |
|---------|-------------------|------------------|------|
| ConvF X | 6.03 extrapolated | Boundary effect: | |
| ConvF Y | 6.03 extrapolated | Alpha | 0.13 |
| ConvF Z | 6.03 extrapolated | Depth | 3.57 |

Brain 900 MHz $\epsilon_r = 42.5 \pm 5\%$ $\sigma = 0.86 \pm 10\% \text{ mho/m}$

| | | | |
|---------|----------------------|------------------|------|
| ConvF X | 5.70 $\pm 7\%$ (k=2) | Boundary effect: | |
| ConvF Y | 5.70 $\pm 7\%$ (k=2) | Alpha | 0.34 |
| ConvF Z | 5.70 $\pm 7\%$ (k=2) | Depth | 3.00 |

Brain 1500 MHz $\epsilon_r = 41 \pm 5\%$ $\sigma = 1.32 \pm 10\% \text{ mho/m}$

| | | | |
|---------|-------------------|------------------|------|
| ConvF X | 5.25 interpolated | Boundary effect: | |
| ConvF Y | 5.25 interpolated | Alpha | 0.61 |
| ConvF Z | 5.25 interpolated | Depth | 2.23 |

Brain 1800 MHz $\epsilon_r = 41 \pm 5\%$ $\sigma = 1.69 \pm 10\% \text{ mho/m}$


| | | | |
|---------|----------------------|------------------|------|
| ConvF X | 5.03 $\pm 7\%$ (k=2) | Boundary effect: | |
| ConvF Y | 5.03 $\pm 7\%$ (k=2) | Alpha | 0.74 |
| ConvF Z | 5.03 $\pm 7\%$ (k=2) | Depth | 1.85 |

Sensor Offset


| | | |
|----------------------------|---------------|----|
| Probe Tip to Sensor Center | 2.7 | mm |
| Optical Surface Detection | 1.9 \pm 0.2 | mm |

Receiving Pattern (ϕ), $\theta = 0^\circ$


f = 30 MHz, TEM cell if110

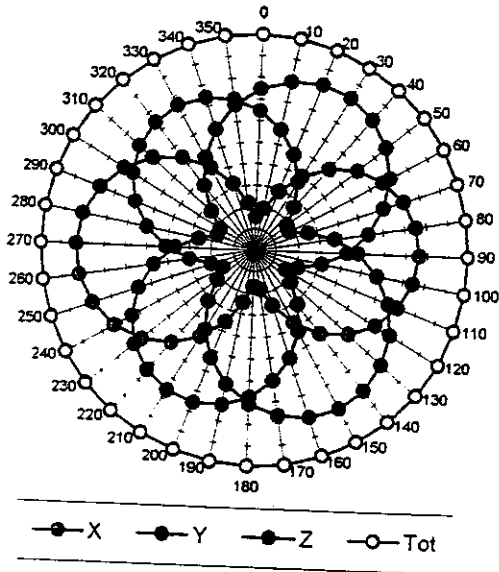


f = 100 MHz, TEM cell if110

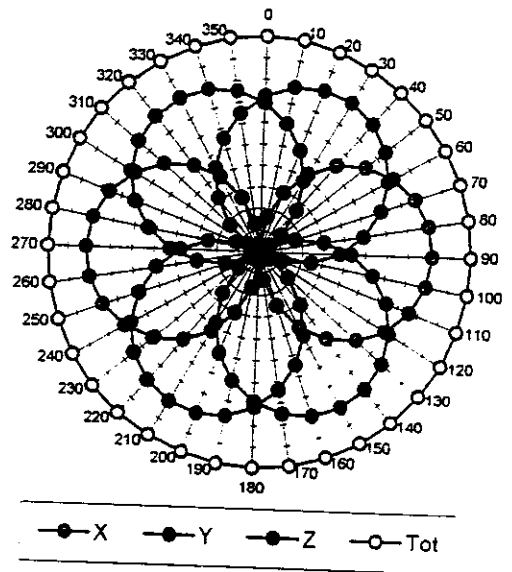

f = 300 MHz, TEM cell if110

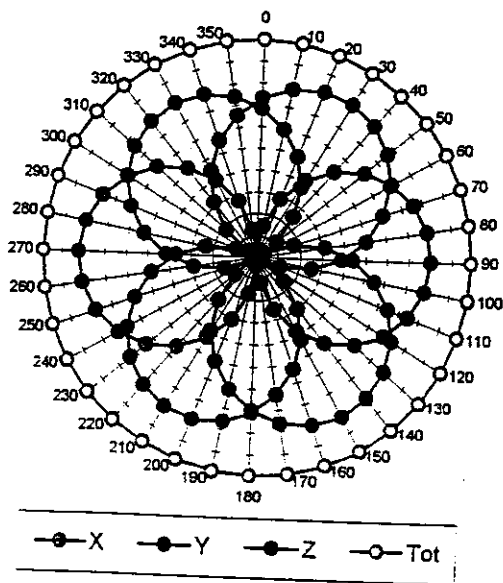


f = 900 MHz, TEM cell if110

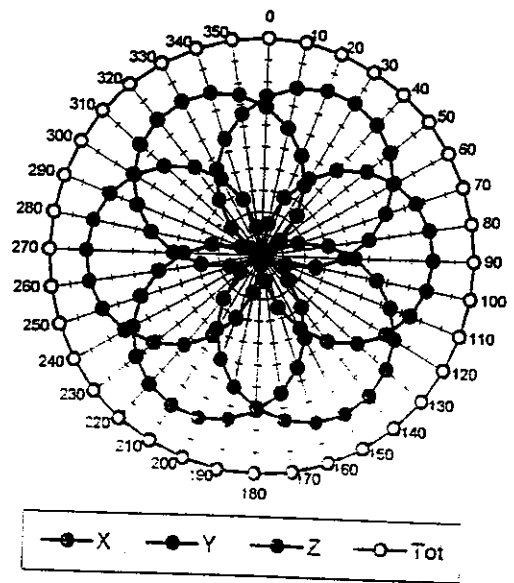



Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22, R26)

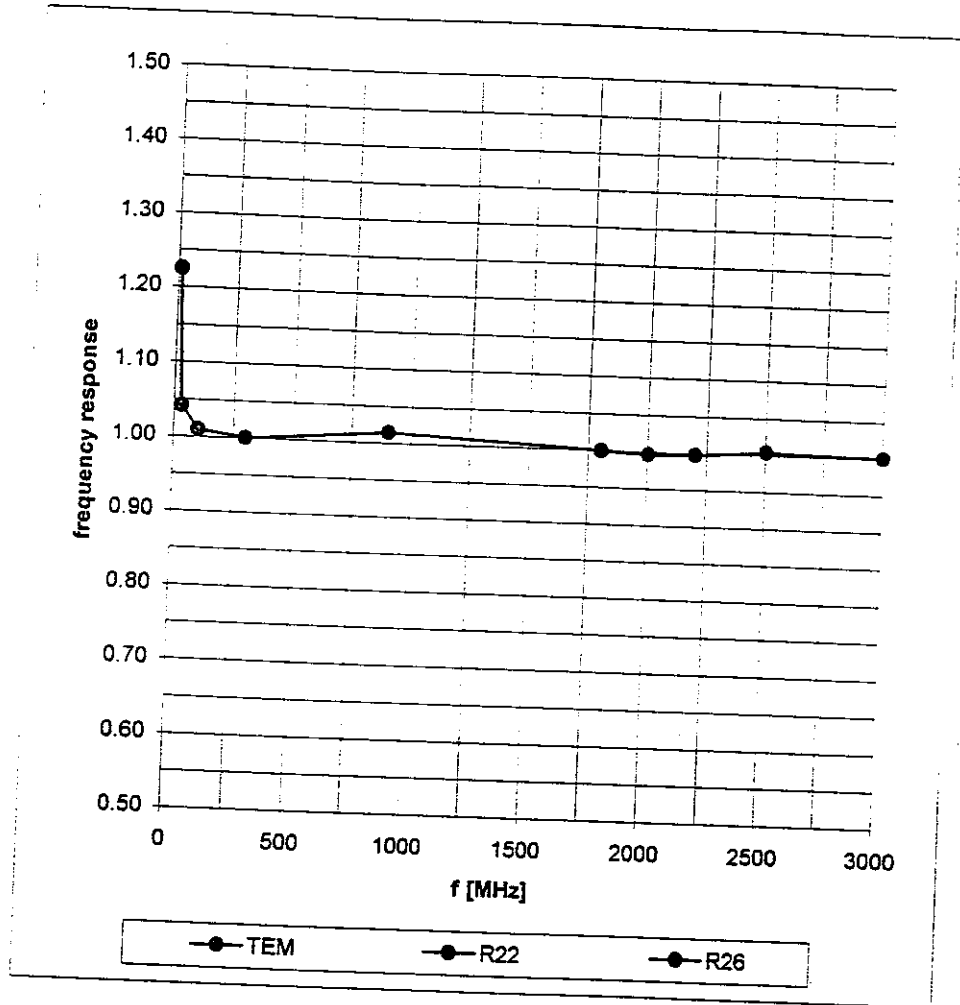


Dynamic Range f(SAR_{brain})

(TEM-Cell:ifi110)

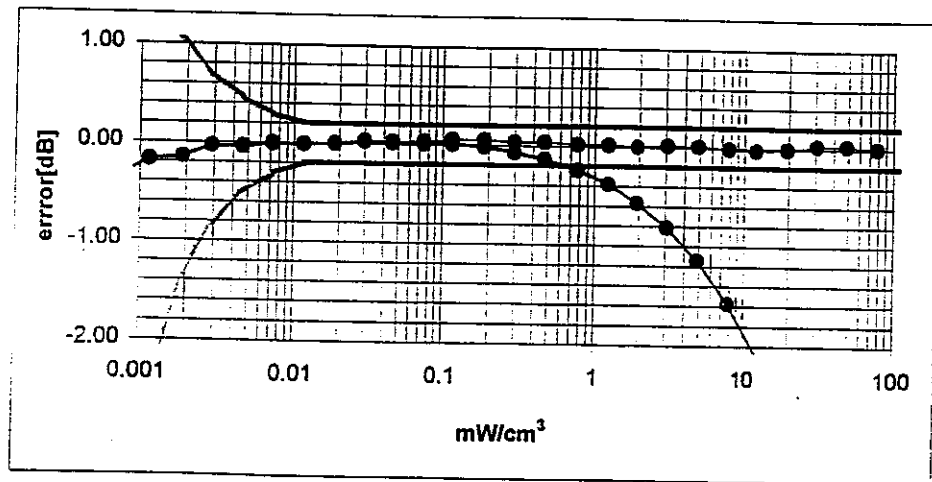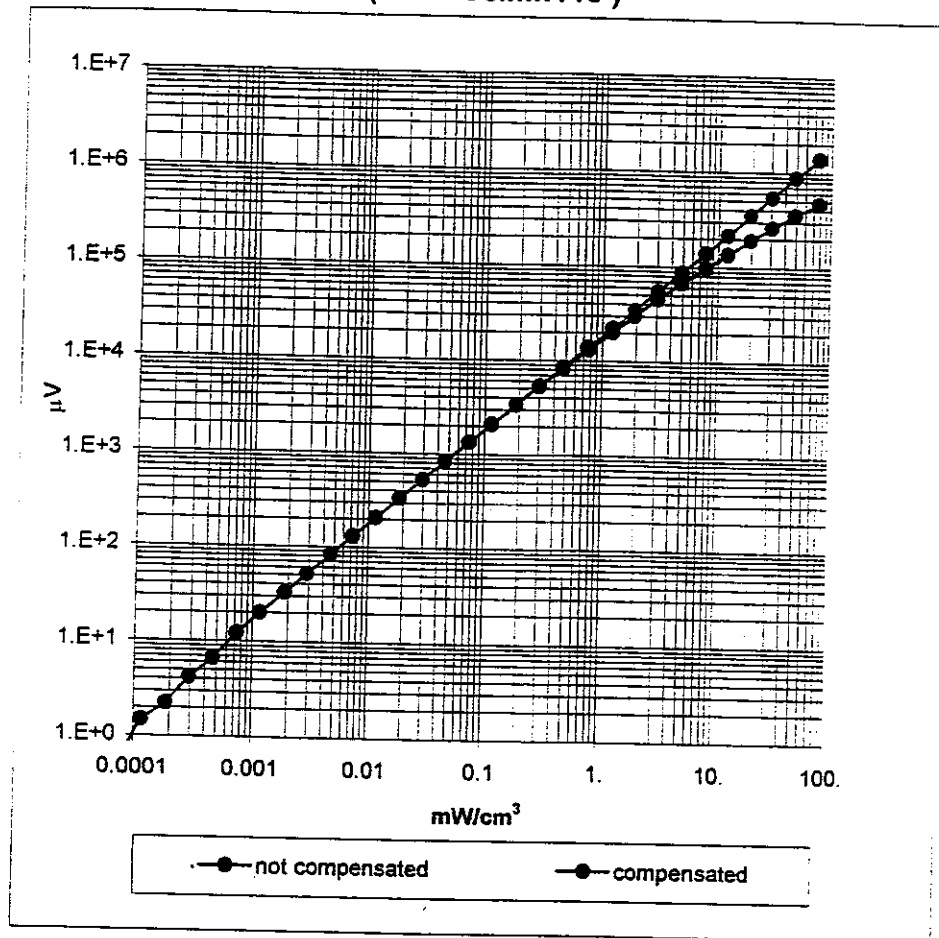


Conversion Factor Assessment

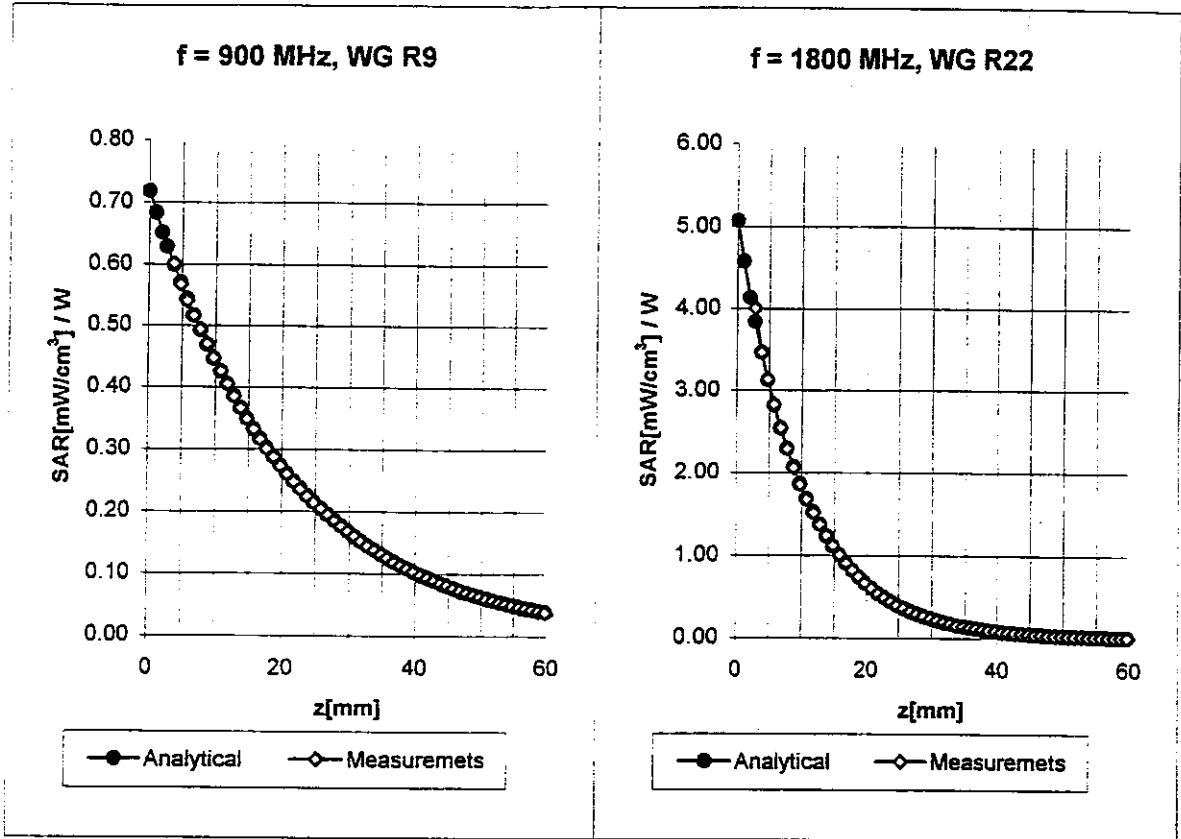


Receiving Pattern (ϕ)

(in brain tissue, z = 5 mm)

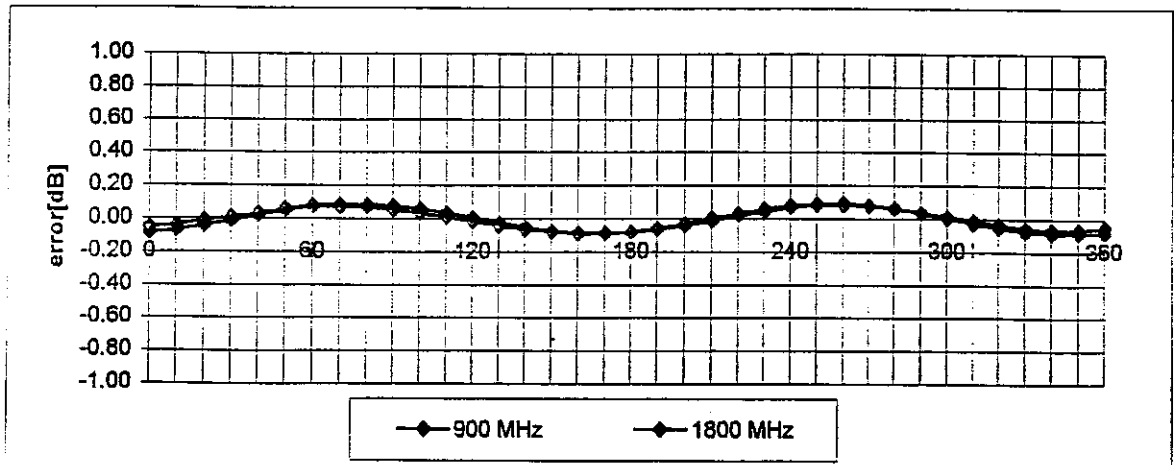


EUT'S PHOTOGRAPHS



EUT'S PHOTOGRAPHS



EUT'S PHOTOGRAPHS

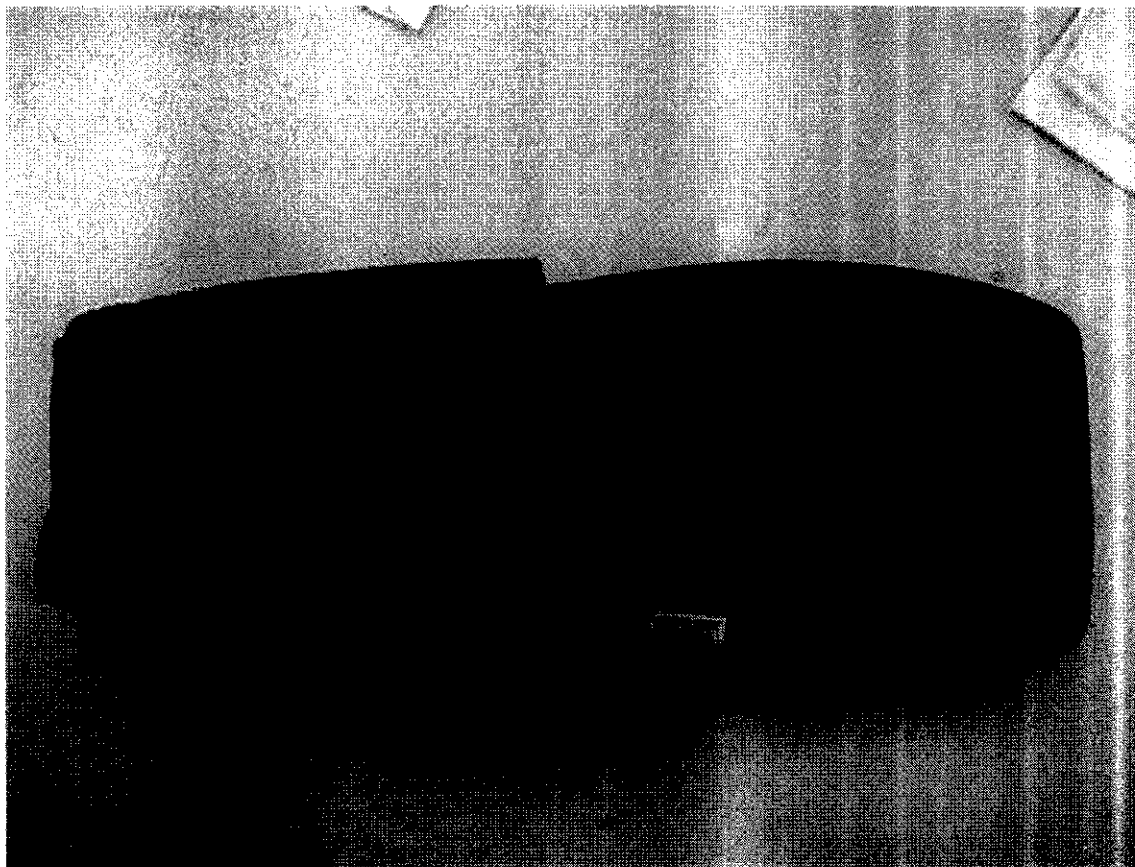

EUT'S PHOTOGRAPHS

