

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0


SAR (1g): 0.108 mW/g, SAR (10g): 0.0619 mW/g

SYMBOL 1900MHz.. PCS/GSM Data Terminal Model: PDT7537

Channel: 512 [1850.2MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 30.0 dbm; Spacing = Touch LCD side of EUT to flat phantom, With Holster/No BeltClip

Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

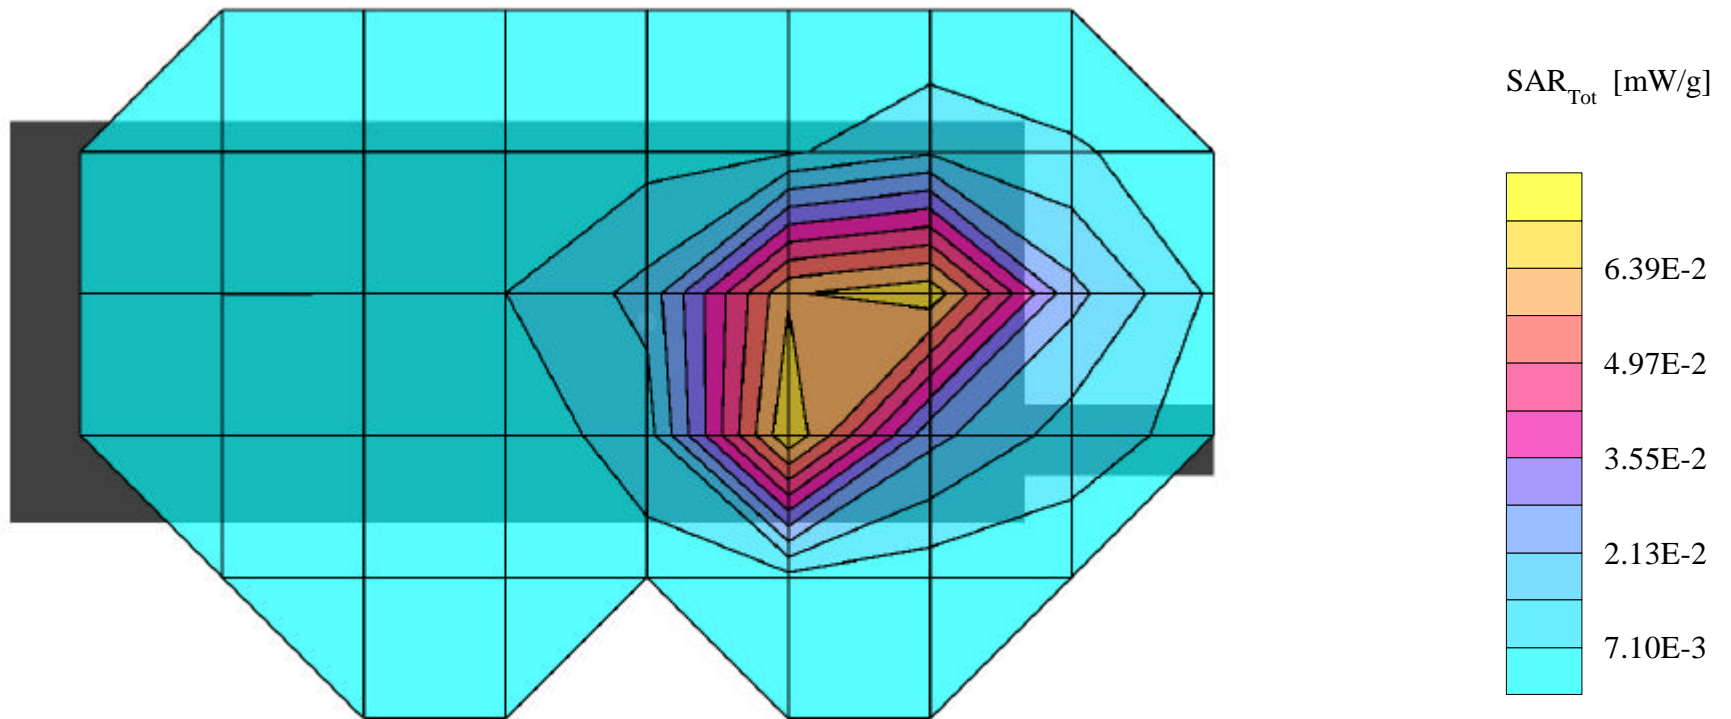

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR


SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0

SAR (1g): 0.114 mW/g, SAR (10g): 0.0606 mW/g

SYMBOL 1900MHz.. PCS/GSM Data Terminal Model: PDT7537

Channel: 661 [1880.0MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C
Conducted Power = 30.0 dbm; Spacing = Touch LCD side of EUT to flat phantom, With Holster/No BeltClip
Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

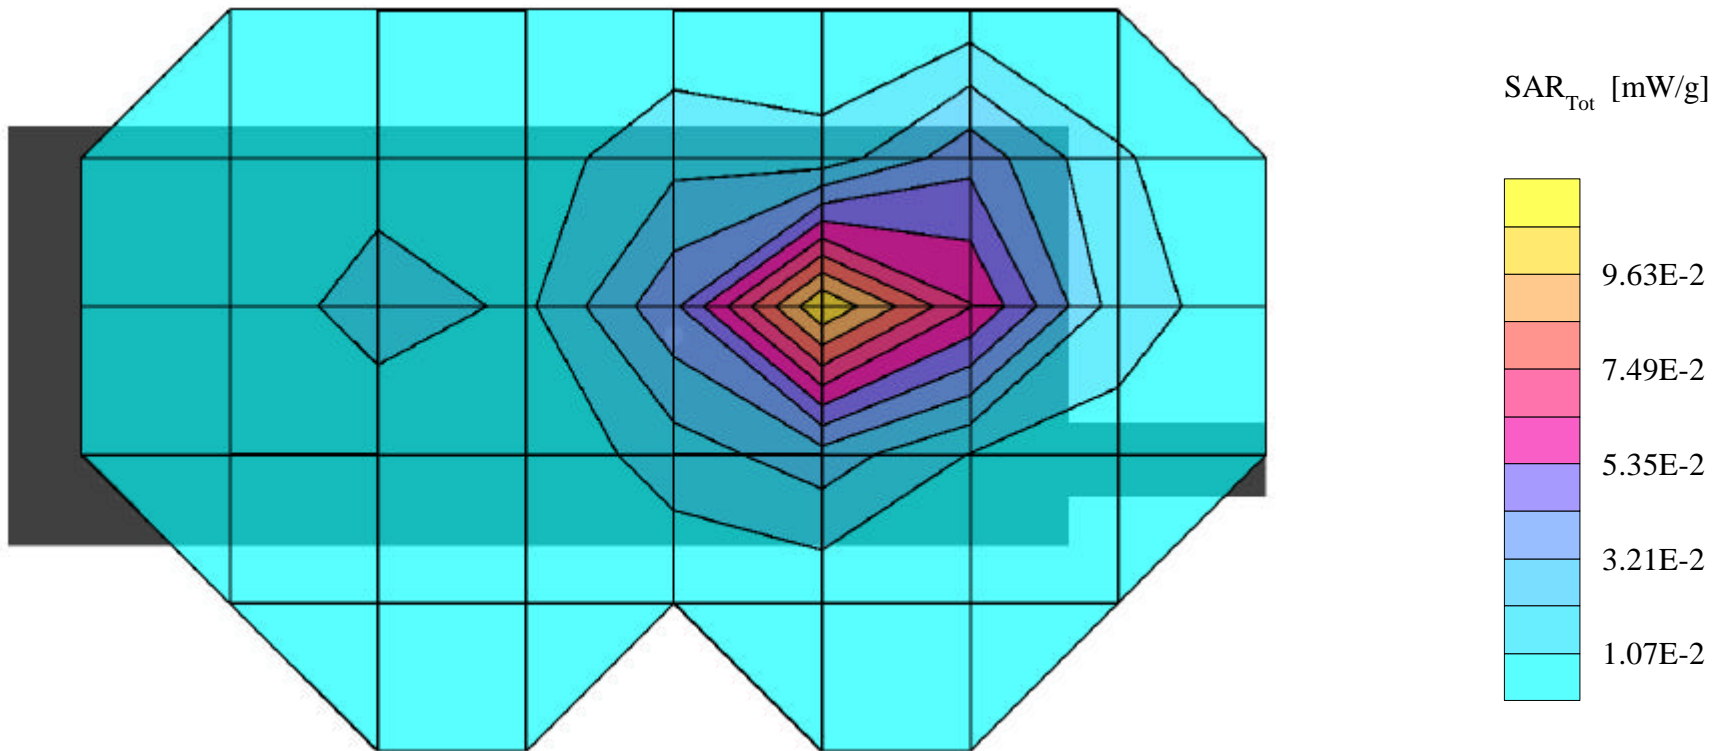

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR


SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0

SAR (1g): 0.109 mW/g, SAR (10g): 0.0640 mW/g

SYMBOL 1900MHz.. PCS/GSM Data Terminal Model: PDT75371

Channel: 810 [1909.8MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C
Conducted Power = 30.0 dbm; Spacing = Touch LCD side of EUT to flat phantom, With Holster/No BeltClip
Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

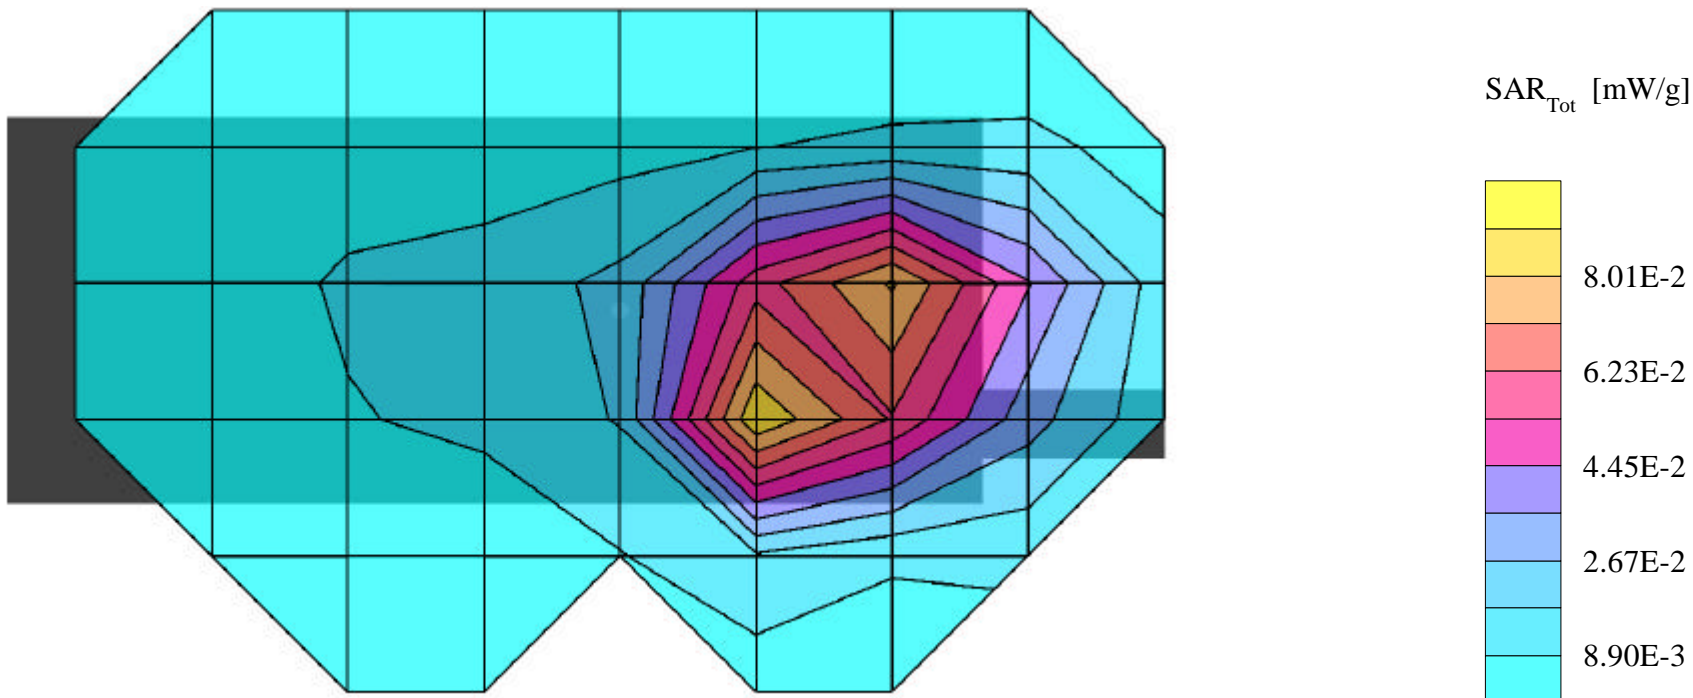

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0


SAR (1g): 0.161 mW/g, SAR (10g): 0.0923 mW/g

SYMBOL 1900MHz. PCS/GSM Data Terminal Model: PDT7537

Channel: 512 [1850.2MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 30.0 dbm; Spacing = 0.5 cm. Touch Back side of EUT to flat phantom, With Holster/No BeltClip

Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

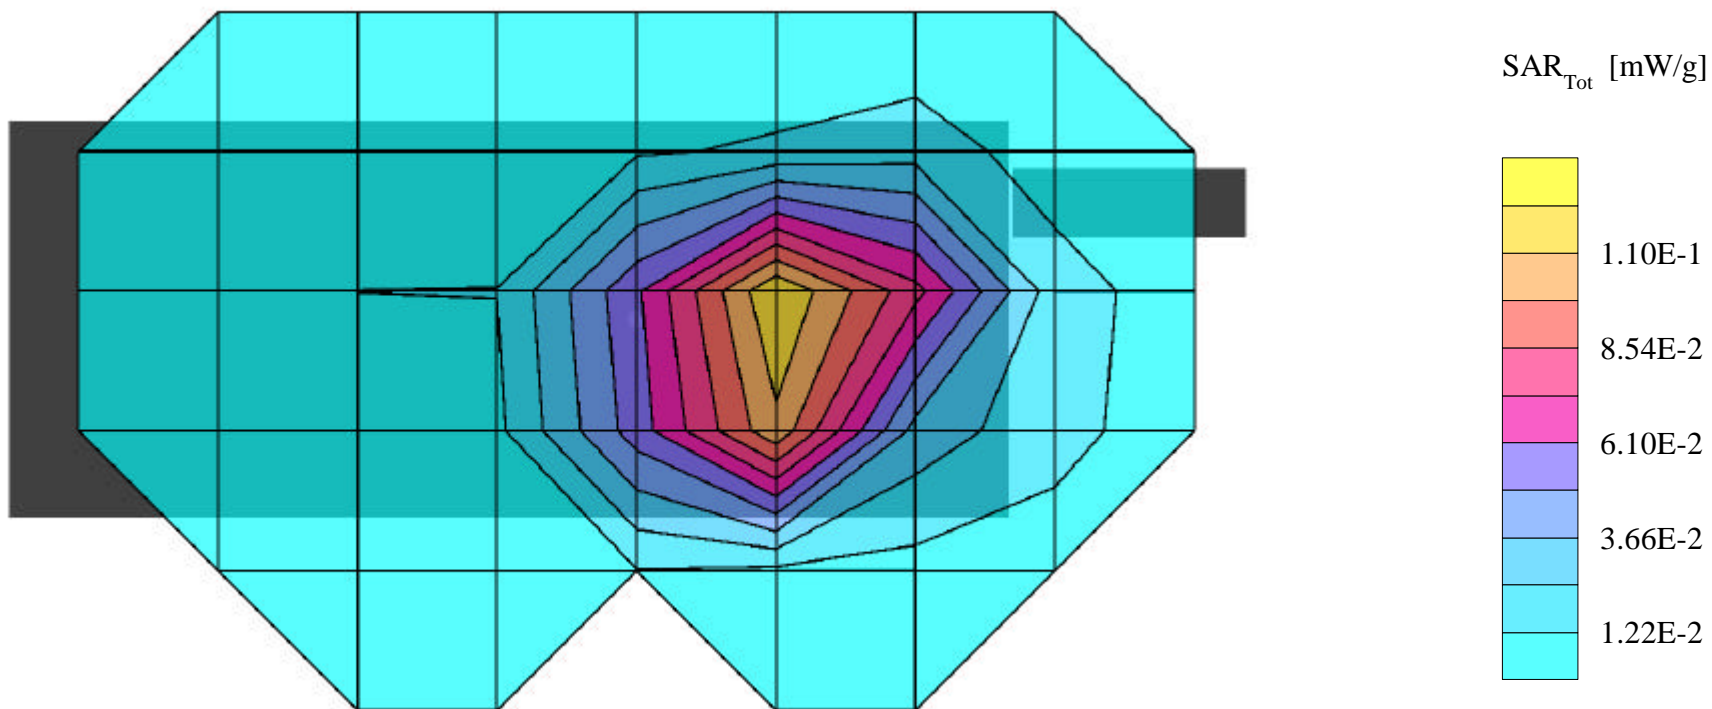

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0


SAR (1g): 0.165 mW/g, SAR (10g): 0.0901 mW/g

SYMBOL 1900MHz. PCS/GSM Data Terminal Model: PDT7537

Channel: 661 [1880.0MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 30.0 dbm; Spacing = 0.5 cm. Touch Back side of EUT to flat phantom, With Holster/No BeltClip

Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

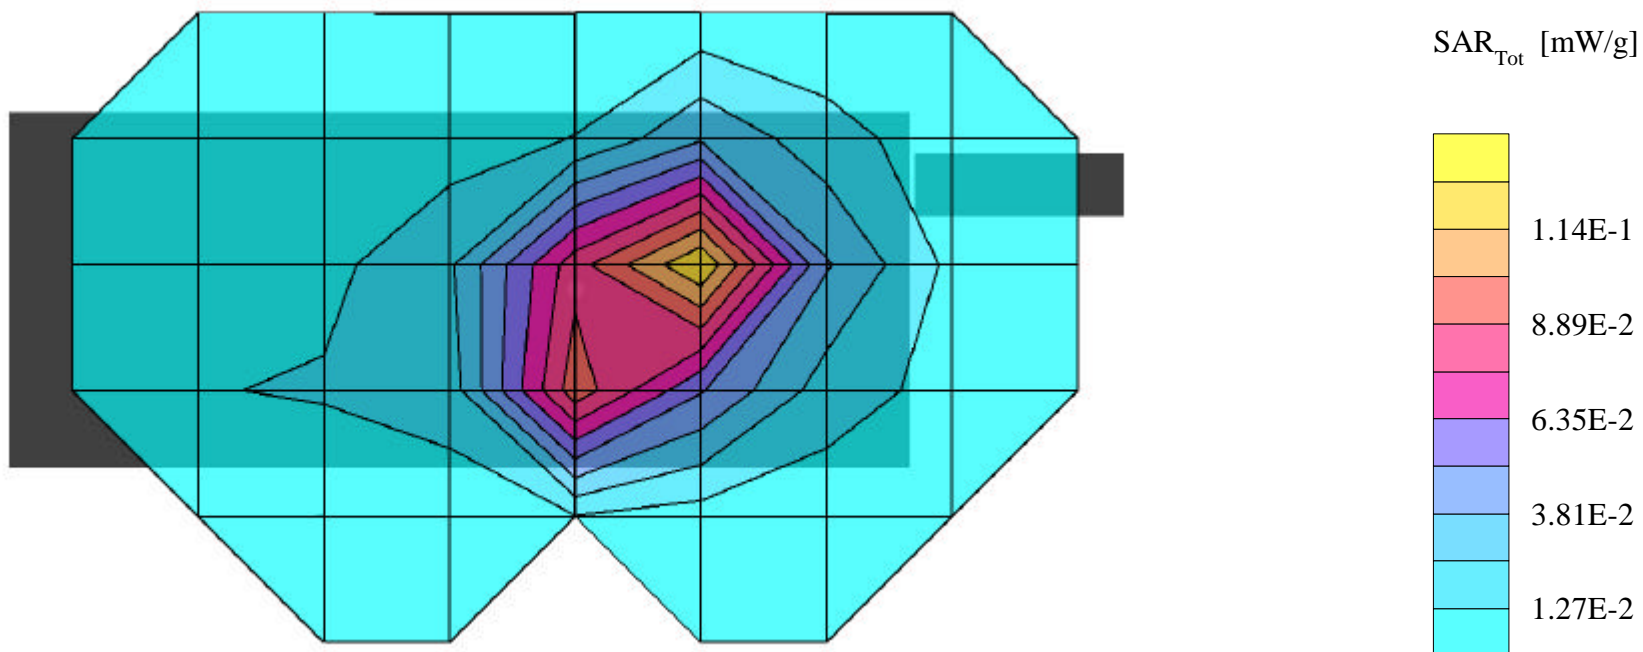

SYMBOL Technologies FCC ID: H9PPDT7537 1900MHz. Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54$ mho/m $\epsilon_r = 53.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 8.0


SAR (1g): 0.165 mW/g, SAR (10g): 0.0936 mW/g

SYMBOL 1900MHz. PCS/GSM Data Terminal Model: PDT7537

Channel: 810 [1909.8MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 30.0 dbm; Spacing = 0.5 cm. Touch Back side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

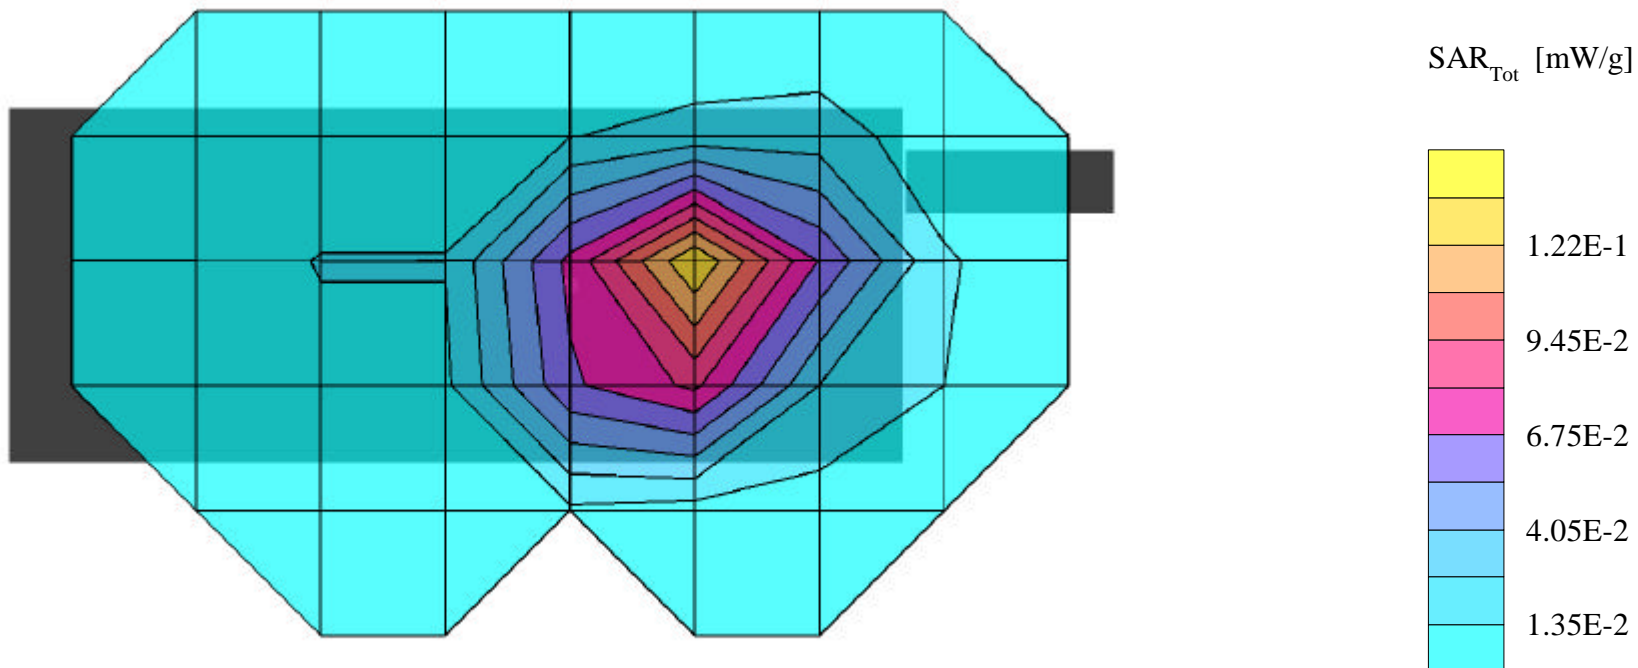

SYMBOL Technologies Inc. FCC ID: H9PPDT7537 -- 1900MHz. Body SAR

SAM Phantom; Flat Section; Probe: ET3DV6 - SN1677; ConvF(4.90,4.90,4.90)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.54 \text{ mho/m}$ $\epsilon_r = 53.9$ $\rho = 1.00 \text{ g/cm}^3$; Antenna Position -- Out; Crest Factor 8.0

SAR (1g): 0.165 mW/g, SAR (10g): 0.0936 mW/g

SYMBOL 1900MHz. PCS/GSM Data Terminal Model: PDT7537

Channel: 810 [1909.8MHz] ; Standard Battery; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 30.0 dbm; Spacing = 0.5 cm. Touch Back side of EUT to flat phantom, No Holster/No BeltClip

Test Date -- 07/01/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

